

1. Mat's/材質: 50μ White Polyester +Matt PP(able to print)+Adhesive:Acrylic (Embossed)
50番白色PET+可打印霧膜+格子膠

3.Dimensions/尺寸: 141.5x53.5mm
Tolerance/公差: $\pm 0.2\text{mm}$

Housing label (FGA2230TCH)				
Label dimensions	141.5x 53.5mm			
Category	Housing label			
Position	Back side Cover of the plastic housing, in the space foreseen surface			
Text	Technicolor	FGA2230TCH 2.4 GHz Network Name : 5 GHz Network Name : Wireless Key: 1234ABCDEF Accesskey: GPON SN:TMBBXXXXXXX	GPON SN: SN: DV: MAC: ACCESS KEY: Made in China. Rated Input :	Technicolor Delivery Technologies 25 rue d'Hauteville,75010 France
Font	Consolas(Bold)	Consolas(Bold)	Consolas(Bold)	
Text Heights	4mm	2.5mm	2.0mm	1.8mm
Logo	CE	Recycle	WIFI	
Height	8mm	8mm	8mm	
Color	Black			
Linear Barcode:	Code 93			
Symbology	Needs ≥ 5mm space (quiet zone) in front and back of each barcode			
Height	5.0mm			
Narrow bar width:				
All	2 digits, 2 dots / 0.17mm / 16.67 cpi			
Space Correction	0			



The diagram shows a cross-section of a material with four distinct layers. From top to bottom, the layers are labeled: Ink (a thin dark grey layer), Material (a thin dark grey layer), Adhesive (a thin white layer), and paper (a thick white layer). Arrows point from the labels to their respective layers. A box labeled 'Material Made' is positioned to the left of the layers.

Roll direction
卷紙方向

H 2 mm

3 mm

Cut dashed
切虛線

Release paper
離型紙

Roll form packaging
包裝方式: 卷狀外觀

Outer diameter of the paper roll
紙張外直徑: 317.62mm

Outer diameter of the paper roll
紙張外直徑: <8"(203mm)

Inner diameter
紙張內直徑: <8"(203mm)

**Printing with high temperature
配合高溫碳帶打印使用

* 請注意紫色為刀模線，非印刷內容。
Notes: Label purple frame outline is shown for reference only and is not to be printed.

Technical drawing of the Technicolor Delivery Technologies logo and product specifications. The drawing shows a rectangular logo with a purple border. The logo contains the text "technicolor" in a stylized font, with a red horizontal line and the word "4mm" below it. To the right of the logo is a circular icon with a stylized "S" and the text "SOUNDSETUP" below it. To the right of the icon is a red horizontal line and the text "8mm". Below the logo and icon is a red horizontal line and the text "8mm".

141.5mm

53.5mm

technicolor 4mm

SOUNDSETUP 8mm

8mm

Technicolor Delivery Technologies
8-10 rue du Renard, 75004, Paris
Made in China
Rated Input: 12V 2.5A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CE Wi-Fi CERTIFIED

The diagram illustrates the printing positions and dimensions for the Technicolor FGA2230TCH2 device. The device is shown with a purple border. Dimensions are indicated by blue arrows and red text: a total width of 141.5mm, a top margin of ≥5mm, a bottom margin of ≥5mm, a left margin of 0.5mm, a right margin of 4mm, and a height of 53.5mm. Printing positions are marked with red lines and text: 4mm from the top edge, 2mm from the left edge, and 53.5mm from the bottom edge. The device features four green barcodes with the following text: GPON SN: TMBBXXXXXXX, SN: CPXXXXXXX, DV: 6236962A, and MAC: XXXXXXXXXX. The device is labeled with 'technicolor' and 'Model: FGA2230TCH2'. It also displays network information: 2.4 GHz Network Name: TNCAP231E17, Wireless Key: EJ9Mq3mrJLJ7L7ppZnsz, 5 GHz Network Name: TNCAP231E1F, and Wireless Key: zbfxx3FNCsK9t9T27A2a. The device includes an antenna with a 'SETUP' button and a serial number '1234-5678'. The device is labeled with 'ACCESS KEY: FMAzk4M23yeZdX2AnLEy' and 'FCC ID: G95FGA2230'. The device is labeled with 'Technicolor Delivery Technologies', '8-10 rue du Renard, 75004, Paris', 'Made in China', and 'Rated Input: 12V 2.5A'. The device is labeled with 'This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.' The device is labeled with 'FCC', 'CE', and 'Wi-Fi CERTIFIED' logos.

Printing position for factory
工廠印刷位置
Printing color: B075 (no pantone)

Dimensions: 141.5mm, ≥5mm, 0.5mm, 4mm, 2mm, 53.5mm

GPON SN: TMBBXXXXXXX
SN: CPXXXXXXX
DV: 6236962A
MAC: XXXXXXXXXX

technicolor Model: FGA2230TCH2

2.4 GHz Network Name: TNCAP231E17
Wireless Key: EJ9Mq3mrJLJ7L7ppZnsz
5 GHz Network Name: TNCAP231E1F
Wireless Key: zbfxx3FNCsK9t9T27A2a

ACCESS KEY: FMAzk4M23yeZdX2AnLEy FCC ID: G95FGA2230

Technicolor Delivery Technologies
8-10 rue du Renard, 75004, Paris
Made in China
Rated Input: 12V 2.5A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CE Wi-Fi CERTIFIED

141.5mm

53.5mm

GPON SN: TMBBXXXXXXXXX

SN: CPXXXXXXXXXX

DV: 6236962A

MAC: XXXXXXXXXXXX

technicolor Model: FGA2230TCH2

2.4 GHz Network Name: TNCAP231E17
Wireless Key: EJ9Mq3mrJLJ7L7ppZnsz

5 GHz Network Name: TNCAP231E1F
Wireless Key: zbfRx3FNCsK9t9T27A2a

ACCESS KEY: FMAzk4M23yeZdX2AnLey FCC ID: G95FGA2230

Technicolor Delivery Technologies
8-10 rue du Renard, 75004, Paris
Made in China
Rated Input: 12V 2.5A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CE Wi-Fi CERTIFIED


ITEM	PART NAME			PART NO.	Q'TY/SET	MATERIAL (SPEC.)	REMARK		
MATERIAL (SPEC.)					PEGATRON Corporation DESCRIPTION				
see notes									
SELECT	V			UNIT	SIZE	Rating Label			
DIM.(mm)	TOL.	A	B	EXTRA	MM			1:1	
~50	±	0.05	0.10		DATE				
51~100	±	0.10	0.20		20191023				
101~150	±	0.20	0.30						
151~	±	0.20	0.50				MODEL NO.	DRAWING NO.	
							FGA2230	PARTS NO. 1510-XXXXXXX	
							DESIGNED	CHECKED	APPROVED
							Fanner	Jeacol	Andy

NOTES:

1. Mat's/材質: 80g銅版紙
2. COLORS: BACKGROUND: WHITE
TEXT AND GRAPHICS: Black
3. Dimensions/尺寸: 76*45mm
Tolerance/公差: ±0.2mm

NOTE:

- 1.All fonts under barcode: Consolas,(actual)height:2mm
except"FGA2230TCH" & "DV :6236962A " under Technicolor logo is 2.4mm
- 2.All barcode: code 39,barcode height:4mm
narrow bar width:0.21,ratio:2
- 3.There must be a blank after":"
- 4."FGA2230TCH" & "DV :6236962A: is fixed text.
- 5.SN: follow definition of production label
6. FG:FGA2230TCH is a fixed text.
- 7.MAC : follow definition of production label
- 8.Technicolor
"Technicolor" is a fixed logo
Logo size are 4mm.
- 9.GB dimension:76*45mm.
10. All barcodes and text must have on left and right side a clearance of
5 mm from border or other info.
11. Barcode text is standard under the barcode, right aligned, height is
2mm, space between barcode and text is 0,5 mm.
12. Barcode checksum character should only be present when explicitly
mentioned.

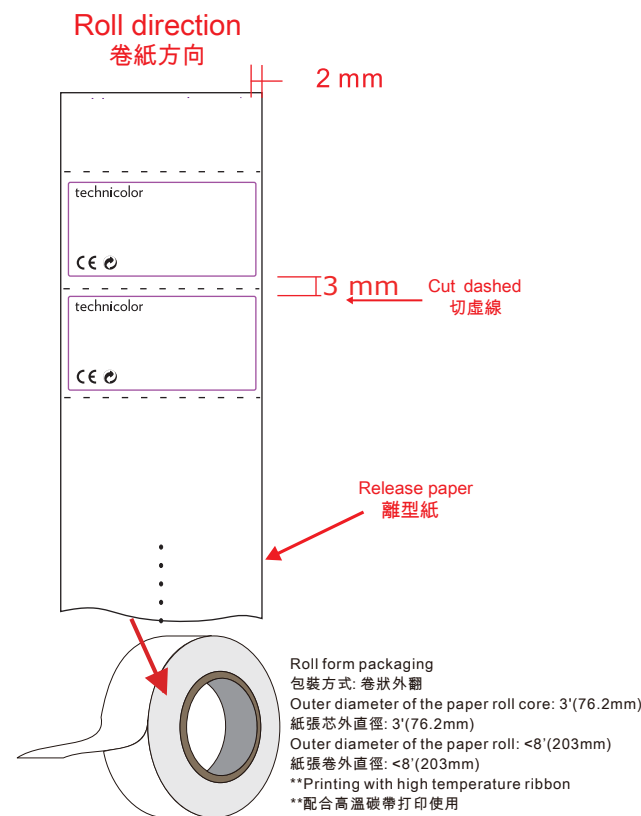


D		C		B		A	
REV.	LTR	DATE	UPDATE	DESCRIPTION	REMARK	SIGN	APPROVER


Scale 1:1

Printing Content for supplier
供應商印刷內容


Printing color: Black C  Black C

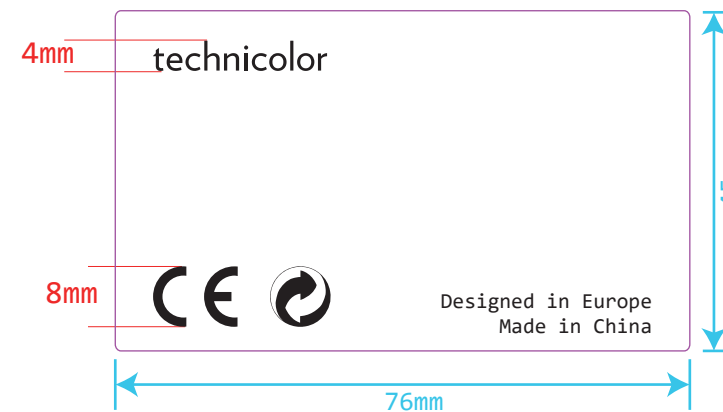

Printing position for factory:
工廠印刷位置:

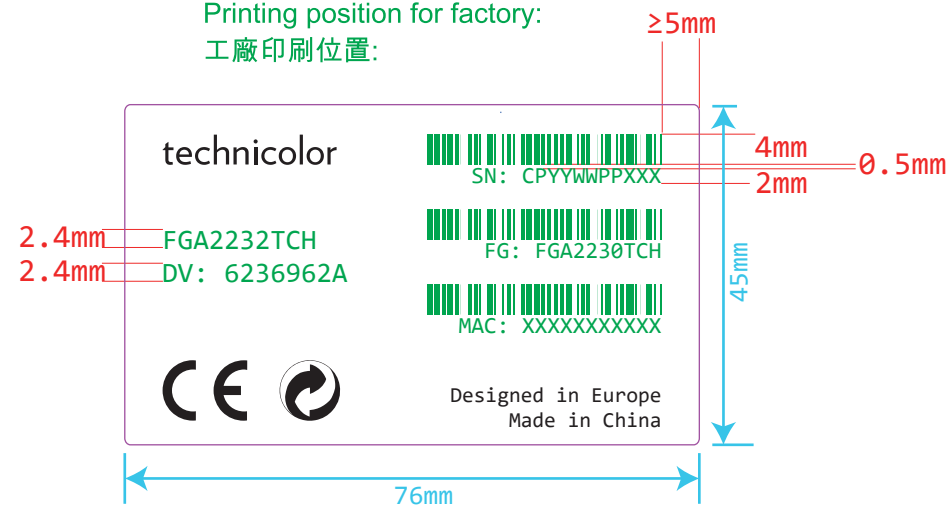

成品效果圖

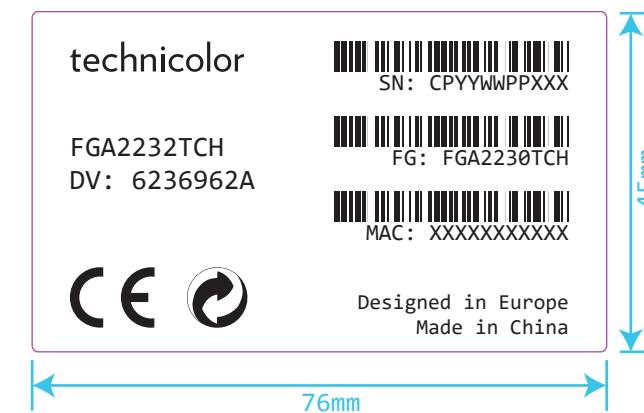


* 請注意紫色為刀模線，非印刷內容。


Notes: Label purple frame outline is shown for reference only and is not to be printed.

MATERIAL STRUCTURE				REMARK				ITEM	PART NAME		PART NO	Q'TY/SET	MATERIAL (SPEC.)	REMARK																																													
Material Made 				1.  SYMBOL MEANS IMPORTANT SIZE. 2.  SYMBOL MEANS IMPORTANT ITEM. 3.  SYMBOL MEANS ILLUSTRATE. 4. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SPT-00001; SPT-00002 (WHEN SPECIFIED FOR HALOGEN FREE/ LOW HALOGEN) ISSUED BY PEGATRON. 5.  CUT LINE.				MATERIAL (SPEC)						PEGATRON Corporation																																													
								see notes						DESCRIPTION																																													
								<table><tr><td>SELECT</td><td>v</td><td></td><td></td><td></td><td>UNIT</td><td>SIZE</td></tr><tr><td>DIM.(mm)</td><td>TOL.</td><td>A</td><td>B</td><td>EXTRA</td><td>MM</td><td>1:1</td></tr><tr><td>~50</td><td>±</td><td>0.05</td><td>0.10</td><td></td><td>DATE</td><td></td></tr><tr><td>51~100</td><td>±</td><td>0.10</td><td>0.20</td><td></td><td>20190730</td><td></td></tr><tr><td>101~150</td><td>±</td><td>0.20</td><td>0.30</td><td></td><td></td><td></td></tr><tr><td>151~</td><td>±</td><td>0.20</td><td>0.50</td><td></td><td></td><td></td></tr></table>						SELECT	v				UNIT	SIZE	DIM.(mm)	TOL.	A	B	EXTRA	MM	1:1	~50	±	0.05	0.10		DATE		51~100	±	0.10	0.20		20190730		101~150	±	0.20	0.30				151~	±	0.20	0.50				MODEL NO.		DRAWING NO.	
								SELECT	v				UNIT	SIZE																																													
								DIM.(mm)	TOL.	A	B	EXTRA	MM	1:1																																													
~50	±	0.05	0.10		DATE																																																						
51~100	±	0.10	0.20		20190730																																																						
101~150	±	0.20	0.30																																																								
151~	±	0.20	0.50																																																								
FGA2230		1510-XXXXXXX																																																									
DESIGNED		CHECKED		APPROVED																																																							
Fanner		Jeacol		Andy																																																							

NOTE:
1.All barcode: code 39,barcode height:4mm
 narrow bar width:0.21, ratio:2
 All fonts under barcode: Consolas, (actual)height:2mm
The text under barcode is RIGHT aligned.
2.There must be a blank after”:”
3.FG :FGA2230TCH” is fixed text. height:2.4mm
4.PFS: Product SN in the same carton
5.Date: Production date, eg:24 May 12=2012.05.24, height:2.4mm
6.QTY: Units Quantity in Box
7.BOX SN:
8.PLY SN: follow Pegatron pallet ID
9.Text and barcode need LEFT align
10.tenicolor logo:
 “Technicolor” is a fixed logo, size are 4mm.
11. All barcodes and text must have on left and right side a clearance of 5 mm from border or other info.
12. Barcode text is standard under the barcode, right aligned, height is 2mm, space between barcode and text is 0,5 mm.
13. Barcode checksum character should only be present when explicitly mentioned.

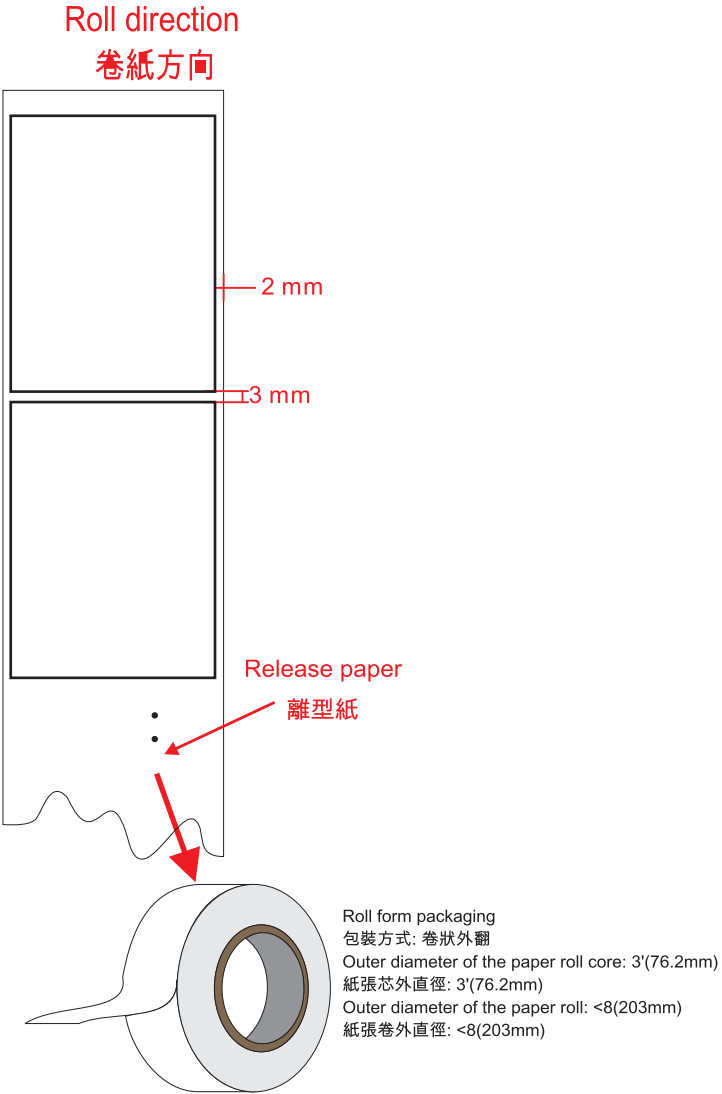


Supplier is not Printing
供應商不印刷

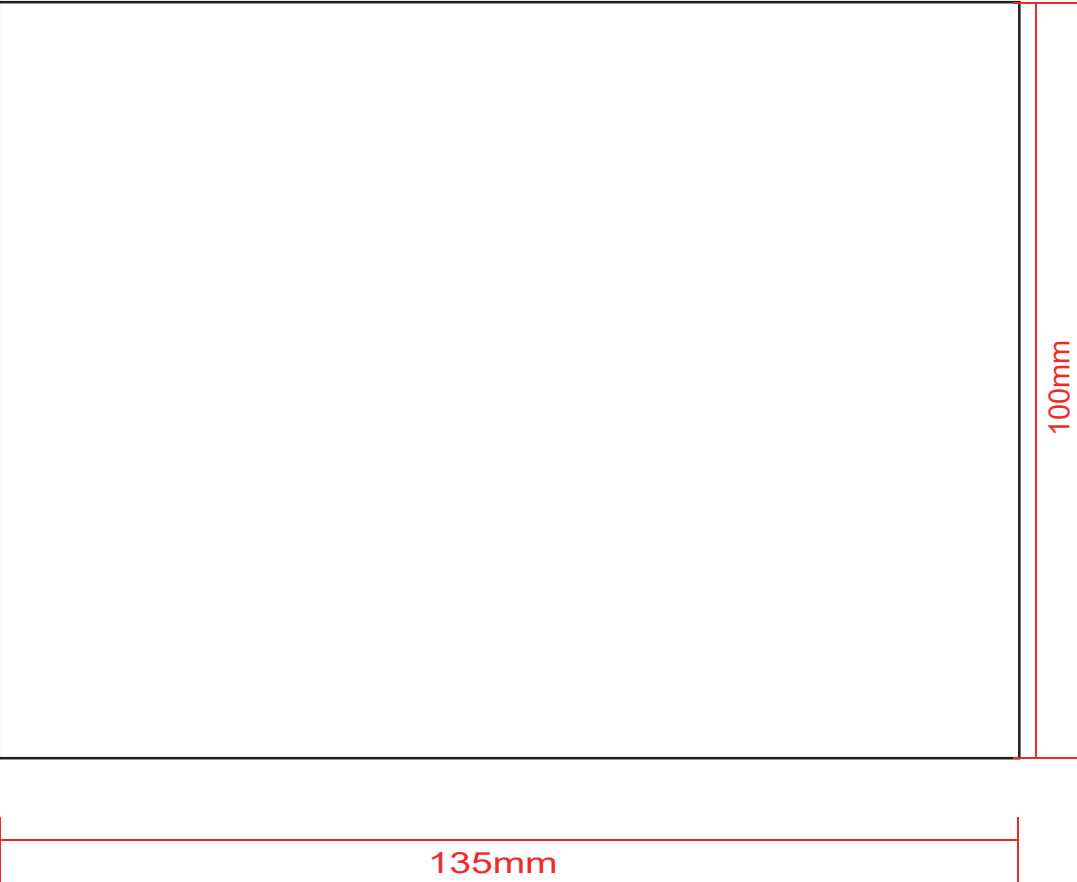

Scale 1:1

Printing position for factory:
工廠印刷位置:

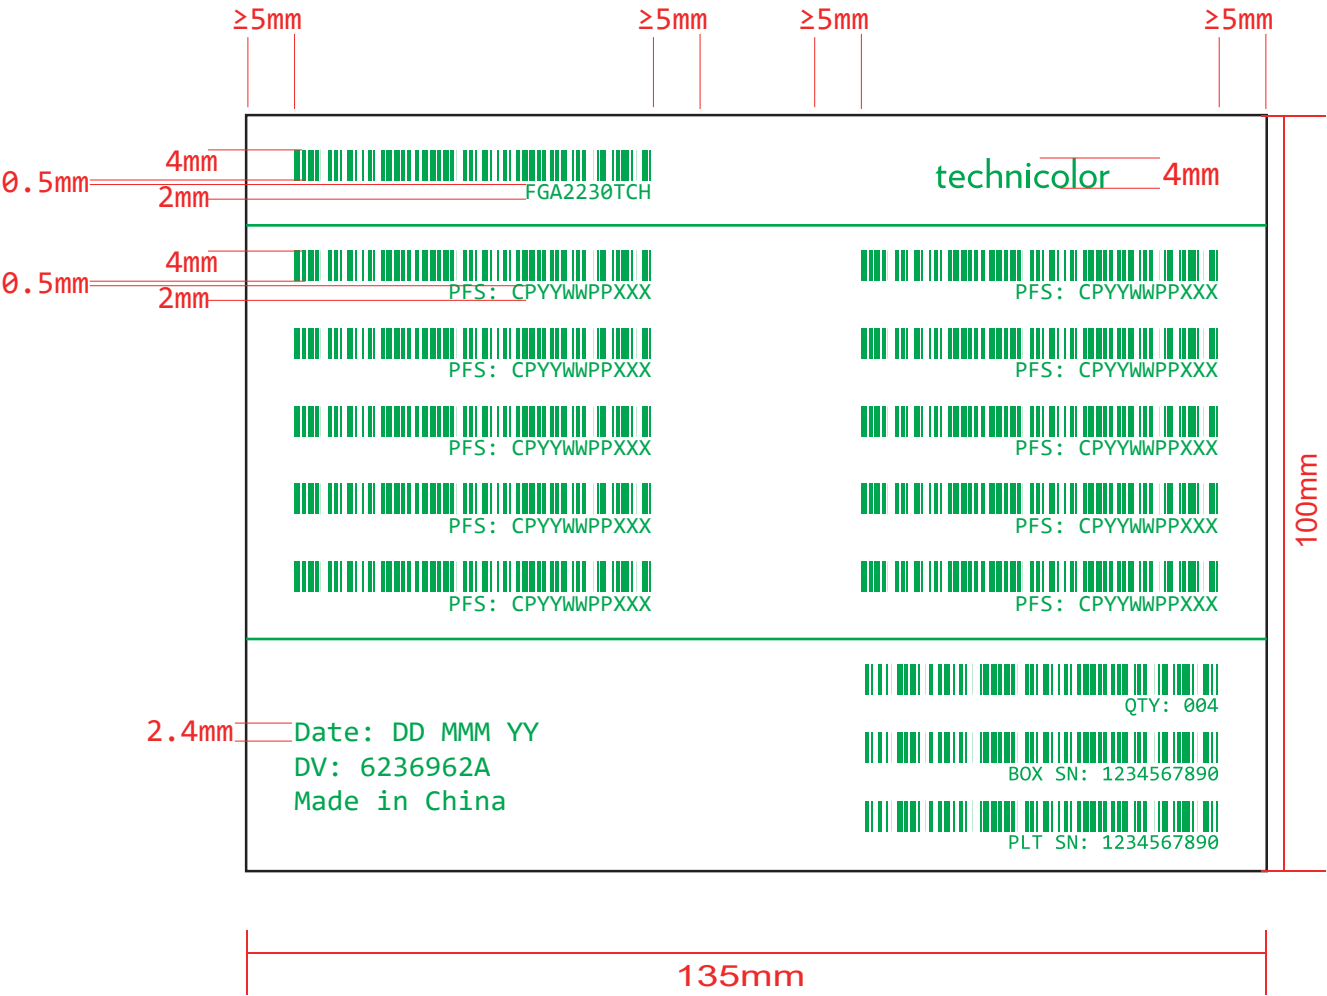


NOTE
Mats: 80g Art paper(80g銅版紙)
Dimensions: 135*100mm
Tolerance: ±0.2mm


ITEM	PART NAME					PART NO.		Q'TY /SET	MATERIAL (SPEC.)			REMARK			
MATERIAL (SPEC.)							QUANTITY /SET		PEGATRON Corporation						
80g Art paper (80g铜版纸)							1/1								
FINISH							SCALE		DESCRIPTION						
N/A							1:1								
SELECT v								EXTRA	UNIT	SIZE		CARTON LABEL FOR FGA2230			
DIM.	TOL.	A	B	C	MM	A4									
50	±	0.05	0.10	0.20	±0.2		DATE		MODEL NO.		DRAWING NO.				
50~100	±	0.10	0.20	0.30			20190730		FGA2230		PARTS NO. 1510-2BS9000				
100~150	±	0.20	0.30	0.40					DESIGNED		CHECKED				APPROVED
150	±	0.20	0.40	0.50					Fanner		Jeacol		Andy		

NOTE :

- 1.All fonts under barcode: Consolas,(actual)height:2mm
- 2.All barcode: code 39,barcode height:4mm
narrow bar width:0.21,ratio:2
- 3.There must be a blank after”:
- 4.FG :FGA2230TCH” is fixed text.
- 5.BOX SN: BOX Serial number
- 6.Pallet count: 1 of X
- 7.Date: Production date, eg:24 May 12=2012.05.24
8. QTY: BOX Quantity on pallet per layer
- 9.PLY SN: follow Pegatron pallet ID
10. DV :6236962A is fixed text.
- 11.Text and barcode need RIGHT align
- 12.tenicolor logo:
“Technicolor” is a fixed logo,
size are 4mm.
13. All barcodes and text must have on left and right side a clearance of 5 mm from border or other info.
14. Barcode text is standard under the barcode, right aligned, height is 2mm, space between barcode and text is 0,5 mm.
15. Barcode checksum character should only be present when explicitly mentioned.

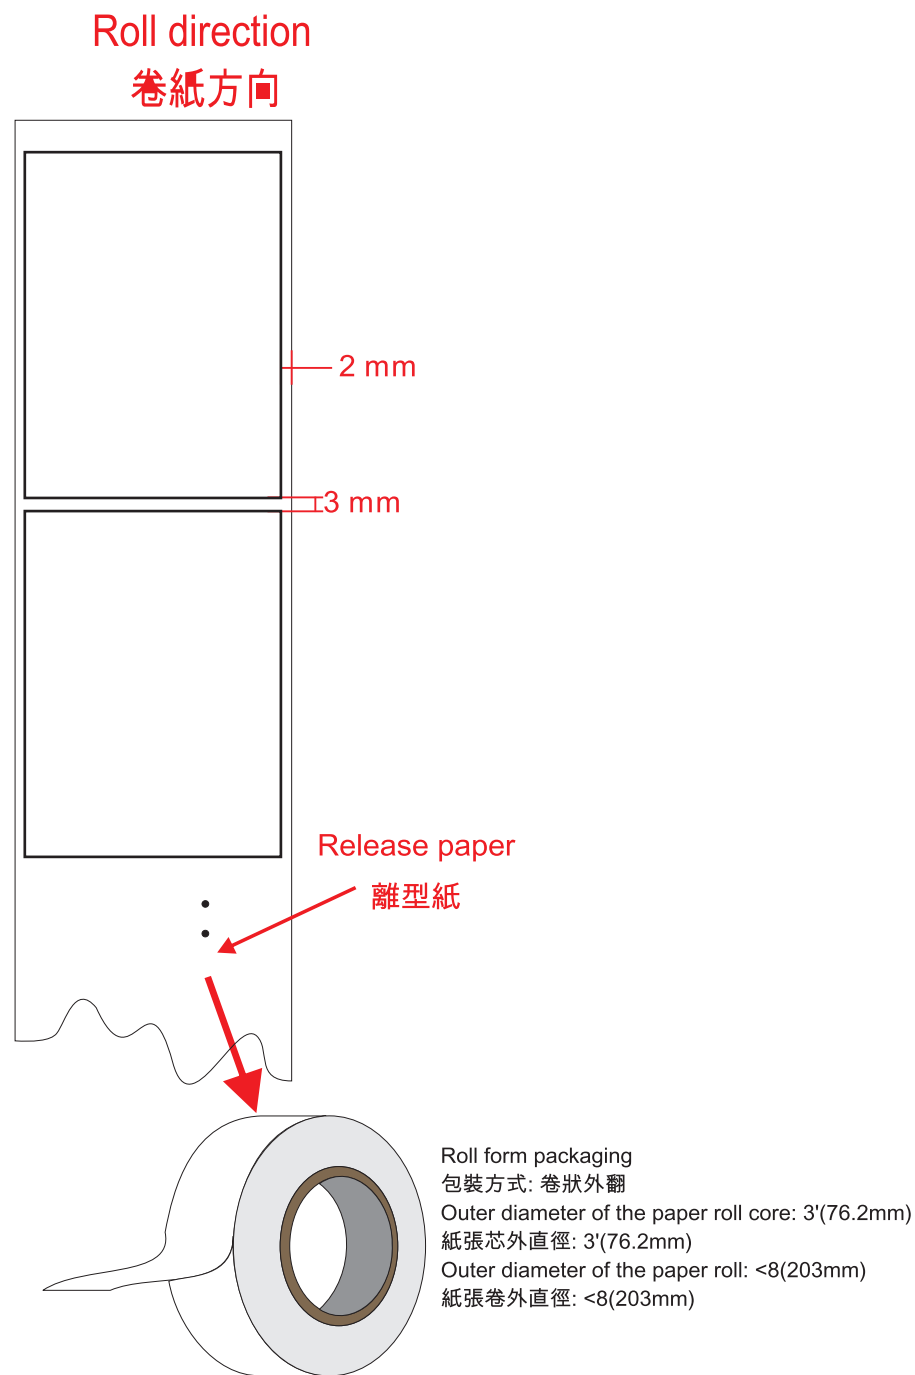


Supplier is not Printing
供应商不印刷



Scale 1:1

Printing position for factory:

工廠印刷位置:

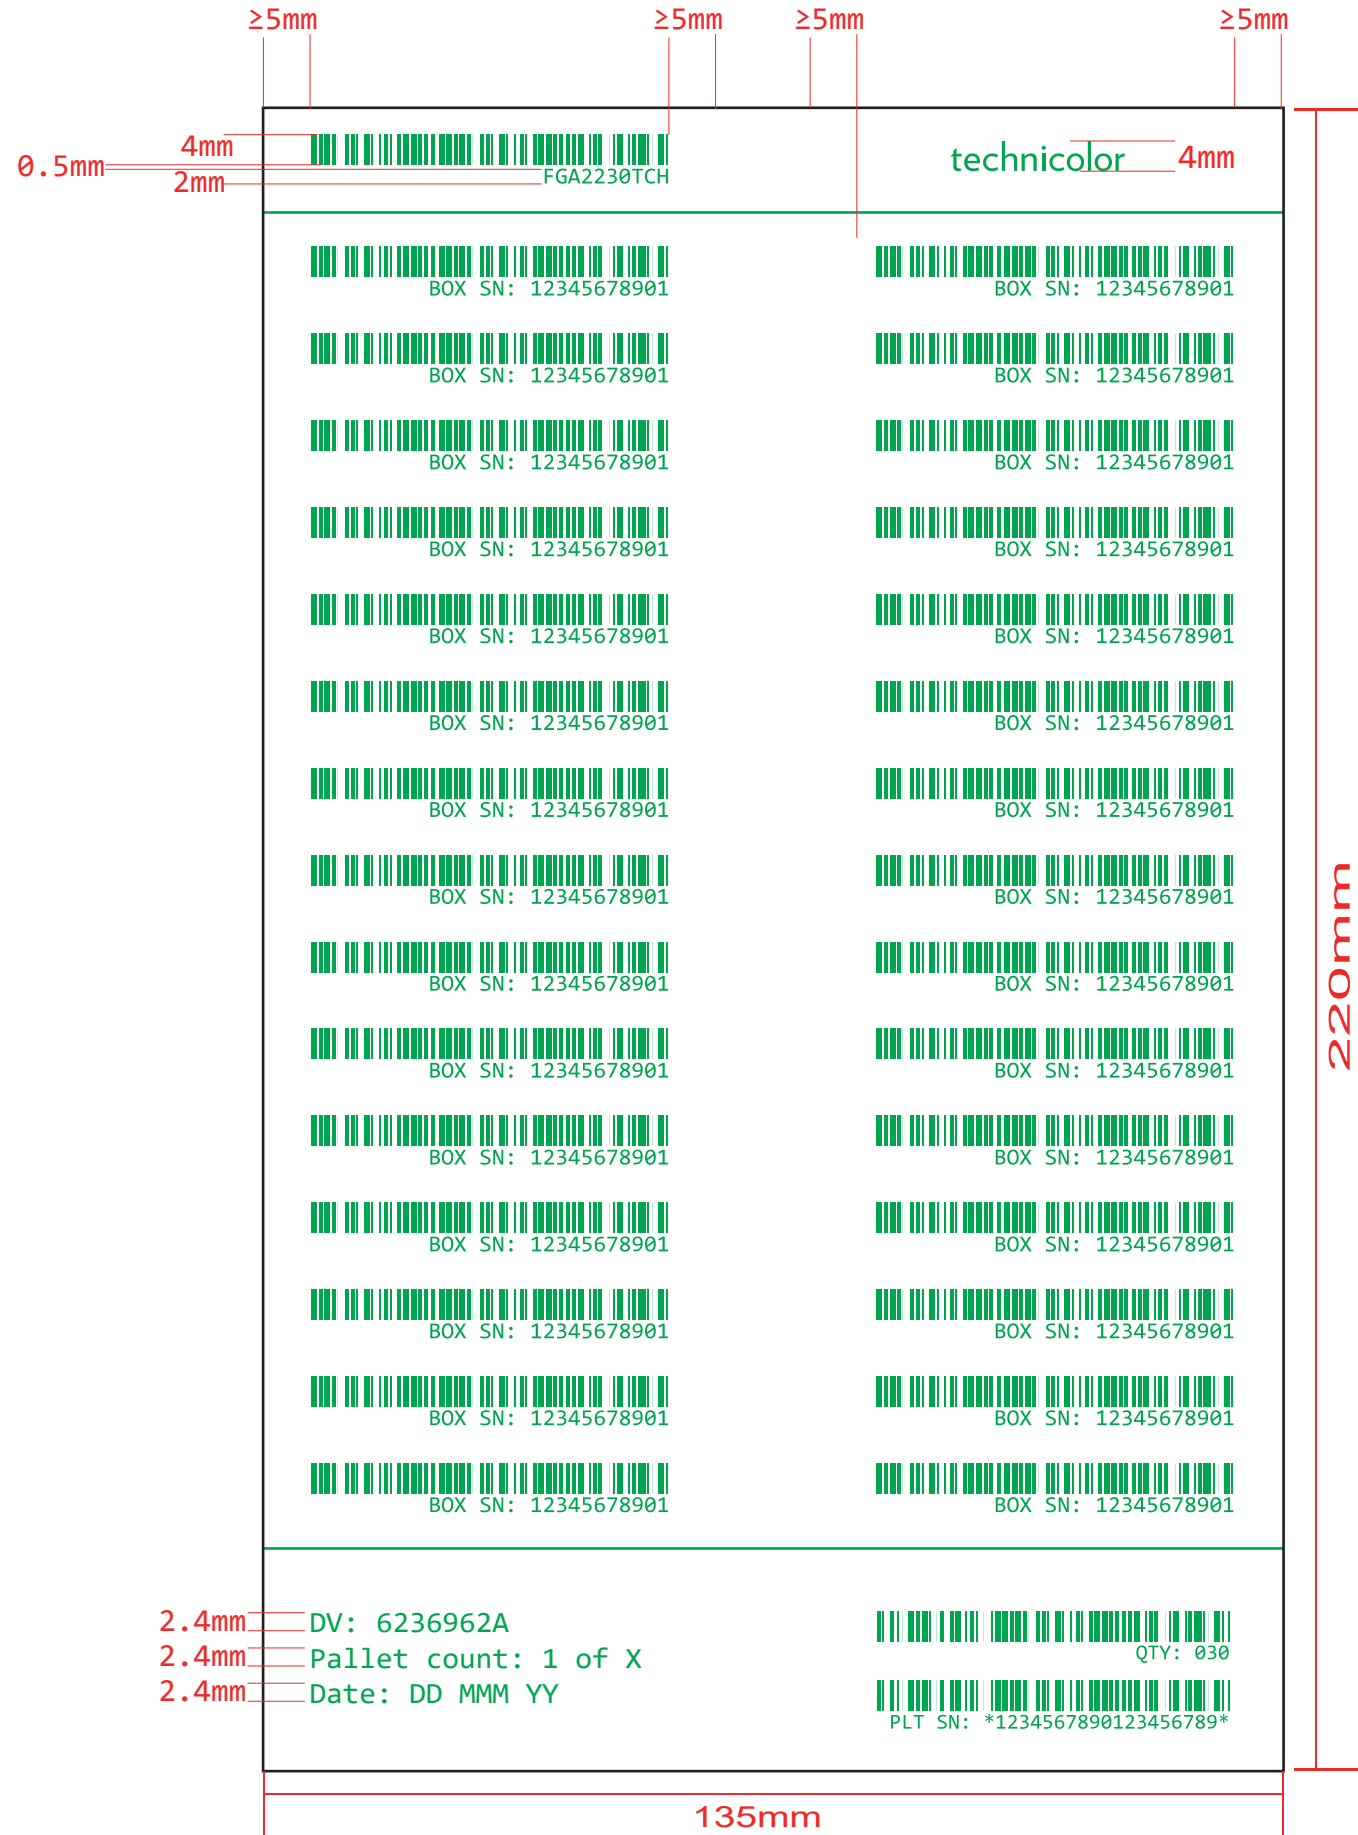

NOTE

Mats: 80g Art paper(80g銅版紙)

Dimensions: 135*220mm

Tolerance: $\pm 0.2\text{mm}$

ITEM					PART NAME					PART NO.					Q'TY /SET					MATERIAL (SPEC.)					REMARK									
MATERIAL (SPEC.)										QUANTITY /SET										PEGATRON Corporation														
80g Art paper (80g铜版纸)										1/1																								
FINISH										SCALE										DESCRIPTION														
N/A										1:1																								
SELECT v										EXTRA 																								

