



Quick Install Guide




Recommended wiring: 18/6 shielded for main device, and 18/4 shielded for optional Wiegand devices.


Items Included in Kit

1. Watchman Unit
2. 12 Volt DC Power Supply
3.  Magnetic Read Switch
4. **NOTE** Leave one key with the customer
5. Nuts **X 4**
6. Bolts **X 4**
7. Quick Install Guide
8. Activation & Test Process
9. Customer Information Packet


Watchman Unit

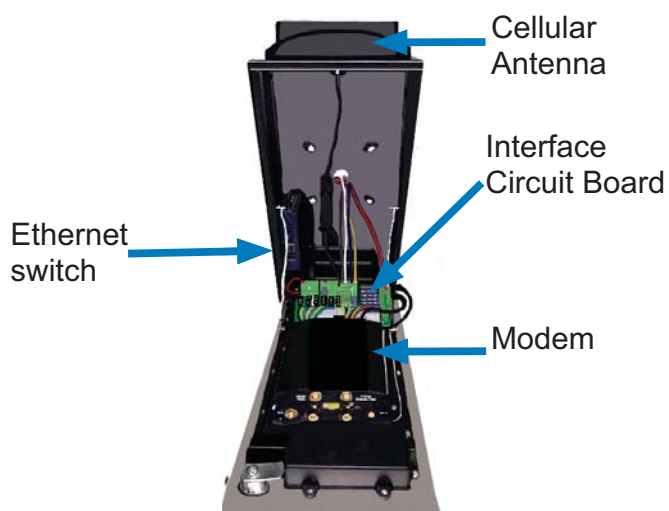


Power Supply Wiring

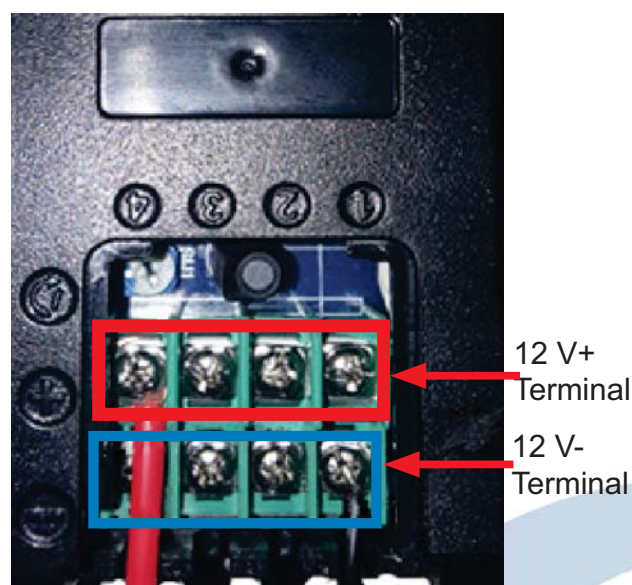

Interface Circuit Board (Oriented the same as the Watchman install)

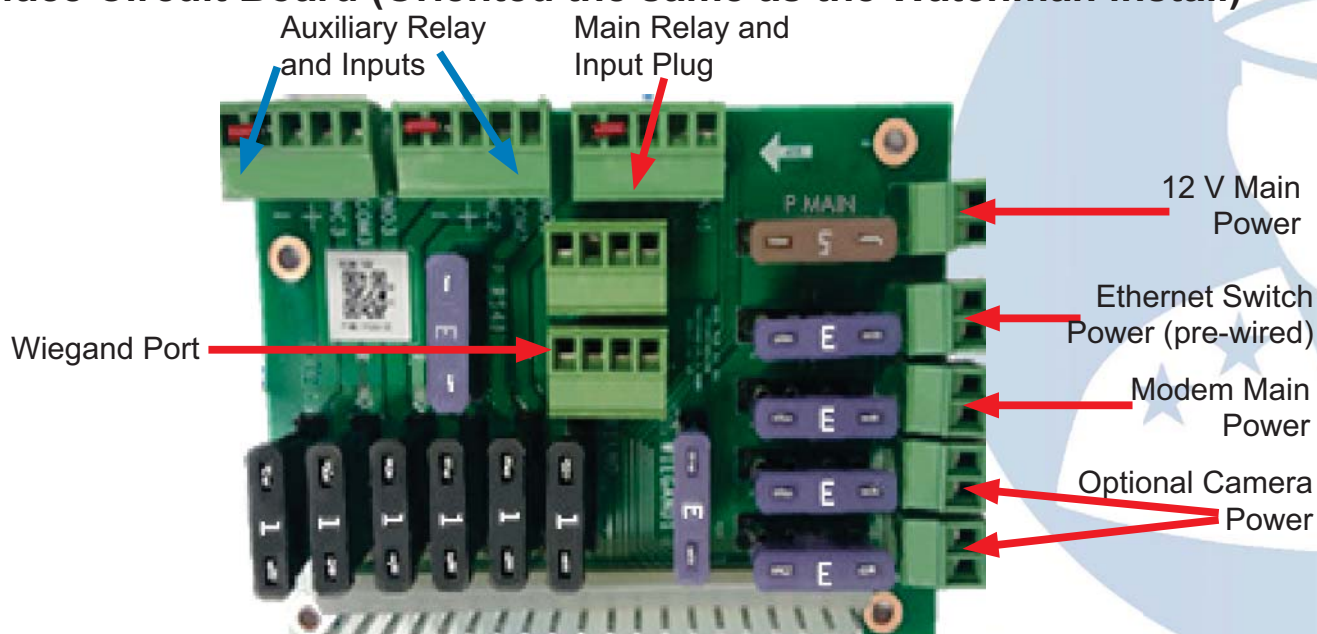

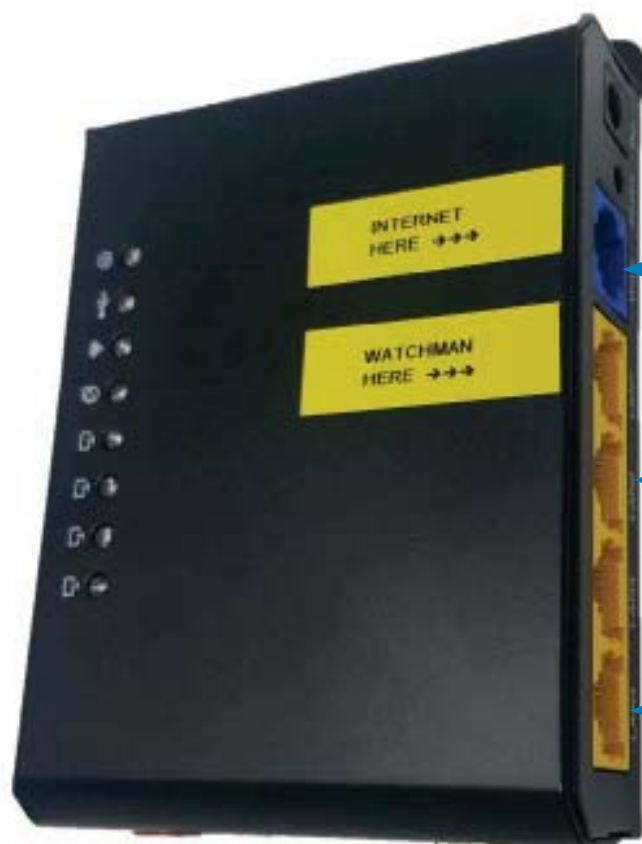

Plug customer internet into the blue port



Plug Watchman into any yellow port



Plug optional external cameras into any yellow port



18 ga stranded: up to 25 ft.
16 ga stranded: up to 50 ft.
12 ga stranded: up to 60 ft.



Interface Wiring Diagram

Oriented the same as the Watchman install

To Magnetic Switch or Dry Contact on Operator

Gray: Negative

White: Positive

3

To Gate Operator

Free Exit or Exit Terminal

Yellow: Positive

Blue: Common Ground

Normally Open Connection

2

Optional Wiegand 26-Bit Connection

Red: 12 V power

Black: Ground

Green: Data 0



White: Data 1

4

Main Power


12 V Input Power

1

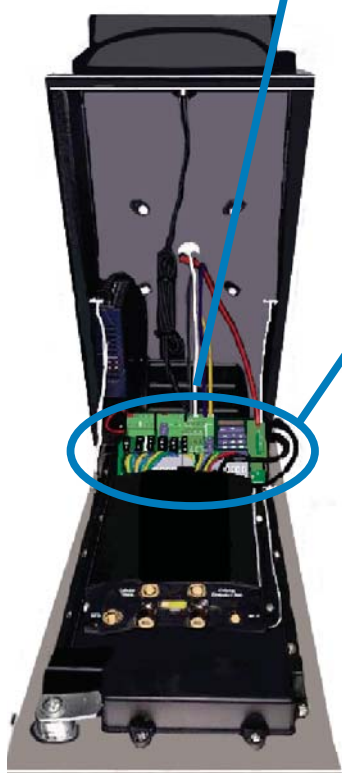
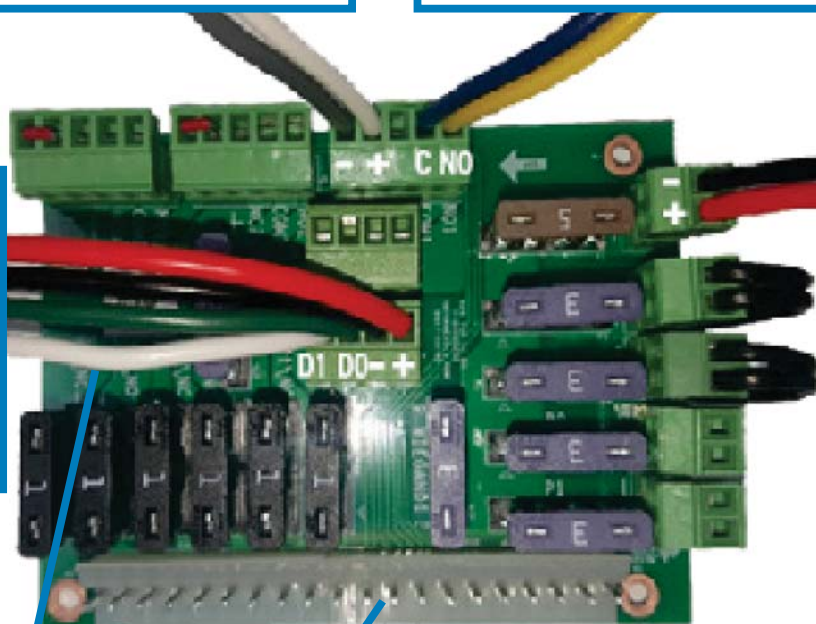


6-Wire Installation Instructions

1. Wire main power from the transformer to the power connector on the circuit board.
2. Connect gate trigger wires from the Normally Open (NO) and Common (C) to the free-exit or exit terminals on the gate operator.
3. Connect the gate status wires on the 6 pin connector on the main relay and input plug to the magnetic switch or a Dry Contact, Normally Closed (NC) relay on the gate operator.
4. If using an optional 26-bit reader (e.g., keypad, card reader, RFID, clicker), wire the device to the Wiegand connection on the interface circuit board.
5. Use *Camera Guide* if adding external camera.
6. Test and activate using the test credentials on the *Activation & Test Process* document.



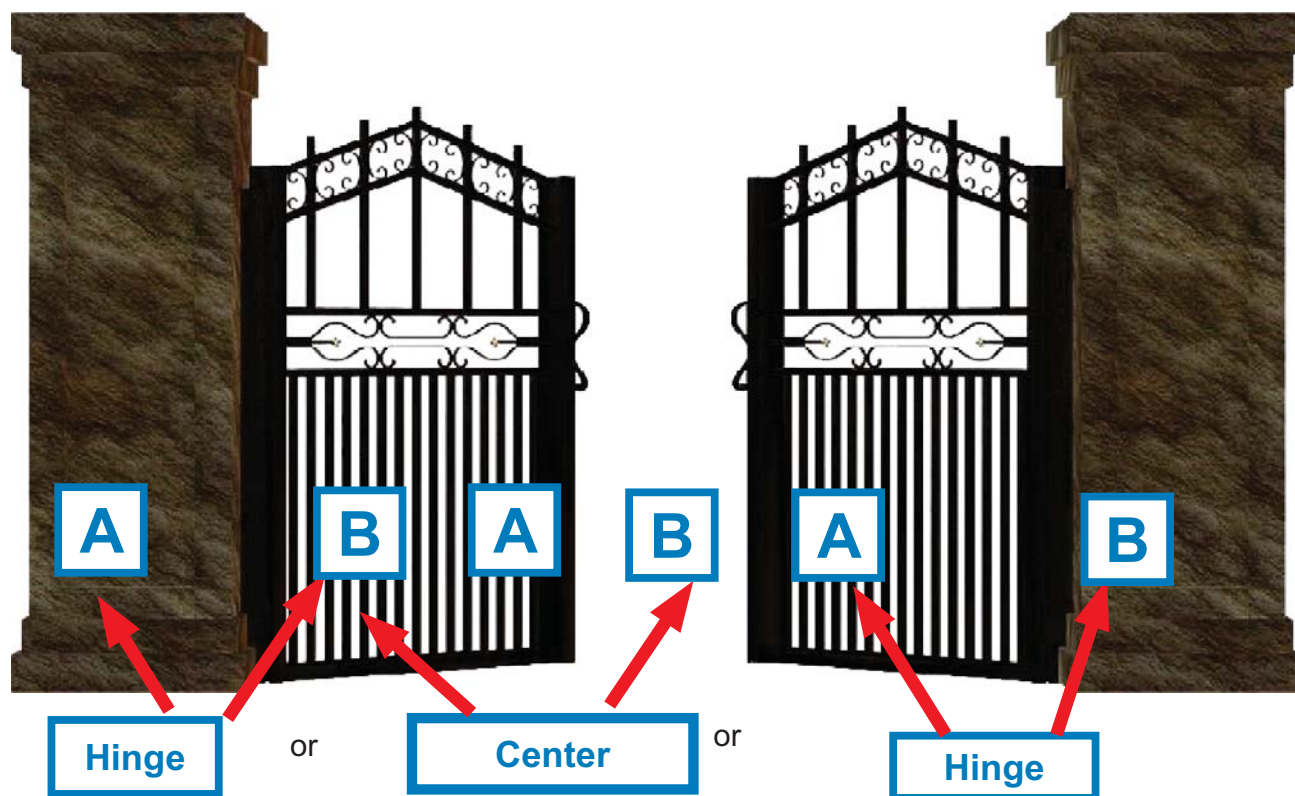


Place the Mag Switch anywhere you can pull A and B at least 2 inches away from each other when the gate is open, and where you can pull A and B 1.5 inches apart when the gate is open.


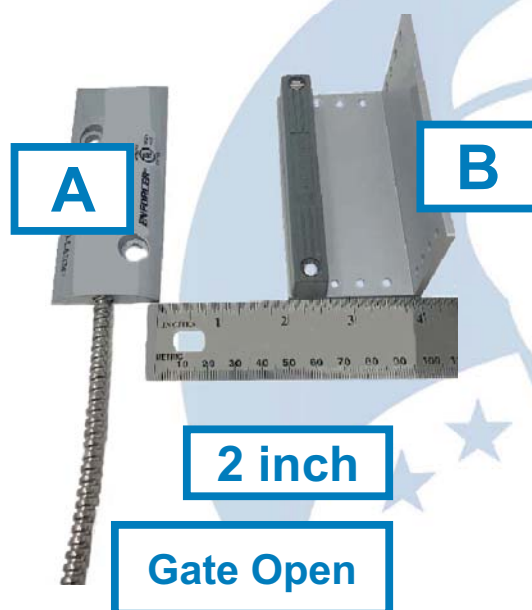
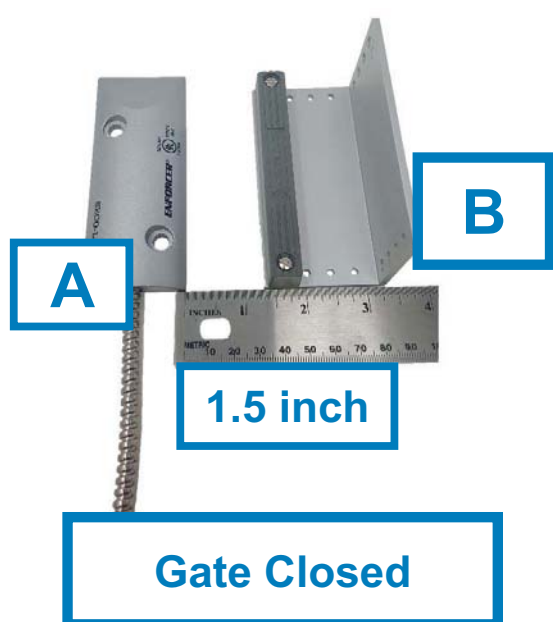


Note: Gate statuses can be inverted. If needed, please call Cellgate to invert.

Mounting to Standard Pedestal Mount

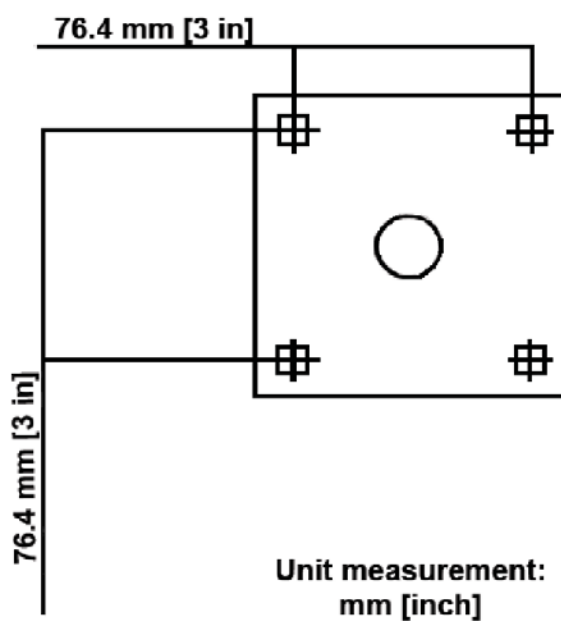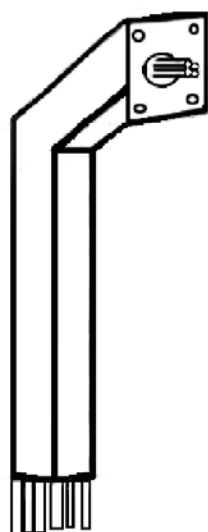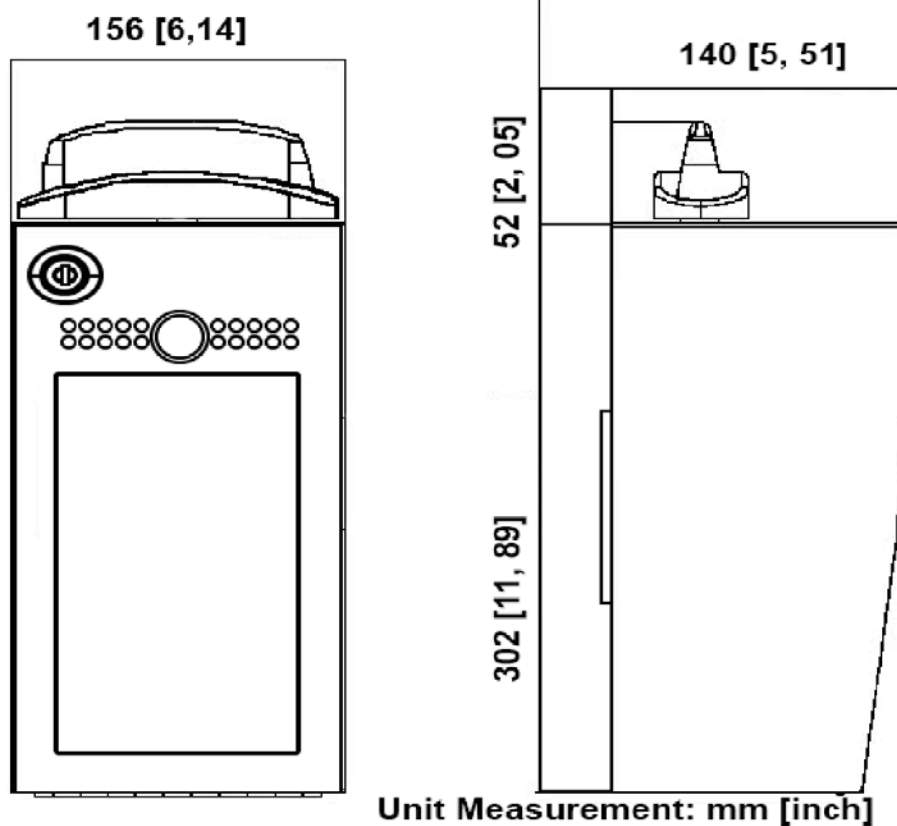

Mounting to Standard Pedestal Mount, Continued

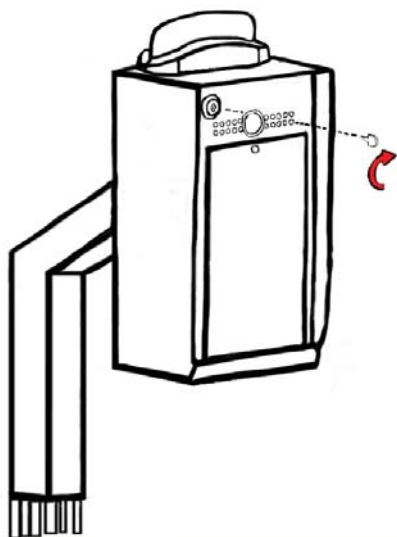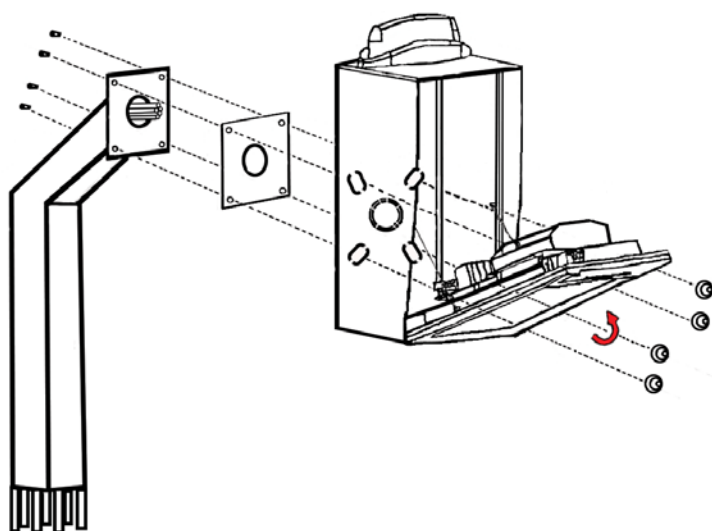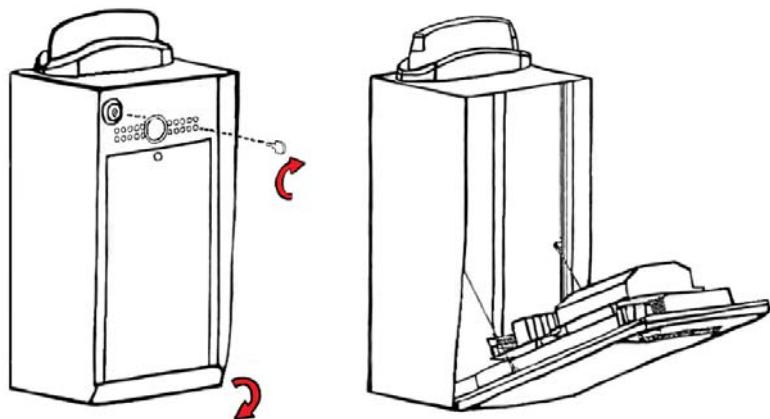



Login Credentials

Username: _____

Password: _____



Write down your login credentials
above for your future reference.



End User Guide

Table of Contents

Table of Contents.....	2
User Profile Descriptions.....	3-11
Web Portal Introduction	12-13
Manage Callgroup > Video Callgroup.....	14
Adding Callgroups.....	15
Editing Callgroups.....	16
Invite User / Add User	17
Manage Callgroup > Import Video Callgroup.....	18
Reviewing/Importing Callgroups.....	19
Tenant Resources – Password Creation and Introduction Video.....	20
Tenant Resources – Editing Callgroup.....	21
Tenant Resources – Inviting and Adding Sub-users	22
Tenant Resources – Subscribe Page.....	23
Adding Users and Access Codes	24-27
Viewing/Filtering Logs	28
Viewing/Editing My Account.....	29
Viewing/Editing Billing	30
Setting Schedules	31

User Profile Descriptions

Administrator	4
Senior Manager	4
Multi-Property Manager	5
Property Manager.....	5
HOA Manager	6
Dealer Distributor Manager.....	6
Callgroup Manager with Remote Access	7
Callgroup Manager.....	7
Callgroup User with Remote Access.....	8
Callgroup User	8
Voice Callgroup Manager with Remote Access	9
Voice Callgroup Manager	9
Voice Callgroup User with Remote Access.....	10
Voice Only Callgroup User	10
Access Code User Only	11
CellGate App User Only	11

NOTE: No one can edit/remove someone in the group above them.

For example: The Senior Manager cannot edit/remove the Administrator, but the Administrator can edit/remove the Senior Manager.

Administrator

Can Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Senior Manager

Can Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Administrator

Multi-Property Manager

Can Do (for their properties only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Senior Manager

Property Manager

Can Do (for their property only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Multi-Property Manager

HOA Manager

Can Do (for their property only):

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Can't Do:

- Edit/Remove Property Manager
- Manage Billing

Dealer Distributor Manager

Can Do (for their property only):

- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Hold Open Gate

Can't Do:

- Use CellGate App
- Import Callgroups
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Callgroup Manager with Remote Access

Can Do (for their callgroup only):

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Users in Web Portal

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Callgroup Manager

Can Do (for their callgroup only):

- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Users in Web Portal

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Callgroup User with Remote Access

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Callgroup User

Can Do:

- Momentarily Open Gate During Call

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Voice Callgroup Manager with Remote Access

Can Do (for their callgroup only):

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Numbers in Web Portal

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Voice Callgroup Manager

Can Do (for their callgroup only):

- Momentarily Open Gate During Call
- Manage Callgroup in Web Portal
- Manage Callgroup Numbers in Web Portal

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Other Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Other Users

Voice Callgroup User with Remote Access

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Momentarily Open Gate During Call

Can't Do:

- Import Callgroups
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Voice Only Callgroup User

Can Do:

- Momentarily Open Gate During Call

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Access Code User Only

Can Do:

- Momentarily Open Gate on Demand

Can't Do:

- Use CellGate App
- Import Callgroups
- Momentarily Open Gate During Call
- Hold Open Gate
- Take Photos
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

CellGate App User Only

Can Do:

- Use CellGate App
- Momentarily Open Gate on Demand
- Hold Open Gate
- Take Photos

Can't Do:

- Import Callgroups
- Momentarily Open Gate During Call
- Manage Web Portal
- Manage Billing
- Manage Callgroups
- Manage Devices
- Manage Schedules
- Manage Restrictions
- Manage Access Codes
- Manage Permissions
- Manage Users

Web Portal Introduction

Log into the Web Portal at user.zapopen.com with your email address and password.

(855) MY GATES | (855) 694 2837 |




Cellgate TrueCloud Portal - Sign In

Sign in

Forgot Password?

As soon as you login, you will be redirected to the Dashboard (Home Page).

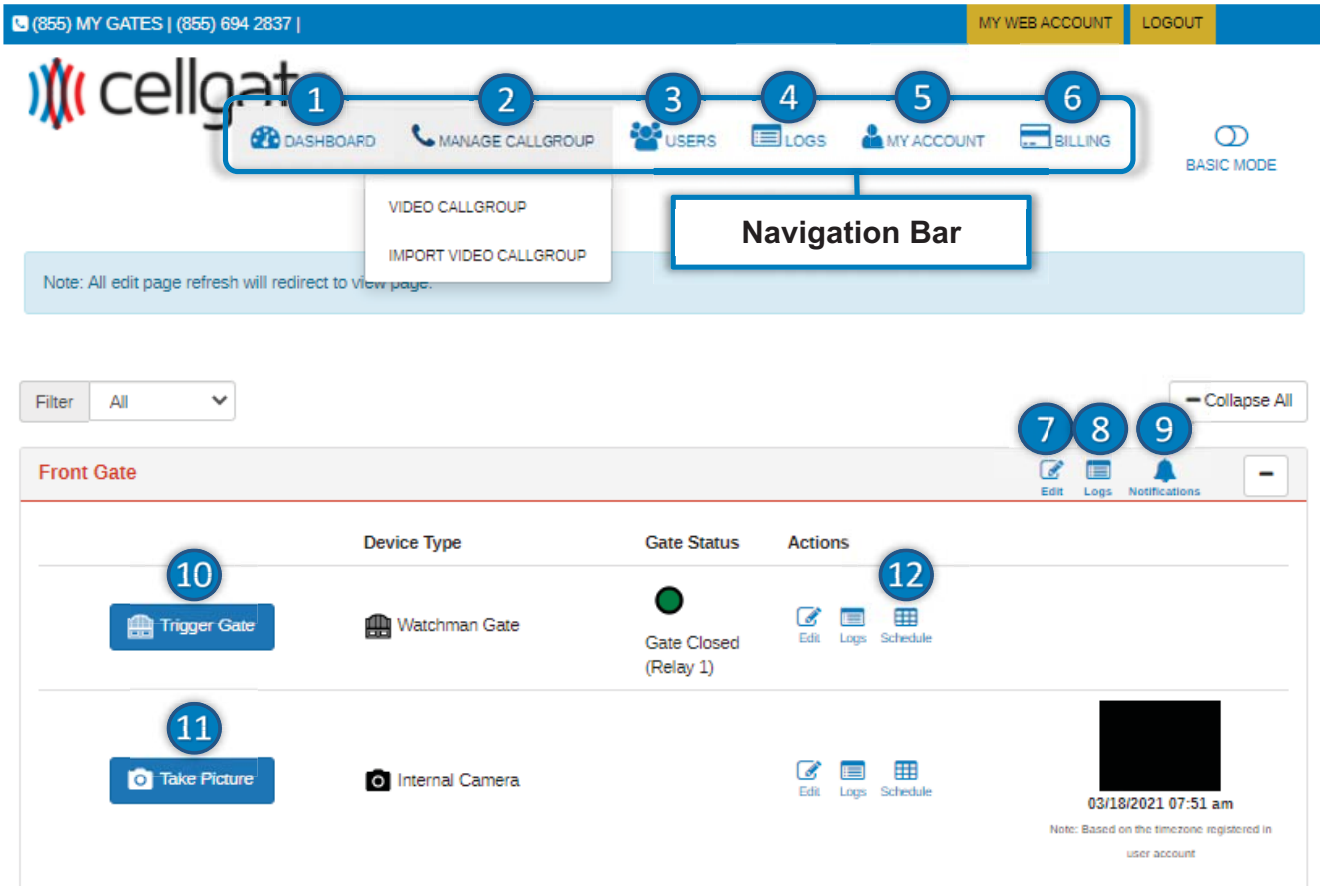


The screenshot shows the CellGate dashboard interface. At the top, there is a header bar with contact information and links for 'MY WEB ACCOUNT' and 'LOGOUT'. Below this is a navigation bar with icons for 'DASHBOARD', 'MANAGE CALLGROUP', 'USERS', 'LOGS', 'MY ACCOUNT', and 'BILLING'. A dropdown menu for 'MANAGE CALLGROUP' shows 'VIDEO CALLGROUP' and 'IMPORT VIDEO CALLGROUP'. A 'BASIC MODE' toggle is on the right. Below the navigation bar, there is a 'Filter' dropdown set to 'All' and a 'Collapse All' button. The main content area is titled 'Front Gate' and contains a table with two rows of gate information. The first row shows a 'Trigger Gate' with a 'Watchman Gate' device type, 'Gate Closed (Relay 1)' status, and actions for 'Edit', 'Logs', and 'Schedule'. The second row shows a 'Take Picture' button with an 'Internal Camera' device type, 'Edit', 'Logs', and 'Schedule' actions, and a timestamp '03/18/2021 07:51 am'. A note at the bottom right states 'Note: Based on the timezone registered in user account'.

- | | |
|---------------------------------------|---|
| 1 Dashboard (current page). | 7 Edit the name of your gate. |
| 2 View/Import callgroups. | 8 View the logs for this specific gate. |
| 3 Add/Edit users and access codes. | 9 Setup text/email notifications. |
| 4 View logs and gate/camera history. | 10 Trigger this gate. |
| 5 View/Edit your account information. | 11 Take a photo from the gate's camera. |
| 6 View/Edit your billing information. | 12 Set a schedule for this gate. |

Manage Callgroup > Video Callgroup


When you click **VIDEO CALLGROUP**, you will be redirected here where you can filter your callgroups by a variety of options.

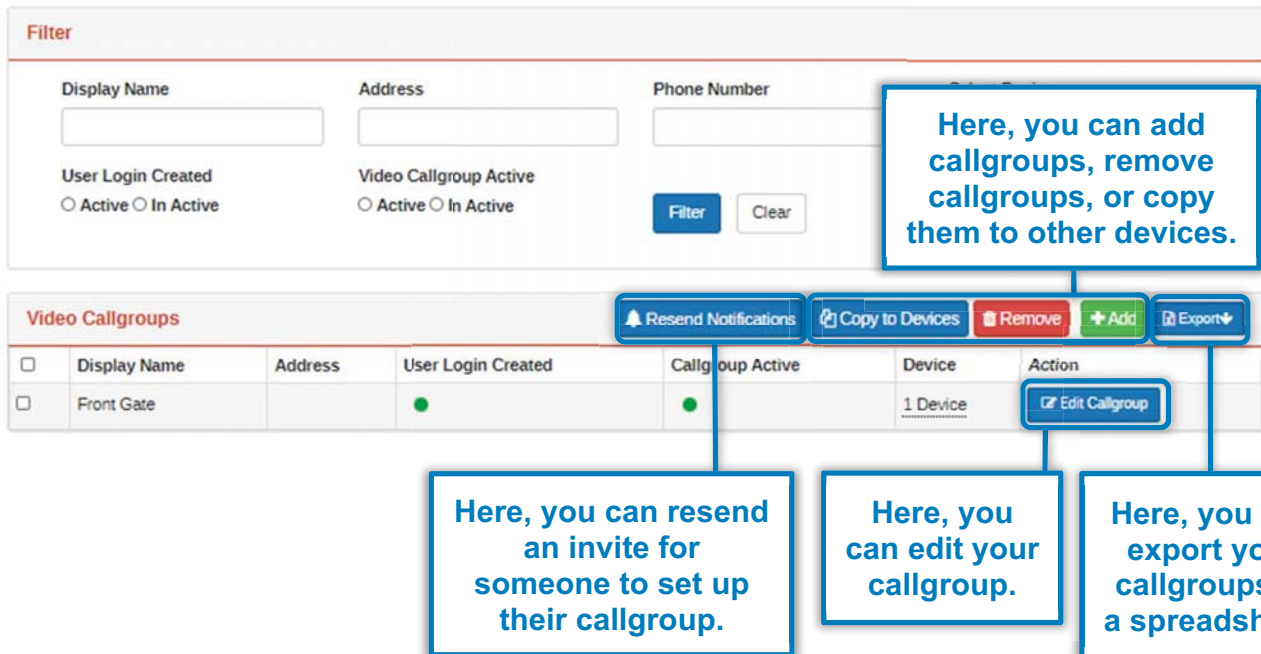

The screenshot shows the 'Filter' section at the top with input fields for Display Name, Address, and Phone Number, and radio buttons for User Login Created (Active/Inactive) and Video Callgroup Active (Active/Inactive). Below this is a table of Video Callgroups with columns: Display Name, Address, User Login Created, Callgroup Active, Device, and Action. The table contains one entry: 'Front Gate' with a green dot in the 'User Login Created' column and a green dot in the 'Callgroup Active' column, and '1 Device' in the 'Device' column. Above the table are buttons: Resend Notifications, Copy to Devices, Remove, Add, and Export. Below the table is an 'Edit Callgroup' button. Callouts explain the following actions:

- Here, you can add callgroups, remove callgroups, or copy them to other devices.** (Points to the Add, Remove, and Copy to Devices buttons)
- Here, you can resend an invite for someone to set up their callgroup.** (Points to the Resend Notifications button)
- Here, you can edit your callgroup.** (Points to the Edit Callgroup button)
- Here, you can export your callgroups to a spreadsheet.** (Points to the Export button)

When you click **Resend Notifications**, this window will pop up allowing you to send an invite via email, text, or both. You can also choose to send the invite now or at another scheduled time.

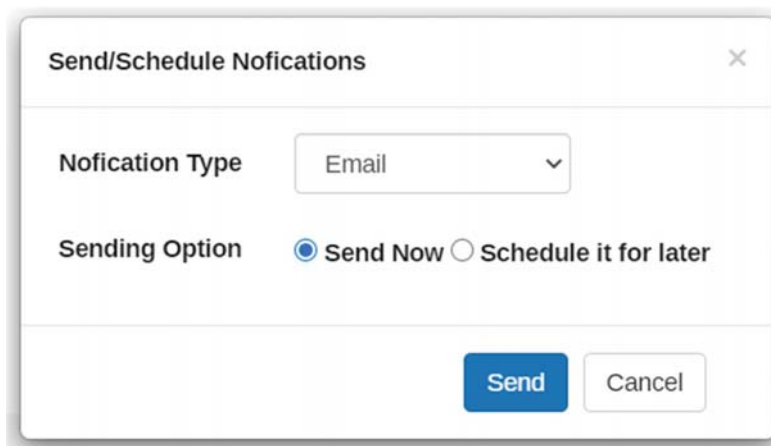

The dialog box titled 'Send/Schedule Notifications' has a close button (X) in the top right corner. It contains the following fields and options:

- Notification Type:** A dropdown menu currently set to 'Email'.
- Sending Option:** Two radio buttons: 'Send Now' (selected) and 'Schedule it for later'.
- Buttons:** 'Send' and 'Cancel' buttons at the bottom right.

Adding Callgroups

When you click **+Add**, you will be redirected here.

This field is optional for your records.

Swap
Go to Add User Wizard

Display Name:

Address:

Devices: [Assign To Device](#)

EVO App Calls - all users simultaneously called for 30 seconds

First Called

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

Second Called

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitors to enter.

Third Called

Cancel
Save All

This is the name that will appear on the unit for this callgroup.

First set of app users called.

Second set of app users called.

Third set of phone numbers called.

NOTE: When you receive a call from the unit, you must press 1 to be connected to the call. To open the gate, press star (*) or 9.

Edit Callgroups

When you click [Edit Callgroup](#), you will be redirected here. Since you're editing an existing callgroup, you can invite a user to setup their own password or add them and create their password yourself.

Video Callgroup

Swap

Go to Add User Wizard

Display Name:

Front Gate

Address:

Devices:

[1 Devices](#)

EVO App Calls - all users simultaneously called for 30 seconds

CellGate

First Called

Select...

Select...

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

Select...

Second Called

Select...

Select...

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitor

Third Called

Cancel

Save All


Here, you can invite a user to setup their own password. They will be added to whatever slot the button is next to.

Here, you can add a user to whatever slot the button is next to and set up their password for them.

NOTE: When you receive a call from the unit, you must press 1 to be connected to the call. To open the gate, press star (*) or 9.

Invite User / Add User


When you click **+ Invite User**, this window will pop up allowing you to send an invite via email, text, or both. This will prompt the user to setup their own password and download the CellGate App.

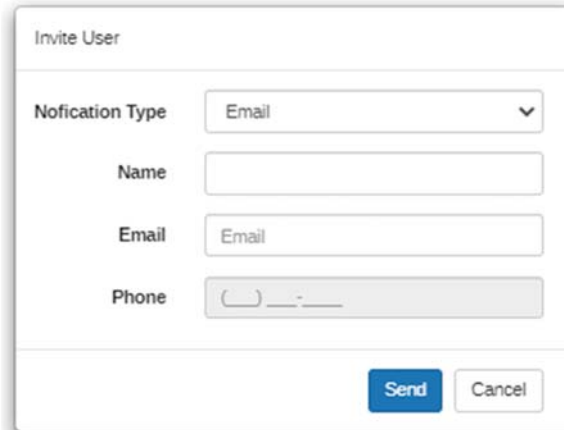

The 'Invite User' dialog box contains the following fields and controls:

- Notification Type:** A dropdown menu currently set to 'Email'.
- Name:** A text input field.
- Email:** A text input field.
- Phone:** A text input field with a country code dropdown and hyphens for area and local numbers.
- Buttons:** 'Send' (blue) and 'Cancel' (white) buttons at the bottom right.

When you click **+ Add User**, this window will pop up allowing you to add a user and create a password for them.

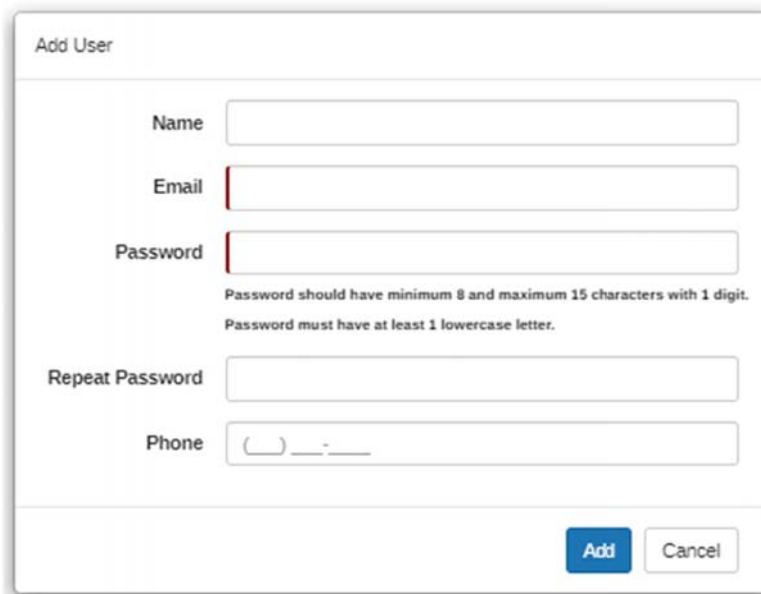


The 'Add User' dialog box contains the following fields and controls:

- Name:** A text input field.
- Email:** A text input field.
- Password:** A text input field with a red border. Below it, a note states: "Password should have minimum 8 and maximum 15 characters with 1 digit. Password must have at least 1 lowercase letter."
- Repeat Password:** A text input field.
- Phone:** A text input field with a country code dropdown and hyphens for area and local numbers.
- Buttons:** 'Add' (blue) and 'Cancel' (white) buttons at the bottom right.

Manage Callgroup > Import Video Callgroup

When you click [IMPORT VIDEO CALLGROUP](#), you will be redirected here where you can load your callgroups and import them through the use of a template.

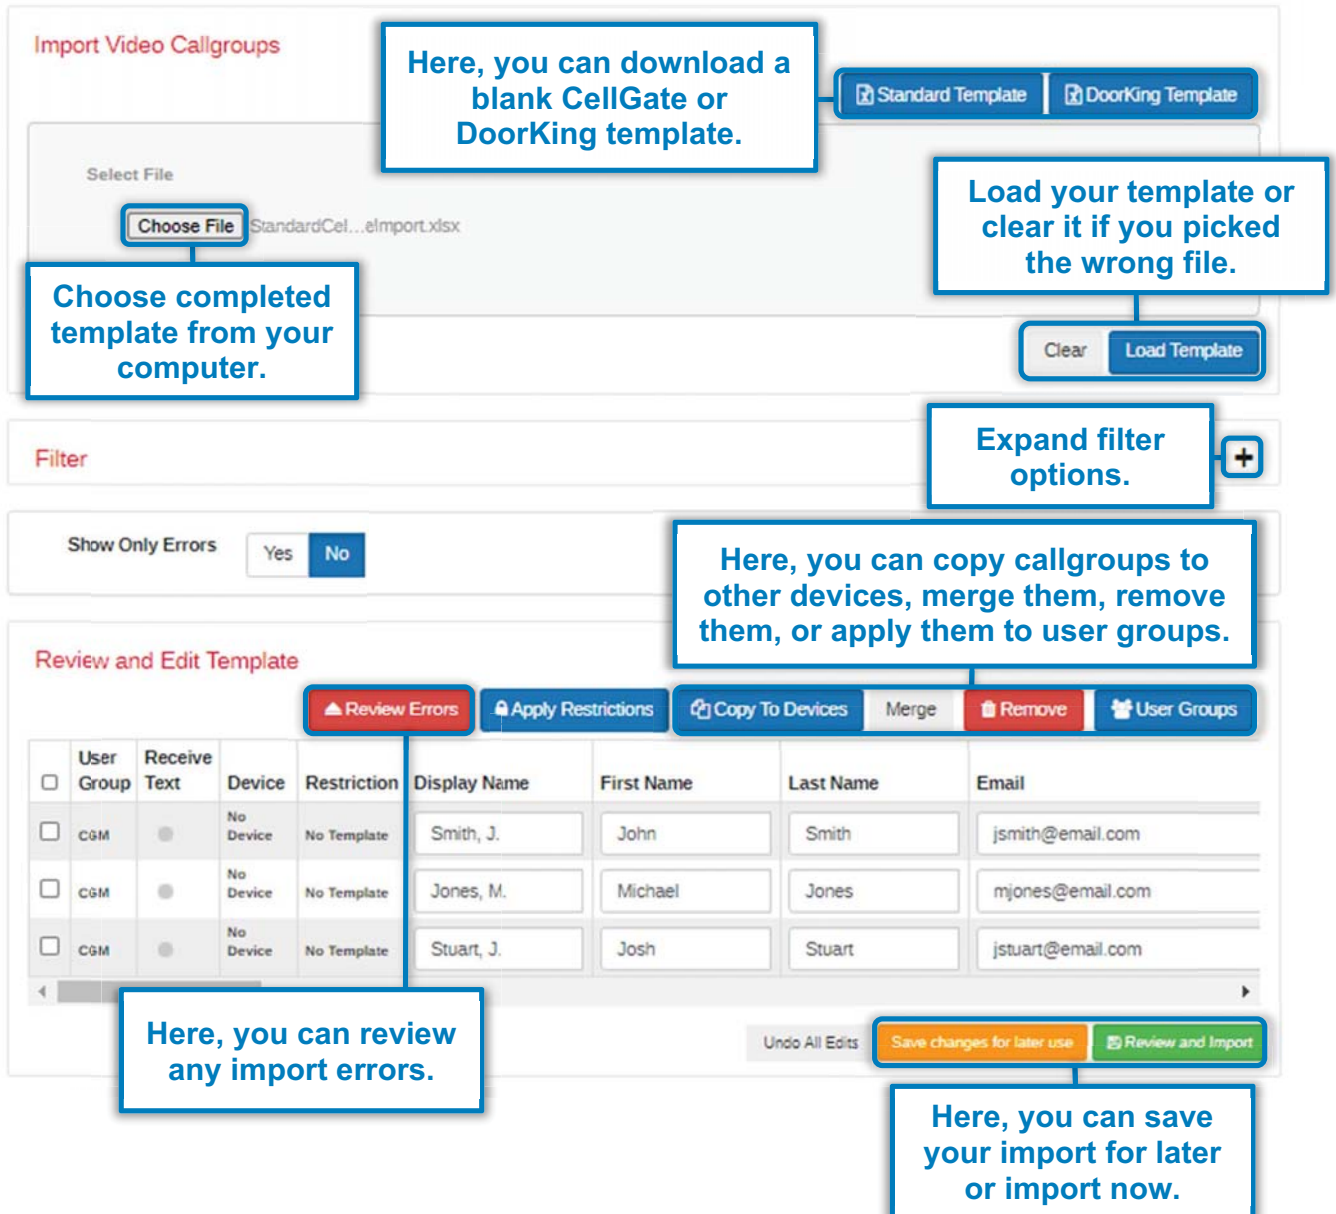

Import Video Callgroups

Here, you can download a blank CellGate or DoorKing template.

Standard Template | DoorKing Template

Select File

Choose File StandardCel...elmpor.xlsx

Choose completed template from your computer.

Load your template or clear it if you picked the wrong file.

Clear Load Template

Filter

Expand filter options.

Show Only Errors Yes No

Here, you can copy callgroups to other devices, merge them, remove them, or apply them to user groups.

Review and Edit Template

Review Errors Apply Restrictions Copy To Devices Merge Remove User Groups

☐	User Group	Receive Text	Device	Restriction	Display Name	First Name	Last Name	Email
☐	C&M		No Device	No Template	Smith, J.	John	Smith	jsmith@email.com
☐	C&M		No Device	No Template	Jones, M.	Michael	Jones	mjones@email.com
☐	C&M		No Device	No Template	Stuart, J.	Josh	Stuart	jstuart@email.com

Here, you can review any import errors.

Undo All Edits Save changes for later use Review and Import

Here, you can save your import for later or import now.

Reviewing/Importing Callgroups

When you click [Review and Import](#), you will be redirected here where you can view the email and text templates that will be sent to your users.

Your users will be prompted to create a password and download the CellGate App for either iOS or Android. They will also be provided a link to the CellGate App Guide and the Property Manager's contact information.

Import Review


Property administrator email:

your@email.com

Property administrator phone:

(972) 231-1999

Example of email callgroup manager will be receiving:

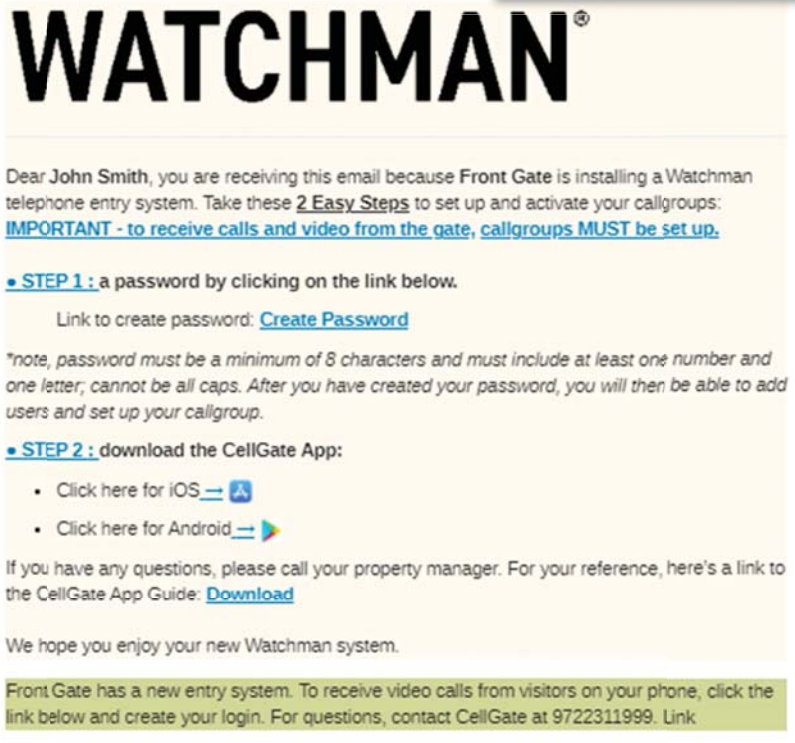

Example Phone text callgroup manager will be receiving:



Import Now

Schedule Import

Cancel

This contact information will populate on the enrollment emails.

Here, you can import your callgroups now or schedule a time for them to be imported.

NOTE: Emails will have the subject line "IMPORTANT - [Property Name] - New access control system being installed" and will come from alerts@cell-gate.com.

Tenant Resources – Password Creation and Introduction Video

When tenants click on the link to create their password, this web page will pop up prompting them to do so.

(855) MY GATES | (855) 694 2837 |



Create Master User Password

Email

tenantsemail@email.com

Password

Password should have minimum 8 and maximum 15 characters with 1 digit.
Password must have at least 1 lowercase letter.

Repeat Password

Create Password

These are the password requirements. Please also note there can be no symbols and the password cannot be in all capital letters.

After setting up their password, tenants will be redirected to this page where they can watch a video on how to configure their callgroup.

(855) MY GATES | (855) 694 2837 |

LOGIN



Your property has invested a significant amount to increase your security and convenience. You can learn more about Watchman by going to celgate.com/watchman. Watchman allows you to have a live video conversation with a visitor, using your smart phone, anywhere you are. You will be able to create the users in your apartment, home or business that you want to receive calls and the order in which they are received. Watchman uses an app on iPhone or Android to receive calls. The system will call up to 3 people simultaneously. If nobody answers within 30 seconds, then a second group of up to 3 people can be called. Finally, if nobody answers, it can call a voice only number like a landline or cellphone voice number, but of course this will only have audio like a telephone entry system.

Tenant Resources – Editing Callgroup

After logging in, tenants will be able to configure their callgroup by adding sub-users or phone numbers.

To add codes or other methods of access to the property, tenants will have to contact the account's administrator.

Video Callgroup

Swap

Go to Add User Wizard

Display Name:

Front Gate

Address:

Devices:

[1 Devices](#)

EVO App Calls - all users simultaneously called for 30 seconds

CellGate

Invite User

Add User

First Called

Select...

Invite User

Add User

Select...

Invite User

Add User

EVO App Calls - all users simultaneously called for 30 seconds - (Optional Skipped if empty)

Select...

Invite User

Add User

Second Called

Select...

Invite User

Add User

Select...

Invite User

Add User

Telephone Entry Calls - All numbers are called simultaneously for 30 seconds

Telephone entry calls will ring last in sequence. Calls will come from 972-231-1999. Press * to allow visitors to enter.

() -

Third Called

() -

() -

Cancel

Save All

NOTE: When using the "Invite User" function, the contact MUST be made aware to check for their invite email or text and subscribe to be able to use the CellGate App.

Tenant Resources – Inviting and Adding Sub-users

When tenants click on **+ Invite User**, they will be prompted to enter the notification type (email, text or both), the name of the sub-user they're inviting, and the sub-user's contact method (email or text).

Invite User

Notification Type
Email

Name

Email

Phone

Below is an example of what the invite email could look like.

Invite User

 inviteuser@cell-gate.com
To

[Reply](#) [Reply All](#) [Forward](#) [...](#)

Hi,

2102 Main Street, Briarwood, Tx 75555 has a new entry system. to receive video calls from visitors on your phone, click the link below and create your login. For questions, contact your system administrator.

[Subscribe](#)

Thanks,
Cellgate

When tenants click on **+ Add User**, they will be prompted to enter their sub-user's name and login information manually. Sub-users cannot reset their own password; this is done by callgroup managers or system administrators.

Add User

Name

Email

Password
Password should have minimum 8 and maximum 15 characters with 1 digit.
Password must have at least 1 lowercase letter.

Repeat Password

Phone

[Add](#) [Cancel](#)

Tenant Resources – Subscribe Page

After invited users click on **“Subscribe”**, they will be redirected to this web page where they enter in their desired username (email) and password.

After this, they will be able to download the **CellGate App** and login with their new credentials to receive video calls.



Subscribe Callgroup



Username





Password



Subscribe

User Name Should be

- Mail format.
- Alphabet letters (A to Z and a to z), Digits (0 to 9), Hyphen(-) and Special characters (i.e. !#\$%&'+-./=:^_`{|}~).

Password Should be

- Minimum eight characters, at least one letter and one number

Adding Users and Access Codes

When you click  **USERS** on the Navigation Bar, you will be redirected here.

ACCOUNT USERS

Access Codes with an asterisk are stored on device.

Here, you can
filter your Users.

Add an Access
Code or User.

Name	Properties/Locations	Access	Restrictions	User Group	User Profiles
CellGate	All devices on this account	Gate Code: [1234*]		Administrator	Administrator Manager Profile

When you click **+ Add Code**, you will be redirected here.

ADD CODE

Name of who the Access
Code is assigned to.

User Details

Name Family / Friends

Access Properties/Install Locations

Access to All Properties/Install
Locations?

Yes

No

Yes: Access Code can be
used at all locations.

No: You choose which
locations this Access Code
can access.

When you click **+ Add Code**, you will be redirected here (continued).

Access Methods

4 – 5 digit Access Code below 65534.

Access Code

Save to Device ☒ Yes ☐ No

Yes: Access Code has no restrictions.

No: Access Code can be restricted (see below).

Access Restrictions

What date range can they access? Specific

What time frame can they access? Specific

What days can they access? Specific

How many times can they access? Specific

Restrict Access Code by:

- Date Range
- Time Frame
- Days of the Week
- Number of Times it Can Be Used

Each device can have one **Hold Open Code**. This code is automatically created and can only be edited by CellGate. To create a new code, the old one must be deleted first.

Hold Open Codes open the gate indefinitely until a code is re-entered or the "Close Gate" function is used via the app or web portal.

ACCOUNT USERS

Access Codes with an asterisk are stored on device.

Name	Properties/Locations	Access	Restrictions	User Group	User Profiles
CellGate	All devices on this account	Gate Code: [1234*]		Administrator	Administrator Manager Profile
Hold Open Code	All devices on this account	Gate Code: [12345*]		Hold Open Code User	Hold Open Code User Profile

When you click **+ Add User**, you will be redirected to this page with 5 different sections.

ADD USER

USER DETAILS USER PROFILE ACCESS LOCATIONS ACCESS METHODS RESTRICTIONS

Add New User

WHO DO YOU WANT TO ADD TO THE SYSTEM?

Name

Email

Phone Number

Timezone

Next

Name of the User.

These fields are optional but are available for your reference.

Add New User

WHAT PROFILES SHOULD JOHN SMITH HAVE?

Select Group:

Add Group and Profiles

Back Next

Select from one of the profiles listed and assign it to your user.

Add New User

WHAT SHOULD JOHN SMITH HAVE ACCESS TO?

Should John Smith have access to all CellGate properties/install locations?

Yes No

Which CellGate properties/install locations should John Smith have access to?

☒ Dallas, TX


☒ Front Gate

Yes: Access Code can be used at all locations.

No: You choose which locations this Access Code can access.

Add New User

HOW SHOULD JOHN SMITH ACCESS THE SYSTEM?

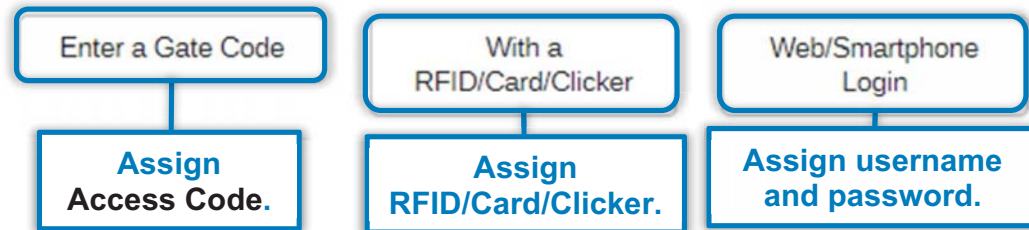

Add New User

All restriction times are based on the timezone of the device.

WHAT RESTRICTIONS SHOULD JOHN SMITH HAVE?

What date range can they access?	Specific	Any
What time frame can they access?	Specific	Any
What days can they access?	Specific	Any
How many times can they access?	Specific	Any

Restrict Access Code, RFID/Card/Clicker or login by:

- Date Range
- Time Frame
- Days of the Week
- Number of Times it Can Be Used

Viewing/Filtering Logs

When you click  LOGS, you will be redirected to this page where you can filter Logs and gate/camera history.

LOGS

Log Filter

Install Location

Access Code

Zap Open Number

Phone Number

Callgroup Name

Log Types

☒ Images
 ☒ Devices
 ☒ Alarms
 ☒ Device Actions
 ☒ Access

Date

From...

To...

Response

☐ Successful
 ☐ Failed
 ☐ Pending

Filter By

☐ Schedule

Filter

Clear

Activity


Export

Export Logs to a spreadsheet.

Happened On	Device	Initiated By	Action	Response
03/24/2021 02:52 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Closed	Success
03/24/2021 02:48 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Opened	Success
03/24/2021 02:44 am CST	Watchman Gate Front Gate	Cellgate (Admin) Scheduled Event	Gate Closed	Success

Viewing/Editing My Account

When you click  MY ACCOUNT on the Navigation Bar, you will be redirected here.

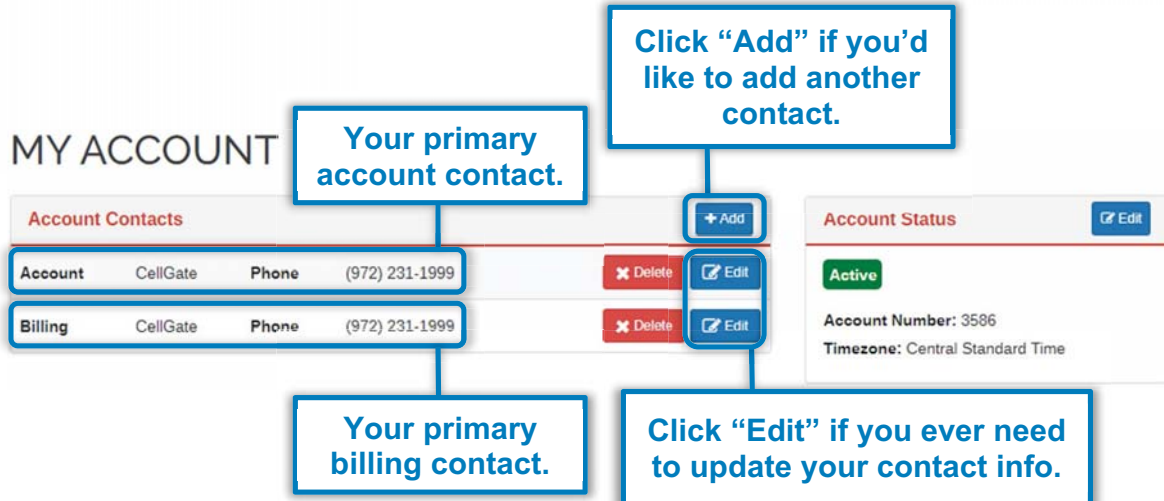

MY ACCOUNT

Account Contacts

Account	CellGate	Phone	(972) 231-1999	Delete	Edit
Billing	CellGate	Phone	(972) 231-1999	Delete	Edit

Account Status 

Active

Account Number: 3586
Timezone: Central Standard Time

Callouts:

- Click "Add" if you'd like to add another contact.
- Your primary account contact.
- Your primary billing contact.
- Click "Edit" if you ever need to update your contact info.

When you click  across from Account or Billing, you will be redirected to this page where you can update your contact info.

Contact Details

Contact Type	Account		
Name	CellGate		
Country	United States ▼		
Address	2150 Chenault Drive		
	Unit #		
	Carrollton		
	Texas ▼	75006	
Email	your@email.com		
Phone	(972) 231-1999	Phone ▼	

Viewing/Editing Billing

When you click  on the Navigation Bar, you will be redirected here.

BILLING

Your reoccurring bill amount.

Monthly Recurring

Monthly would bill \$0.00 + tax bill every month

Payment Information

 Edit

MONTHLY RECURRING

Click “Edit” if you ever need to update your credit card info.

**** 1111
11 / 2020

CellGate
2150 Chenault Drive
Carrollton, TX 75006
US

Your billing address.

Email
your@email.com


Email where invoices and receipts will be sent.

INVOICES

No Invoices Found


Setting Schedules

To set a Schedule, you will need to navigate back to the Dashboard.

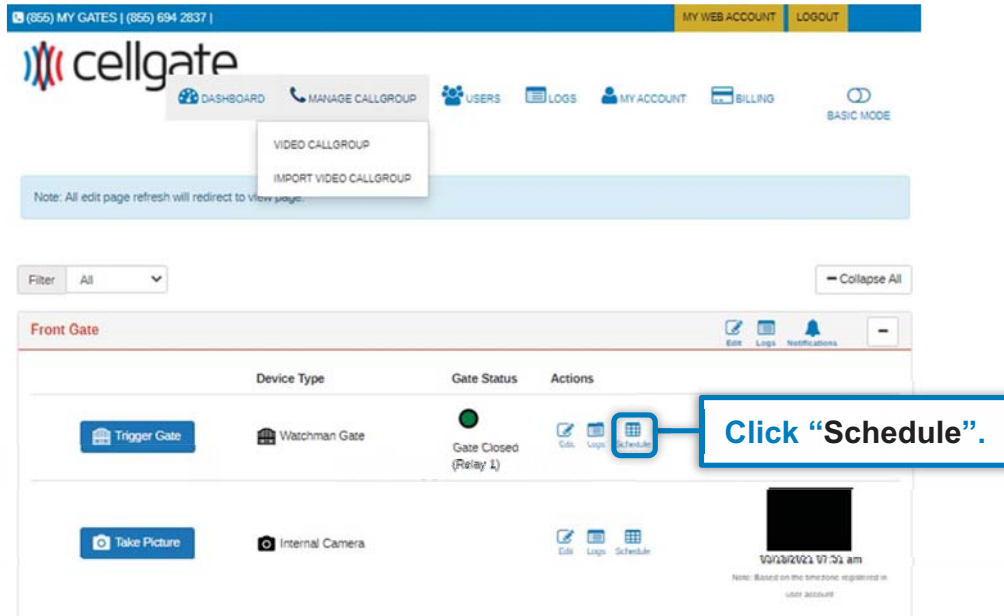

When you click  , you will be redirected here.

EDIT SCHEDULE

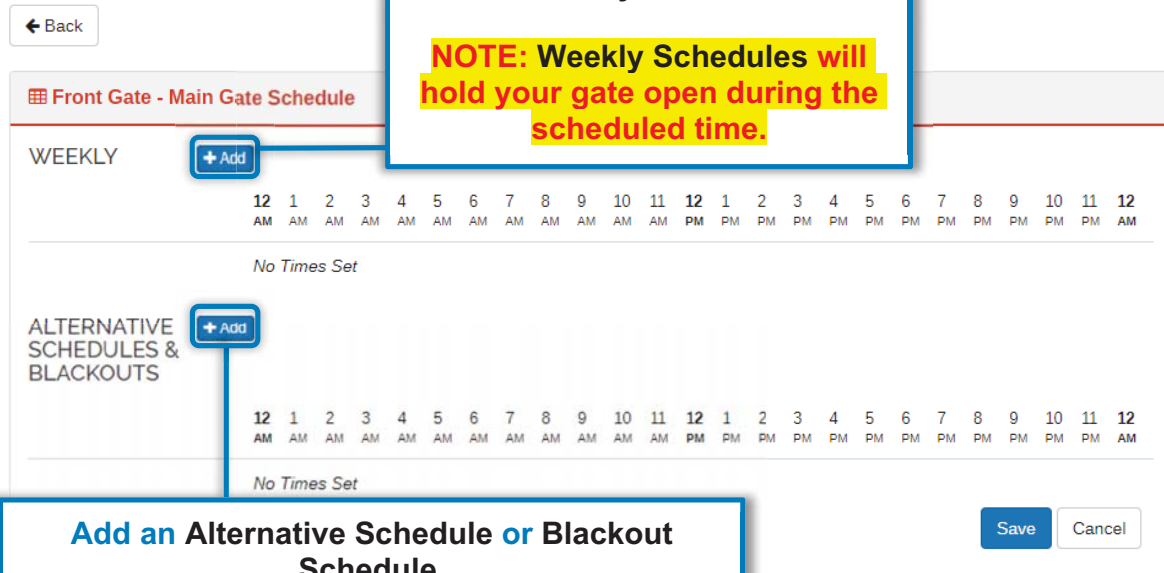

Alternative Schedule: Will override the default schedule for the selected date(s).

Blackout Schedule: Will ignore all schedules for the selected date(s).

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.