

智能门禁

K3D

使用说明


简介

K3D门禁支持指纹, 密码, 刷卡, 人脸, 掌静脉及APP解锁, 同时集成高性能WiFi模组, 支持门外实时视频查看与APP语音双向对讲, 并可对所有开锁动作进行记录。具备IP67防尘防水等级, 在-20°C至50°C极端环境下仍能稳定运行, 保障进出安全。


智能门禁 K3D

产品型号:	K3D
尺寸:	W80mm x H130mm x T20mm
材质:	ABS/亚克力
支持系统:	Android 4.3/IOS7.0 above
网络标准:	WiFi 2.4G
IEEE 标准:	802.11b/g/n
网络加密:	WPA/WPA2/WPA3
待机电流:	60mA (背光点亮)
供电方式:	DC 12~24V
防水等级:	IP67
工作温度:	-20~50°C
卡片容量:	2000
密码数量:	500
指纹容量:	100
人脸容量:	100
掌静脉容量:	100
可视对讲:	支持

包装清单

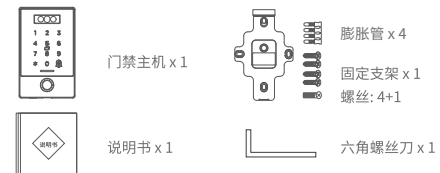

安装步骤

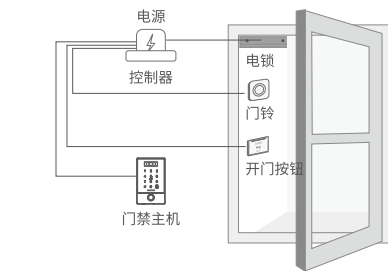


1 开孔

在合适的位置上, 打通门禁线缆连接电源的线槽。


2 安装固定支架

将固定支架从门禁上取下, 然后在门禁线槽位置, 用自攻螺丝将固定支架固定



3 接线


用剪刀在门禁线缆合适位置将接头剪去, 然后将门禁线缆分别接通到电源及对应线束上。

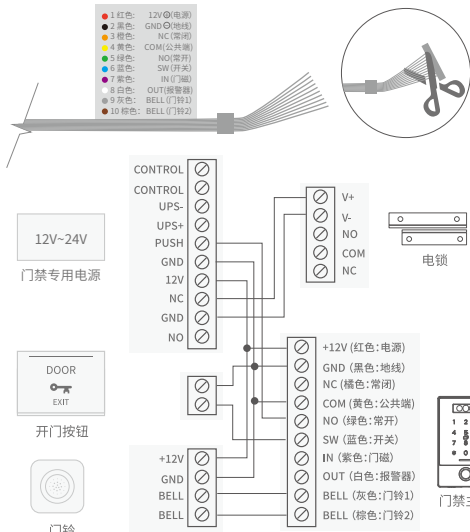

⚠ 请使用门禁专用电源, 否则可能会损坏门禁继电器。

4 安装主机

将主机装入到固定支架后，用螺丝刀固定。



修改门禁背光

- 背光常亮:*49#管理员密码#1#
- 背光熄灭:*49#管理员密码#0#

重置门禁


门禁通电情况下:

- 1 短接蓝色开关线(SW)和紫色门磁线(IN)
- 2 短接后的线与黑色地线(GND)短接 3 秒
- 3 听到滴一声后与黑色地线(GND)分开
- 4 步骤 2、3 重复 3 次操作，听到滴滴两声后重置成功




添加门禁(绑定管理员)

- 1 触摸面板唤醒门禁
- 2 打开 App 软件



- 3 点击左上角“≡”进入“添加锁”，选择门锁（门禁）类型
- 4 点击发现的锁设备名称，等待几秒钟，直至锁添加成功

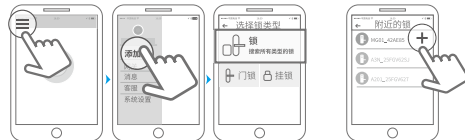

- 5 配置网络，选择正确的网络并输入密码



* 不支持 5GWiFi 网络，请选择 2.4GWiFi 网络进行配置

⚠ 注意:如果通过以上步骤未能成功添加锁,请关闭手机APP,关闭手机蓝牙后再重新打开APP与蓝牙,重复以上步骤。

产品保修说明

- 1、自购买产品之日起7日内,若产品出现非人为损坏的质量问题,可以选择按购买价格退货或更换同型号产品;
- 2、自购买产品之日起至第十五日内,若产品出现非人为损坏的质量问题,可以选择免费更换同型号的产品;
- 3、自购买产品之日起12个月内,若产品出现非人为损坏的性能故障,提供免费保修服务。

免责声明:
本公司保留因改进产品而变更设计的权利,届时恕不另行通知;所有资料经过仔细核对力求精准但仍可能产生误差,本公司不承担由此产生的后果。

SMART ACCESS CONTROLLER

K3D

Manual

Introduction

The K3D access control system supports fingerprint, password, card swipe, facial recognition, palm vein authentication, and app-based unlocking. Integrated with a high-performance WiFi module, it enables real-time video monitoring outside the door and two-way voice intercom via the app, while recording all unlocking actions. With an IP67 dustproof and waterproof rating, the system operates reliably in extreme temperatures ranging from -20°C to 50°C, ensuring secure and safe access management.

Smart Access Controller K3D

Model:	K3D
Dimensions:	W80mm x H130mm x T20mm
Material:	ABS/Acrylic
Supporting systems:	Android 4.3/IOS7.0 above
Network:	WiFi 2.4G
IEEE standard:	802.11b/g/n
Network encryption:	WPA/WPA2/WPA3
Stand-by current:	60mA (Backlight on)
Power supply:	DC 12~24V
Waterproof level:	IP67
Working Temperature:	-20~50°C
Card capacity:	2000
Number of Passwords :	500
Fingerprint capacity :	100
Face storage capacity :	100
Palm storage capacity:	100
Video Intercom:	Supports

Accessories



Front pane x 1



Manual x 1




Expansion bolt x 4
Mounting plate x 1
Screw: 4+1



Hex screwdriver x 1

Illustration




1 Drill a hole for the cable

Drill a hole at appropriate position to make space for the cable to connect to the power source.




2 Install the mounting plate

Remove the mounting plate from the access controller, and fix it on the wall with 4 screws.



3 Wiring


Cut off the connector of the cable, strip and connect the leads to appropriate ports of the power supply according to the illustration.

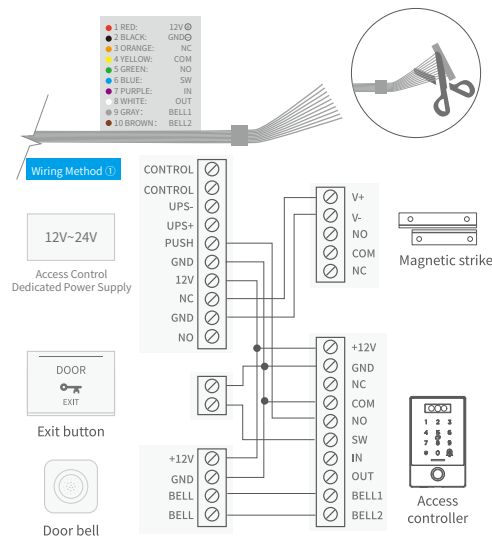

⚠ Please use a dedicated access control power supply, otherwise may damage the access controller relay.

4 Install the access controller

Fit the access controller into the hook and fix it on the mounting plate with a screw in the bottom.



Change back lighting

- Back lighting always on: *49#admin password#1#
- Back lighting always off: *49#admin password#0#

Reset to default mode


When the power is on:

- 1 Connect blue wire(SW) to purple wire(IN) to purple wire(IN)
- 2 Connect SW and IN to black wire(GND) for 3 seconds
- 3 Disconnect black wire(GND) on a beep
- 4 Repeat step 2 and step 3 twice till 2 short beeps are heard




Pair the access controller with app

- 1 Touch Panel Wake-Up Access Control
- 2 Activate the APP.



- 3 Tap the "≡" icon on the upper left corner, tap "+Add Lock", select "Door Lock".
- 4 Tap the device shown on the screen. Wait a few seconds, and then add successfully.

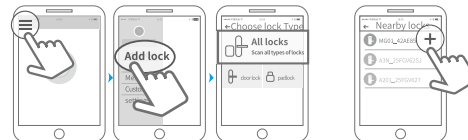

- 5 Disposition, Select the network and input your WiFi password



*5G is not supported. Please select a WiFi of 2.4G

⚠ Notice: If fails, please shut off the APP and Bluetooth, turn them on and try the above process again.

Limited Warranty

1. For any defect in material and/or workmanship, the original purchaser of the product can:

- 1) Return or ask for a replacement within 7 days from the date of the Invoice.
- 2) Ask for a replacement within 15 days from the date of the Invoice.
- 3) Can ask for a free repair in 365 days from the date of the Invoice.

2. This warranty does not cover defects caused by modification, alteration, misuse or physical abuse of the product.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Disclaimer

We continuously optimize products as new technologies and features are developed. For this reason, we reserve the right to make alterations to the products without prior notice.