Test Report

AIR-AP1572xxx-B-K9

(Where x = model options not effecting the radio module)

FCC ID: LDK102093P

5725 - 5850 MHz

Against the following Specifications:

CFR47 Part 15.407

Antenna Gain = 8dBi

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

Author: Jose Aguirre **Tested By**	**Approved By:** Jim Nicolson **Title:** Technical Leader, Engineering **Revision:** 3

This report replaces any previously entered test report under EDCS – **1435259**.This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW **3**

SECTION 2: ASSESSMENT INFORMATION **4**

2.1 GENERAL 4
2.2 DATE OF TESTING 6
2.3 REPORT ISSUE DATE 6
2.4 TESTING FACILITIES 6
2.5 EQUIPMENT ASSESSED (EUT) 6
2.6 EUT DESCRIPTION 7

SECTION 3: RESULT SUMMARY **10**

3.1 RESULTS SUMMARY TABLE 10

SECTION 4: SAMPLE DETAILS **11**

APPENDIX A: EMISSION TEST RESULTS **12**

CONDUCTED TEST SETUP DIAGRAM 12
TARGET MAXIMUM CHANNEL POWER 12
A.1 6DB BANDWIDTH 13
A.2 99% AND 26DB BANDWIDTH 21
A.3 MAXIMUM CONDUCTED OUTPUT POWER 29
A.4 POWER SPECTRAL DENSITY 35
A.5 CONDUCTED SPURIOUS EMISSIONS 41
A.6 CONDUCTED BANDEDGE 53

APPENDIX B: EMISSION TEST RESULTS **60**

RADIATED EMISSION SETUP DIAGRAM-BELOW 1G 60
B.1 RADIATED SPURIOUS EMISSIONS 61
B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ 72
B.3 AC CONDUCTED EMISSIONS 74

APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST **79**

APPENDIX E: ABBREVIATION KEY AND DEFINITIONS **80**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.

b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.

c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).

d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10-7
temperature measurements	± 0.54º
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.2 Date of testing

25-Aug-15 - 11-Nov-15

2.3 Report Issue Date

16-November-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-AP1572EAC-B-K9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.6 EUT Description

The AIR-AP1572EAC-B-K9
Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT/VHT20, One Antenna, 6 to 54 Mbps
802.11n/ac - Non HT/VHT20, Two Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT20, Three Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT20, Four Antennas, 6 to 54 Mbps

802.11n/ac - Non HT/VHT20 Beam Forming, Two Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT20 Beam Forming, Three Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT20 Beam Forming, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23, M0 to M9 3ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23, M0 to M9 3ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7, M0 to M9 1ss

802.11n/ac - Non HT/VHT40 Duplicate, One Antenna, 6 to 54 Mbps
802.11n/ac - Non HT/VHT40 Duplicate, Two Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT40 Duplicate, Three Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT40 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23, M0 to M9 3ss

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23, M0 to M9 3ss

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7, M0 to M9 1ss

802.11n/ac - Non HT/VHT80 Duplicate, One Antenna, 6 to 54 Mbps
802.11n/ac - Non HT/VHT80 Duplicate, Two Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT80 Duplicate, Three Antennas, 6 to 54 Mbps
802.11n/ac - Non HT/VHT80 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT80, One Antenna, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT80, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80, Four Antennas, M16 to M23, M0 to M9 3ss

802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M16 to M23, M0 to M9 3ss
802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M8 to M15, M0 to M9 2ss
802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M16 to M23, M0 to M9 3ss

802.11n/ac - HT/VHT80 STBC, Two Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80 STBC, Three Antennas, M0 to M7, M0 to M9 1ss
802.11n/ac - HT/VHT80 STBC, Four Antennas, M0 to M7, M0 to M9 1ss

The following antennas are supported by this product series.
The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	>30 degree 5 GHz Antenna Gain (dBi)	Comment
5 GHz	AIR-ANT5140V-N	5GHZ Omni	4	-2	
	AIR-ANT5180V-N	5GHZ Omni	8	-3	
	AIR-ANT5114P-N	5GHz Patch	14	-4	
	AIR-ANT5114P2M-N	Patch, dual polarized	14	5	
Dual Band	AIR-ANT2547V(G)-N	Dual Band Omni	4/7	-6	
	AIR-ANT2568V(G)-N	Dual Band Omni	6/8	3	(G) indicates

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

					gray color
	AIR-ANT2513P4M-N	Dual-Band Polarization Diverse Patch Array	13/13	-5	(G) indicates gray color
	AIR-ANT2588P3M-N	Dual Band 3 element DIRECTIONAL	8/8	1	
	Internal	Omni	4/6	-1	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	**6dB Bandwidth:** Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.	Pass
FCC 15.407	**99% & 26 dB Bandwidth:** The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407	**Output Power:** For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	Pass
FCC 15.407	**Power Spectral Density:** **15.407** The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	Pass
FCC 15.407	**Conducted Spurious Emissions / Band-Edge:** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
FCC 15.407 FCC 15.209 FCC 152.05	**Restricted band:** Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 FCC 15.209 FCC 15.205	**TX Spurious Emissions:** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	**AC conducted Emissions:** Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

***** MPE calculation is recorded in a separate report

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP1572EAC-B-K9	Cisco Systems	V01	AP3G2-K9W7-M	IOS 15.3	FTX1912P048

4.2 System Details

System #	Description	Samples
1	EUT	S01

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting duty cycle >98%

Measurements were made in accordance with

- ANSI C63.10:2013,
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix A: Emission Test Results

Conducted Test Setup Diagram

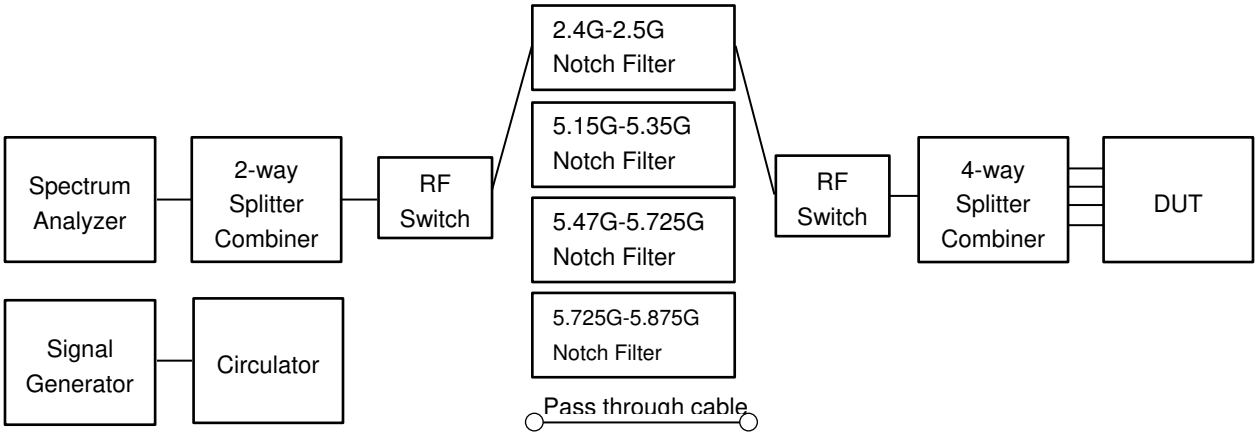

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

	Maximum Channel Power (dBm)		
	Frequency (MHz)		
Operating Mode	5745	5785	5825
Non HT/VHT20, 6 to 54 Mbps	23	28	22
Non HT/VHT20 Beam Forming, 6 to 54 Mbps	20	24	19
HT/VHT20, M0 to M23, M0 to M9 1-3ss	23	28	22
HT/VHT20 Beam Forming, M0 to M23, M0 to M9 1-3ss	23	27	21
HT/VHT20 STBC, M0 to M7, M0 to M9 1-1ss	23	28	22
	5755	5795	
Non HT/VHT40, 6 to 54 Mbps	18	21	
HT/VHT40, M0 to M23, M0 to M9 1-3ss	17	22	
HT/VHT40 Beam Forming, M0 to M23, M0 to M9 1-3ss	17	22	
HT/VHT40 STBC, M0 to M7, M0 to M9 1-1ss	17	22	
	5775		
Non HT/VHT80, 6 to 54 Mbps	14		
HT/VHT80, M0 to M23, M0 to M9 1-3ss	17		
HT/VHT80 Beam Forming, M0 to M23, M0 to M9 1-3ss	16		
HT/VHT80 STBC, M0 to M7, M0 to M9 1-1ss	17		

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.1 6dB Bandwidth

15.407 Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

6 BW Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 11.8.2 Option 2

6 BW Test parameters
X dB BW = 6dB (using the OBW function of the spectrum analyzer) Span = Large enough to capture the entire EBW RBW = 100 KHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak or where practical sample shall be used Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By : Jose Aguirre	**Date of testing:** 10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	17.3	>500	16.8
5755	Non HT/VHT40, 6 to 54 Mbps	6	35.6	>500	35.1
	HT/VHT40, M0 to M23, M0 to M9 1-3ss	m0	35.3	>500	34.8
5775	Non HT/VHT80, 6 to 54 Mbps	6	76.4	>500	75.9
	HT/VHT80, M0 to M23, M0 to M9 1-3ss	m0x1	76.3	>500	75.8
5785	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	17.0	>500	16.5
5795	Non HT/VHT40, 6 to 54 Mbps	6	36.0	>500	35.5
	HT/VHT40, M0 to M23, M0 to M9 1-3ss	m0	35.3	>500	34.8
5825	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	17.1	>500	16.6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps

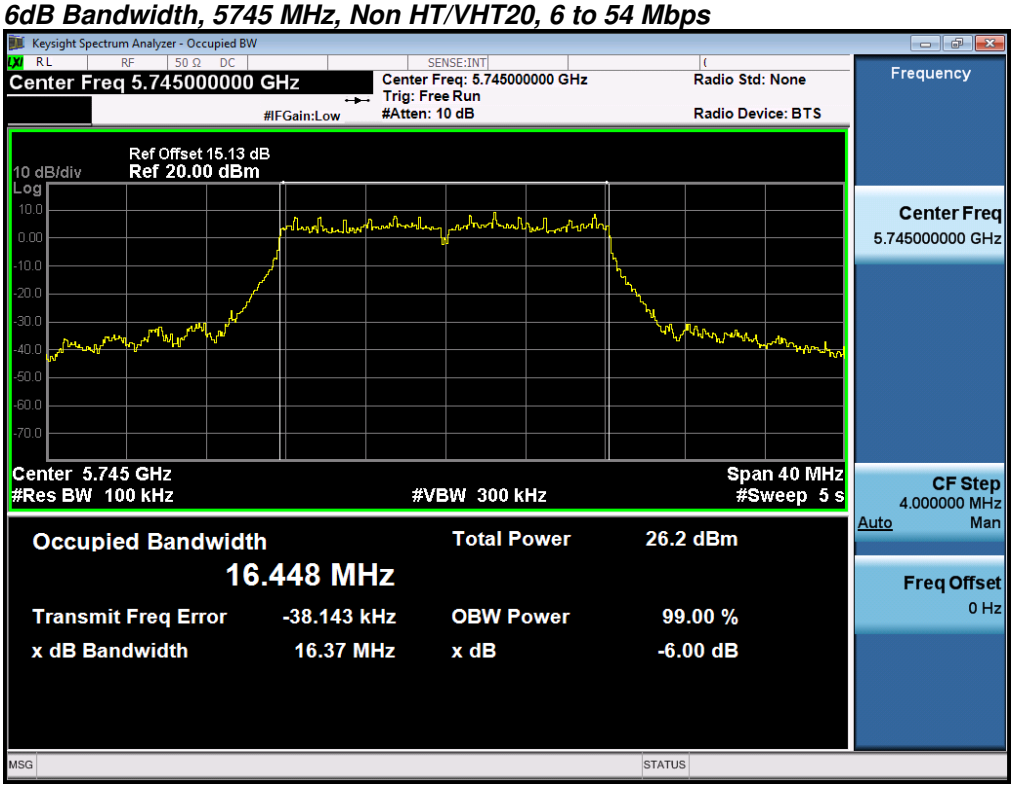

6dB Bandwidth, 5745 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

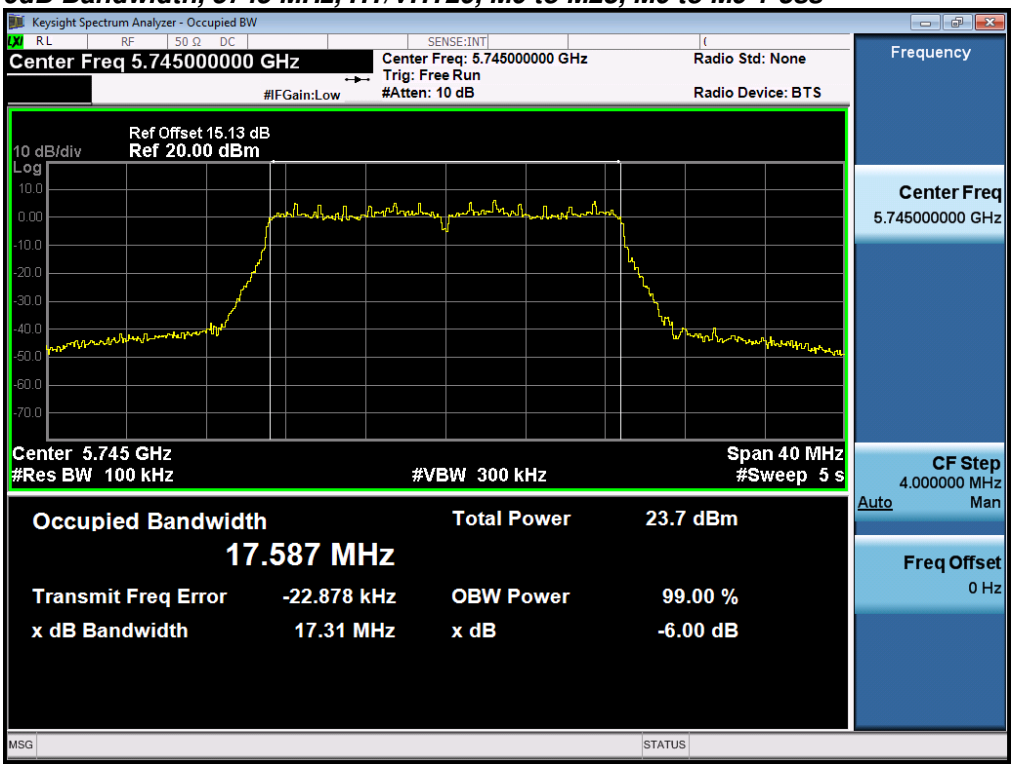

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps

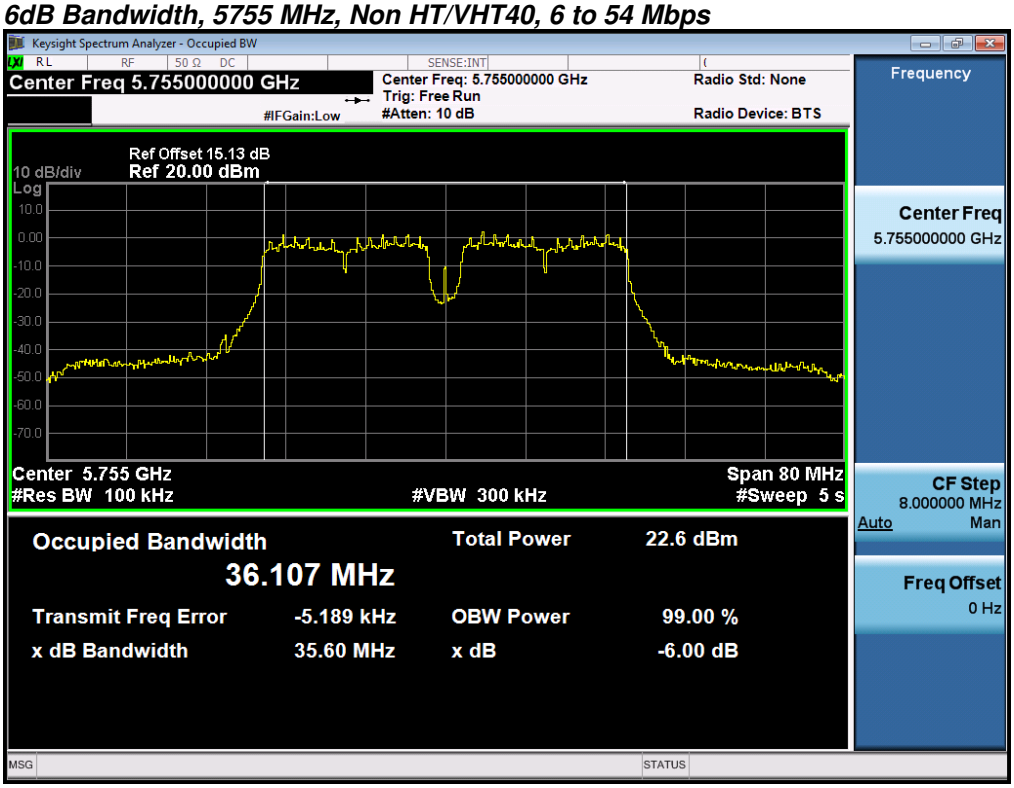

6dB Bandwidth, 5755 MHz, HT/VHT40, M0 to M23, M0 to M9 1-3ss

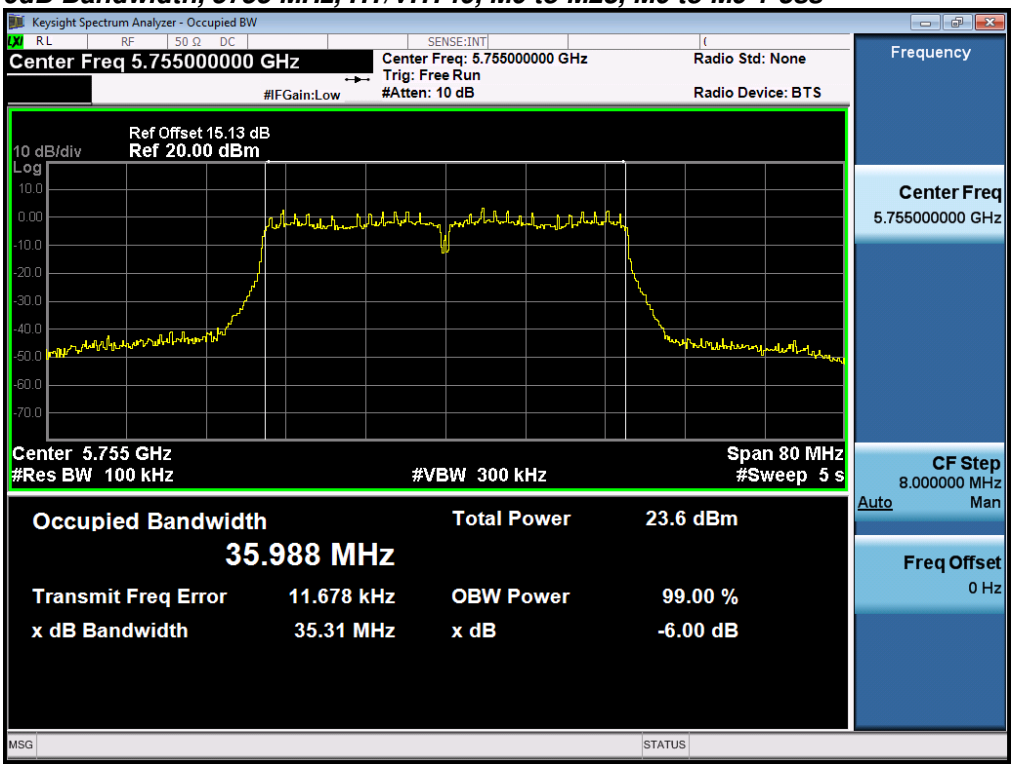

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps

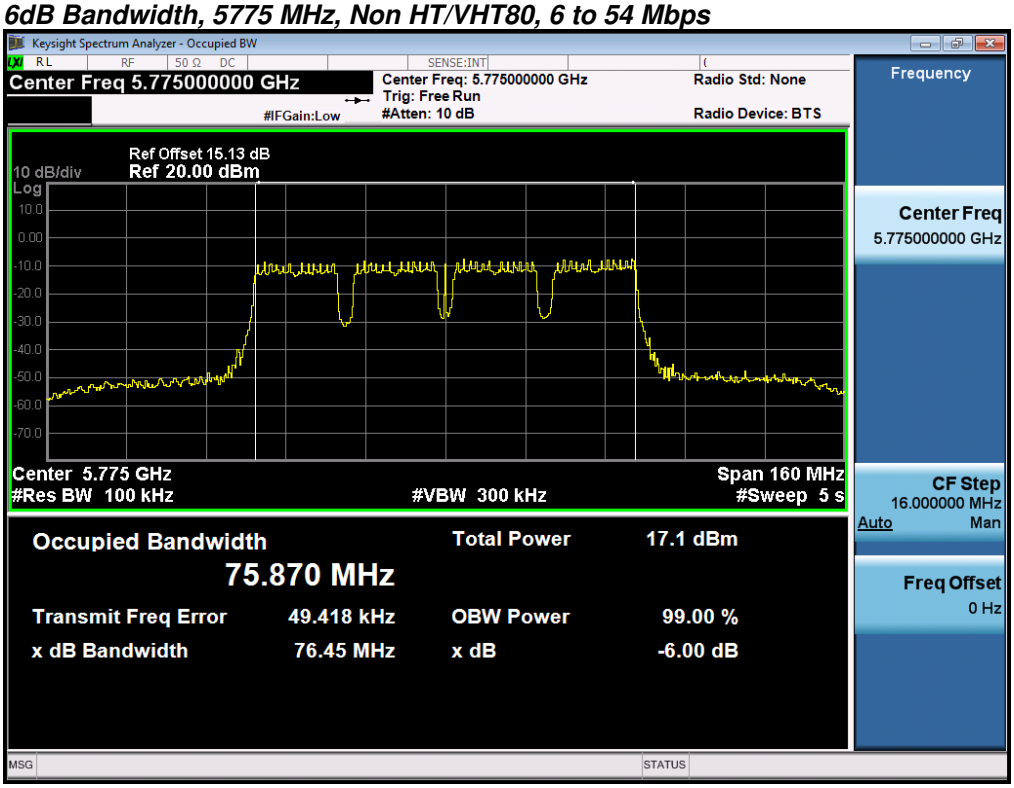

6dB Bandwidth, 5775 MHz, HT/VHT80, M0 to M23, M0 to M9 1-3ss

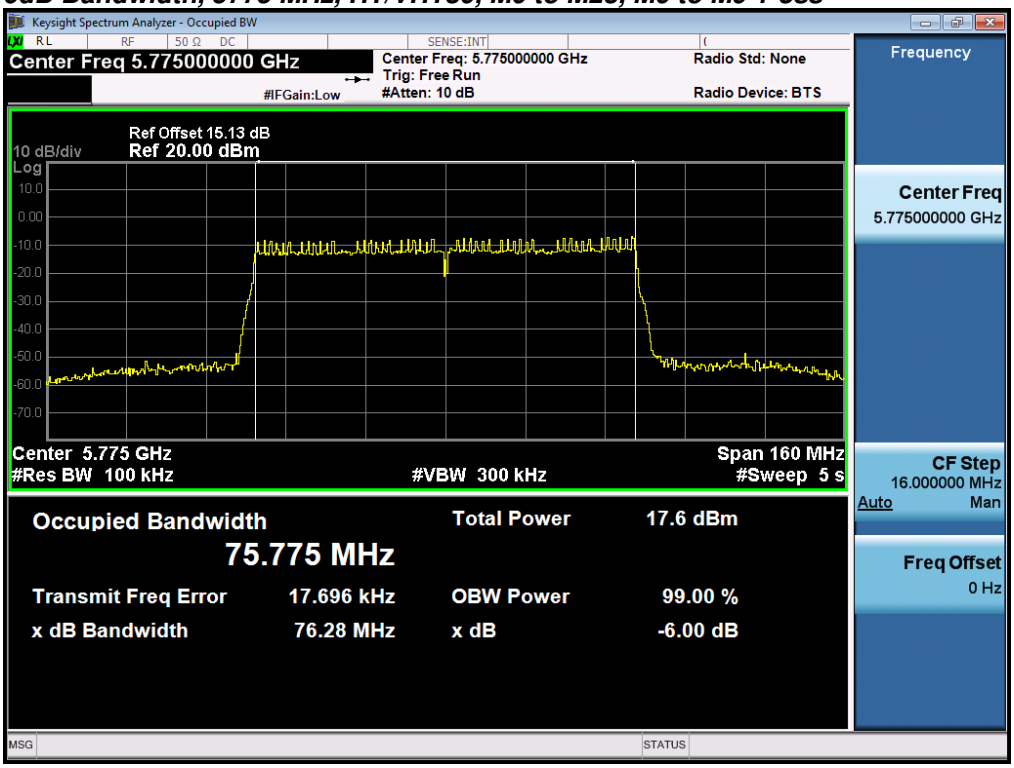

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

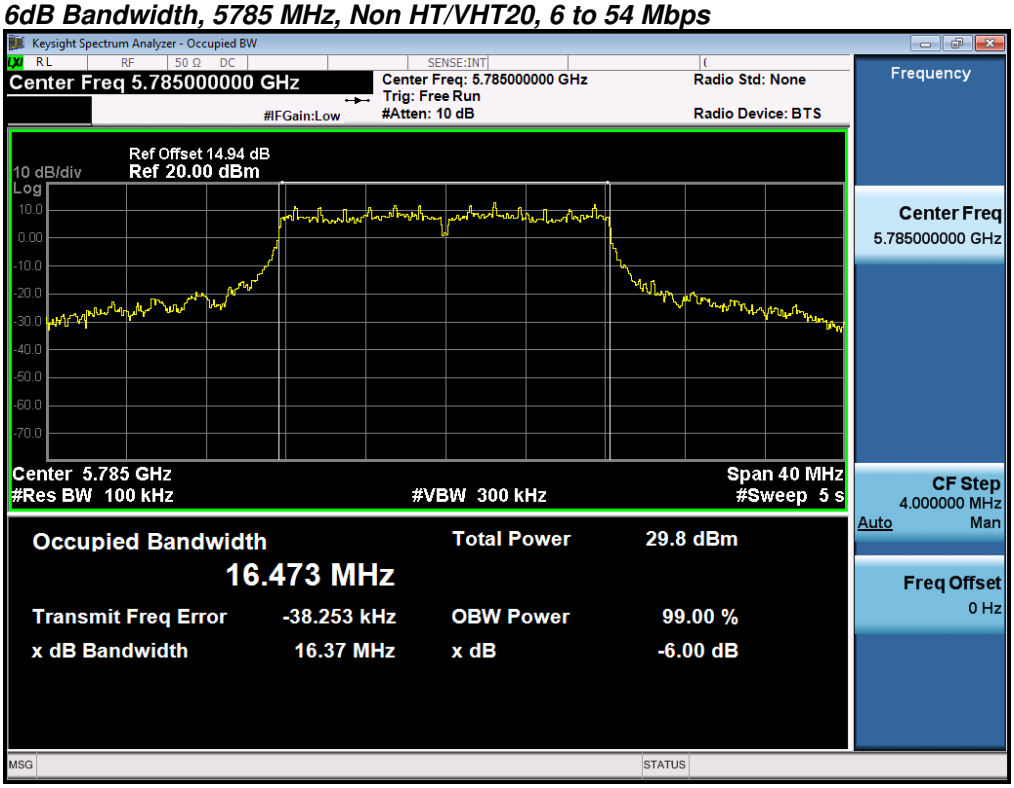

6dB Bandwidth, 5785 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

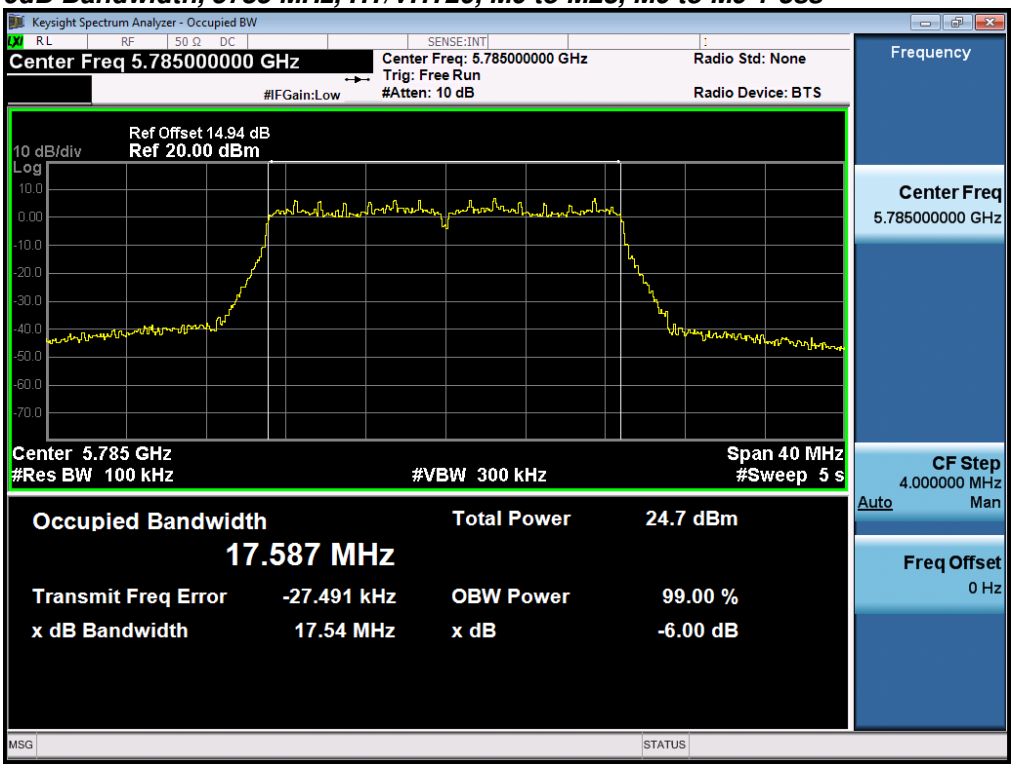

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

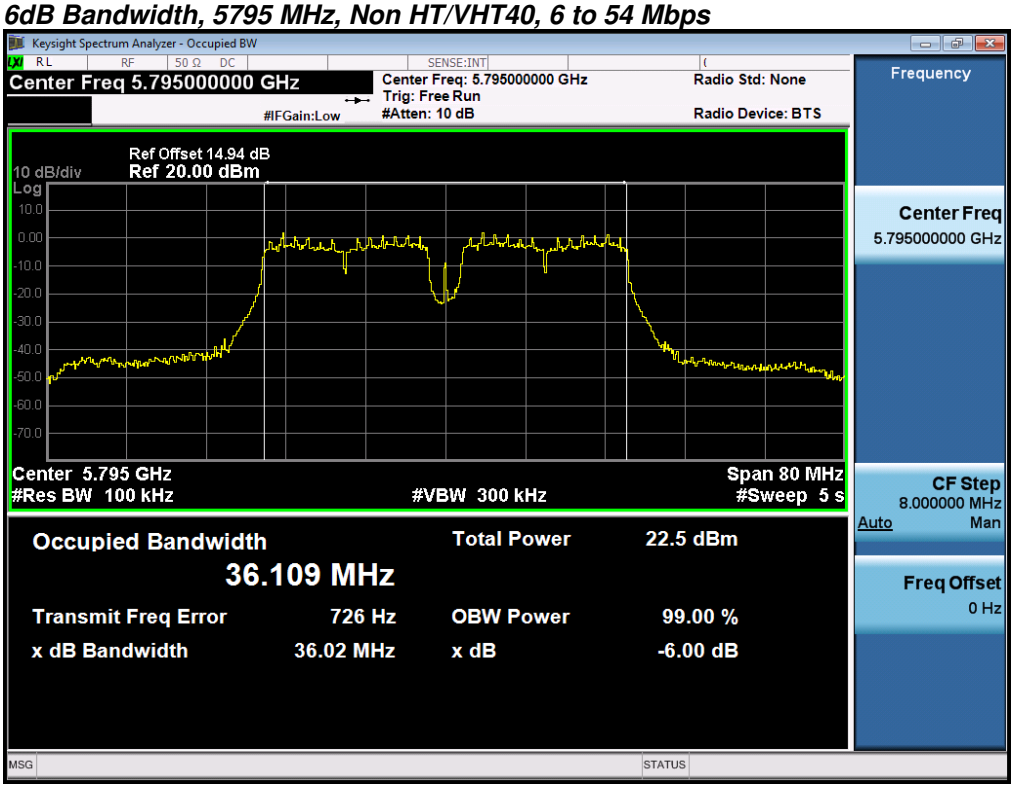

6dB Bandwidth, 5795 MHz, HT/VHT40, M0 to M23, M0 to M9 1-3ss

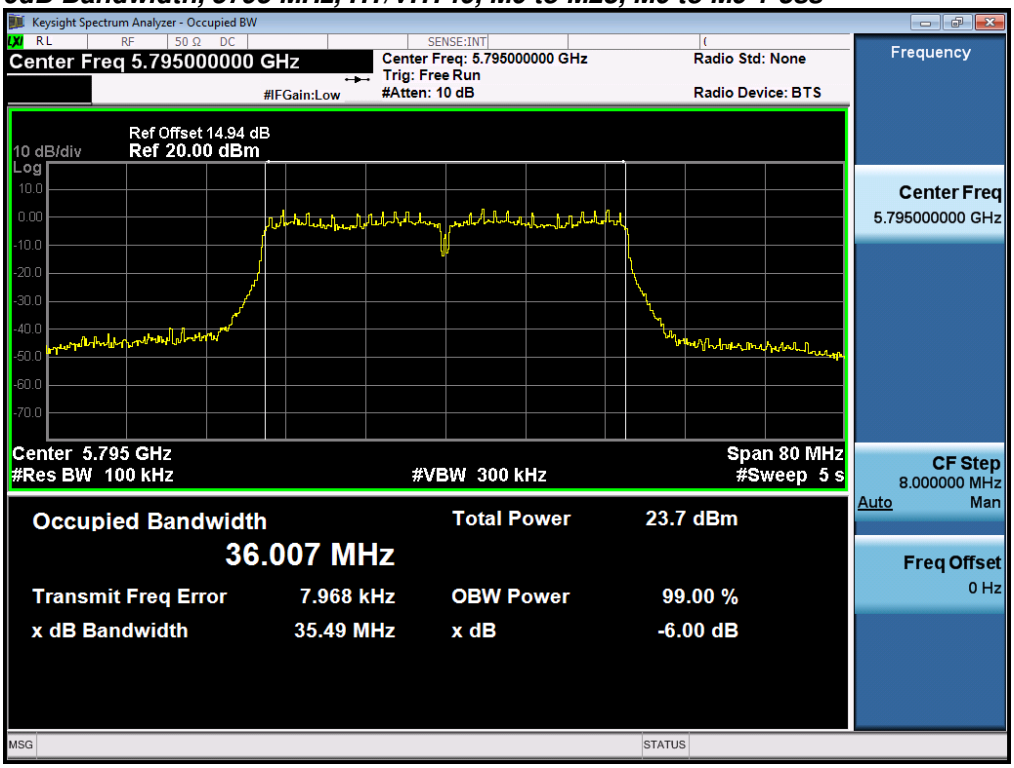

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5825 MHz, Non HT/VHT20, 6 to 54 Mbps

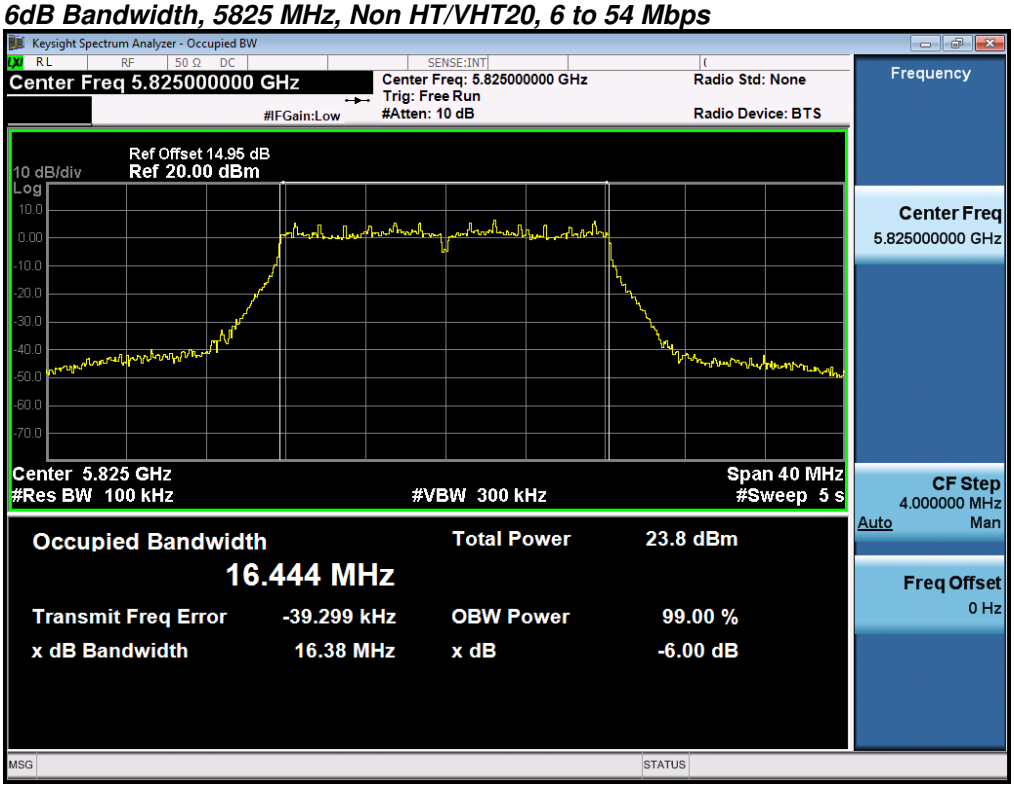

6dB Bandwidth, 5825 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

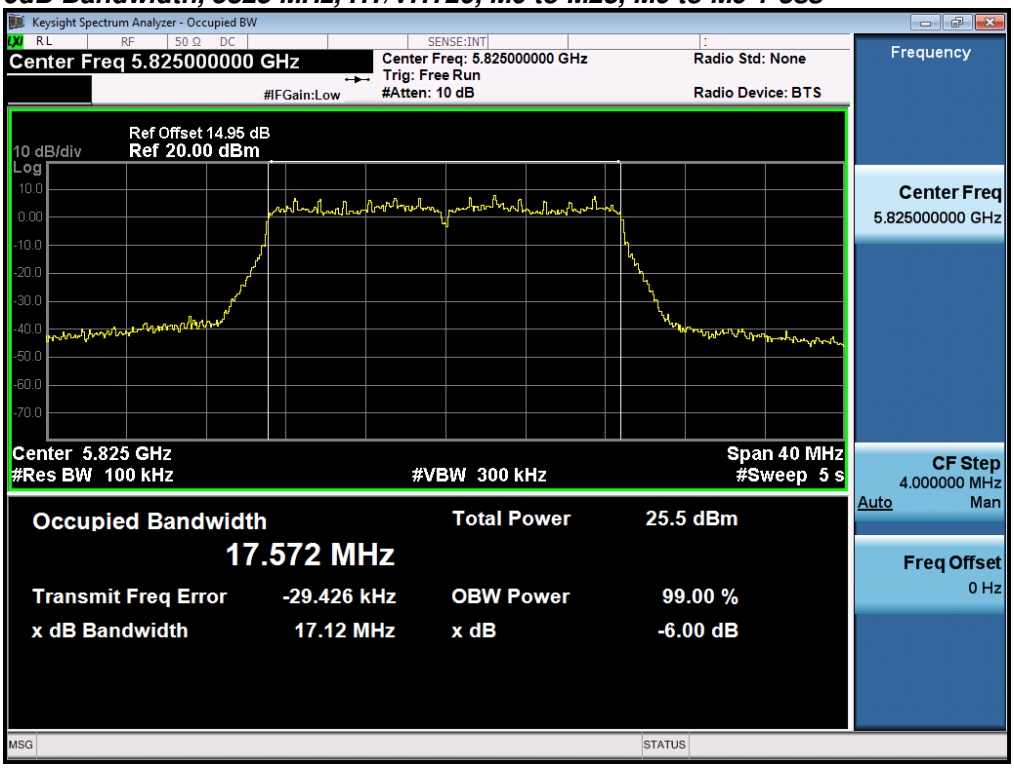

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.2 99% and 26dB Bandwidth

FCC 15.407 The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB) Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB) Test parameters
Span = 1.5 x to 5.0 times OBW RBW = approx. 1% to 5% of the OBW VBW ≥ 3 x RBW Detector = Peak or where practical sample shall be used Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By : Jose Aguirre	**Date of testing:** 10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT/VHT20, 6 to 54 Mbps	6	19.4	16.6
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	19.8	17.6
5755	Non HT/VHT40, 6 to 54 Mbps	6	40.4	36.2
	HT/VHT40, M0 to M23, M0 to M9 1-3ss	m0	40.5	36.1
5775	Non HT/VHT80, 6 to 54 Mbps	6	83.2	76.3
	HT/VHT80, M0 to M23, M0 to M9 1-3ss	m0x1	82.1	76.6
5785	Non HT/VHT20, 6 to 54 Mbps	6	20.9	16.6
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	20.1	17.6
5795	Non HT/VHT40, 6 to 54 Mbps	6	40.5	36.2
	HT/VHT40, M0 to M23, M0 to M9 1-3ss	m0	40.5	36.1
5825	Non HT/VHT20, 6 to 54 Mbps	6	19.4	16.6
	HT/VHT20, M0 to M23, M0 to M9 1-3ss	m0	19.8	17.6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

26dB / 99% Bandwidth, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps

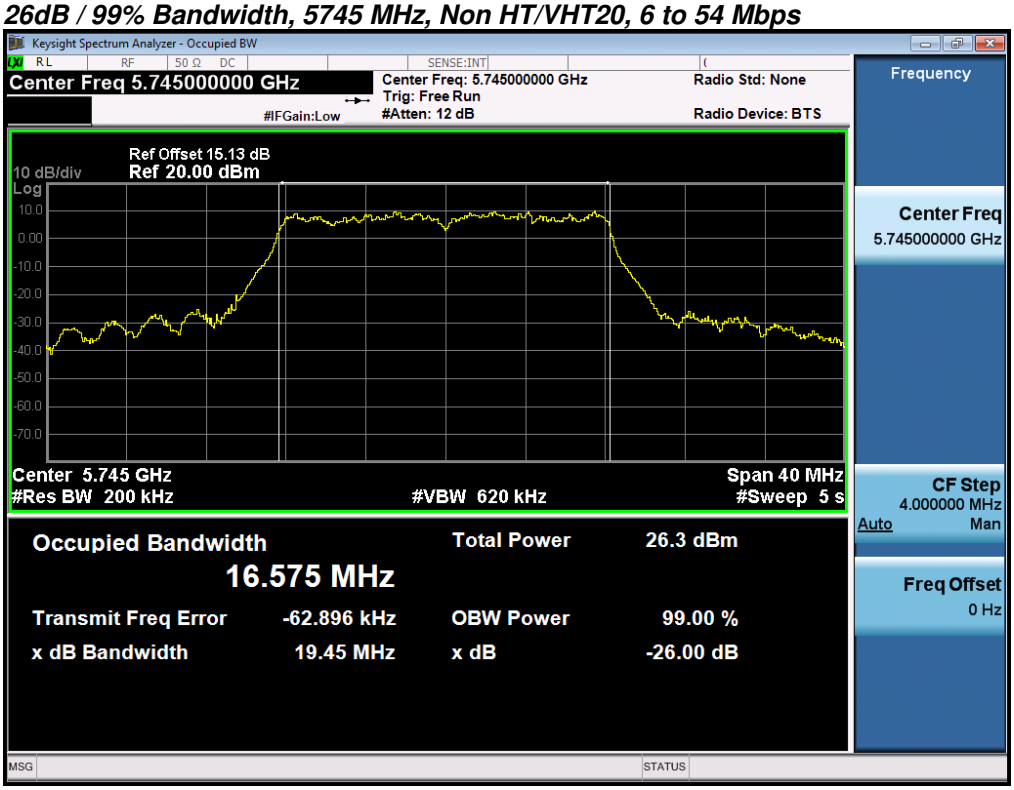

26dB / 99% Bandwidth, 5745 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

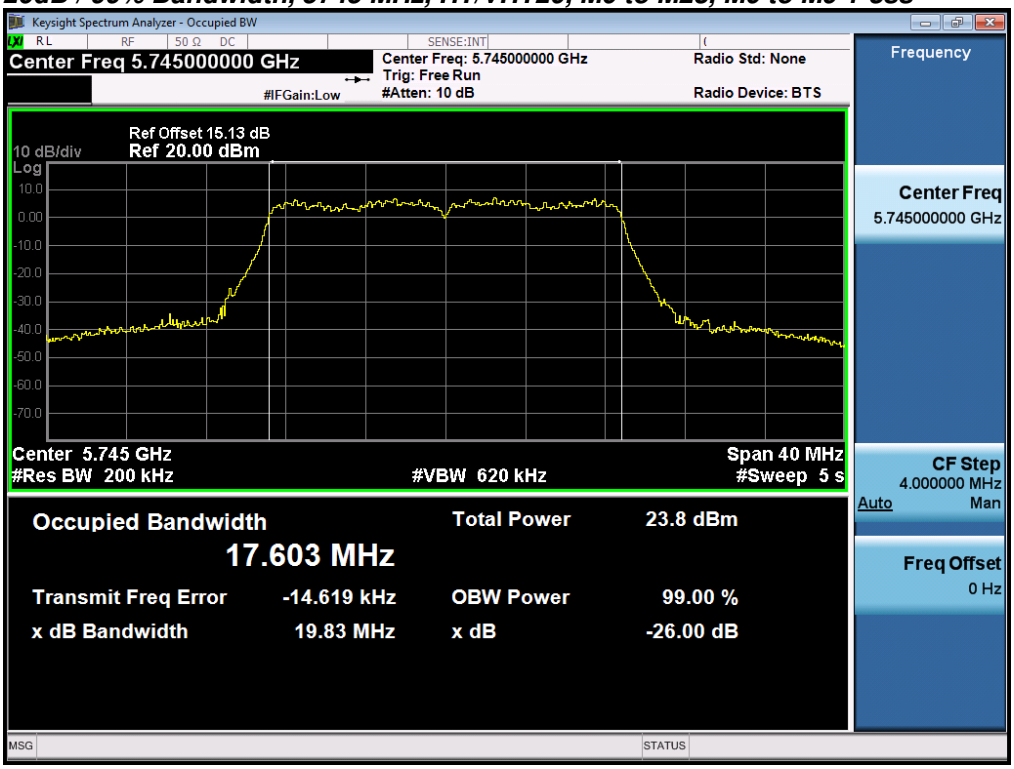

26dB / 99% Bandwidth, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

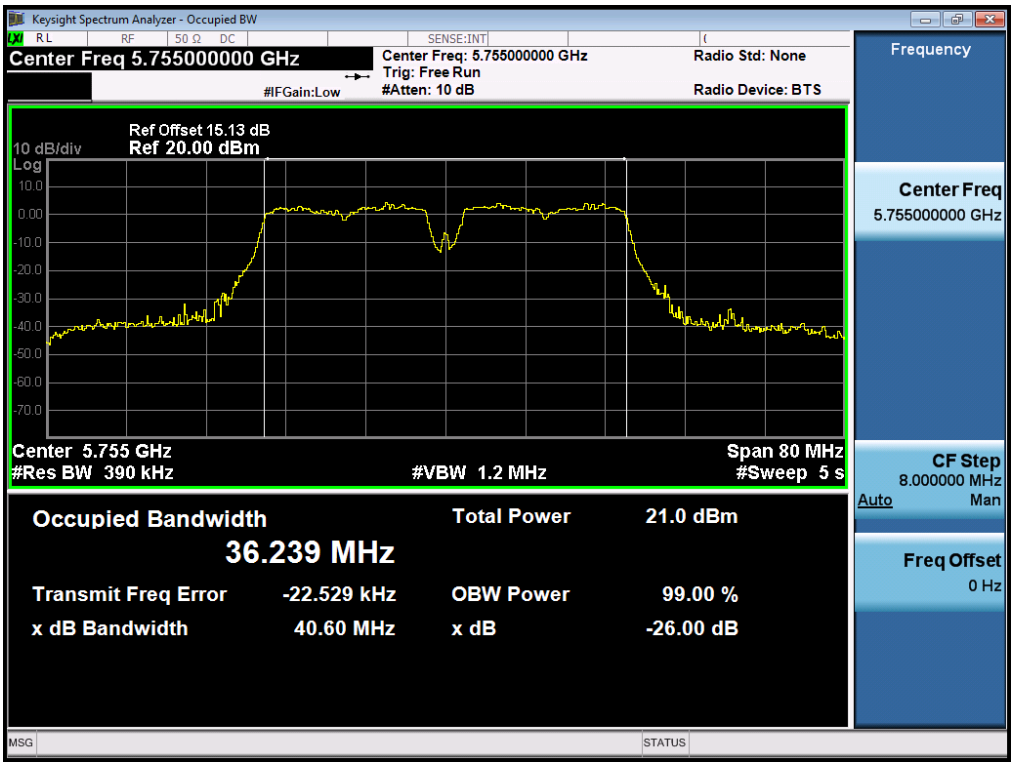

26dB / 99% Bandwidth, 5755 MHz, HT/VHT40, M0 to M23, M0 to M9 1-3ss

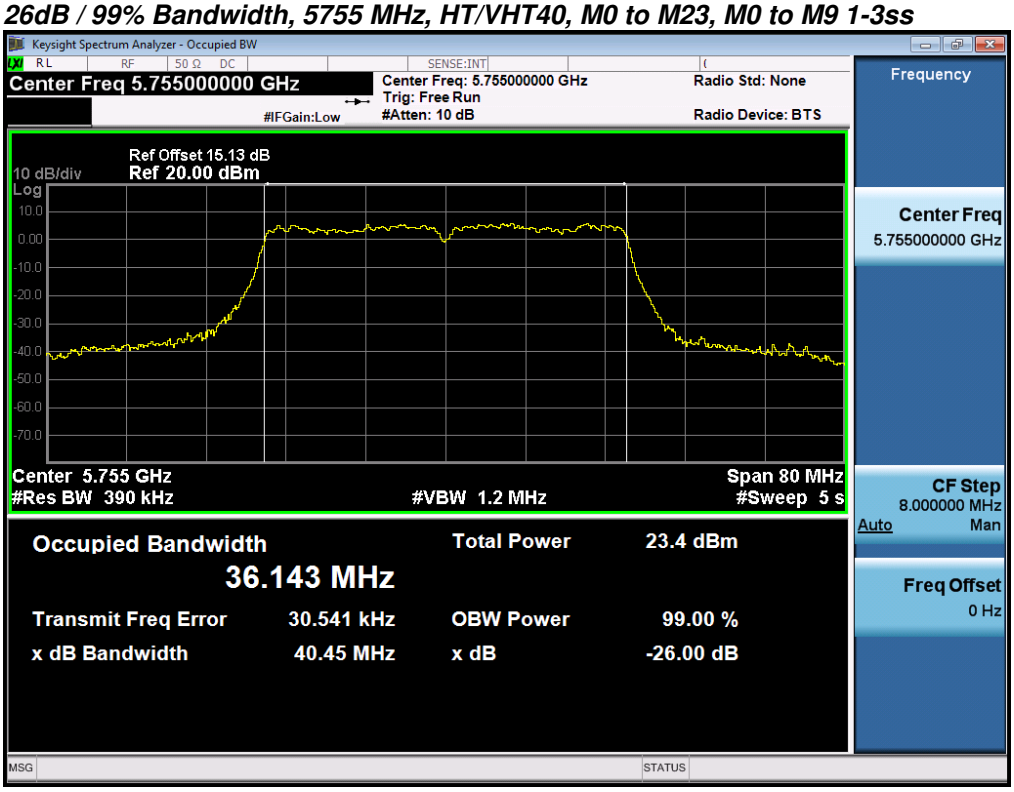

26dB / 99% Bandwidth, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

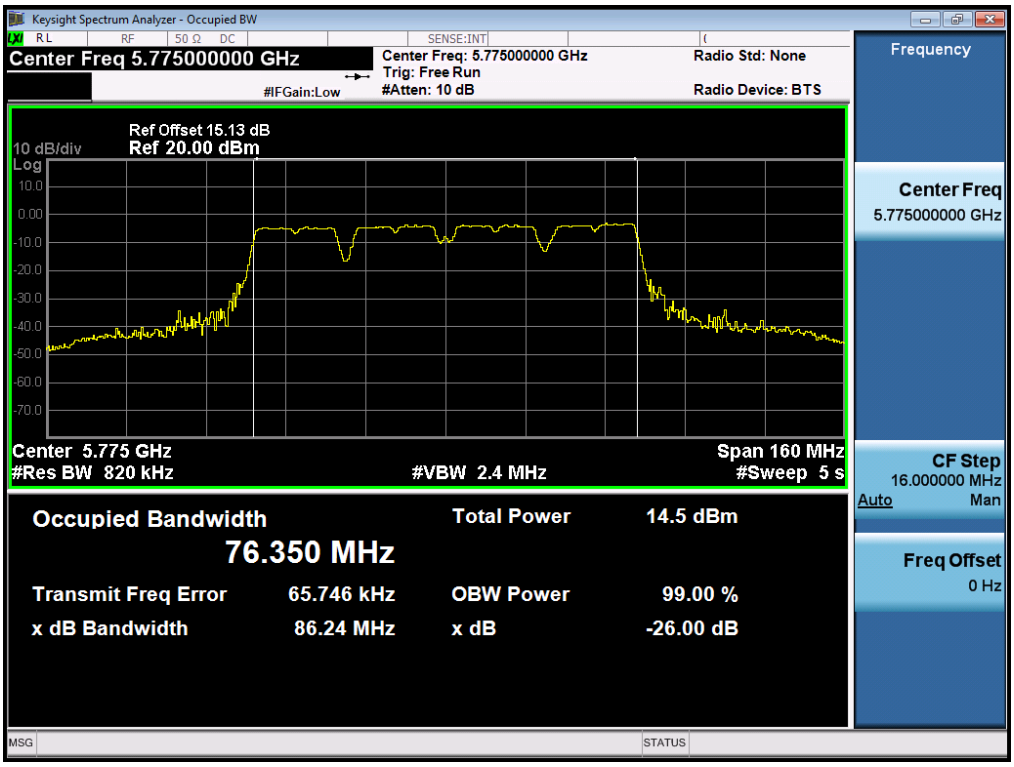

26dB / 99% Bandwidth, 5775 MHz, HT/VHT80, M0 to M23, M0 to M9 1-3ss

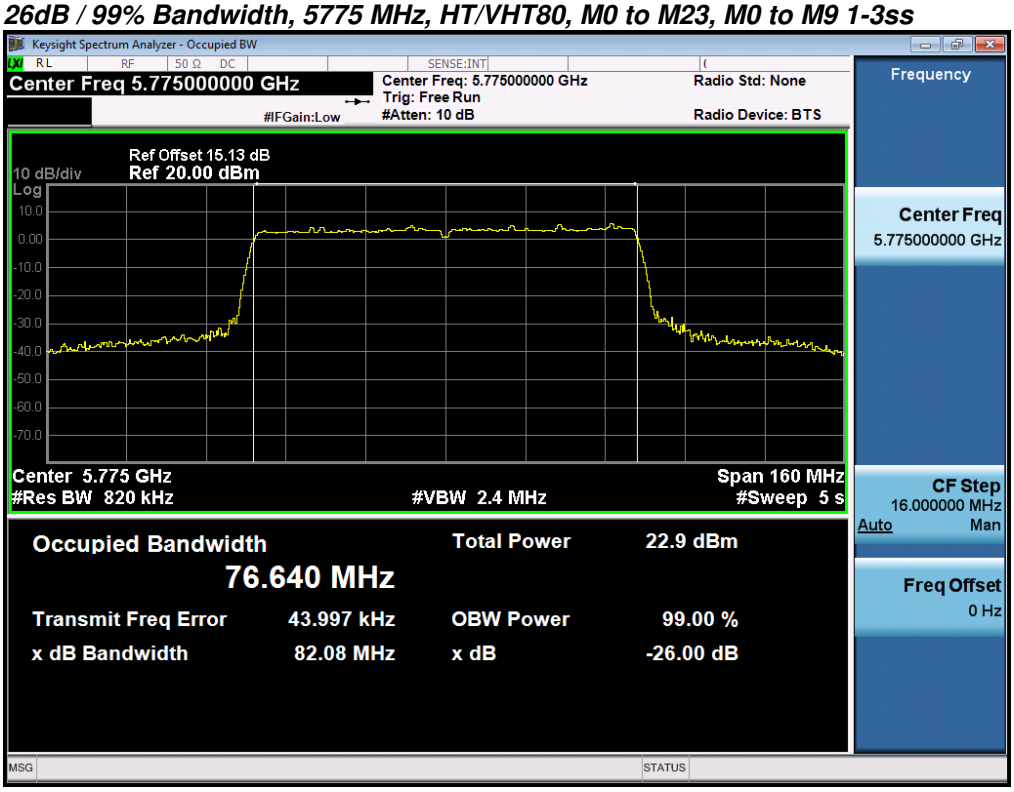

26dB / 99% Bandwidth, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

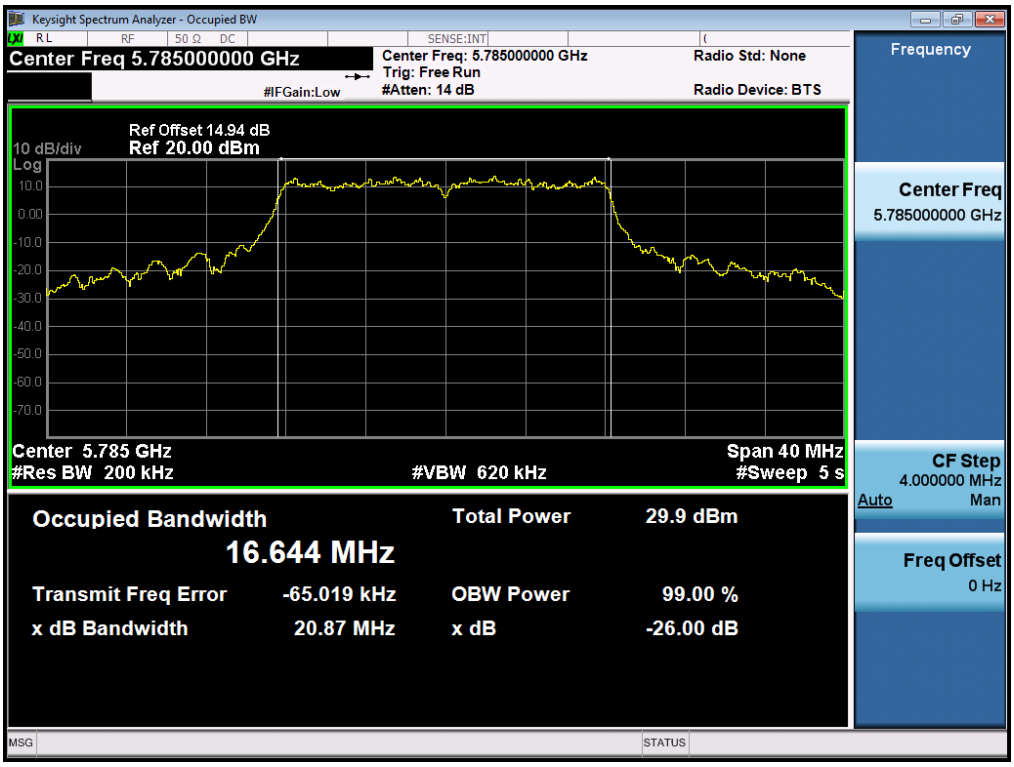

26dB / 99% Bandwidth, 5785 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

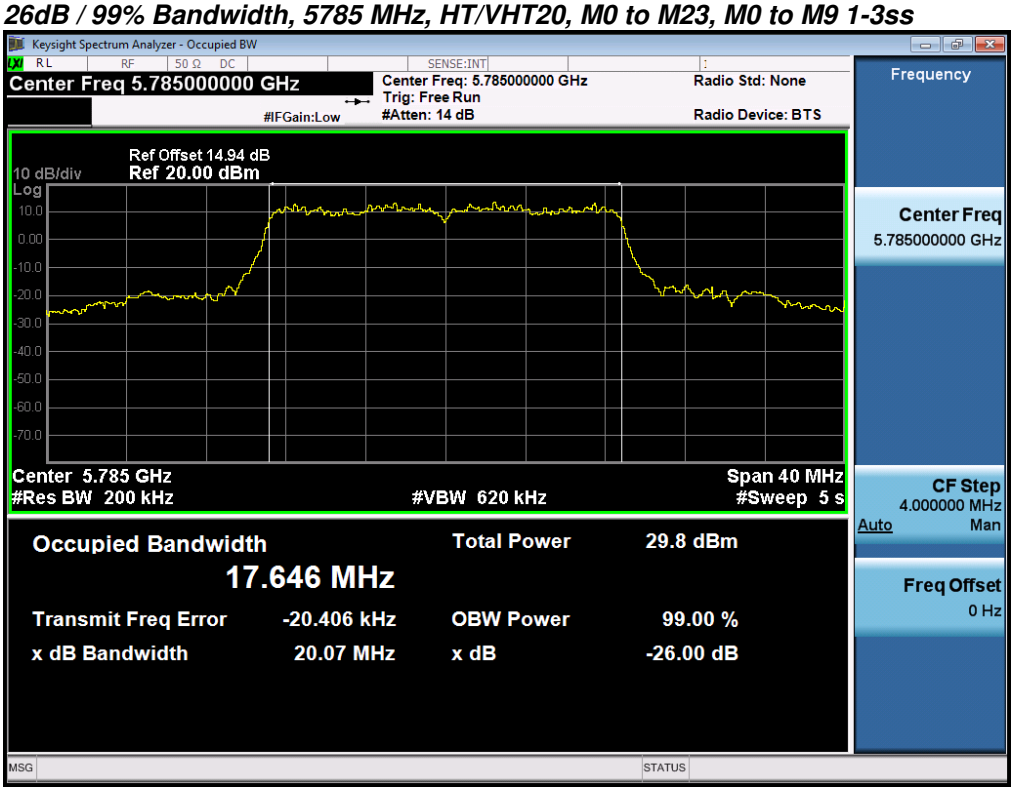

26dB / 99% Bandwidth, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

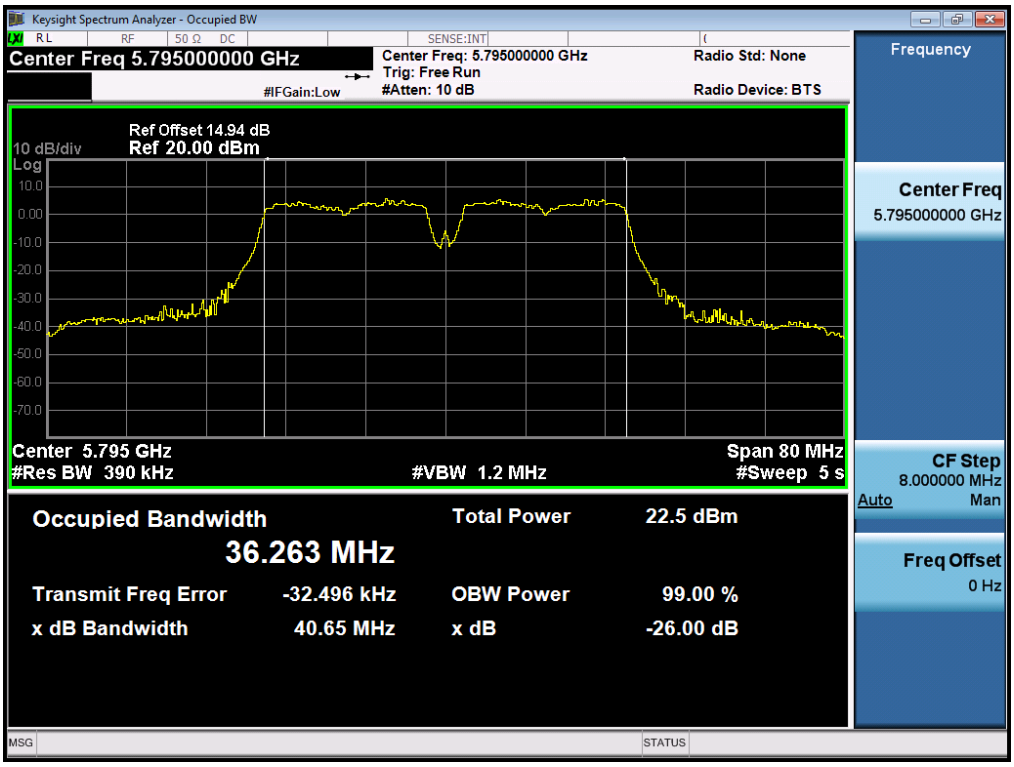

26dB / 99% Bandwidth, 5795 MHz, HT/VHT40, M0 to M23, M0 to M9 1-3ss

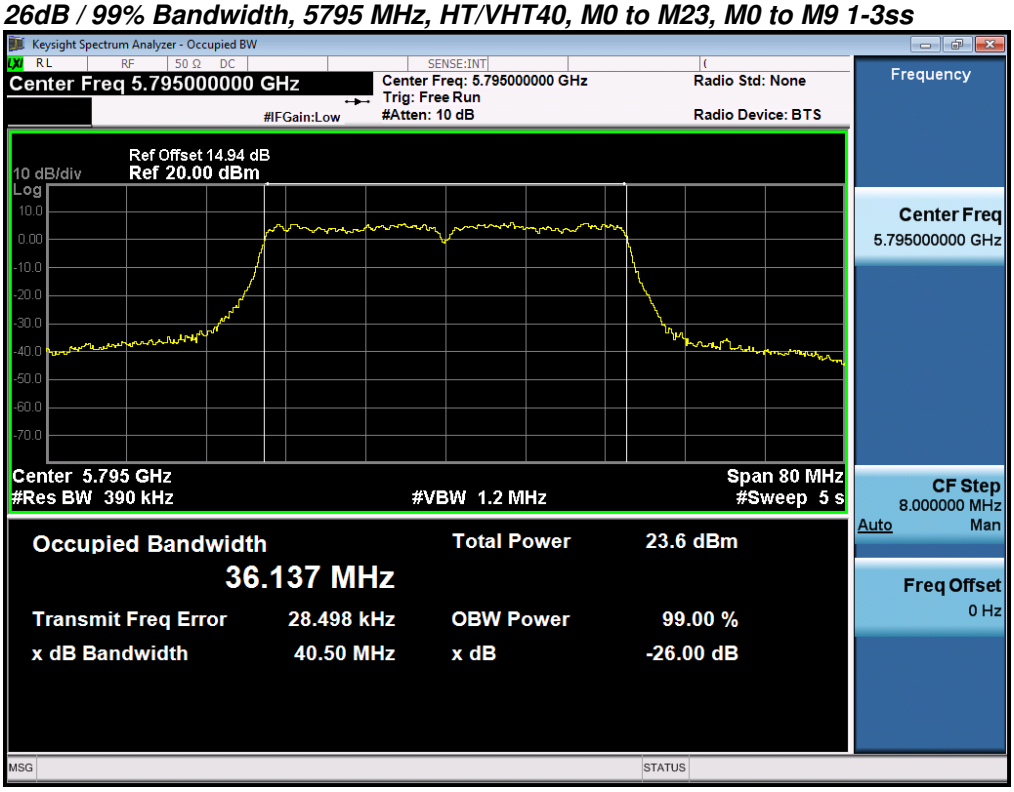

26dB / 99% Bandwidth, 5825 MHz, Non HT/VHT20, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

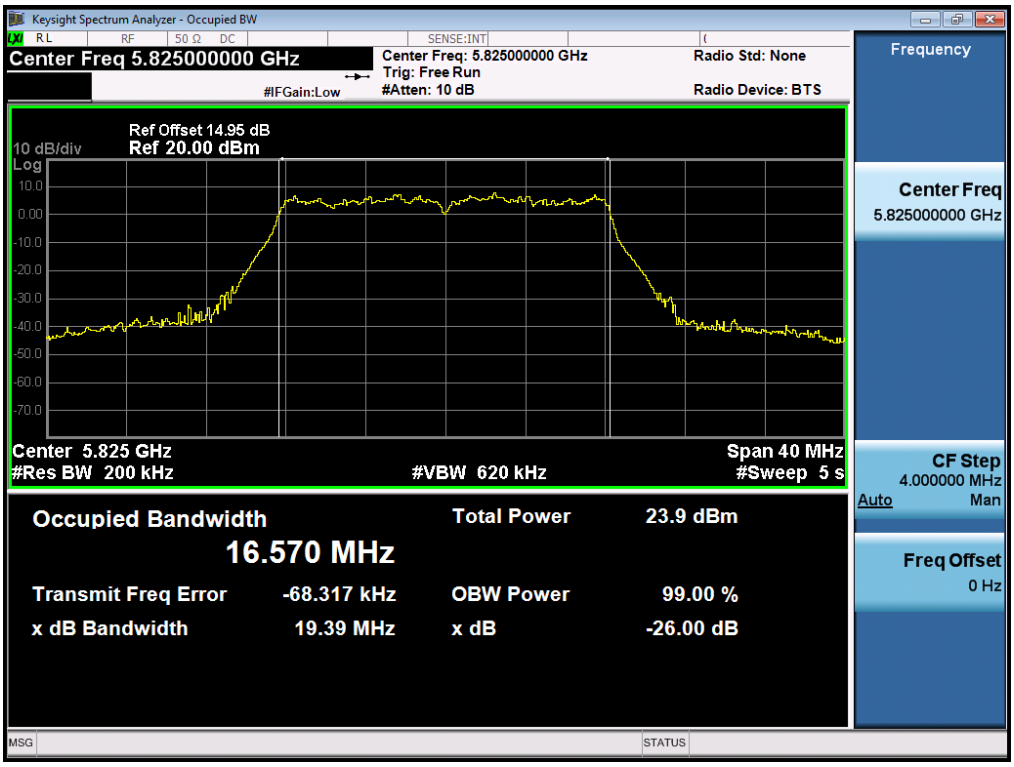

26dB / 99% Bandwidth, 5825 MHz, HT/VHT20, M0 to M23, M0 to M9 1-3ss

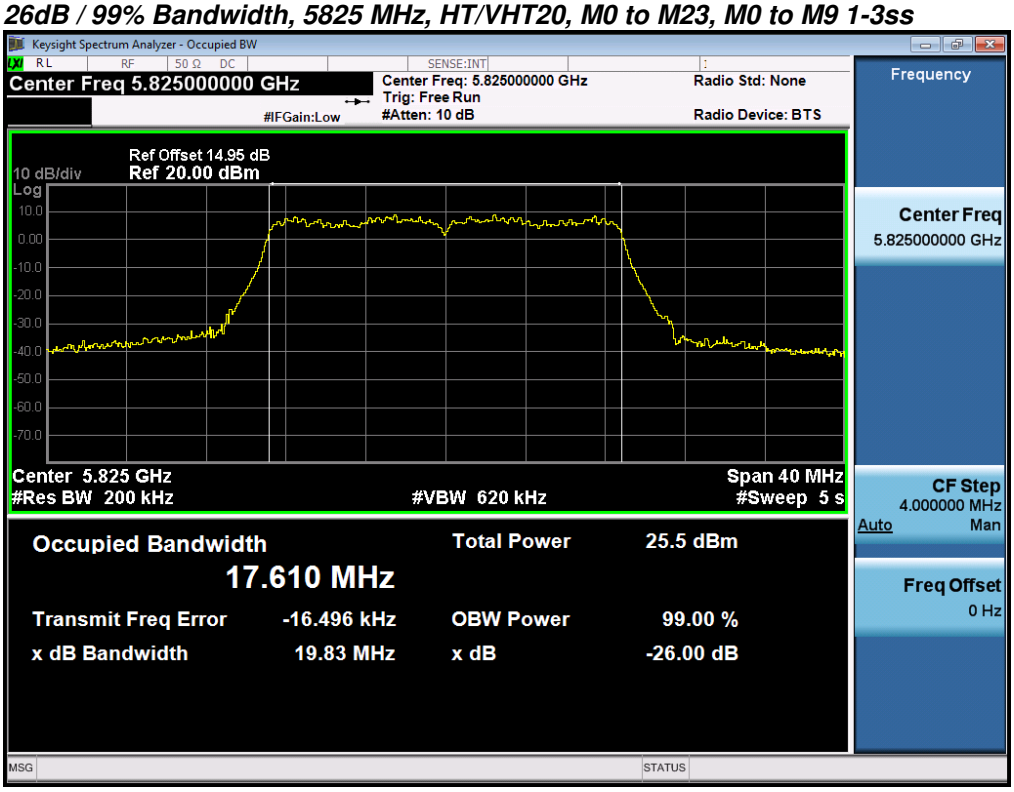

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.3 Maximum Conducted Output Power

15.407 a.3

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Maximum Conducted Output power Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 11.9.2 **Method AVGSA-1**

Maximum Conducted Output power Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (ANSI C63.10: 2013, section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By : Jose Aguirre	**Date of testing:** 10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	8	19.2				19.2	28.0	8.8
	Non HT/VHT20, 6 to 54 Mbps	2	8	17.9	18.1			21.0	28.0	7.0
	Non HT/VHT20, 6 to 54 Mbps	3	8	17.9	18.1	17.5		22.6	28.0	5.4
	Non HT/VHT20, 6 to 54 Mbps	4	8	16.7	16.9	16.3	16.7	22.7	28.0	5.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	16.7	16.9			19.8	25.0	5.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	15.8	15.9	15.3		20.4	23.2	2.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	11.4	11.9	11.5	12.0	17.7	22.0	4.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	16.7				16.7	28.0	11.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	16.7	16.7			19.7	28.0	8.3
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	16.7	16.7			19.7	28.0	8.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	16.7	16.7	16.4		21.4	28.0	6.6
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	16.7	16.7	16.4		21.4	28.0	6.6
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	16.7	16.7	16.4		21.4	28.0	6.6
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	16.7	16.7	16.4	16.7	22.6	28.0	5.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	16.7	16.7	16.4	16.7	22.6	28.0	5.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	16.7	16.7	16.4	16.7	22.6	28.0	5.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	16.7	16.7			19.7	25.0	5.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	16.7	16.7			19.7	28.0	8.3
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	15.7	15.6	15.3		20.3	23.2	2.9
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	16.7	16.7	16.4		21.4	26.2	4.8
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	16.7	16.7	16.4		21.4	28.0	6.6
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	12.1	12.6	12.3	12.7	18.5	22.0	3.5
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	15.7	15.6	15.3	15.7	21.6	25.0	3.4
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	16.7	16.7	16.4	16.7	22.6	26.8	4.2
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	16.7	16.7			19.7	28.0	8.3
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	16.7	16.7	16.4		21.4	28.0	6.6
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	16.7	16.7	16.4	16.7	22.6	28.0	5.4
5755	Non HT/VHT40, 6 to 54 Mbps	1	8	15.3				15.3	28.0	12.7
	Non HT/VHT40, 6 to 54 Mbps	2	8	13.8	14.0			16.9	28.0	11.1
	Non HT/VHT40, 6 to 54 Mbps	3	8	12.7	13.0	12.5		17.5	28.0	10.5
	Non HT/VHT40, 6 to 54 Mbps	4	8	9.3	9.6	9.6	9.8	15.6	28.0	12.4
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	16.1				16.1	28.0	11.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	12.6	12.8			15.7	28.0	12.3
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	12.6	12.8			15.7	28.0	12.3

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	11.6	12.3	11.6		16.6	28.0	11.4
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	11.6	12.3	11.6		16.6	28.0	11.4
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	11.6	12.3	11.6		16.6	28.0	11.4
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	10.5	10.9	10.6	11.0	16.8	28.0	11.2
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	10.5	10.9	10.6	11.0	16.8	28.0	11.2
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	10.5	10.9	10.6	11.0	16.8	28.0	11.2
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	11.6	12.3			15.0	25.0	10.0
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	12.6	12.8			15.7	28.0	12.3
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	9.6	9.9	9.6		14.5	23.2	8.7
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	10.5	10.9	10.6		15.4	26.2	10.8
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	11.6	12.3	11.6		16.6	28.0	11.4
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	5.1	5.9	5.4	6.1	11.7	22.0	10.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	9.6	9.9	9.6	10.0	15.8	25.0	9.2
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	10.5	10.9	10.6	11.0	16.8	26.8	10.0
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	12.6	12.8			15.7	28.0	12.3
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	11.6	12.3	11.6		16.6	28.0	11.4
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	10.5	10.9	10.6	11.0	16.8	28.0	11.2
5775	Non HT/VHT80, 6 to 54 Mbps	1	8	13.7				13.7	28.0	14.3
	Non HT/VHT80, 6 to 54 Mbps	2	8	9.4	9.7			12.6	28.0	15.4
	Non HT/VHT80, 6 to 54 Mbps	3	8	7.0	7.6	7.5		12.1	28.0	15.9
	Non HT/VHT80, 6 to 54 Mbps	4	8	7.0	7.6	7.5	7.7	13.5	28.0	14.5
	HT/VHT80, M0 to M7, M0 to M9 1ss	1	8	15.0				15.0	28.0	13.0
	HT/VHT80, M0 to M7, M0 to M9 1ss	2	8	11.5	12.0			14.8	28.0	13.2
	HT/VHT80, M8 to M15, M0 to M9 2ss	2	8	11.5	12.0			14.8	28.0	13.2
	HT/VHT80, M0 to M7, M0 to M9 1ss	3	8	10.3	10.7	10.5		15.3	28.0	12.7
	HT/VHT80, M8 to M15, M0 to M9 2ss	3	8	10.3	10.7	10.5		15.3	28.0	12.7
	HT/VHT80, M16 to M23, M0 to M9 3ss	3	8	10.3	10.7	10.5		15.3	28.0	12.7
	HT/VHT80, M0 to M7, M0 to M9 1ss	4	8	10.3	10.7	10.5	10.7	16.6	28.0	11.4
	HT/VHT80, M8 to M15, M0 to M9 2ss	4	8	10.3	10.7	10.5	10.7	16.6	28.0	11.4
	HT/VHT80, M16 to M23, M0 to M9 3ss	4	8	10.3	10.7	10.5	10.7	16.6	28.0	11.4
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	10.3	10.7			13.5	25.0	11.5
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	11.5	12.0			14.8	28.0	13.2
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	5.9	6.3	6.2		10.9	23.2	12.3
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	10.3	10.7	10.5		15.3	26.2	10.9
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	10.3	10.7	10.5		15.3	28.0	12.7
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	2.4	3.1	3.1	3.2	9.0	22.0	13.0
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	5.9	6.3	6.2	6.7	12.3	25.0	12.7
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	9.4	9.7	9.5	9.7	15.6	26.8	11.2
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	2	8	11.5	12.0			14.8	28.0	13.2
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	3	8	10.3	10.7	10.5		15.3	28.0	12.7
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	4	8	10.3	10.7	10.5	10.7	16.6	28.0	11.4

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT/VHT20, 6 to 54 Mbps	1	8	22.8				22.8	28.0	5.2
	Non HT/VHT20, 6 to 54 Mbps	2	8	22.8	23.6			26.2	28.0	1.8
	Non HT/VHT20, 6 to 54 Mbps	3	8	21.2	21.7	21.8		26.3	28.0	1.7
	Non HT/VHT20, 6 to 54 Mbps	4	8	21.2	21.7	21.8	22.2	27.8	28.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	21.2	21.7			24.5	25.0	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	18.0	18.0	17.8		22.7	23.2	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	16.0	15.8	15.8	16.1	21.9	22.0	0.1
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	22.7				22.7	28.0	5.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	22.7	23.7			26.2	28.0	1.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	22.7	23.7			26.2	28.0	1.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	21.2	21.7	21.6		26.3	28.0	1.7
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	21.2	21.7	21.6		26.3	28.0	1.7
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	21.2	21.7	21.6		26.3	28.0	1.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	21.2	21.7	21.6	21.9	27.6	28.0	0.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	21.2	21.7	21.6	21.9	27.6	28.0	0.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	21.2	21.7	21.6	21.9	27.6	28.0	0.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	21.2	21.7			24.5	25.0	0.5
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	22.7	23.7			26.2	28.0	1.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	17.6	17.8	17.7		22.5	23.2	0.7
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	20.3	20.8	20.8		25.4	26.2	0.8
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	21.2	21.7	21.6		26.3	28.0	1.7
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	15.6	15.8	15.6	15.8	21.7	22.0	0.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	18.6	18.8	18.5	18.8	24.7	25.0	0.3
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	20.3	20.8	20.8	21.1	26.8	26.8	0.0
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	22.7	23.7			26.2	28.0	1.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	21.2	21.7	21.6		26.3	28.0	1.7
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	21.2	21.7	21.6	21.9	27.6	28.0	0.4
5795	Non HT/VHT40, 6 to 54 Mbps	1	8	15.2				15.2	28.0	12.8
	Non HT/VHT40, 6 to 54 Mbps	2	8	15.2	15.3			18.3	28.0	9.7
	Non HT/VHT40, 6 to 54 Mbps	3	8	15.2	15.3	15.0		19.9	28.0	8.1
	Non HT/VHT40, 6 to 54 Mbps	4	8	15.2	15.3	15.0	15.4	21.2	28.0	6.8
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	18.4				18.4	28.0	9.6
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	16.3	16.1			19.2	28.0	8.8
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	16.3	16.1			19.2	28.0	8.8
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	16.3	16.1	16.1		20.9	28.0	7.1
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	16.3	16.1	16.1		20.9	28.0	7.1
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	16.3	16.1	16.1		20.9	28.0	7.1
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	16.3	16.1	16.1	16.0	22.1	28.0	5.9
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	16.3	16.1	16.1	16.0	22.1	28.0	5.9
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	16.3	16.1	16.1	16.0	22.1	28.0	5.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	16.3	16.1			19.2	25.0	5.8
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	16.3	16.1			19.2	28.0	8.8
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	15.4	15.1	15.2		20.0	23.2	3.2
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	16.3	16.1	16.1		20.9	26.2	5.3
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	16.3	16.1	16.1		20.9	28.0	7.1
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	12.9	13.0	13.1	13.1	19.0	22.0	3.0
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	15.4	15.1	15.2	15.3	21.3	25.0	3.7
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	16.3	16.1	16.1	16.0	22.1	26.8	4.7
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	16.3	16.1			19.2	28.0	8.8
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	16.3	16.1	16.1		20.9	28.0	7.1
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	16.3	16.1	16.1	16.0	22.1	28.0	5.9
5825	Non HT/VHT20, 6 to 54 Mbps	1	8	16.8				16.8	28.0	11.2
	Non HT/VHT20, 6 to 54 Mbps	2	8	16.8	16.7			19.8	28.0	8.2
	Non HT/VHT20, 6 to 54 Mbps	3	8	16.8	16.7	16.1		21.3	28.0	6.7
	Non HT/VHT20, 6 to 54 Mbps	4	8	16.8	16.7	16.1	16.5	22.6	28.0	5.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	16.8	16.7			19.8	25.0	5.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	13.7	13.7	13.1		18.3	23.2	4.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	11.3	11.8	11.3	11.8	17.6	22.0	4.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	18.4				18.4	28.0	9.6
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	17.9	18.0			21.0	28.0	7.0
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	17.9	18.0			21.0	28.0	7.0
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	16.7	16.4	15.9		21.1	28.0	6.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	16.7	16.4	15.9		21.1	28.0	6.9
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	16.7	16.4	15.9		21.1	28.0	6.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	16.7	16.4	15.9	16.4	22.4	28.0	5.6
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	16.7	16.4	15.9	16.4	22.4	28.0	5.6
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	16.7	16.4	15.9	16.4	22.4	28.0	5.6
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	16.7	16.4			19.6	25.0	5.4
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	17.9	18.0			21.0	28.0	7.0
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	14.9	14.9	14.2		19.5	23.2	3.7
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	16.7	16.4	15.9		21.1	26.2	5.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	16.7	16.4	15.9		21.1	28.0	6.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	10.0	10.4	9.9	10.5	16.2	22.0	5.8
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	14.9	14.9	14.2	14.6	20.7	25.0	4.3
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	15.7	15.4	14.9	15.4	21.4	26.8	5.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	17.9	18.0			21.0	28.0	7.0
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	16.7	16.4	15.9		21.1	28.0	6.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	16.7	16.4	15.9	16.4	22.4	28.0	5.6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss

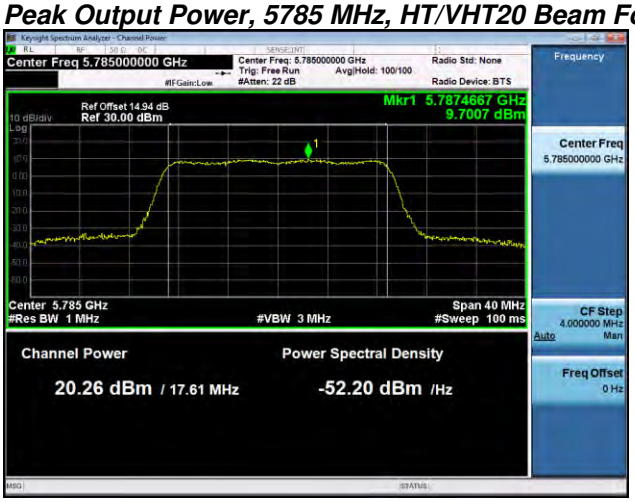

Antenna A

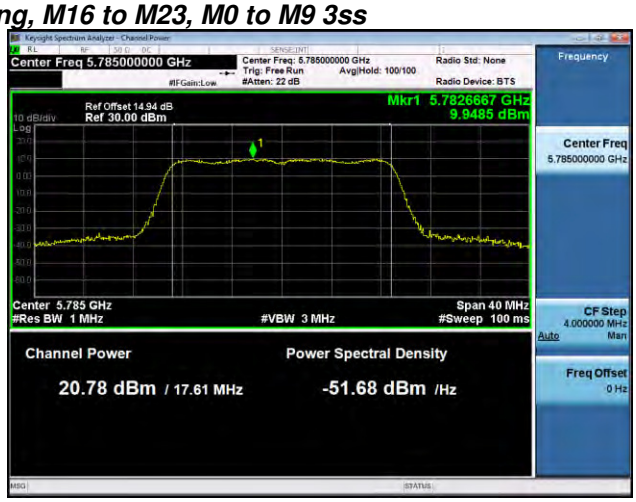

Antenna B

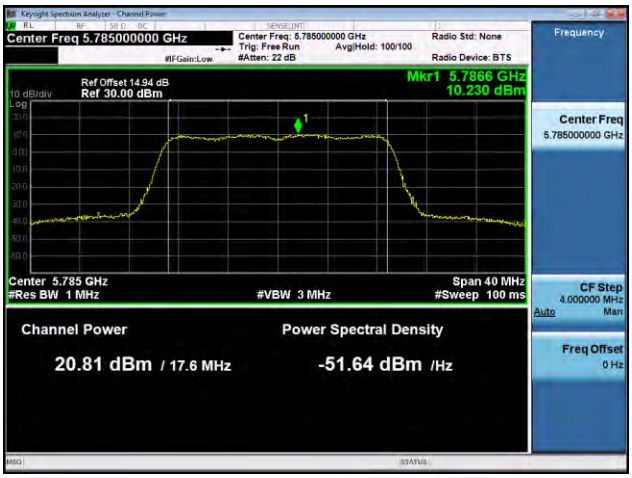

Antenna C

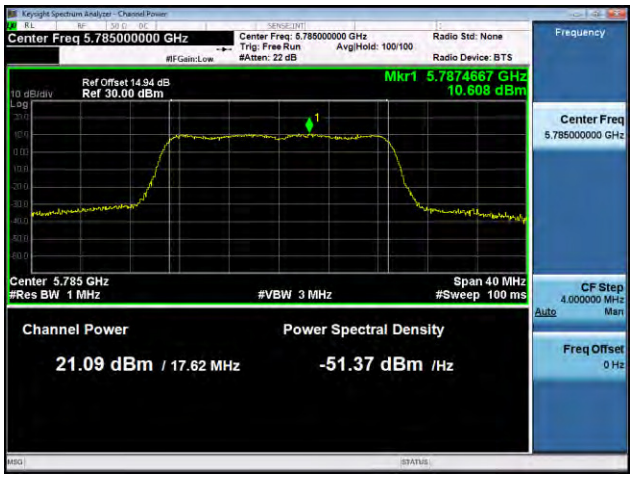

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.4 Power Spectral Density

15.407
The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

Power Spectral Density Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Set the radio in the continuous transmitting mode at full power 3. Configure Spectrum analyzer as per test parameters below and Peak search marker 4. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 v01 section F.5

Power Spectral Density Test parameters
Span = >1.5 times the OBW RBW = 500 kHz. VBW ≥ 3 x RBW Sweep = 10s Detector = Peak Trace = Single Sweep Marker = Peak Search

The "Measure and add 10 log(N) dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity 10 log(4) (or 6dB) is added to the worst case spectrum value before comparing to the emission limit. (ANSI C63.10 2013 section 14.3.2.3)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By : Jose Aguirre	**Date of testing:** 10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/500kHz)	Tx 2 PSD (dBm/500kHz)	Tx 3 PSD (dBm/500kHz)	Tx 4 PSD (dBm/500kHz)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	8	6.0				6.0	28.0	22.0
	Non HT/VHT20, 6 to 54 Mbps	2	8	4.6	4.9			7.8	28.0	20.2
	Non HT/VHT20, 6 to 54 Mbps	3	8	4.6	4.9	4.5		9.4	28.0	18.6
	Non HT/VHT20, 6 to 54 Mbps	4	8	3.7	3.9	3.1	3.4	9.6	28.0	18.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	3.7	3.9			6.8	25.0	18.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	2.9	2.5	1.9		7.2	23.2	16.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-1.5	-1.1	-1.7	-1.4	4.6	22.0	17.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	3.3				3.3	28.0	24.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	3.3	3.0			6.2	28.0	21.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	3.3	3.0			6.2	28.0	21.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	3.3	3.0	2.9		7.8	28.0	20.2
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	3.3	3.0	2.9		7.8	28.0	20.2
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	3.3	3.0	2.9		7.8	28.0	20.2
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	3.3	3.0	2.9	3.3	9.1	28.0	18.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	3.3	3.0	2.9	3.3	9.1	28.0	18.9
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	3.3	3.0	2.9	3.3	9.1	28.0	18.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	3.3	3.0			6.2	25.0	18.8
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	3.3	3.0			6.2	28.0	21.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	2.1	2.4	1.7		6.8	23.2	16.4
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	3.3	3.0	2.9		7.8	26.2	18.4
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	3.3	3.0	2.9		7.8	28.0	20.2
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-1.3	-1.0	-1.3	-0.4	5.0	22.0	17.0
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	2.1	2.4	1.7	2.1	8.1	25.0	16.9
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	3.3	3.0	2.9	3.3	9.1	26.8	17.7
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	3.3	3.0			6.2	28.0	21.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	3.3	3.0	2.9		7.8	28.0	20.2
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	3.3	3.0	2.9	3.3	9.1	28.0	18.9
5755	Non HT/VHT40, 6 to 54 Mbps	1	8	-0.6				-0.6	28.0	28.6
	Non HT/VHT40, 6 to 54 Mbps	2	8	-2.6	-2.2			0.6	28.0	27.4
	Non HT/VHT40, 6 to 54 Mbps	3	8	-3.7	-3.3	-3.9		1.1	28.0	26.9
	Non HT/VHT40, 6 to 54 Mbps	4	8	-7.1	-6.6	-6.6	-6.3	-0.6	28.0	28.6
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-0.5				-0.5	28.0	28.5
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-3.7	-3.8			-0.7	28.0	28.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-3.7	-3.8			-0.7	28.0	28.7

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-4.8	-4.2	-4.2		0.4	28.0	27.6
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-4.8	-4.2	-4.2		0.4	28.0	27.6
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-4.8	-4.2	-4.2		0.4	28.0	27.6
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-5.9	-5.5	-6.3	-5.4	0.3	28.0	27.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-5.9	-5.5	-6.3	-5.4	0.3	28.0	27.7
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-5.9	-5.5	-6.3	-5.4	0.3	28.0	27.7
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-4.8	-4.2			-1.5	25.0	26.5
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-3.7	-3.8			-0.7	28.0	28.7
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-6.8	-6.8	-6.9		-2.1	23.2	25.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-5.9	-5.5	-6.3		-1.1	26.2	27.3
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-4.8	-4.2	-4.2		0.4	28.0	27.6
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-11.4	-10.6	-11.1	-10.6	-4.9	22.0	26.9
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-6.8	-6.8	-6.9	-6.5	-0.7	25.0	25.7
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-5.9	-5.5	-6.3	-5.4	0.3	26.8	26.5
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-3.7	-3.8			-0.7	28.0	28.7
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-4.8	-4.2	-4.2		0.4	28.0	27.6
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-5.9	-5.5	-6.3	-5.4	0.3	28.0	27.7
5775	Non HT/VHT80, 6 to 54 Mbps	1	8	-4.4				-4.4	28.0	32.4
	Non HT/VHT80, 6 to 54 Mbps	2	8	-10.0	-9.8			-6.9	28.0	34.9
	Non HT/VHT80, 6 to 54 Mbps	3	8	-12.3	-11.7	-12.1		-7.3	28.0	35.3
	Non HT/VHT80, 6 to 54 Mbps	4	8	-12.3	-11.7	-12.1	-12.1	-6.0	28.0	34.0
	HT/VHT80, M0 to M7, M0 to M9 1ss	1	8	-4.9				-4.9	28.0	32.9
	HT/VHT80, M0 to M7, M0 to M9 1ss	2	8	-8.5	-7.9			-5.2	28.0	33.2
	HT/VHT80, M8 to M15, M0 to M9 2ss	2	8	-8.5	-7.9			-5.2	28.0	33.2
	HT/VHT80, M0 to M7, M0 to M9 1ss	3	8	-9.7	-9.4	-9.2		-4.7	28.0	32.7
	HT/VHT80, M8 to M15, M0 to M9 2ss	3	8	-9.7	-9.4	-9.2		-4.7	28.0	32.7
	HT/VHT80, M16 to M23, M0 to M9 3ss	3	8	-9.7	-9.4	-9.2		-4.7	28.0	32.7
	HT/VHT80, M0 to M7, M0 to M9 1ss	4	8	-9.7	-9.4	-9.2	-9.4	-3.4	28.0	31.4
	HT/VHT80, M8 to M15, M0 to M9 2ss	4	8	-9.7	-9.4	-9.2	-9.4	-3.4	28.0	31.4
	HT/VHT80, M16 to M23, M0 to M9 3ss	4	8	-9.7	-9.4	-9.2	-9.4	-3.4	28.0	31.4
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-9.7	-9.4			-6.5	25.0	31.5
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-8.5	-7.9			-5.2	28.0	33.2
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-13.8	-13.4	-13.5		-8.8	23.2	32.0
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-9.7	-9.4	-9.2		-4.7	26.2	30.9
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-9.7	-9.4	-9.2		-4.7	28.0	32.7
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-17.4	-16.9	-16.7	-17.0	-11.0	22.0	33.0
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-13.8	-13.4	-13.5	-13.6	-7.6	25.0	32.6
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-10.5	-10.3	-10.5	-10.4	-4.4	26.8	31.2
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	2	8	-8.5	-7.9			-5.2	28.0	33.2
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	3	8	-9.7	-9.4	-9.2		-4.7	28.0	32.7
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	4	8	-9.7	-9.4	-9.2	-9.4	-3.4	28.0	31.4

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT/VHT20, 6 to 54 Mbps	1	8	9.9				9.9	28.0	18.1
	Non HT/VHT20, 6 to 54 Mbps	2	8	9.9	10.3			13.1	28.0	14.9
	Non HT/VHT20, 6 to 54 Mbps	3	8	7.8	8.4	8.4		13.0	28.0	15.0
	Non HT/VHT20, 6 to 54 Mbps	4	8	7.8	8.4	8.4	8.8	14.4	28.0	13.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	7.8	8.4			11.1	25.0	13.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	4.6	5.0	4.9		9.6	23.2	13.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	2.7	2.4	2.4	3.0	8.7	22.0	13.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	9.2				9.2	28.0	18.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	9.2	10.1			12.7	28.0	15.3
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	9.2	10.1			12.7	28.0	15.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	7.8	8.2	7.9		12.7	28.0	15.3
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	7.8	8.2	7.9		12.7	28.0	15.3
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	7.8	8.2	7.9		12.7	28.0	15.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	7.8	8.2	7.9	8.2	14.0	28.0	14.0
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	7.8	8.2	7.9	8.2	14.0	28.0	14.0
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	7.8	8.2	7.9	8.2	14.0	28.0	14.0
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	7.8	8.2			11.0	25.0	14.0
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	9.2	10.1			12.7	28.0	15.3
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	4.1	4.4	4.1		9.0	23.2	14.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	7.0	7.4	7.5		12.1	26.2	14.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	7.8	8.2	7.9		12.7	28.0	15.3
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	1.9	2.3	1.8	2.4	8.1	22.0	13.9
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	4.9	5.5	5.2	5.2	11.2	25.0	13.8
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	7.0	7.4	7.5	7.4	13.3	26.8	13.5
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	9.2	10.1			12.7	28.0	15.3
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	7.8	8.2	7.9		12.7	28.0	15.3
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	7.8	8.2	7.9	8.2	14.0	28.0	14.0
5795	Non HT/VHT40, 6 to 54 Mbps	1	8	-1.2				-1.2	28.0	29.2
	Non HT/VHT40, 6 to 54 Mbps	2	8	-1.2	-1.0			1.9	28.0	26.1
	Non HT/VHT40, 6 to 54 Mbps	3	8	-1.2	-1.0	-1.1		3.7	28.0	24.3
	Non HT/VHT40, 6 to 54 Mbps	4	8	-1.2	-1.0	-1.1	-1.0	4.9	28.0	23.1
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	1.7				1.7	28.0	26.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-0.2	-0.5			2.7	28.0	25.3
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-0.2	-0.5			2.7	28.0	25.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-0.2	-0.5	-0.3		4.4	28.0	23.6
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-0.2	-0.5	-0.3		4.4	28.0	23.6
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-0.2	-0.5	-0.3		4.4	28.0	23.6
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-0.2	-0.5	-0.3	-0.1	5.7	28.0	22.3
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-0.2	-0.5	-0.3	-0.1	5.7	28.0	22.3
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-0.2	-0.5	-0.3	-0.1	5.7	28.0	22.3

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-0.2	-0.5			2.7	25.0	22.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-0.2	-0.5			2.7	28.0	25.3
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-1.2	-1.5	-1.4		3.4	23.2	19.8
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-0.2	-0.5	-0.3		4.4	26.2	21.8
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-0.2	-0.5	-0.3		4.4	28.0	23.6
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-3.7	-3.6	-3.4	-3.5	2.5	22.0	19.5
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-1.2	-1.5	-1.4	-0.9	4.8	25.0	20.2
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-0.2	-0.5	-0.3	-0.1	5.7	26.8	21.1
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-0.2	-0.5			2.7	28.0	25.3
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-0.2	-0.5	-0.3		4.4	28.0	23.6
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-0.2	-0.5	-0.3	-0.1	5.7	28.0	22.3
5825	Non HT/VHT20, 6 to 54 Mbps	1	8	3.6				3.6	28.0	24.4
	Non HT/VHT20, 6 to 54 Mbps	2	8	3.6	3.4			6.5	28.0	21.5
	Non HT/VHT20, 6 to 54 Mbps	3	8	3.6	3.4	2.7		8.0	28.0	20.0
	Non HT/VHT20, 6 to 54 Mbps	4	8	3.6	3.4	2.7	3.1	9.2	28.0	18.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	3.6	3.4			6.5	25.0	18.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	0.7	0.2	-0.1		5.1	23.2	18.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-2.0	-1.5	-1.9	-1.4	4.3	22.0	17.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	4.8				4.8	28.0	23.2
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	4.2	4.2			7.2	28.0	20.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	4.2	4.2			7.2	28.0	20.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	3.2	2.8	2.6		7.6	28.0	20.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	3.2	2.8	2.6		7.6	28.0	20.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	3.2	2.8	2.6		7.6	28.0	20.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	3.2	2.8	2.6	3.0	8.9	28.0	19.1
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	3.2	2.8	2.6	3.0	8.9	28.0	19.1
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	3.2	2.8	2.6	3.0	8.9	28.0	19.1
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	3.2	2.8			6.0	25.0	19.0
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	4.2	4.2			7.2	28.0	20.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	1.4	1.4	0.6		5.9	23.2	17.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	3.2	2.8	2.6		7.6	26.2	18.6
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	3.2	2.8	2.6		7.6	28.0	20.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-3.6	-3.4	-3.6	-3.1	2.6	22.0	19.4
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	1.4	1.4	0.6	1.1	7.2	25.0	17.8
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	2.3	1.9	1.5	2.0	8.0	26.8	18.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	4.2	4.2			7.2	28.0	20.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	3.2	2.8	2.6		7.6	28.0	20.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	3.2	2.8	2.6	3.0	8.9	28.0	19.1

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Power Spectral Density, 5785 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

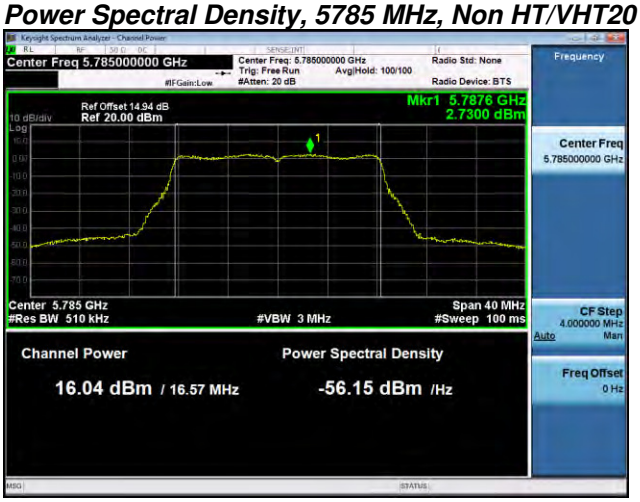

Antenna A

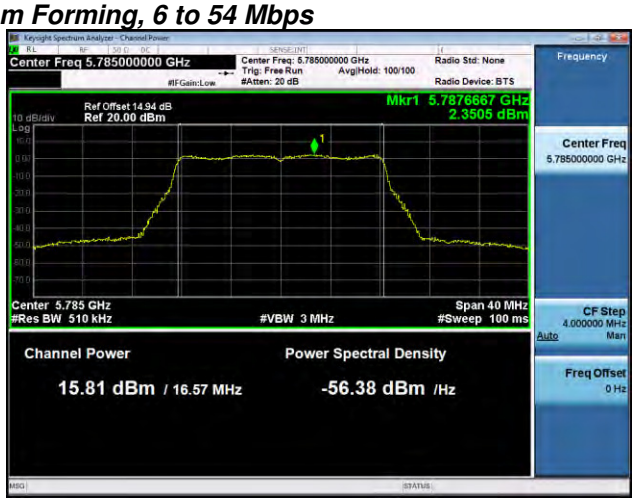

Antenna B

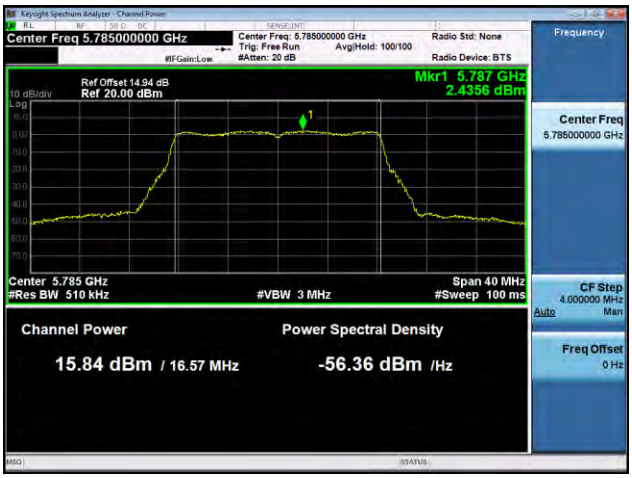

Antenna C

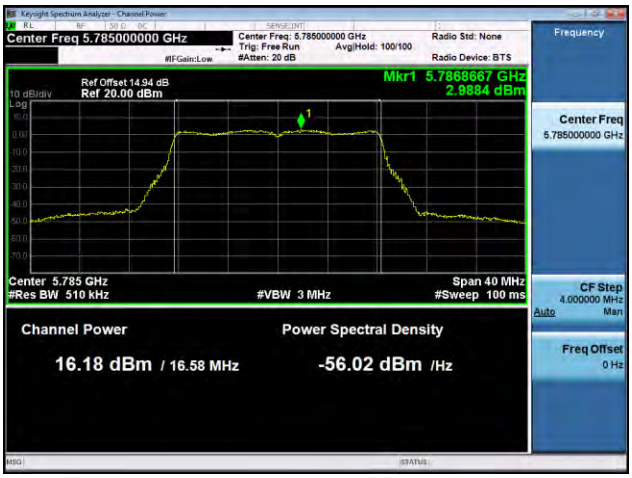

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.5 Conducted Spurious Emissions

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

> **(4)** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of −17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of −27 dBm/MHz.
> **(6)** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
> **(7)** The provisions of §15.205 apply to intentional radiators operating under this section.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Conducted Spurious Emissions Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

Conducted Spurious Emissions Test parameters
Span = 30MHz to 18GHz / 18GHz to 40GHz RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 1kHz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By : Jose Aguirre	**Date of testing:** 10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	8	-70.0				-62.0	-41.25	20.8
	Non HT/VHT20, 6 to 54 Mbps	2	8	-63.8	-62.4			-52.0	-41.25	10.8
	Non HT/VHT20, 6 to 54 Mbps	3	8	-63.8	-62.4	-70.4		-51.7	-41.25	10.4
	Non HT/VHT20, 6 to 54 Mbps	4	8	-63.7	-70.3	-70.3	-70.0	-53.5	-41.25	12.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-63.7	-70.3			-51.8	-41.25	10.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-63.8	-62.2	-70.4		-46.7	-41.25	5.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-63.8	-61.5	-70.4	-70.3	-44.8	-41.25	3.6
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-70.2				-62.2	-41.25	21.0
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-70.2	-62.4			-53.7	-41.25	12.5
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-70.2	-62.4			-53.7	-41.25	12.5
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-70.2	-62.4	-70.3		-53.2	-41.25	11.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-70.2	-62.4	-70.3		-53.2	-41.25	11.9
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-70.2	-62.4	-70.3		-53.2	-41.25	11.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-70.2	-62.4	-70.3	-70.2	-52.7	-41.25	11.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-70.2	-62.4	-70.3	-70.2	-52.7	-41.25	11.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-70.2	-62.4	-70.3	-70.2	-52.7	-41.25	11.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-70.2	-62.4			-50.7	-41.25	9.5
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-70.2	-62.4			-53.7	-41.25	12.5
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-64.1	-61.9	-70.3		-46.7	-41.25	5.4
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-70.2	-62.4	-70.3		-51.4	-41.25	10.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-70.2	-62.4	-70.3		-53.2	-41.25	11.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-63.6	-61.8	-70.1	-70.2	-44.9	-41.25	3.6
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-64.1	-61.9	-70.3	-70.4	-48.1	-41.25	6.9
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-70.2	-62.4	-70.3	-70.2	-51.5	-41.25	10.2
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-70.2	-62.4			-53.7	-41.25	12.5
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-70.2	-62.4	-70.3		-53.2	-41.25	11.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-70.2	-62.4	-70.3	-70.2	-52.7	-41.25	11.4
5755	Non HT/VHT40, 6 to 54 Mbps	1	8	-70.2				-62.2	-41.25	21.0
	Non HT/VHT40, 6 to 54 Mbps	2	8	-64.2	-61.4			-51.6	-41.25	10.3
	Non HT/VHT40, 6 to 54 Mbps	3	8	-63.2	-61.7	-70.2		-51.0	-41.25	9.8
	Non HT/VHT40, 6 to 54 Mbps	4	8	-63.7	-60.4	-70.2	-70.4	-50.2	-41.25	8.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-70.3				-62.3	-41.25	21.1
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-63.7	-60.7			-50.9	-41.25	9.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-63.7	-60.7			-50.9	-41.25	9.7

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-64.2	-61.1	-70.4		-51.0	-41.25	9.8
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-64.2	-61.1	-70.4		-51.0	-41.25	9.8
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-64.2	-61.1	-70.4		-51.0	-41.25	9.8
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-63.9	-61.0	-70.1	-70.2	-50.6	-41.25	9.3
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-63.9	-61.0	-70.1	-70.2	-50.6	-41.25	9.3
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-63.9	-61.0	-70.1	-70.2	-50.6	-41.25	9.3
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-64.2	-61.1			-48.4	-41.25	7.1
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-63.7	-60.7			-50.9	-41.25	9.7
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-63.1	-60.6	-70.5		-45.6	-41.25	4.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-63.9	-61.0	-70.1		-49.1	-41.25	7.8
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-64.2	-61.1	-70.4		-51.0	-41.25	9.8
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-63.6	-61.9	-70.3	-70.2	-45.0	-41.25	3.7
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-63.1	-60.6	-70.5	-70.3	-47.1	-41.25	5.9
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-63.9	-61.0	-70.1	-70.2	-49.4	-41.25	8.1
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-63.7	-60.7			-50.9	-41.25	9.7
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-64.2	-61.1	-70.4		-51.0	-41.25	9.8
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-63.9	-61.0	-70.1	-70.2	-50.6	-41.25	9.3
5775	Non HT/VHT80, 6 to 54 Mbps	1	8	-70.4				-62.4	-41.25	21.2
	Non HT/VHT80, 6 to 54 Mbps	2	8	-63.6	-61.7			-51.5	-41.25	10.3
	Non HT/VHT80, 6 to 54 Mbps	3	8	-63.2	-60.8	-70.4		-50.5	-41.25	9.3
	Non HT/VHT80, 6 to 54 Mbps	4	8	-63.2	-60.8	-70.4	-70.3	-50.3	-41.25	9.0
	HT/VHT80, M0 to M7, M0 to M9 1ss	1	8	-64.2				-56.2	-41.25	15.0
	HT/VHT80, M0 to M7, M0 to M9 1ss	2	8	-63.2	-61.5			-51.3	-41.25	10.0
	HT/VHT80, M8 to M15, M0 to M9 2ss	2	8	-63.2	-61.5			-51.3	-41.25	10.0
	HT/VHT80, M0 to M7, M0 to M9 1ss	3	8	-63.7	-61.3	-70.4		-51.0	-41.25	9.7
	HT/VHT80, M8 to M15, M0 to M9 2ss	3	8	-63.7	-61.3	-70.4		-51.0	-41.25	9.7
	HT/VHT80, M16 to M23, M0 to M9 3ss	3	8	-63.7	-61.3	-70.4		-51.0	-41.25	9.7
	HT/VHT80, M0 to M7, M0 to M9 1ss	4	8	-63.7	-61.3	-70.4	-70.5	-50.7	-41.25	9.5
	HT/VHT80, M8 to M15, M0 to M9 2ss	4	8	-63.7	-61.3	-70.4	-70.5	-50.7	-41.25	9.5
	HT/VHT80, M16 to M23, M0 to M9 3ss	4	8	-63.7	-61.3	-70.4	-70.5	-50.7	-41.25	9.5
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-63.7	-61.3			-48.3	-41.25	7.1
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-63.2	-61.5			-51.3	-41.25	10.0
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-63.8	-62.5	-70.4		-46.9	-41.25	5.7
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-63.7	-61.3	-70.4		-49.2	-41.25	7.9
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-63.7	-61.3	-70.4		-51.0	-41.25	9.7
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-64.5	-61.9	-70.4	-70.4	-45.3	-41.25	4.0
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-63.8	-62.5	-70.4	-70.2	-48.3	-41.25	7.1
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-63.6	-61.3	-70.3	-70.3	-49.5	-41.25	8.2
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	2	8	-63.2	-61.5			-51.3	-41.25	10.0
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	3	8	-63.7	-61.3	-70.4		-51.0	-41.25	9.7
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	4	8	-63.7	-61.3	-70.4	-70.5	-50.7	-41.25	9.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT/VHT20, 6 to 54 Mbps	1	8	-70.1				-62.1	-41.25	20.9
	Non HT/VHT20, 6 to 54 Mbps	2	8	-70.1	-70.0			-59.0	-41.25	17.8
	Non HT/VHT20, 6 to 54 Mbps	3	8	-70.4	-70.5	-70.4		-57.7	-41.25	16.4
	Non HT/VHT20, 6 to 54 Mbps	4	8	-70.4	-70.5	-70.4	-70.3	-56.4	-41.25	15.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-70.4	-70.5			-56.4	-41.25	15.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-70.5	-70.6	-70.6		-53.0	-41.25	11.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-64.2	-62.7	-70.6	-70.6	-45.6	-41.25	4.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-70.2				-62.2	-41.25	21.0
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-70.2	-70.2			-59.2	-41.25	17.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-70.2	-70.2			-59.2	-41.25	17.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-70.4	-70.5	-70.3		-57.6	-41.25	16.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-70.4	-70.5	-70.3		-57.6	-41.25	16.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-70.4	-70.5	-70.3		-57.6	-41.25	16.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-70.4	-70.5	-70.3	-70.3	-56.4	-41.25	15.1
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-70.4	-70.5	-70.3	-70.3	-56.4	-41.25	15.1
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-70.4	-70.5	-70.3	-70.3	-56.4	-41.25	15.1
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-70.4	-70.5			-56.4	-41.25	15.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-70.2	-70.2			-59.2	-41.25	17.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-70.7	-70.5	-70.6		-53.0	-41.25	11.8
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-70.7	-70.5	-70.5		-56.0	-41.25	14.7
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-70.4	-70.5	-70.3		-57.6	-41.25	16.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-63.6	-62.8	-70.7	-70.8	-45.5	-41.25	4.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-70.6	-70.5	-70.5	-70.6	-53.5	-41.25	12.3
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-70.7	-70.5	-70.5	-70.6	-55.4	-41.25	14.1
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-70.2	-70.2			-59.2	-41.25	17.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-70.4	-70.5	-70.3		-57.6	-41.25	16.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-70.4	-70.5	-70.3	-70.3	-56.4	-41.25	15.1
5795	Non HT/VHT40, 6 to 54 Mbps	1	8	-70.5				-62.5	-41.25	21.3
	Non HT/VHT40, 6 to 54 Mbps	2	8	-70.5	-61.5			-53.0	-41.25	11.7
	Non HT/VHT40, 6 to 54 Mbps	3	8	-70.5	-61.5	-70.7		-52.5	-41.25	11.3
	Non HT/VHT40, 6 to 54 Mbps	4	8	-70.5	-61.5	-70.7	-70.7	-52.1	-41.25	10.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-70.5				-62.5	-41.25	21.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-70.6	-62.7			-54.0	-41.25	12.8
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-70.6	-62.7			-54.0	-41.25	12.8
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-70.6	-62.7	-70.7		-53.5	-41.25	12.2
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-70.6	-62.7	-70.7		-53.5	-41.25	12.2
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-70.6	-62.7	-70.7		-53.5	-41.25	12.2
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-70.6	-62.7	-70.7	-70.6	-53.0	-41.25	11.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-70.6	-62.7	-70.7	-70.6	-53.0	-41.25	11.7
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-70.6	-62.7	-70.7	-70.6	-53.0	-41.25	11.7

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-70.6	-62.7			-51.0	-41.25	9.8
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-70.6	-62.7			-54.0	-41.25	12.8
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-64.3	-62.7	-70.6		-47.2	-41.25	6.0
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-70.6	-62.7	-70.7		-51.7	-41.25	10.4
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-70.6	-62.7	-70.7		-53.5	-41.25	12.2
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-64.6	-62.2	-70.7	-70.8	-45.5	-41.25	4.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-64.3	-62.7	-70.6	-70.4	-48.6	-41.25	7.4
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-70.6	-62.7	-70.7	-70.6	-51.8	-41.25	10.5
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-70.6	-62.7			-54.0	-41.25	12.8
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-70.6	-62.7	-70.7		-53.5	-41.25	12.2
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-70.6	-62.7	-70.7	-70.6	-53.0	-41.25	11.7
5825	Non HT/VHT20, 6 to 54 Mbps	1	8	-71.1				-63.1	-41.25	21.9
	Non HT/VHT20, 6 to 54 Mbps	2	8	-71.1	-70.9			-60.0	-41.25	18.7
	Non HT/VHT20, 6 to 54 Mbps	3	8	-71.1	-70.9	-71.0		-58.2	-41.25	17.0
	Non HT/VHT20, 6 to 54 Mbps	4	8	-71.1	-70.9	-71.0	-71.1	-57.0	-41.25	15.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-71.1	-70.9			-57.0	-41.25	15.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-63.9	-62.0	-71.1		-46.7	-41.25	5.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-63.1	-61.7	-70.9	-70.9	-44.8	-41.25	3.5
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-71.1				-63.1	-41.25	21.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-71.0	-71.0			-60.0	-41.25	18.7
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-71.0	-71.0			-60.0	-41.25	18.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-63.9	-62.3	-71.0		-51.7	-41.25	10.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-63.9	-62.3	-71.0		-51.7	-41.25	10.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-63.9	-62.3	-71.0		-51.7	-41.25	10.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-63.9	-62.3	-71.0	-71.1	-51.4	-41.25	10.1
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-63.9	-62.3	-71.0	-71.1	-51.4	-41.25	10.1
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-63.9	-62.3	-71.0	-71.1	-51.4	-41.25	10.1
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-63.9	-62.3			-49.0	-41.25	7.8
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-71.0	-71.0			-60.0	-41.25	18.7
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-71.1	-62.1	-71.1		-48.3	-41.25	7.1
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-63.9	-62.3	-71.0		-49.9	-41.25	8.6
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-63.9	-62.3	-71.0		-51.7	-41.25	10.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-63.8	-62.0	-71.2	-71.1	-45.2	-41.25	4.0
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-71.1	-62.1	-71.1	-71.0	-49.7	-41.25	8.4
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-64.1	-62.6	-71.1	-71.1	-50.4	-41.25	9.2
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-71.0	-71.0			-60.0	-41.25	18.7
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-63.9	-62.3	-71.0		-51.7	-41.25	10.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-63.9	-62.3	-71.0	-71.1	-51.4	-41.25	10.1

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	8	-61.0				-53.0	-21.25	31.8
	Non HT/VHT20, 6 to 54 Mbps	2	8	-59.6	-60.6			-49.1	-21.25	27.8
	Non HT/VHT20, 6 to 54 Mbps	3	8	-59.6	-60.6	-61.4		-47.7	-21.25	26.4
	Non HT/VHT20, 6 to 54 Mbps	4	8	-59.0	-60.8	-61.0	-62.1	-46.6	-21.25	25.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-59.0	-60.8			-45.8	-21.25	24.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-62.0	-61.4	-62.5		-44.4	-21.25	23.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-61.0	-62.1	-61.9	-59.3	-40.9	-21.25	19.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-61.1				-53.1	-21.25	31.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-61.1	-62.9			-50.9	-21.25	29.6
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-61.1	-62.9			-50.9	-21.25	29.6
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-61.1	-62.9	-62.1		-49.2	-21.25	27.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-61.1	-62.9	-62.1		-49.2	-21.25	27.9
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-61.1	-62.9	-62.1		-49.2	-21.25	27.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-61.1	-62.9	-62.1	-61.8	-47.9	-21.25	26.7
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-61.1	-62.9	-62.1	-61.8	-47.9	-21.25	26.7
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-61.1	-62.9	-62.1	-61.8	-47.9	-21.25	26.7
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-61.1	-62.9			-47.9	-21.25	26.6
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-61.1	-62.9			-50.9	-21.25	29.6
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-61.4	-61.8	-61.0		-43.8	-21.25	22.6
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-61.1	-62.9	-62.1		-47.4	-21.25	26.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-61.1	-62.9	-62.1		-49.2	-21.25	27.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-61.9	-60.5	-61.5	-62.4	-41.5	-21.25	20.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-61.4	-61.8	-61.0	-60.1	-44.0	-21.25	22.8
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-61.1	-62.9	-62.1	-61.8	-46.7	-21.25	25.5
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-61.1	-62.9			-50.9	-21.25	29.6
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-61.1	-62.9	-62.1		-49.2	-21.25	27.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-61.1	-62.9	-62.1	-61.8	-47.9	-21.25	26.7
5755	Non HT/VHT40, 6 to 54 Mbps	1	8	-62.7				-54.7	-21.25	33.5
	Non HT/VHT40, 6 to 54 Mbps	2	8	-61.3	-60.6			-49.9	-21.25	28.7
	Non HT/VHT40, 6 to 54 Mbps	3	8	-62.6	-61.1	-62.2		-49.1	-21.25	27.9
	Non HT/VHT40, 6 to 54 Mbps	4	8	-62.0	-62.7	-58.5	-60.5	-46.6	-21.25	25.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-59.7				-51.7	-21.25	30.5
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-61.7	-62.2			-50.9	-21.25	29.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-61.7	-62.2			-50.9	-21.25	29.7

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-61.1	-61.8	-59.2		-47.8	-21.25	26.5
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-61.1	-61.8	-59.2		-47.8	-21.25	26.5
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-61.1	-61.8	-59.2		-47.8	-21.25	26.5
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-61.0	-61.5	-62.6	-62.4	-47.8	-21.25	26.6
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-61.0	-61.5	-62.6	-62.4	-47.8	-21.25	26.6
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-61.0	-61.5	-62.6	-62.4	-47.8	-21.25	26.6
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-61.1	-61.8			-47.4	-21.25	26.2
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-61.7	-62.2			-50.9	-21.25	29.7
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-58.9	-60.8	-60.1		-42.3	-21.25	21.0
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-61.0	-61.5	-62.6		-47.1	-21.25	25.8
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-61.1	-61.8	-59.2		-47.8	-21.25	26.5
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-61.3	-62.0	-60.5	-61.5	-41.3	-21.25	20.0
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-58.9	-60.8	-60.1	-59.3	-42.7	-21.25	21.4
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-61.0	-61.5	-62.6	-62.4	-46.6	-21.25	25.4
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-61.7	-62.2			-50.9	-21.25	29.7
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-61.1	-61.8	-59.2		-47.8	-21.25	26.5
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-61.0	-61.5	-62.6	-62.4	-47.8	-21.25	26.6
5775	Non HT/VHT80, 6 to 54 Mbps	1	8	-61.7				-53.7	-21.25	32.5
	Non HT/VHT80, 6 to 54 Mbps	2	8	-60.2	-62.1			-50.0	-21.25	28.8
	Non HT/VHT80, 6 to 54 Mbps	3	8	-61.1	-59.8	-61.3		-47.9	-21.25	26.7
	Non HT/VHT80, 6 to 54 Mbps	4	8	-61.1	-59.8	-61.3	-59.8	-46.4	-21.25	25.2
	HT/VHT80, M0 to M7, M0 to M9 1ss	1	8	-61.6				-53.6	-21.25	32.4
	HT/VHT80, M0 to M7, M0 to M9 1ss	2	8	-61.8	-60.4			-50.0	-21.25	28.8
	HT/VHT80, M8 to M15, M0 to M9 2ss	2	8	-61.8	-60.4			-50.0	-21.25	28.8
	HT/VHT80, M0 to M7, M0 to M9 1ss	3	8	-60.3	-59.5	-61.2		-47.5	-21.25	26.3
	HT/VHT80, M8 to M15, M0 to M9 2ss	3	8	-60.3	-59.5	-61.2		-47.5	-21.25	26.3
	HT/VHT80, M16 to M23, M0 to M9 3ss	3	8	-60.3	-59.5	-61.2		-47.5	-21.25	26.3
	HT/VHT80, M0 to M7, M0 to M9 1ss	4	8	-60.3	-59.5	-61.2	-60.6	-46.3	-21.25	25.1
	HT/VHT80, M8 to M15, M0 to M9 2ss	4	8	-60.3	-59.5	-61.2	-60.6	-46.3	-21.25	25.1
	HT/VHT80, M16 to M23, M0 to M9 3ss	4	8	-60.3	-59.5	-61.2	-60.6	-46.3	-21.25	25.1
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-60.3	-59.5			-45.9	-21.25	24.6
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-61.8	-60.4			-50.0	-21.25	28.8
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-60.6	-61.2	-61.9		-43.6	-21.25	22.4
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-60.3	-59.5	-61.2		-45.7	-21.25	24.5
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-60.3	-59.5	-61.2		-47.5	-21.25	26.3
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-60.5	-61.5	-62.0	-58.3	-40.3	-21.25	19.1
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-60.6	-61.2	-61.9	-62.1	-44.4	-21.25	23.1
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-62.4	-60.4	-59.8	-60.8	-45.5	-21.25	24.3
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	2	8	-61.8	-60.4			-50.0	-21.25	28.8
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	3	8	-60.3	-59.5	-61.2		-47.5	-21.25	26.3
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	4	8	-60.3	-59.5	-61.2	-60.6	-46.3	-21.25	25.1

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT/VHT20, 6 to 54 Mbps	1	8	-62.6				-54.6	-21.25	33.4
	Non HT/VHT20, 6 to 54 Mbps	2	8	-62.6	-60.4			-50.4	-21.25	29.1
	Non HT/VHT20, 6 to 54 Mbps	3	8	-61.7	-60.2	-60.2		-47.9	-21.25	26.6
	Non HT/VHT20, 6 to 54 Mbps	4	8	-61.7	-60.2	-60.2	-61.4	-46.8	-21.25	25.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-61.7	-60.2			-46.9	-21.25	25.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-61.7	-60.3	-61.5		-43.6	-21.25	22.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-61.8	-61.4	-61.7	-60.6	-41.3	-21.25	20.1
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-60.6				-52.6	-21.25	31.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-60.6	-61.4			-50.0	-21.25	28.7
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-60.6	-61.4			-50.0	-21.25	28.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-61.8	-62.0	-61.8		-49.1	-21.25	27.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-61.8	-62.0	-61.8		-49.1	-21.25	27.8
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-61.8	-62.0	-61.8		-49.1	-21.25	27.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-61.8	-62.0	-61.8	-60.9	-47.6	-21.25	26.3
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-61.8	-62.0	-61.8	-60.9	-47.6	-21.25	26.3
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-61.8	-62.0	-61.8	-60.9	-47.6	-21.25	26.3
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-61.8	-62.0			-47.9	-21.25	26.6
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-60.6	-61.4			-50.0	-21.25	28.7
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-62.0	-62.4	-61.0		-44.2	-21.25	22.9
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-61.1	-60.6	-61.7		-46.5	-21.25	25.3
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-61.8	-62.0	-61.8		-49.1	-21.25	27.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-60.3	-61.6	-62.0	-62.9	-41.6	-21.25	20.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-62.5	-61.8	-61.6	-60.8	-44.6	-21.25	23.4
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-61.1	-60.6	-61.7	-59.7	-45.5	-21.25	24.2
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-60.6	-61.4			-50.0	-21.25	28.7
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-61.8	-62.0	-61.8		-49.1	-21.25	27.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-61.8	-62.0	-61.8	-60.9	-47.6	-21.25	26.3
5795	Non HT/VHT40, 6 to 54 Mbps	1	8	-61.6				-53.6	-21.25	32.4
	Non HT/VHT40, 6 to 54 Mbps	2	8	-61.6	-61.3			-50.4	-21.25	29.2
	Non HT/VHT40, 6 to 54 Mbps	3	8	-61.6	-61.3	-59.9		-48.1	-21.25	26.8
	Non HT/VHT40, 6 to 54 Mbps	4	8	-61.6	-61.3	-59.9	-62.3	-47.2	-21.25	25.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-61.1				-53.1	-21.25	31.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-60.6	-61.7			-50.1	-21.25	28.9
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-60.6	-61.7			-50.1	-21.25	28.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-60.6	-61.7	-63.0		-48.9	-21.25	27.6
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-60.6	-61.7	-63.0		-48.9	-21.25	27.6
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-60.6	-61.7	-63.0		-48.9	-21.25	27.6
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-60.6	-61.7	-63.0	-62.3	-47.8	-21.25	26.5
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-60.6	-61.7	-63.0	-62.3	-47.8	-21.25	26.5
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-60.6	-61.7	-63.0	-62.3	-47.8	-21.25	26.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-60.6	-61.7			-47.1	-21.25	25.9
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-60.6	-61.7			-50.1	-21.25	28.9
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-61.4	-61.4	-62.2		-44.1	-21.25	22.8
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-60.6	-61.7	-63.0		-47.1	-21.25	25.8
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-60.6	-61.7	-63.0		-48.9	-21.25	27.6
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-62.0	-61.7	-63.0	-60.9	-41.8	-21.25	20.6
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-61.4	-61.4	-62.2	-61.4	-44.6	-21.25	23.3
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-60.6	-61.7	-63.0	-62.3	-46.6	-21.25	25.3
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-60.6	-61.7			-50.1	-21.25	28.9
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-60.6	-61.7	-63.0		-48.9	-21.25	27.6
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-60.6	-61.7	-63.0	-62.3	-47.8	-21.25	26.5
5825	Non HT/VHT20, 6 to 54 Mbps	1	8	-61.5				-53.5	-21.25	32.3
	Non HT/VHT20, 6 to 54 Mbps	2	8	-61.5	-62.1			-50.8	-21.25	29.5
	Non HT/VHT20, 6 to 54 Mbps	3	8	-61.5	-62.1	-60.1		-48.4	-21.25	27.1
	Non HT/VHT20, 6 to 54 Mbps	4	8	-61.5	-62.1	-60.1	-61.2	-47.1	-21.25	25.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-61.5	-62.1			-47.8	-21.25	26.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-61.7	-60.0	-61.3		-43.4	-21.25	22.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-60.9	-61.3	-60.7	-60.9	-40.9	-21.25	19.7
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-61.2				-53.2	-21.25	32.0
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-60.3	-61.0			-49.6	-21.25	28.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-60.3	-61.0			-49.6	-21.25	28.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-60.0	-61.3	-61.3		-48.1	-21.25	26.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-60.0	-61.3	-61.3		-48.1	-21.25	26.8
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-60.0	-61.3	-61.3		-48.1	-21.25	26.8
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-60.0	-61.3	-61.3	-62.1	-47.1	-21.25	25.8
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-60.0	-61.3	-61.3	-62.1	-47.1	-21.25	25.8
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-60.0	-61.3	-61.3	-62.1	-47.1	-21.25	25.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-60.0	-61.3			-46.6	-21.25	25.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-60.3	-61.0			-49.6	-21.25	28.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-61.4	-60.7	-61.4		-43.6	-21.25	22.3
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-60.0	-61.3	-61.3		-46.3	-21.25	25.0
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-60.0	-61.3	-61.3		-48.1	-21.25	26.8
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-62.6	-61.6	-62.7	-62.2	-42.2	-21.25	21.0
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-61.4	-60.7	-61.4	-62.2	-44.4	-21.25	23.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-62.1	-60.4	-61.4	-61.8	-46.2	-21.25	24.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-60.3	-61.0			-49.6	-21.25	28.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-60.0	-61.3	-61.3		-48.1	-21.25	26.8
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-60.0	-61.3	-61.3	-62.1	-47.1	-21.25	25.8

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average, All Antennas

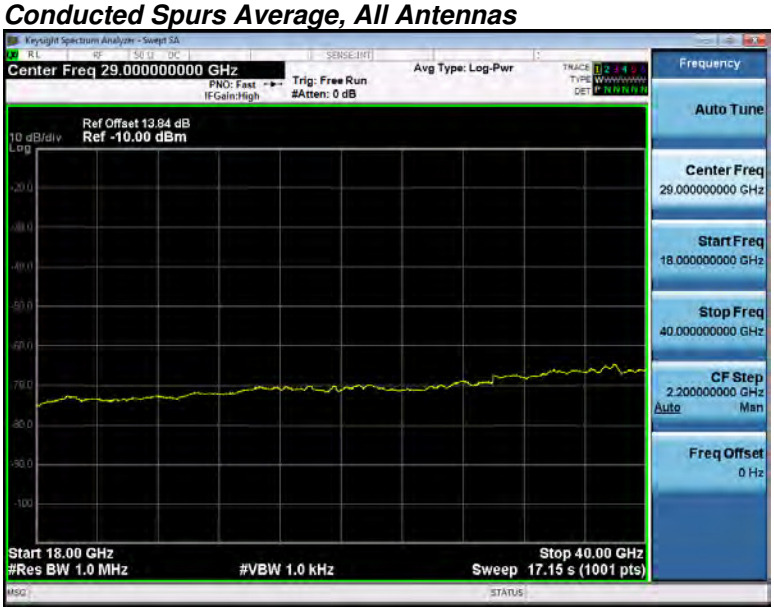

Conducted Spurs Peak, All Antennas

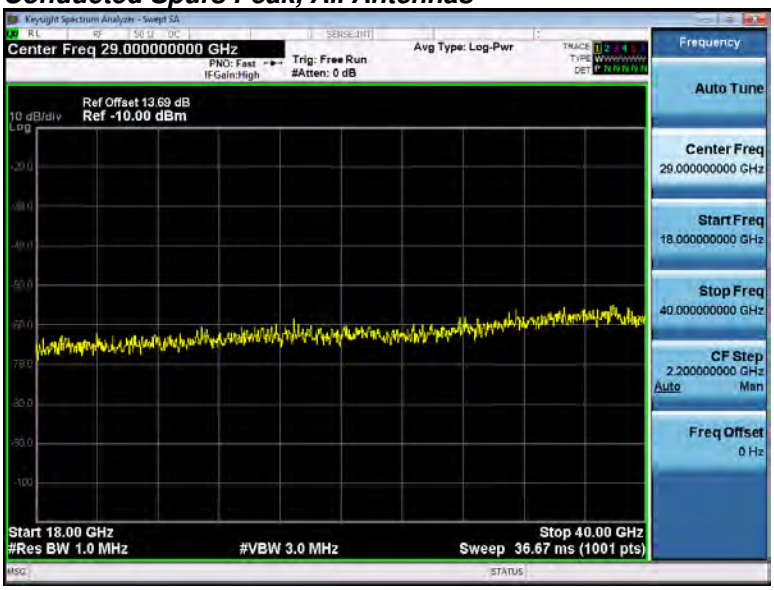

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average, 5825 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

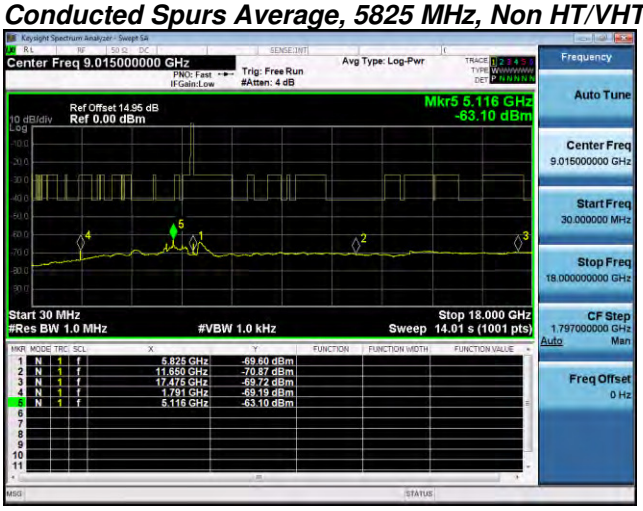

Antenna A

Antenna B

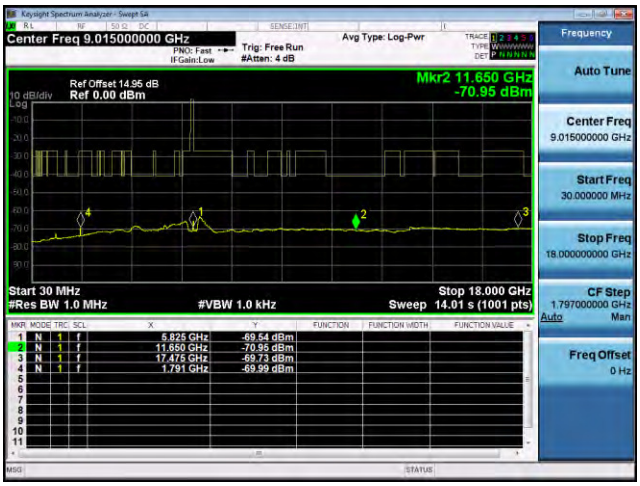

Antenna C

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak, 5775 MHz, HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss

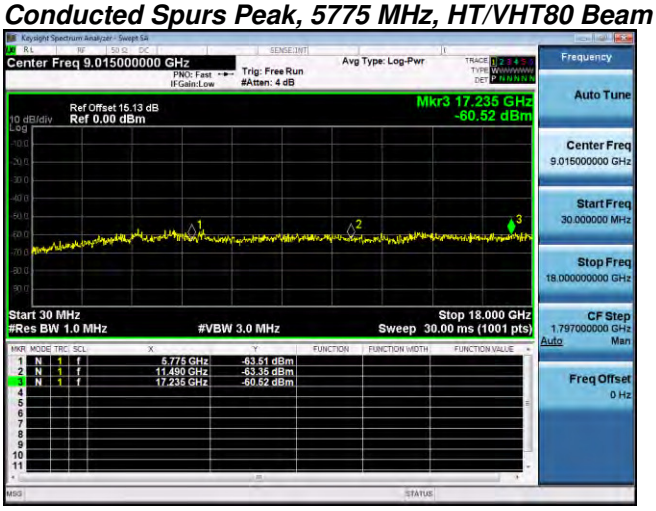

Antenna A

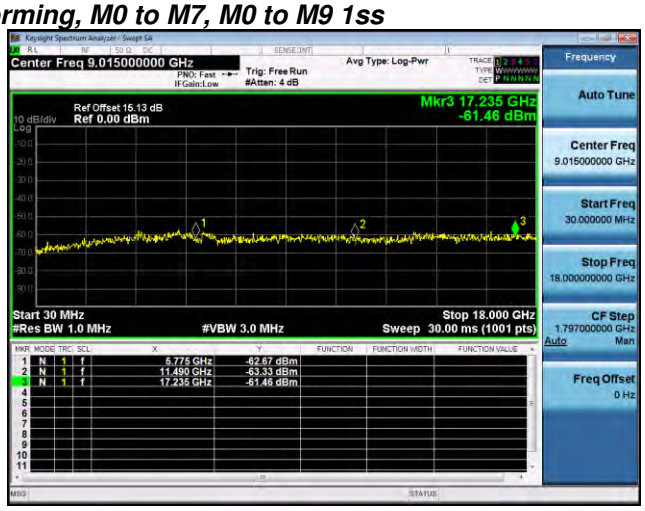

Antenna B

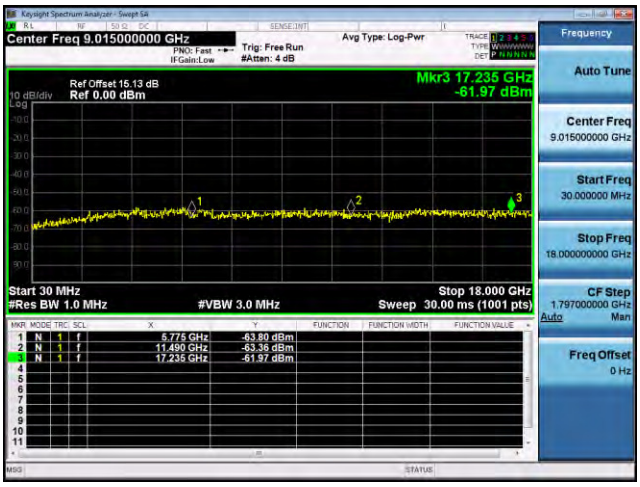

Antenna C

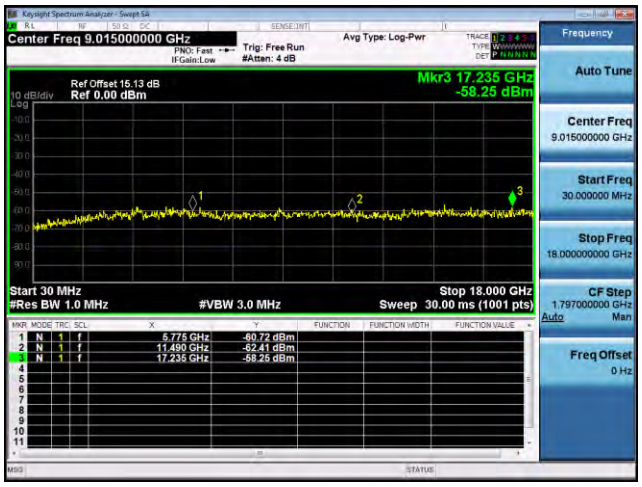

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.6 Conducted Bandedge

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

> **(4)** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
> **(6)** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.
> **(7)** The provisions of §15.205 apply to intentional radiators operating under this section.
> **(8)** When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Conducted Bandedge Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

Conducted Bandedge Test parameters restricted Band
RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 100Hz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐

Tested By :	**Date of testing:**
Jose Aguirre	10-Oct-15 - 11-Nov-15
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	8	-26.3				-18.3	-17.00	1.3
	Non HT/VHT20, 6 to 54 Mbps	2	8	-28.9	-32.7			-19.4	-17.00	2.4
	Non HT/VHT20, 6 to 54 Mbps	3	8	-39.2	-42.9	-40.1		-27.7	-27.00	0.7
	Non HT/VHT20, 6 to 54 Mbps	4	8	-42.2	-44.7	-44.2	-41.6	-29.0	-27.00	2.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-42.2	-44.7			-29.3	-27.00	2.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-45.8	-45.2	-45.6		-28.0	-27.00	1.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-49.4	-47.8	-47.7	-45.4	-27.3	-27.00	0.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-31.3				-23.3	-17.00	6.3
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-42.2	-42.7			-31.4	-27.00	4.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-42.2	-42.7			-31.4	-27.00	4.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-31.3	-34.0	-31.7		-19.4	-17.00	2.4
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-31.3	-34.0	-31.7		-19.4	-17.00	2.4
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-31.3	-34.0	-31.7		-19.4	-17.00	2.4
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-31.3	-34.0	-31.7	-33.7	-18.5	-17.00	1.5
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-31.3	-34.0	-31.7	-33.7	-18.5	-17.00	1.5
	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-31.3	-34.0	-31.7	-33.7	-18.5	-17.00	1.5
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-42.2	-42.7			-28.4	-27.00	1.4
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-42.2	-42.7			-31.4	-27.00	4.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-44.1	-44.2	-45.9		-27.1	-27.00	0.1
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-31.3	-34.0	-31.7		-17.6	-17.00	0.6
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-31.3	-34.0	-31.7		-19.4	-17.00	2.4
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-47.4	-46.7	-47.6	-47.0	-27.1	-27.00	0.1
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-44.1	-44.2	-45.9	-44.4	-27.6	-27.00	0.6
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-31.3	-34.0	-31.7	-33.7	-17.3	-17.00	0.3
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-42.2	-42.7			-31.4	-27.00	4.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-31.3	-34.0	-31.7		-19.4	-17.00	2.4
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-31.3	-34.0	-31.7	-33.7	-18.5	-17.00	1.5
5755	Non HT/VHT40, 6 to 54 Mbps	1	8	-35.9				-27.9	-27.00	0.9
	Non HT/VHT40, 6 to 54 Mbps	2	8	-26.5	-33.6			-17.7	-17.00	0.7
	Non HT/VHT40, 6 to 54 Mbps	3	8	-40.5	-39.1	-41.5		-27.5	-27.00	0.5
	Non HT/VHT40, 6 to 54 Mbps	4	8	-43.0	-44.0	-40.7	-41.9	-28.2	-27.00	1.2
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-35.3				-27.3	-27.00	0.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-39.8	-39.2			-28.5	-27.00	1.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-39.8	-39.2			-28.5	-27.00	1.5
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-42.2	-40.5	-39.6		-27.9	-27.00	0.9
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-42.2	-40.5	-39.6		-27.9	-27.00	0.9
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-42.2	-40.5	-39.6		-27.9	-27.00	0.9
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-44.8	-44.6	-42.2	-44.2	-29.8	-27.00	2.8
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-44.8	-44.6	-42.2	-44.2	-29.8	-27.00	2.8
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-44.8	-44.6	-42.2	-44.2	-29.8	-27.00	2.8
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-42.2	-40.5			-27.3	-27.00	0.3
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-39.8	-39.2			-28.5	-27.00	1.5
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-47.2	-46.5	-44.6		-28.4	-27.00	1.4
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-44.8	-44.6	-42.2		-29.1	-27.00	2.1
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-42.2	-40.5	-39.6		-27.9	-27.00	0.9
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-51.0	-51.9	-48.3	-49.3	-29.9	-27.00	2.9
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-47.2	-46.5	-44.6	-44.5	-28.5	-27.00	1.5
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-44.8	-44.6	-42.2	-44.2	-28.6	-27.00	1.6
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-39.8	-39.2			-28.5	-27.00	1.5
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-42.2	-40.5	-39.6		-27.9	-27.00	0.9
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-44.8	-44.6	-42.2	-44.2	-29.8	-27.00	2.8
5775	Non HT/VHT80, 6 to 54 Mbps	1	8	-35.2				-27.2	-27.00	0.2
	Non HT/VHT80, 6 to 54 Mbps	2	8	-37.8	-40.5			-27.9	-27.00	0.9
	Non HT/VHT80, 6 to 54 Mbps	3	8	-41.1	-39.7	-42.0		-28.1	-27.00	1.1
	Non HT/VHT80, 6 to 54 Mbps	4	8	-41.1	-39.7	-42.0	-42.1	-27.1	-27.00	0.1
	HT/VHT80, M0 to M7, M0 to M9 1ss	1	8	-36.4				-28.4	-27.00	1.4
	HT/VHT80, M0 to M7, M0 to M9 1ss	2	8	-39.3	-40.4			-28.8	-27.00	1.8
	HT/VHT80, M8 to M15, M0 to M9 2ss	2	8	-39.3	-40.4			-28.8	-27.00	1.8
	HT/VHT80, M0 to M7, M0 to M9 1ss	3	8	-42.5	-42.3	-40.4		-28.9	-27.00	1.9
	HT/VHT80, M8 to M15, M0 to M9 2ss	3	8	-42.5	-42.3	-40.4		-28.9	-27.00	1.9
	HT/VHT80, M16 to M23, M0 to M9 3ss	3	8	-42.5	-42.3	-40.4		-28.9	-27.00	1.9
	HT/VHT80, M0 to M7, M0 to M9 1ss	4	8	-42.5	-42.3	-40.4	-41.4	-27.5	-27.00	0.5
	HT/VHT80, M8 to M15, M0 to M9 2ss	4	8	-42.5	-42.3	-40.4	-41.4	-27.5	-27.00	0.5
	HT/VHT80, M16 to M23, M0 to M9 3ss	4	8	-42.5	-42.3	-40.4	-41.4	-27.5	-27.00	0.5
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-42.5	-42.3			-28.4	-27.00	1.4
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-39.3	-40.4			-28.8	-27.00	1.8
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-46.3	-46.7	-45.1		-28.4	-27.00	1.4
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-42.5	-42.3	-40.4		-27.1	-27.00	0.1
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-42.5	-42.3	-40.4		-28.9	-27.00	1.9
	HT/VHT80 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-49.6	-50.0	-49.6	-47.8	-29.1	-27.00	2.1
	HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-46.3	-46.7	-45.1	-44.3	-28.5	-27.00	1.5
	HT/VHT80 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-44.2	-43.0	-43.2	-42.8	-28.0	-27.00	1.0
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	2	8	-39.3	-40.4			-28.8	-27.00	1.8
	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	3	8	-42.5	-42.3	-40.4		-28.9	-27.00	1.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT80 STBC, M0 to M7, M0 to M9 1ss	4	8	-42.5	-42.3	-40.4	-41.4	-27.5	-27.00	0.5
5795	Non HT/VHT40, 6 to 54 Mbps	1	8	-38.1				-30.1	-27.00	3.1
	Non HT/VHT40, 6 to 54 Mbps	2	8	-38.1	-42.3			-28.7	-27.00	1.7
	Non HT/VHT40, 6 to 54 Mbps	3	8	-38.1	-42.3	-45.8		-28.2	-27.00	1.2
	Non HT/VHT40, 6 to 54 Mbps	4	8	-38.1	-42.3	-45.8	-42.1	-27.2	-27.00	0.2
	HT/VHT40, M0 to M7, M0 to M9 1ss	1	8	-35.3				-27.3	-27.00	0.3
	HT/VHT40, M0 to M7, M0 to M9 1ss	2	8	-42.5	-45.5			-32.7	-27.00	5.7
	HT/VHT40, M8 to M15, M0 to M9 2ss	2	8	-42.5	-45.5			-32.7	-27.00	5.7
	HT/VHT40, M0 to M7, M0 to M9 1ss	3	8	-42.5	-45.5	-44.1		-31.1	-27.00	4.1
	HT/VHT40, M8 to M15, M0 to M9 2ss	3	8	-42.5	-45.5	-44.1		-31.1	-27.00	4.1
	HT/VHT40, M16 to M23, M0 to M9 3ss	3	8	-42.5	-45.5	-44.1		-31.1	-27.00	4.1
	HT/VHT40, M0 to M7, M0 to M9 1ss	4	8	-42.5	-45.5	-44.1	-43.9	-29.8	-27.00	2.8
	HT/VHT40, M8 to M15, M0 to M9 2ss	4	8	-42.5	-45.5	-44.1	-43.9	-29.8	-27.00	2.8
	HT/VHT40, M16 to M23, M0 to M9 3ss	4	8	-42.5	-45.5	-44.1	-43.9	-29.8	-27.00	2.8
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-42.5	-45.5			-29.7	-27.00	2.7
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-42.5	-45.5			-32.7	-27.00	5.7
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-45.9	-45.4	-44.9		-27.8	-27.00	0.8
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-42.5	-45.5	-44.1		-29.3	-27.00	2.3
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-42.5	-45.5	-44.1		-31.1	-27.00	4.1
	HT/VHT40 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-45.5	-48.8	-48.1	-48.9	-27.6	-27.00	0.6
	HT/VHT40 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-45.9	-45.4	-44.9	-44.7	-28.2	-27.00	1.2
	HT/VHT40 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-42.5	-45.5	-44.1	-43.9	-28.6	-27.00	1.6
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	2	8	-42.5	-45.5			-32.7	-27.00	5.7
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	3	8	-42.5	-45.5	-44.1		-31.1	-27.00	4.1
	HT/VHT40 STBC, M0 to M7, M0 to M9 1ss	4	8	-42.5	-45.5	-44.1	-43.9	-29.8	-27.00	2.8
5825	Non HT/VHT20, 6 to 54 Mbps	1	8	-40.6				-32.6	-27.00	5.6
	Non HT/VHT20, 6 to 54 Mbps	2	8	-40.6	-41.5			-30.0	-27.00	3.0
	Non HT/VHT20, 6 to 54 Mbps	3	8	-40.6	-41.5	-42.4		-28.7	-27.00	1.7
	Non HT/VHT20, 6 to 54 Mbps	4	8	-40.6	-41.5	-42.4	-43.7	-27.9	-27.00	0.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	11	-40.6	-41.5			-27.0	-27.00	0.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	13	-44.7	-44.3	-46.1		-27.4	-27.00	0.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	14	-46.3	-47.8	-47.3	-47.2	-27.1	-27.00	0.1
	HT/VHT20, M0 to M7, M0 to M9 1ss	1	8	-35.6				-27.6	-27.00	0.6
	HT/VHT20, M0 to M7, M0 to M9 1ss	2	8	-37.6	-38.6			-27.1	-27.00	0.1
	HT/VHT20, M8 to M15, M0 to M9 2ss	2	8	-37.6	-38.6			-27.1	-27.00	0.1
	HT/VHT20, M0 to M7, M0 to M9 1ss	3	8	-40.8	-41.6	-42.9		-28.9	-27.00	1.9
	HT/VHT20, M8 to M15, M0 to M9 2ss	3	8	-40.8	-41.6	-42.9		-28.9	-27.00	1.9
	HT/VHT20, M16 to M23, M0 to M9 3ss	3	8	-40.8	-41.6	-42.9		-28.9	-27.00	1.9
	HT/VHT20, M0 to M7, M0 to M9 1ss	4	8	-40.8	-41.6	-42.9	-41.1	-27.5	-27.00	0.5
	HT/VHT20, M8 to M15, M0 to M9 2ss	4	8	-40.8	-41.6	-42.9	-41.1	-27.5	-27.00	0.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT20, M16 to M23, M0 to M9 3ss	4	8	-40.8	-41.6	-42.9	-41.1	-27.5	-27.00	0.5
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	2	11	-40.8	-41.6			-27.2	-27.00	0.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	2	8	-37.6	-38.6			-27.1	-27.00	0.1
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	3	13	-44.8	-43.9	-45.7		-27.2	-27.00	0.2
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	3	10	-40.8	-41.6	-42.9		-27.1	-27.00	0.1
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	3	8	-40.8	-41.6	-42.9		-28.9	-27.00	1.9
	HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss	4	14	-49.3	-48.0	-48.8	-46.3	-27.9	-27.00	0.9
	HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss	4	11	-44.8	-43.9	-45.7	-44.4	-27.6	-27.00	0.6
	HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss	4	9	-42.7	-42.5	-44.1	-44.3	-28.1	-27.00	1.1
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	2	8	-37.6	-38.6			-27.1	-27.00	0.1
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	3	8	-40.8	-41.6	-42.9		-28.9	-27.00	1.9
	HT/VHT20 STBC, M0 to M7, M0 to M9 1ss	4	8	-40.8	-41.6	-42.9	-41.1	-27.5	-27.00	0.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Peak, 5775 MHz, HT/VHT80 Beam Forming, M8 to M15, M0 to M9 2ss

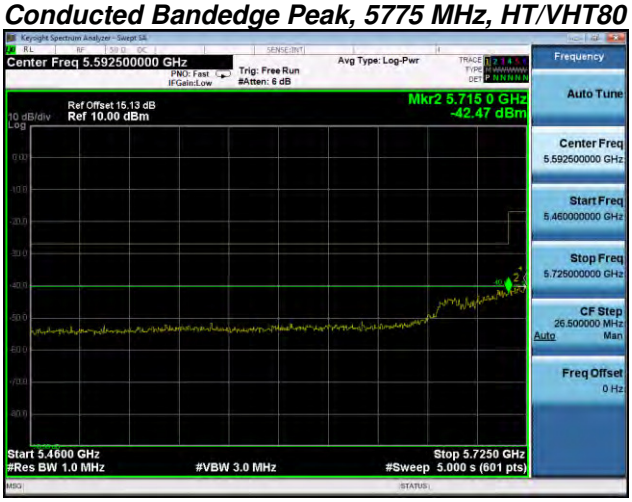

Antenna A

Antenna B

Antenna C

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Peak, 5825 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

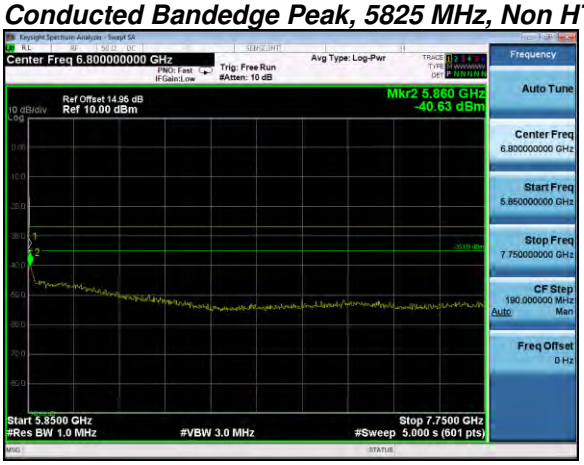

Antenna A

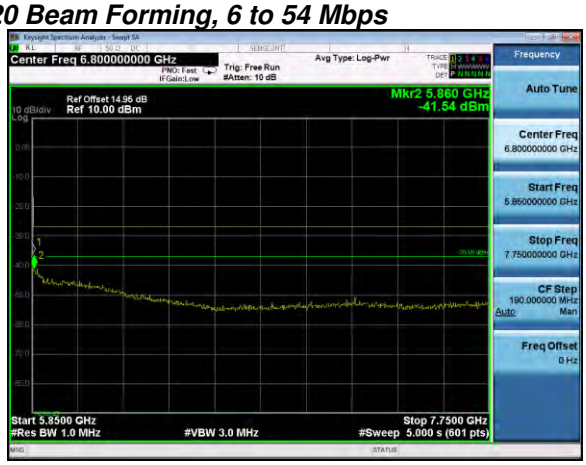

Antenna B

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

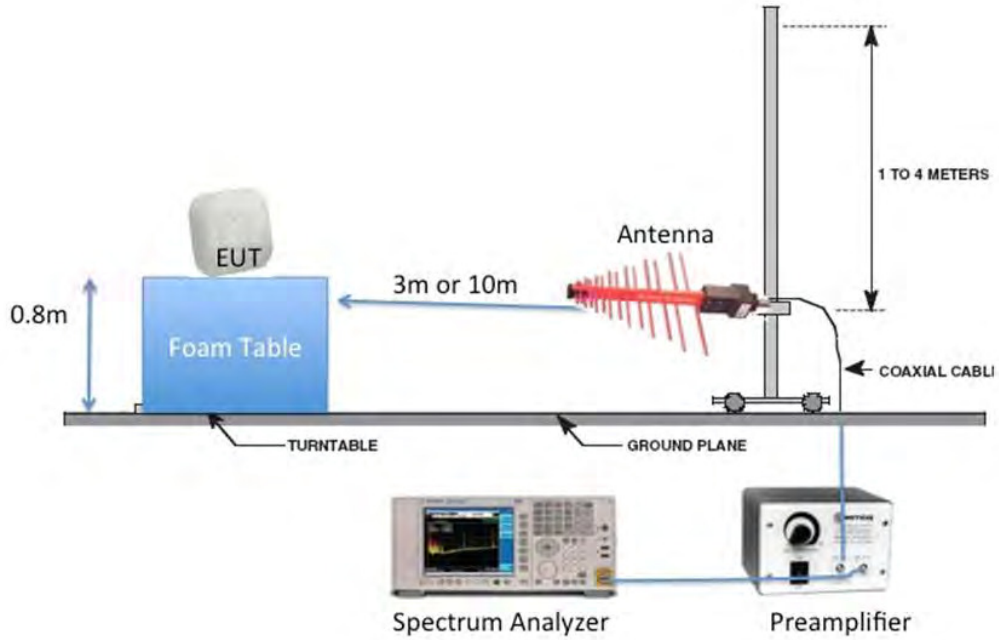

Radiated Emission Setup Diagram-Above 1G

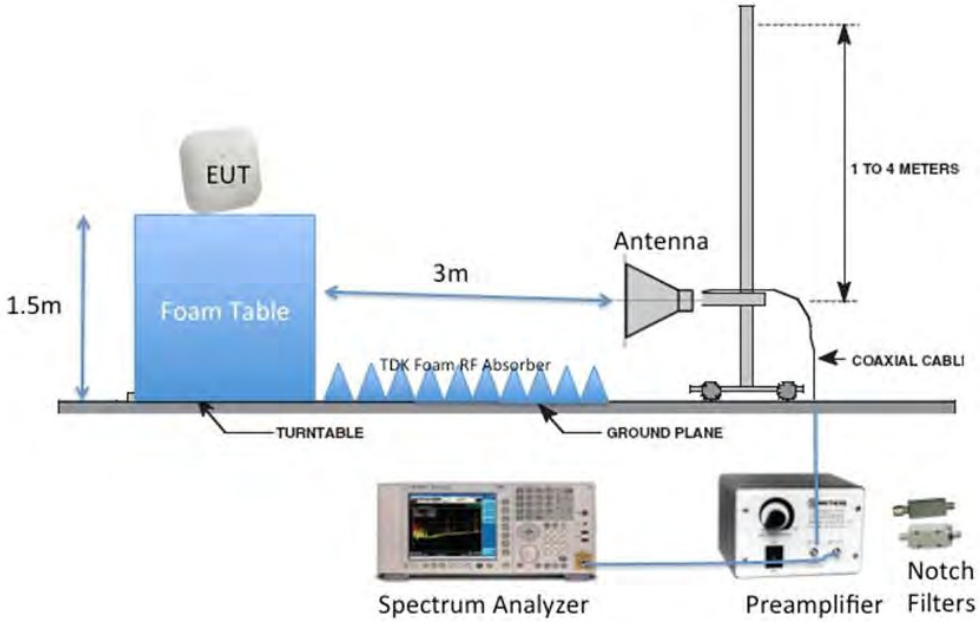

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1 Radiated Spurious Emissions

15.407(b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of −17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of −27 dBm/MHz.
(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
(7) The provisions of §15.205 apply to intentional radiators operating under this section.
(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

Ref. ANSI C63.10: 2013 section 12.7.6 & 12.7.7.3 & 6.6

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 1 kHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System #	Description	Samples
1	EUT	S01

Tested By :	Date of testing:
Jose Aguirre	27-Oct-2015
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5745	6 to 54 Mbps	6	48.5	54	5.5
5755	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	48.8	54	5.2
5775	HT/VHT80, M0 to M23, M0.0 to M9.4	m0x1	48.7	54	5.3
5785	6 to 54 Mbps	6	48.4	54	5.6
5795	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	48.4	54	5.6
5825	6 to 54 Mbps	6	48.4	54	5.6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.A.1 Radiated Transmitter Spurs, 5745 MHz, 6 to 54 Mbps, Average (1-18GHz)

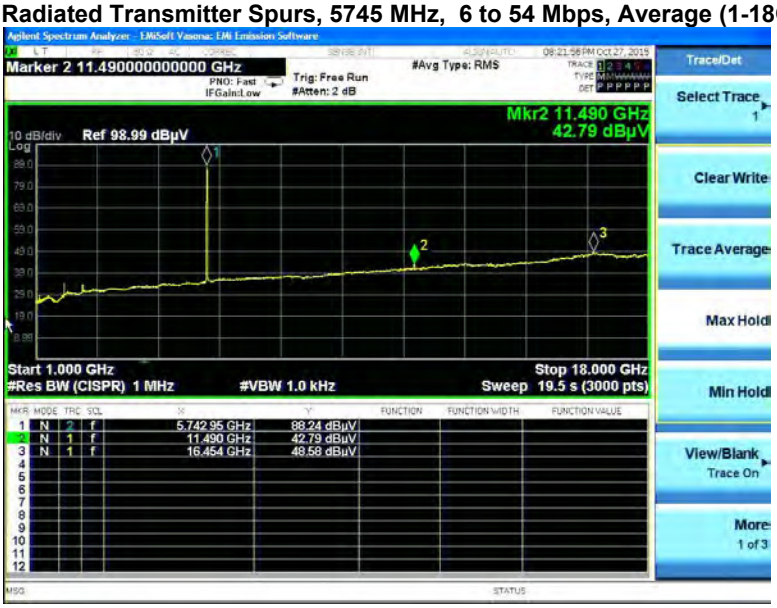

B.1.A.2 Radiated Transmitter Spurs, 5755 MHz , HT/VHT40, M0 to M23, M0.0 to M9.4, Average (1-18GHz)

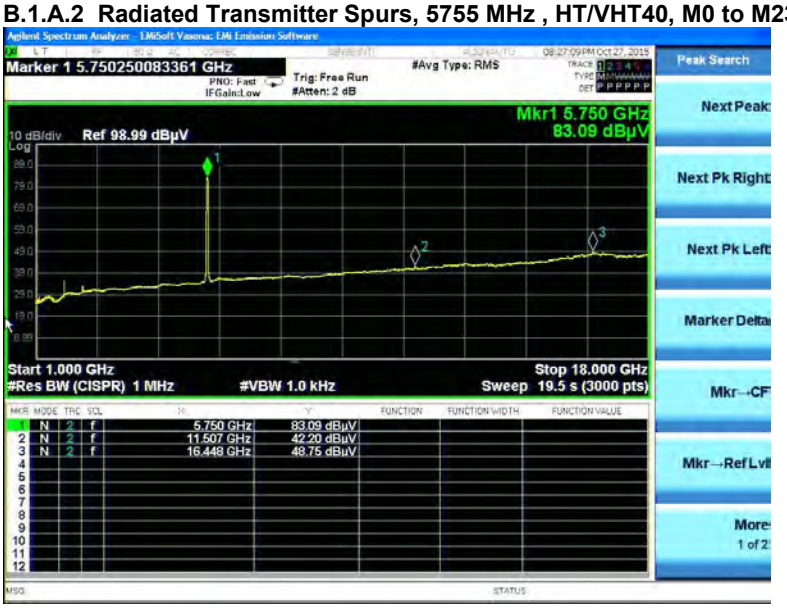

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.A.3 Radiated Transmitter Spurs, 5775 MHz , HT/VHT80, M0 to M23, M0.0 to M9.4, Average (1-18GHz)

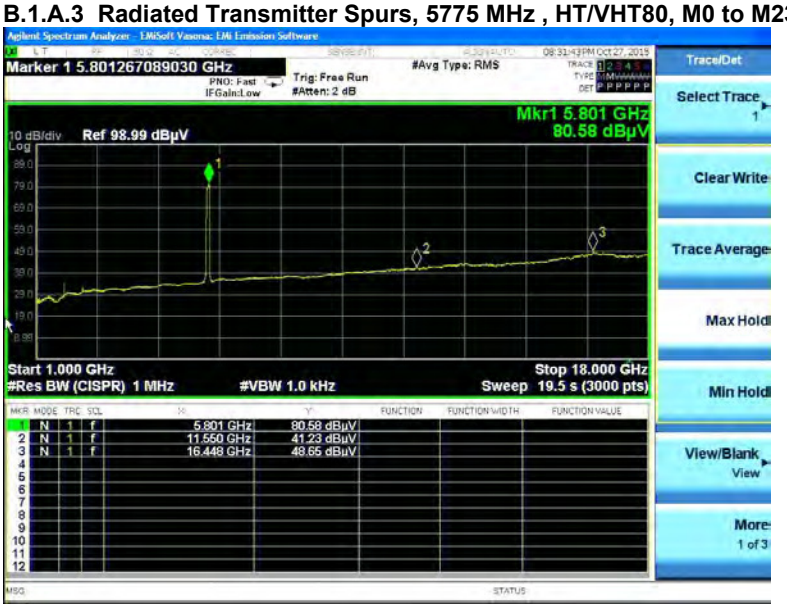

B.1.A.4 Radiated Transmitter Spurs, 5785 MHz, 6 to 54 Mbps, Average (1-18GHz)

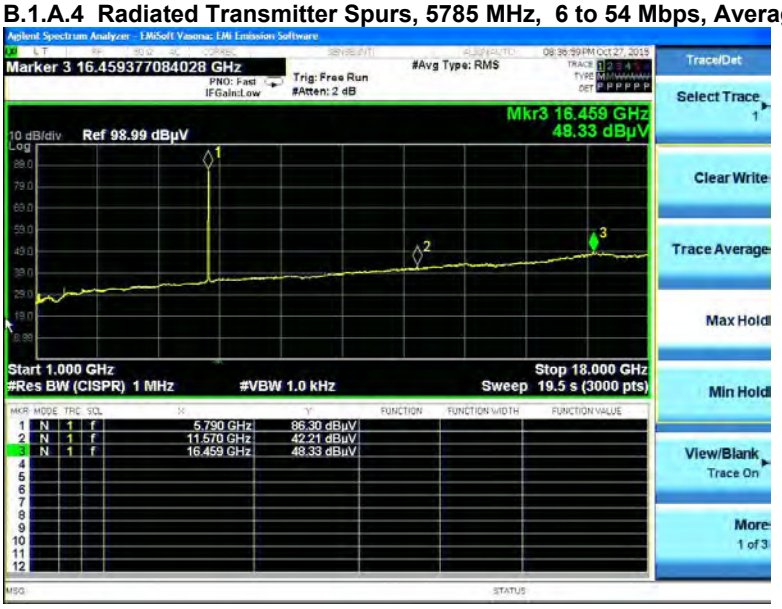

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.A.5 Radiated Transmitter Spurs, 5795 MHz , HT/VHT40, M0 to M23, M0.0 to M9.4, Average (1-18GHz)

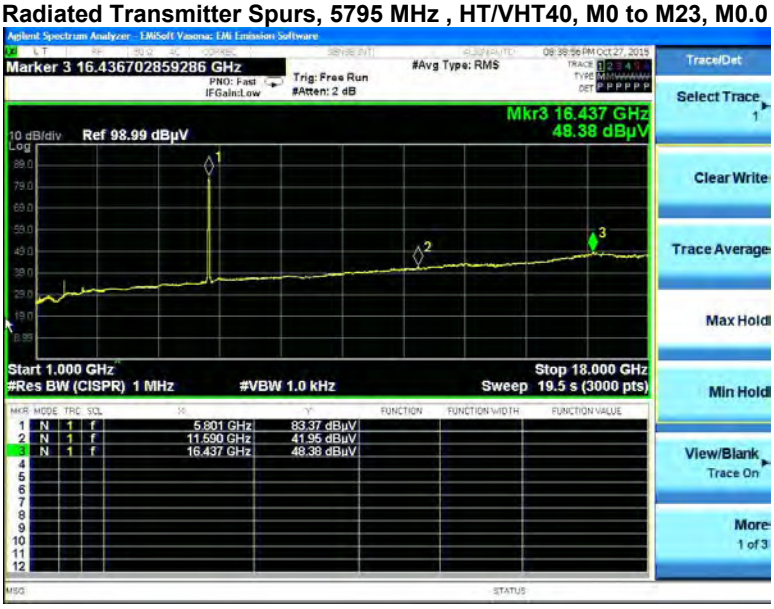

B.1.A.6 Radiated Transmitter Spurs, 5825MHz, 6 to 54 Mbps, Average (1-18GHz)

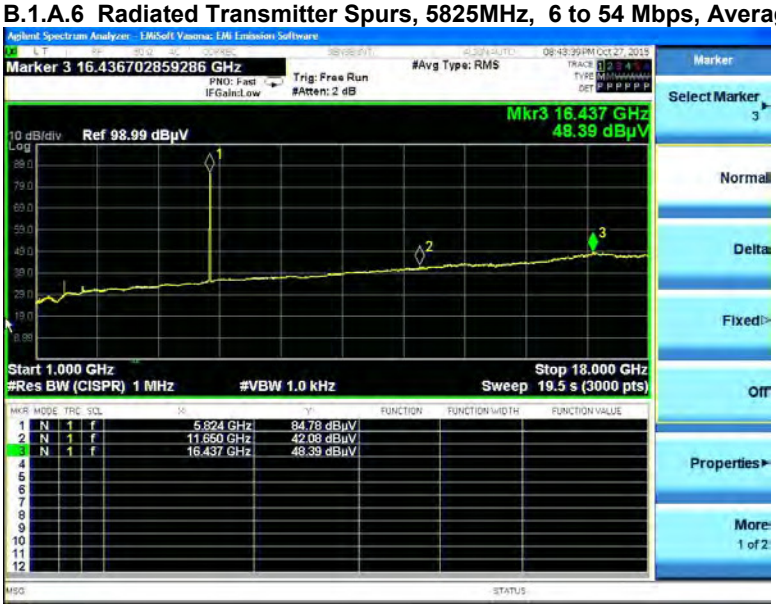

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18GHz – 26.5GHz)

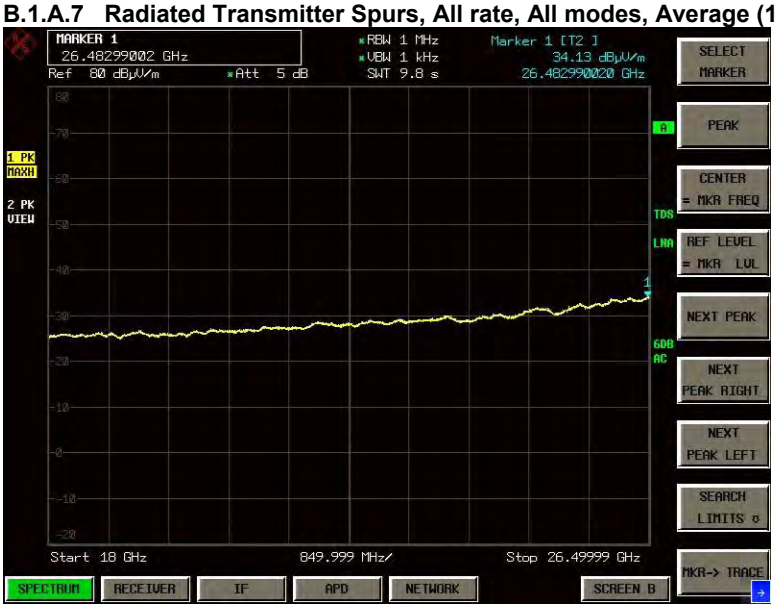

B.1.A.8 Radiated Transmitter Spurs, All rate, All modes, Average (26.5GHz – 40GHz)

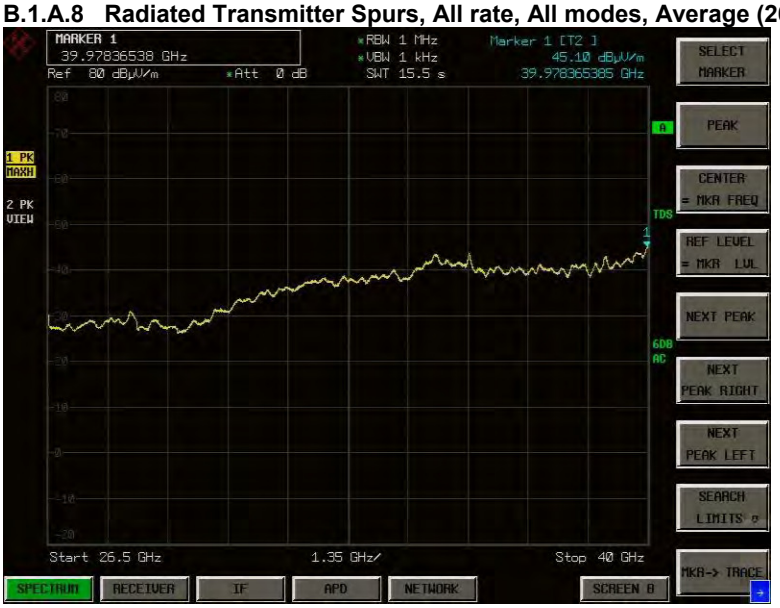

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5745	6 to 54 Mbps	6	58.7	74	15.3
5755	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	58.8	74	15.2
5775	HT/VHT40, M0 to M23, M0.0 to M9.4	m0x1	57.3	74	16.7
5785	6 to 54 Mbps	6	59.0	74	15.0
5795	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	57.7	74	16.3
5825	6 to 54 Mbps	6	57.5	74	16.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.P.1 Radiated Transmitter Spurs, 5745 MHz, 6 to 54 Mbps, Peak (1-18GHz)

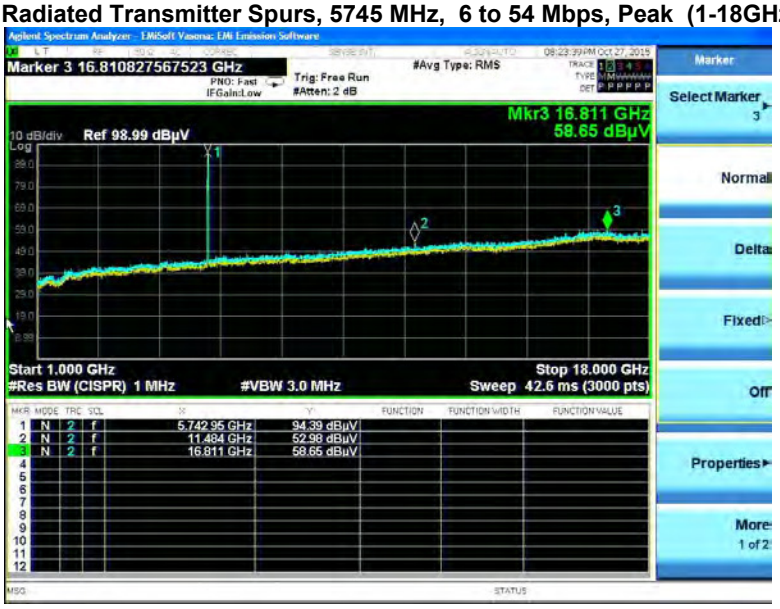

B.1.P.2 Radiated Transmitter Spurs, 5755 MHz , HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)

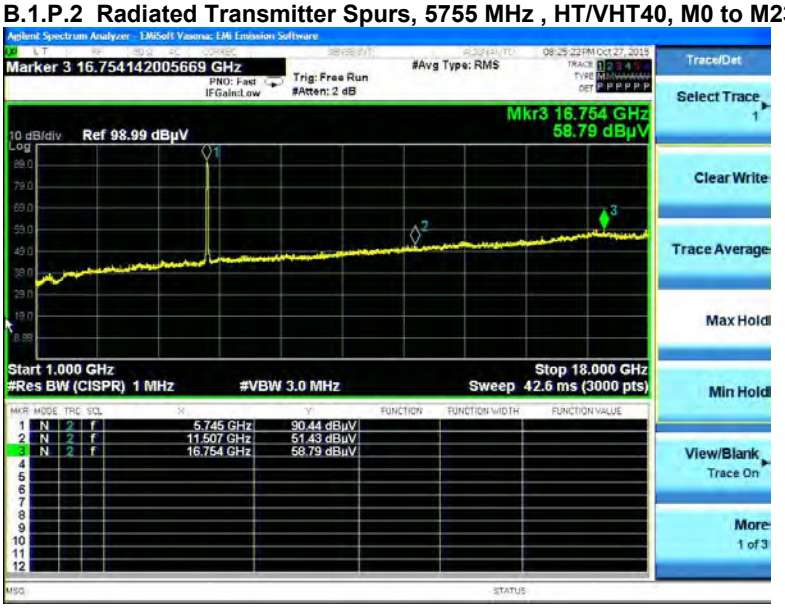

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.P.3 Radiated Transmitter Spurs, 5775 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)

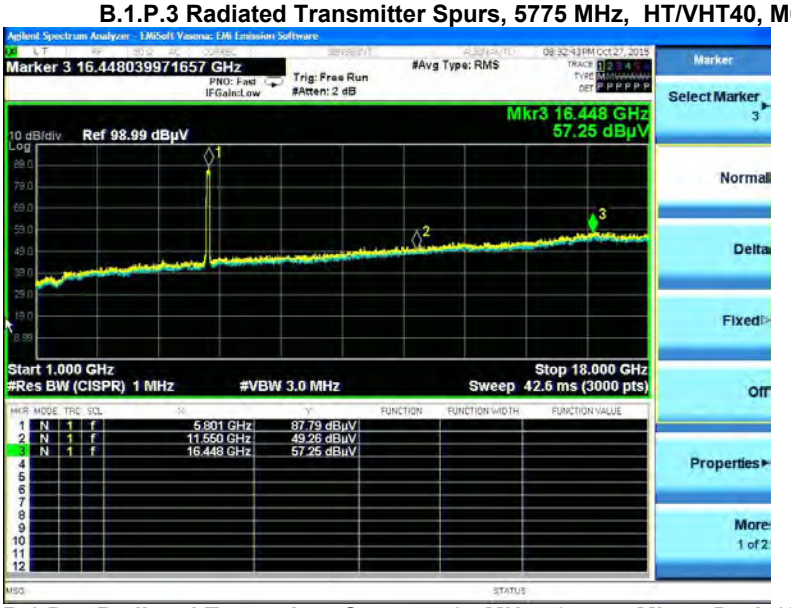

B.1.P.4 Radiated Transmitter Spurs, 5785 MHz , 6 to 54 Mbps, Peak (1-18GHz)

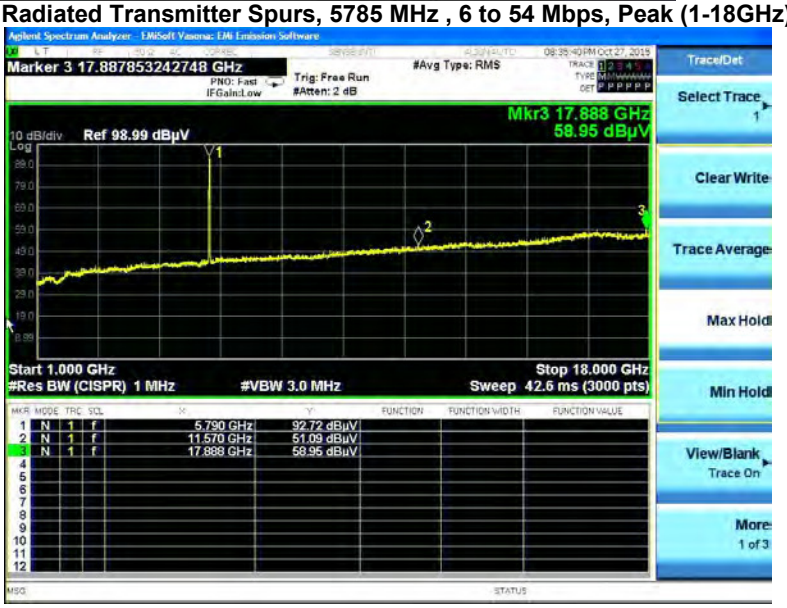

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.P.5 Radiated Transmitter Spurs, 5795 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)

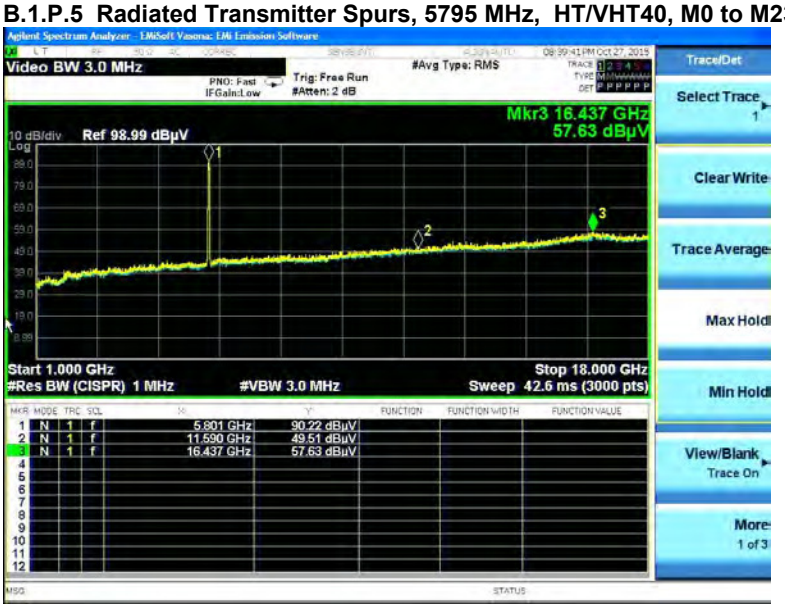

B.1.P.6 Radiated Transmitter Spurs, 5825 MHz, 6 to 54 Mbps, Peak (1-18GHz)

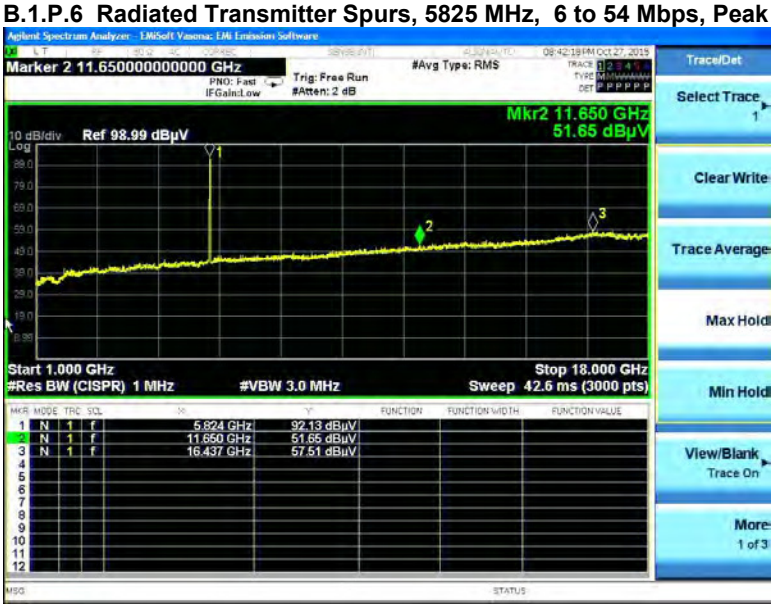

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18GHz – 26.5GHz)

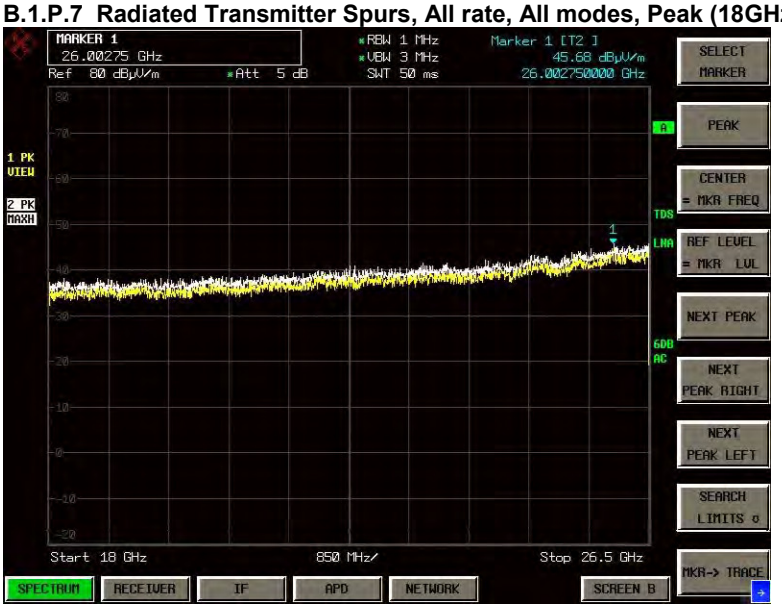

B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz)

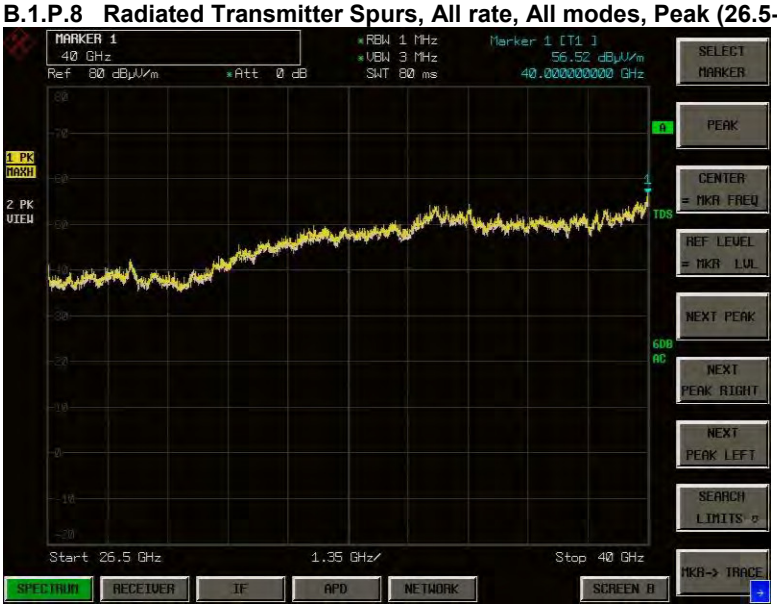

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.2 Radiated Emissions 30MHz to 1GHz

15.209 / 15.205 / 15.407:
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak
.	Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System #	Description	Samples
1	EUT	S01

Tested By : Jose Aguirre	**Date of testing:** 01-Oct-2015
Test Result : PASS	

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Graphical Test Results

Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements

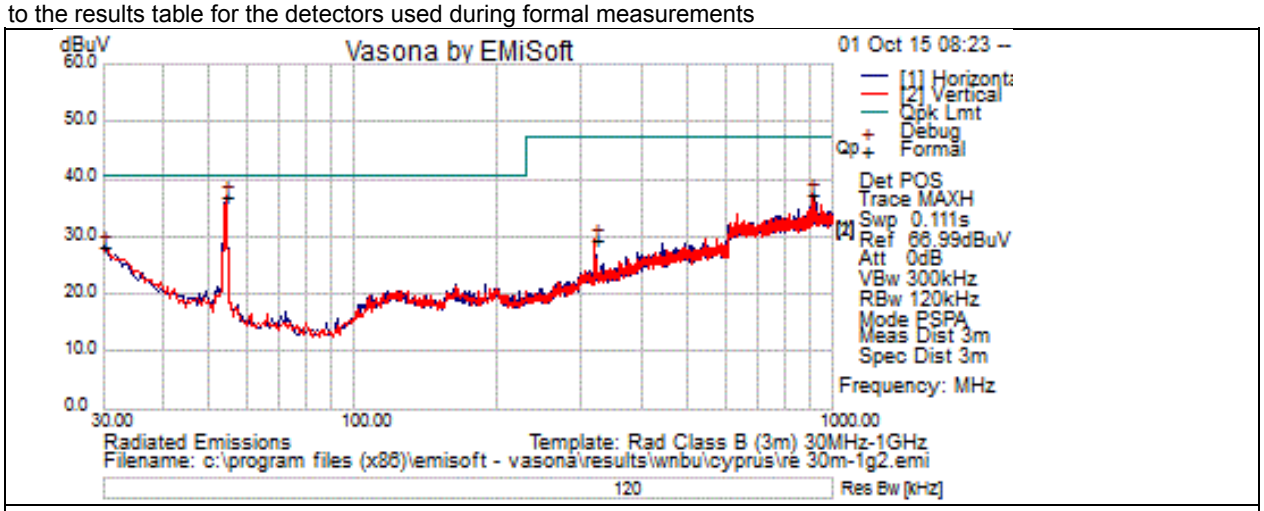

AIR-AP1572EAC-B-K9

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
54.25	29.1	0.7	7.3	37.1	Peak	V	100	230	40.5	-3.4	Pass	
908.456	12.3	2.9	22.4	37.6	Peak	V	100	73	47.5	-9.9	Pass	
30	6.8	0.5	21.1	28.4	Peak	H	100	139	40.5	-12.1	Pass	
319.788	14	1.7	13.9	29.6	Peak	V	100	355	47.5	-17.9	Pass	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.3 AC Conducted Emissions

15.207

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure
Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 150 KHz – 30 MHz
Attenuation: 10 dB
Sweep Time: Coupled
Resolution Bandwidth: 9 KHz
Video Bandwidth: 30 KHz
Detector: Quasi-Peak / Average

System #	Description	Samples
1	EUT	S01

Tested By :	Date of testing:
Jose Aguirre	25-Aug-2015
Test Result : Pass	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Graphical Test Results

Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements

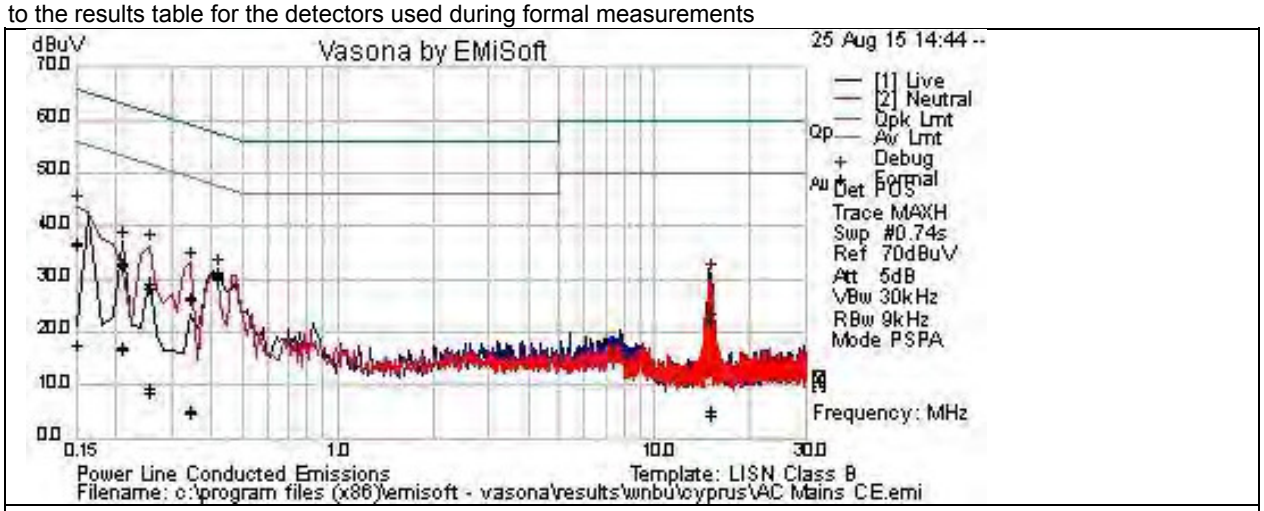

AIR-AP1572EAC-B-K9

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.344025	6.1	20.3	0	26.5	Qp	L	59.1	-32.6	Pass	
0.15	15.6	21.1	0.1	36.7	Qp	L	66	-29.3	Pass	
0.254475	8.4	20.6	0	29	Qp	L	61.6	-32.6	Pass	
14.883	3.1	20.2	0.2	23.5	Qp	L	60	-36.5	Pass	
0.415	11.1	20.1	0	31.3	Qp	L	57.6	-26.3	Pass	
0.2097	12.3	20.8	0	33.1	Qp	L	63.2	-30.1	Pass	
0.254475	7.6	20.6	0	28.3	Qp	N	61.6	-33.3	Pass	
0.15	15.2	21.1	0.1	36.3	Qp	N	66	-29.7	Pass	
0.2097	12	20.8	0	32.8	Qp	N	63.2	-30.4	Pass	
0.415	10.4	20.1	0	30.5	Qp	N	57.6	-27	Pass	
0.344025	5.8	20.3	0	26.1	Qp	N	59.1	-33	Pass	
14.883	2.1	20.2	0.2	22.4	Qp	N	60	-37.6	Pass	
0.344025	-15.1	20.3	0	5.3	Av	L	49.1	-43.8	Pass	
0.15	-3.7	21.1	0.1	17.4	Av	L	56	-38.6	Pass	
0.254475	-11.2	20.6	0	9.4	Av	L	51.6	-42.2	Pass	
14.883	-15.9	20.2	0.2	4.4	Av	L	50	-45.6	Pass	
0.415	10.8	20.1	0	31	Av	L	47.6	-16.6	Pass	
0.2097	-4.1	20.8	0	16.7	Av	L	53.2	-36.5	Pass	
0.254475	-12.2	20.6	0	8.4	Av	N	51.6	-43.2	Pass	
0.15	-3.4	21.1	0.1	17.8	Av	N	56	-38.2	Pass	
0.2097	-3.8	20.8	0	17.1	Av	N	53.2	-36.2	Pass	
0.415	9.8	20.1	0	29.9	Av	N	47.6	-17.6	Pass	
0.344025	-15.4	20.3	0	4.9	Av	N	49.1	-44.2	Pass	
14.883	-15.2	20.2	0.2	5.2	Av	N	50	-44.8	Pass	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Photographs of setup

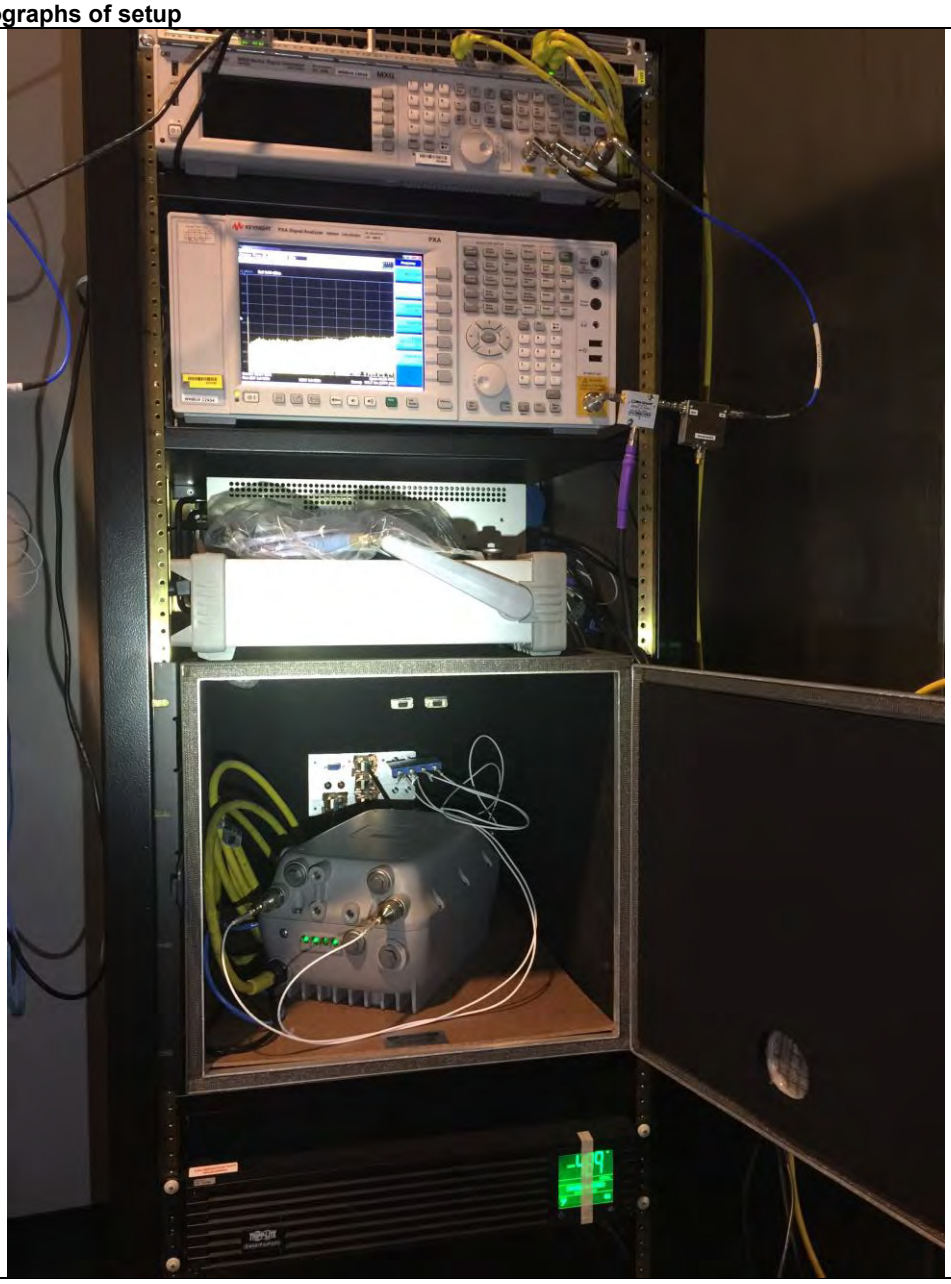

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

AIR-AP1572EAC-B-K9 Radiated Emissions setup 30MHz to 1GHz

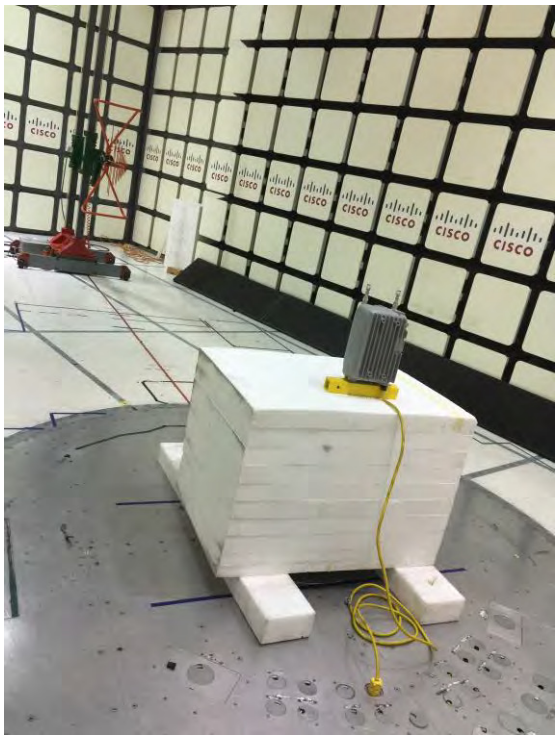

AIR-AP1572EAC-B-K9 Radiated Emissions setup above 1GHz

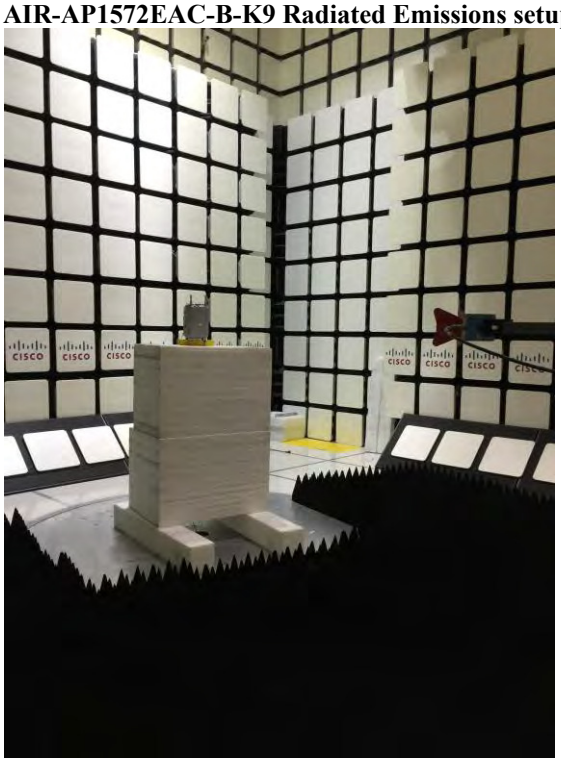

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

AIR-AP1572EAC-B-K9 AC Conducted Emissions setup

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS008447	Cisco / NSA 10m Chamber	NSA 10m Chamber	14-Oct-14	14-Oct-15	B.1
CIS008447	Cisco / NSA 10m Chamber	NSA 10m Chamber	14-Oct-15	14-Oct-16	B.1
CIS008448	Cisco / NSA 5m Chamber	NSA 5m Chamber	09-Oct-15	09-Oct-16	B.3
CIS030652	Sunol Sciences / JB1	Combination Antenna, 30MHz-2GHz	5-Nov-14	5-Nov-15	B.3
CIS030654	Sunol Sciences / JB1	Combination Antenna, 30MHz-2GHz	12-Dec-14	12-Dec-15	B.3
CIS033988	Agilent /E4446A	PSA Spectrum Analyzer	9-Dec-14	9-Dec-15	B.1, B.2
CIS044940	ROHDE & SCHWARZ / ESU40	EMI RECEIVER, 40GHZ	27-May-15	27-May-16	B.1
CIS041929	Newport /iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	20-Dec-14	20-Dec-15	B.1, B.2, B.3
CIS024998	MICRO-COAX / UFB197C-1-0240-504504	Coaxial RF Cable, 26.5 GHz	11-Mar-15	11-Mar-16	B.1, B.2
CIS035284	ETS Lindgren / 3117	Double Ridged Horn Antenna	16-Sep-14	16-Sep-15	B.1, B.2
CIS004882	EMC Test Systems / 3115	Double Ridge Guide Horn Antenna	24-Jul-15	24-Jul-16	B.1, B.2
CIS035285	ETS Lindgren / 3117	Double Ridged Horn Antenna	30-Sep-15	30-Sep-16	B.1, B.2
CIS049516	Keysight / N9030A	PXA Spectrum Analyzer	12-Nov-14	12-Nov-15	B.1, B.2
CIS043124	Cisco /Above 1GHz Site Cal	Above 1GHz Cispr Site Verification	15-Jan-15	15-Jan-16	B.1, B.2
CIS008166	HP / 8491B Opt 010	10dB Attenuator	2-Feb-15	2-Feb-16	B.1, B.2
CIS020975	Micro-Coax / UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	18-Feb-15	18-Feb-16	B.1, B.2, B.3
CIS030559	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	20-Feb-15	20-Feb-16	B.1, B.2, B.3
CIS003003	HP / 83731B	Synthesized Signal Generator	13-Mar-15	13-Mar-16	B.1
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS041979	Cisco / 1840	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS047410	Agilent / N9038A	EMI Receiver	17-Feb-15	17-Feb-16	B.1, B.2, B.3
CIS051642	Huber+Suhner / Sucoflex 106PA	RF N Type Cable 8.5m	10-Feb-15	10-Feb-16	B.1, B.2, B.3
Test Equipment used for AC Mains Conducted Emissions					
CIS019206	TTE / H785-150K-50-21378	High Pas Filter,Fo=150kHz	09-SEP-14	09-SEP-15	B.3
CIS030562	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	26-JUN-15	26-JUN-16	B.3
CIS041929	Newport / iBTHP-5-DB9	5 inch Temp/RH/Press Sensor	20-DEC-14	20-DEC-15	B.3
CIS045015	Huber + Suhner/ Sucoflex 106PA	Sucoflex N Type Black 7ft cable	28-OCT-14	28-OCT-15	B.3
CIS047300	Agilent Technologies / N9038A	MXE EMI Receiver 20Hz to 26.5 Ghz	13-Jan-15	13-Jan-16	B.3
CIS008471	Bird 5-T-MB	50 Ohm, 5W Terminator,Type BNC	18-SEP-14	18-SEP-15	B.3
CIS019337	Fischer Custom Communications FCC-LISN-50/250-50-2-01	LISN	08-SEP-14	08-SEP-15	B.3
CIS019136	Fischer Custom Communications FCC-801-M3-32A	Power Line Coupling/Decoupling Network	12-NOV-14	12-NOV-15	B.3

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

RF Conducted at output antenna port					
CIS050378	Agilent / N9030A	PXA Spectrum Analyzer	05 Jan 15	05 Jan 16	A1 thru A6
CIS051695	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS051684	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS051690	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS051685	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS051686	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS051687	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A6
CIS047282	Huber + Suhner / Sucoflex 102E	40GHz Cable K Connector	01-Jun-15	01-Jun-16	A1 thru A6
CIS030666	Micro-Tronics / BRM50702-02	2.4-2.5G Notch Filter	01-Sept-15	01-Sept-16	A1 thru A6
CIS034302	Micro-Tronics / BRM50704-02	5.470-5.725G Notch Filter	09-Jul-15	09-Jul-16	A1 thru A6
CIS035609	Micro-Tronics / BRM50703-02	5.15-5.35G Notch Filter	09-Jul-15	09-Jul-16	A1 thru A6
CIS031700	Micro-Tronics / BRM50705-02	5.725-5.875G Notch Filter	01-Sept-15	01-Sept-16	A1 thru A6
CIS054609	ZFSC-2-10G /Mini-Circuits	Splitter	30-Jul-15	30-Jul-16	A1 thru A6
CIS054608	D3C2060 / Ditom	Splitter	20 Oct 15	20 Oct 16	A1 thru A6
CIS054607	PS4-09-452/4S/ Pulsar	Splitter	30-Jul-15	30-Jul-16	A1 thru A6
CIS054637	BWS30-W2/ Aeroflex	SMA 30dB Attenuator	31-Jul-15	31-Jul-16	A1 thru A6
CIS054636	BWS20-W2/ Aeroflex	20dB SMA Attenuator	31-Jul-15	31-Jul-16	A1 thru A6
CIS054625	RA08-S1S1-24/Megaphase	SMA cable 24"	31-Jul-15	31-Jul-16	A1 thru A6
CIS054624	RA08-S1S1-18/Megaphase	SMA cable 18"	31-Jul-15	31-Jul-16	A1 thru A6
CIS054623	RA08-S1S1-18/Megaphase	SMA cable 18"	31-Jul-15	31-Jul-16	A1 thru A6
CIS054622	RA08-S1S1-18/Megaphase	SMA cable 18"	31-Jul-15	31-Jul-16	A1 thru A6
CIS054621	RA08-S1S1-18/Megaphase	SMA cable 18"	31-Jul-15	31-Jul-16	A1 thru A6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ($1x10^3$)
EN	European Norm	MHz	MegaHertz ($1x10^6$)
IEC	International Electro technical Commission	GHz	Gigahertz ($1x10^9$)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ($1x10^3$)
L1	Line 1	µV	Microvolt ($1x10^{-6}$)
L2	Line2	A	Amp
L3	Line 3	µA	Micro Amp ($1x10^{-6}$)
DC	Direct Current	mS	Milli Second ($1x10^{-3}$)
RAW	Uncorrected measurement value, as indicated by the measuring device	µS	Micro Second ($1x10^{-6}$)
RF	Radio Frequency	µS	Micro Second ($1x10^{-6}$)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

END

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential