



11ac(VHT40)_TX_CH_62_Vertical

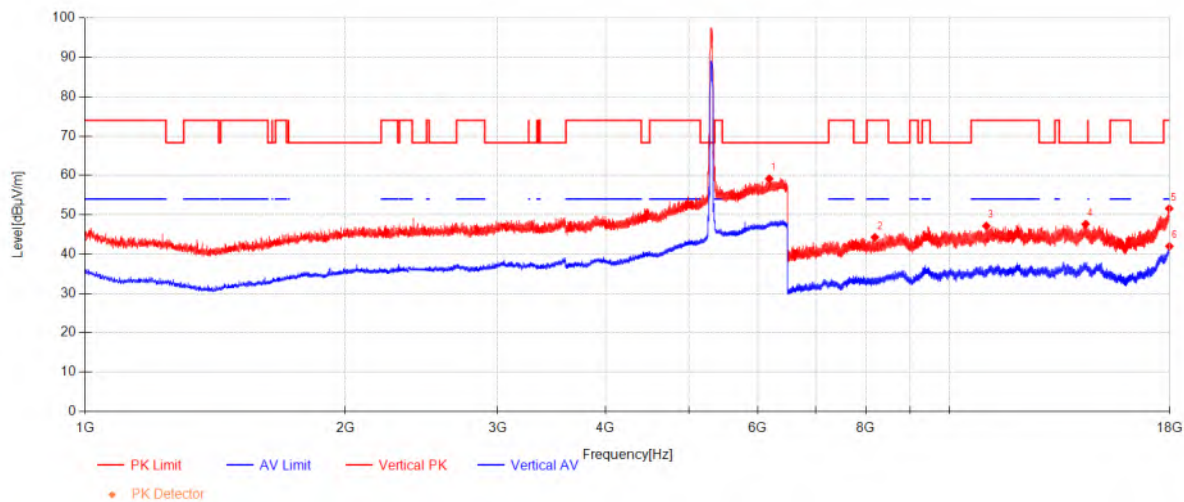


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6187.7692	41.76	33.51	-16.12	59.15	68.30	9.15	Vertical
2	8200.0833	51.97	36.52	-44.22	44.27	74.00	29.73	Vertical
3	11032.916	48.06	39.50	-40.39	47.17	74.00	26.83	Vertical
4	14377.979	46.09	40.26	-38.73	47.63	68.30	20.67	Vertical
5	17964.062	44.08	44.58	-37.08	51.58	74.00	22.42	Vertical
6	17975.083	34.39	44.65	-37.05	41.99	54.00	12.01	Vertical

11ac(VHT40)_TX_CH_102_Horizontal

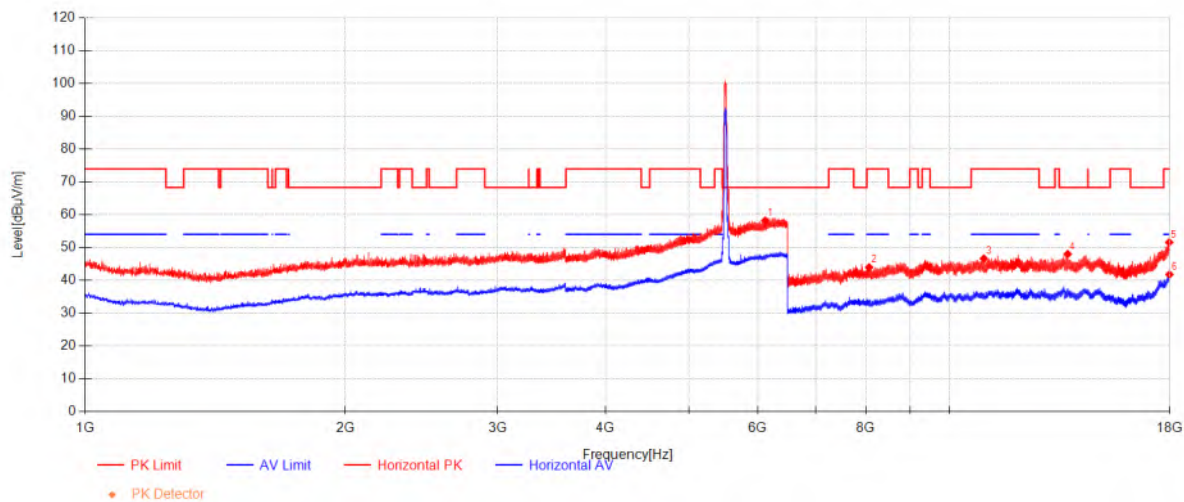


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6121.3462	41.32	33.26	-16.39	58.19	68.30	10.11	Horizontal
2	8076.4583	51.97	36.38	-44.39	43.96	74.00	30.04	Horizontal
3	10962.958	47.53	39.47	-40.39	46.61	74.00	27.39	Horizontal
4	13706.666	46.12	39.86	-37.99	47.99	68.30	20.31	Horizontal
5	17964.062	44.07	44.58	-37.08	51.57	74.00	22.43	Horizontal
6	17975.562	34.19	44.65	-37.05	41.79	54.00	12.21	Horizontal

11ac(VHT40)_TX_CH_102_Vertical

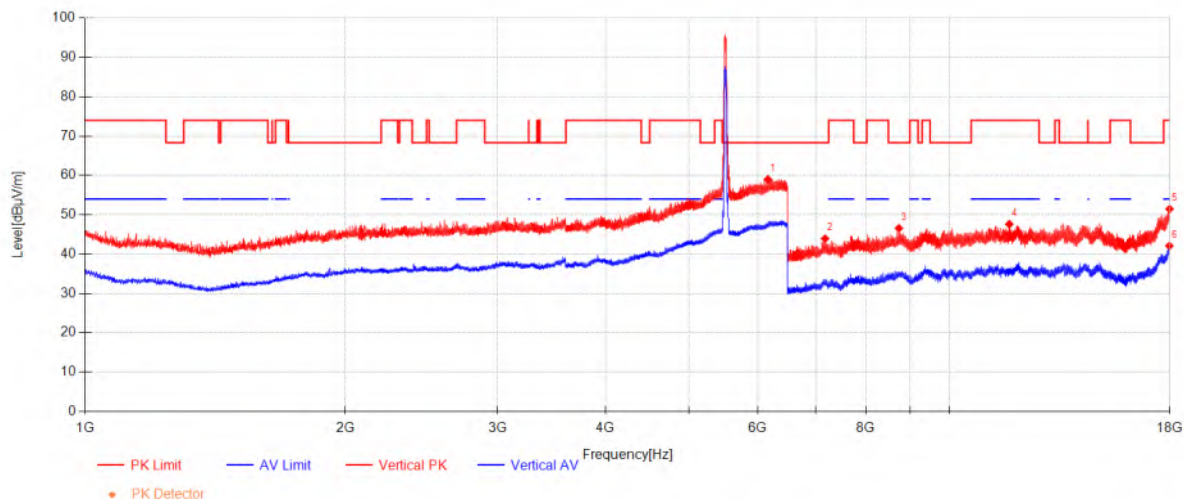


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6166.6154	41.75	33.43	-16.21	58.98	68.30	9.32	Vertical
2	7179.4583	53.70	35.82	-45.59	43.94	68.30	24.36	Vertical
3	8742.9792	53.23	37.12	-43.76	46.58	68.30	21.72	Vertical
4	11731.541	47.85	39.43	-39.68	47.60	74.00	26.40	Vertical
5	17979.395	43.84	44.68	-37.04	51.48	74.00	22.52	Vertical
6	17972.208	34.50	44.63	-37.06	42.08	54.00	11.92	Vertical

11ac(VHT40)_TX_CH_110_Horizontal

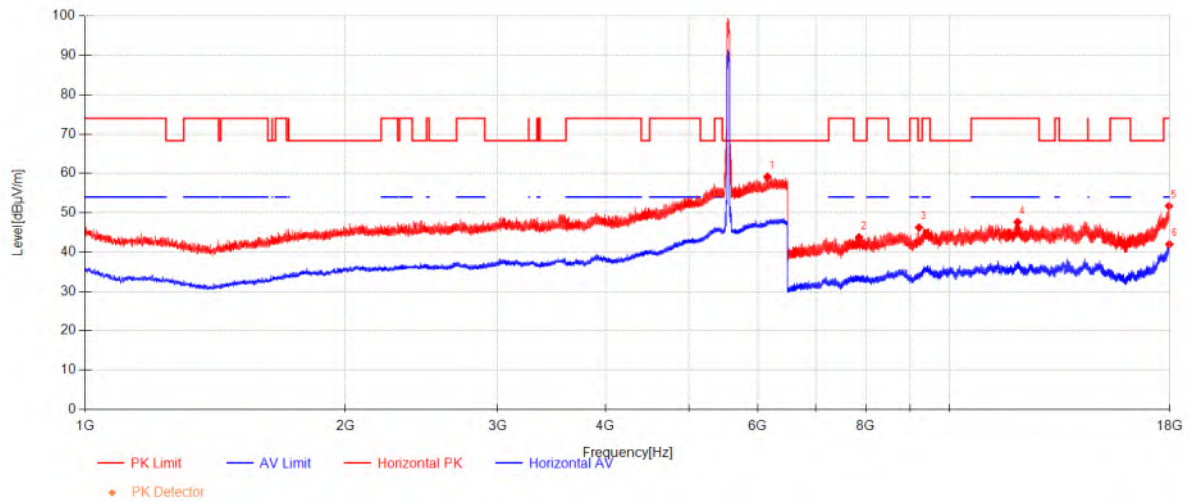


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6159	41.98	33.40	-16.24	59.15	68.30	9.15	Horizontal
2	7861.3125	52.37	36.33	-44.94	43.75	68.30	24.55	Horizontal
3	9223.1042	51.50	37.71	-42.96	46.25	68.30	22.05	Horizontal
4	11992.687	46.91	39.40	-38.66	47.65	74.00	26.35	Horizontal
5	17954.479	44.28	44.53	-37.11	51.70	74.00	22.30	Horizontal
6	17969.333	34.43	44.62	-37.07	41.98	54.00	12.02	Horizontal

11ac(VHT40)_TX_CH_110_Vertical

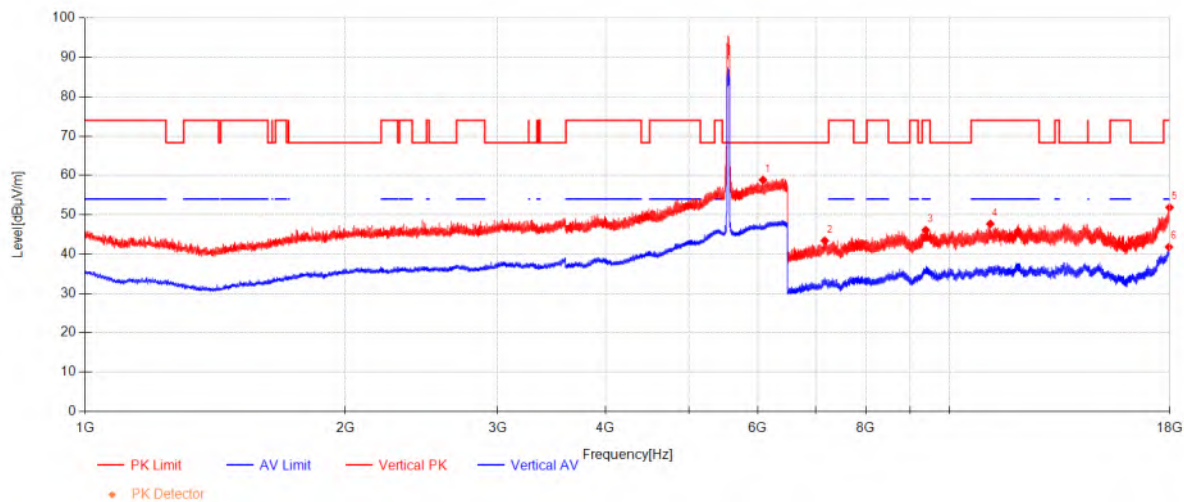

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6085.8077	42.13	33.13	-16.40	58.85	68.30	9.45	Vertical
2	7174.6667	53.20	35.81	-45.62	43.40	68.30	24.90	Vertical
3	9389.8542	50.98	37.95	-42.82	46.10	74.00	27.90	Vertical
4	11153.187	48.24	39.48	-40.02	47.70	74.00	26.30	Vertical
5	17981.791	44.20	44.69	-37.03	51.86	74.00	22.14	Vertical
6	17948.729	34.43	44.49	-37.12	41.80	54.00	12.20	Vertical


11ac(VHT40)_TX_CH_134_Horizontal

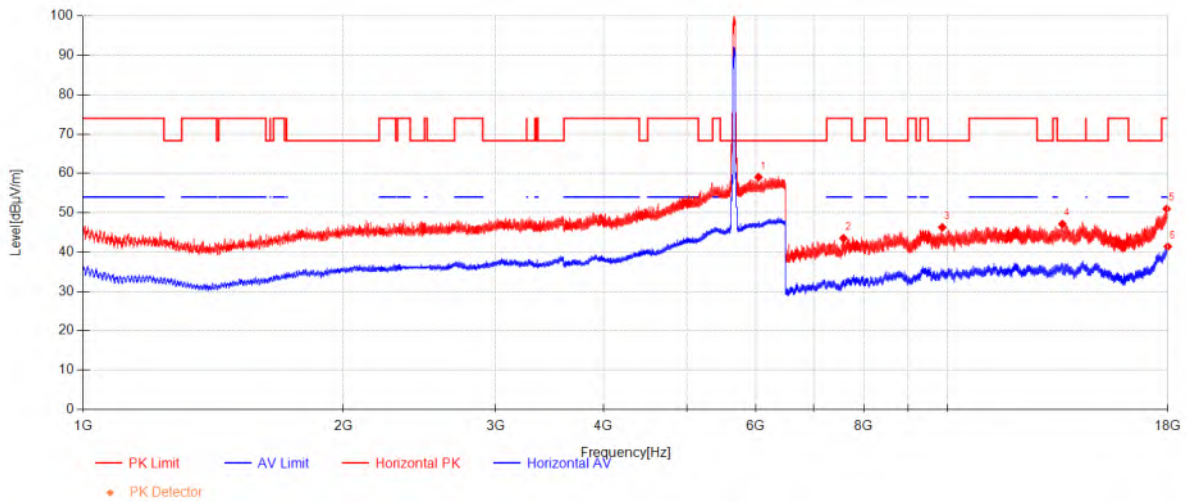

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6044.3462	42.26	32.97	-16.19	59.04	68.30	9.26	Horizontal
2	7581	52.25	36.38	-45.11	43.52	74.00	30.48	Horizontal
3	9864.2292	49.56	38.61	-41.89	46.28	68.30	22.02	Horizontal
4	13584.479	45.85	39.68	-38.39	47.14	68.30	21.16	Horizontal
5	17941.062	43.69	44.45	-37.15	50.99	74.00	23.01	Horizontal
6	17994.25	33.64	44.77	-37.00	41.41	54.00	12.59	Horizontal

11ac(VHT40)_TX_CH_134_Vertical

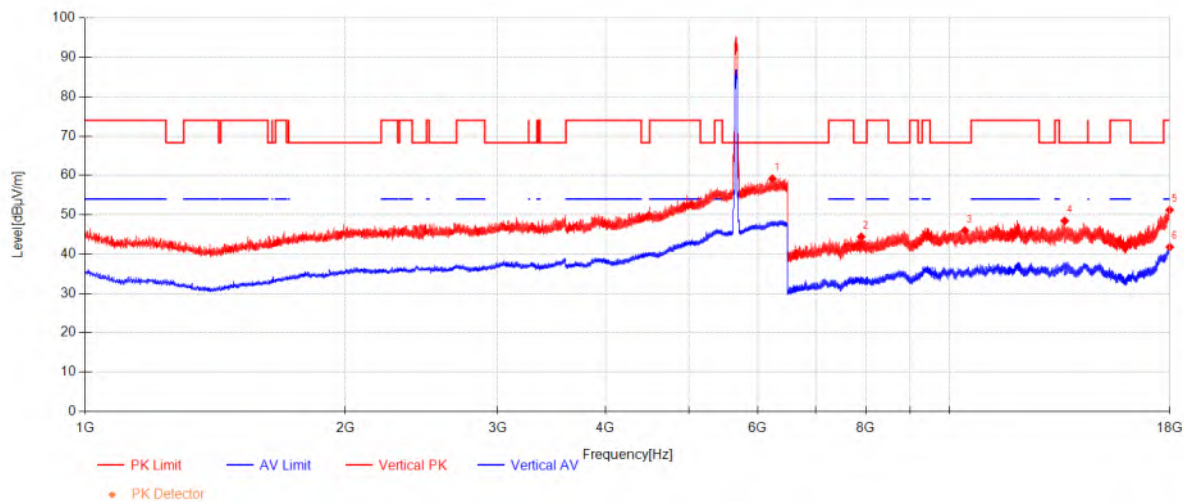


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6239.3846	41.58	33.71	-16.13	59.16	68.30	9.14	Vertical
2	7905.875	53.00	36.32	-44.93	44.39	68.30	23.91	Vertical
3	10422.458	47.98	39.10	-41.10	45.98	68.30	22.32	Vertical
4	13595.020	47.06	39.69	-38.31	48.44	68.30	19.86	Vertical
5	17984.666	43.52	44.71	-37.02	51.21	74.00	22.79	Vertical
6	17992.333	34.04	44.75	-37.00	41.79	54.00	12.21	Vertical

11ac(VHT40)_TX_CH_151_Horizontal

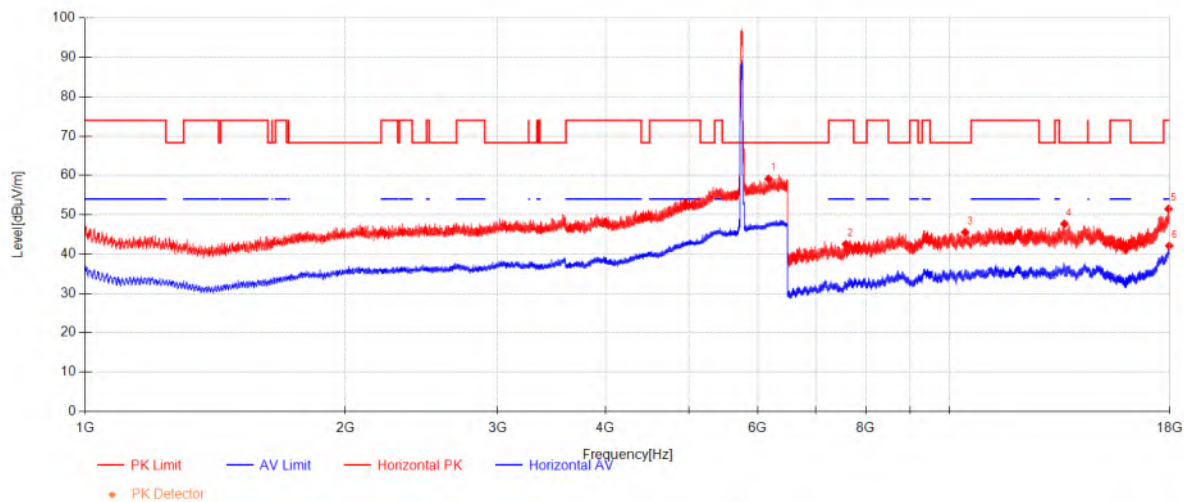


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6178.4615	41.78	33.48	-16.16	59.10	68.30	9.20	Horizontal
2	7588.1875	51.15	36.38	-45.03	42.51	74.00	31.49	Horizontal
3	10428.687	47.48	39.10	-41.05	45.53	68.30	22.77	Horizontal
4	13590.229	46.33	39.69	-38.35	47.67	68.30	20.63	Horizontal
5	17933.875	44.23	44.40	-37.17	51.47	74.00	22.53	Horizontal
6	17966.458	34.58	44.60	-37.07	42.10	54.00	11.90	Horizontal

11ac(VHT40)_TX_CH_151_Vertical

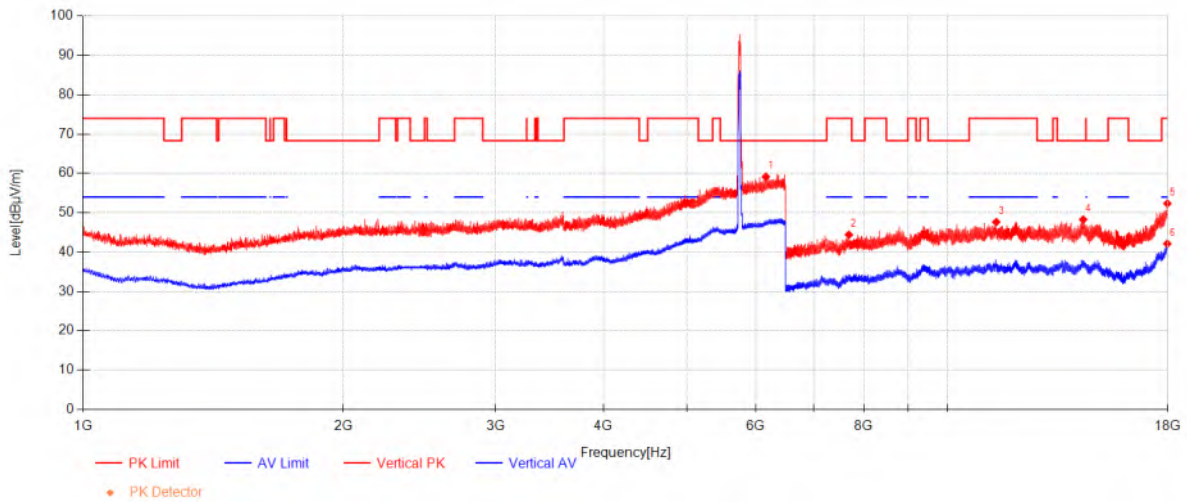

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6166.1923	41.93	33.43	-16.21	59.15	68.30	9.15	Vertical
2	7691.6875	53.16	36.36	-45.12	44.40	74.00	29.60	Vertical
3	11389.895	47.96	39.46	-39.78	47.64	74.00	26.36	Vertical
4	14362.645	46.74	40.26	-38.74	48.27	68.30	20.03	Vertical
5	17973.166	44.76	44.64	-37.06	52.34	74.00	21.66	Vertical
6	17967.416	34.59	44.60	-37.07	42.12	54.00	11.88	Vertical


11ac(VHT40)_TX_CH_159_Horizontal

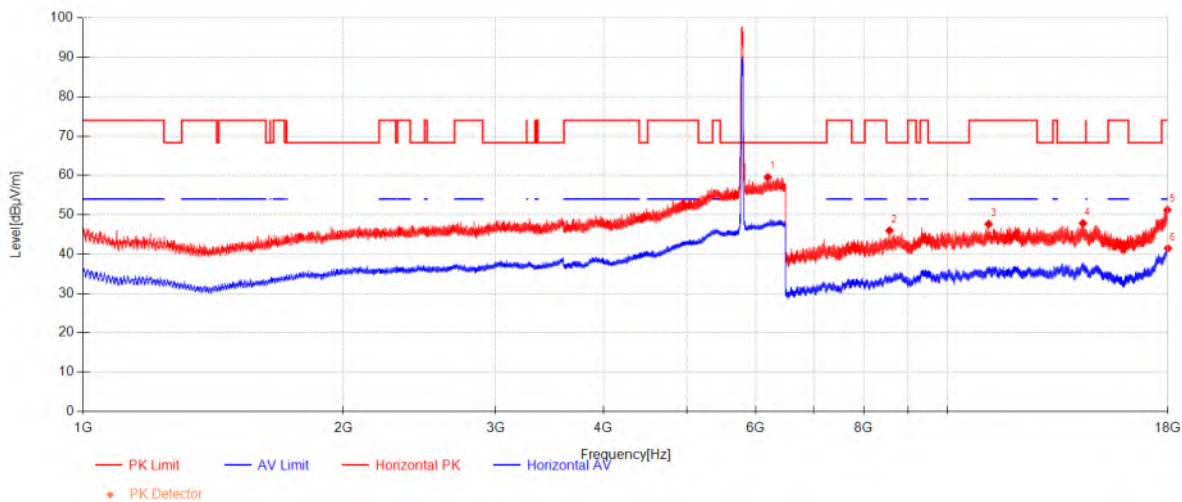

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6196.6538	42.07	33.55	-16.08	59.53	68.30	8.77	Horizontal
2	8571.4375	53.04	36.93	-44.00	45.97	68.30	22.33	Horizontal
3	11161.333	48.16	39.48	-40.01	47.63	74.00	26.37	Horizontal
4	14352.583	46.31	40.26	-38.74	47.83	68.30	20.47	Horizontal
5	17972.687	43.65	44.64	-37.06	51.23	74.00	22.77	Horizontal
6	17997.125	33.68	44.78	-36.99	41.47	54.00	12.53	Horizontal

11ac(VHT40)_TX_CH_159_Vertical

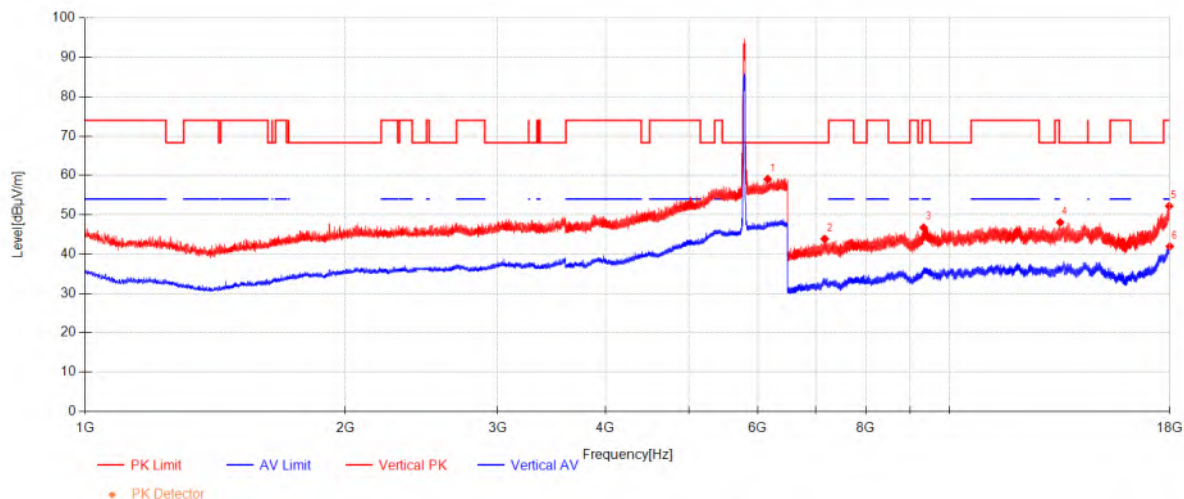


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6163.6538	41.85	33.42	-16.22	59.05	68.30	9.25	Vertical
2	7172.75	53.68	35.81	-45.63	43.86	68.30	24.44	Vertical
3	9336.6667	51.75	37.87	-42.89	46.73	74.00	27.27	Vertical
4	13433.541	47.61	39.45	-39.01	48.05	68.30	20.25	Vertical
5	17962.625	44.72	44.58	-37.08	52.21	74.00	21.79	Vertical
6	17990.416	34.21	44.74	-37.01	41.95	54.00	12.05	Vertical

11ac(VHT80)_TX_CH_42_Horizontal

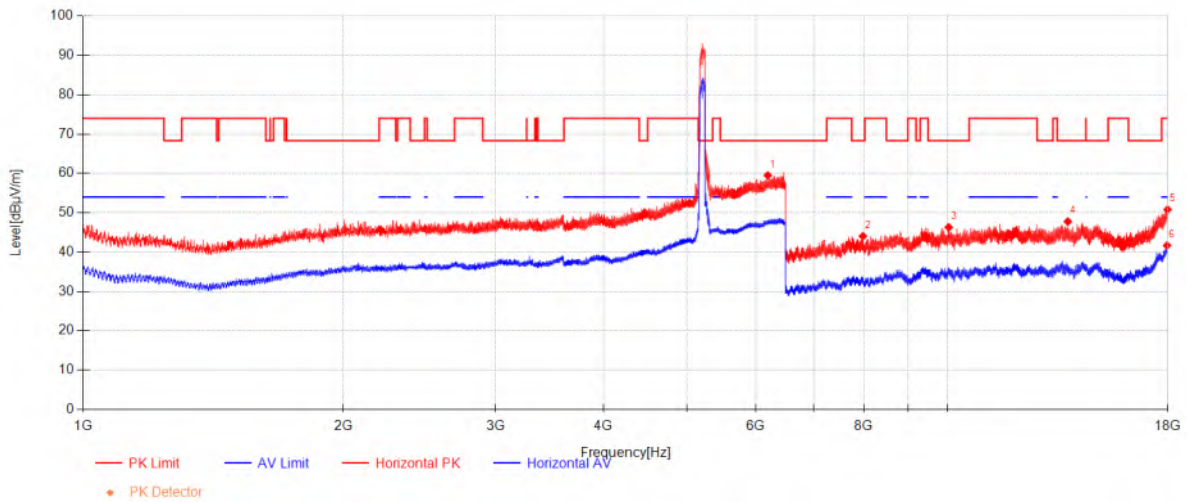

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6196.6538	42.03	33.55	-16.08	59.49	68.30	8.81	Horizontal
2	7984.4583	52.12	36.30	-44.38	44.04	68.30	24.26	Horizontal
3	10035.770	49.18	38.83	-41.70	46.30	68.30	22.00	Horizontal
4	13783.333	46.22	39.97	-38.42	47.77	68.30	20.53	Horizontal
5	17982.270	43.16	44.69	-37.03	50.82	74.00	23.18	Horizontal
6	17955.916	34.25	44.54	-37.10	41.68	54.00	12.32	Horizontal


11ac(VHT80)_TX_CH_42_Vertical

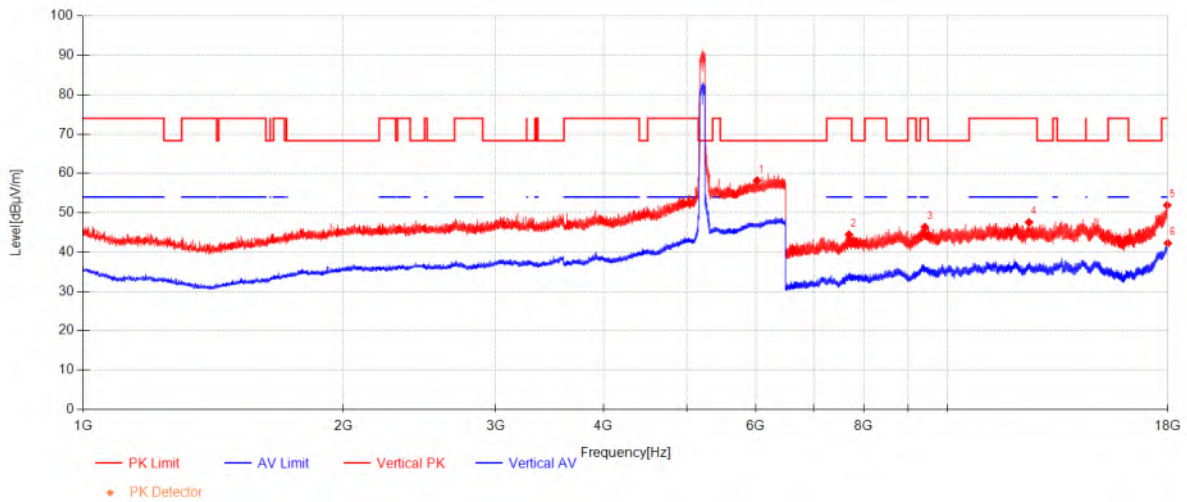

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6022.7692	41.36	32.89	-16.07	58.18	68.30	10.12	Vertical
2	7693.125	53.22	36.36	-45.12	44.46	74.00	29.54	Vertical
3	9417.6458	51.15	37.98	-42.78	46.35	74.00	27.65	Vertical
4	12430.166	46.90	39.14	-38.46	47.58	74.00	26.42	Vertical
5	17965.020	44.41	44.59	-37.08	51.92	74.00	22.08	Vertical
6	17991.375	34.52	44.75	-37.00	42.26	54.00	11.74	Vertical

11ac(VHT80)_TX_CH_58_Horizontal

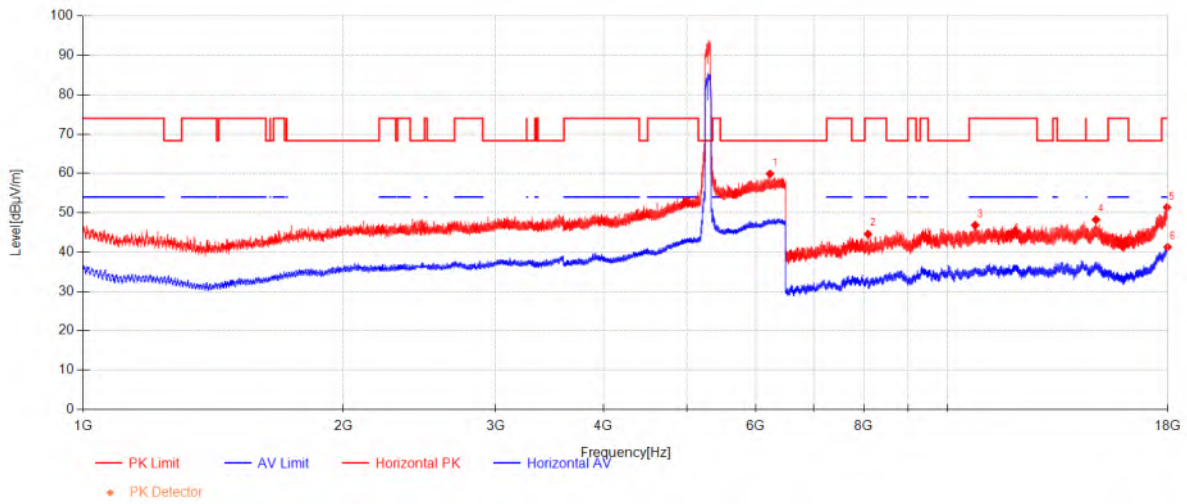


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6233.4615	42.33	33.69	-16.12	59.89	68.30	8.41	Horizontal
2	8094.1875	52.58	36.40	-44.42	44.56	74.00	29.44	Horizontal
3	10767.937	48.07	39.34	-40.57	46.84	74.00	27.16	Horizontal
4	14857.625	46.05	40.21	-38.04	48.23	68.30	20.07	Horizontal
5	17953.041	43.96	44.52	-37.11	51.37	74.00	22.63	Horizontal
6	17986.583	33.58	44.72	-37.02	41.28	54.00	12.72	Horizontal

11ac(VHT80)_TX_CH_58_Vertical

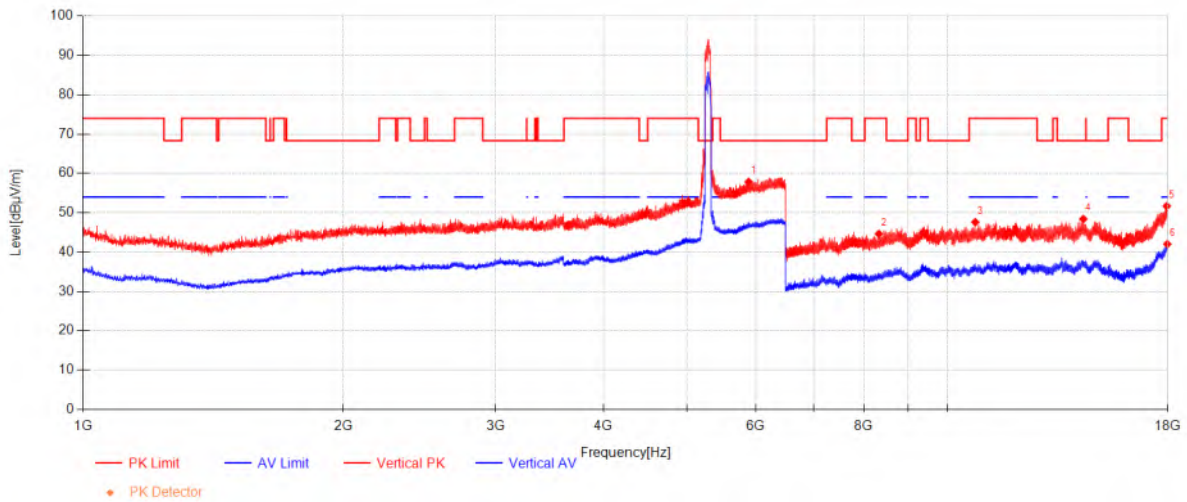


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5889.5	41.15	32.76	-16.07	57.84	68.30	10.46	Vertical
2	8330.8958	52.46	36.66	-44.50	44.63	74.00	29.37	Vertical
3	10771.291	48.82	39.34	-40.55	47.61	74.00	26.39	Vertical
4	14366.479	46.87	40.26	-38.73	48.40	68.30	19.90	Vertical
5	17943.458	44.37	44.46	-37.14	51.69	74.00	22.31	Vertical
6	17968.375	34.49	44.61	-37.07	42.03	54.00	11.97	Vertical

11ac(VHT80)_TX_CH_106_Horizontal

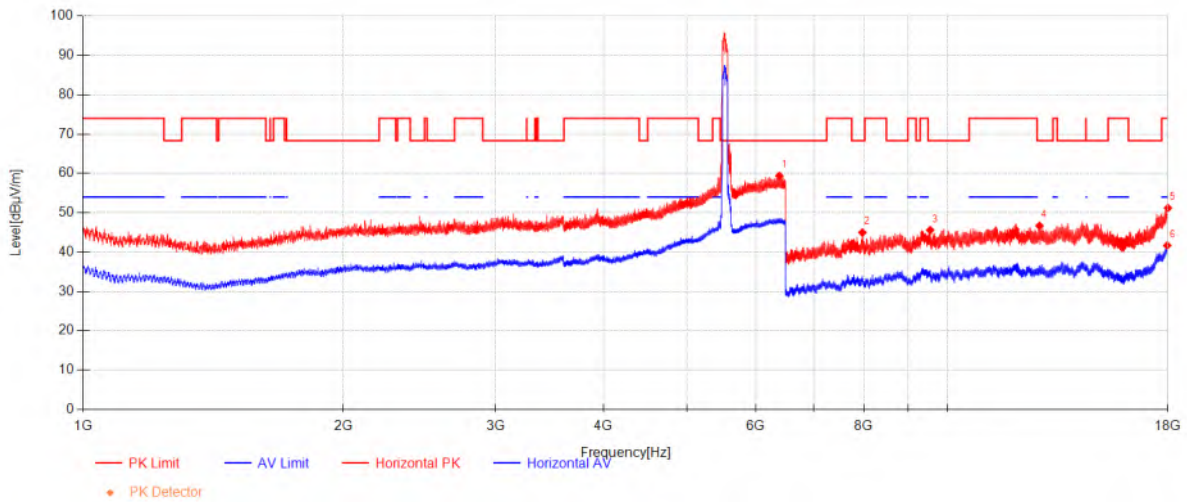


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6390.8462	41.25	34.29	-16.16	59.38	68.30	8.92	Horizontal
2	7973.9167	53.12	36.31	-44.45	44.97	68.30	23.33	Horizontal
3	9552.2917	49.58	38.17	-42.17	45.58	68.30	22.72	Horizontal
4	12782.833	46.99	38.93	-39.23	46.69	68.30	21.61	Horizontal
5	18000	43.39	44.80	-36.98	51.21	74.00	22.79	Horizontal
6	17965.979	34.16	44.60	-37.08	41.68	54.00	12.32	Horizontal

11ac(VHT80)_TX_CH_106_Vertical

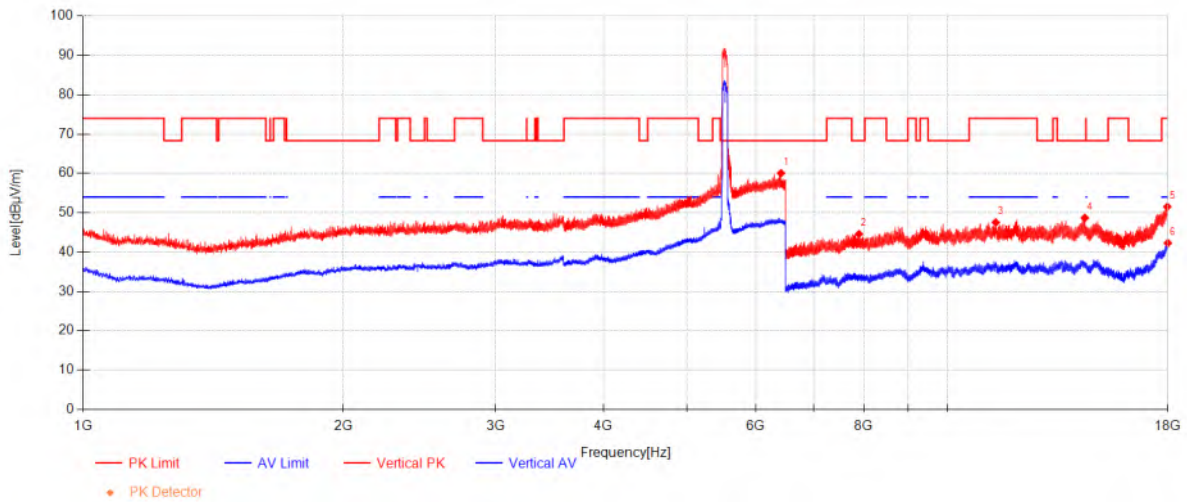


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6419.6154	41.94	34.39	-16.28	60.06	68.30	8.24	Vertical
2	7901.5625	53.22	36.32	-44.96	44.58	68.30	23.72	Vertical
3	11375.520	47.96	39.46	-39.89	47.53	74.00	26.47	Vertical
4	14422.062	47.06	40.26	-38.63	48.69	68.30	19.61	Vertical
5	17969.812	43.98	44.62	-37.06	51.53	74.00	22.47	Vertical
6	17996.645	34.51	44.78	-36.99	42.30	54.00	11.70	Vertical

11ac(VHT80)_TX_CH_122_Horizontal

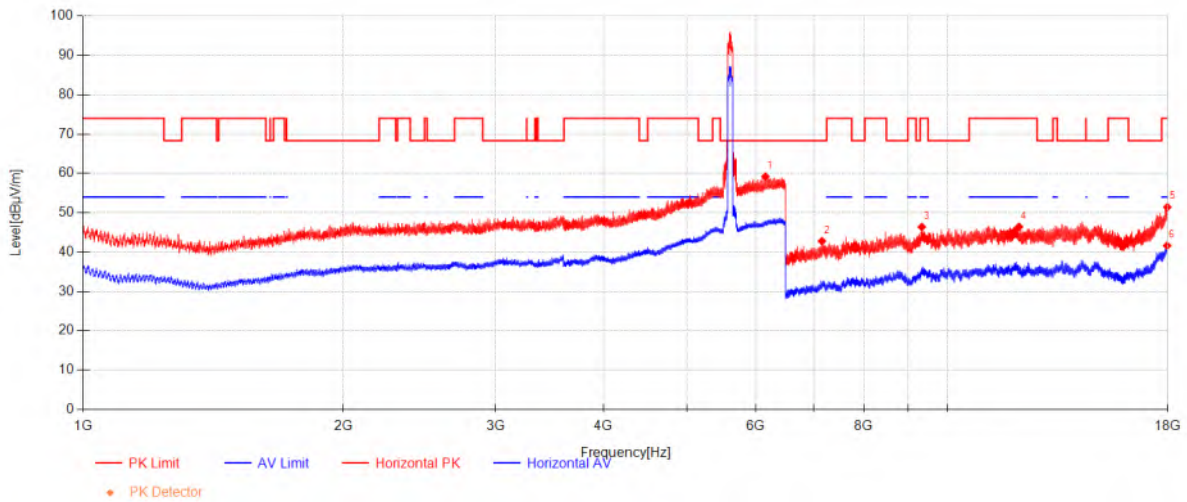


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6157.3077	42.04	33.40	-16.25	59.19	68.30	9.11	Horizontal
2	7159.8125	52.72	35.79	-45.72	42.79	68.30	25.51	Horizontal
3	9341.9375	51.40	37.88	-42.89	46.39	74.00	27.61	Horizontal
4	12103.375	46.51	39.34	-39.41	46.44	74.00	27.56	Horizontal
5	17970.770	43.88	44.62	-37.06	51.44	74.00	22.56	Horizontal
6	17959.75	34.16	44.56	-37.09	41.63	54.00	12.37	Horizontal

11ac(VHT80)_TX_CH_122_Vertical

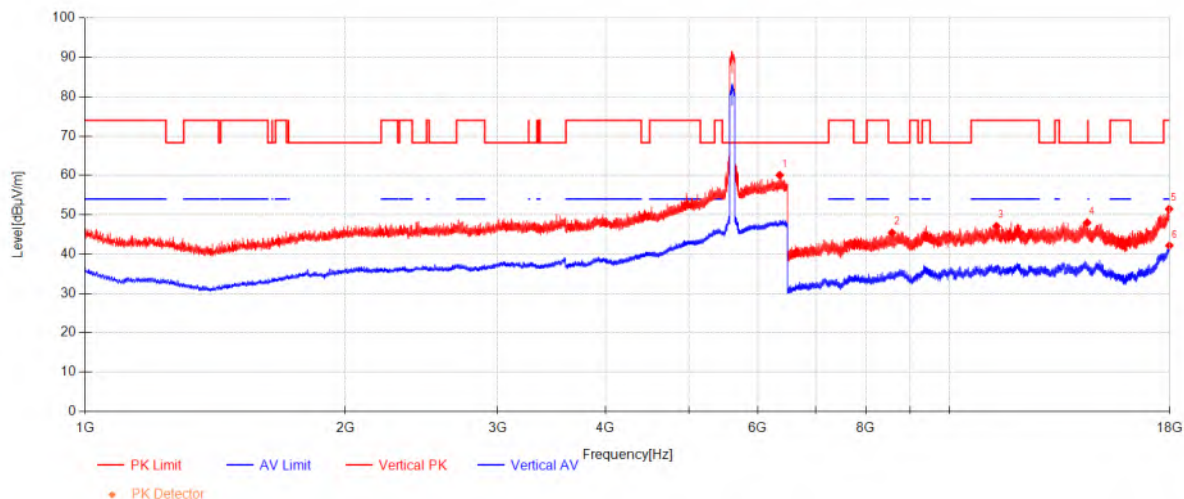


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6362.9231	42.06	34.18	-16.18	60.06	68.30	8.24	Vertical
2	8581.9792	52.52	36.94	-44.05	45.41	68.30	22.89	Vertical
3	11336.229	47.83	39.47	-40.18	47.11	74.00	26.89	Vertical
4	14435.479	46.31	40.26	-38.58	47.99	68.30	20.31	Vertical
5	17961.187	43.98	44.57	-37.09	51.46	74.00	22.54	Vertical
6	17972.687	34.59	44.64	-37.06	42.17	54.00	11.83	Vertical

11ac(VHT80)_TX_CH_155_Horizontal

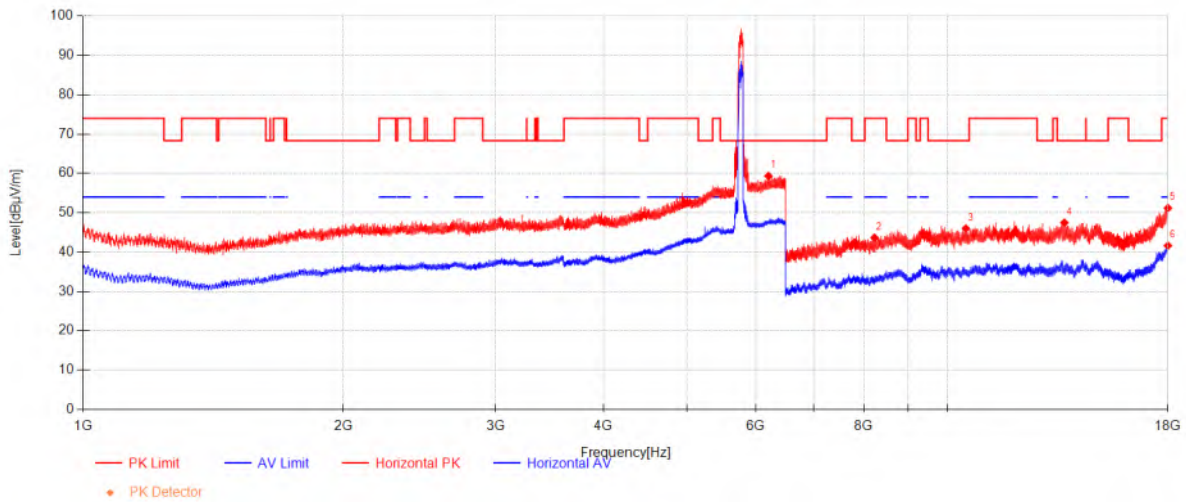

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6207.6538	41.83	33.59	-16.08	59.34	68.30	8.96	Horizontal
2	8233.625	51.43	36.56	-44.33	43.65	74.00	30.35	Horizontal
3	10506.312	47.44	39.15	-40.61	45.99	68.30	22.31	Horizontal
4	13658.75	45.76	39.79	-38.09	47.46	68.30	20.84	Horizontal
5	17998.083	43.40	44.79	-36.99	51.20	74.00	22.80	Horizontal
6	17997.125	33.86	44.78	-36.99	41.65	54.00	12.35	Horizontal

11ac(VHT80)_TX_CH_155_Vertical

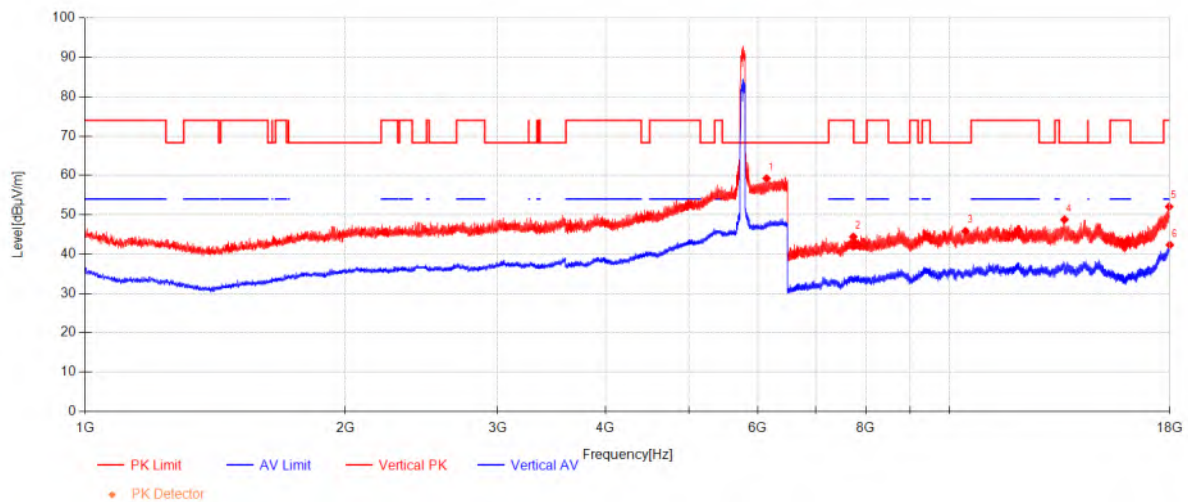

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6144.6154	42.17	33.35	-16.30	59.22	68.30	9.08	Vertical
2	7741.0417	53.09	36.35	-45.04	44.40	74.00	29.60	Vertical
3	10436.354	47.73	39.11	-41.00	45.83	68.30	22.47	Vertical
4	13590.229	47.45	39.69	-38.35	48.79	68.30	19.51	Vertical
5	17963.104	44.55	44.58	-37.08	52.05	74.00	21.95	Vertical
6	17996.166	34.54	44.78	-36.99	42.33	54.00	11.67	Vertical

7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 12.7.2

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (4) For transmitters operating in the 5.725-5.85 GHz band:
 (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

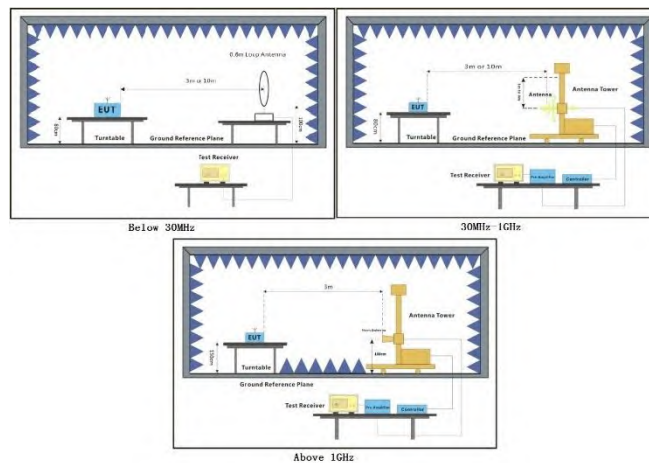

7.4.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_36_Horizontal_Peak

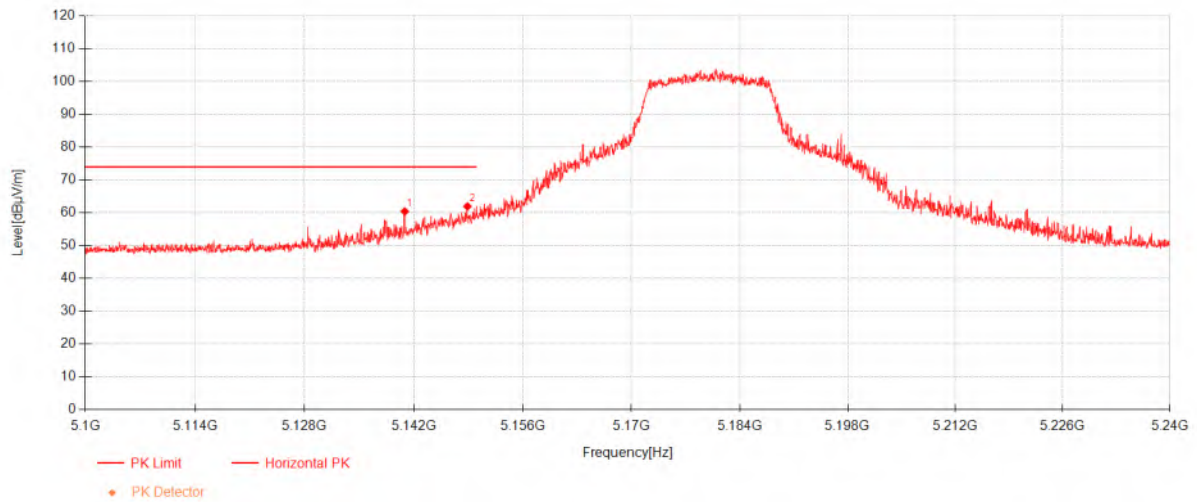


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.845	49.08	31.59	-20.25	60.42	74.00	13.58	Horizontal
2	5148.895	50.54	31.62	-20.23	61.93	74.00	12.07	Horizontal

11a_TX_CH_36_Horizontal_Average

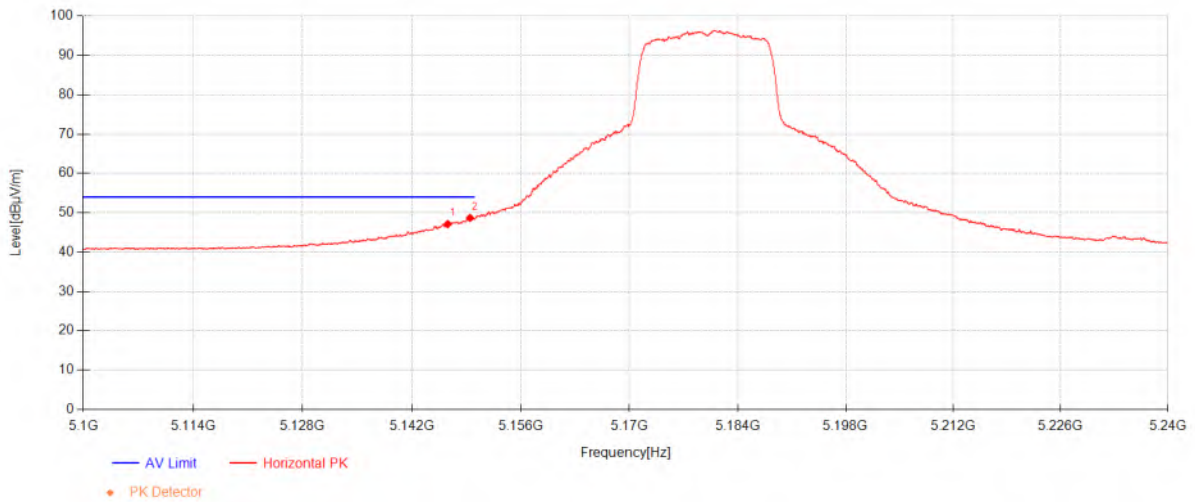


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.62	33.27	31.61	-17.76	47.12	54.00	6.88	Horizontal
2	5149.49	34.82	31.62	-17.76	48.68	54.00	5.32	Horizontal

11a_TX_CH_36_Vertical_Peak

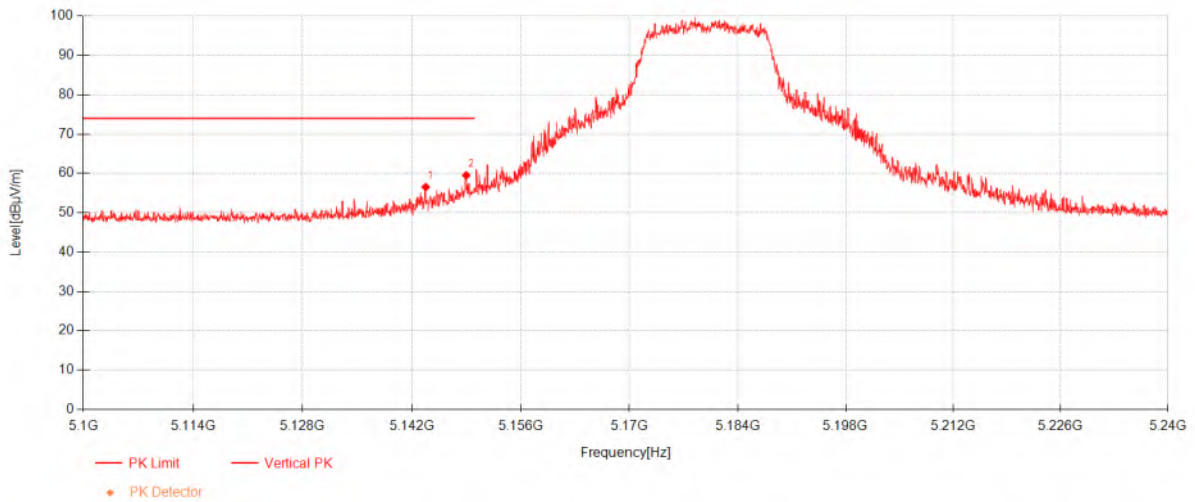


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.785	45.17	31.60	-20.24	56.53	74.00	17.47	Vertical
2	5149	48.12	31.62	-20.23	59.51	74.00	14.49	Vertical

11a_TX_CH_36_Vertical_Average

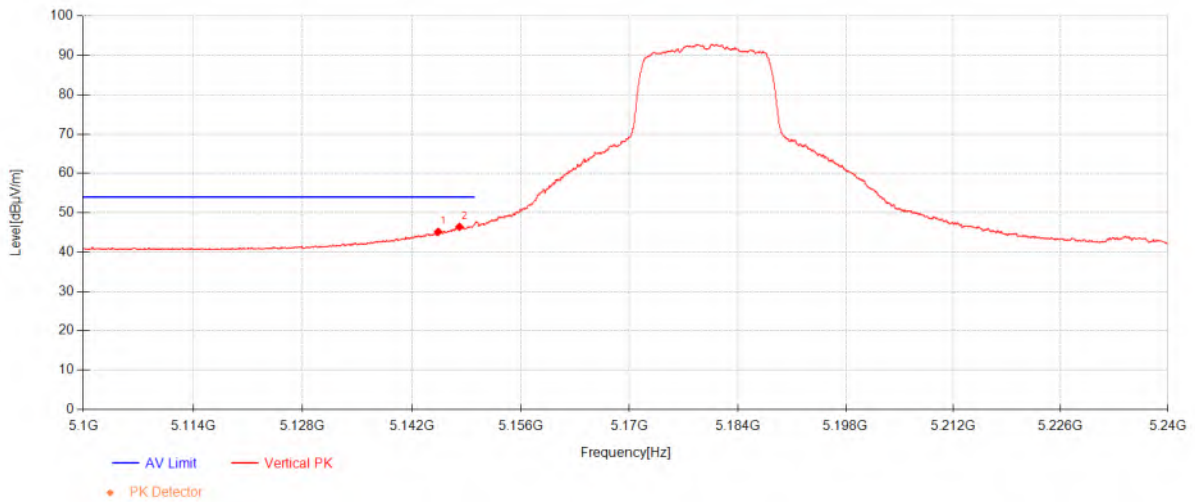


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.395	31.32	31.61	-17.76	45.16	54.00	8.84	Vertical
2	5148.125	32.57	31.61	-17.76	46.43	54.00	7.57	Vertical

11a_TX_CH_64_Horizontal_Peak

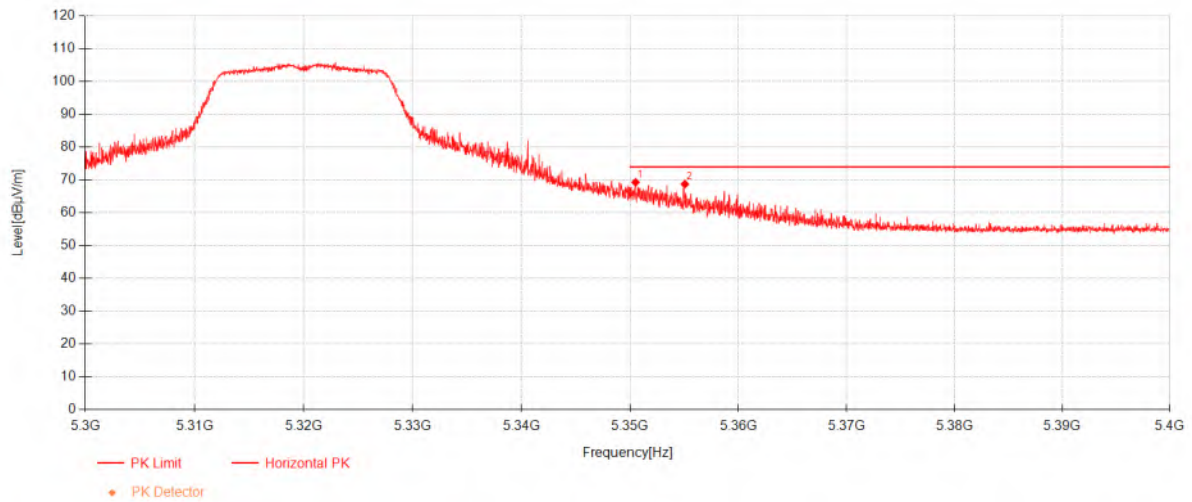


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.5	54.04	32.18	-16.93	69.29	74.00	4.71	Horizontal
2	5355.05	53.43	32.19	-16.90	68.72	74.00	5.28	Horizontal

11a_TX_CH_64_Horizontal_Average

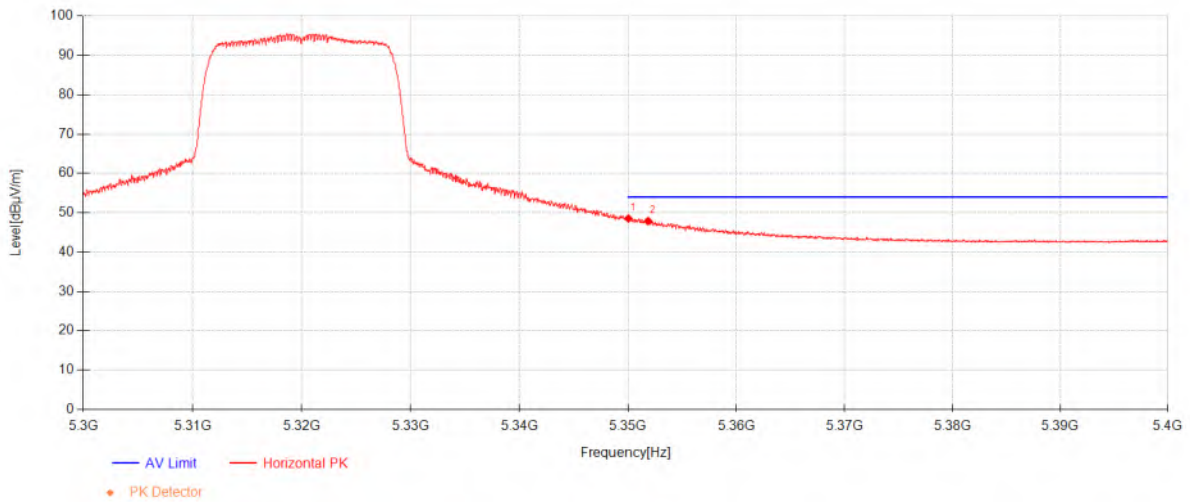


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.025	33.30	32.18	-16.93	48.55	54.00	5.45	Horizontal
2	5351.85	32.65	32.19	-16.92	47.91	54.00	6.09	Horizontal

11a_TX_CH_64_Vertical_Peak

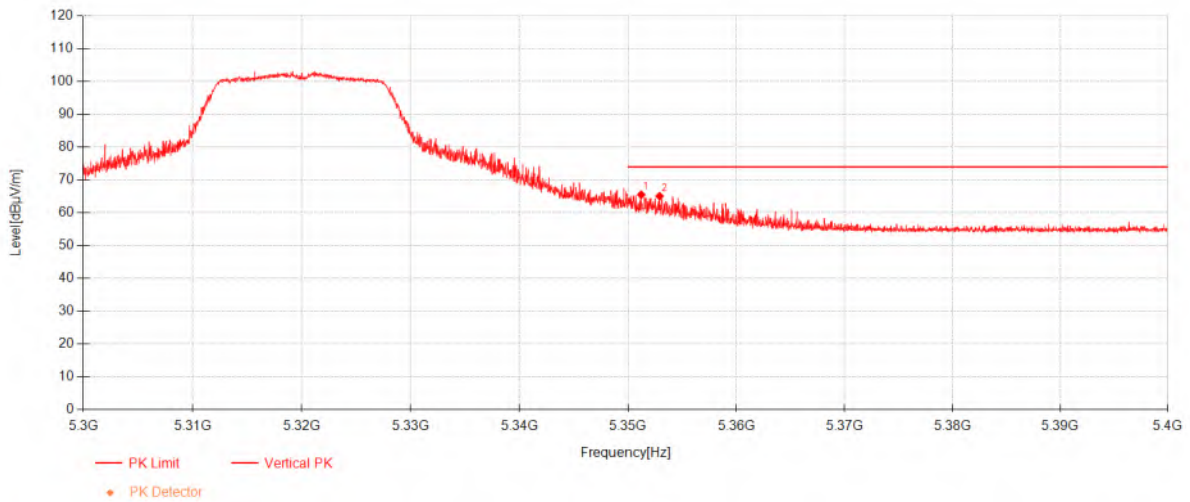


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.2	50.25	32.18	-16.92	65.51	74.00	8.49	Vertical
2	5352.9	49.80	32.19	-16.92	65.07	74.00	8.93	Vertical

11a_TX_CH_64_Vertical_Average

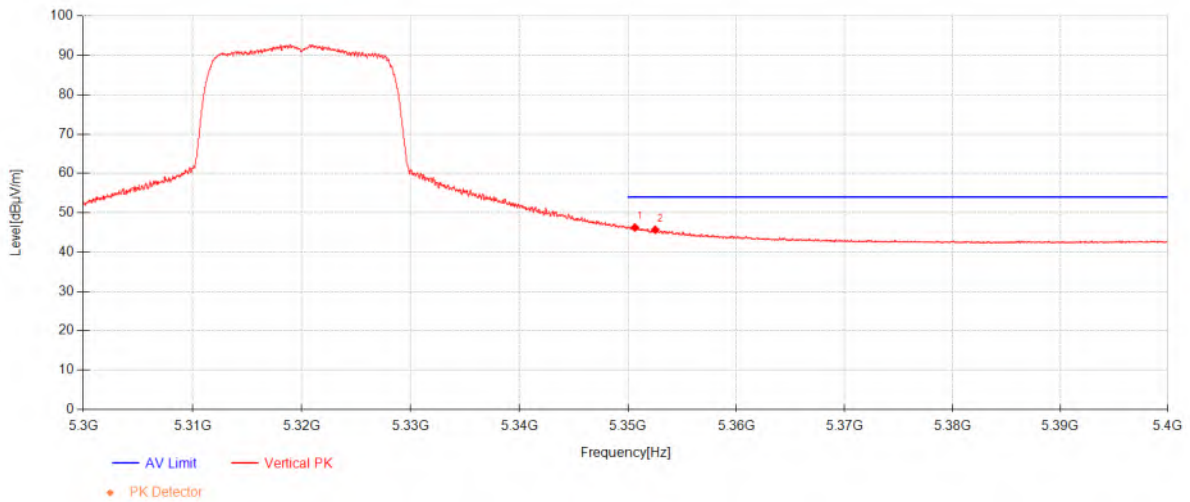


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.625	31.00	32.18	-16.93	46.25	54.00	7.75	Vertical
2	5352.5	30.40	32.19	-16.92	45.67	54.00	8.33	Vertical

11a_TX_CH_100_Horizontal_Peak

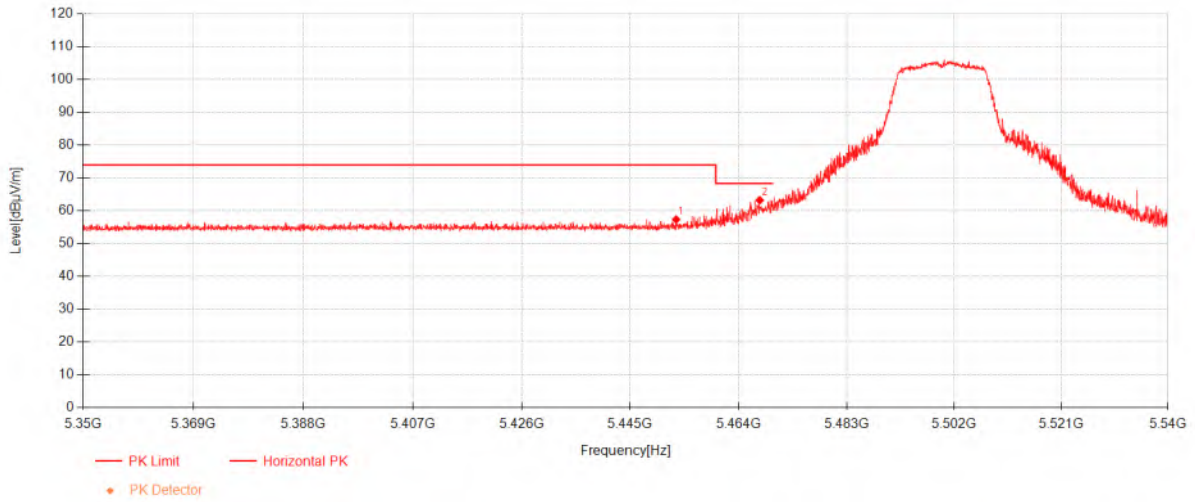


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.0275	41.84	32.47	-16.97	57.34	74.00	16.66	Horizontal
2	5467.705	47.75	32.51	-17.05	63.21	68.30	5.09	Horizontal

11a_TX_CH_100_Horizontal_Average

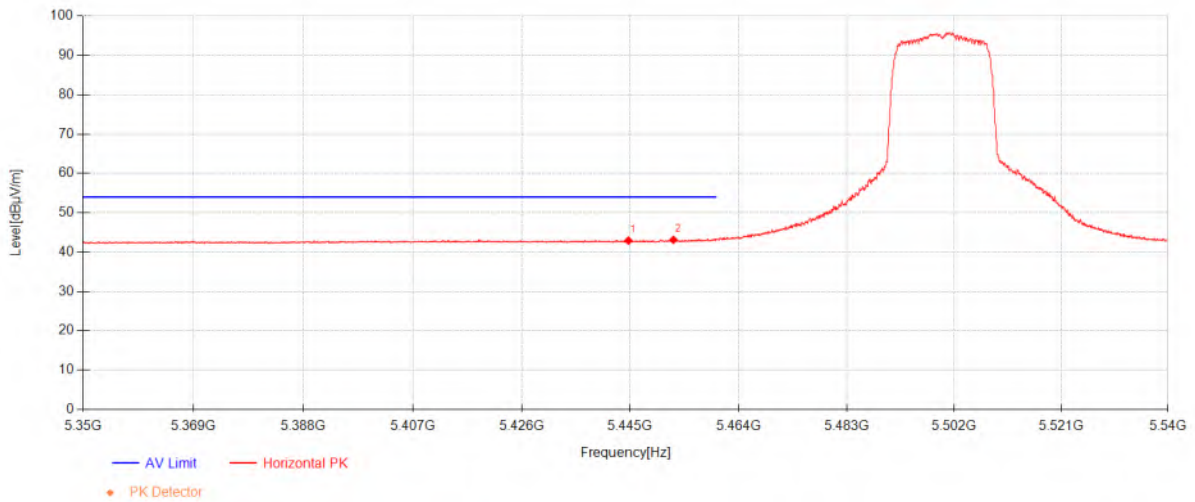


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.6675	27.40	32.45	-16.92	42.92	54.00	11.08	Horizontal
2	5452.5525	27.62	32.47	-16.96	43.12	54.00	10.88	Horizontal

11a_TX_CH_100_Vertical_Peak

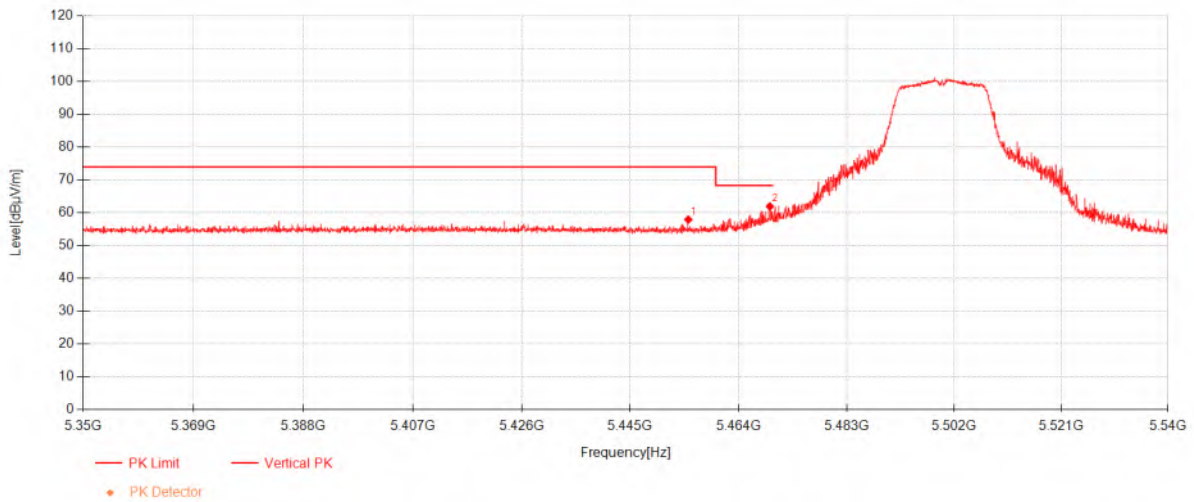

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5455.165	42.41	32.47	-16.98	57.91	74.00	16.09	Vertical
2	5469.51	46.48	32.51	-17.06	61.94	68.30	6.36	Vertical


11a_TX_CH_100_Veritical_Average

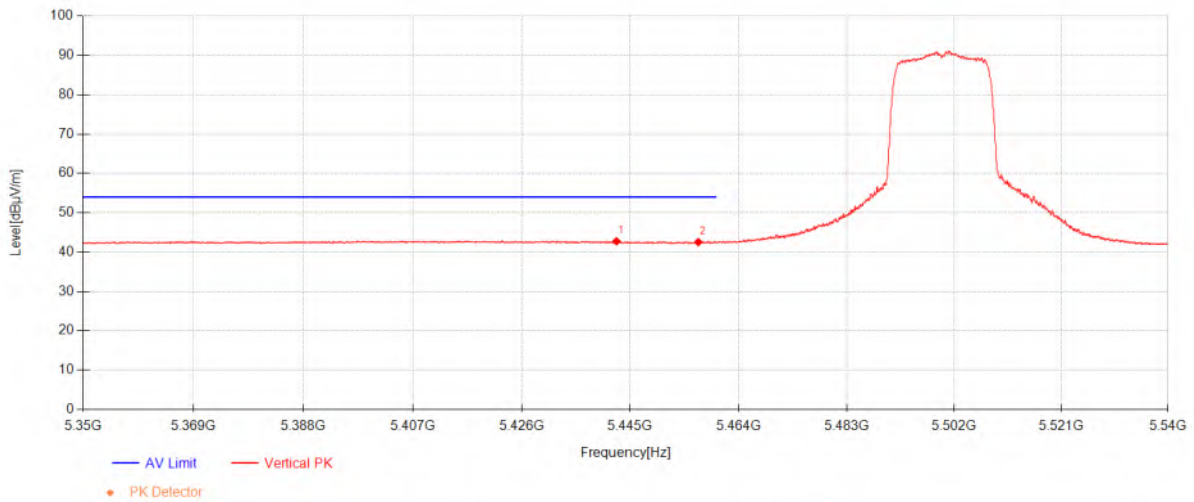

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.5775	27.23	32.44	-16.91	42.76	54.00	11.24	Vertical
2	5456.9225	27.05	32.48	-16.99	42.54	54.00	11.46	Vertical

11a_TX_CH_140_Horizontal_Peak

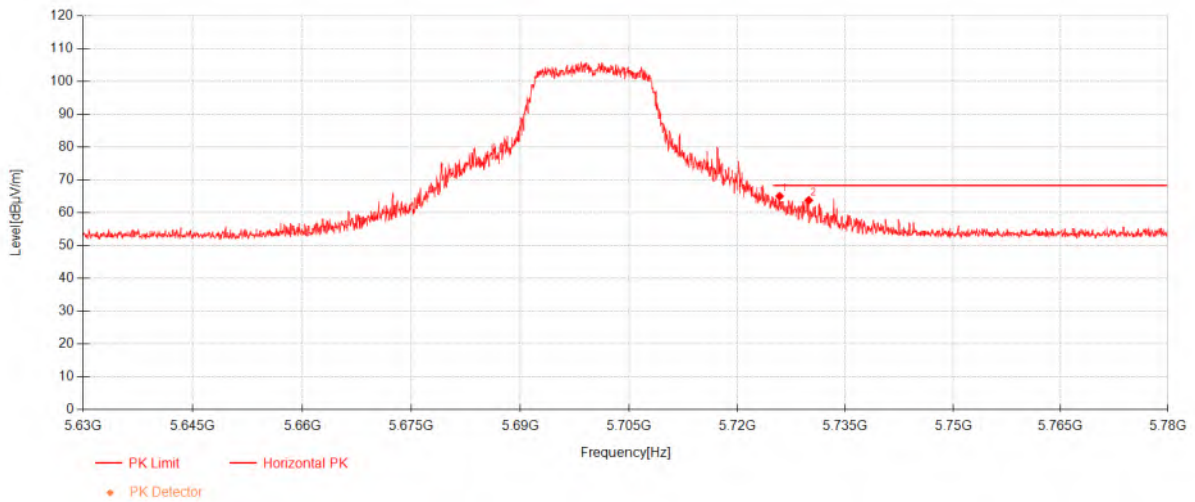

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.85	49.24	32.69	-16.86	65.07	68.30	3.23	Horizontal
2	5729.9	47.97	32.69	-16.84	63.82	68.30	4.48	Horizontal

11a_TX_CH_140_Vertical_Peak

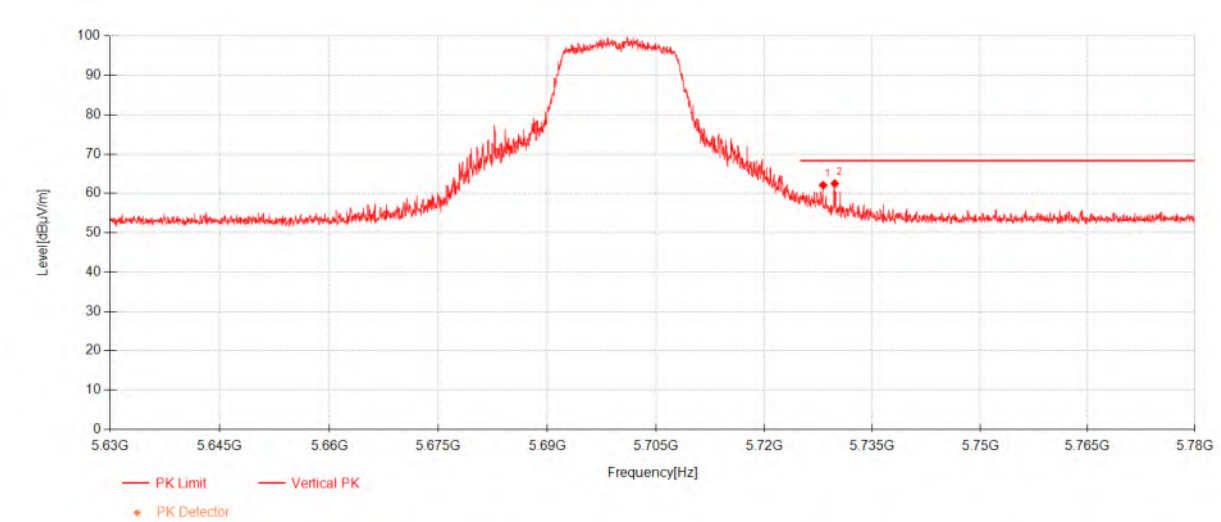

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5728.1375	46.27	32.69	-16.85	62.11	68.30	6.19	Vertical
2	5729.75	46.66	32.69	-16.84	62.51	68.30	5.79	Vertical