

Date: 2026/1/18

01_LTE Band 2_20M_QPSK_3RB_3Offset_Back_5mm_Ch18900

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.9, 7.58, 7.57); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.134 W/kg; SAR (10g) = 0.068 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.162 W/kg; SAR (10g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

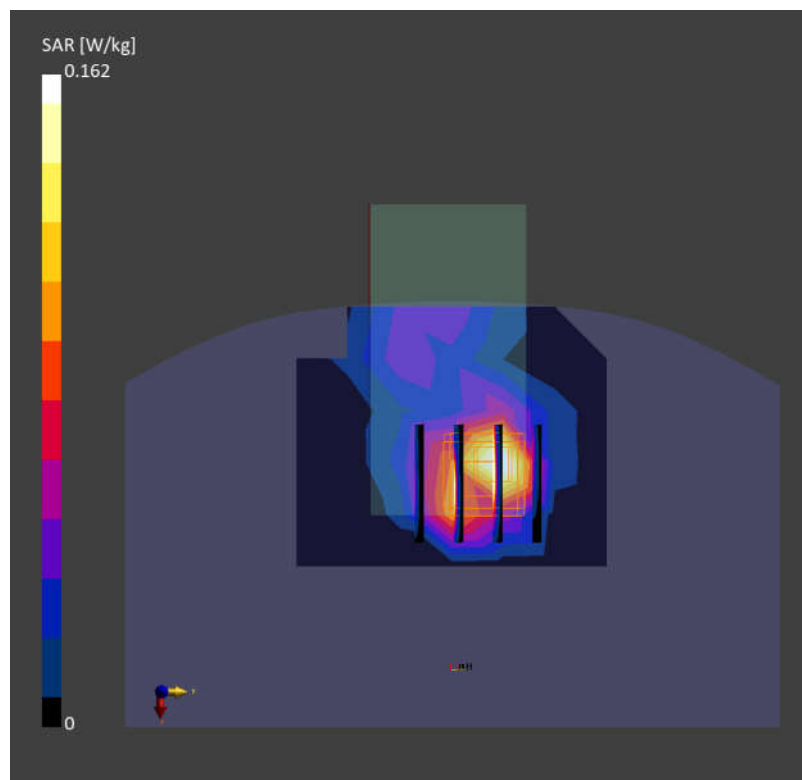

Date: 2026/1/16

02_LTE Band 4_20M_QPSK_3RB_0Offset_Back_5mm_Ch20050

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(8.14, 7.82, 7.81); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.230 W/kg; SAR (10g) = 0.109 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.221 W/kg; SAR (10g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

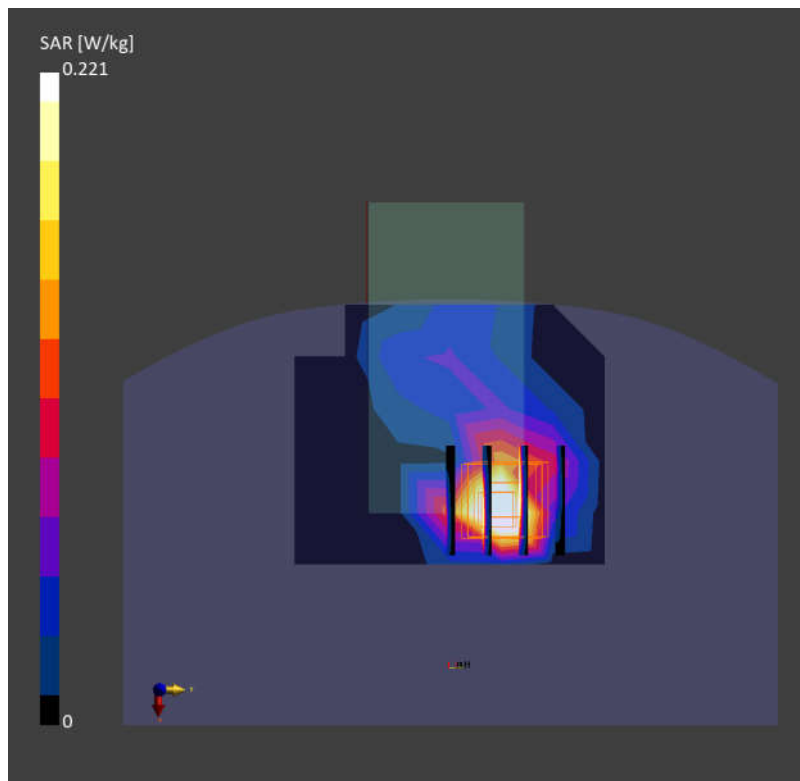

Date: 2026/1/14

03_LTE Band 12_10M_QPSK_3RB_3Offset_Back_5mm_Ch23060

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 704.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 704.000$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(9.71, 9.32, 9.31); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.180 W/kg; SAR (10g) = 0.122 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.7 %

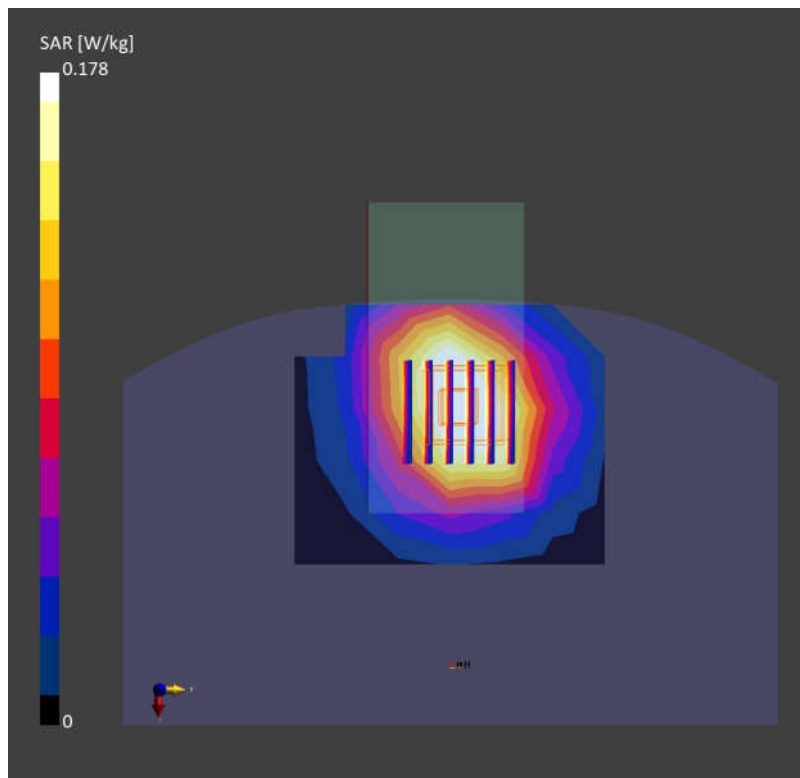

Date: 2026/1/20

04_Band 23_3.75KHz_BPSK_1RB_0Offset_Back_5mm_Ch25600

Communication System: LTE; Frequency: 2010.000 MHz; DutyCycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2010.000$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.75, 7.46, 7.45); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10662-AAB

Area Scan (120.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.062 W/kg; SAR (10g) = 0.031 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.060 W/kg; SAR (10g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.2 %

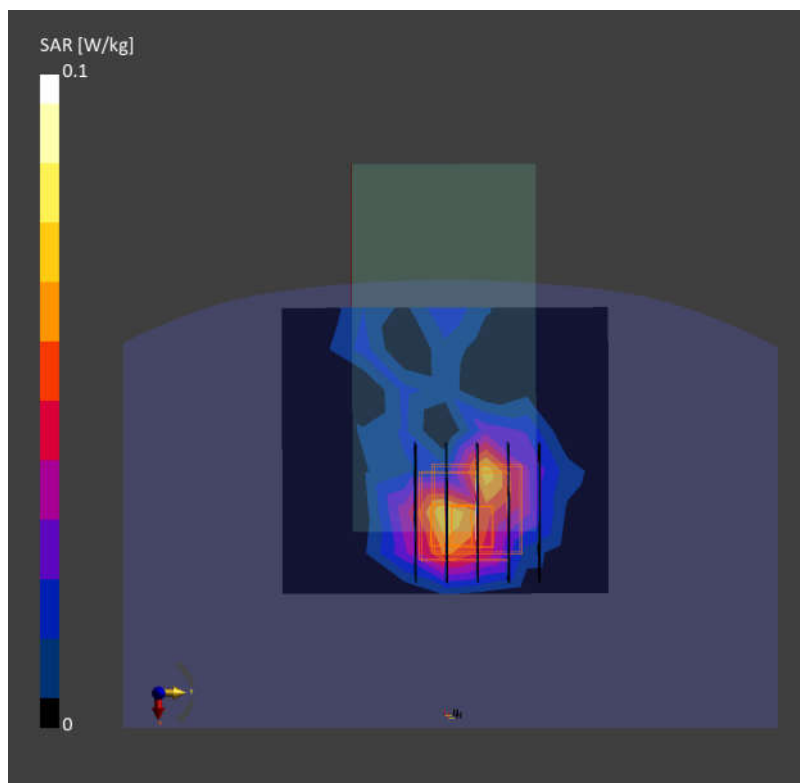

Date: 2026/1/29

05_Band 255_3.75KHz_BPSK_1RB_0Offset_Back_5mm_Ch261674

Communication System: LTE; Frequency: 1643.000 MHz; DutyCycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1643.000$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.45, 8.29, 8.33); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10662-AAB

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.140 W/kg; SAR (10g) = 0.070 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.04 dB

SAR (1g) = 0.154 W/kg; SAR (10g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 3.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

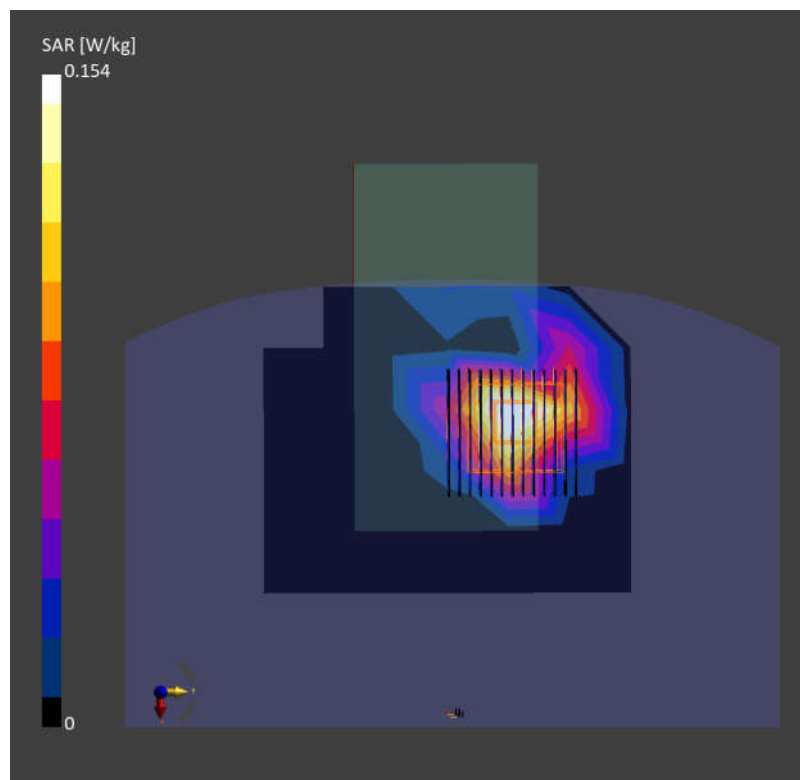

Date: 2026/1/18

07_LTE Band 2_20M_QPSK_3RB_3Offset_Back_0mm_Ch18900

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.9, 7.58, 7.57); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.559 W/kg; SAR (10g) = 0.248 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

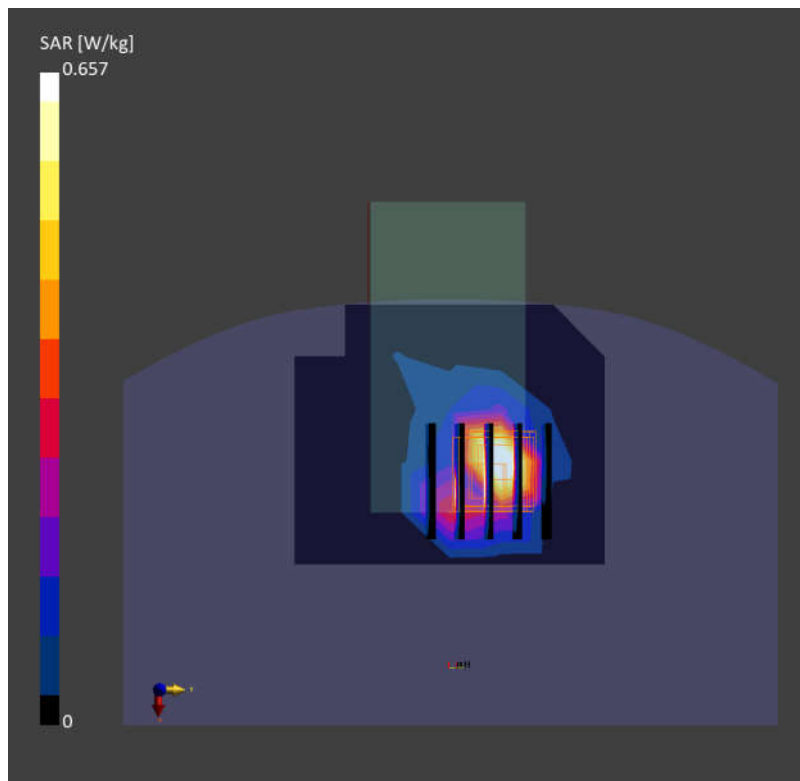

Date: 2026/1/16

08_LTE Band 4_20M_QPSK_3RB_0Offset_Back_0mm_Ch20050

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(8.14, 7.82, 7.81); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.491 W/kg; SAR (10g) = 0.225 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

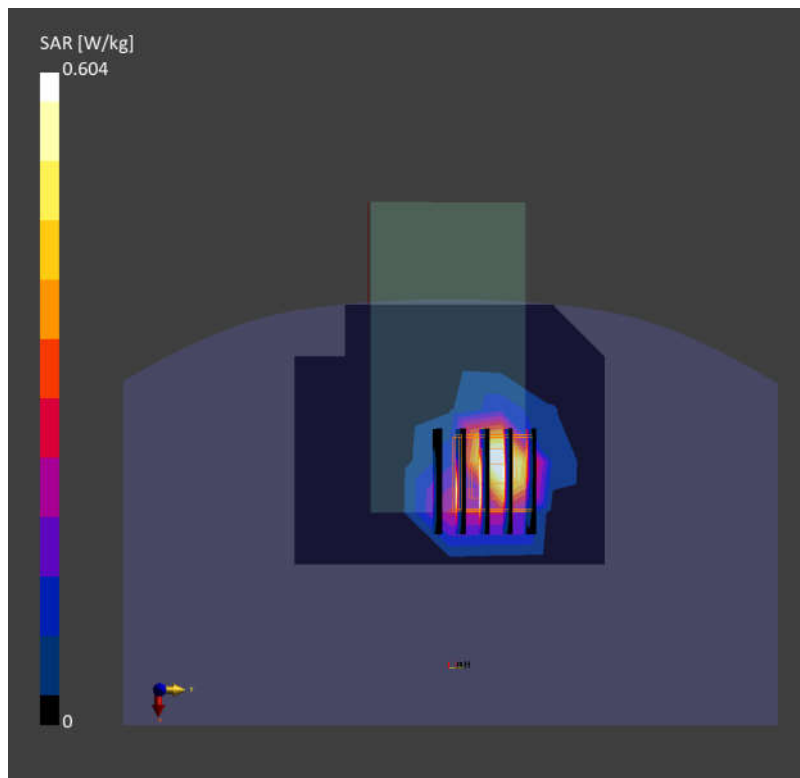

Date: 2026/1/14

09_LTE Band 12_10M_QPSK_3RB_3Offset_Back_0mm_Ch23060

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 704.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 704.000$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(9.71, 9.32, 9.31); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.350 W/kg; SAR (10g) = 0.225 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.312 W/kg; SAR (10g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

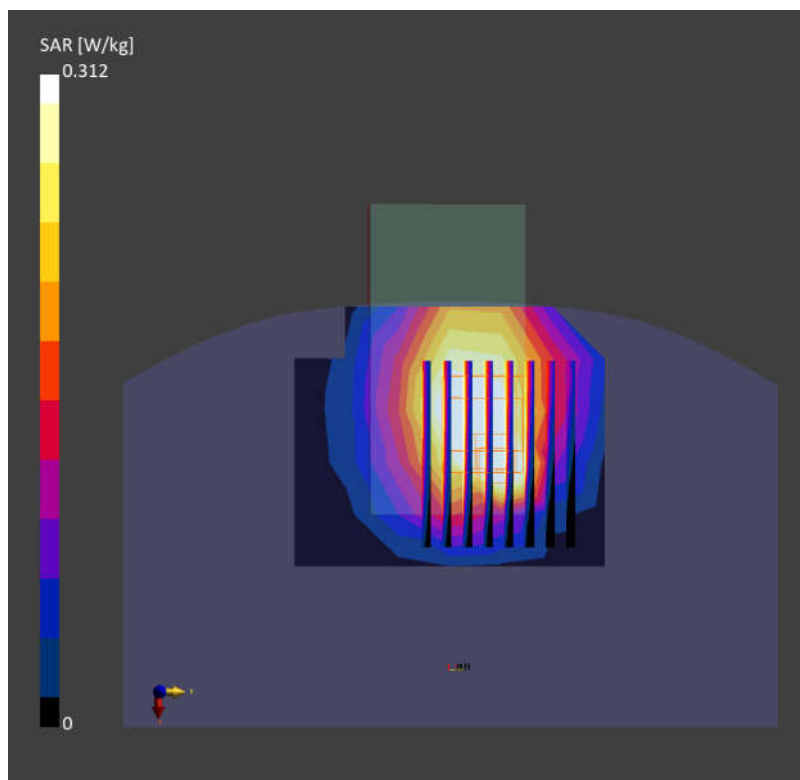

Date: 2026/1/20

10_Band 23_3.75KHz_BPSK_1RB_0Offset_Back_0mm_Ch25600

Communication System: LTE; Frequency: 2010.000 MHz; DutyCycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2010.000$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.75, 7.46, 7.45); Calibrated: 2025/7/21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10662-AAB

Area Scan (120.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.196 W/kg; SAR (10g) = 0.092 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.162 W/kg; SAR (10g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 35.1 %

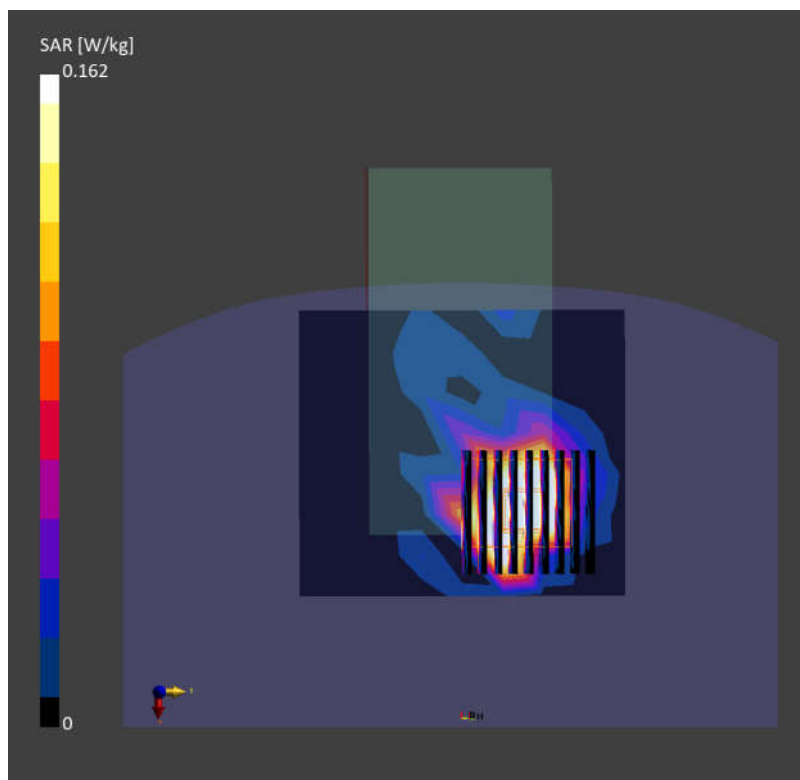

Date: 2026/1/29

11_Band 255_3.75KHz_BPSK_1RB_0Offset_Back_0mm_Ch261674

Communication System: LTE; Frequency: 1643.000 MHz; DutyCycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1643.000$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.45, 8.29, 8.33); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10662-AAB

Area Scan (120.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.228 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 1.5 mm x 1.5 mm x 1.2 mm

Power Drift = -0.07 dB

SAR (1g) = 0.181 W/kg; SAR (10g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 2.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

