

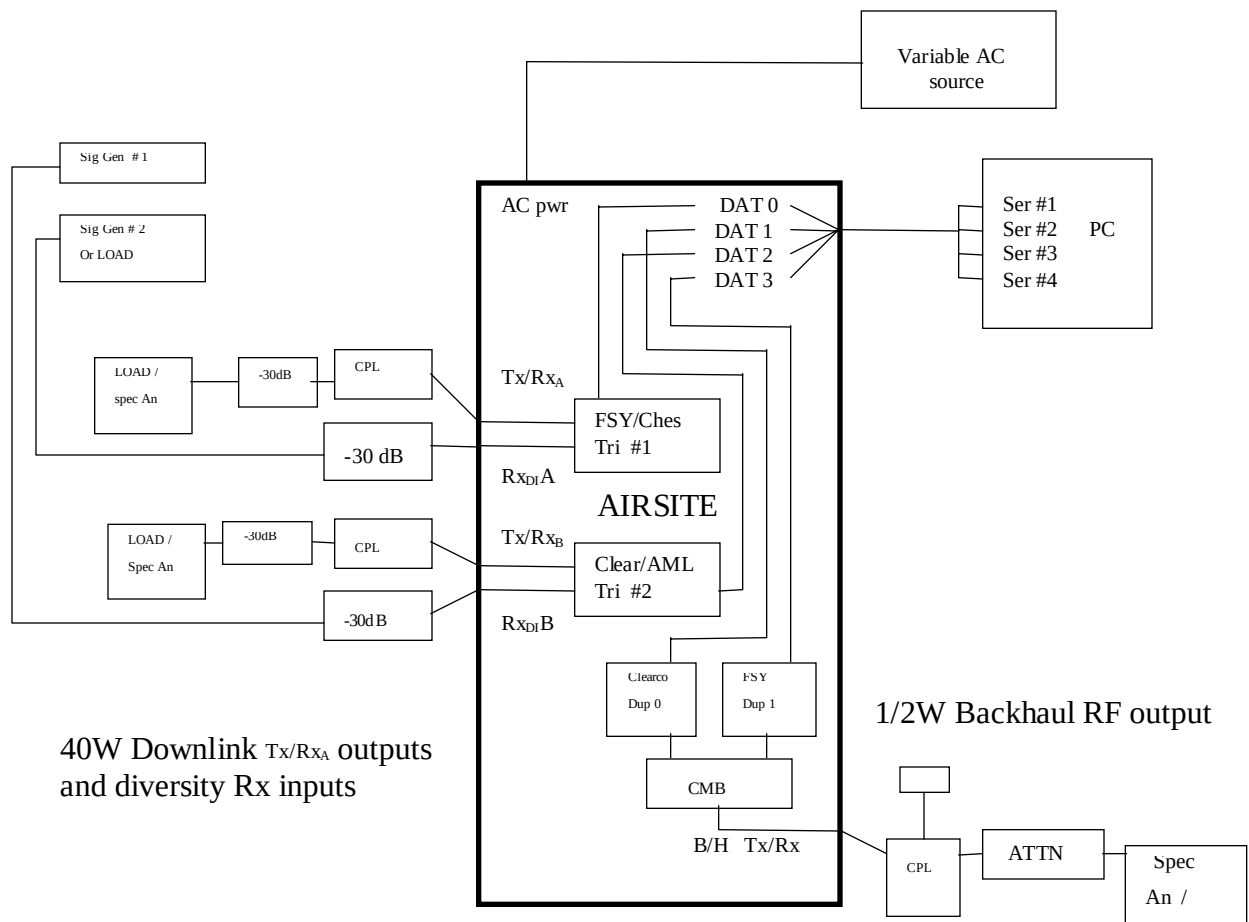


Figure 14A - (AdaptaSite) 1B Test Configuration
Intermodulation Distortion Setup

The EUT was tested with two CW and GMSK signals provided at the ground/mobile Uplink ant inputs. The B/H frequencies at the combiner were set to the edge of the PCS B-Block and intermod products were measured for leakage into adjacent blocks. (Note: in the backhaul-to-ground transmit path, carriers **are not** combined and thus no IMD products are produced).

