2.4G Camera

Quick User Guide

Family use Stores use Indoor use

For more information, please visit our online website

http://www.cam158.com

Quick start guide

1. Download and install the application

A. Make sure your mobile device is properly connected to the network.

B. Search and download "BlueCam" in Google Play or the App Store.

Android iOS

2.Check the wireless network environment

Enable the router's DHCP functionality and ensure that it works under 2.4ghz.(5GHz is not supported by Device)

Make sure your smartphone is connected to your router.

3. Connect device

Method 1: wireless connection (the connection method is suitable for YT series, KP series, QJ series, WJ series, ML series models)

A. Power On the IP camera, the device will start from the voice prompt, "welcome to use, please connect the network".(if you don't hear the voice prompt, press the reset button to restart the device)

B. Add devices (for Android phones)

Step 1: start the application and click "+" (figure 1);

Step 2: click "wireless configuration" (figure 2);

Step 3: click "already heard the voice prompt" (figure 3);

Step 4: enter the wireless password and then click "connect WIFI" (figure 4);

Step 5: click "start" and wait for 30S.(figure 5);

Step 6: On the code completion interface, find the device to add and click the add button (figure 6).

Step 7: Find the device already added on the device list page, and the device is displayed online (figure 7);

Step 8: click the play button, the security tips will pop up, and click ok to enter into the user settings page (figure 8).

Step 9: modify the user name and password on the user-device page, click finish button to start the real-time view (figure 9).

Note: A powerful username and password is strongly recommended by us to protect your privacy.

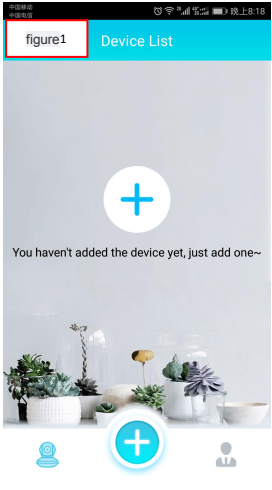

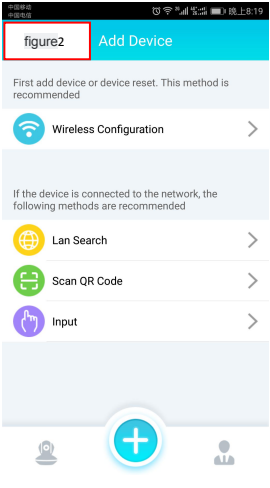

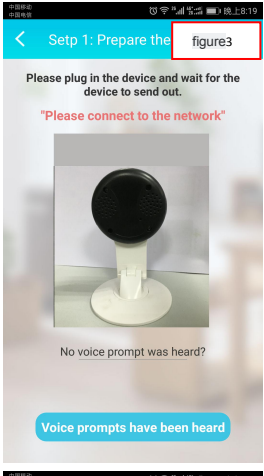
figure3
Setp 1: Prepare the
Please plug in the device and wait for the device to send out.
"Please connect to the network"
No voice prompt was heard?
Voice prompts have been heard

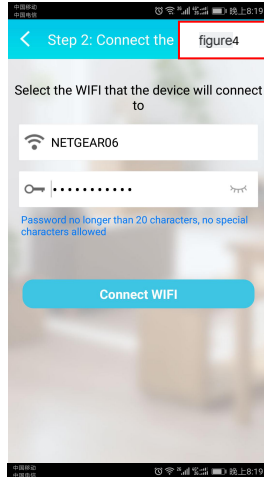
figure4
Step 2: Connect the
Select the WIFI that the device will connect to
NETGEAR06
Password no longer than 20 characters, no special characters allowed
Connect WIFI

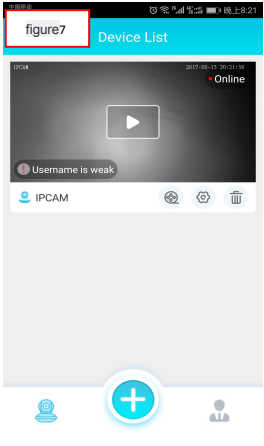
figure7
Device List
IPCAM
Online
Username is weak
IPCAM

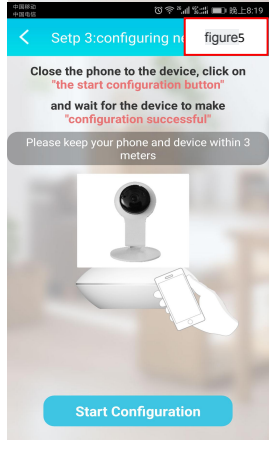
figure5
Setp 3:configuring n
Close the phone to the device, click on "the start configuration button"
and wait for the device to make "configuration successful"
Please keep your phone and device within 3 meters
Start Configuration

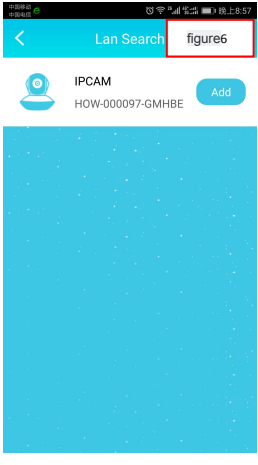
晚上8:57
Lan Search
figure6
IPCAM
HOW-000097-GMHBE
Add

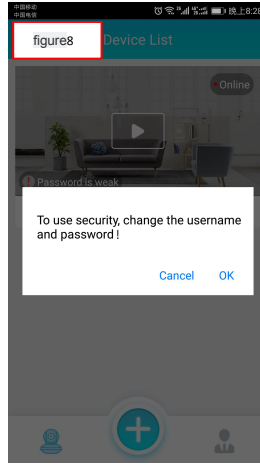
晚上8:28
figure8
Device List
Online
Password is weak
To use security, change the username and password !
Cancel
OK

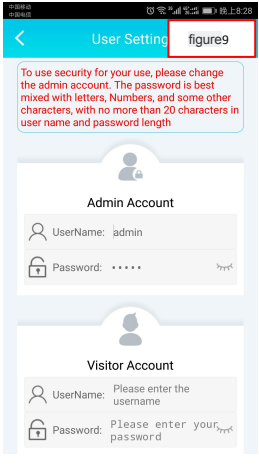
晚上8:28
User Setting
figure9
To use security for your use, please change the admin account. The password is best mixed with letters, Numbers, and some other characters, with no more than 20 characters in user name and password length
Admin Account
UserName: admin
Password: •••••
Visitor Account
UserName: Please enter the username
Password: Please enter your password

If there is no device on the code success page, go back to step 2 and re-configure the device.

Reset button:

Press "reset" button for 5 seconds and the device will reboot (you can hear "reset success") and it will automatically revert to factory settings. So you need to make a wifi setup again after reboot.

Note: when you try to reset the device, make sure it is powered on.

Method 2: AP (hotspot) connection (the connection mode is applicable to QJ series, WJ series products)

Step 1: open the phone Settings, select WLAN Settings, search the wireless webcam ID, and the wifi camera ID prefix is: HOW - etc. (figure 1);

Step 2: click ID, password: 168168168, complete WLAN connection (figure 2);

Step 3: Run the application of "BlueCam" and click "+" (figure 3);

Step 4: click "LAN search" to enter the LAN search page (figure 4);

Step 5: on the LAN search page, find the device to add, then click the add button (figure 5);

Step 6: Find the added devices on the device list page, and the device displays online (figure 6);

Step 7: click the play button to pop up the security tips, and click ok to enter the user settings page (figure 7).

Step 8: Modify the user name and password on the user-device page, click the finish button to start the real-time view (figure 8);

Note: we strongly recommend that you set up a powerful username and password to protect your privacy.

Step 9: on the device list page, click the Settings button (figure 9);

Step 10: click on "WIFI Settings" (figure 10);

Step 11: select the network you want to connect to and enter your password, then click the Settings button to restart and automatically connect to the wifi network (figure 11).

Note: don't power off the device when you reboot.

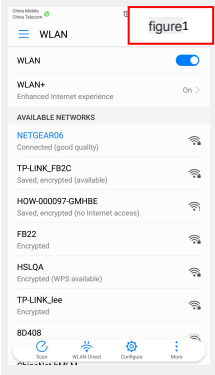
figure1
WLAN
WLAN
WLAN+
Enhanced Internet experience
On
AVAILABLE NETWORKS
NETGEAR06
Connected (good quality)
TP-LINK_FB2C
Saved, encrypted (available)
HOW-000097-GMHBE
Saved, encrypted (no Internet access)
FB22
Encrypted
HSLQA
Encrypted (WPS available)
TP-LINK_lee
Encrypted
8D408
Scan
WLAN Direct
Configure
More

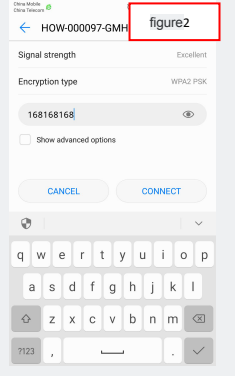
figure2
HOW-000097-GMH
Signal strength
Excellent
Encryption type
WPA2 PSK
168168168
Show advanced options
CANCEL
CONNECT

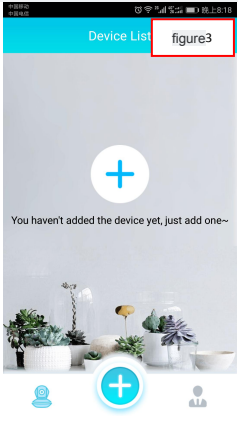
figure3
Device List
You haven't added the device yet, just add one~

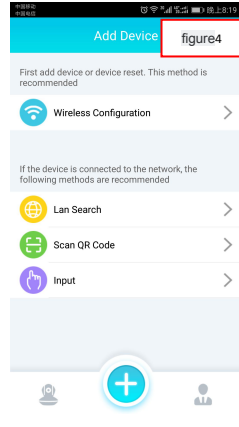
figure4
Add Device
First add device or device reset. This method is recommended
Wireless Configuration
If the device is connected to the network, the following methods are recommended
Lan Search
Scan QR Code
Input

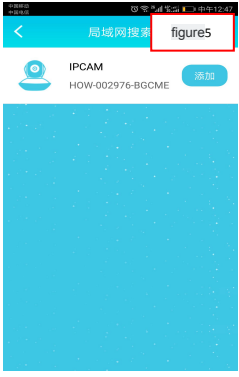
figure5
局域网搜索
IPCAM
HOW-002976-BGCME
添加

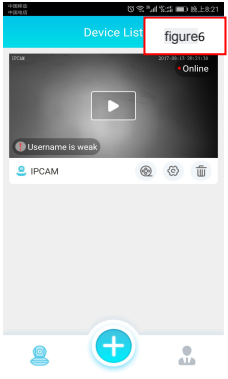
figure6
Device List
Online
Username is weak
IPCAM

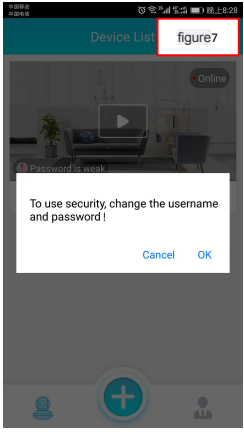
figure7
Device List
Online
Password is weak
To use security, change the username and password !
Cancel
OK

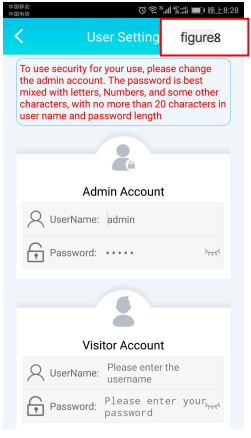
figure8
User Setting
To use security for your use, please change the admin account. The password is best mixed with letters, Numbers, and some other characters, with no more than 20 characters in user name and password length
Admin Account
UserName: admin
Password: •••••
Visitor Account
UserName: Please enter the username
Password: Please enter your password

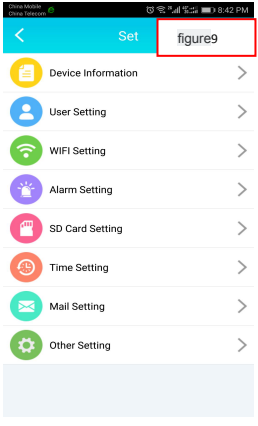
China Mobile
China Telecom
8:42 PM
Set
figure9
Device Information
User Setting
WIFI Setting
Alarm Setting
SD Card Setting
Time Setting
Mail Setting
Other Setting

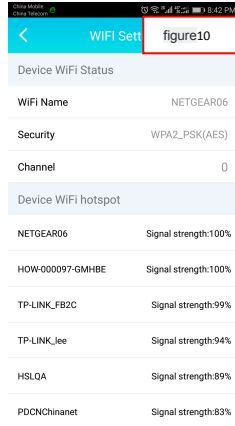
China Mobile
China Telecom
8:42 PM
WIFI Sett
figure10
Device WiFi Status
WiFi Name
NETGEAR06
Security
WPA2_PSK(AES)
Channel
0
Device WiFi hotspot
NETGEAR06
Signal strength:100%
HOW-000097-GMHBE
Signal strength:100%
TP-LINK_FB2C
Signal strength:99%
TP-LINK_lee
Signal strength:94%
HSLQA
Signal strength:89%
PDCNChinanet
Signal strength:83%

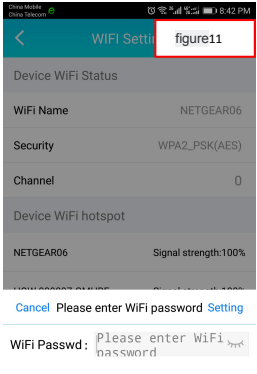
China Mobile
China Telecom
8:42 PM
WIFI Setti
figure11
Device WiFi Status
WiFi Name
NETGEAR06
Security
WPA2_PSK(AES)
Channel
0
Device WiFi hotspot
NETGEAR06
Signal strength:100%
Cancel
Please enter WiFi password
Setting
WiFi Passwd :
Please enter WiFi password

4. Look at these video settings and we'll take a smartphone for example.

Audio Photoing Recording Resolution LEDS, Left-Right mirror, UP-Down mirror, 4 Screen

Matters needing attention:

1. Usage: please strictly observe relevant national laws and regulations

Use this product for any illegal purpose, otherwise the consequences will be at your own risk.

2. Working temperature :0-45 degrees Celsius, preferably at room temperature.

3. Working humidity :20%-80% please do not put the product in humidity

Working environment, products do not have waterproof function.

4. Other matters: this product belongs to precision electronic products, please do not Make it hit hard and vibrate, do not in strong magnetic field,

Used in a strong electric field.

An the Responsible Party Information as follow(America)

Company Name:Nexx Garage Company Limited
Address:4095 Roaring Fork Ln Frisco, TX 75033, United States
Telephone:+1-469-233-5252
support@nexxgarage.com
Scott Vu

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Warning Statements:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.