GENTEX CORPORATION

Technical Report to the FCC and ISED Regarding Gentex Corporation - HomeLink© VI

Model: UAHL6D
FCC ID: NZLUAHL6D
ISED: 4112A-UAHL6D

Emission Designator: 53K7L1D
2/19/2025

A report concerning approval for Gentex Corporation Homelink® model UAHL6D
Please issue grant immediately upon review.

Measurements Made by:

Bolay.Pacheco Digitally signed by Bolay.Pacheco Date: 2025.02.28 10:23:30 -05'00'

Bolay Pacheco
Laboratory Validation Engineer III
Gentex Corporation

Measurements Reviewed by:

Michael Foster Digitally signed by Michael Foster Date: 2025.02.28 12:48:33 -05'00'

Michael Foster
Laboratory Regulatory Engineer I
Gentex Corporation

Report Prepared by:

Patricia Szeszulski Digitally signed by Patricia Szeszulski Date: 2025.02.28 09:40:53 -05'00'

Patricia Szeszulski
Laboratory Validation Engineer I
Gentex Corporation

Report Approved by:

Jason Vargo Laboratory Lab Manager I Digitally signed by Jason Vargo Laboratory Lab Manager I Date: 2025.02.28 13:55:10 -05'00'

Jason Vargo
Laboratory Manager I
Gentex Corporation

Report Submitted by:

Brian Miller Digitally signed by Brian Miller Date: 2025.02.28 09:23:36 -05'00'

Brian Miller
Laboratory Group Leader – Regulatory II
Gentex Corporation

Test Report Revision

REV Number	Date	Author	Description
1.0	2/19/2025	Patricia Szeszulski	Initial Release

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink® HLVI Universal Garage Door Opener is a low-power transceiver OEM device that is installed into a rearview mirror of an automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power the unit.

The unit is only operational when the user presses down the control button. It becomes inactive after the release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. The service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR 15.247 and part 15B and ISED Canada RSS-247. The device will have FCC ID # of NZLUAHL6D and ISED ID # of 4112A-UAHL6D under both rule parts. A separate report is submitted for functionality covered under 47 CFR 15.247 and part 15B and ISED Canada RSS-247.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.10:2013. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.

1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 05/20/2016 and includes accreditation to ANSI C63.4:2014 and ANSI C63.10:2013. The report filed with ISED, dated February 11, 2015, was accepted via a letter dated February 11, 2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address	Site Address
Gentex Corporation	Gentex Corporation
600 N. Centennial Street	380 Riley Street
Zeeland, MI 49464	Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #2529.01 are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, and Radiated Emissions at 3m, FCC 47 CFR Part 15, ISED RSS-210.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLUAHL6D. The ISED certification number is 4112A-UAHL6D. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using a molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual.

> "This device complies with FCC rules Part 15 and with ISED RSS-210. Operation is subject to the following two conditions:
> (1) This device may not cause harmful interference,
> (2) This device must accept any interference that may be received including interference that may cause undesired operation.
> WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.

ISED: 4112A-UAHL6D FCC ID: NZLUAHL6D MODEL: UAHL6D

2.2. Label Drawing and Location on Product

The label drawing is included in the “Label.pdf” attachment.

A diagram showing the location of the label on the assembly is included in the “Label Location.pdf” attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.10-2013. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for measurements below 1GHz and elevated to 1.5m for measurements above 1GHz. The harness was run down the edge of the test table to a power supply sitting underneath the turntable.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer’s instructions.

4. Block Diagram

For system block diagram please refer to attachment named “Block Diagram.pdf”

5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

6. Radiated Emissions Data

6.1. Date(s) Tested: 2/6/2025-2/12/2025

6.2. Test Method Deviations: None

6.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	22.8-24.4	ºC
Humidity	43.1-53.3	%R.H.

6.4. Summary of Results

Measurement		Margin	Frequency - Duty Cycle
Worst Case Peak Emission	83.88 dBuV/m	11.44 dB	310MHz - 30%
Worst Case Average Emission	73.4 dBuV/m	1.90 dB	310MHz - 30%
Worst Case Harmonic	49.5 dBuV/m	4.3 dB	576 MHz - (288MHz - 30%)
Worst Case Restricted Band Emission	40.7 dBuV/m	13.29 dB	930 MHz - (310MHz – 80%)
Maximum -20 dB Occupied BW	18.05kHz	701.95kHz	288MHz - 30%
Maximum 99% Occupied BW	53.72 kHz	666.28kHz	288MHz – 30%
Delta of Field Strength with Supply Voltage of 6-18V	0.06 dB	N/A	310MHz - 30%

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 7V, and power reduced to 83.90 dBuV/m at 7V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated in less than 5 seconds after the activation button is depressed.

- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of k=2.26 and confidence interval of approximately 95%.

  Expanded Uncertainty $U_{(k=2.26)}$ is as follows:

  - Radiated Emissions – Bicon (30-250 MHz): 4.1 dB
  - Radiated Emissions – LPA (250-1000 MHz): 5.0 dB
  - Radiated Emissions – DRWG (26.5 GHz): 4.2 dB
  - Frequency: 0.007 ppm

6.5. Test Equipment Setup and Procedure

6.5.1. Sample(s) Used for Measurements

Sample ID(s):	905-5292-152265-1 & 905-5292-152264-1

6.5.2. Test Equipment Used

Equipment used			
ID / Serial #	**Manufacturer**	**Description**	**Cal / PM Due Date**
6595	Rohde and Schwarz	EMI Receiver Firmware 3.66 SP1	11/19/2025
CF GCL	Megaphase/Pasternack	3m Chamber Port and Cables	4/30/2025
H6192	EMCO	3148 Log Periodic RX	5/13/2027
8893	Com-Power	AHA-118 Horn	4/22/2027
Tower 2	ETS-Lindgren	2171B Boresight Tower	VBU
PJ2246	ETS-Lindgren	Shielded Enclosure	6/30/2025
7187	Omega	iBTHX-W Virtual	9/24/2025
HL5 Transceiver-GCL	Gentex	Default Receiver	VBU
6539	Stanley	Tape Measure	6/19/2026
H4554	87V	Multimeter	1/11/2025
S/N:419726	AIM TTI	PL303-P Power Supply	VBU
SW30	Gentex	3m Chamber Software	3/31/2025
SW48	Gentex	Gentex Emissions Measurement Software	3/31/2025
Absorber 1	ETS-Lindgren	Absorbers	VBU
3.21.7 / 6.62.0	Gentex	4490 TR-10645 Country Code 5 Wakeup 2	VBU
570389/2.0.3.1	Gentex	4490 JLR L481 FDM HL6 WIDI	VBU

EMI Receiver Settings Emissions:

Detector Function: Peak
Resolution Bandwidth: 120 kHz (below 1GHz)
1MHz (above 1GHz)

EMI Receiver (in Spectrum Analyzer mode) Settings Occupied Bandwidth:

Detector: Peak
Resolution Bandwidth: 1 MHz (to determine peak level)
1 kHz (to determine occupied bandwidth)

Video Bandwidth: 3 MHz (to determine peak level)
3 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.10:2013 for stand-alone equipment. The 2-conductor harness was run down the edge of the test table to a power supply underneath the turntable.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 6.2.1.

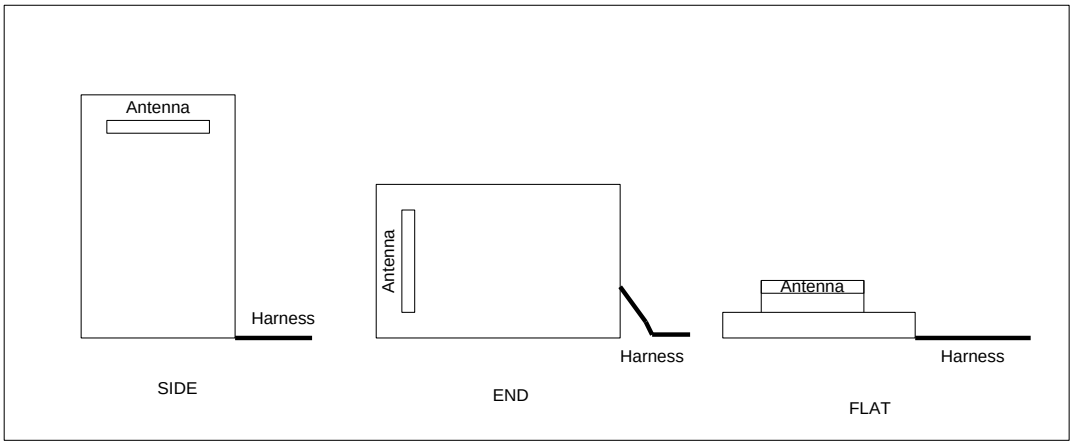

Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations. Radiated testing was performed in all three orientations or the in-vehicle position only.

6.6. Measured Data – See Appendix A

7. Verification of Non-Operation in Restricted Bands

An exercise was undergone by the product Software Design team to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise, it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in the latest issue of RSS-210, Table 1 and 47 CFR 15.205.
This exercise is described as follows:

HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 440 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz

HomeLink will only transmit at frequencies it is able to train to therefore, to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, the Agilent E4421B signal generator was set up to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. It was then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, the various frequencies in the vicinity of the banned region boundaries were tested and verified that HomeLink trained when it saw a signal at a valid frequency and did not train when it saw a signal at a banned frequency. In the instances where HomeLink trained to a valid frequency, it was then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore, HomeLink may not adhere to the specified limits with absolute precision. This is why the FCC banned frequencies are guard-banded by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, it guarantees that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain "harmonic avoidance frequency regions" which HomeLink will train to but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

FCC Banned Regions	Harmonic Avoidance Regions
(HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	(HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz

285	banned	would not train	Pass	
285.5	allowed (guard band region)	would not train	Pass	
286	allowed (guard band region)	trained	Pass	Trained and Transmitted at 286 MHz
287	allowed	trained	Pass	Trained and Transmitted at 287 MHz
303.5	allowed	trained	Pass	Trained and Transmitted at 303.5 MHz
304	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz

307	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	Trained and Transmitted at 319 MHz
319	allowed	trained	Pass	Trained and Transmitted at 307.5 MHz
320	allowed	trained	Pass	Trained and Transmitted at 320 MHz
320.5	allowed	trained	Pass	Trained and Transmitted at 320.5 MHz
321	allowed (guard band region)	trained	Pass	Trained and Transmitted at 321 MHz
322	banned	would not train	Pass	
323	banned	would not train	Pass	
324	banned	would not train	Pass	
325	banned	would not train	Pass	
326	banned	would not train	Pass	
327	banned	would not train	Pass	
328	banned	would not train	Pass	
329	banned	would not train	Pass	
330	banned	would not train	Pass	
331	banned	would not train	Pass	
332	banned	would not train	Pass	
333	banned	would not train	Pass	
334	banned	would not train	Pass	
335	banned	would not train	Pass	
336	allowed (guard band region)	would not train	Pass	
337	allowed (guard band region)	trained	Pass	Trained and Transmitted at 337 MHz

338	allowed	trained	Pass	Trained and Transmitted at 338 MHz
398	allowed	trained	Pass	Trained and Transmitted at 398 MHz
399	allowed (guard band region)	trained	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz. DUT Trained to 399 MHz
399.5	allowed (guard band region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
400	banned	would not train	Pass	
401	banned	would not train	Pass	
402	banned	would not train	Pass	
403	banned	would not train	Pass	
404	banned	would not train	Pass	
405	banned	would not train	Pass	
406	banned	would not train	Pass	
407	banned	would not train	Pass	
408	banned	would not train	Pass	
409	banned	would not train	Pass	
410	banned	would not train	Pass	
410.5	allowed (guard band region)	would not train	Pass	
411	allowed (guard band region)	trained	Pass	Trained and Transmitted at 411 MHz
411.5	allowed	trained	Pass	Trained and Transmitted at 411.5 MHz
412	allowed	trained	Pass	Trained and Transmitted at 412 MHz
439	allowed	trained	Pass	Trained and Transmitted at

				439 MHz
440	allowed	trained	Pass	Trained and Transmitted at 440 MHz
440.5	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
441	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
442	allowed	would not train	Pass	HomeLink only operates up to 440 MHz

8. Verification of De-activation after 5 seconds

An exercise was undergone by the product Software Design team to verify that the device was deactivated appropriately. This device stops transmitting after 1.099s once the activation button is released.

9. Formulas and Sample Calculations

9.1. Adjustment to account for duty cycle

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

Formula 1: FS (dBuV/m) = M(dBuV) + AF (dB/m) + CF (dB) – AG (dB)

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

Formula 2: Average Level(dBuV/m) = Peak Level (dBuV/m) + duty cycle factor(dB).

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30): duty cycle factor (dB) = 20*Log (0.3) = -10.46
For 50% (0.50): duty cycle factor(dB) = 20*Log (0.5) = -6.02
For 80% (0.80): duty cycle factor(dB) = 20*Log (0.8) = -1.94

Example calculation:
With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:

74 + (-10.46) = 63.54 dBuV/m (example)

9.2. Calculation of ISED Limits from Table 4, RSS-210 and 47 CFR Part 15.231

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criterion is:

FCC limit = 41.67 * f – 7083.33
(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

dB limit = 20 * log10(FCC limit in dBuV/m) = 20*log10(41.67*f – 7083.33)
(log10 is used to indicate the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	20*log10(4917.6)	= 73.8 dBuV/m
310MHz	20*log10(5834.4)	= 75.3 dBuV/m
390MHz	20*log10(9168.0)	= 79.2 dBuV/m
433MHz	20*log10(10959.8)	= 80.8 dBuV/m

9.3 Antenna Gain

Antenna Gain was calculated by taking the maximum EIRP and subtracting the peak conducted output power in dBm at a given frequency. EIRP was calculated from the Max Field strength values at 3m using equation 1 below. Conducted Output power was converted from dBuV to dBm using equation 2 below using a Z impedance value of 50 Ohms. Max field strength values in dBuV/m were taken from the fundamental emission measurements in section A.1 and conducted output power values in dBuV were taken from section A.5. Measurement settings can also be referenced in those sections.

1. EIRP (dBm) = Power Received (dBuV/m) + 20*Log (d in meters) – 104.77
2. dBm = dBuV – 10*Log(Z) – 90

Frequency (MHz)	Max Field Strength at 3m (dBuV)	Max Field Strength Converted to EIRP (dBm)	Conducted Output Power (dBm)	Antenna Gain (dBi)
288	81.79	-13.43757491	13.31	-26.74757491
310	83.88	-11.34757491	11.42	-22.76757491
340	85.49	-9.737574906	11.95	-21.68757491
365	84.1	-11.12757491	7.98	-19.10757491
390	88.34	-6.887574906	3.92	-10.80757491
430	86.17	-9.057574906	1.04	-10.09757491

*Cable corrections were taken into account using the measurement receiver.

10. Power Targets

Region	Frequency (MHz)	CW Target (Hex)		
		0-33%	34 - 66%	67 - 100%
0	285-303	0A	0A	0A
1	303-322	08	08	08
2	335-360	09	0B	0B
3	360-380	06	06	06
4	380-400	04	04	04
5	410-440	03	03	03

Appendix A

1. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.10-2013 on the Gentex Corporation 3m test table.
* Measurements include Cable corrections and Antenna Factors

Measurement Settings:
Measurement Frequency: Below 1GHz
Span: 500kHz or greater
RBW: 100/120kHz VBW: 300kHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto

Measurement Frequency: Above 1GHz
Span: 500kHz or greater
RBW: 1MHz VBW: 3MHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto

1.1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
288	Side	H	30	81.79	93.8	**12.04**	-10.5	71.3	73.8	**2.50**
288	Side	H	50	77.26	93.8	16.57	-6.0	71.2	73.8	2.59
288	Side	H	80	72.94	93.8	20.89	-1.9	71.0	73.8	2.83

1.2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
310	Side	H	30	83.88	95.3	**11.44**	-10.5	73.4	75.3	**1.90**
310	Side	H	50	79.00	95.3	16.32	-6.0	73.0	75.3	2.34
310	Side	H	80	74.51	95.3	20.81	-1.9	72.6	75.3	2.75

1.3. DUT Tuned to Fund 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
365	Side	H	30	84.10	98.2	**14.10**	-10.5	73.6	78.2	**4.55**
365	Side	H	50	78.77	98.2	19.43	-6.0	72.7	78.2	5.45
365	Side	H	80	75.12	98.2	23.08	-1.9	73.2	78.2	5.01

1.4. DUT Tuned to Fund 430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
430	Side	H	30	86.17	100.7	**14.53**	-10.5	75.7	80.7	4.98
430	Side	H	50	81.91	100.7	18.79	-6.0	75.9	80.7	4.81
430	Side	H	80	77.85	100.7	22.85	-1.9	75.9	80.7	**4.78**

1.5. DUT Tuned to Har_288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
576	Side	H	30	59.97	73.8	**13.83**	-10.5	49.5	53.8	**4.29**
576	Side	H	50	54.28	73.8	19.55	-6.0	48.3	53.8	5.57
576	Side	H	80	47.03	73.8	26.80	-1.9	45.1	53.8	8.74
864	Side	H	30	42.07	73.8	31.76	-10.5	31.6	53.8	22.22
864	Side	H	50	40.33	73.8	33.50	-6.0	34.3	53.8	19.52
864	Side	H	80	41.32	73.8	32.51	-1.9	39.4	53.8	14.45
1152	Side	H	30	31.39	74.0	42.61	-10.5	20.9	54.0	33.07
1152	Side	V	50	29.64	74.0	44.36	-6.0	23.6	54.0	30.38
1152	Side	V	80	29.5	74.0	44.50	-1.9	27.6	54.0	26.44
1440	Side	H	30	37.53	74.0	36.47	-10.5	27.1	54.0	26.93
1440	Side	H	50	36.71	74.0	37.29	-6.0	30.7	54.0	23.31
1440	Side	H	80	36.5	74.0	37.50	-1.9	34.6	54.0	19.44
1728	Side	H	30	34.62	74.0	39.38	-10.5	24.2	54.0	29.84
1728	Side	H	50	33.04	74.0	40.96	-6.0	27.0	54.0	26.98
1728	Side	H	80	33.01	74.0	40.99	-1.9	31.1	54.0	22.93
2016	Side	H	30	35.1	73.8	38.73	-10.5	24.6	53.8	29.19
2016	Side	H	50	35.09	73.8	38.74	-6.0	29.1	53.8	24.76
2016	Side	H	80	34.88	73.8	38.95	-1.9	32.9	53.8	20.89
2304	Side	H	30	35.61	74.0	38.39	-10.5	25.2	54.0	28.85
2304	Side	H	50	34.25	74.0	39.75	-6.0	28.2	54.0	25.77
2304	Side	H	80	34.74	74.0	39.26	-1.9	32.8	54.0	21.20
2592	Side	H	30	37.03	74.0	36.97	-10.5	26.6	54.0	27.43
2592	Side	H	50	36.01	74.0	37.99	-6.0	30.0	54.0	24.01
2592	Side	H	80	35.31	74.0	38.69	-1.9	33.4	54.0	20.63
2880	Side	H	30	38.04	74.0	35.96	-10.5	27.6	54.0	26.42
2880	Side	H	50	36.86	74.0	37.14	-6.0	30.8	54.0	23.16
2880	Side	H	80	36.32	74.0	37.68	-1.9	34.4	54.0	19.62

1.6. DUT Tuned to Har_310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
620	Side	H	30	55.96	75.3	**19.34**	-10.5	45.5	55.3	**9.80**
620	Side	H	50	49.1	75.3	26.20	-6.0	43.1	55.3	12.22
620	Side	H	80	43.87	75.3	31.43	-1.9	41.9	55.3	13.37
930	Side	H	30	42.95	74.0	31.05	-10.5	32.5	54.0	21.51
930	Side	H	50	42.22	74.0	31.78	-6.0	36.2	54.0	17.80
930	Side	H	80	42.65	74.0	31.35	-1.9	40.7	54.0	13.29
1240	Side	H	30	32.09	74.0	41.91	-10.5	21.6	54.0	32.37
1240	Side	H	50	31.54	74.0	42.46	-6.0	25.5	54.0	28.48
1240	Side	H	80	31.27	74.0	42.73	-1.9	29.3	54.0	24.67
1550	Side	V	30	44.02	74.0	29.98	-10.5	33.6	54.0	20.44
1550	Side	V	50	41.69	74.0	32.31	-6.0	35.7	54.0	18.33
1550	Side	V	80	41.43	74.0	32.57	-1.9	39.5	54.0	14.51
1860	Side	H	30	33.16	75.3	42.14	-10.5	22.7	55.3	32.60
1860	Side	V	50	32.84	75.3	42.46	-6.0	26.8	55.3	28.48
1860	Side	V	80	32.79	75.3	42.51	-1.9	30.9	55.3	24.45
2170	Side	H	30	36.32	74.0	37.68	-10.5	25.9	54.0	28.14
2170	Side	H	50	36.25	74.0	37.75	-6.0	30.2	54.0	23.77
2170	Side	H	80	36.42	74.0	37.58	-1.9	34.5	54.0	19.52
2480	Side	V	30	35.11	74.0	38.89	-10.5	24.7	54.0	29.35
2480	Side	V	50	34.69	74.0	39.31	-6.0	28.7	54.0	25.33
2480	Side	V	80	34.44	74.0	39.56	-1.9	32.5	54.0	21.50
2790	Side	H	30	41.11	74.0	32.89	-10.5	30.7	54.0	23.35
2790	Side	H	50	40.59	74.0	33.41	-6.0	34.6	54.0	19.43
2790	Side	H	80	40.01	74.0	33.99	-1.9	38.1	54.0	15.93
3100	Side	V	30	40.96	75.3	34.34	-10.5	30.5	55.3	24.80
3100	Side	V	50	39.85	75.3	35.45	-6.0	33.8	55.3	21.47
3100	Side	V	80	39.72	75.3	35.58	-1.9	37.8	55.3	17.52

1.7. DUT Tuned to Har_365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
730	Side	H	30	44.88	78.2	33.32	-10.5	34.4	58.2	23.78
730	Side	H	50	43.25	78.2	34.95	-6.0	37.2	58.2	20.97
730	Side	H	80	42.89	78.2	35.31	-1.9	41.0	58.2	17.25
1095	Side	H	30	38.66	74.0	35.34	-10.5	28.2	54.0	25.80
1095	Side	H	50	37.58	74.0	36.42	-6.0	31.6	54.0	22.44
1095	Side	H	80	35.23	74.0	38.77	-1.9	33.3	54.0	20.71
1460	Side	V	30	34.65	74.0	39.35	-10.5	24.2	54.0	29.81
1460	Side	V	50	33.52	74.0	40.48	-6.0	27.5	54.0	26.50
1460	Side	V	80	33.12	74.0	40.88	-1.9	31.2	54.0	22.82
1825	Side	V	30	33.75	74.0	40.25	-10.5	23.3	54.0	30.71
1825	Side	V	50	33.5	74.0	40.50	-6.0	27.5	54.0	26.52
1825	Side	V	80	33.18	74.0	40.82	-1.9	31.2	54.0	22.76
2190	Side	H	30	35.03	74.0	38.97	-10.5	24.6	54.0	29.43
2190	Side	H	50	34.79	74.0	39.21	-6.0	28.8	54.0	25.23
2190	Side	H	80	34.66	74.0	39.34	-1.9	32.7	54.0	21.28
2555	Side	H	30	36.07	74.0	37.93	-10.5	25.6	54.0	28.39
2555	Side	H	50	36.02	74.0	37.98	-6.0	30.0	54.0	24.00
2555	Side	H	80	35.72	74.0	38.28	-1.9	33.8	54.0	20.22
2920	Side	H	30	37.01	74.0	36.99	-10.5	26.6	54.0	27.45
2920	Side	H	50	36.39	74.0	37.61	-6.0	30.4	54.0	23.63
2920	Side	H	80	36.4	74.0	37.60	-1.9	34.5	54.0	19.54
3285	Side	V	30	41.39	74.0	**32.61**	-10.5	30.9	54.0	23.07
3285	Side	V	50	41.19	74.0	32.81	-6.0	35.2	54.0	18.83
3285	Side	V	80	41.12	74.0	32.88	-1.9	39.2	54.0	**14.82**
3650	Side	H	30	37.21	74.0	36.79	-10.5	26.8	54.0	27.25
3650	Side	V	50	36.72	74.0	37.28	-6.0	30.7	54.0	23.30
3650	Side	V	80	36.63	74.0	37.37	-1.9	34.7	54.0	19.31

1.8. DUT Tuned to Har_430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
860	Side	V	30	42.12	80.8	38.68	-10.5	31.7	60.8	29.14
860	Side	H	50	42.56	80.8	38.24	-6.0	36.5	60.8	24.26
860	Side	V	80	41.65	80.8	39.15	-1.9	39.7	60.8	21.09
1290	Side	H	30	40.67	74.0	33.33	-10.5	30.2	54.0	23.79
1290	Side	H	50	39.5	74.0	34.50	-6.0	33.5	54.0	20.52
1290	Side	H	80	37.71	74.0	36.29	-1.9	35.8	54.0	18.23
1720	Side	V	30	34.76	74.0	39.24	-10.5	24.3	54.0	29.70
1720	Side	V	50	33.56	74.0	40.44	-6.0	27.5	54.0	26.46
1720	Side	V	80	34.05	74.0	39.95	-1.9	32.1	54.0	21.89
2150	Side	V	30	35.55	80.8	45.25	-10.5	25.1	60.8	35.71
2150	Side	V	50	34.25	80.8	46.55	-6.0	28.2	60.8	32.57
2150	Side	H	80	33.58	80.8	47.22	-1.9	31.6	60.8	29.16
2580	Side	V	30	44.97	74.0	**29.03**	-10.5	34.5	54.0	19.49
2580	Side	V	50	41.65	74.0	32.35	-6.0	35.6	54.0	18.37
2580	Side	V	80	40.22	74.0	33.78	-1.9	38.3	54.0	**15.72**
3010	Side	H	30	38.91	74.0	35.09	-10.5	28.5	54.0	25.55
3010	Side	H	50	37.56	74.0	36.44	-6.0	31.5	54.0	22.46
3010	Side	H	80	36.55	74.0	37.45	-1.9	34.6	54.0	19.39
3440	Side	H	30	36.42	74.0	37.58	-10.5	26.0	54.0	28.04
3440	Side	H	50	35.26	74.0	38.74	-6.0	29.2	54.0	24.76
3440	Side	H	80	35.77	74.0	38.23	-1.9	33.8	54.0	20.17
3870	Side	V	30	37.97	74.0	36.03	-10.5	27.5	54.0	26.49
3870	Side	V	50	36.57	74.0	37.43	-6.0	30.5	54.0	23.45
3870	Side	H	80	36.55	74.0	37.45	-1.9	34.6	54.0	19.39
4300	Side	H	30	38.27	74.0	35.73	-10.5	27.8	54.0	26.19
4300	Side	V	50	36.55	74.0	37.45	-6.0	30.5	54.0	23.47
4300	Side	V	80	36.47	74.0	37.53	-1.9	34.5	54.0	19.47

2. Pulsed Operation

The Homelink© transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles are provided here. Measurements were taken at 310 MHz with the span set to zero on the R&S ESR26 EMI Receiver. The modulation frequency is 500Hz.

2.1. 30% Duty Cycle

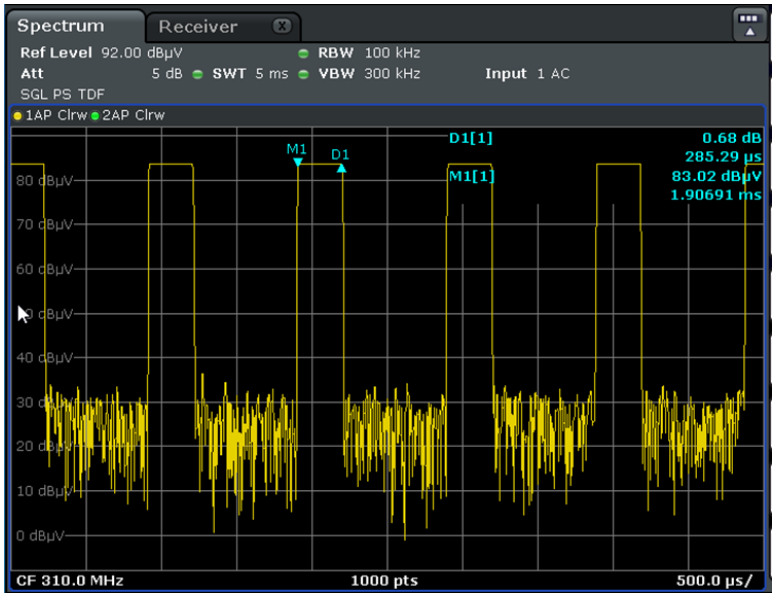

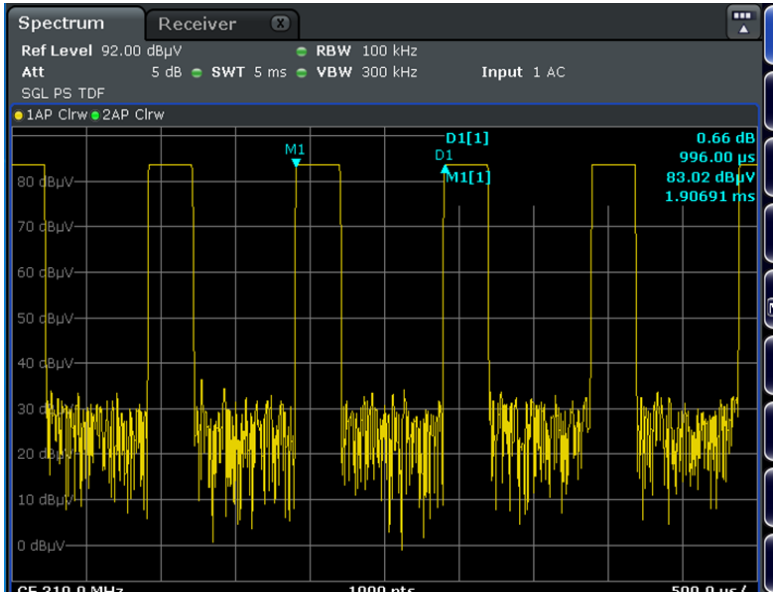

2.2. 50% Duty Cycle

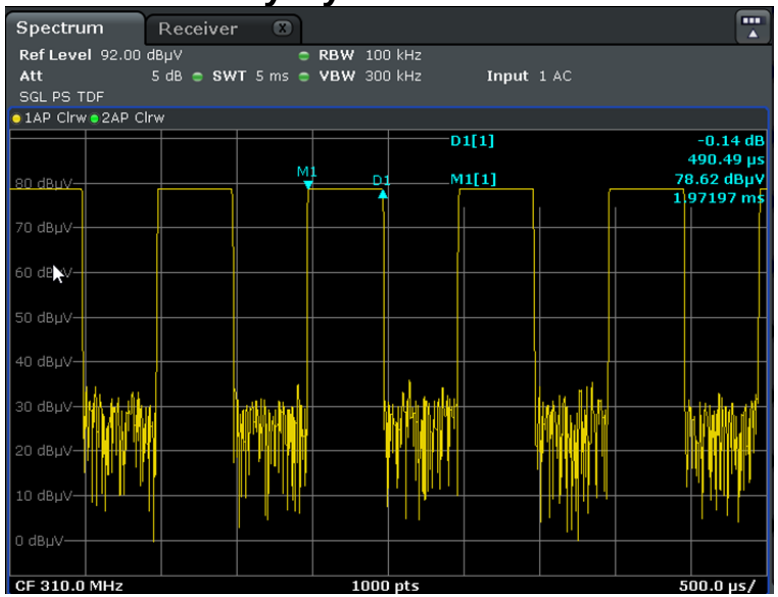

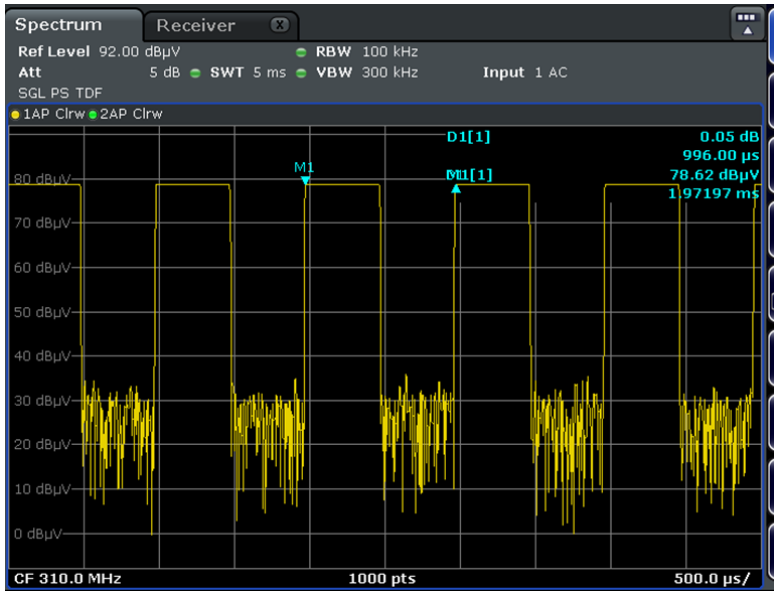

2.3. 80% Duty Cycle

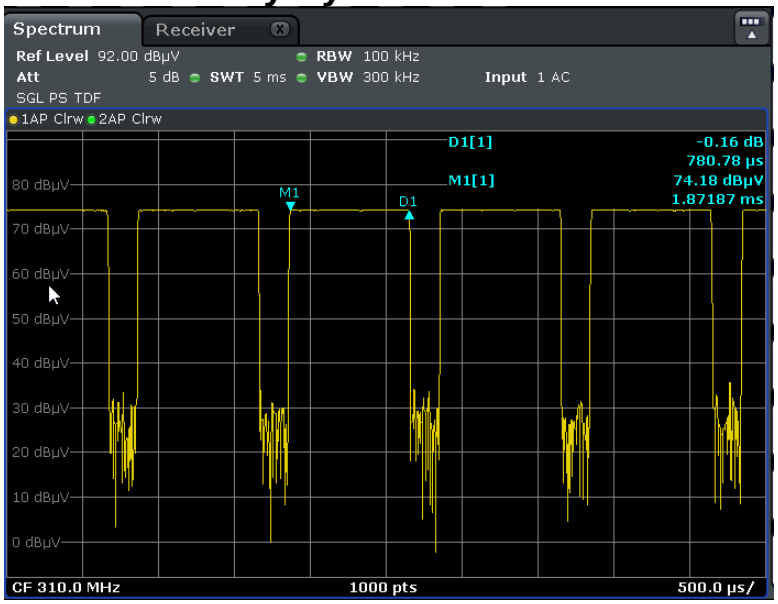

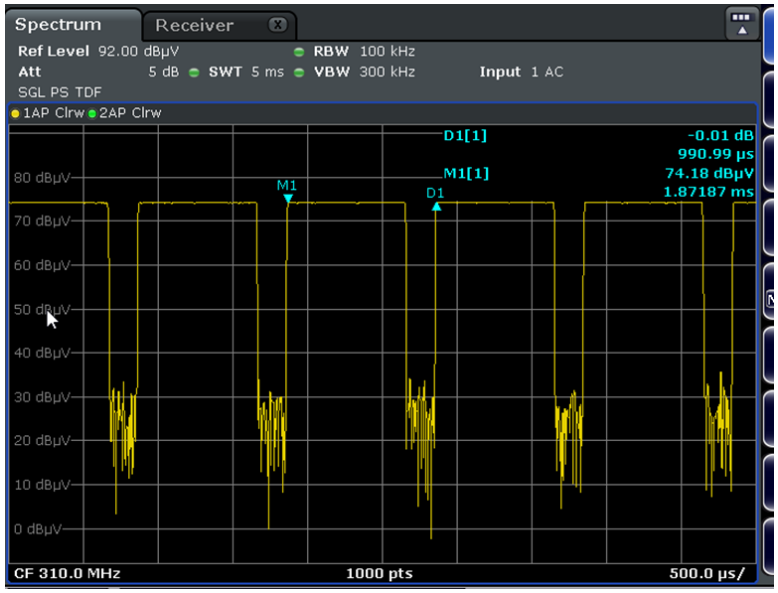

3. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, 365 and 430MHz. The occupied bandwidth was determined using the -20dB and 99% measurement methods.

3.1. -20dB Occupied Bandwidth Measurement

-20dB Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	18.05	720	701.95
	50	8.88	720	711.12
	80	7.55	720	712.45
310	30	18.10	775	756.90
	50	10.32	775	764.68
	80	7.60	775	767.40
365	30	17.98	912.5	894.52
	50	8.82	912.5	903.68
	80	7.60	912.5	904.90
430	30	18.02	1082.5	1064.48
	50	7.38	1082.5	1075.12
	80	7.58	1082.5	1074.92

3.2. 99% Occupied Bandwidth Measurement

99% Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	53.72	720	666.28
	50	27.08	720	692.92
	80	28.15	720	691.85
310	30	56.00	775	719.00
	50	27.10	775	747.90
	80	27.55	775	747.45
365	30	54.10	912.5	858.40
	50	27.35	912.5	885.15
	80	27.45	912.5	885.05
430	30	53.42	1082.5	1029.08
	50	26.80	1082.5	1055.70
	80	26.68	1082.5	1055.82

3.3. Occupied Bandwidth Worse-Case Screenshot

20dB BW

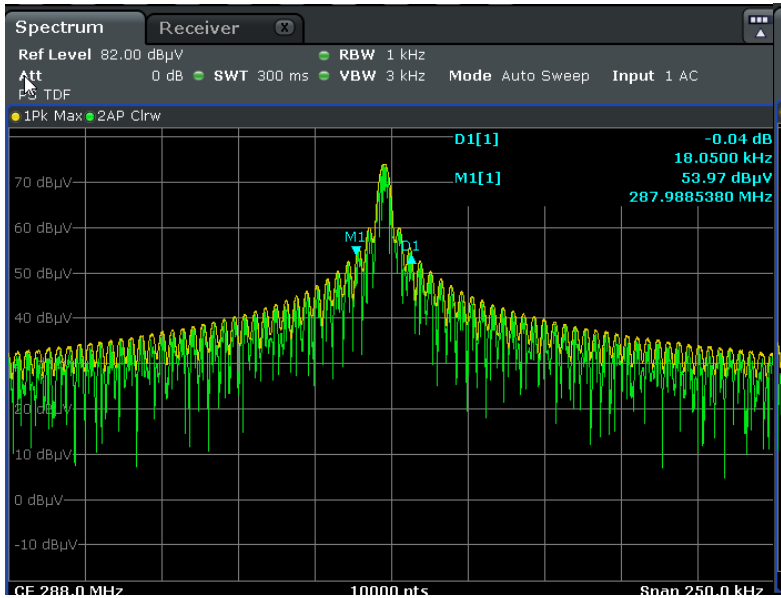

99% BW

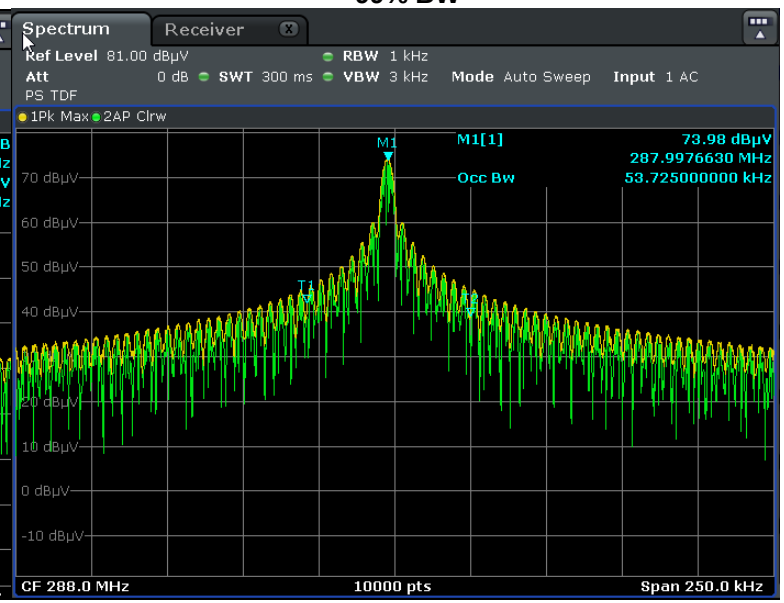

4. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at the peak frequency, 310MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

4.1. Plot of output power over supply voltage

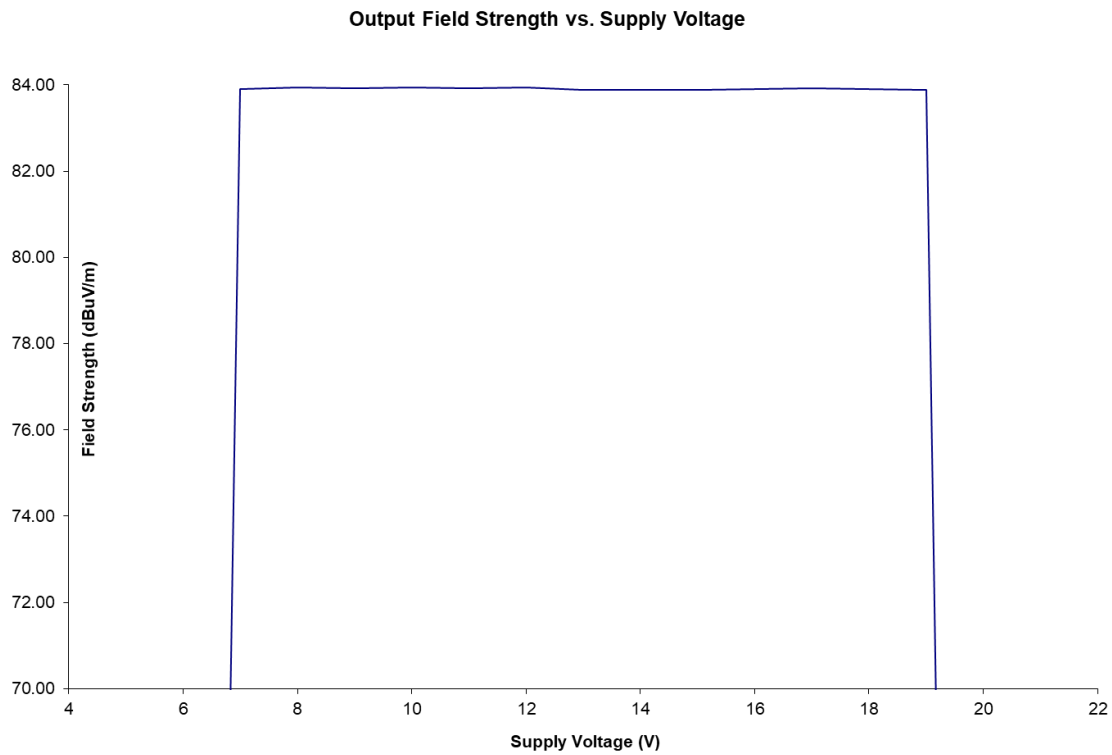

4.2. Output Power as a Function of Supply Voltage

Voltage	Field Strength (dBuV/m)
6	0.00
7	83.90
8	83.93
9	83.92
10	83.94
11	83.92
12	83.93
13	83.88
14	83.89
15	83.88
16	83.91
17	83.92
18	83.90
19	83.89
20	0.00

5. Conducted Output Power

Measurement Settings:
RBW: 100kHz
VBW: 3x RBW
Sweep Time: 25ms

Conducted output power measurements were taken to calculate antenna gain in section 9.3 above. EUT is placed into a transmit mode via a communications board attached to the EUT.

Frequency (MHz)	Output Power (dBm)
288	13.31
310	11.42
340	11.95
365	7.98
390	3.92
430	1.04