ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS II PERMISSIVE CHANGE

Test Report Number	**: E044R-021**
Applicant	**: HUMAX Co., Ltd.**
Address	**: Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea**
Manufacturer	**: HUMAX Co., Ltd.**
Address	**: Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea**
Type of Equipment	**: Digital Satellite Receiver**
FCC ID	**: O6ZSIR-S300W**
Model Name	**: SIR-S300W**
Multiple Model Name	**: N/A**
Serial number	**: N/A**
Total page of Report	**: 15 pages (including this page)**
Date of Incoming	**: February 19, 2004**
Date of Issuing	**: April 09, 2004**

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**
This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:
G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by:
Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE **4**

2. GENERAL INFORMATION **5**

2.1 PRODUCT DESCRIPTION 5
2.2 MODEL DIFFERENCES: 5
2.3 RELATED SUBMITTAL(S) / GRANT(S) 5
2.4 TEST SYSTEM DETAILS 5
2.5 TEST METHODOLOGY 5
2.6 TEST FACILITY 5

3. SYSTEM TEST CONFIGURATION **6**

3.1 JUSTIFICATION 6
3.2 EUT EXERCISE SOFTWARE 6
3.3 CABLE DESCRIPTION 6
3.4 NOISE SUPPRESSION PARTS ON CABLE 6
3.5 EQUIPMENT MODIFICATIONS 6
3.6 CONFIGURATION OF TEST SYSTEM 7
3.6.1 Line Conducted Test *7*
3.6.2 Radiated Emission Test *7*
3.6.3 Output Signal Level Test *7*
3.6.4 Output Terminal Conducted Spurious Emission test *7*
3.6.5 Transfer Switch Isolation Test *8*

4. PRELIMINARY TEST **8**

4.1 AC POWER LINE CONDUCTED EMISSION TEST 8
4.2 RADIATED EMISSIONS TESTS 8

5. FINAL RESULT OF MEASURMENT **9**

5.1 CONDUCTED EMISSION TEST 9
5.2 RADIATED EMISSION TEST 11
5.3 OUTPUT TERMINAL SIGNAL LEVEL TEST 12
5.4 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS TEST 13
5.5 TRANSFER SWITCH ISOLATION TEST 14

6. FIELD STRENGTH CALCULATION **15**

7. LIST OF TEST EQUIPMENT **16**

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : HUMAX Co., Ltd.
-. ADDRESS : Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea
-. CONTACT PERSON : Mr. Jung-Jae, Choi / Engineering Manager
-. TELEPHONE NO : +82-31-600-6362
-. FCC ID : O6ZSIR-S300W
-. MODEL NAME : SIR-S300W
-. BRAND NAME : SAMSUNG
-. SERIAL NUMBER : N/A
-. DATE : April 09, 2004

DEVICE TYPE	TV INTERFACE DEVICE - Unintentional Radiator
E.U.T. DESCRIPTION	Digital Satellite Receiver
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

-. This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

2. GENERAL INFORMATION

2.1 Product Description

The HUMAX Co., Ltd., Model SIR-S300W (referred to as the EUT in this report) is a Digital Satellite Receiver. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	27 MHz (System Clock), 4.9152 MHz (Modem Clock), 10.111 MHz (Channel Clock)
POWER REQUIREMENT	AC 120V, 60Hz, Max. 24W
NUMBER OF LAYERS	2 Layers
RF MODULATOR Type NO. / MFR	RMVP1345DC(H) / SAMSUNG Electro-Mechanics
EXTERNAL TERMINALS	S-Video, RCA Jack (Audio out (L/R), Video out), RF (TV Out/ ANT In), Satellite In, Modem RJ11

2.2 Model Differences:

- None.:

2.3 Related Submittal(s) / Grant(s)

-. Class II Permissive Chang

The main board contains the modem card that was separated board.

2.4 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
SIR-S300W	HUMAX Co., Ltd.	O6ZSIR-S300W	Digital Satellite Receiver (EUT)	-
LT150AA	KTV GLOBAL CORP.	BRFLT150AA	15.0" LCD TV Receiver	EUT
CM2000B	CONEXANT	N/A	Modulator	EUT
RF-100	DOCTOR DESIGN INC.	N/A	RF-Generator	Modulator

2.5 Test Methodology

The measurement for radiated emission, line conducted emission, output signal level, output terminal conducted spurious emission and transfer switch isolation tests were performed in accordance with the procedures described in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	HUMAX Co., Ltd.	SIR-S300 MAIN B/D	N/A
Front Board	HUMAX Co., Ltd.	SIR-S70 FRONT B/D	N/A
SMPS Board	Dong Yang Instrument Co., Ltd.	PU205D	N/A

3.2 EUT exercise Software

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables, signal generator and peripherals for termination.

This model SIR-S300W has video/audio output terminals in RCA-type plugs, Satellite antenna input, TV antenna input and RF output terminal. Therefore, every measurement was investigated in the operation modes.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Digital Satellite Receiver (EUT)	N/A	N/A	-
15.0" LCD TV Receiver	N	N	1.5(P), 1.2(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Digital Satellite Receiver (EUT)	N	N/A	Y	PC END
15.0" LCD TV Receiver	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

"There were no Modified items during EMI test"

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

3.6 Configuration of Test System

3.6.1 Line Conducted Test

The EUT was connected to LISN, all supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

3.6.2 Radiated Emission Test

Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

3.6.3 Output Signal Level Test

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at 3 and 4 channel connecting directly to a spectrum analyzer with 50ohm input impedance via 75-to-50ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75ohm system.

Data conversion method is as follows.

$$V_{75}[uV] = 10^{(Vr + CF)/20}[uV]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,

Vr : Voltage read at analyzer with 50ohm input-impedance in dBuV,

CF : Conversion Factor of the matching pad in dB.

3.6.4 Output Terminal Conducted Spurious Emission test

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at 3 and 4 channel.

Data conversion method is as follows.

$$V_{75}[uV] = 10^{(Vr + CF + AT)/20}[uV]$$

here, V_{75} :Voltage at the RF-out terminal of 75ohm in uV,

V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,

CF : Conversion Factor of the matching pad in dB,

AT : Attenuation of attenuator in dB.

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

3.6.5 Transfer Switch Isolation Test

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Data conversion method is as follows.

$$V_{75}[uV] = 10^{(Vr + CF - PG + AT)/20}[uV]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,

V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,

CF : Conversion Factor of the matching pad in dB,

PG : Gain of pre-amplifier in dB,

AT: Attenuation of attenuator in dB.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated.

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

5. FINAL RESULT OF MEASURMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 38 % Temperature: 20 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)

Type of Test : CLASS B

Result : PASSED BY –3.69 dB at 9.75 MHz under average detector mode

EUT : Digital Satellite Receiver Date: February 20, 2004

Operating Condition : CH. 3

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
1.65	N	44.13	56.00	-11.87
3.50	N	46.36	56.00	-9.64
6.01	H	49.46	60.00	-10.54
6.08	N	48.96	60.00	-11.04
9.75	H	51.80	60.00	-8.20
12.09	H	47.24	60.00	-12.76
Frequency (MHz)	**Line**	**Average (dBuV)**		**Margin (dB)**
		Emission level	**Limits**	
3.50	N	33.75	46.00	-12.25
6.08	N	36.69	50.00	-13.31
9.75	H	46.31	50.00	-3.69
12.09	H	44.16	50.00	-5.84

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

See next page for an overview sweep performed with peak and average detector.

Tested by: Sue-Yong, Lee / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

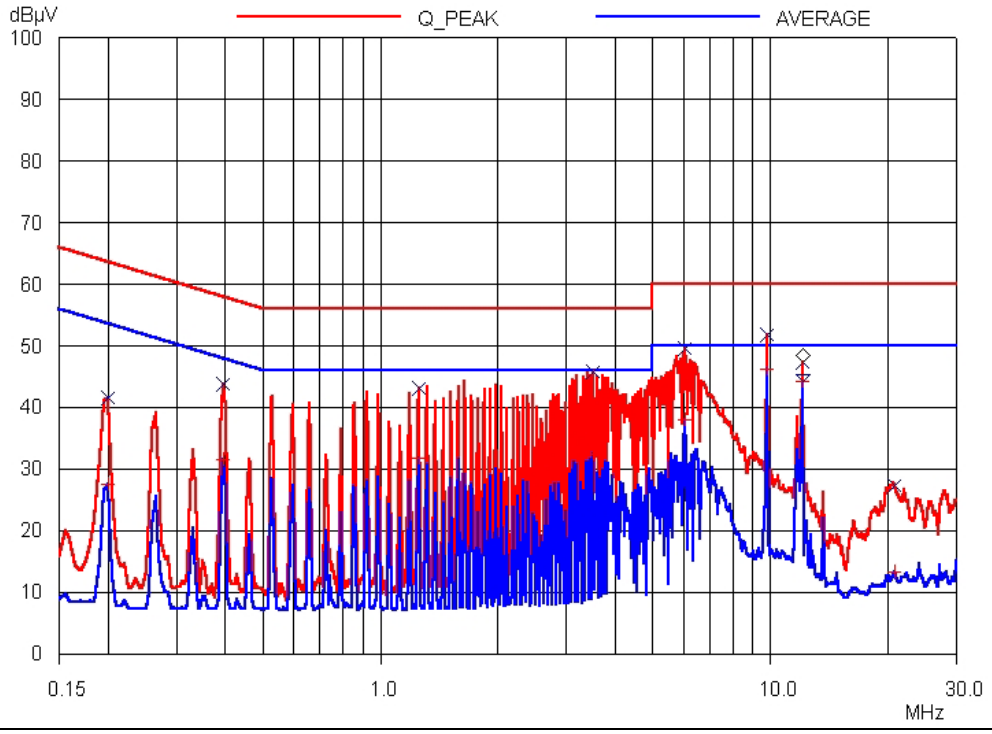

HOT LINE

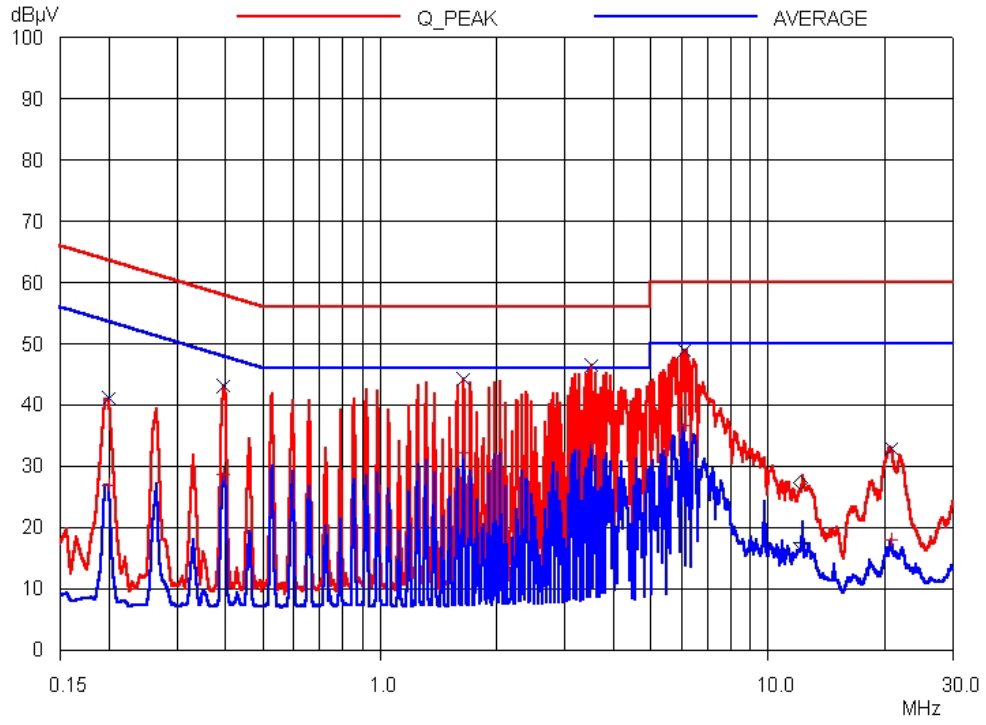

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 52 % Temperature : 17 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B, Section 15.109 (a)
Type of Test : TV INTERFACE DEVICE
Result : PASSED BY –3.40 dB at 828.47 MHz

EUT : Digital Satellite Receiver Date: March 02, 2004
Operating Condition : CH. 3
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
61.01	16.69	V	9.23	0.98	26.90	40.00	-13.10
86.20	21.26	V	7.74	1.10	30.10	40.00	-9.90
177.29	12.60	H	15.96	1.44	30.00	43.50	-13.50
312.95	16.60	H	14.62	2.08	33.30	46.00	-12.70
504.83	15.49	H	17.52	2.69	35.70	46.00	-10.30
534.87	17.60	V	17.74	2.75	38.09	46.00	-7.91
657.93	11.96	V	20.23	3.11	35.30	46.00	-10.70
828.47	16.91	H	21.93	3.76	42.60	46.00	-3.40
886.61	11.11	H	22.38	3.91	37.40	46.00	-8.60
886.61	11.11	H	22.38	3.91	37.40	46.00	-8.60
929.25	9.44	V	22.82	4.04	36.30	46.00	-9.70

Radiated Emission Tabulated Data

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

5.3 Output Terminal Signal Level Test

The following table shows that the all modes of operation and worst-case emissions were investigated

Humidity Level : 45 % Temperature : 20 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER Date: March 10, 2004

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

-. Video signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	61.26	47.7	6.0	484.2	3000	-15.84
4	67.25	47.8	6.0	489.8	3000	-15.74

-. Audio signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	50.75	34.1	6.0	101.2	671	-16.43
	65.78	34.5	6.0	105.9	671	-16.04
4	62.74	34.2	6.0	102.3	671	-16.33
	71.76	34.3	6.0	103.5	671	-16.24

MP = Impedance Matching Pad

*Sample Calculation at 61.26MHz = $10^{[(47.7+6.0)/20]}$ = 484.2uV

*Margin [dB] = 20 log (R/L) where, R : Signal Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

5.4 Output Terminal Conducted Spurious Emissions Test

The following table shows that frequency range of 30MHz to 1000MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.

Humidity Level : 45 % Temperature : 20 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER Date: March 10, 2004

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Reading (dBuV)	M/P Loss (dB)	Output Level(uV)	Limit (uV)	Margin (dB)
3	37.8	2.7	6.00	2.72	95.00	-30.87
	74.6	3.1	6.00	2.85	95.00	-30.46
	84.3	2.3	6.00	2.60	95.00	-31.25
	184.2	4.6	6.00	3.39	95.00	-28.95
4	43.6	4.3	6.00	3.27	95.00	-29.26
	53.3	2.4	6.00	2.63	95.00	-31.16
	90.1	3.7	6.00	3.06	95.00	-29.84
	201.7	3.8	6.00	3.09	95.00	-29.76

* Sample Calculation at 37.8MHz = $10^{[(2.7 + 6.0)/20]}$ = 2.72uV

*Margin [dB] = 20 log (R/L) where, R : Output Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

5.5 Transfer Switch Isolation Test

The following table shows that the maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Humidity Level : 45 % Temperature : 20 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER Date: March 10, 2004

Detector : Span : 1 MHz SWP : 30 msec
RBW : 10 kHz VBW : 30 kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Meter Reading (dBuV)	M/P Loss (dB)	Preamp Gain(dB)	Attn. (dB)	Signal Level (uV)	Limit (uV)	Margin (dB)
"There was no found any emission during the above test"								

Note : To clarify the emissions emanated from RF output terminal the EUT, RF pre-amplifier was utilized.
The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain.

Tested by: Sue-Yong, Lee / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+	Meter reading	(dBuV)
+	Cable Loss	(dB)
+	Antenna Factor (Loss)	(dB/meter)
=	Corrected Reading	(dBuV/meter)
-	Specification Limit	(dBuV/meter)
=	dB Relative to Spec	(+/- dB)

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	NOV/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/03	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	MAY/03	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	MAY/03	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAY/03	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAY/03	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/03	12MONTH	■
				9109-4444	JUL/03		
		Schwarzbeck	VHA9103	91031852	JAN/04		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3214	JUL/03		■
				9109-3217	MAY/03		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		
10.	LISN	EMCO	3825/2	9109-1867	AUG/03	12MONTH	■
				9109-1869	OCT/03		■
11.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

It should not be reproduced except in full, without the written approval of ONETECH.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea (TEL: +82-31-746-8500, FAX: +82-31-746-8700)
EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)