



Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

info@ComplianceTesting.com

Test Report

Prepared for: Shenzhen Huaptec Co., Ltd

Model: F10G-CP

Description: Dual Band, 60db

Serial Number: F10G-CP140805003

FCC ID: OWWF10G-CP

To

FCC Part 20

Date of Issue: September 18, 2014

On the behalf of the applicant:

**Shenzhen Huaptec Co., Ltd.
5th FL, E BLDG, Sogood Science Park
Hangkong Road
Xixiang, Bao'an Shenzhen 518102
China**

To the attention of:

**Yanwei Wang, General Manager
Ph: 86-755-61196866
Email: info@huaptec.com**

**Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1470017**

**Mike Graffeo
Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	September 5, 2014	Mike Graffeo	Original Document

Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	5
Test Result Summary	6
Authorized Frequency Band	7
Maximum Power and Gain	10
Intermodulation	12
Out-of-Band Emissions	15
Conducted Spurious Emissions	29
Noise Limits	38
Uplink Inactivity	45
Variable Gain	47
Occupied Bandwidth	50
Oscillation Detection	63
Radiated Spurious	71
Test Equipment Utilized	74

ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A

Test and Measurement Data

Sub-part

2.1033(c)(14):

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Part 2, Subpart J and the following individual Parts: 20.21 in conjunction with latest version of KDB 935210.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
24.9 – 28.7	37.9 – 51.3	963.9 – 971.3

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

Model: F10G-CP

Description: Dual Band, 60db

Serial Number: F10G-CP140805003

Additional Information:

The EUT is an In-Building fixed install, bi-directional amplifier for the boosting of cellular phone signals and data communication devices.

The following frequency bands and emission types are utilized.

Frequency Band (MHz)		
Uplink	824 - 849	1850 - 1910
Downlink	869 - 894	1930 - 1990
Modulation Type	GSM, CDMA, EDGE, HSPA, EVDO, LTE	

Emission Designators					
CDMA	HSPA	LTE	EVDO	EDGE	GSM
F9W	F9W	G7D	F9W	G7W	GXW

The modulation types and emission designators listed in the tables represent the modulations that the cell phone providers use for each frequency band. GSM, CDMA, and WCDMA represent all the modulation types (phase and amplitude or a combination thereof) utilized within the industry. EDGE, HSPA, LTE etc. are all protocols or multiplexing techniques using the base modulations.

EUT Operation during Tests

The EUT was in a normal operating condition.

Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
20.21(e)(3)	Authorized Frequency Band	Pass	
20.21(e)(8)(i)(B) 20.21(e)(8)(i)(C) 20.21(e)(8)(i)(D)	Maximum Power and Gain	Pass	
20.21(e)(8)(i)(F)	Intermodulation	Pass	
20.21(e)(8)(i)(E)	Out-of-Band Emissions	Pass	
2.1051 22.917(a) 24.238(a)	Conducted Spurious Emissions	Pass	
20.21(e)(8)(i)(A)	Noise Limits	Pass	
20.21(e)(8)(i)(I)	Uplink Inactivity	Pass	
20.21(e)(8)(i)(C)(1) 20.21(e)(8)(i)(H) 20.21(e)(8)(i)(C)(2)(i) (Fixed)	Variable Gain	Pass	
2.1049	Occupied Bandwidth	Pass	
20.21(e)(8)(ii)(A)	Oscillation Detection	Pass	
2.1053	Radiated Spurious	Pass	
20.21(e)(8)(i)(B)	Spectrum Block Filtering	N/A	This only applies to devices utilizing spectrum block filtering

Authorized Frequency Band

Engineer: Mike Graffeo


Test Date: 8/22/2014

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a CW input signal tuned to the center channel of the operational band.


The RF input level was increased to a point just prior to the AGC being in control of the power, then reduced 3 dB. The Signal generator was set to sweep across 2X the operational band of the EUT while the spectrum analyzer was set to MAX HOLD. Two markers were placed at the edges of the operational band and a third marker was placed at the highest point within the band no closer than 2.5 MHz from the band edge.

Test Setup




Uplink Test Results

824 - 849 MHz Band

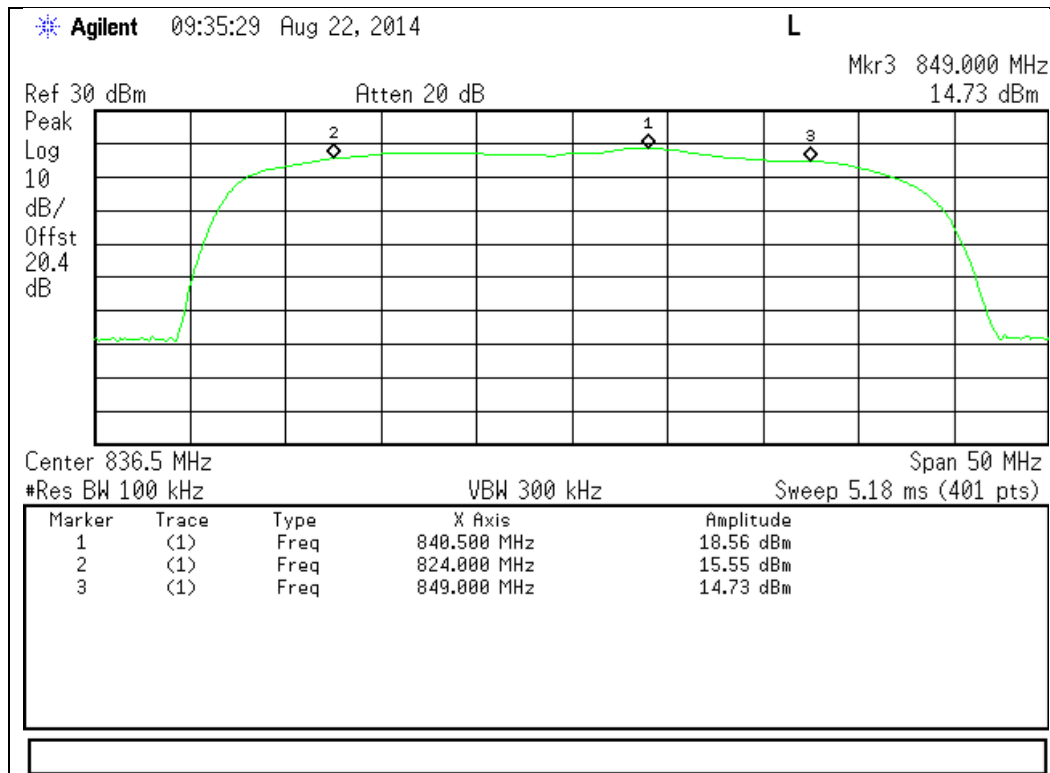


1850 - 1910 MHz Band

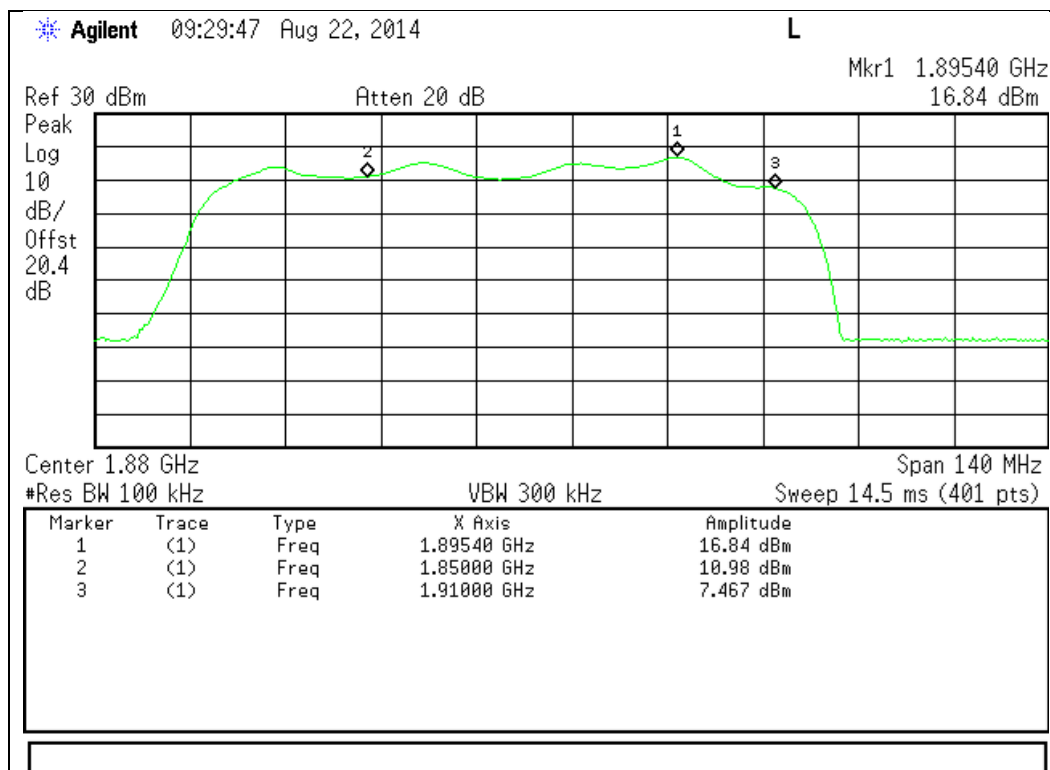


Downlink Test Results

869 - 894 MHz Band

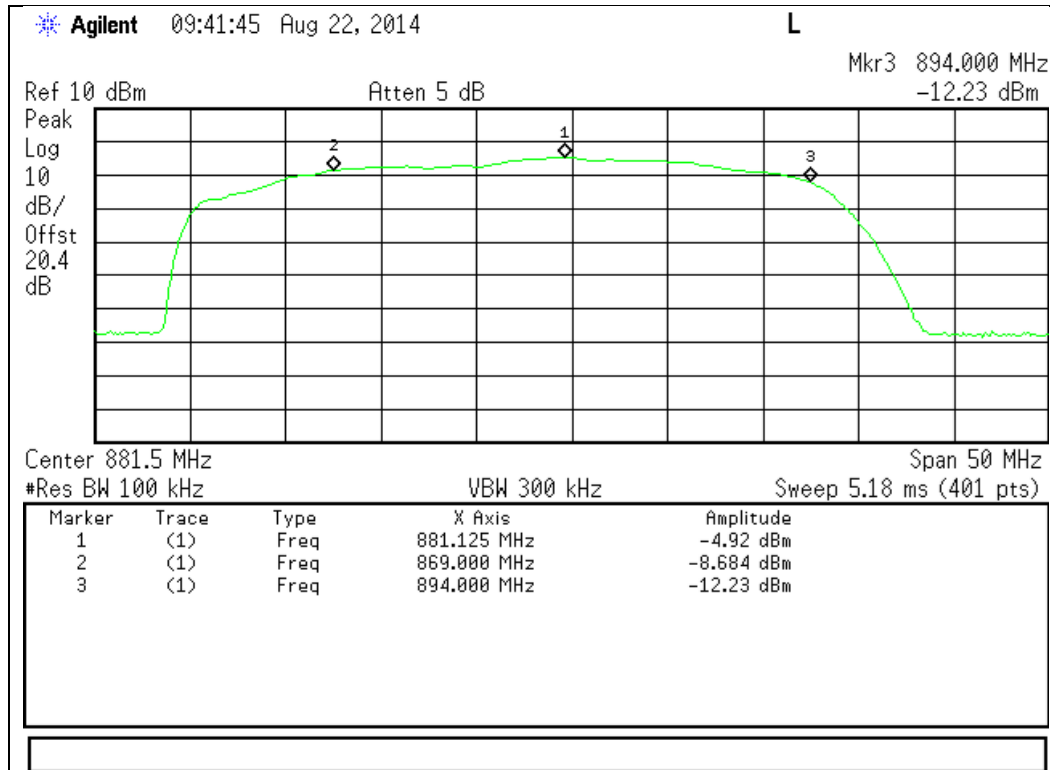

1930 - 1990 MHz Band

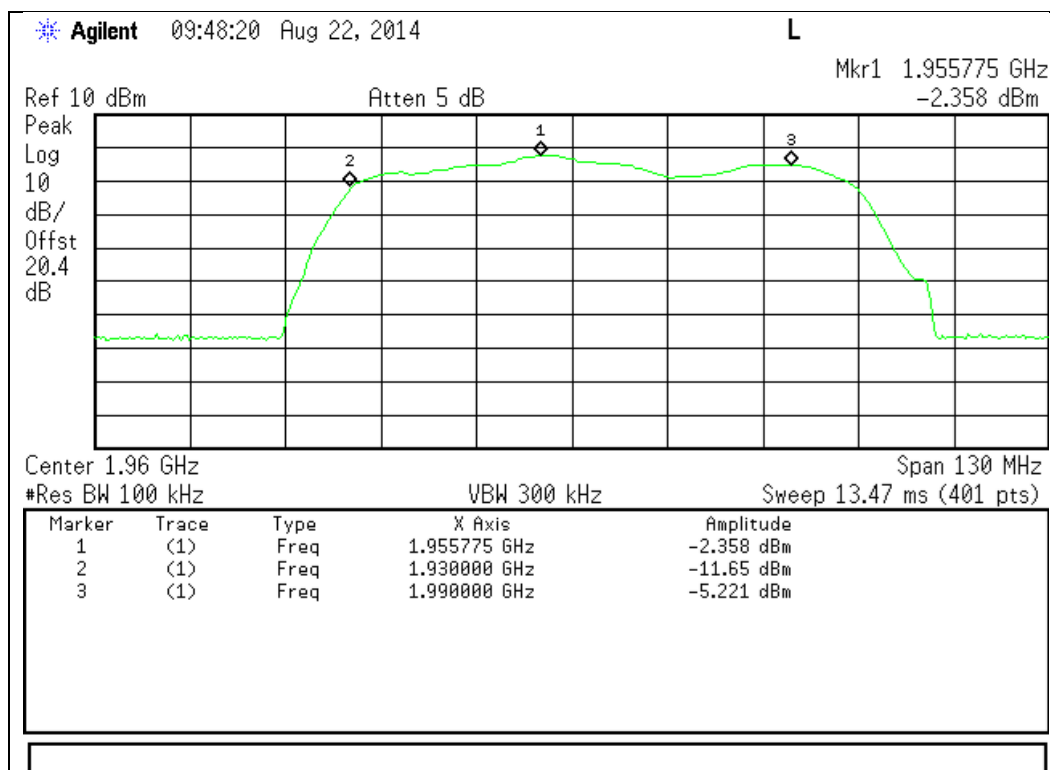

Maximum Power and Gain

Engineer: Mike Graffeo

Test Date: 8/22/2014

Test Procedure


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. The spectrum analyzer and signal generator were tuned to the frequency with the highest power level in the band, as determined by the Authorized Frequency Band test. The RF input level was increased to a point just prior to the AGC being in control of the power for both pulsed single time slot GSM modulation and 4.1 MHz AWGN modulation. The maximum power was measured and verified to meet the minimum and maximum levels allowed, with the maximum gain being computed from these values. The uplink and downlink gain under each condition were verified to be within 9 dB of each other.

For Fixed installations the following formula was used for calculating the gain limits.

$$\text{Gain Limit (dB)} = 6.5 \text{ dB} + 20\text{Log}(F_{\text{MHz}})$$

F_{MHz} is the uplink mid-band frequency with the downlink gain limit being equivalent to the paired Uplink band gain limit.

Test Setup



Uplink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Lower Limit (dBm)	Upper Limit (dBm)	Result
824 - 849 MHz Pulsed GSM	-36.70	18.58	17	30	Pass
824 - 849 MHz AWGN	-37.60	17.90	17	30	Pass
1850 - 1910 MHz Pulsed GSM	-38.70	20.23	17	30	Pass
1850 - 1910 MHz AWGN	-40.00	19.20	17	30	Pass

Downlink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Upper Limit (dBm)	Result
869 - 894 MHz Pulsed GSM	-59.70	-3.87	17	Pass
869 - 894 MHz AWGN	-62.10	-6.95	17	Pass
1930 - 1995 MHz Pulsed GSM	-61.40	-1.08	17	Pass
1930 - 1995 MHz AWGN	-62.90	-2.62	17	Pass

Uplink and Downlink Gain Test Results

Modulation	Uplink Frequency (MHz)	Downlink Frequency (MHz)	Uplink Gain (dB)	Uplink Limit (dB)	Downlink Gain (dB)	Downlink Limit (dB)	Delta (dB)	Limit (dB)	Margin (dB)
Pulsed GSM	840.5	881.13	55.28	64.9	55.8	64.9	0.55	9	-8.45
AWGN	840.5	881.13	55.50	64.9	55.2	64.9	0.35	9	-8.65
Pulsed GSM	1895.4	1955.78	58.93	72	60.3	72	1.39	9	-7.61
AWGN	1895.4	1955.78	59.20	72	60.3	72	1.08	9	-7.92

Intermodulation


Engineer: Mike Graffeo

Test Date: 8/22/2014

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator. Two signal generators were utilized to produce two CW signals 600 kHz apart and centered in the operational band. Attenuator and cable insertion loss correction factors were input to either the signal generator or the spectrum analyzer as required to ensure that accurate measurements were recorded. The input power was set so the booster output power was operating at 0.2 dB below the AGC Threshold and the RMS intermodulation products were measured to ensure they were less than -19 dBm in a 3 kHz RBW. The uplink and downlink intermodulation products were plotted, with the levels being listed in the summary tables.

Test Setup

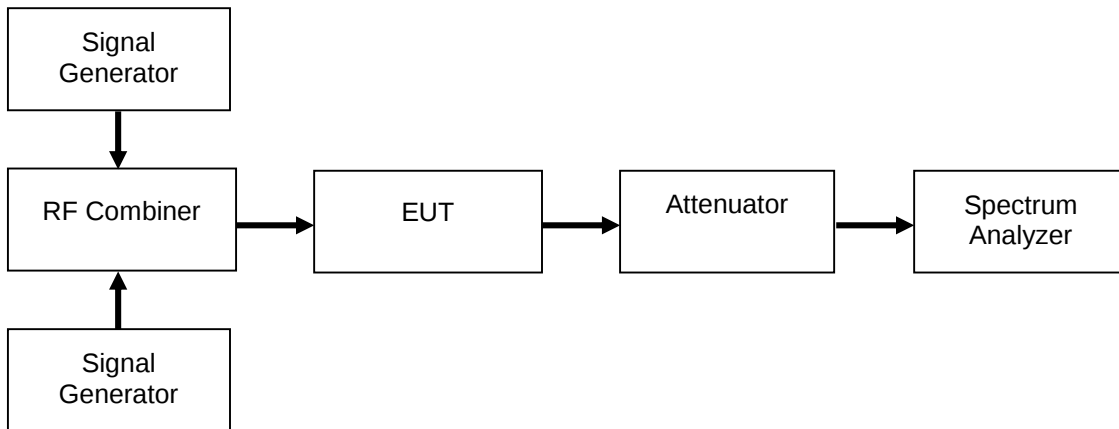

Uplink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
824 - 849 MHz	-30.88	-19	Pass
1850 - 1910 MHz	-35.49	-19	Pass


Downlink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
869 - 894 MHz	-71.41	-19	Pass
1930 - 1990 MHz	-65.81	-19	Pass




Uplink Test Results

824 - 849 MHz Band

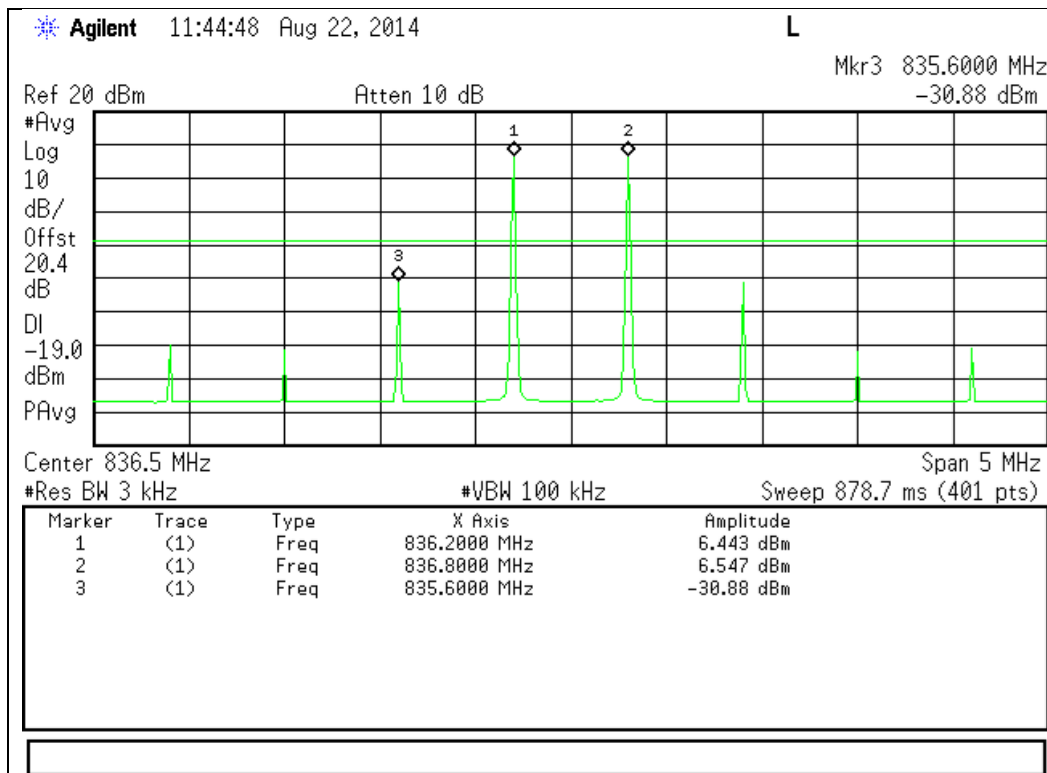


1850 - 1910 MHz Band

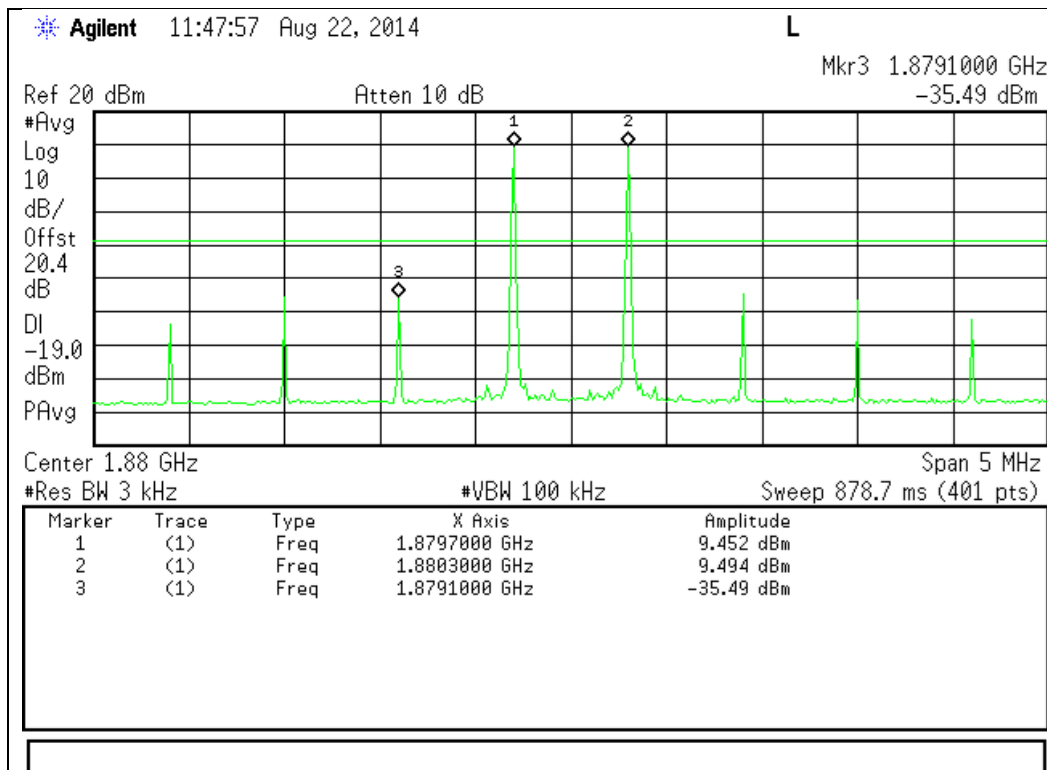




Downlink Test Results

869 - 894 MHz Band

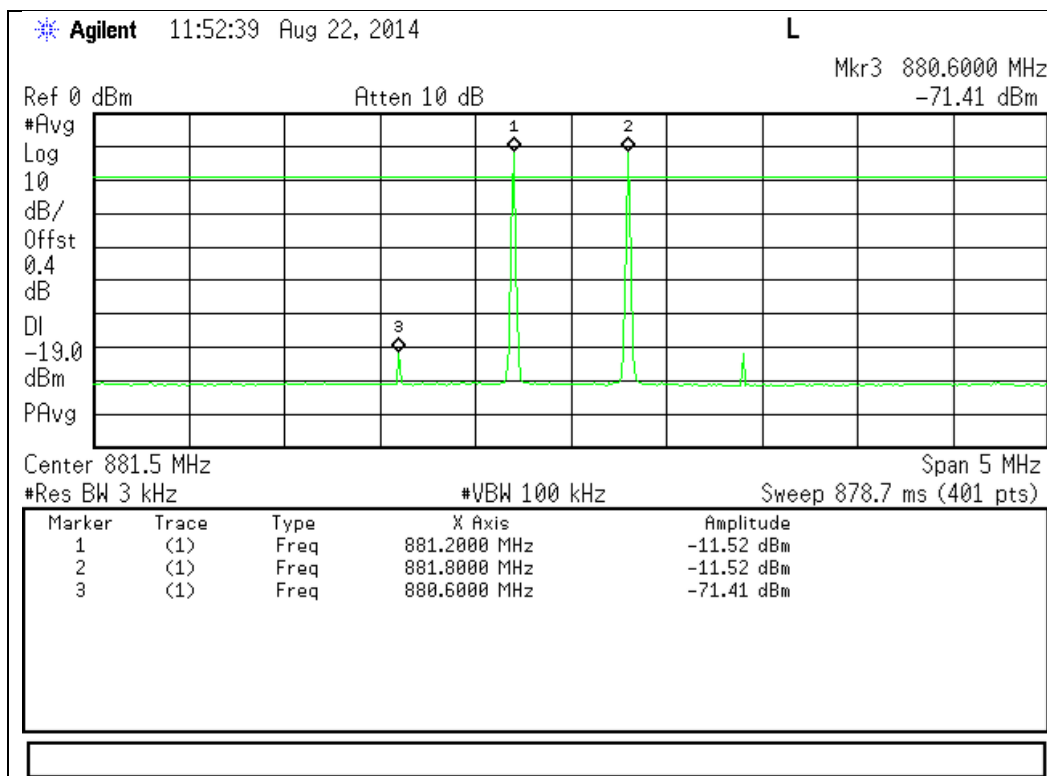

1930 - 1990 MHz Band

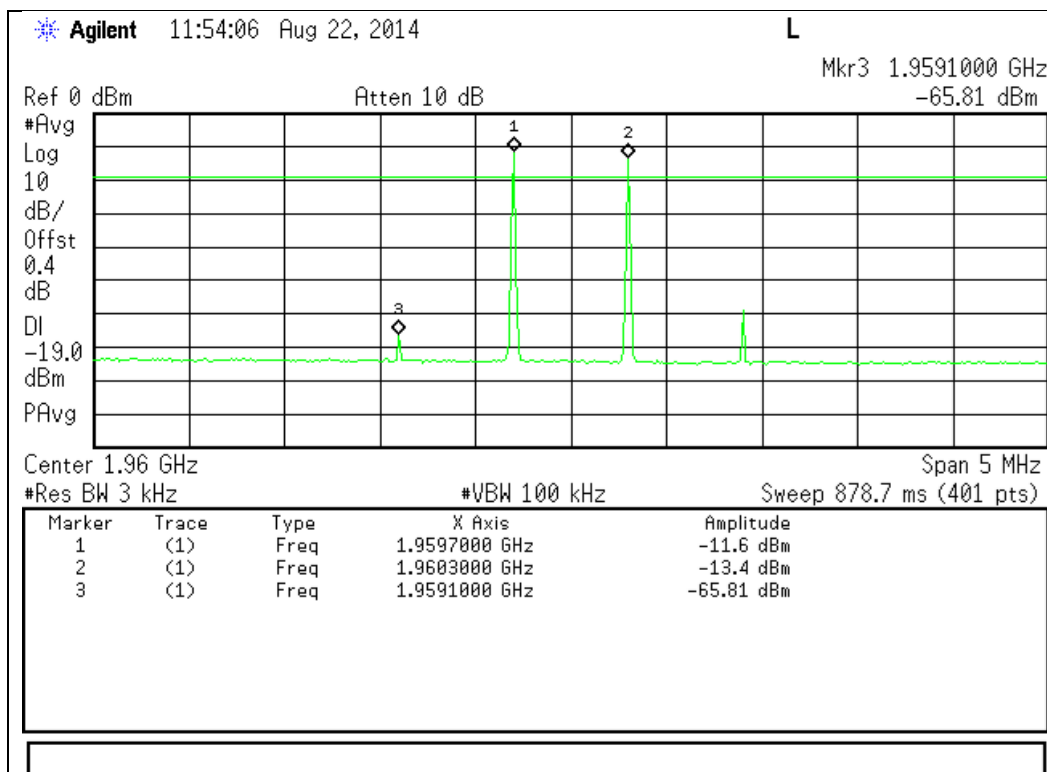

Out-of-Band Emissions

Engineer: Mike Graffeo

Test Date: 8/22/2014

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the lowest allowable upper and lower channel within the EUT operational band for each respective modulation type. The RF input level was increased to a point just prior to the AGC being in control of the power. For each modulation type the Out of Band Emissions were measured to ensure they met the limits.


The following formula was used for calculating the limits:

$$\text{Limit} = P1 - 6 - (43 + 10\text{Log}(P2)) = -19\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

Test Setup



GSM Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-39.22	-19	Pass
824 - 849	Upper	-39.49	-19	Pass
1850 - 1915	Lower	-39.35	-19	Pass
1850 - 1915	Upper	-61.67	-19	Pass

CDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-48.85	-19	Pass
824 - 849	Upper	-45.59	-19	Pass
1850 - 1915	Lower	-48.60	-19	Pass
1850 - 1915	Upper	-55.87	-19	Pass

WCDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-41.26	-19	Pass
824 - 849	Upper	-42.00	-19	Pass
1850 – 1910	Lower	-42.42	-19	Pass
1850 – 1910	Upper	-47.58	-19	Pass

GSM Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-60.21	-19	Pass
869 - 894	Upper	-61.69	-19	Pass
1930 – 1990	Lower	-62.29	-19	Pass
1930 – 1990	Upper	-63.30	-19	Pass

CDMA Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-54.93	-19	Pass
869 - 894	Upper	-56.39	-19	Pass
1930 – 1990	Lower	-55.99	-19	Pass
1930 – 1990	Upper	-56.74	-19	Pass

WCDMA Downlink Test Results


Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-48.08	-19	Pass
869 - 894	Upper	-48.48	-19	Pass
1930 – 1990	Lower	-48.65	-19	Pass
1930 – 1990	Upper	-49.39	-19	Pass




GSM Uplink Test Plots

824 - 849 MHz Band

Lower Band Edge

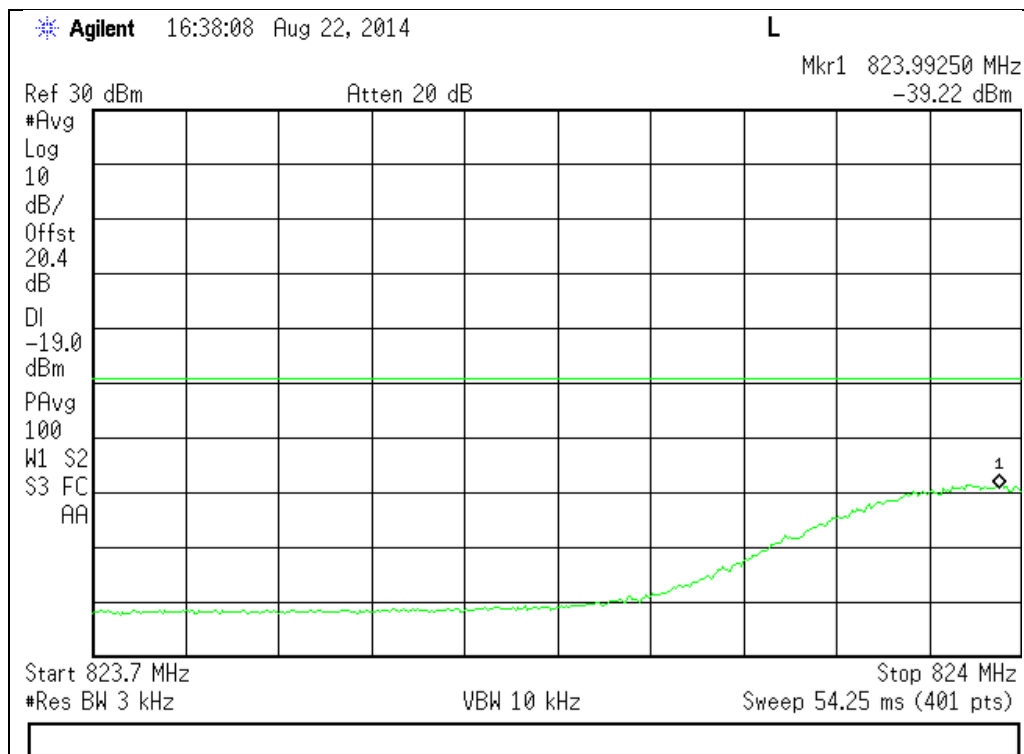


Upper Band Edge

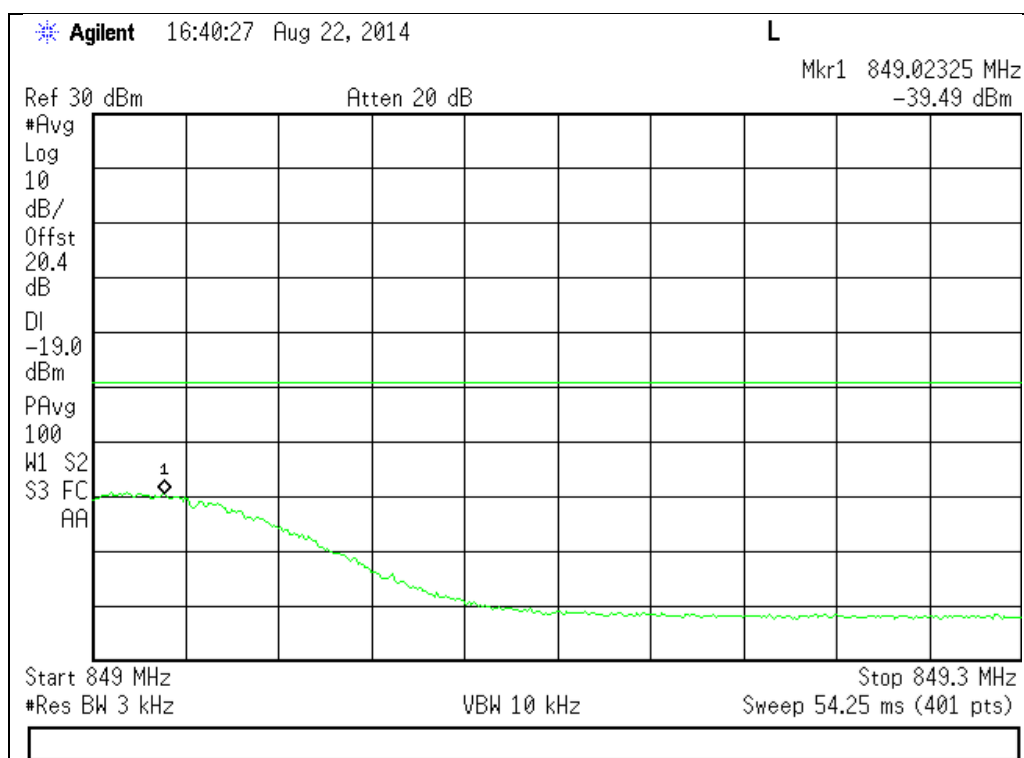


1850 - 1910 MHz Band

Lower Band Edge

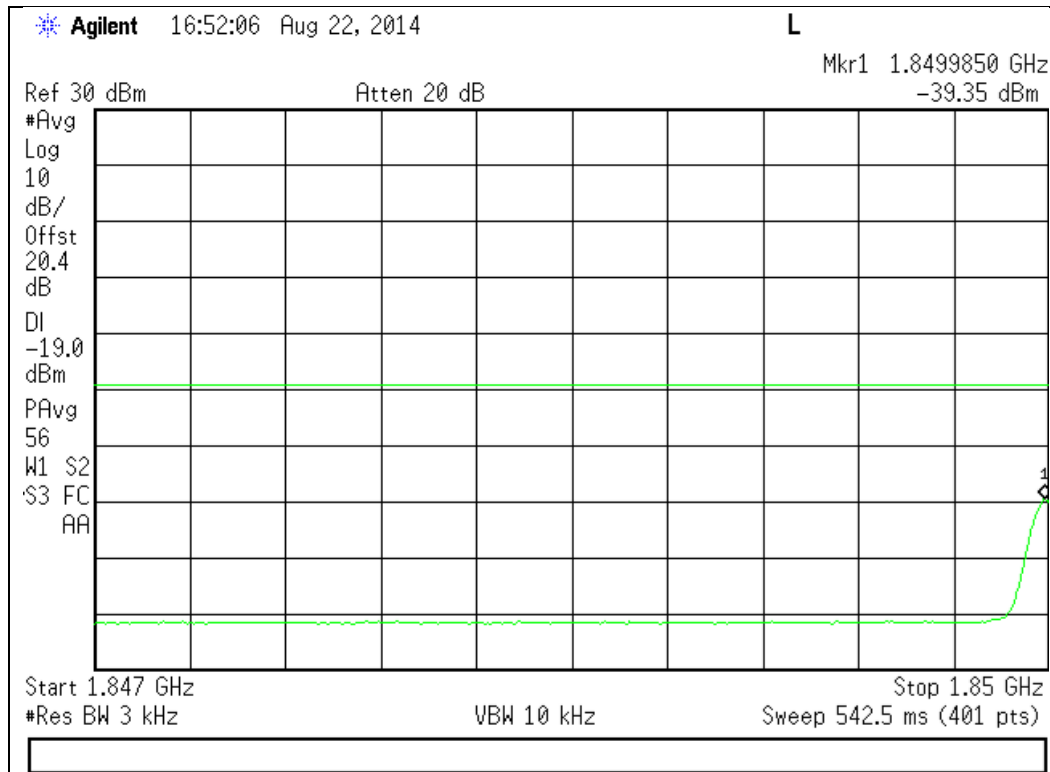


Upper Band Edge

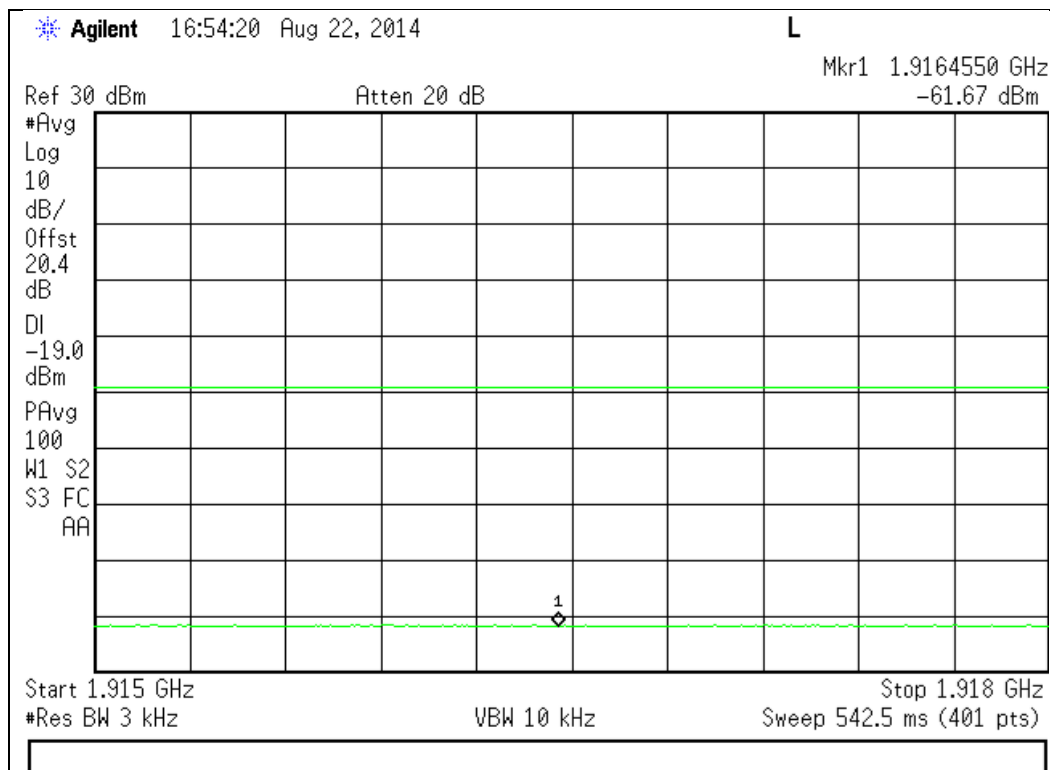


CDMA Uplink Test Plots

824 - 849 MHz Band

Lower Band Edge

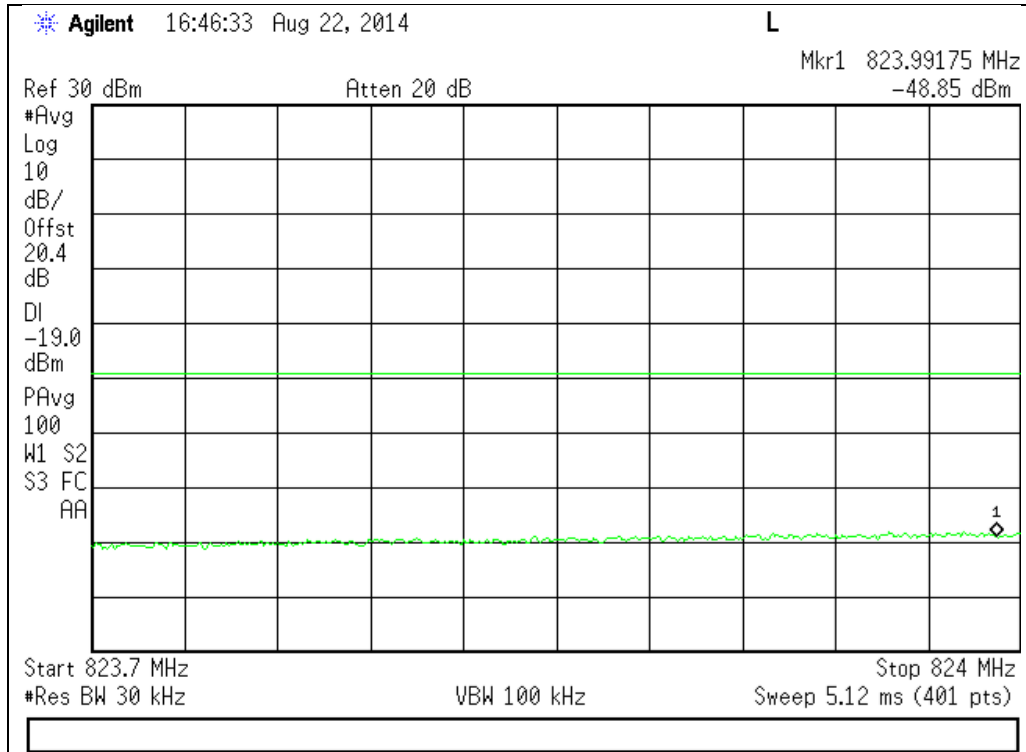


Upper Band Edge

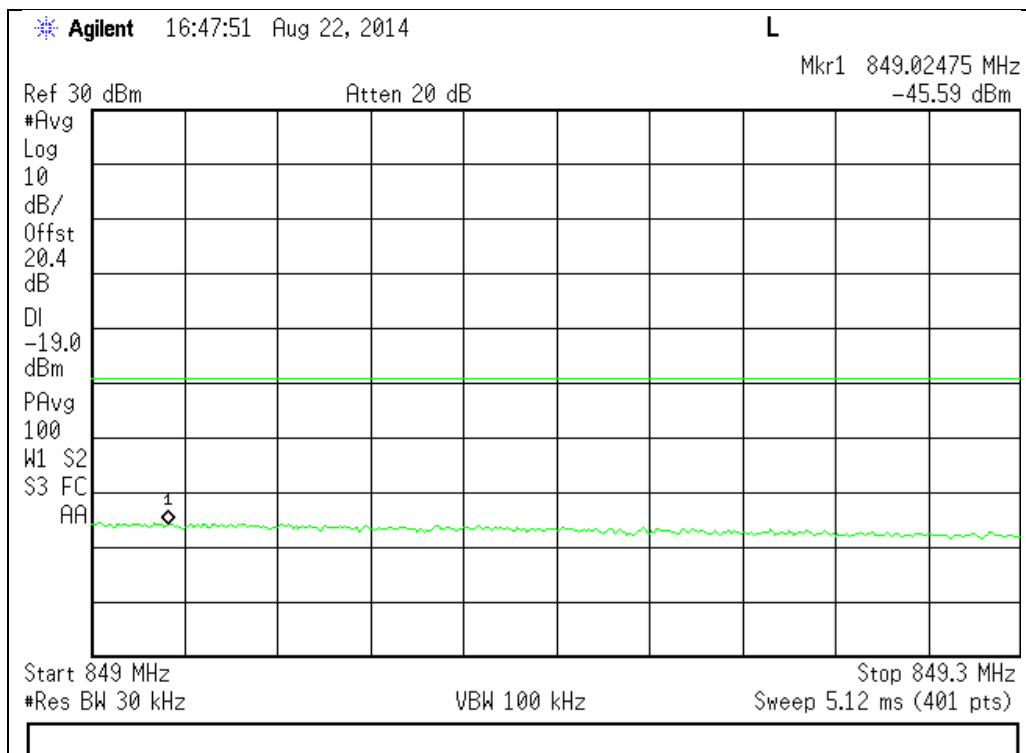


1850 - 1910 MHz Band

Lower Band Edge

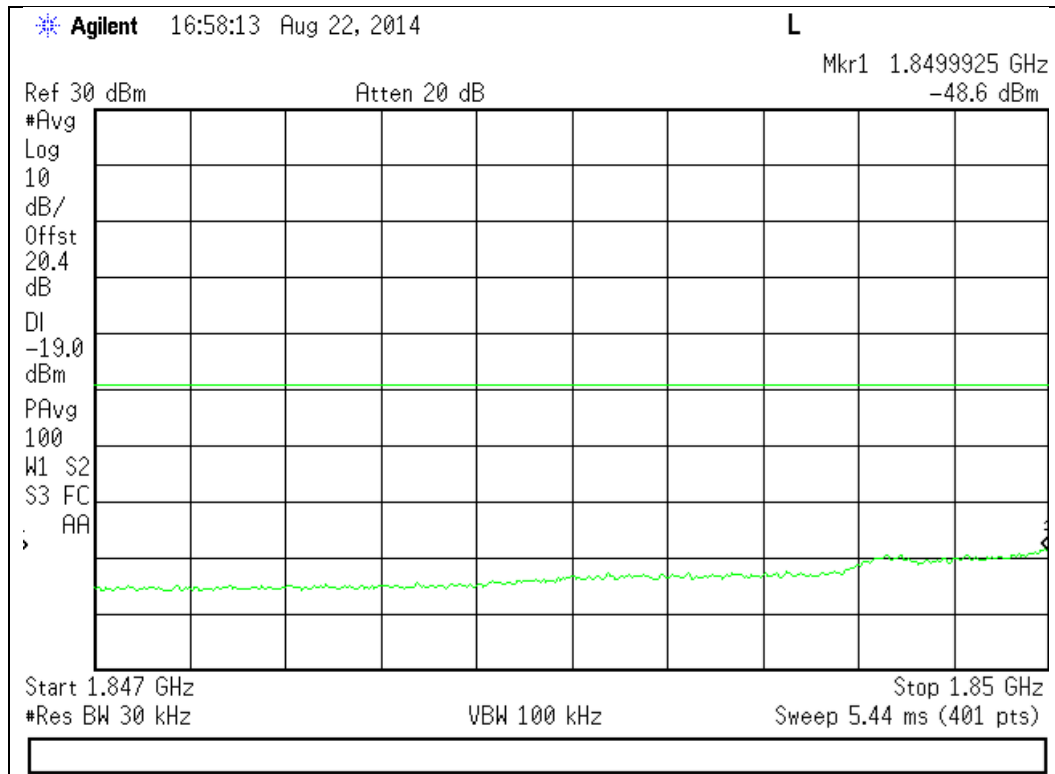


Upper Band Edge

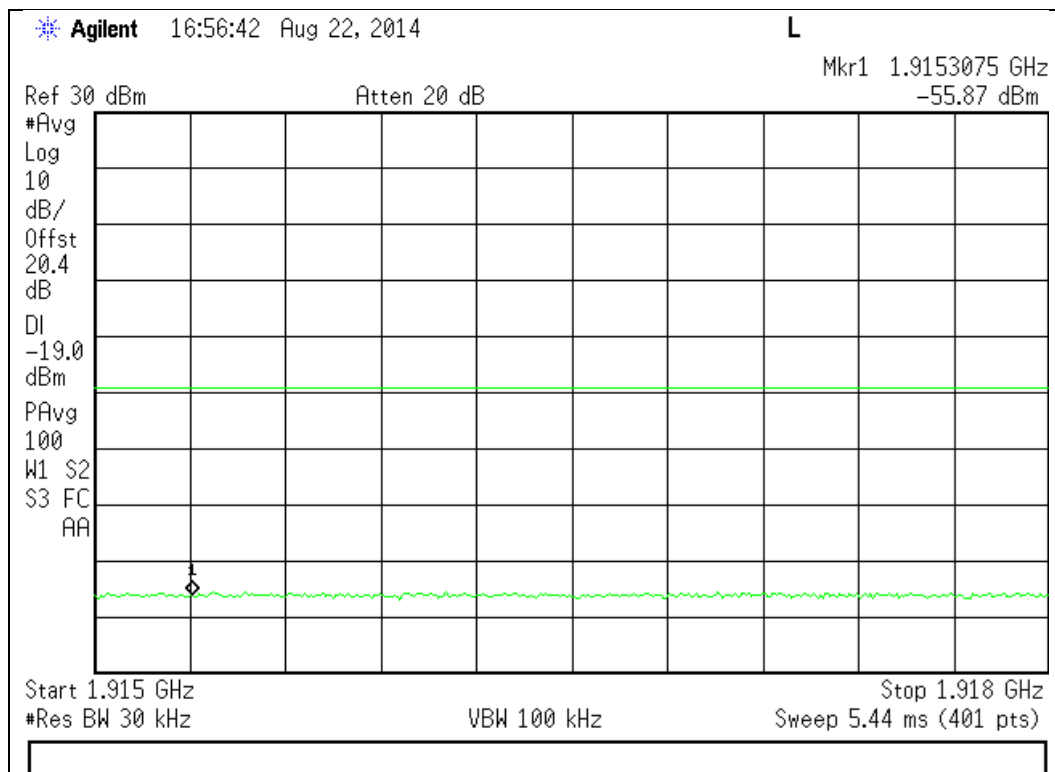


W-CDMA Uplink Test Plots

824 - 849 MHz Band

Lower Band Edge

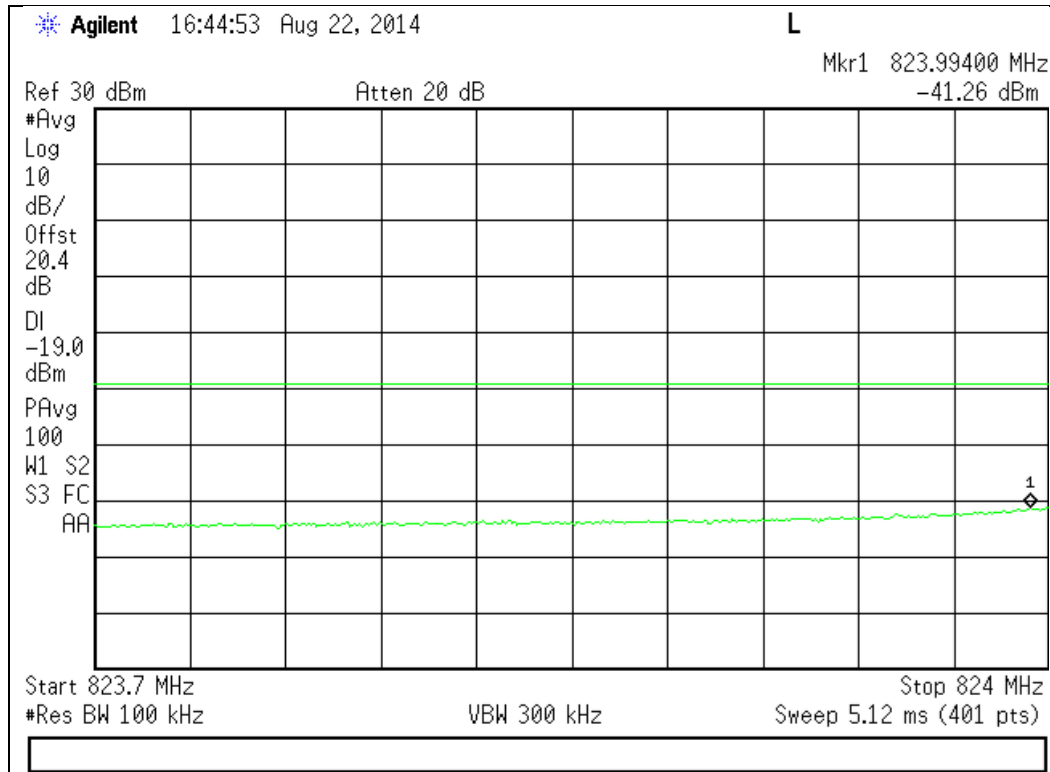


Upper Band Edge

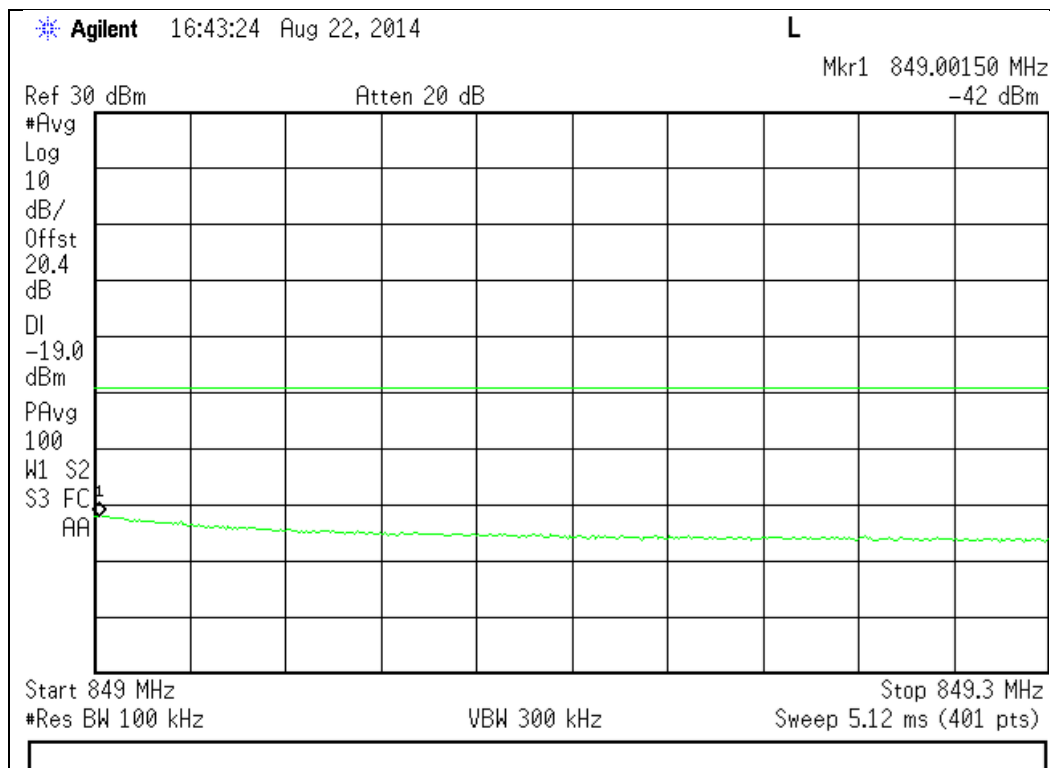


1850 - 1910 MHz Band

Lower Band Edge

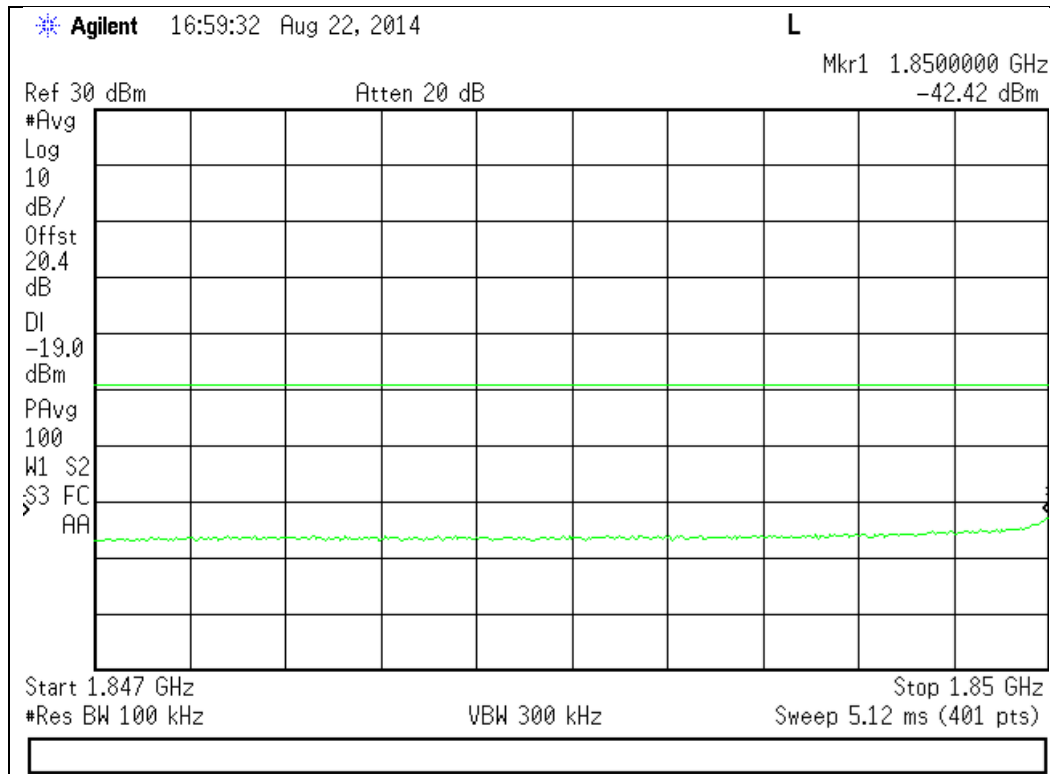


Upper Band Edge

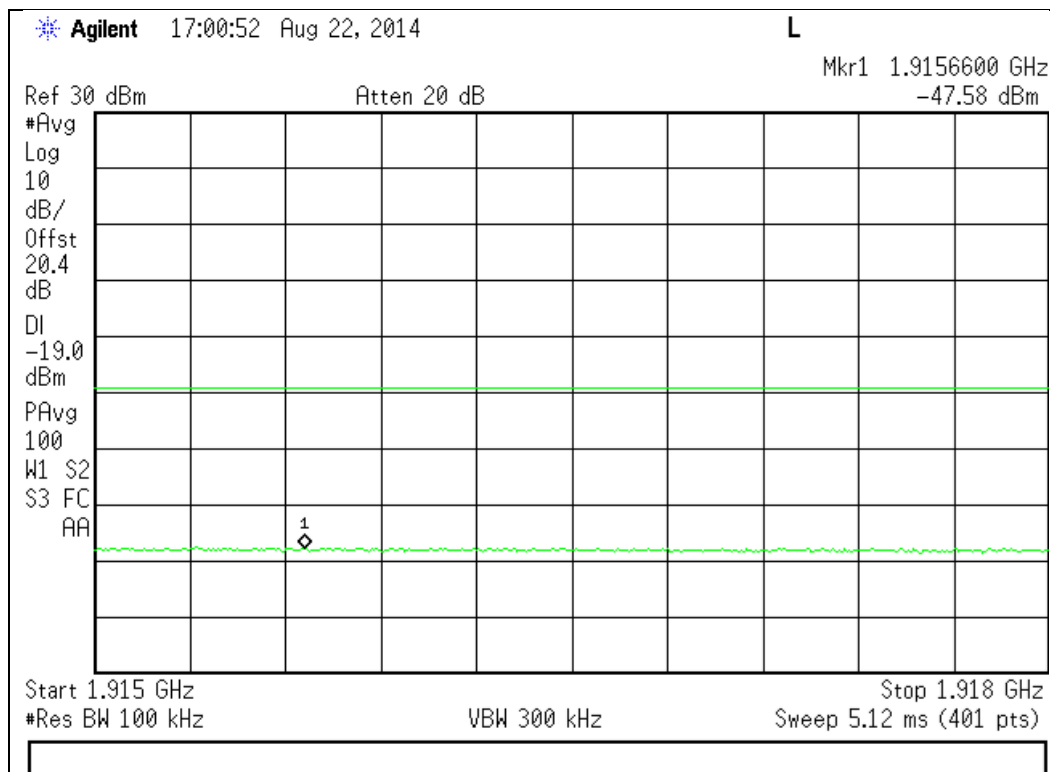


GSM Downlink Test Plots

869 - 894 MHz Band

Lower Band Edge

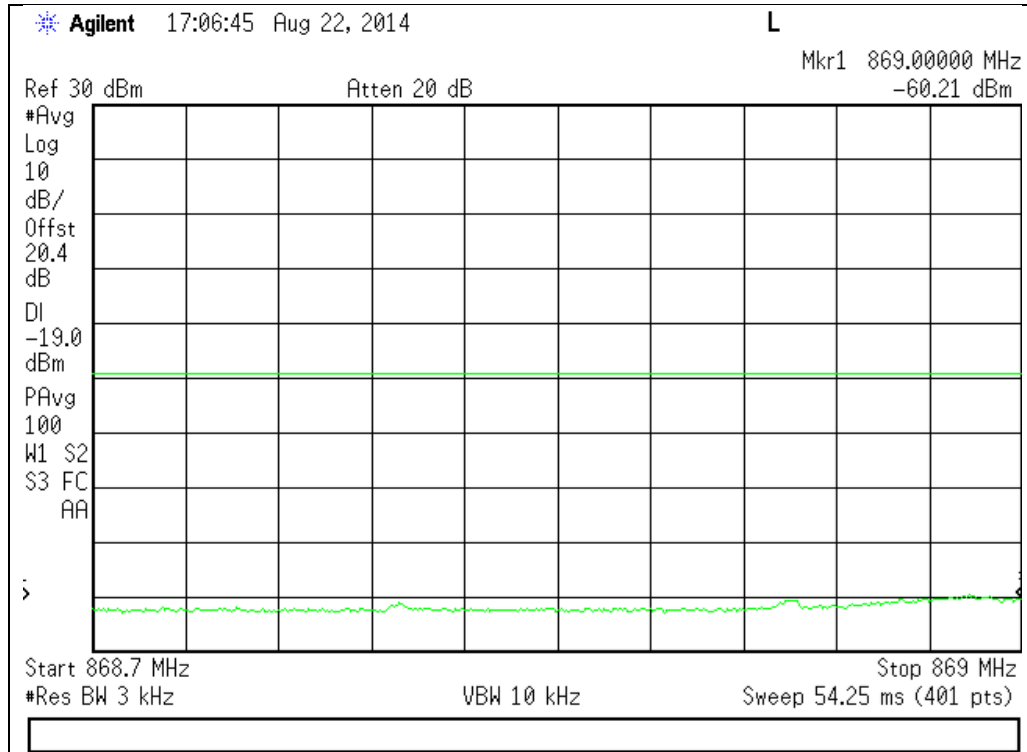


Upper Band Edge

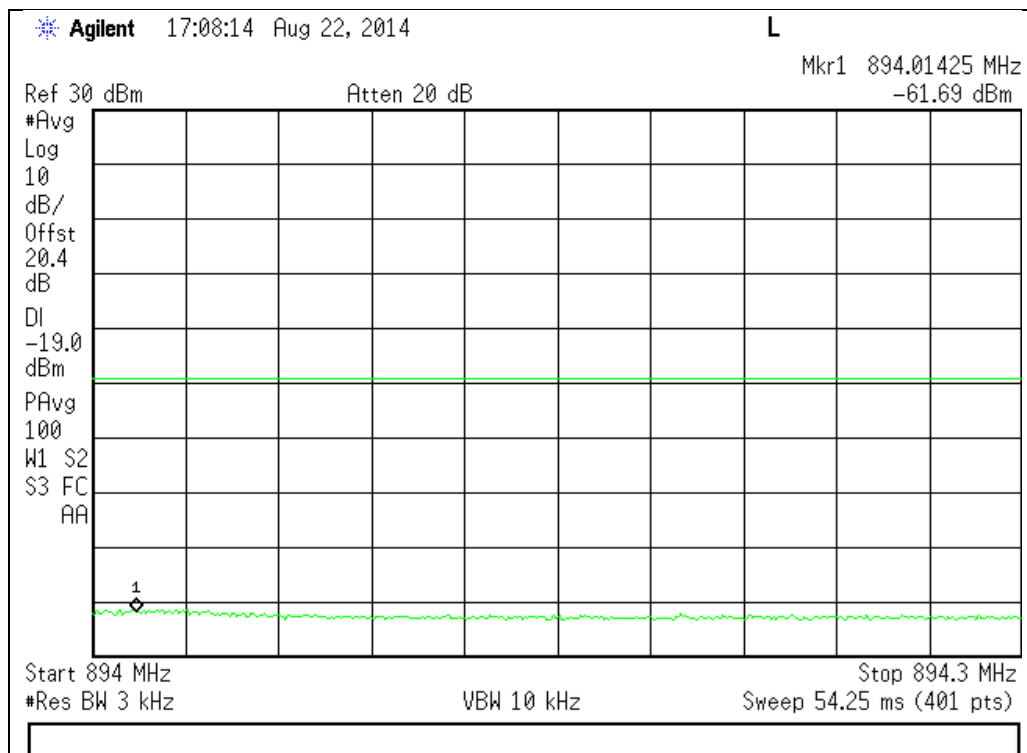




1930 - 1990 MHz Band

Lower Band Edge

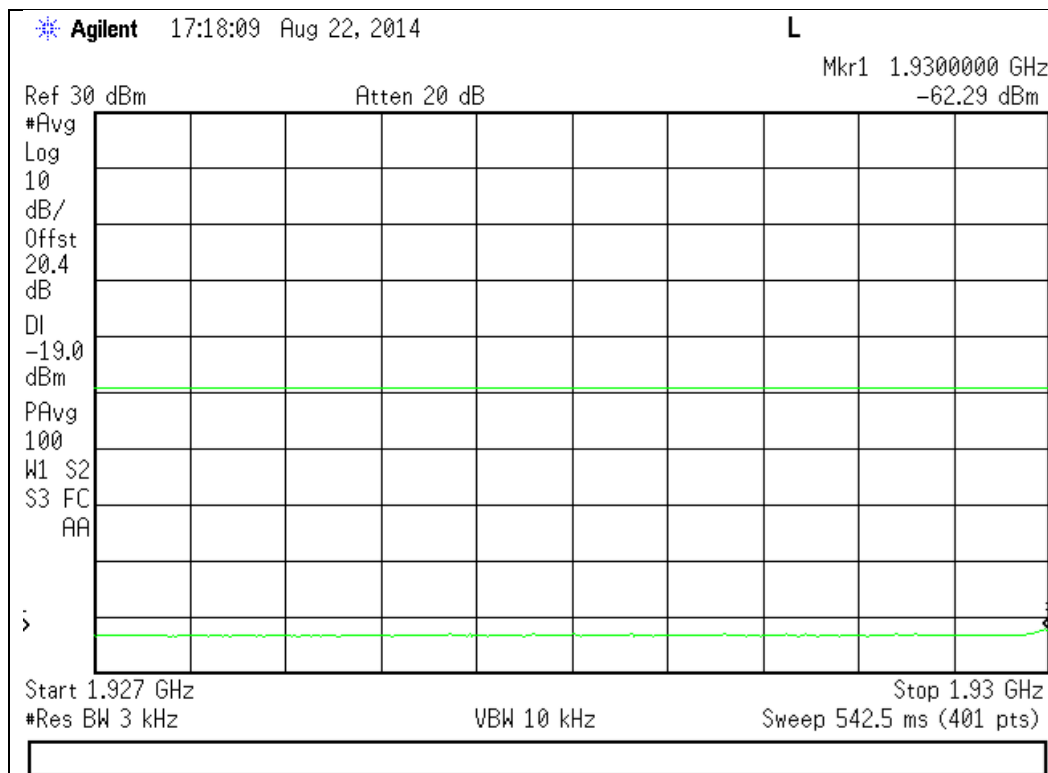


Upper Band Edge

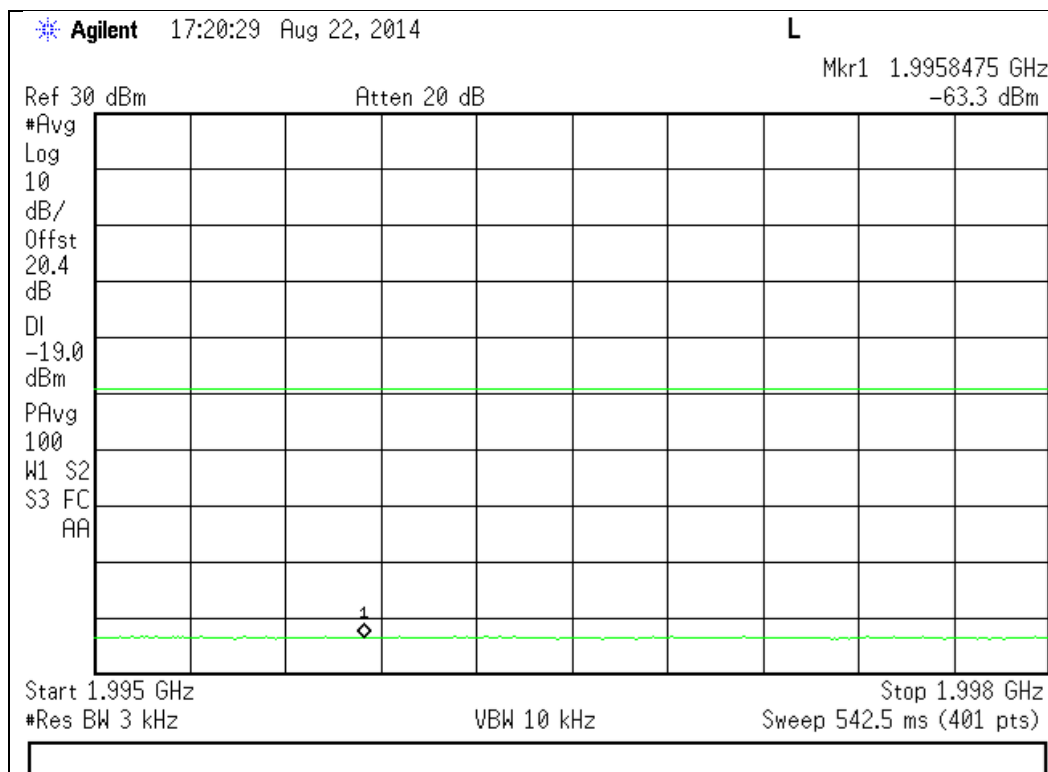


CDMA Downlink Test Plots

869 - 894 MHz Band

Lower Band Edge

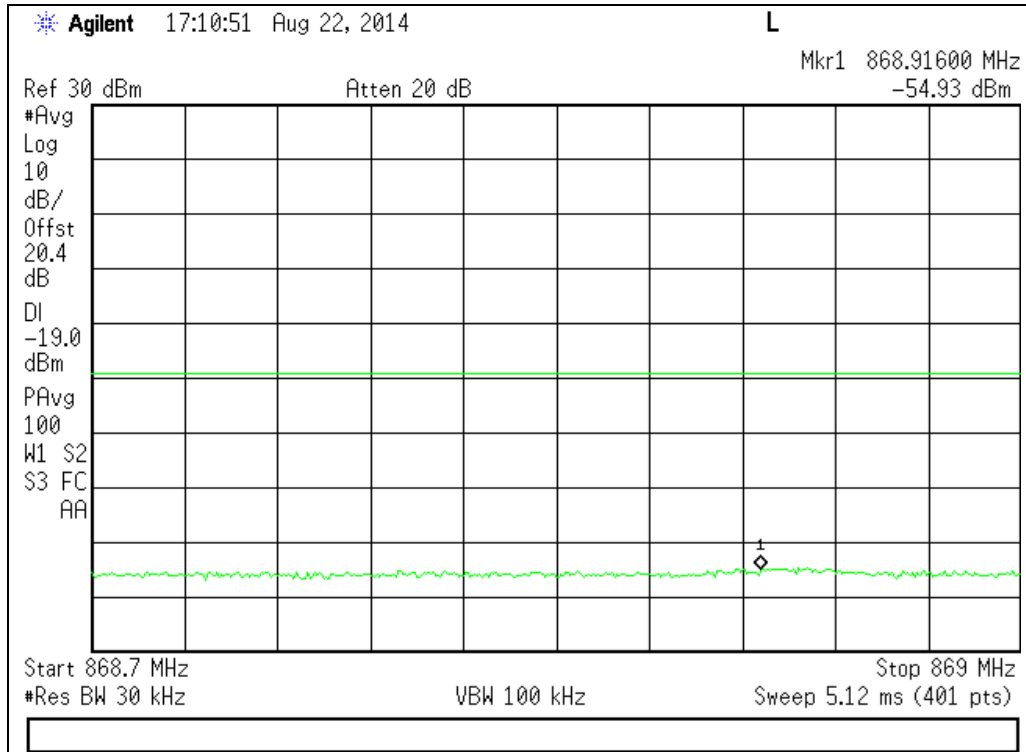


Upper Band Edge

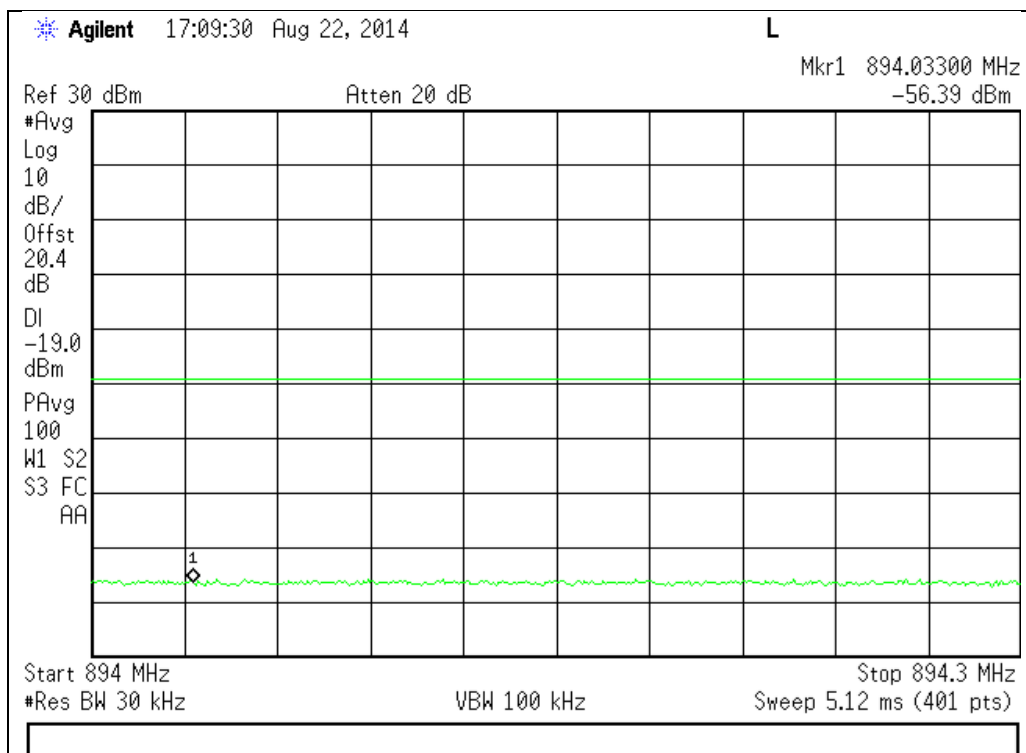




1930 - 1990 MHz Band

Lower Band Edge

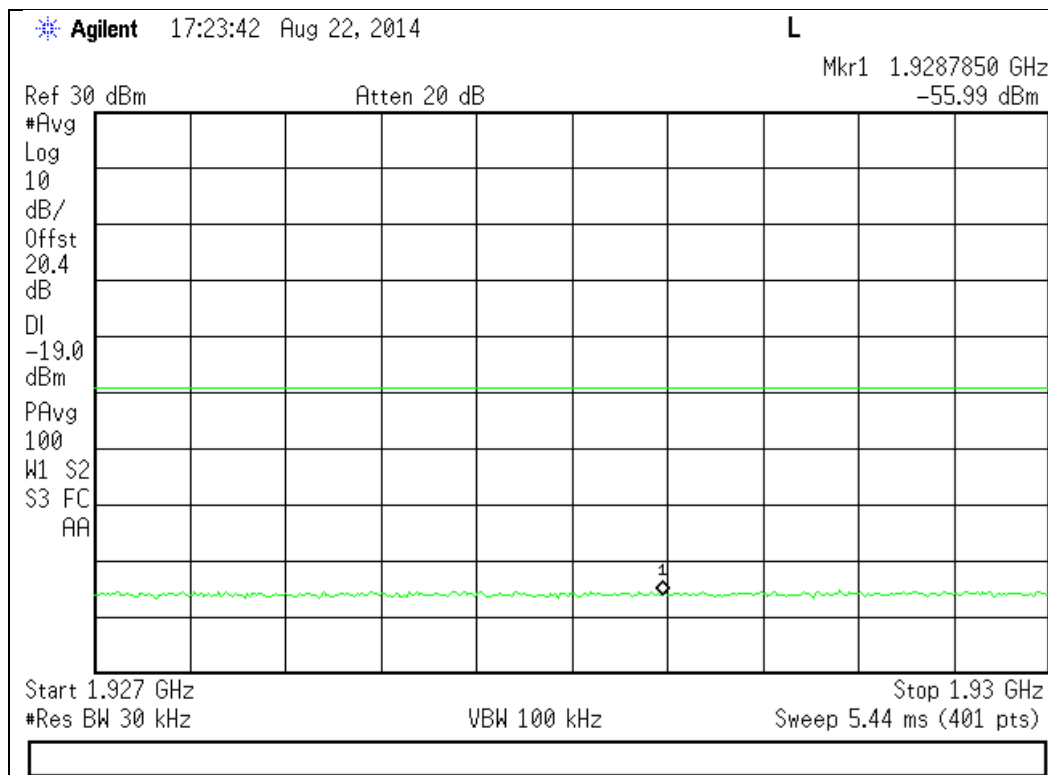


Upper Band Edge

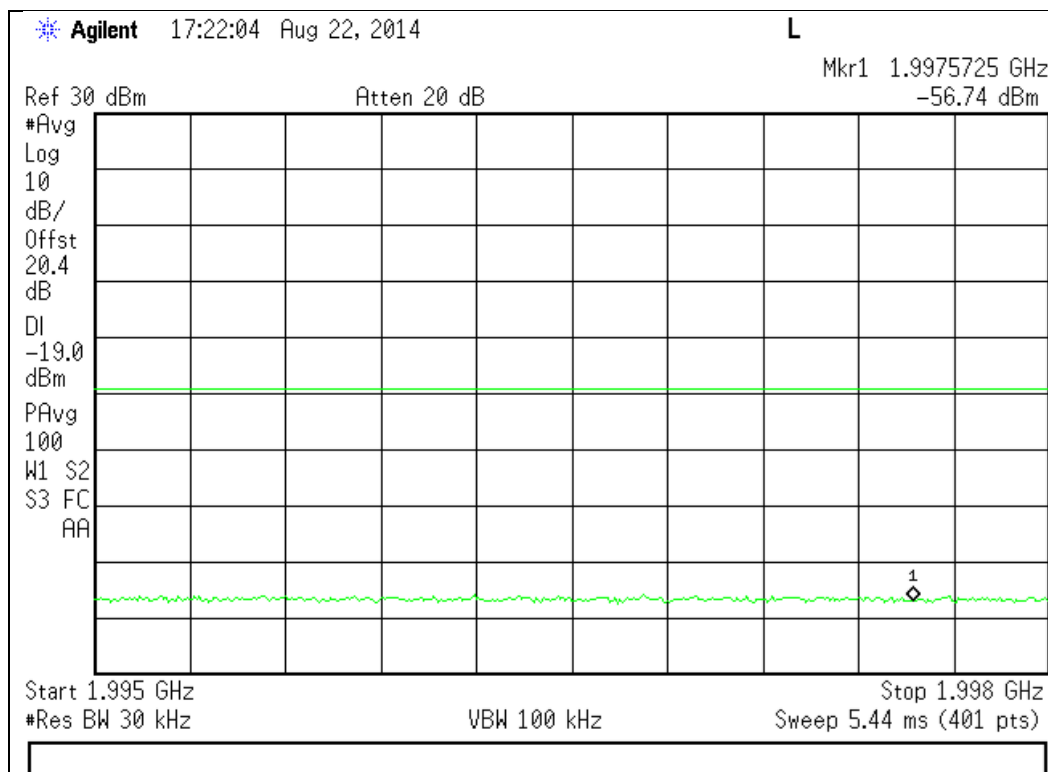


WCDMA Downlink Test Plots

869 - 894 MHz Band

Lower Band Edge

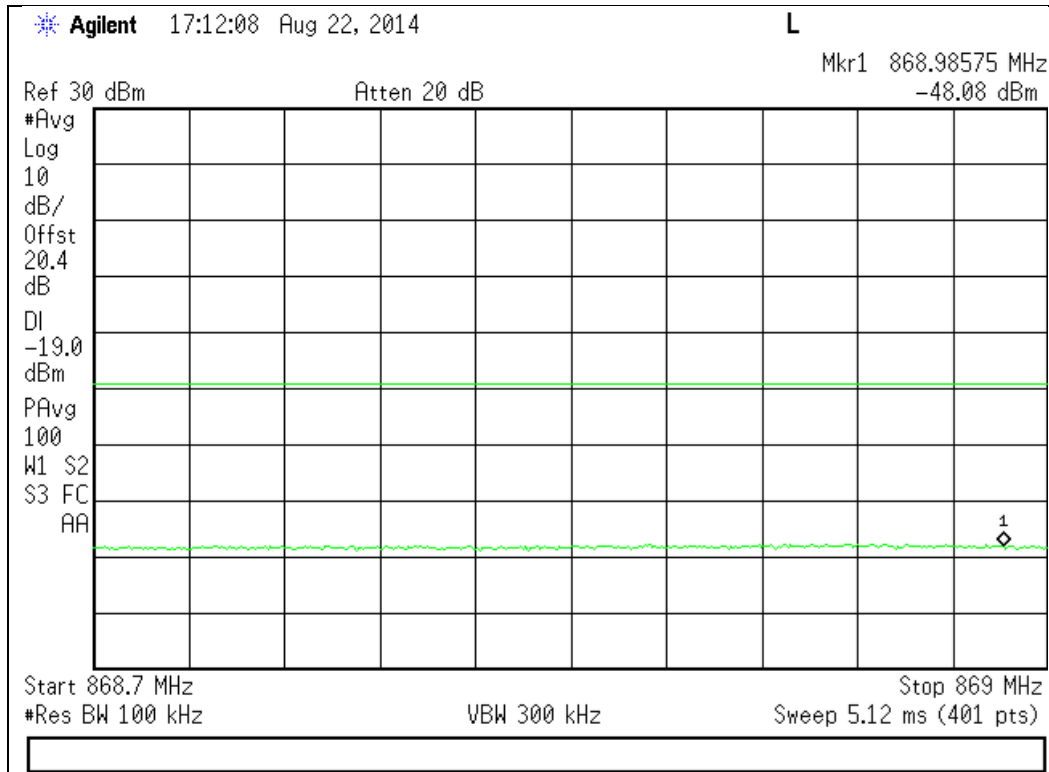


Upper Band Edge

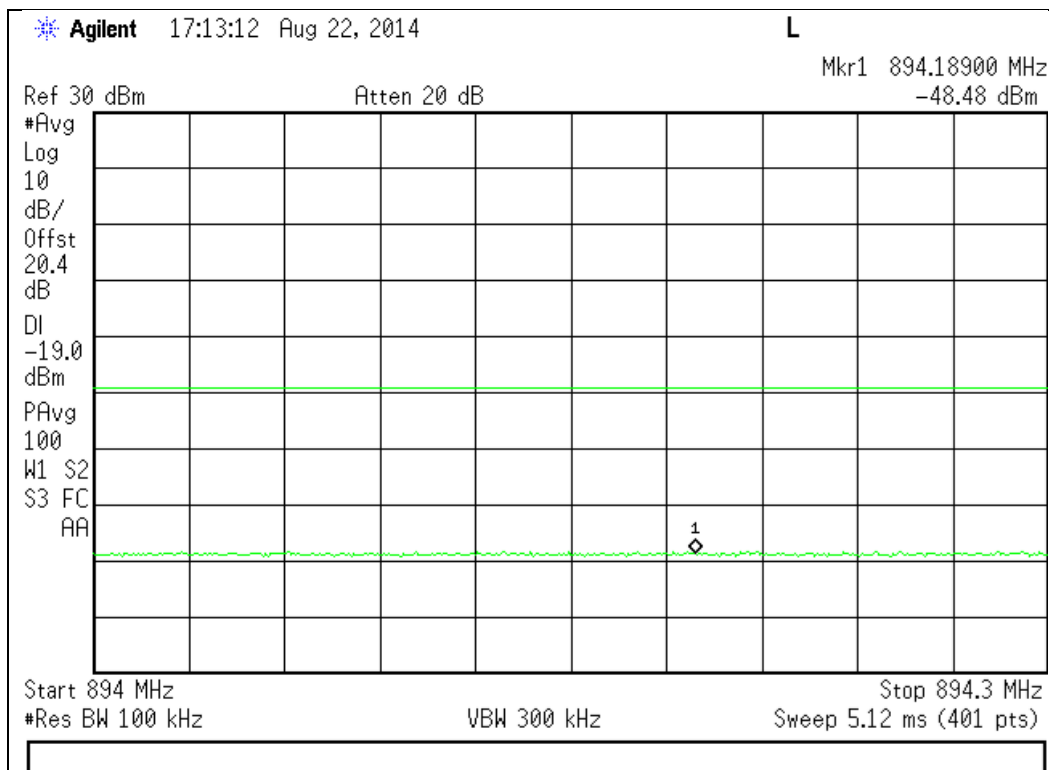


1930 - 1990 MHz Band

Lower Band Edge

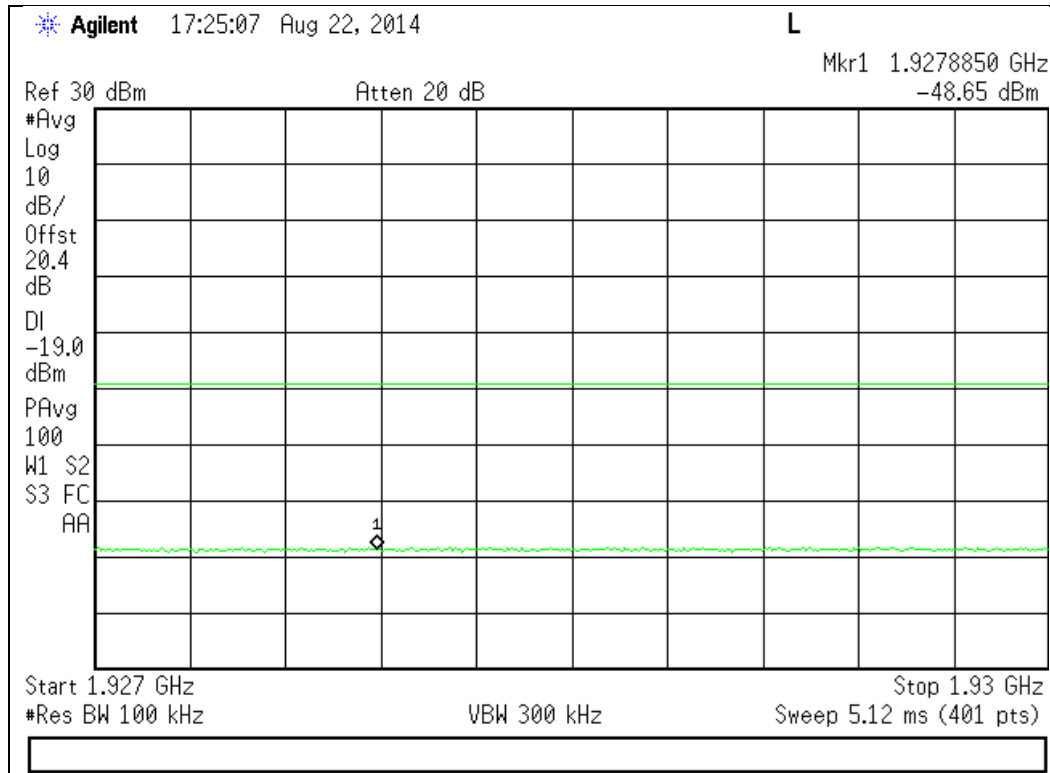

Upper Band Edge

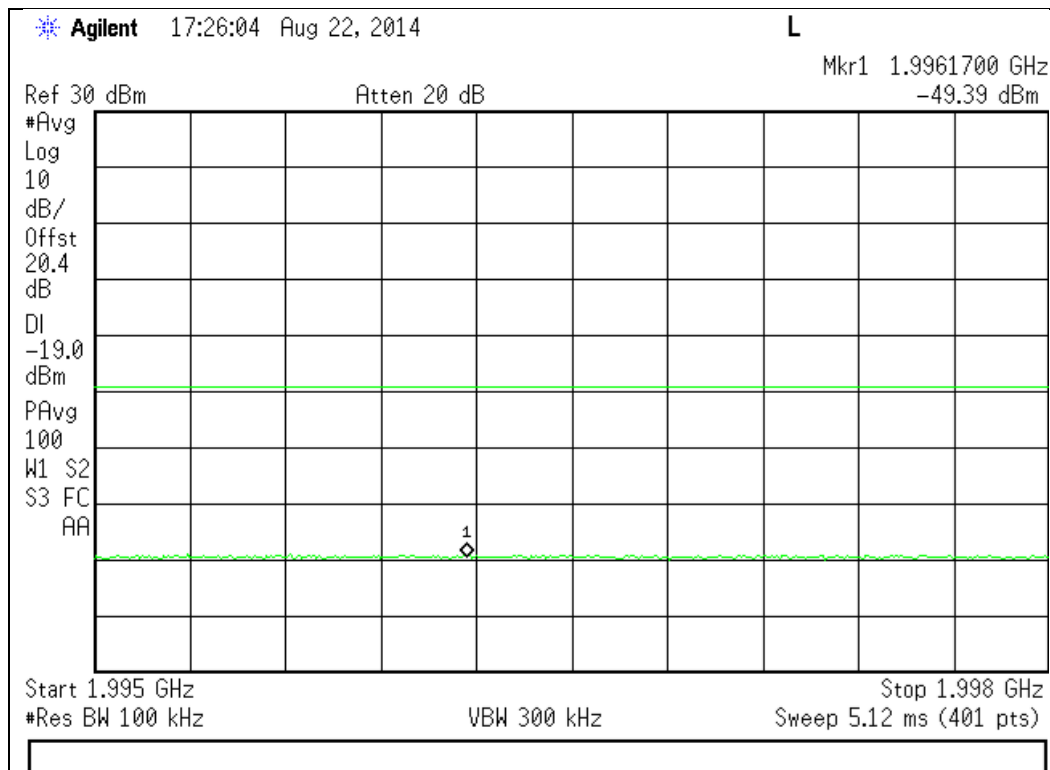

Conducted Spurious Emissions

Engineer: Mike Graffeo

Test Date: 8/22/2014

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator, with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a 4.1 MHz AWGN signal operating at 0.2 dB below the AGC Threshold. The conducted spurious emissions from 9 kHz to 10 times the highest tunable frequency for each operational band were measured (excluding the band defined by the Out of band emissions test). The emissions were plotted and the highest level was recorded in the summary table.


The following formulas are used for calculating the limits.

Conducted Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13 \text{ dBm}$

P1 = power in dBm

P2 = power in Watts

Test Setup



Uplink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	1894.7	-37.39	-13	Pass
1850 - 1910	3760.3	-34.17	-13	Pass


Downlink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	1959.7	-39.81	-13	Pass
1930 - 1990	2984.1	-40.83	-13	Pass




Uplink Test Plots

824 - 849 MHz Band Lower

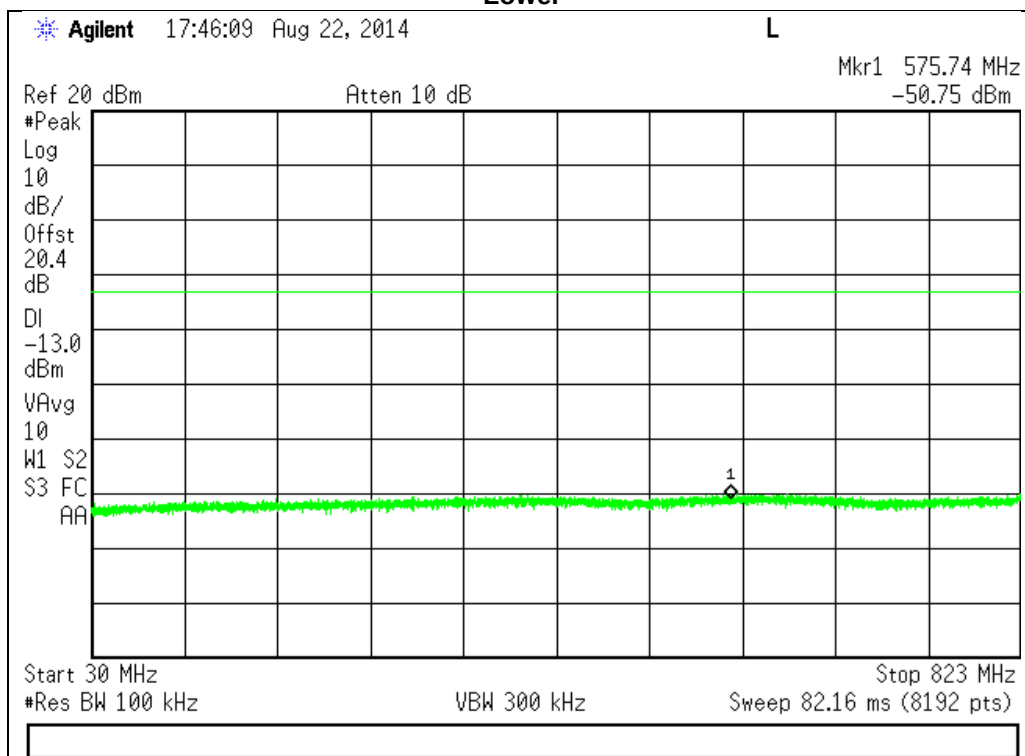


Upper

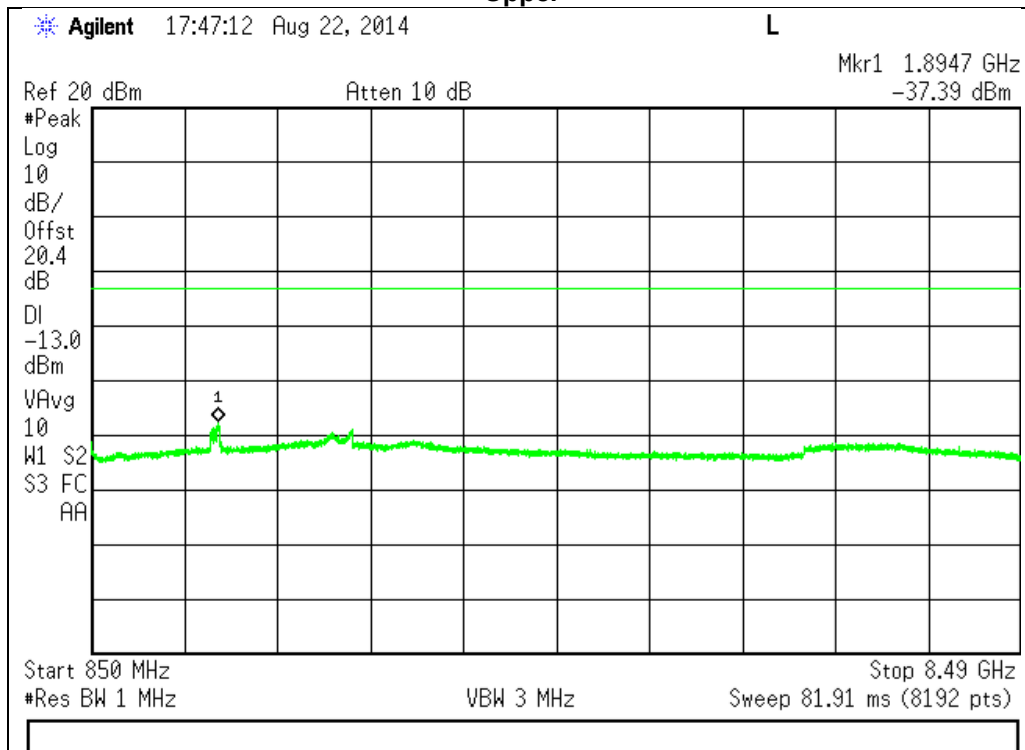




1850 - 1910 MHz Band Lower

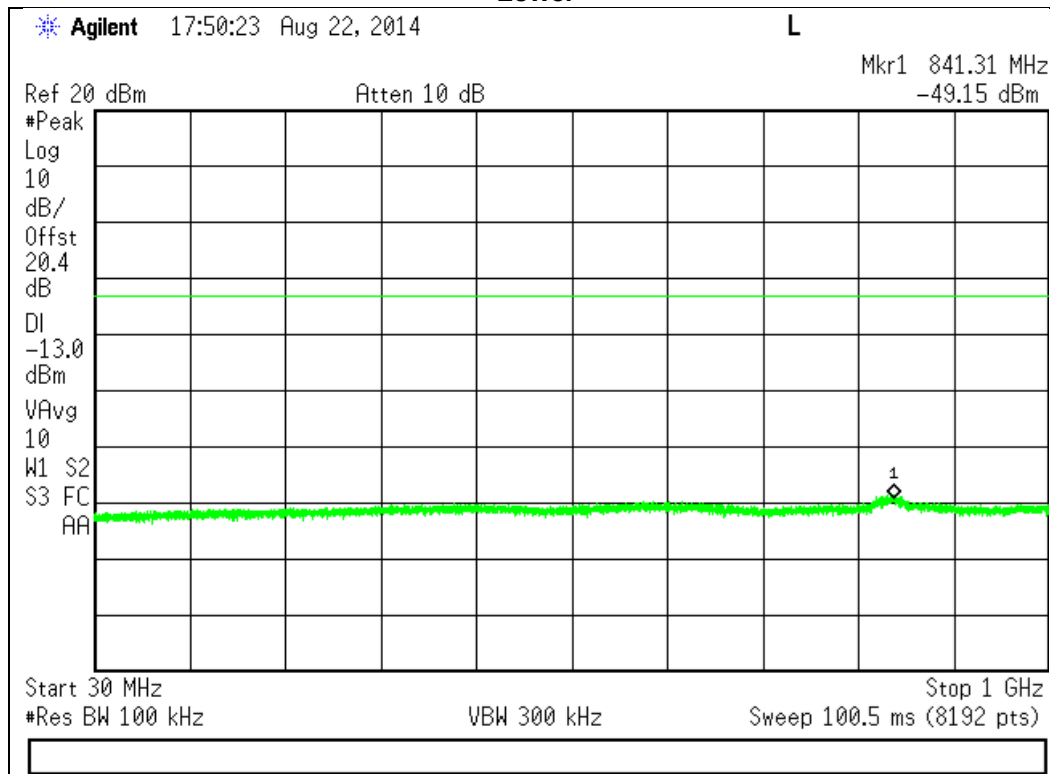


Upper 1

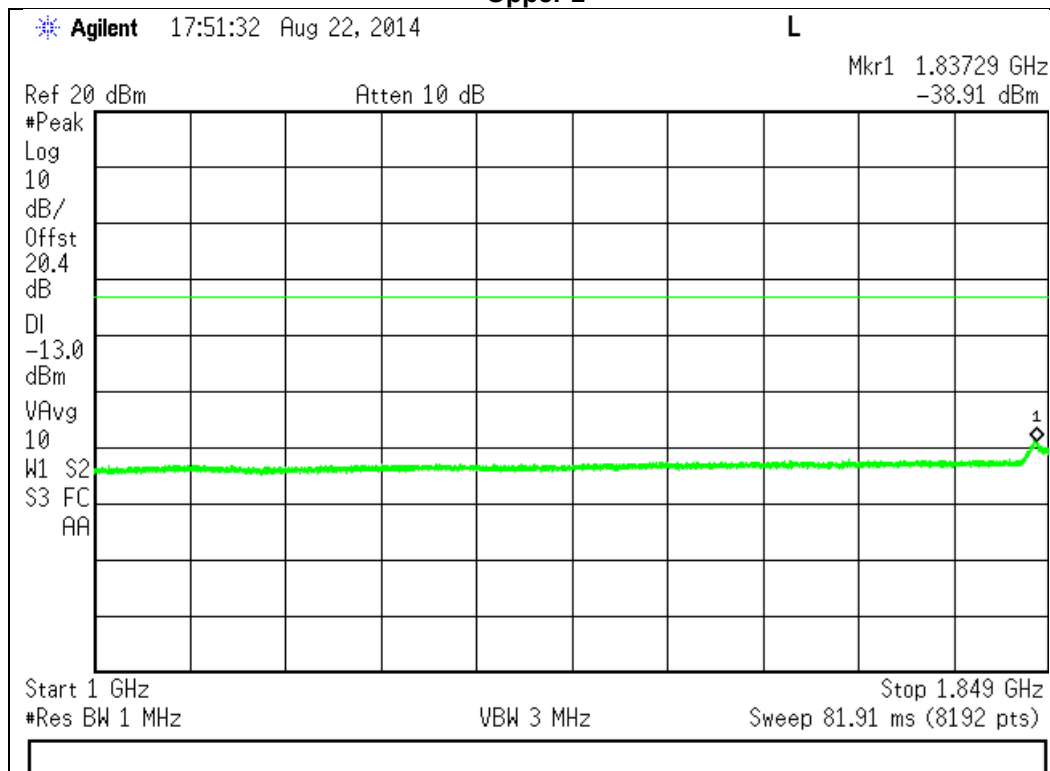




1850 - 1910 MHz Band (continued)

Upper 2

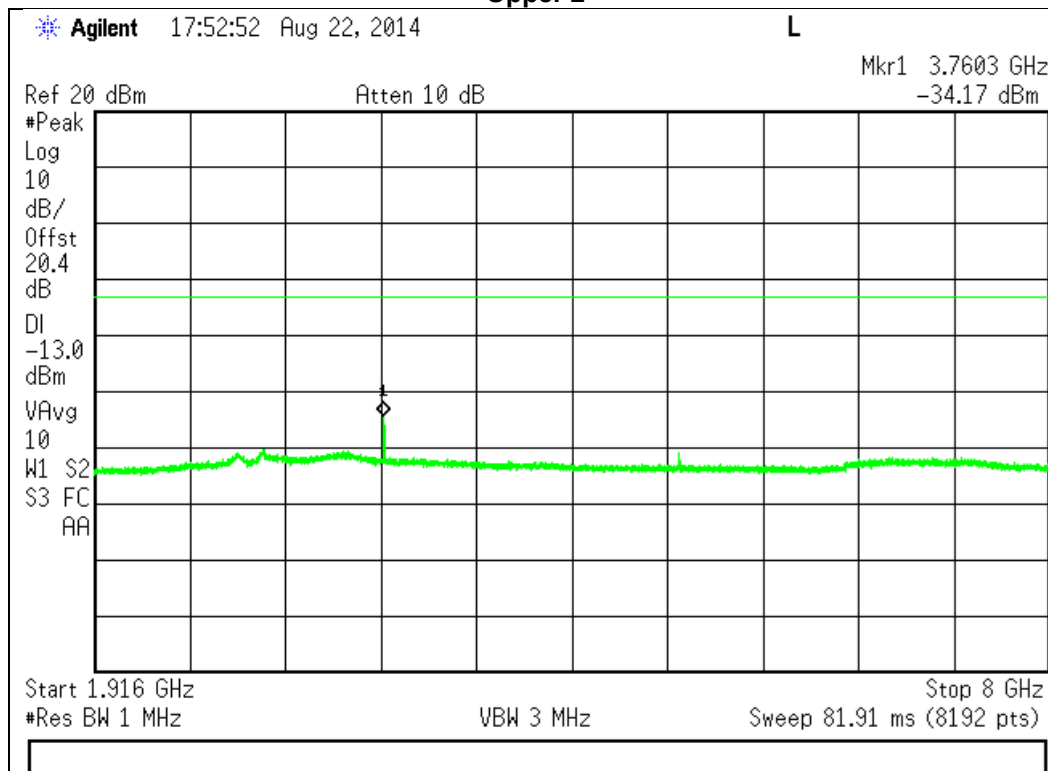


Upper 3

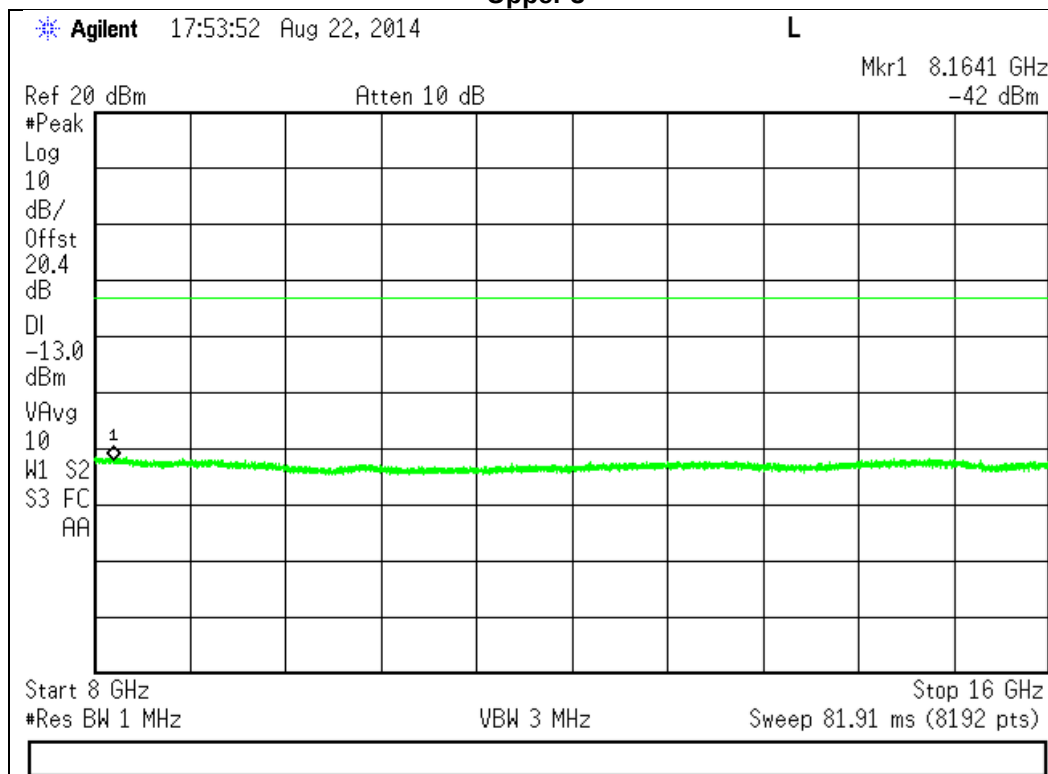

1850 - 1910 MHz Band (continued)


Upper 4

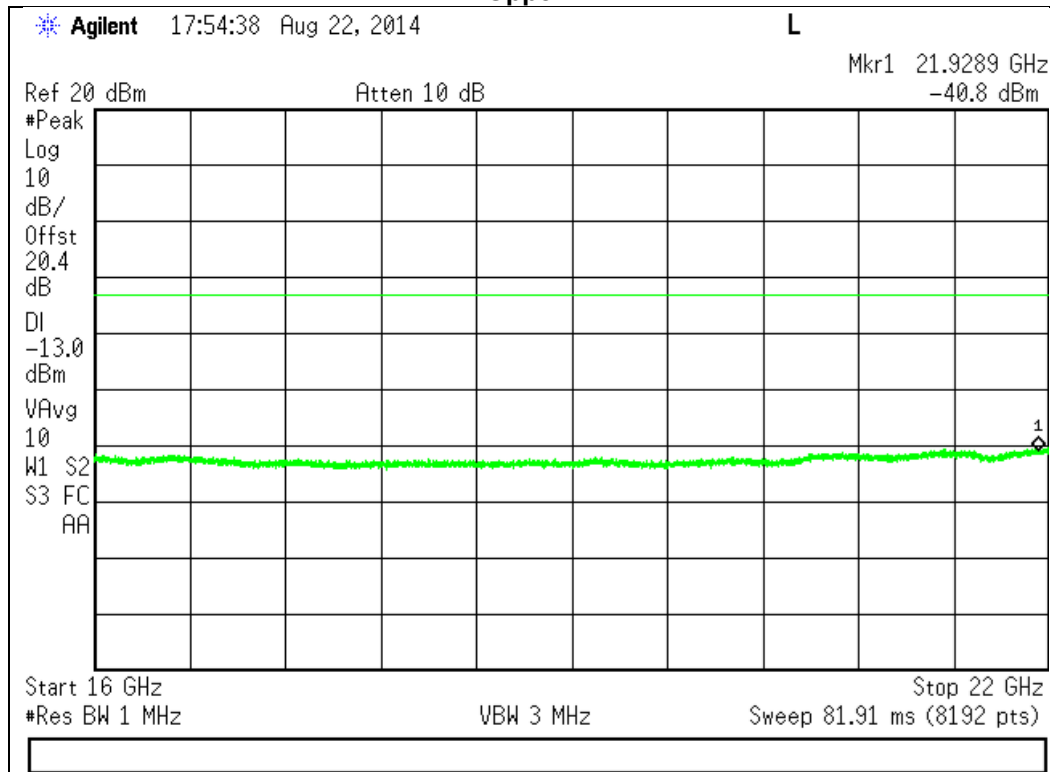




Downlink Test Plots

869 - 894 MHz Band Lower

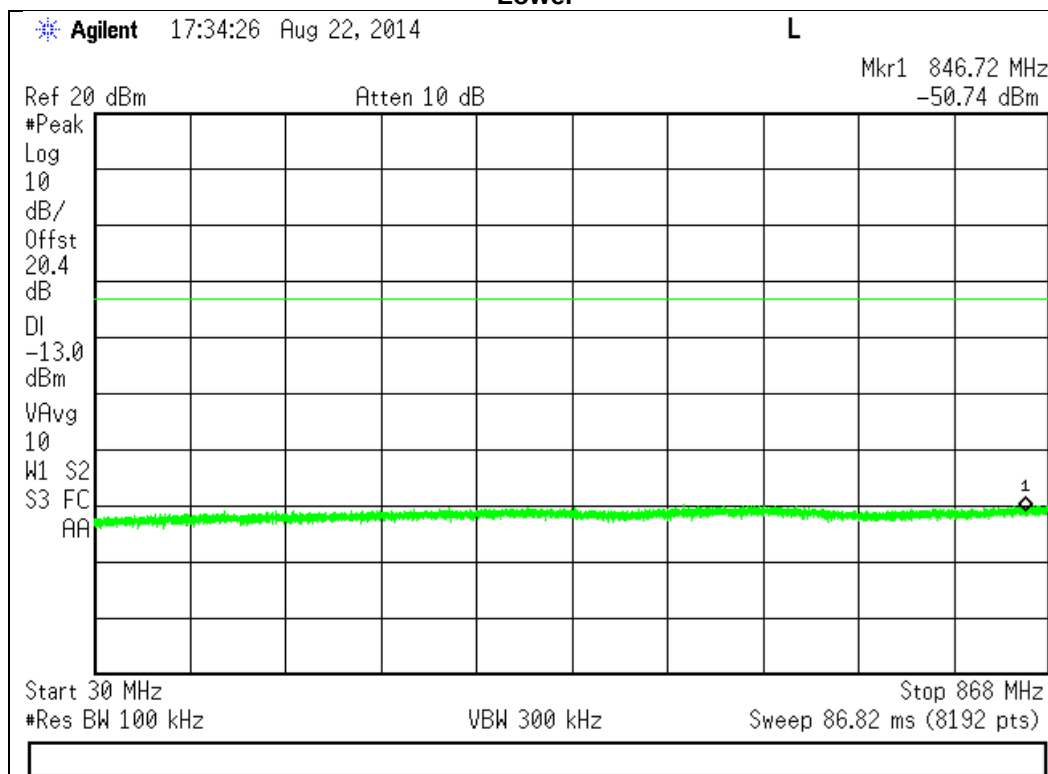


Upper

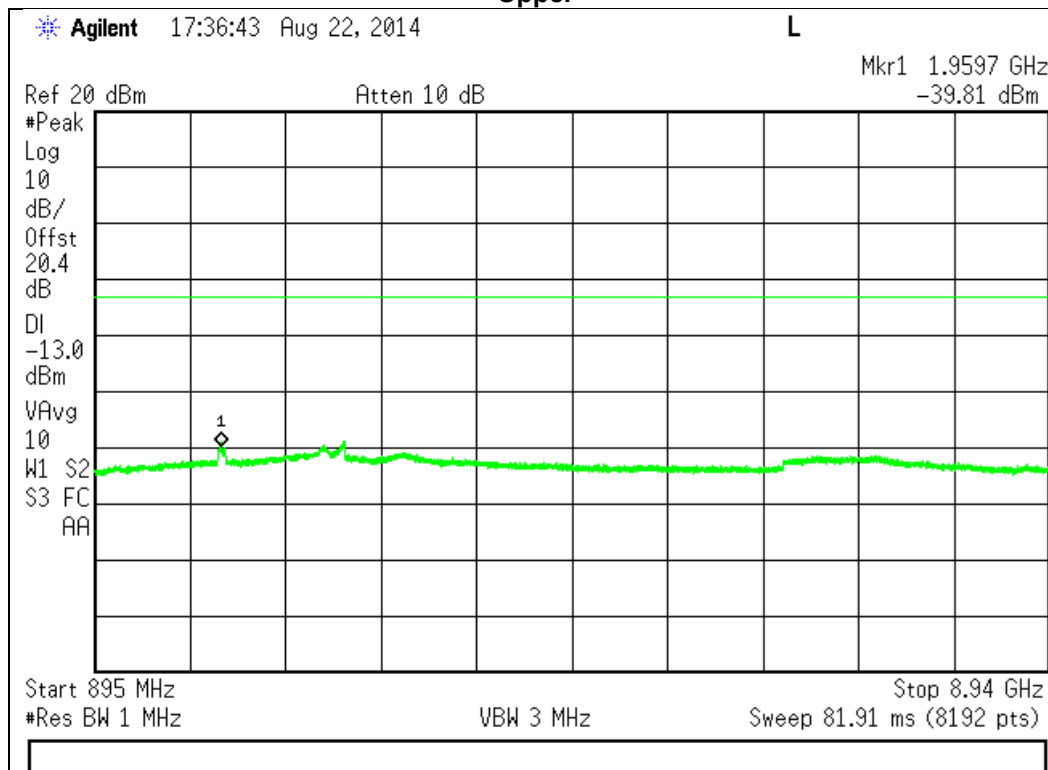




1930 - 1990 MHz Band Lower

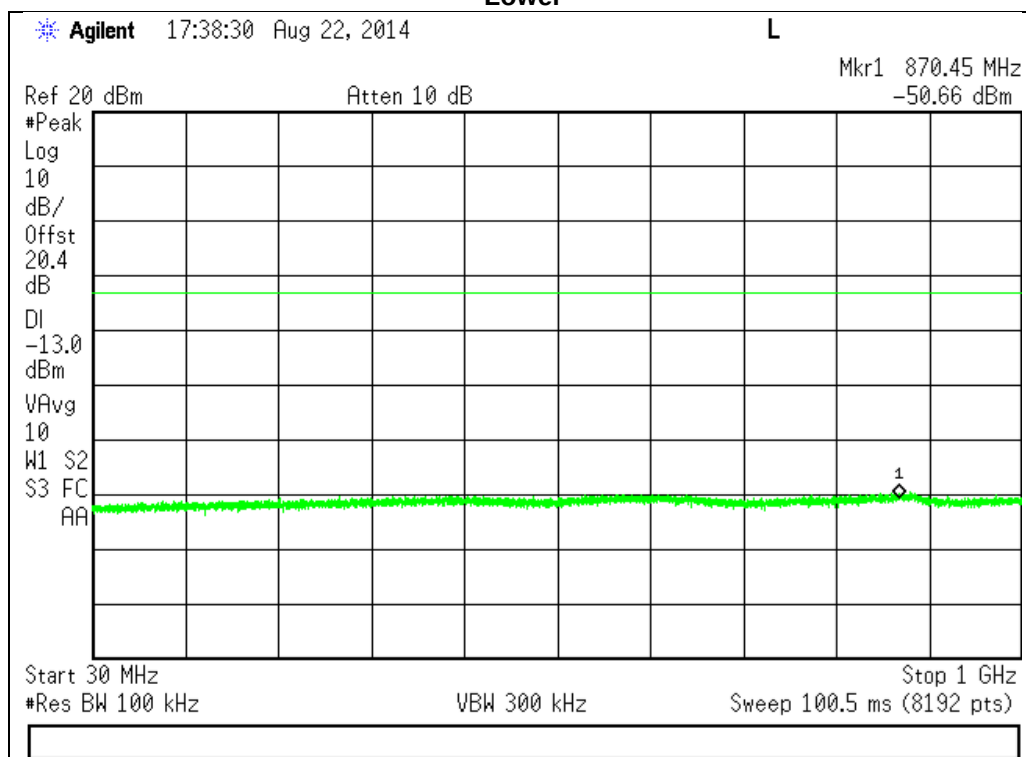


Upper 1

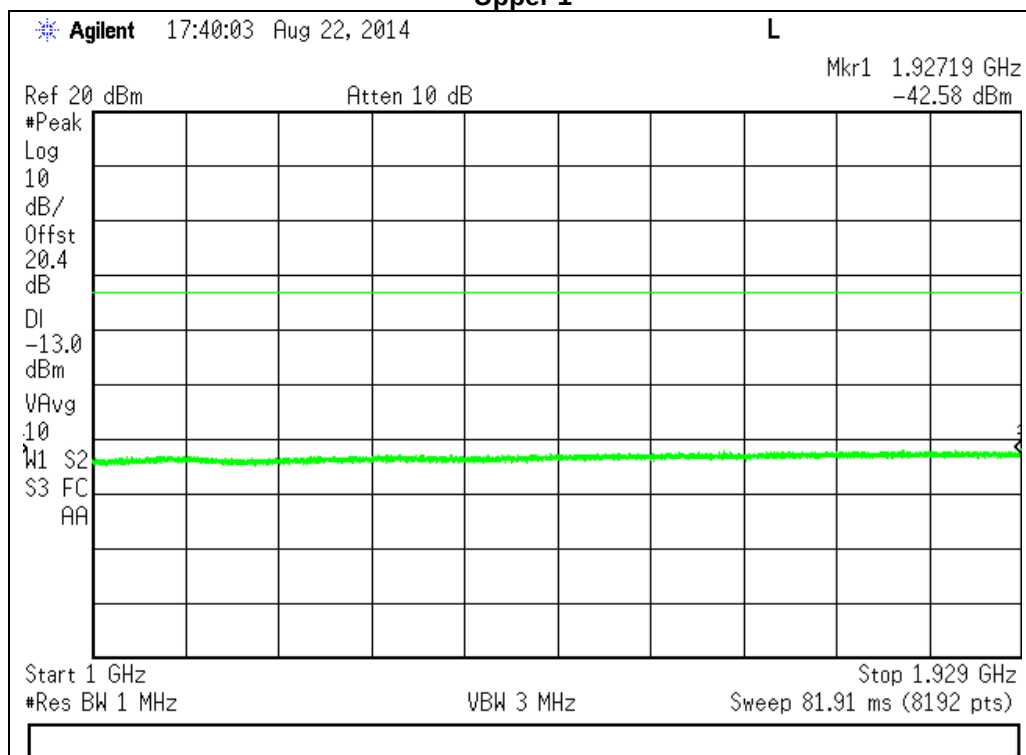




1930 - 1990 MHz Band (continued)

Upper 2

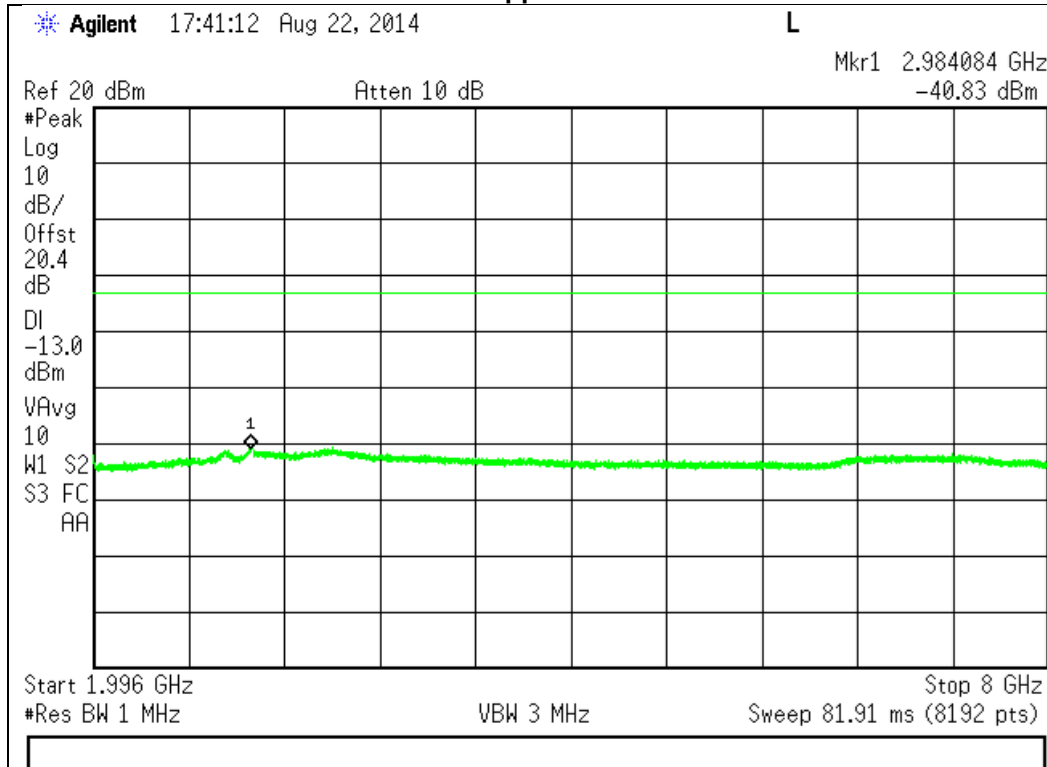


Upper 3

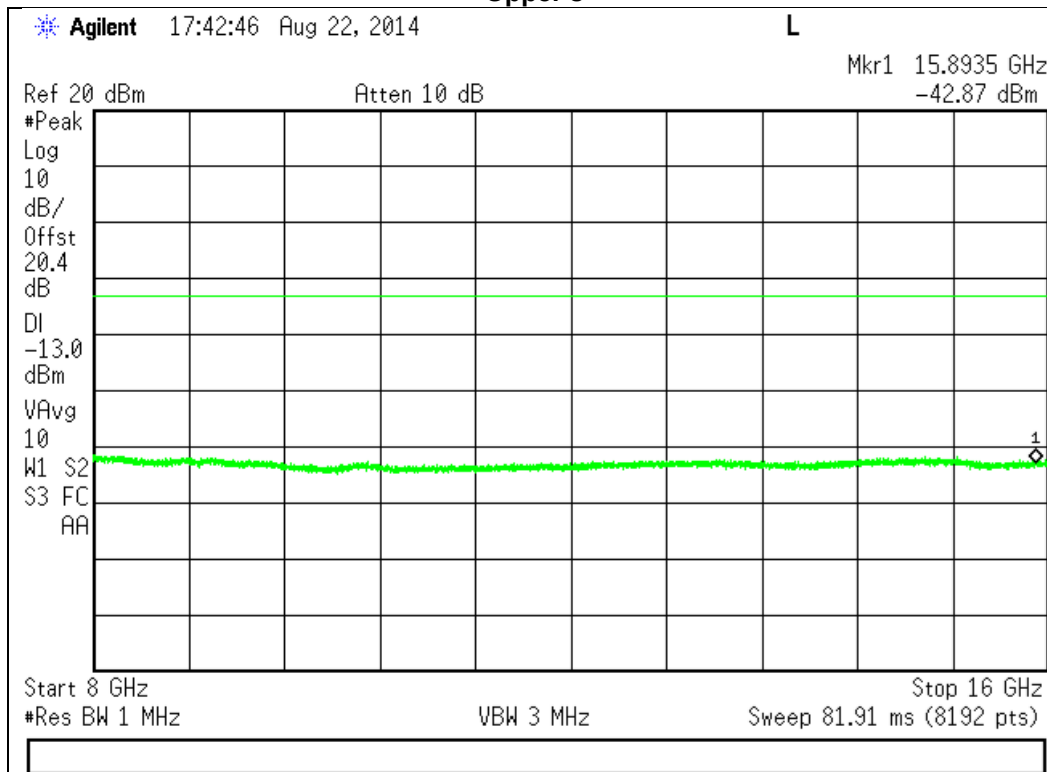

1930 - 1990 MHz Band (continued)

Upper 4

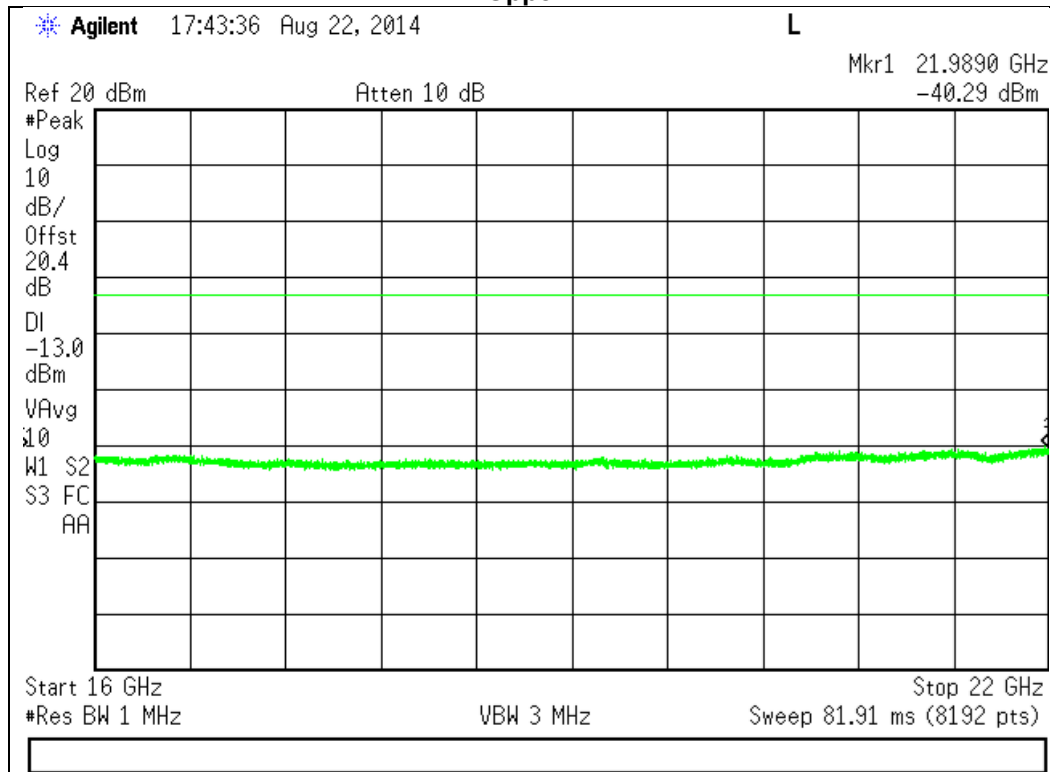

Noise Limits

Engineer: Mike Graffeo

Test Date: 8/22/2014

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as necessary to ensure that accurate readings were obtained. A series of three tests were performed: the maximum uplink and downlink noise, the variable noise for the uplink and downlink in the presence of a downlink signal, and the variable uplink noise timing. The detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516c were followed.

The Noise Limit is calculated using the following formula.

The following formulas are used for calculating the limits. Note – Downlink noise power limit is calculated with the center frequency of the associated uplink band.

Noise Power = $-102.5 + \text{LOG}_{10}(\text{Band Center Frequency}) * 20$


Variable Noise = $-103 \text{ dBm/MHz-RSSI}$

Test Setup

Maximum Noise Power



Variable Uplink Noise Power and Timing

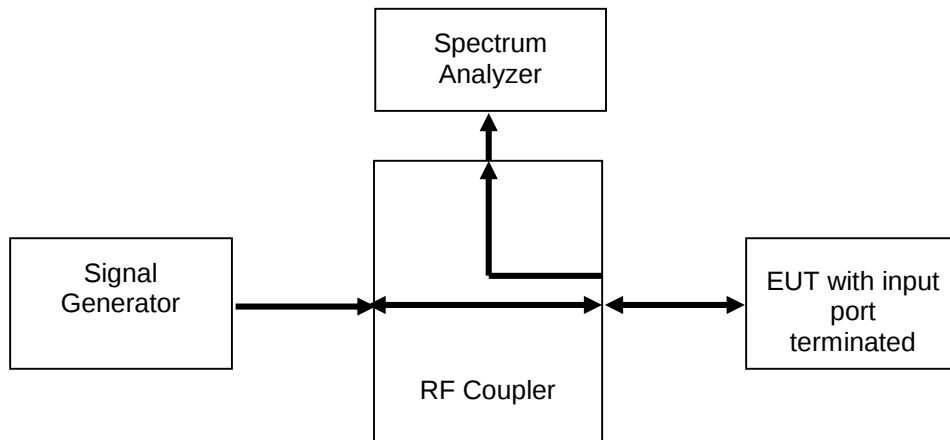

Variable Downlink Noise Power and Timing



Maximum Uplink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
824 - 849	-48.15	-44.1	-4.1	Pass
1850 - 1910	-45.59	-37.0	-8.6	Pass

Maximum Downlink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
869 - 894	-52.87	-44.1	-8.8	Pass
1930 - 1990	-46.51	-37.0	-9.5	Pass

Uplink Noise Timing Test Results

Frequency Band (MHz)	Measured Timing (Seconds)	Limit (Seconds)	Result
824 - 849	0.0375	3.0	Pass
1850 - 1910	0.0150	3.0	Pass

Variable Uplink Noise Limit Test Results

824 - 849 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-55.0	-48.0	-75.0	-27.0
-62.0	-44.0	-48.0	-4.0
-61.0	-44.0	-48.0	-4.0
-60.0	-44.0	-48.0	-4.0
-57.0	-46.0	-48.0	-2.0
-56.0	-47.0	-48.0	-1.0

1850 - 1910 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-58.0	-45.0	-76.0	-31.0
-69.0	-37.0	-45.0	-8.0
-68.0	-37.0	-45.0	-8.0
-67.0	-37.0	-45.0	-8.0
-60.0	-43.0	-45.0	-2.0
-59.0	-44.0	-45.0	-1.0

Variable Downlink Noise Limit Test Results

869 - 894 MHz


RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-51.0	-52.0	-83.0	-31.0
-50.0	-53.0	-83.0	-30.0
-52.0	-51.0	-65.0	-14.0
-69.0	-44.0	-54.0	-10.0
-68.0	-44.0	-54.0	-10.0
-67.0	-44.0	-54.0	-10.0

1930 - 1990 MHz


RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-75.0	-16.0
-43.0	-60.0	-75.0	-15.0
-70.0	-37.0	-47.0	-10.0
-69.0	-37.0	-47.0	-10.0
-68.0	-37.0	-47.0	-10.0
-45.0	-58.0	-59.0	-1.0

Maximum Uplink Noise Test Plots

824 - 849 MHz Band

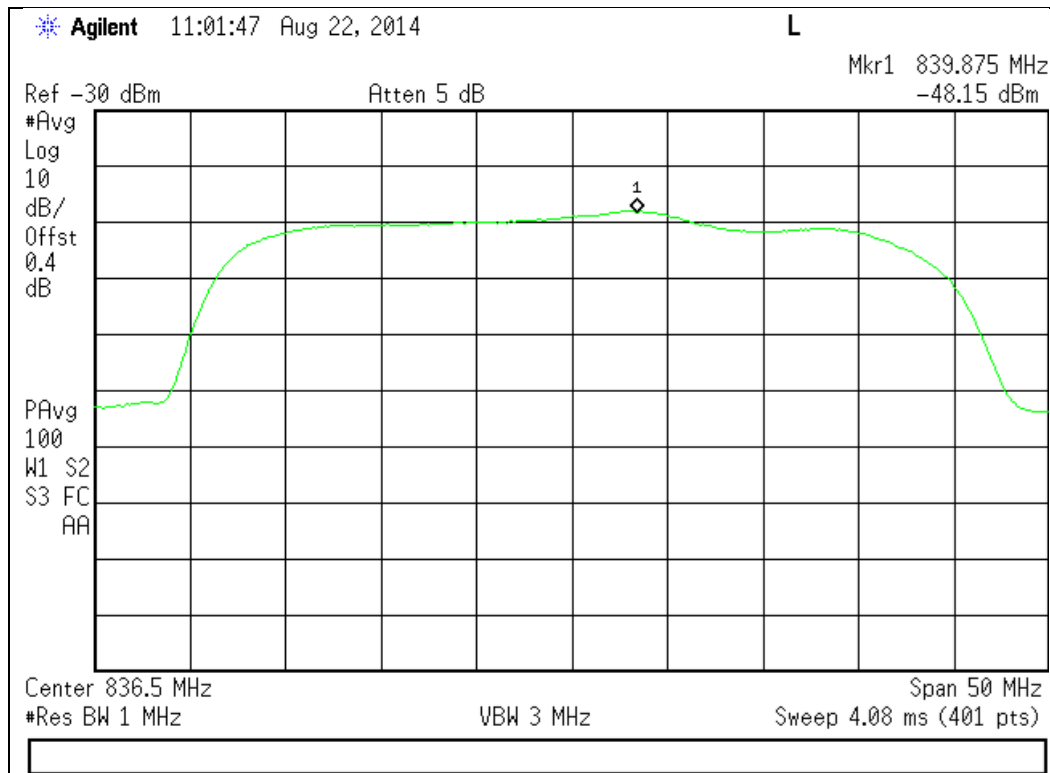


1850 - 1910 MHz Band

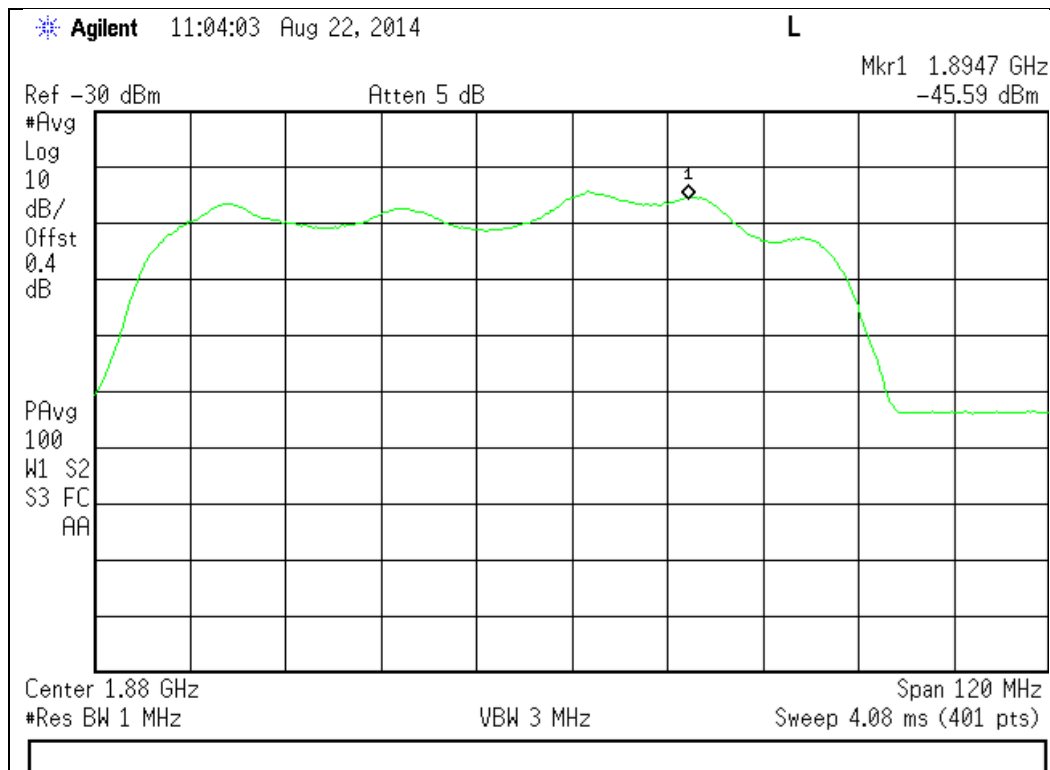


Maximum Downlink Noise Test Plots

869 - 894 MHz Band

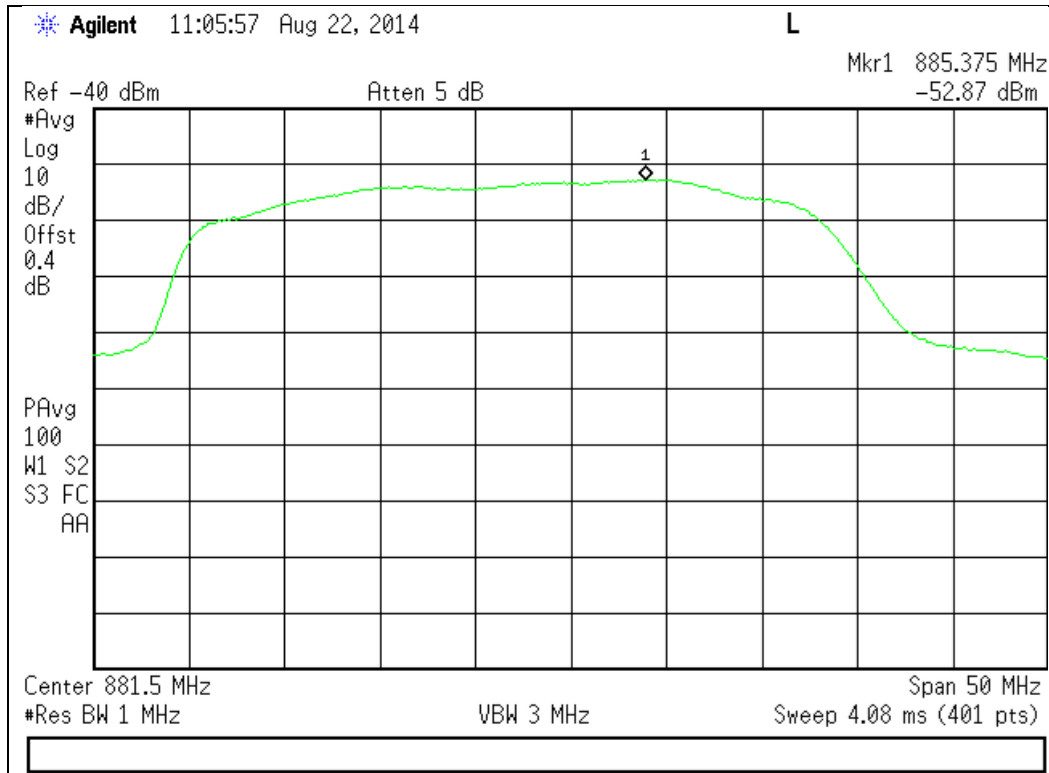


1930 - 1990 MHz Band

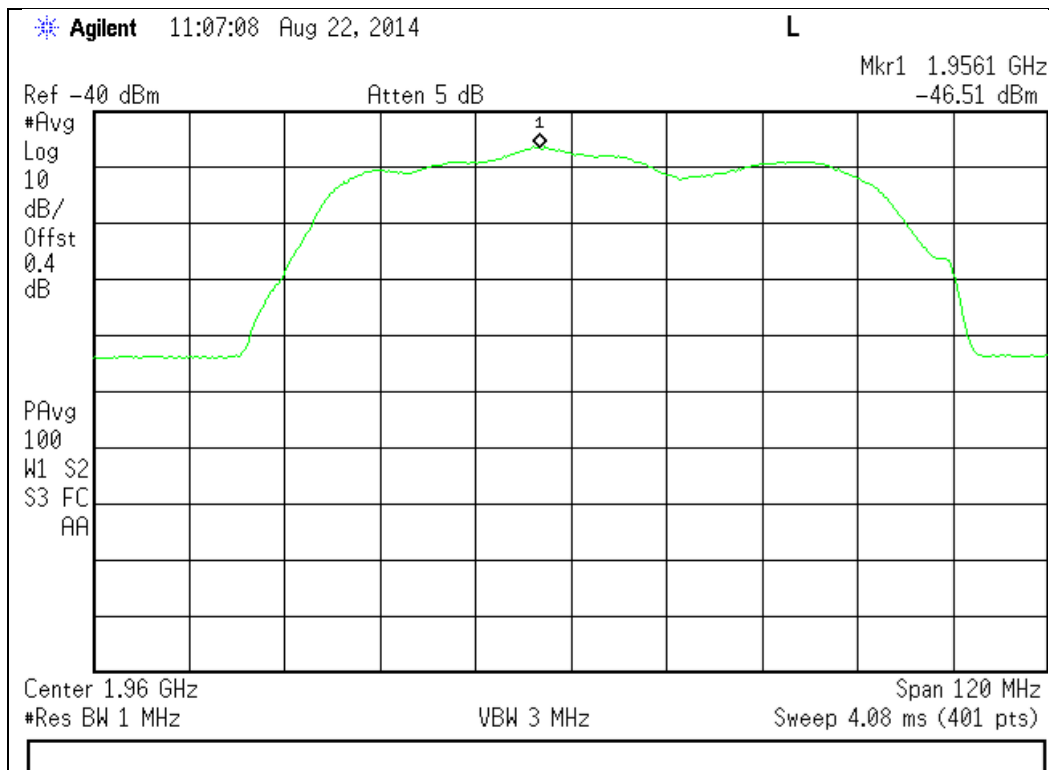


Uplink Noise Timing Test Plots

824 - 849 MHz Band

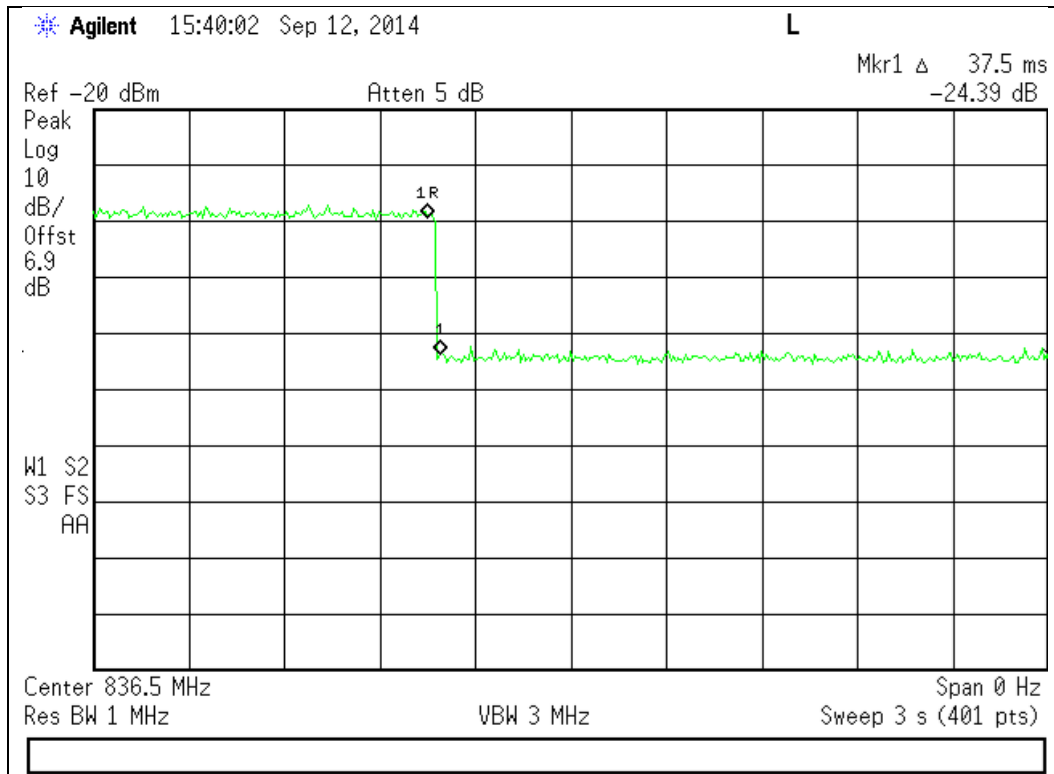


1850 - 1910 MHz Band

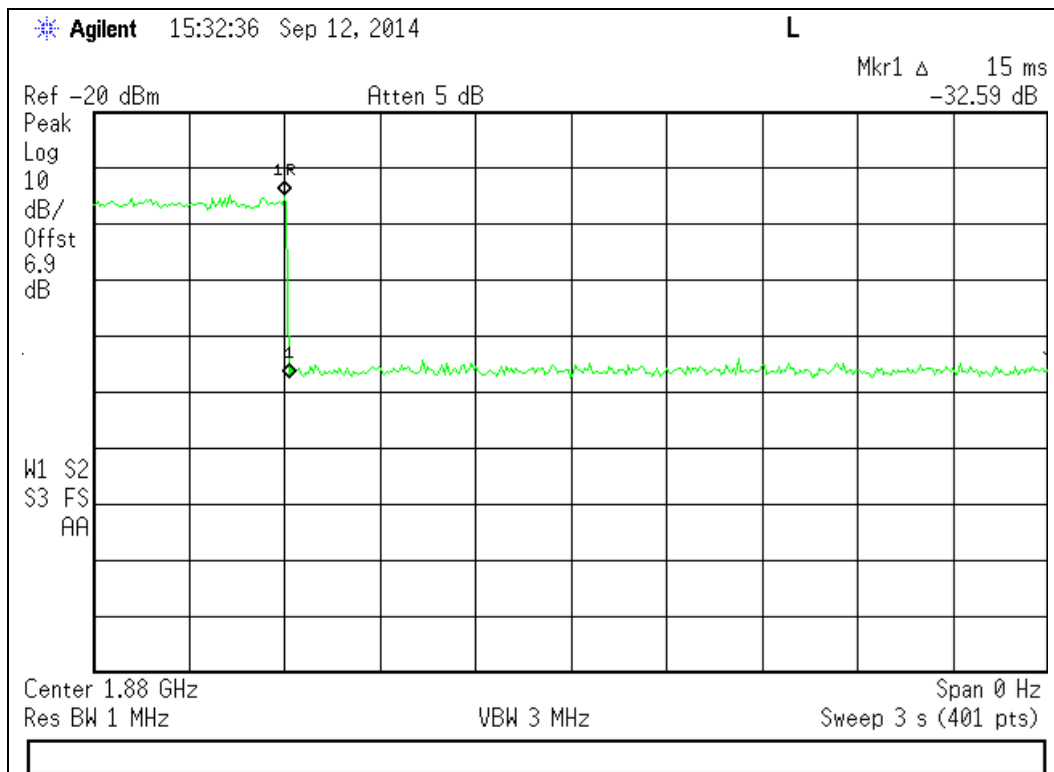

Uplink Inactivity**Engineer:** Mike Graffeo**Test Date:** 8/22/2014**Test Procedure**


The EUT was connected directly to a spectrum analyzer set to operate in the center of the EUT operational uplink and downlink bands. The span was set to 0 Hz with a sweep time of 330 seconds and MAX HOLD operation. The EUT was powered on and the time for the uplink to return to an inactive state was measured using the DELTA MARKER method to ensure that it was less than 300 seconds. The noise level after the return to an inactive state was less than -70 dBm/MHz

Test Setup**Uplink Test Results**


Frequency Band (MHz)	Measured Time (Seconds)	Limit (Seconds)	Result
824 - 849	289.6	300	Pass
1850 - 1910	284.6	300	Pass

Uplink Inactivity Test Results

824 - 849 MHz

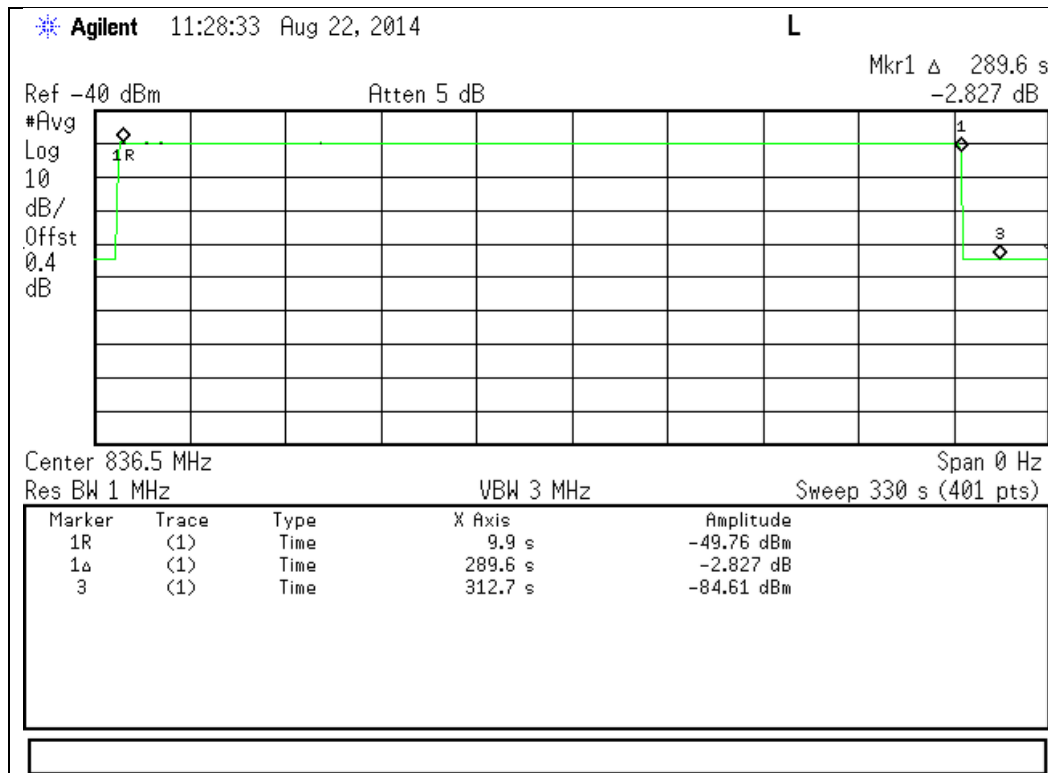

1850 - 1910 MHz

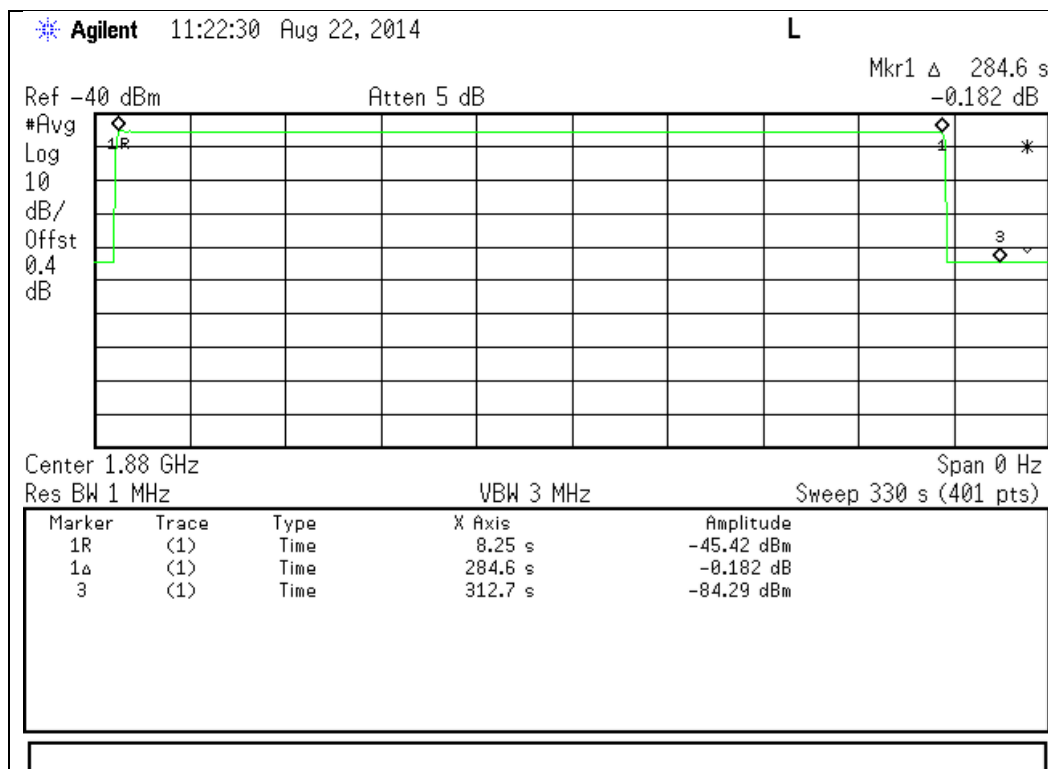


Variable Gain**Engineer:** Mike Graffeo**Test Date:** 8/25/2014**Test Procedure**

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings were obtained. The uplink gain in the presence of a downlink signal was measured for each operational uplink band using the detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516.

The following formula is used for calculating the limits:

Variable Gain = -34 dB - RSSI +MSCL

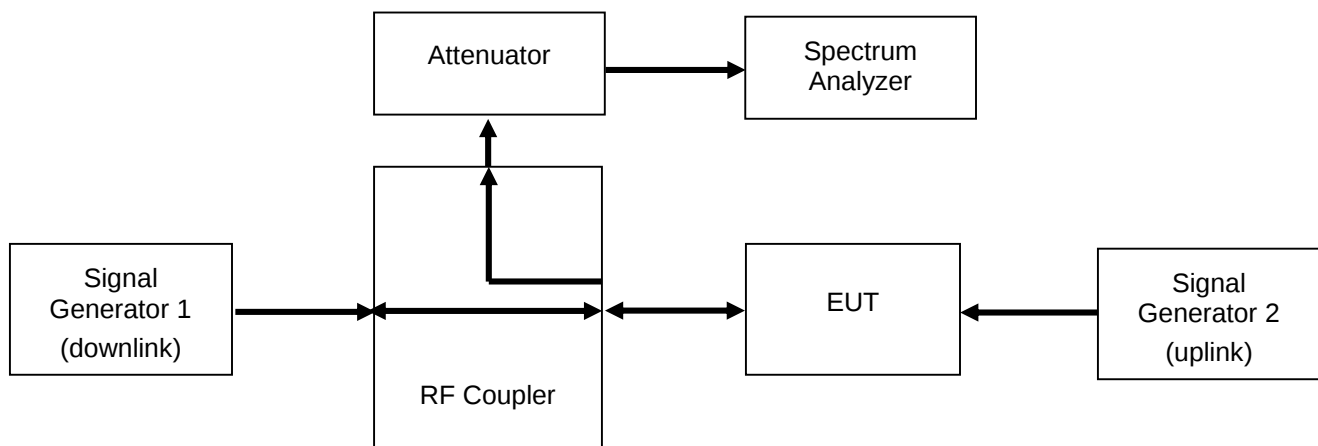Test Setup

Uplink Test Results

824 - 849 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dBm)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-62	37.6	65.6	-42.6	14.2	56.8	-8.8
-60	37.6	63.6	-42.6	13.2	55.8	-7.8
-59	37.6	62.6	-42.6	12.2	54.8	-7.8
-58	37.6	61.6	-42.6	11.2	53.8	-7.8
-57	37.6	60.6	-42.6	10.2	52.8	-7.8
-61	37.6	64.6	-42.6	14.5	57.1	-7.5

1850 - 1915 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dBm)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-62	43.7	71.7	-45.0	12.2	57.2	-14.5
-61	43.7	70.7	-45.0	11.2	56.2	-14.5
-63	43.7	72.7	-45.0	13.6	58.6	-14.1
-67	43.7	72.0	-45.0	13.6	58.6	-13.4
-66	43.7	72.0	-45.0	13.6	58.6	-13.4
-65	43.7	72.0	-45.0	13.6	58.6	-13.4

Uplink Gain Timing Test Results


Frequency Band (MHz)	Measured Timing (Seconds)	Limit (Seconds)	Result
824 - 849	0.0150	3.0	Pass
1850 - 1910	0.0225	3.0	Pass



Uplink Gain Timing Plot 824 - 849 MHz

Agilent 11:12:36 Aug 25, 2014


L

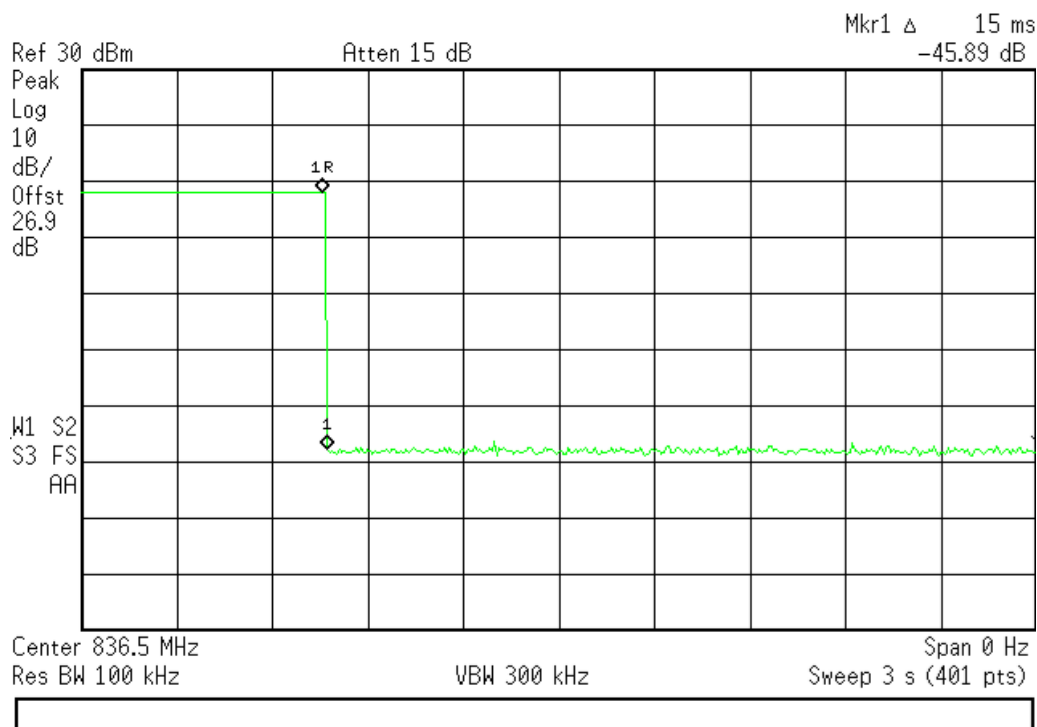

Uplink Gain Timing Plot 1850 - 1915 MHz


Agilent 11:15:42 Aug 25, 2014

L

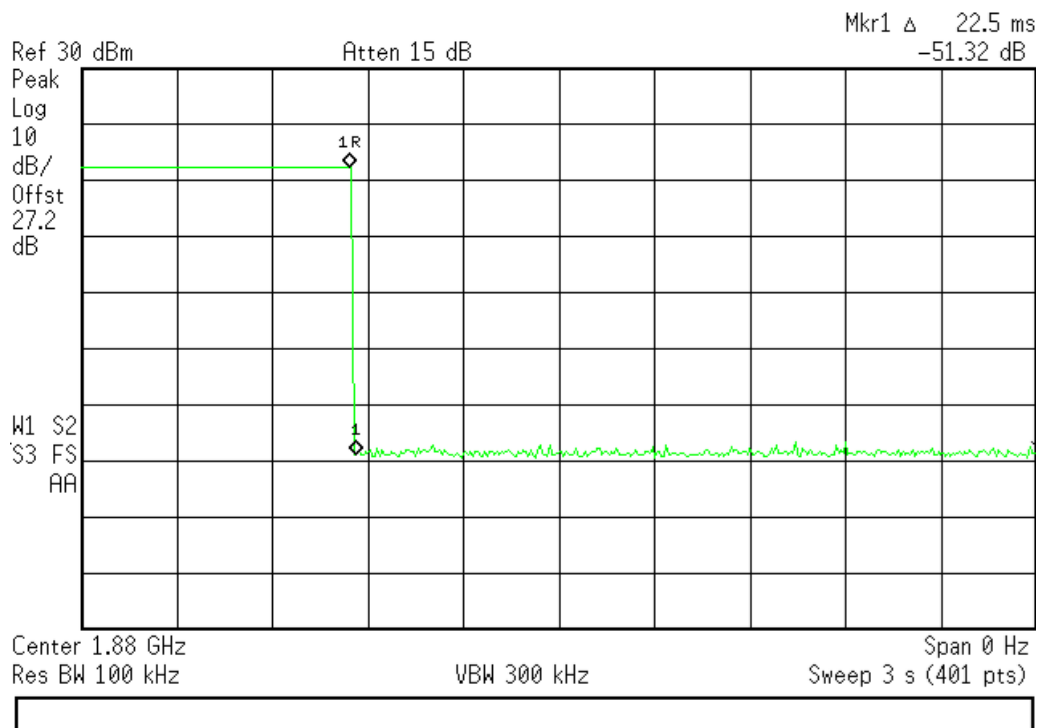

Occupied Bandwidth**Engineer:** Mike Graffeo**Test Date:** 8/22/2014**Test Procedure**

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as required to ensure that accurate readings were obtained. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the center channel of each of the EUT operational uplink and downlink bands with the RF level set at a point just prior to the AGC being in control of the power. For each modulation type, the input and output signal was measured and plotted to ensure that the signals were similar.


Test Setup




GSM Uplink Test Plots

824 - 849 MHz Band

Input

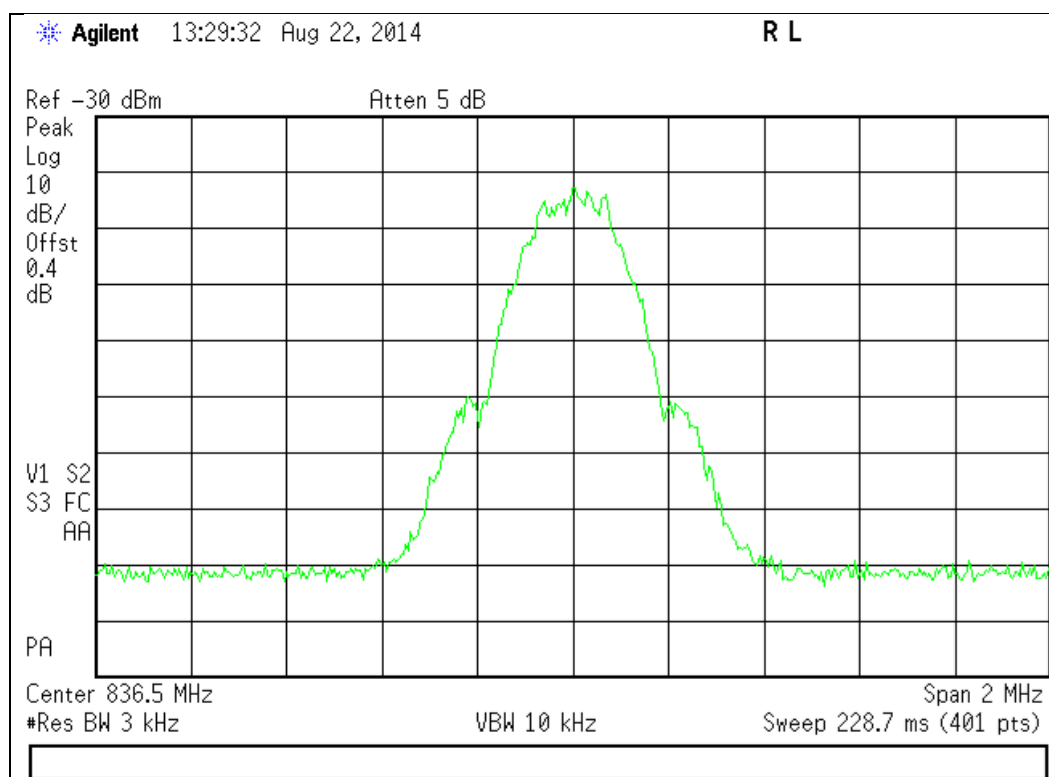


Output

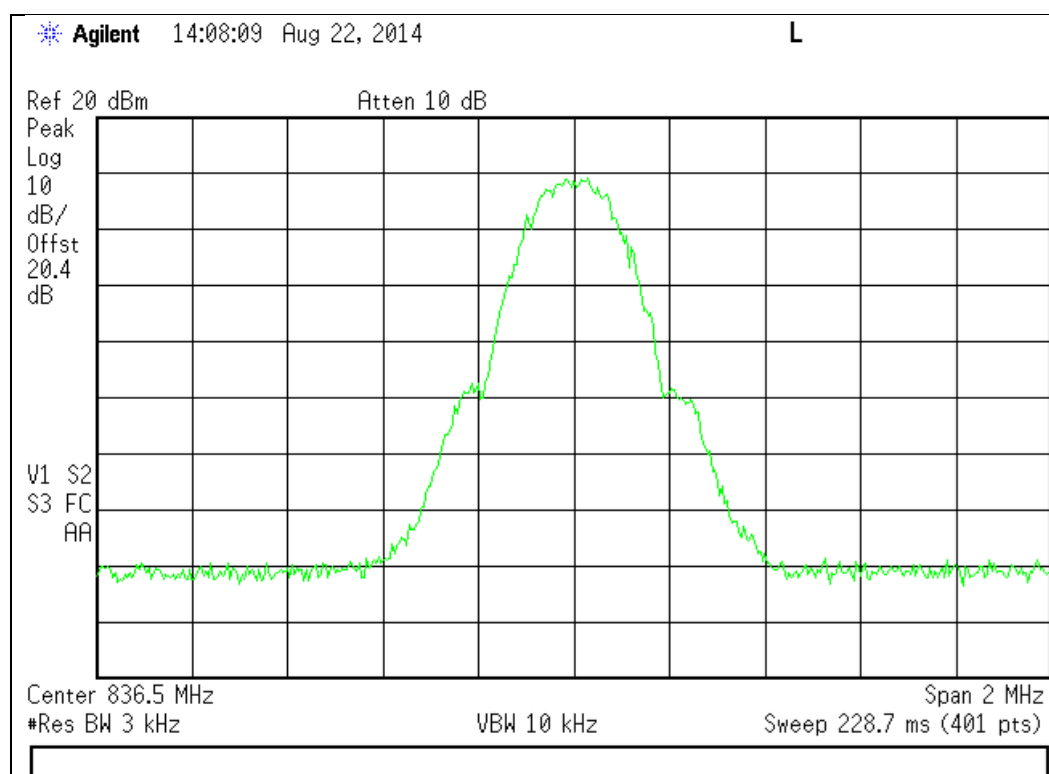




1850 - 1910 MHz Band

Input

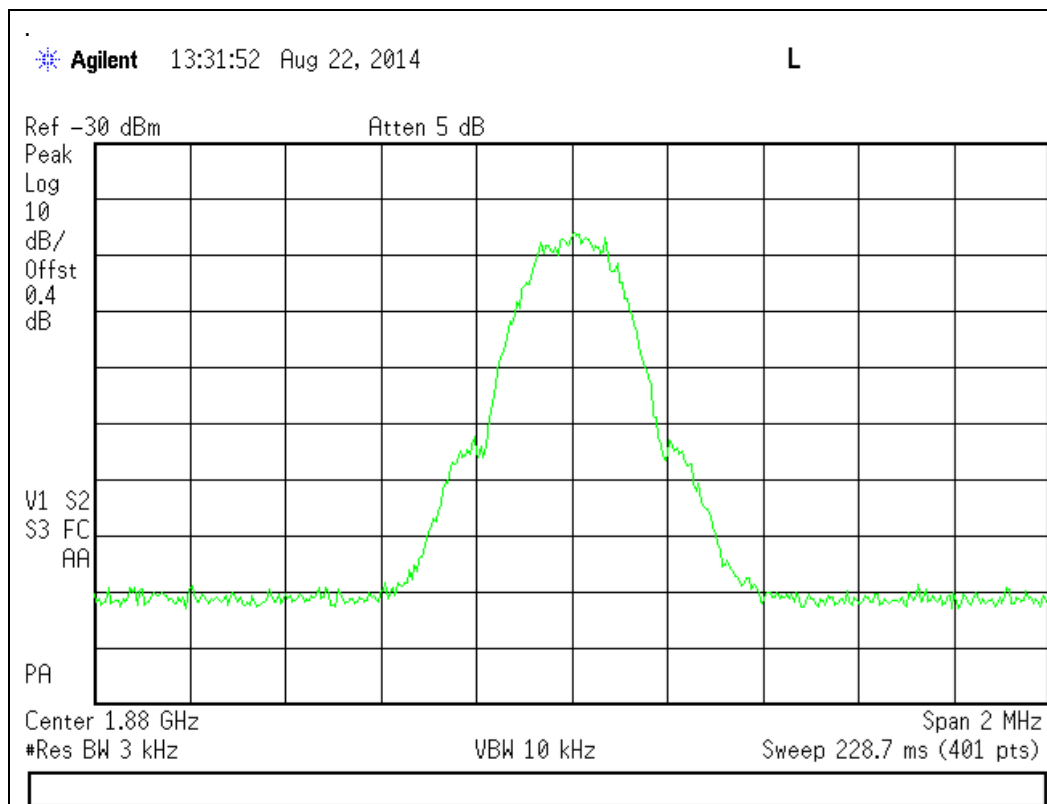


Output

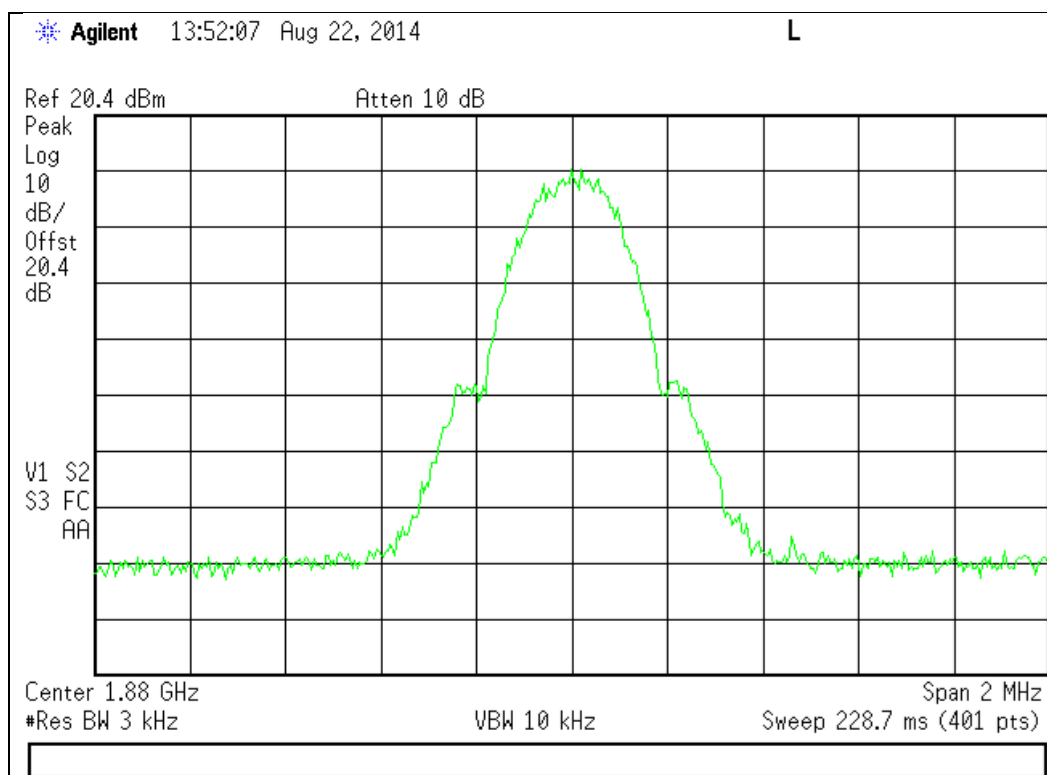


GSM Downlink Test Plots

869 - 894 MHz Band

Input

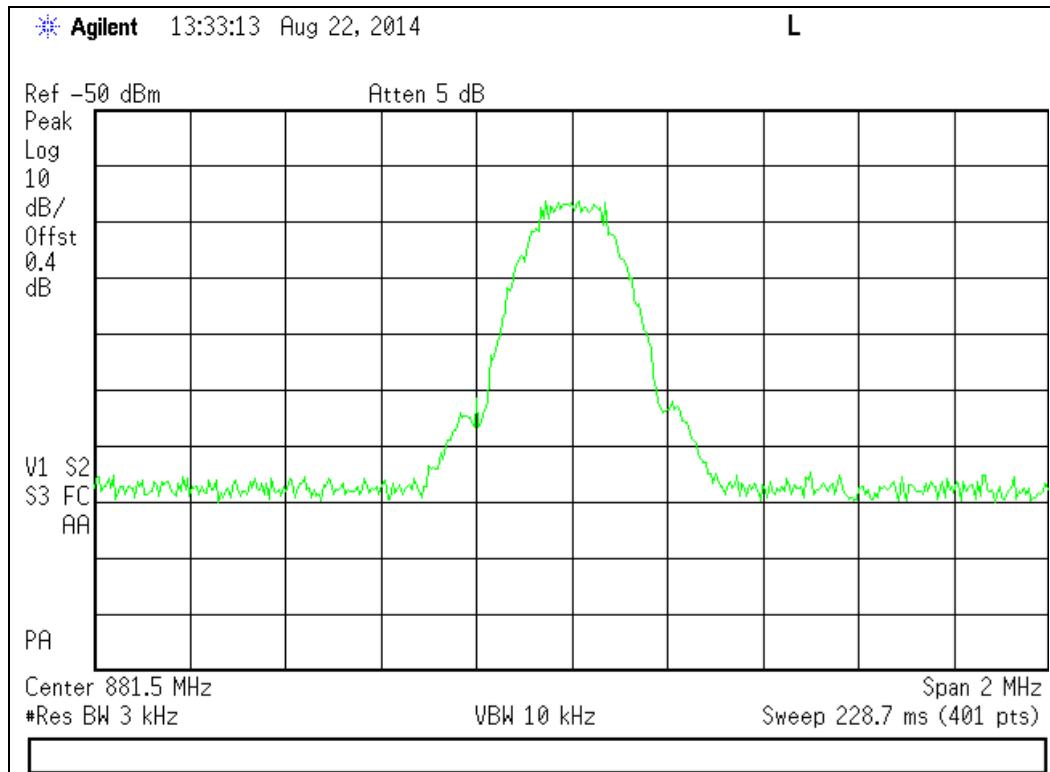


Output

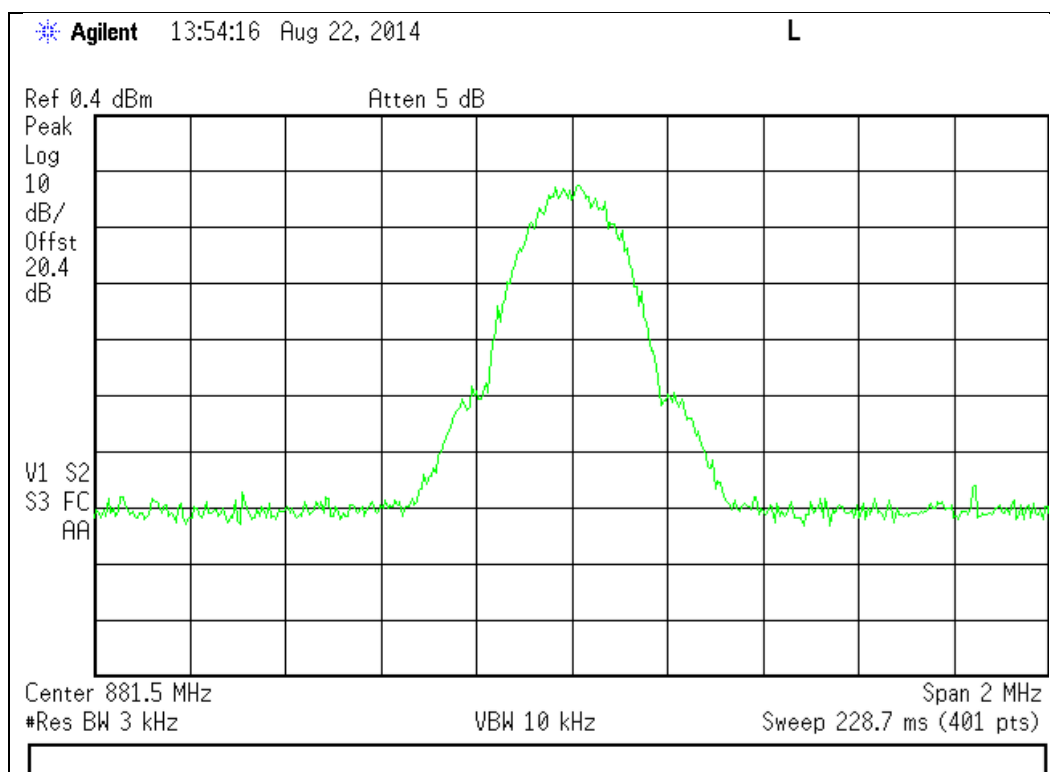




1930 - 1990 MHz Band

Input

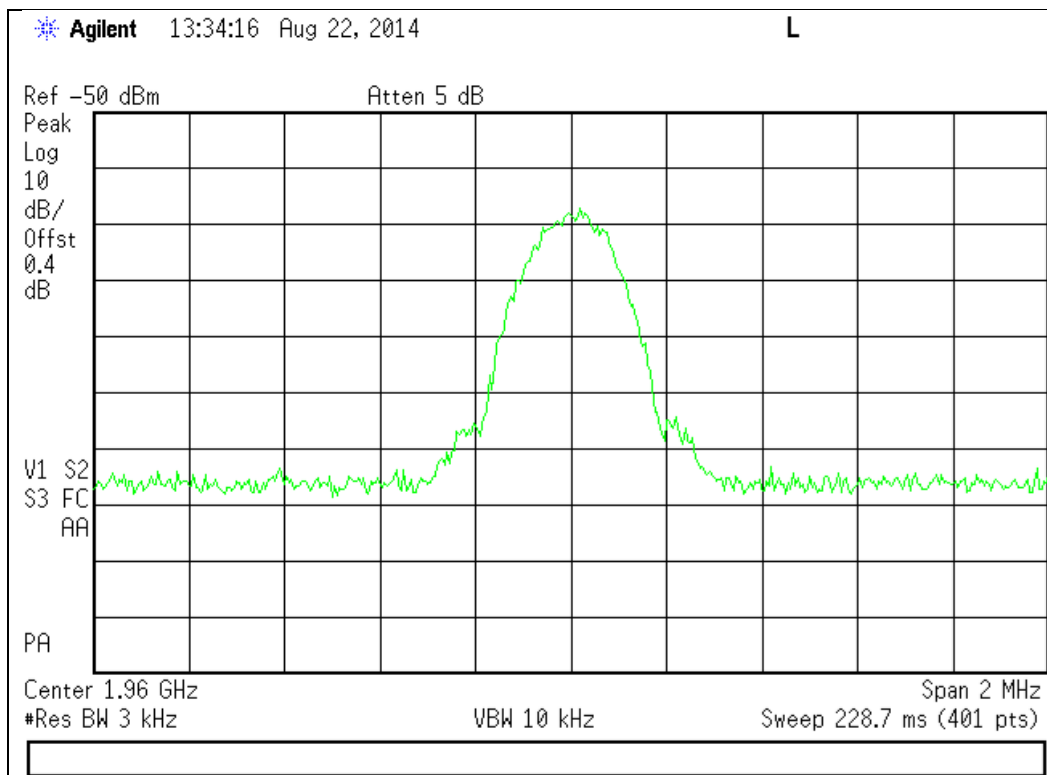


Output

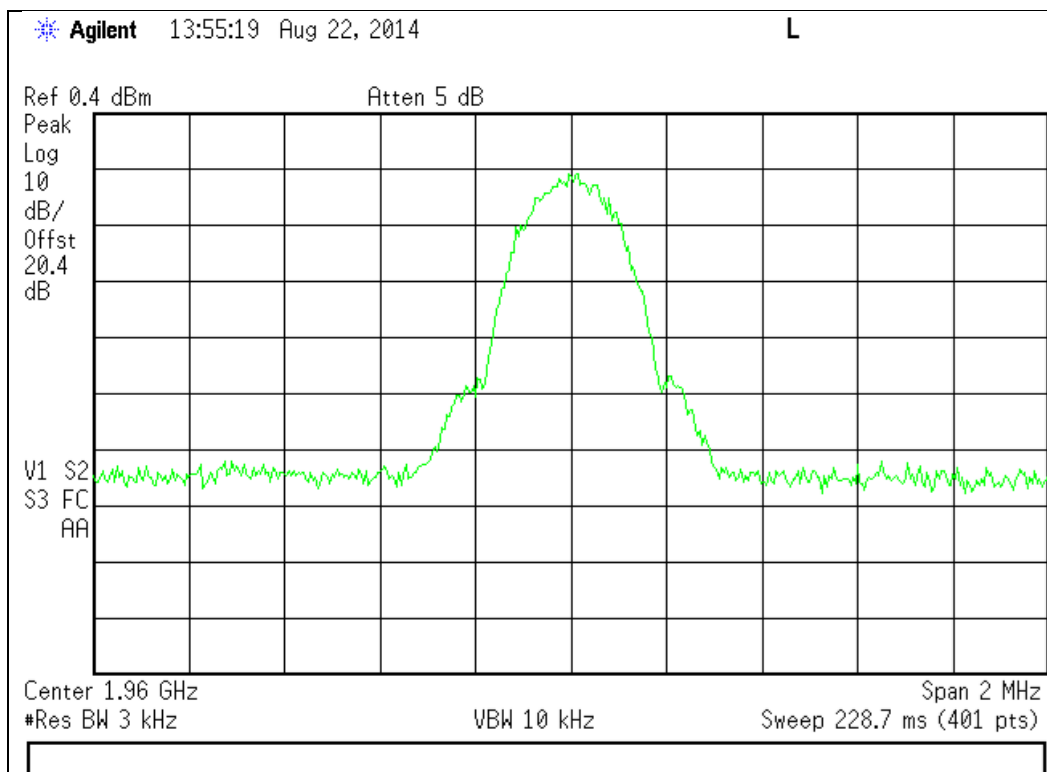


CDMA Uplink Test Plots

824 - 849 MHz Band

Input

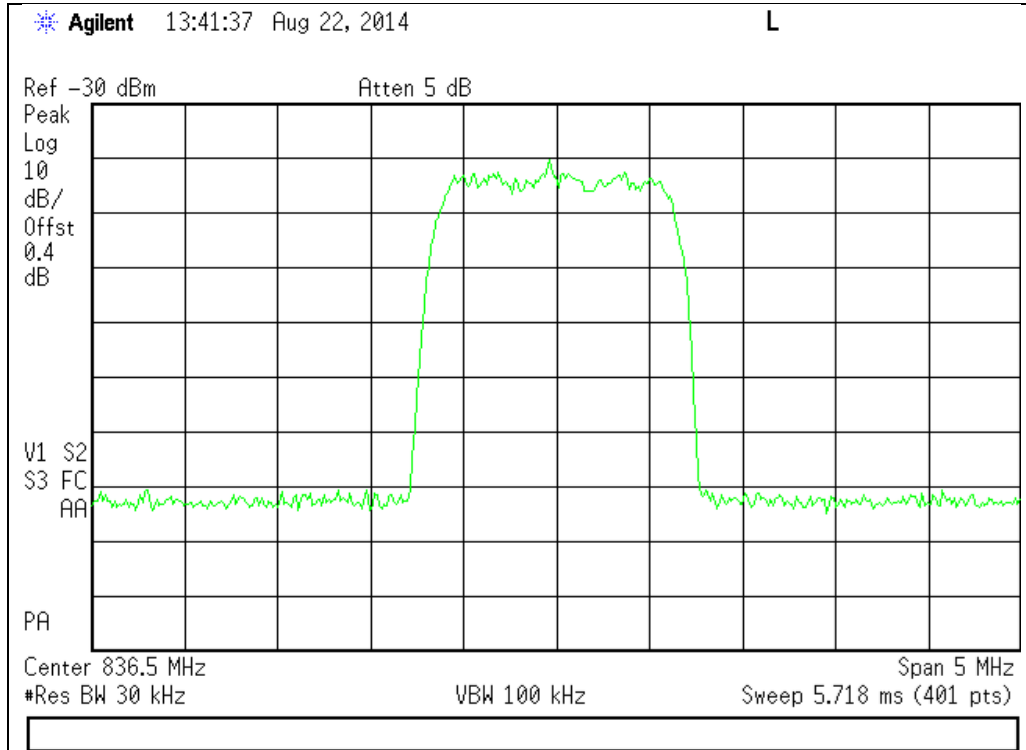


Output

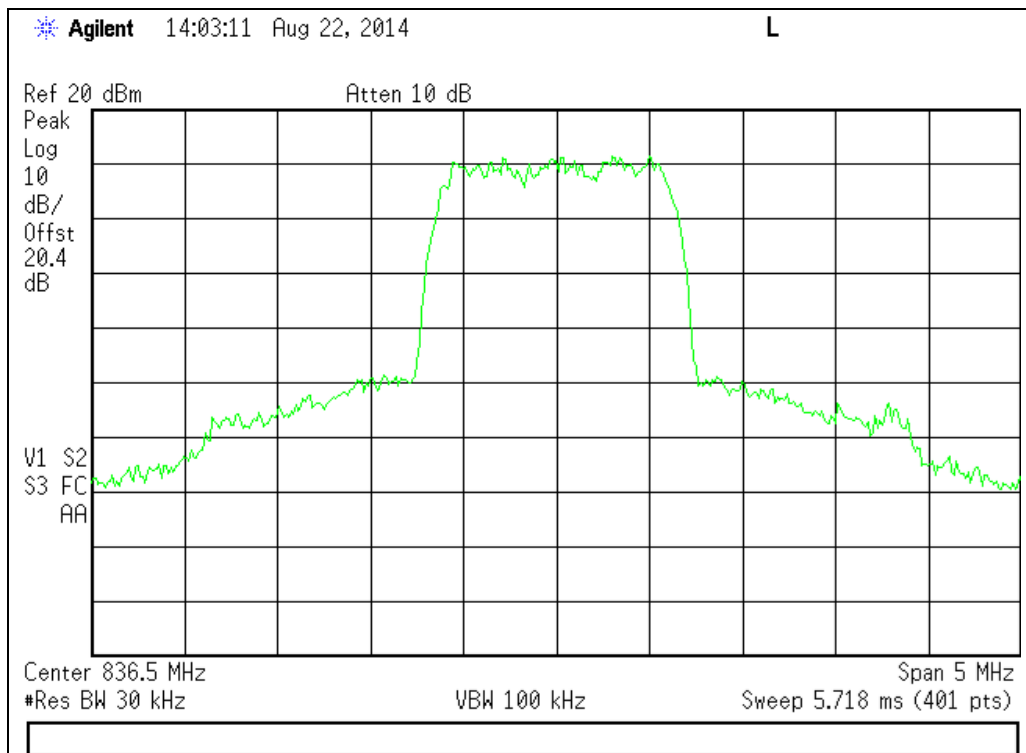




1850 - 1910 MHz Band

Input

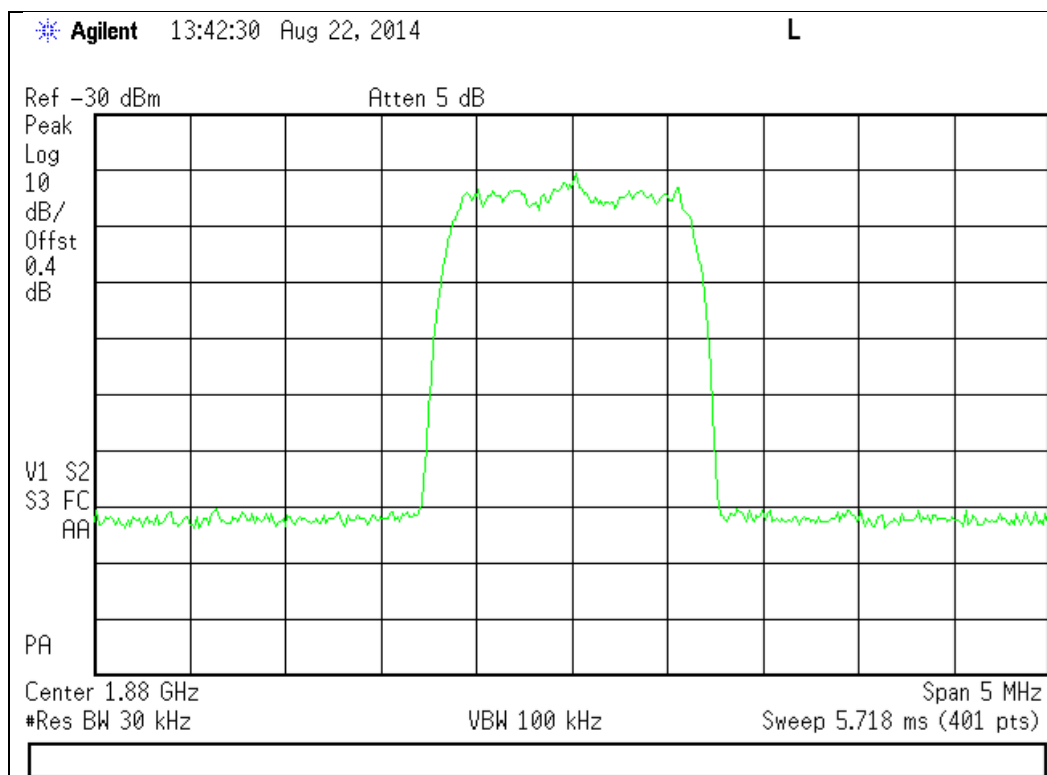


Output

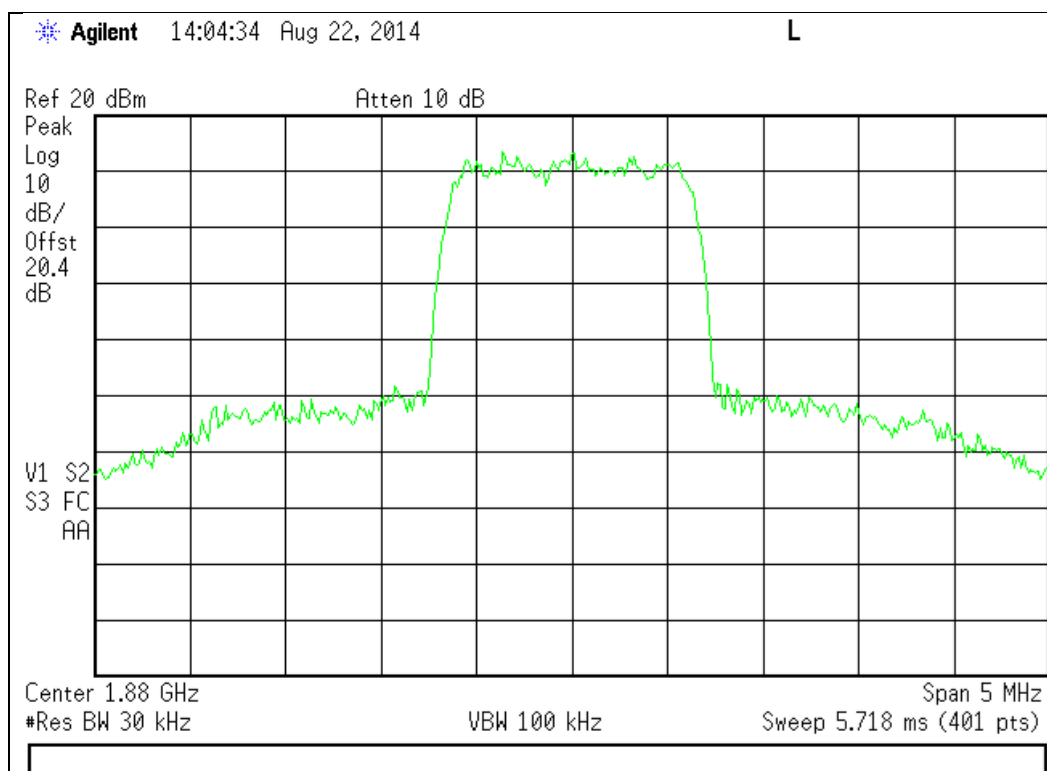


CDMA Downlink Test Plots

869 - 894 MHz Band

Input

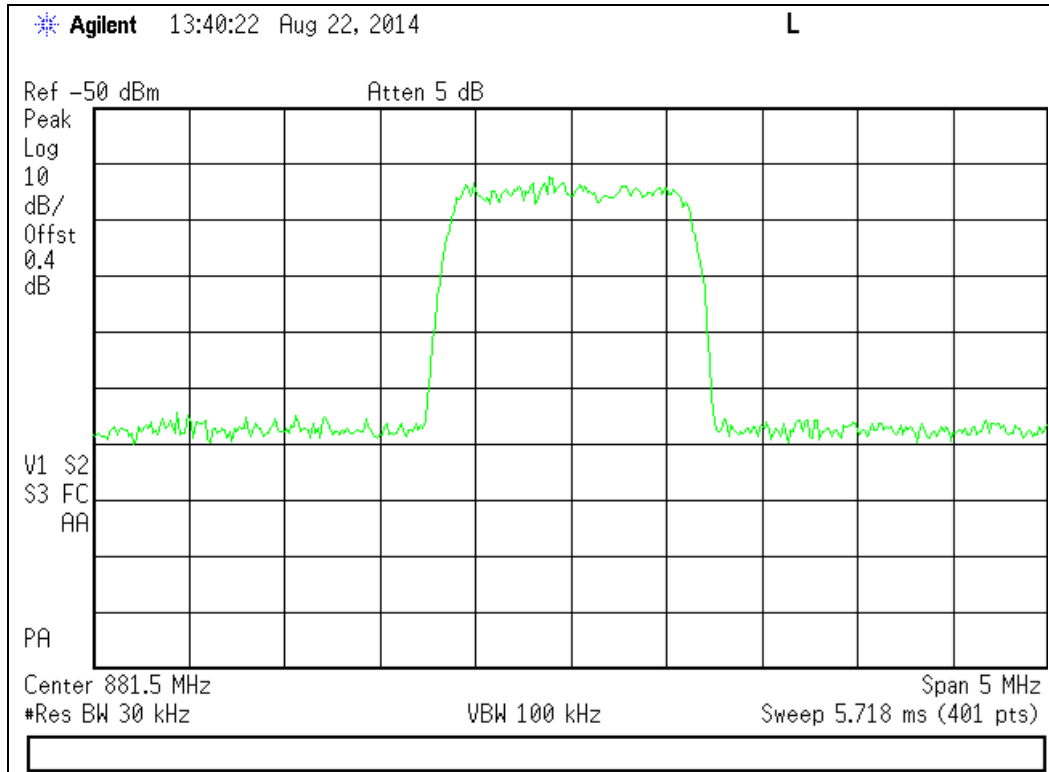


Output

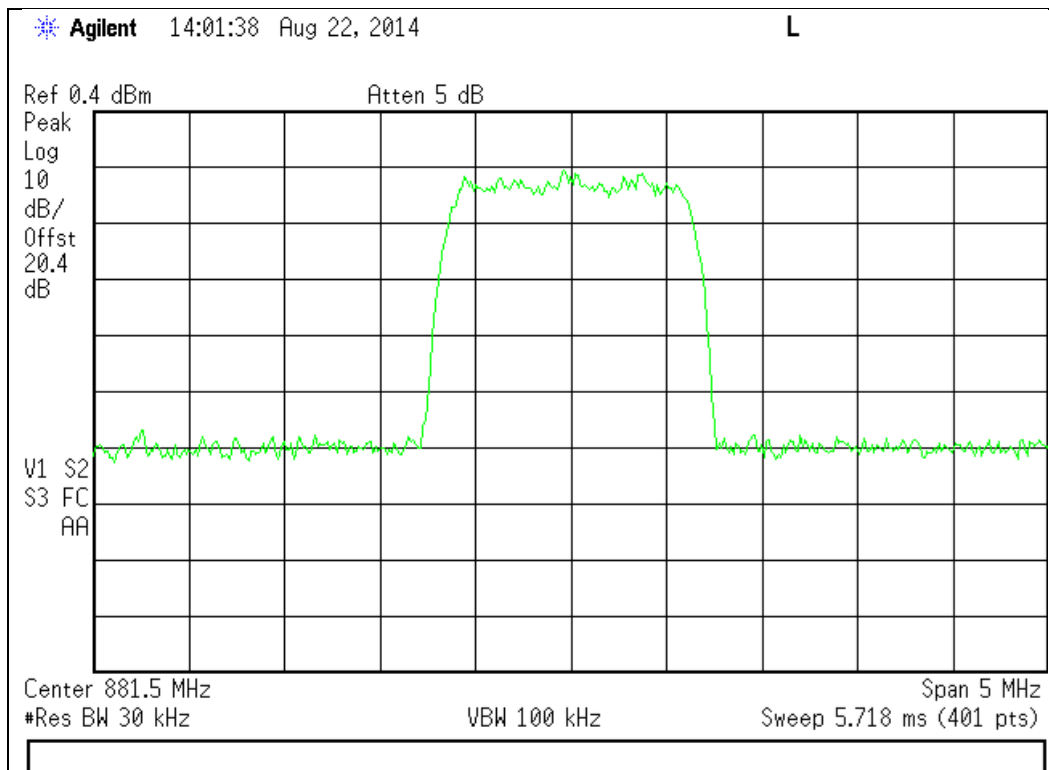




1930 - 1990 MHz Band

Input

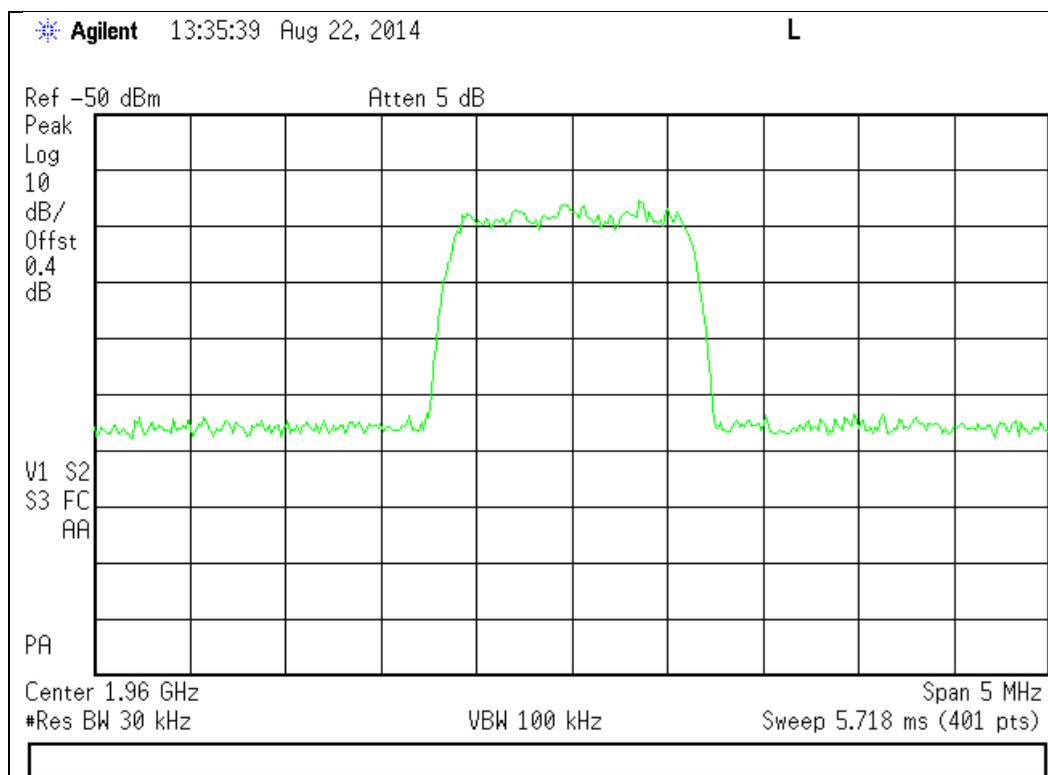


Output

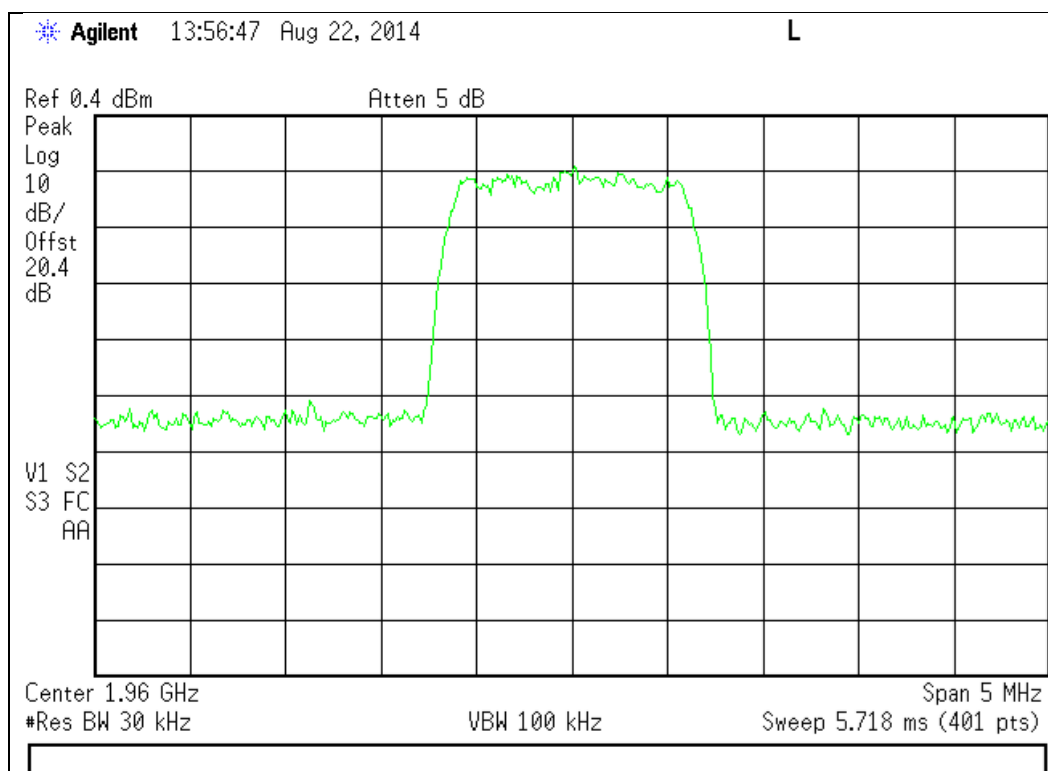


WCDMA Uplink Test Plots

824 - 849 MHz Band

Input

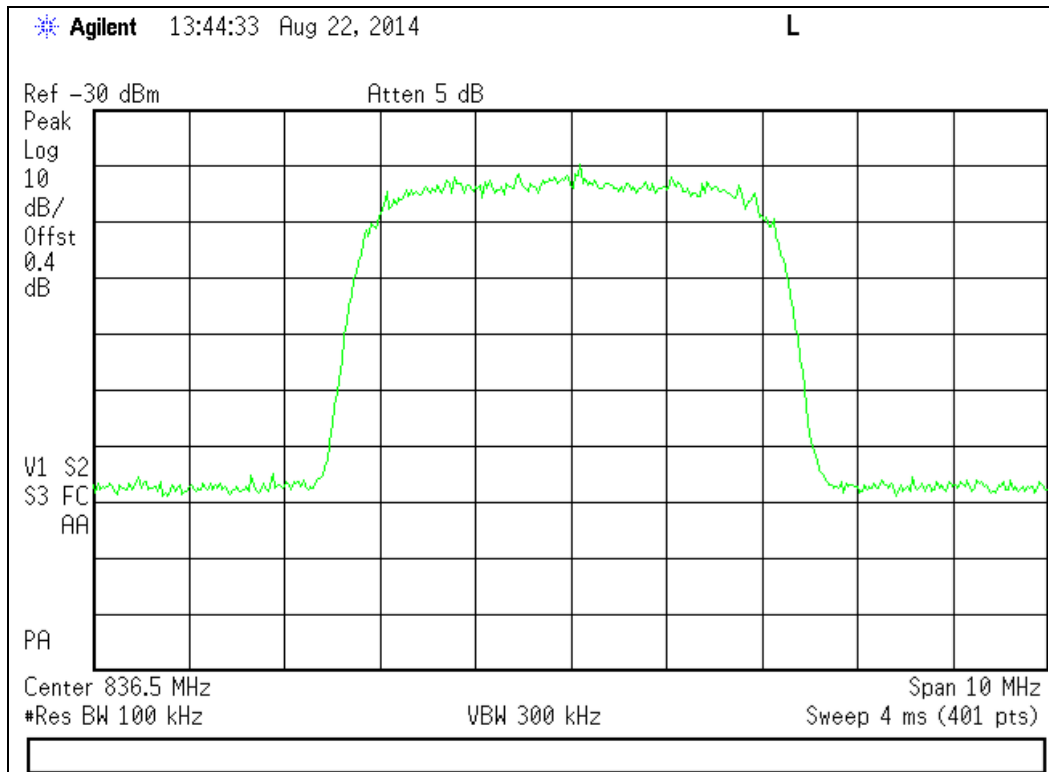


Output

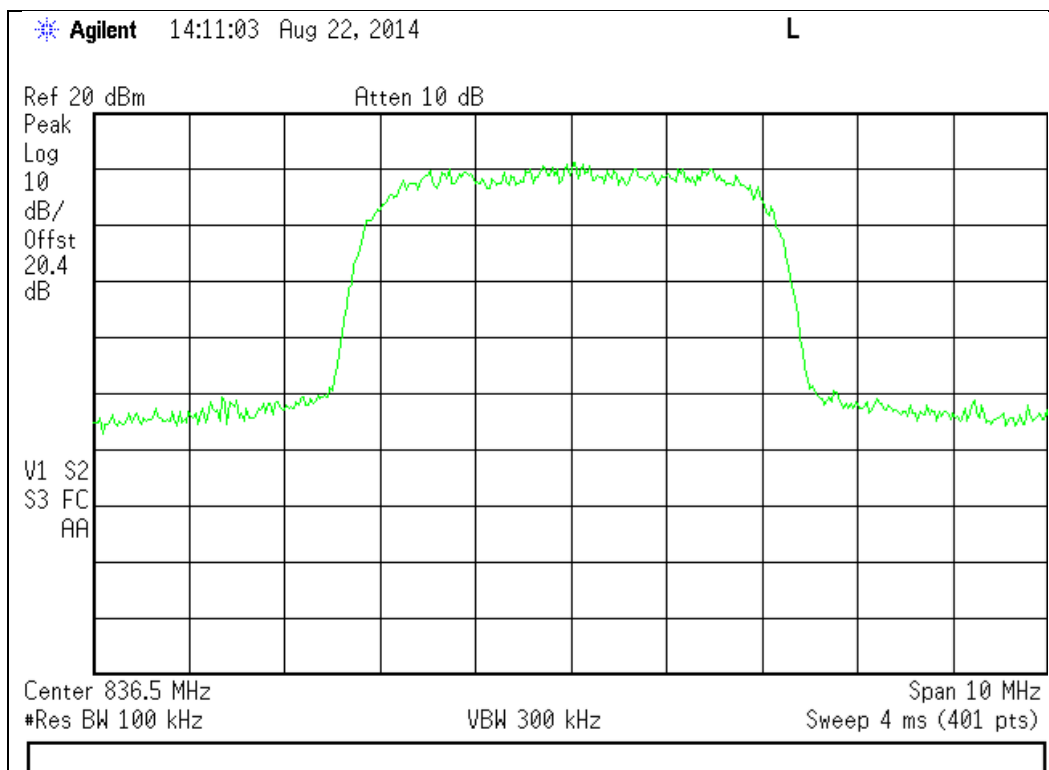




1850 - 1910 MHz Band

Input

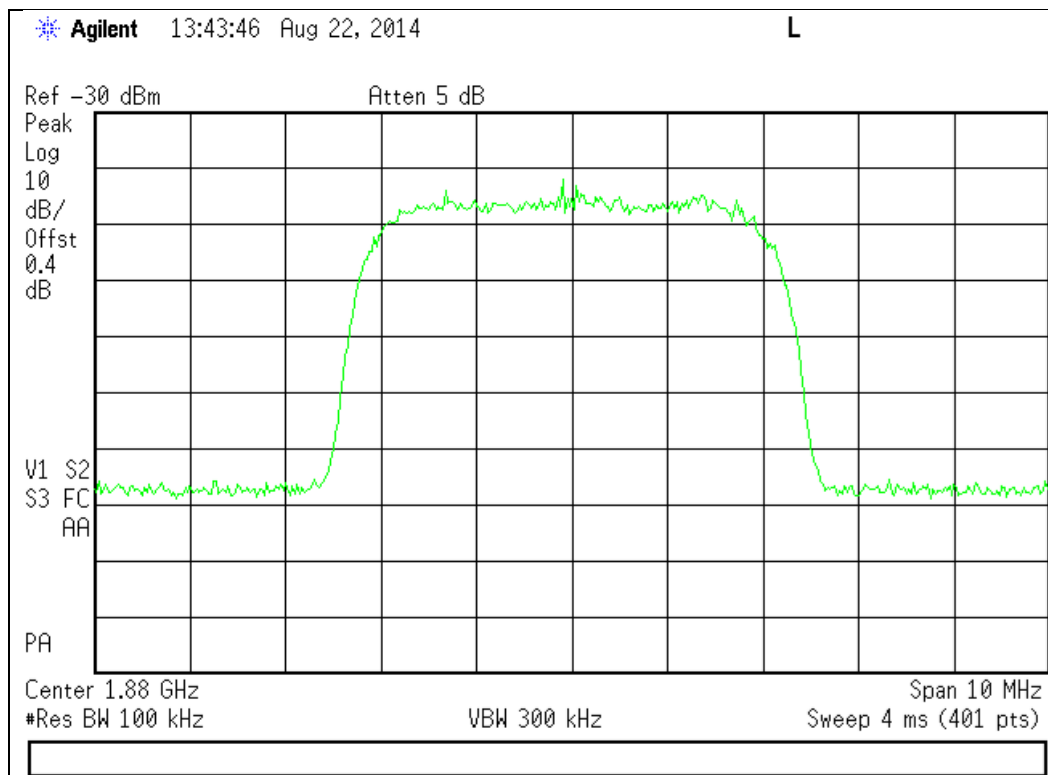


Output

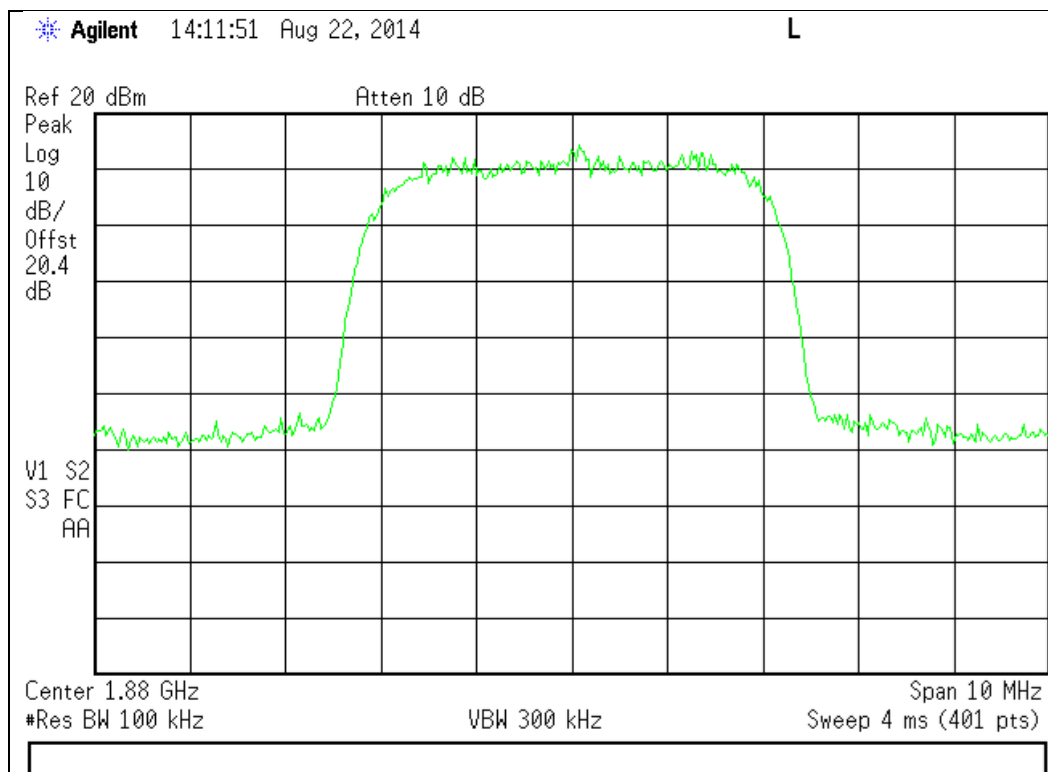


WCDMA Downlink Test Plots

869 - 894 MHz Band

Input

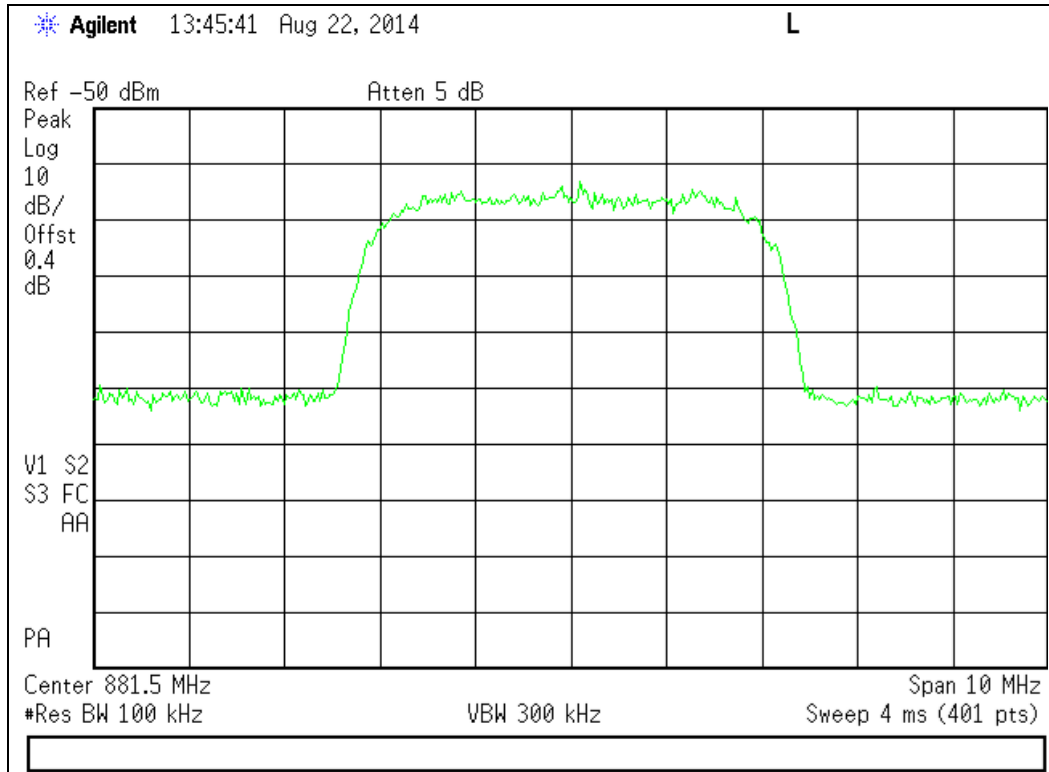


Output

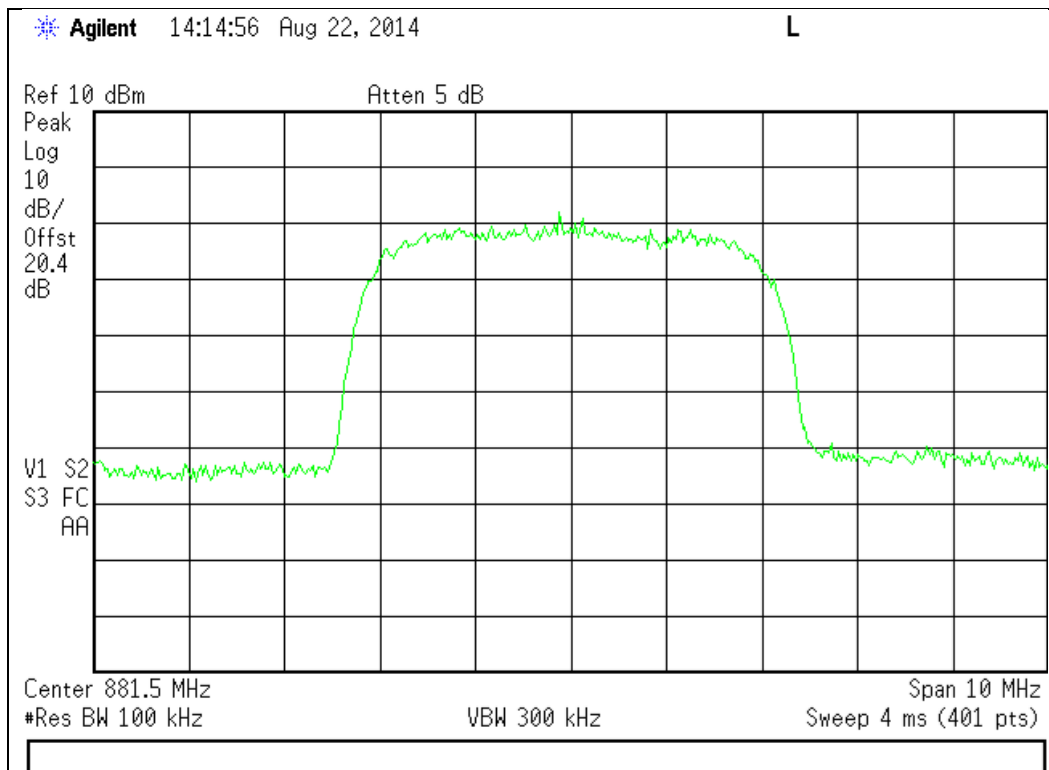


1930 - 1990 MHz Band

Input

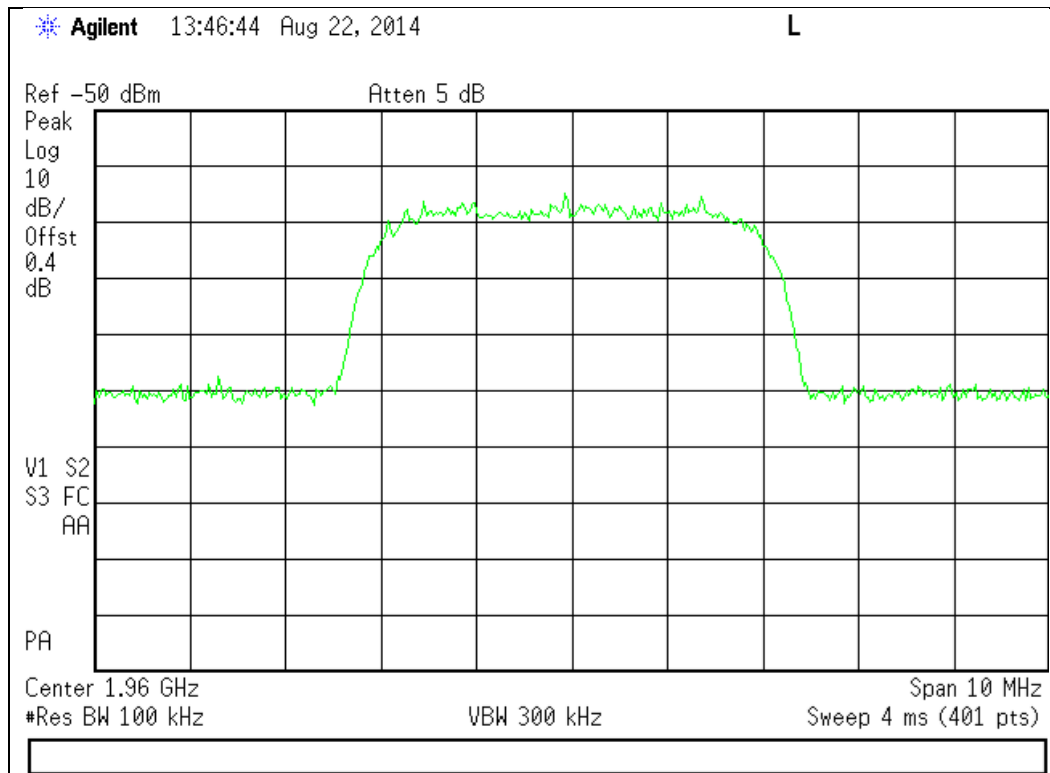

Output

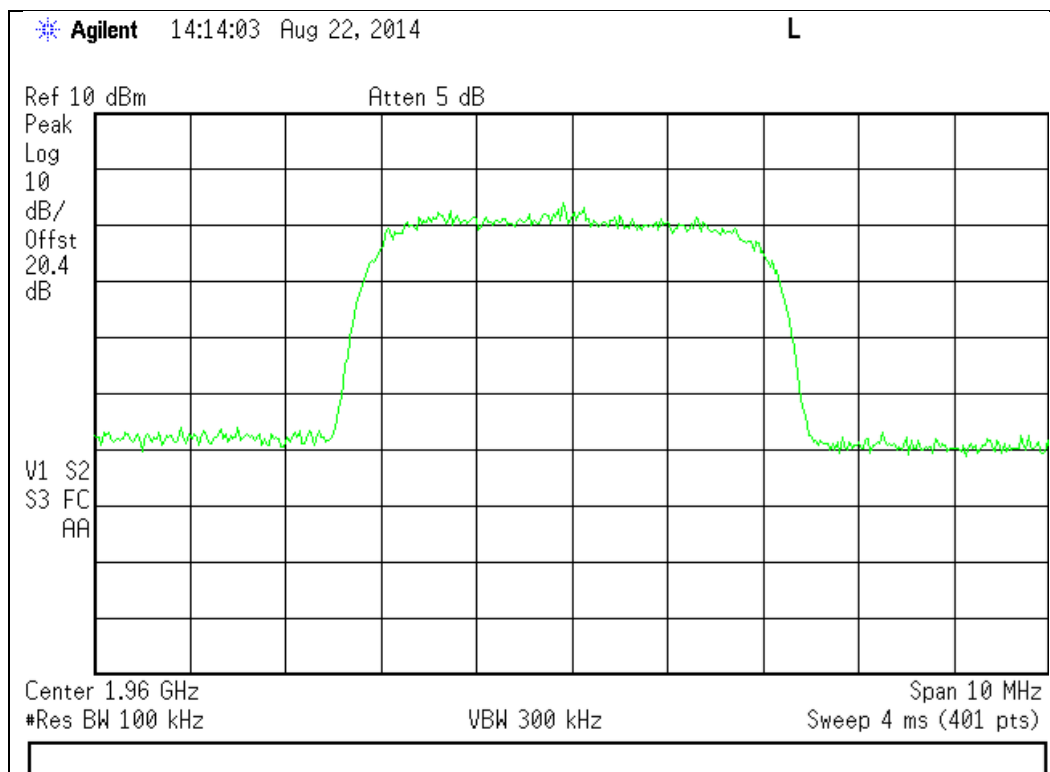

Oscillation Detection


Engineer: Mike Graffeo

Test Date: 8/25/2014

Test Procedure

The EUT was connected to a spectrum analyzer set for 0 Hz operation. The EUT uplink and downlink were fed back upon each other through a selectable band pass filter and variable attenuator. The EUT uplink and downlink were tested to ensure that the presence of oscillation was detected and that the EUT output turned off within 300 mS for the Uplink and 1 second for the Downlink and remained off for 1 minute. A EUT with test software was utilized to ensure that the EUT only had a maximum of 5 attempts at restart from oscillation before permanently shutting off.

Test Setup

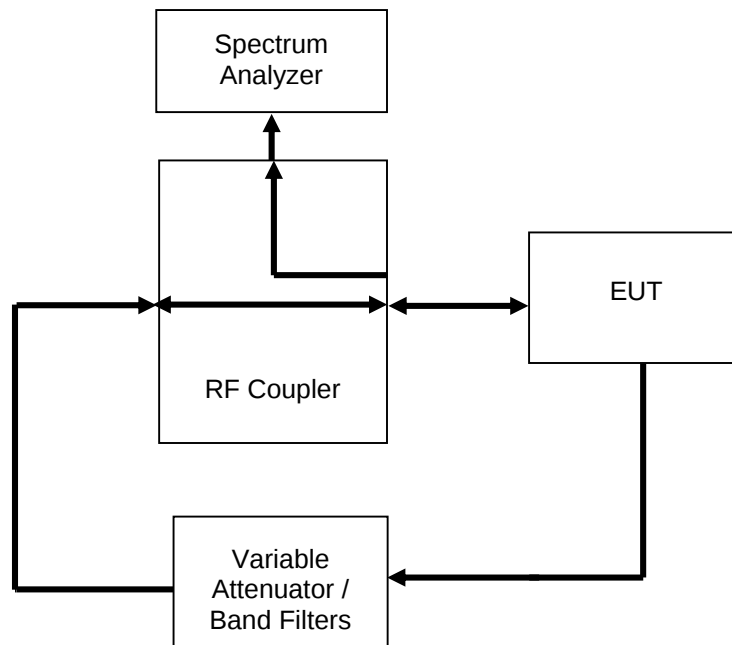

Uplink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
824 - 849	201.20	300	Pass
1850 - 1910	201.20	300	Pass

Downlink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
869 - 894	200.10	1000	Pass
1930 - 1990	203.60	1000	Pass

Uplink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
824 - 849	61.95	≥60	Pass
1850 - 1910	61.77	≥60	Pass

Downlink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
869 - 894	62.12	≥60	Pass
1930 - 1990	62.13	≥60	Pass

Uplink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
824 - 849	4	≤5	Pass
1850 - 1910	4	≤5	Pass

Downlink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
869 - 894	4	≤5	Pass
1930 - 1990	4	≤5	Pass

Uplink Detection Time Test Results

824 - 849 MHz Band

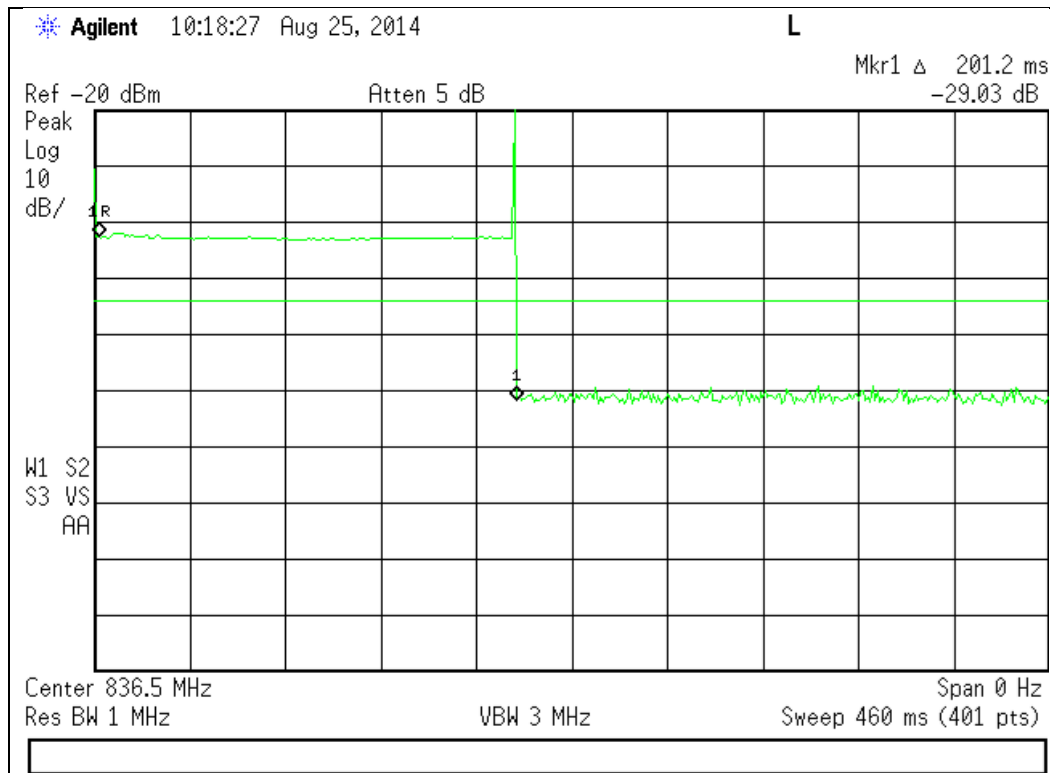


1850 - 1910 MHz Band

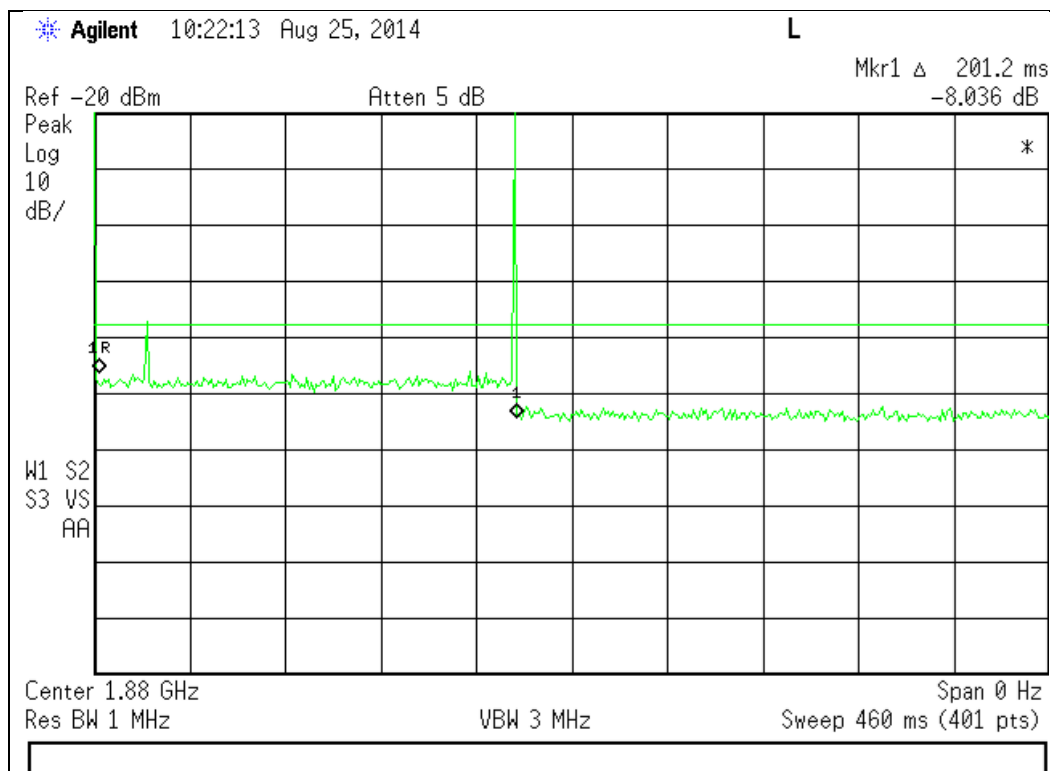


Uplink Restart Time Test Results

824 - 849 MHz Band

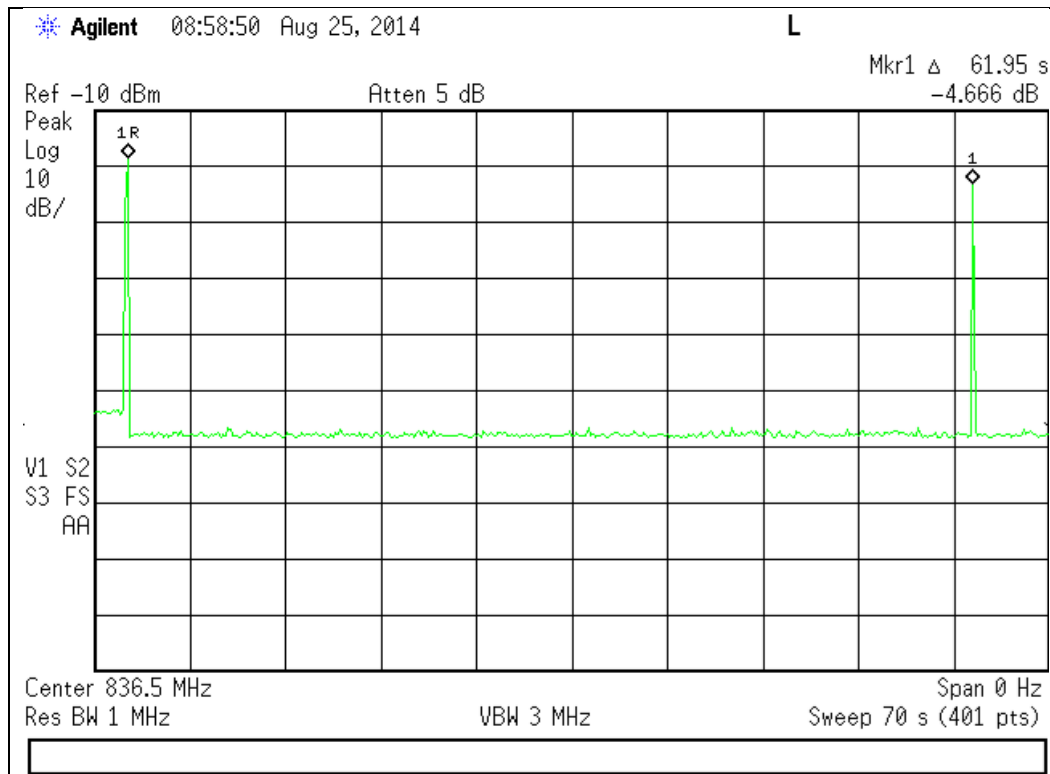


1850 - 1910 MHz Band

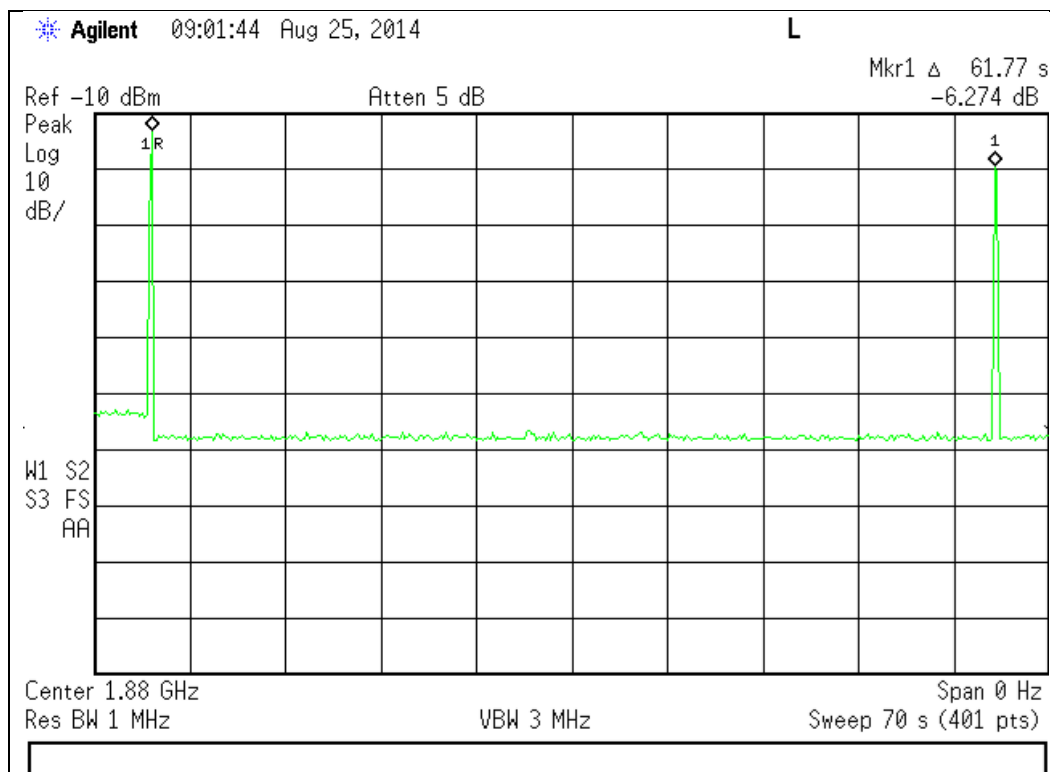


Uplink Restart Count Test Results

824 - 849 MHz Band

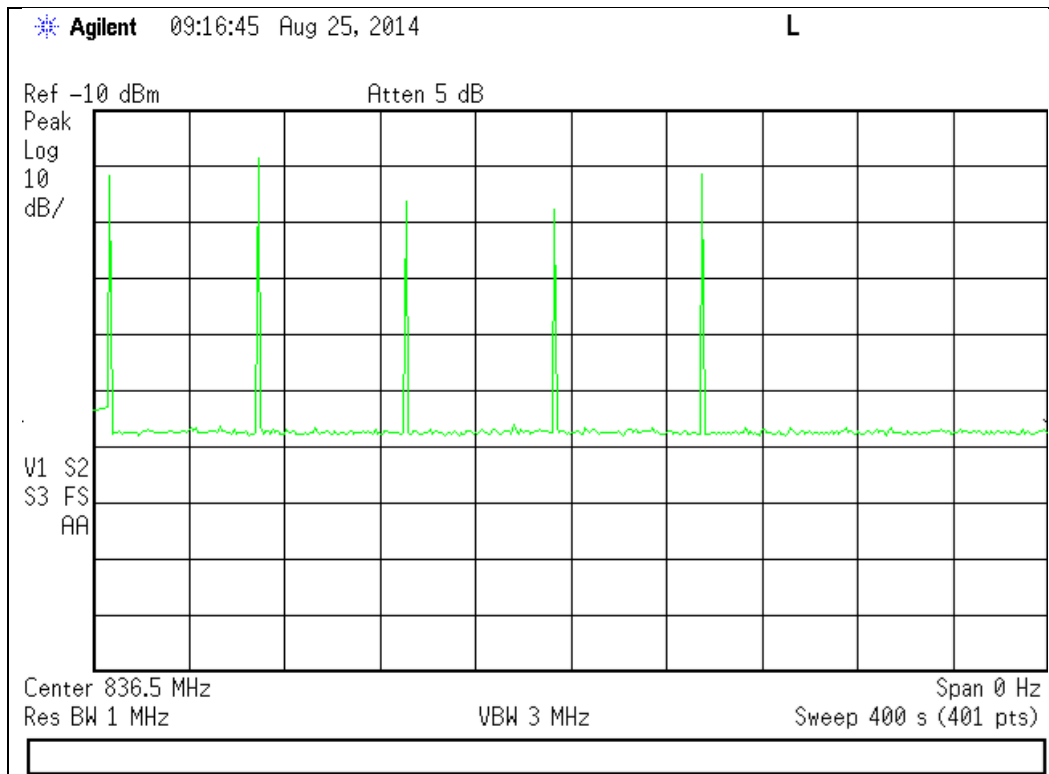


1850 - 1910 MHz Band

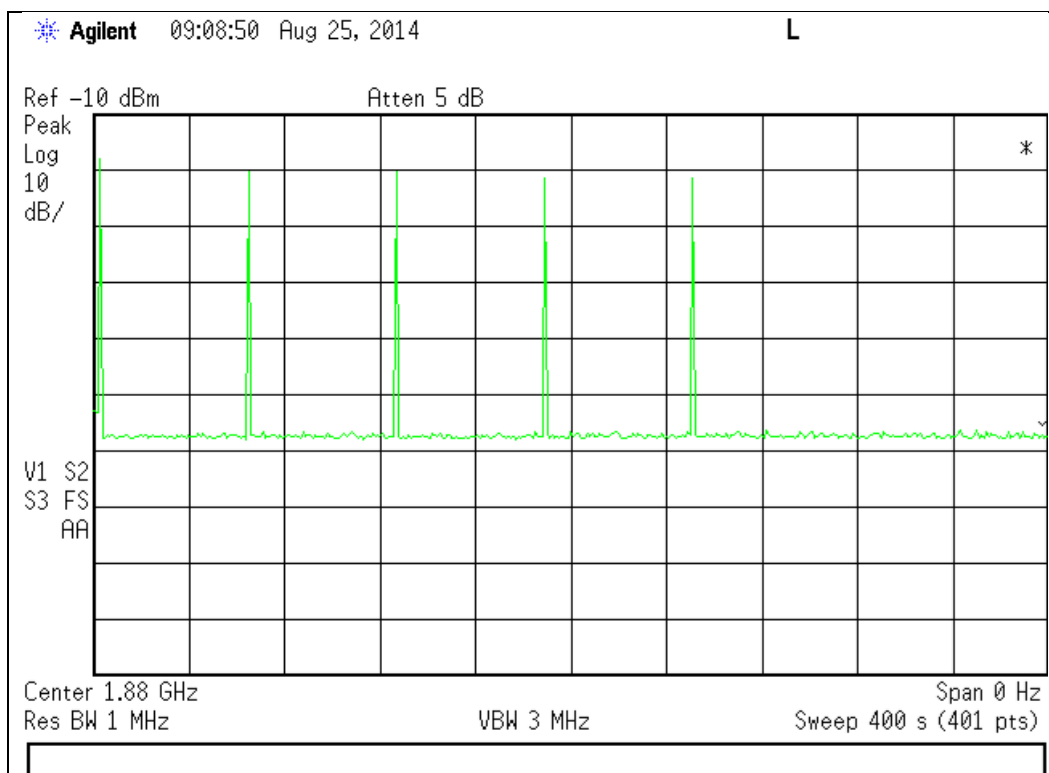




Downlink Detection Time Test Results

869 - 894 MHz Band

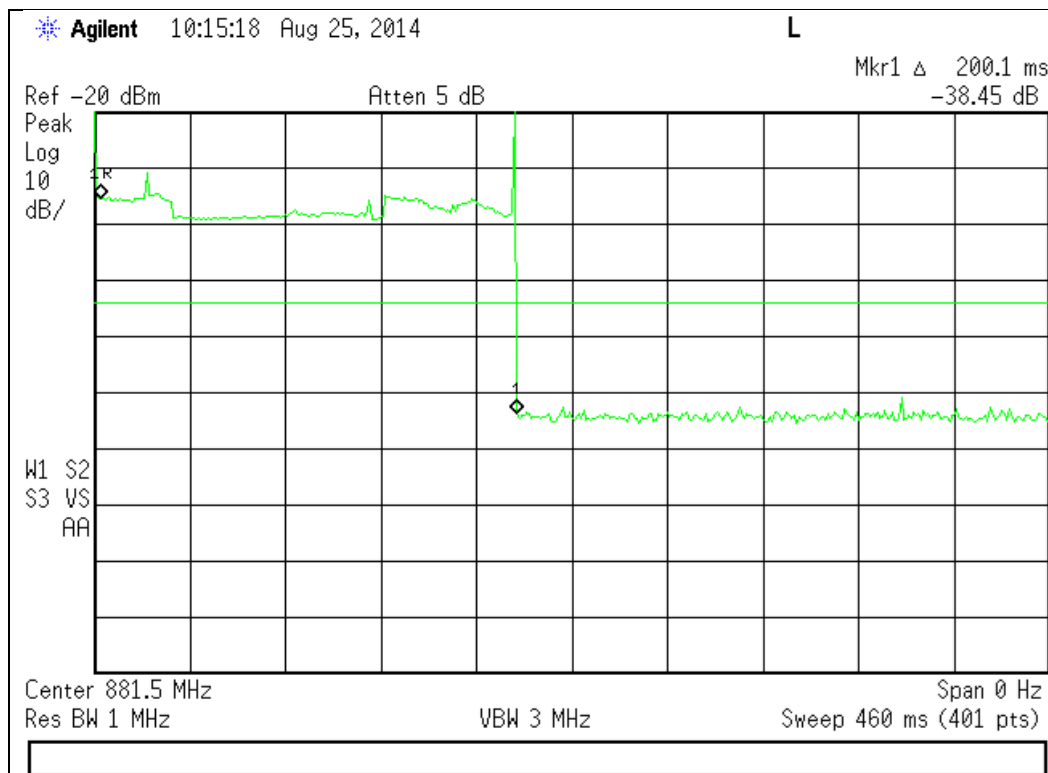


1930 - 1990 MHz Band

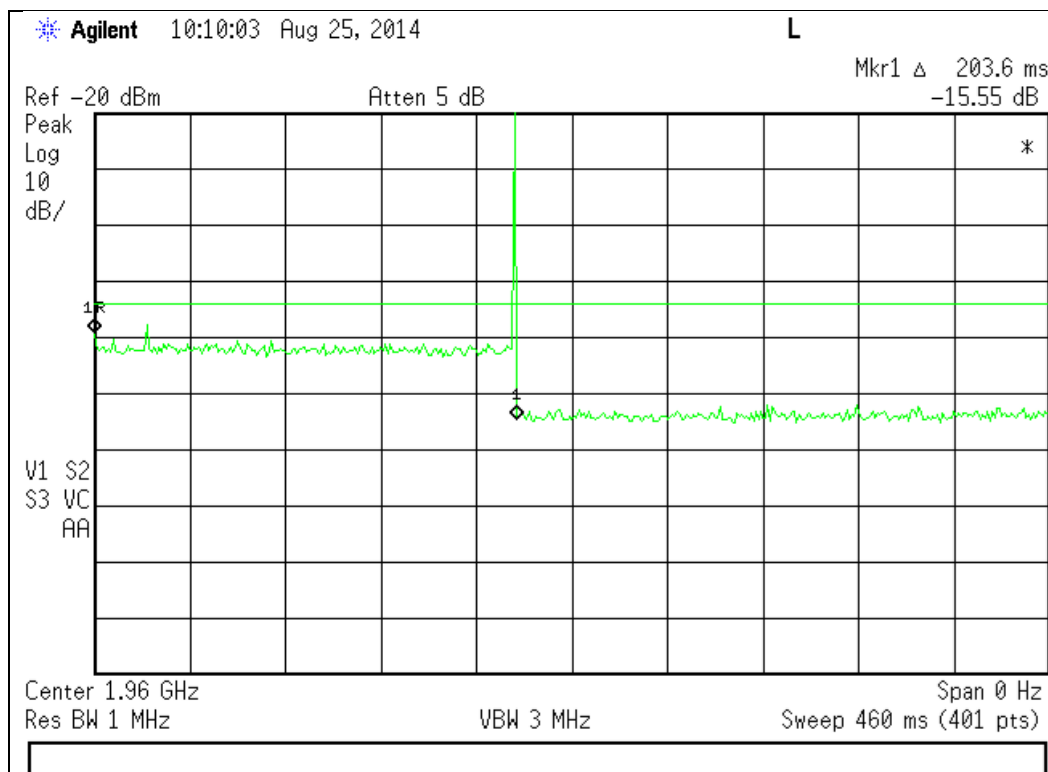


Downlink Restart Time Test Results

869 - 894 MHz Band

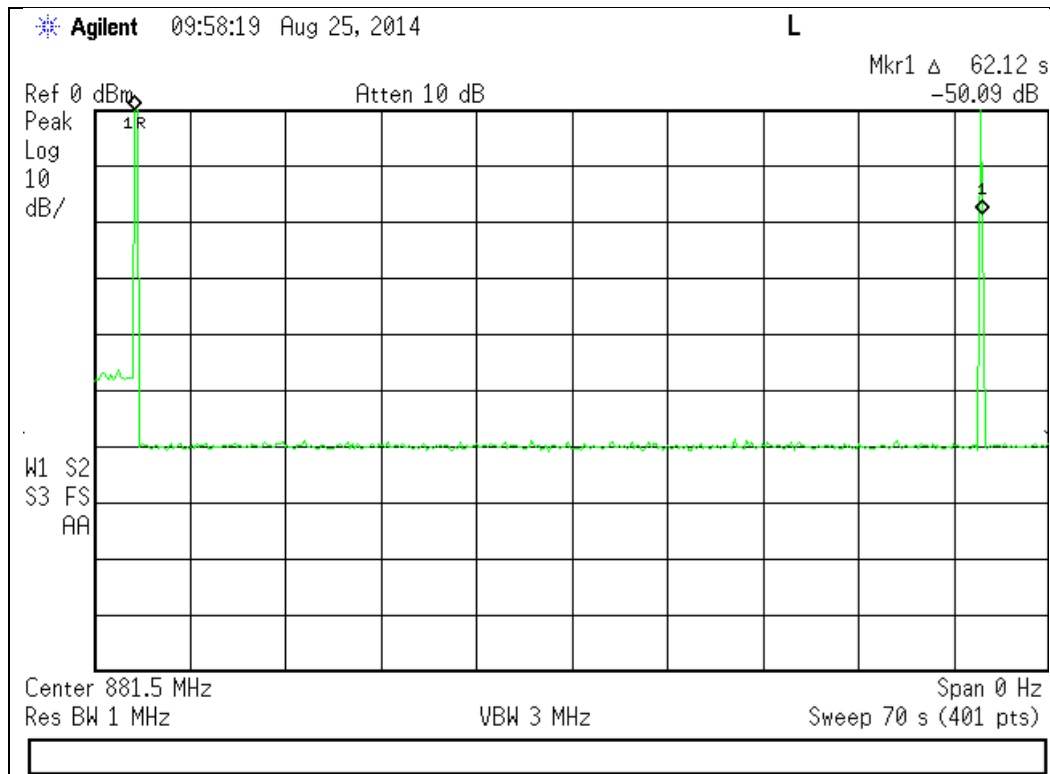


1930 - 1990 MHz Band

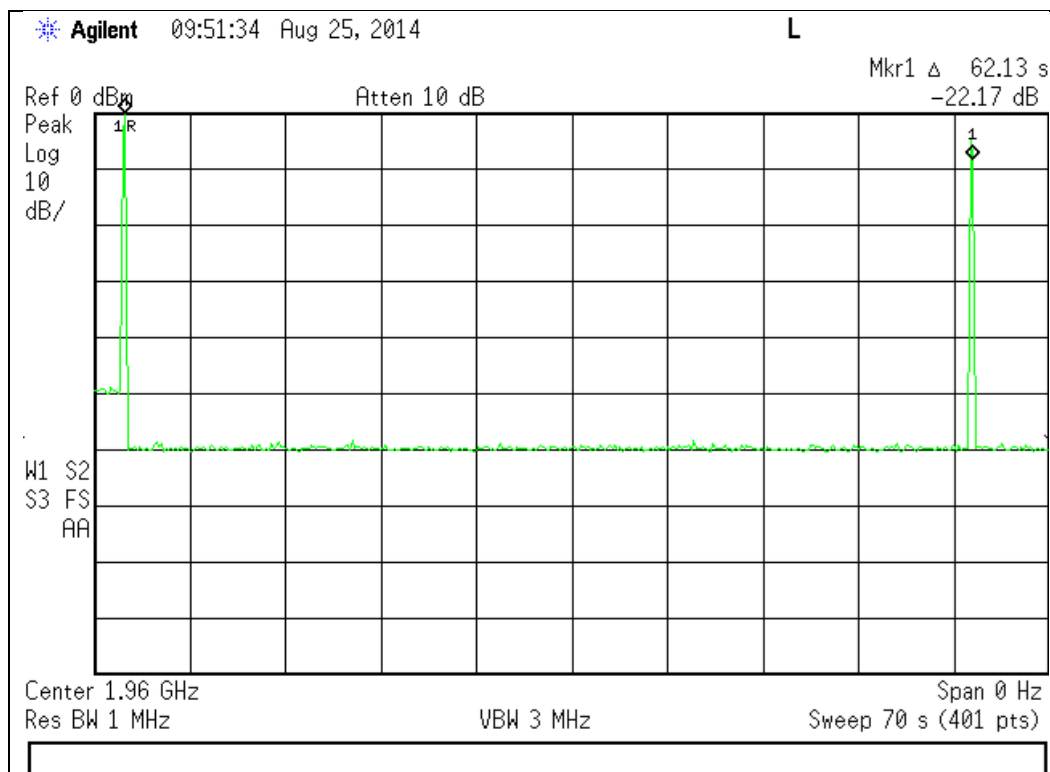


Downlink Restart Count Test Results

869 - 894 MHz Band

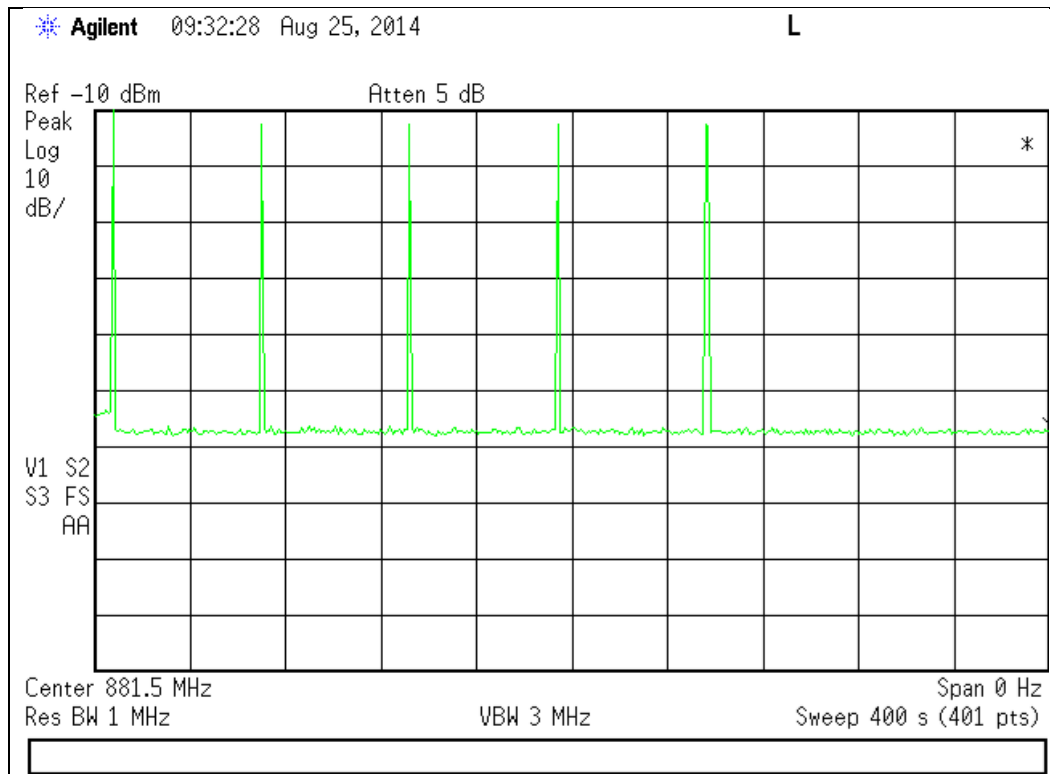

1930 - 1990 MHz Band

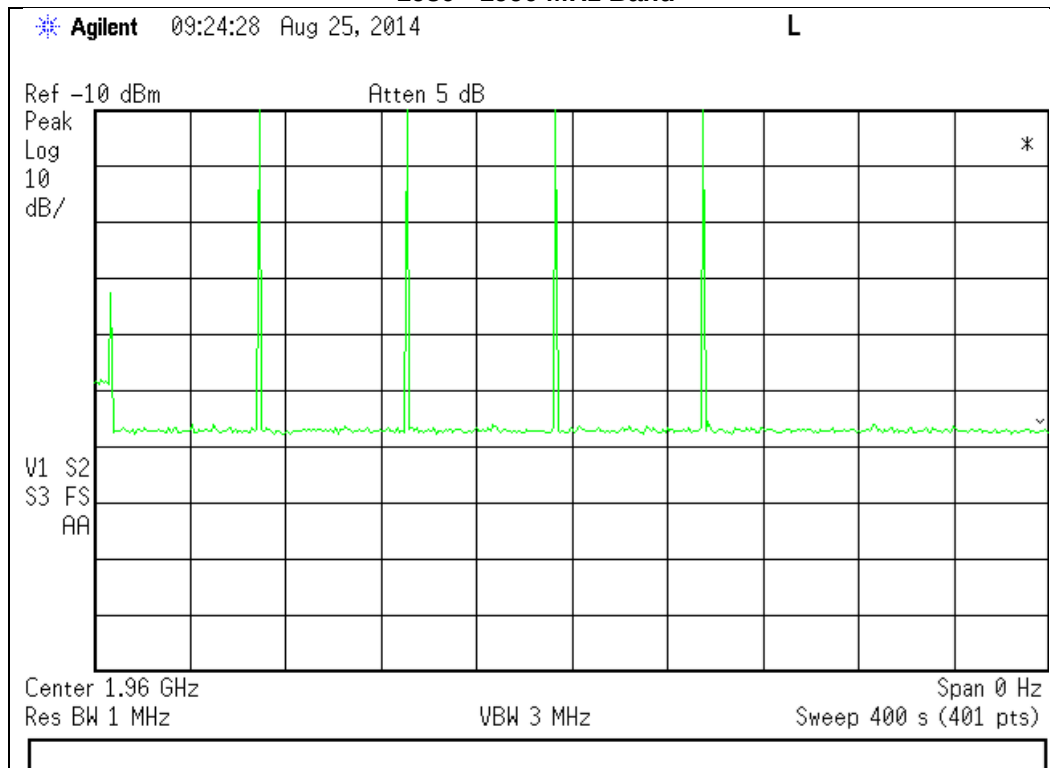

Radiated Spurious**Engineer:** Mike Graffeo**Test Date:** 8/25/2014**Test Procedure**


The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal centered in each operational uplink and downlink band. The EUT output was terminated into a 50 Ohm non-radiating load.

The following formula was used for calculating the limits:

Radiated Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13\text{dBm}$

P1 = power in dBm

P2 = power in Watts

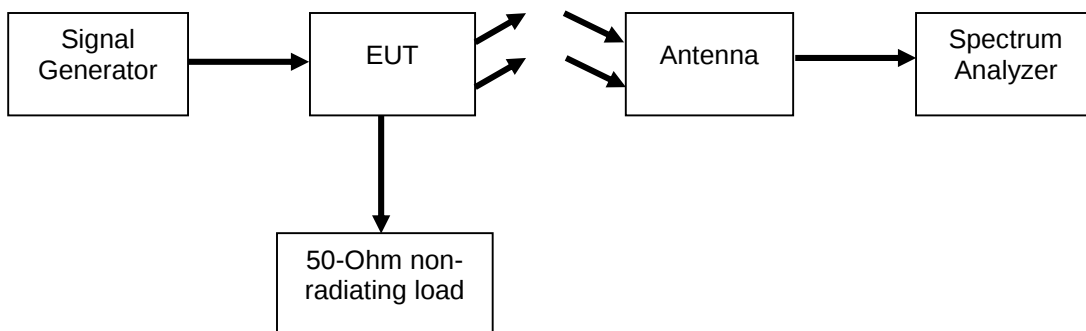Test Setup

Uplink Test Results

824 - 849 MHz Band 836.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1673	-67.14	-13	Pass
2509.5	-68.98	-13	Pass
3346	-69.62	-13	Pass

1850 - 1910 MHz Band 1880 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3760	-66.63	-13	Pass
5640	-67.25	-13	Pass
7520	-68.09	-13	Pass

Downlink Test Results

869 - 894 MHz Band 881.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1763	-60.10	-13	Pass
2644.5	-61.31	-13	Pass
3526	-64.71	-13	Pass

1930 - 1990 MHz Band 1960 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3920	-67.42	-13	Pass
5880	-61.39	-13	Pass
7840	-63.76	-13	Pass

No other emissions were detected. All emissions were lower than –13 dBm.
 All emissions were system noise floor.

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna	EMCO	3115	i00103	12/11/12	12/11/14
Bilog Antenna	Schaffner	CBL6111C	i00267	2/24/14	2/24/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75III	i00320	3/24/14	3/24/15
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
Spectrum Analyzer	Agilent	E4407B	i00331	6/13/2014	6/13/2015
Signal Generator	Rohde & Schwarz	SMU200A	i00405	12/11/13	12/11/14

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT