FCC Radio Test Report

FCC ID: POT-TWSCK

This report concerns: Original Grant

Project No.	:	2011H027
Equipment	:	1) DOLFIN 2) MOJITO
Brand Name	:	Chiline
Test Model	:	1) CK1 2) CK2
Series Model	:	1) CKxxxxxxxx (The symbol "x" can be 0-9, a-z, A-Z,-) 2) CKxxxxxxxx (The symbol "x" can be 0-9, a-z, A-Z,-)
Applicant	:	Inventec Appliances Corp.
Address	:	37 Wugong 5th road, New Taipei Industrial Park, Wugu District, New Taipei City, Taiwan
Manufacturer 1	:	Inventec Appliances (Pudong) Corporation
Address	:	No.789 Pu Xing Road,Shanghai,PRC
Manufacturer 2	:	Zhejiang Jinmanli Electronic Technology Co., Ltd.
Address	:	Room 400, No. 8, Nanxin Road, Taozhuang Town, Jiashan County, Jiaxing City, Zhejiang Province
Date of Receipt	:	Nov. 11, 2020
Date of Test	:	Nov. 12, 2020 ~ Dec. 03, 2020
Issued Date	:	Dec. 08, 2020
Report Version	:	R00
Test Sample	:	Engineering Sample No.: SH2020111123-1, SH2020111123-6, SH2020111123-3
Standard(s)	:	FCC Part15, Subpart C (15.247) ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Maker Qi

Prepared by : Maker Qi

Ryan. Wang

Approved by : Ryan Wang

Certificate # 5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China
TEL: +86-021-61765666
Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 6
1 . SUMMARY OF TEST RESULTS 7
1.1 TEST FACILITY 8
1.2 MEASUREMENT UNCERTAINTY 8
1.3 TEST ENVIRONMENT CONDITIONS 8
2 . GENERAL INFORMATION 9
2.1 GENERAL DESCRIPTION OF EUT 9
2.2 DESCRIPTION OF TEST MODES 11
2.3 PARAMETERS OF TEST SOFTWARE 11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 12
2.5 SUPPORT UNITS 12
3 . AC POWER LINE CONDUCTED EMISSIONS TEST 13
3.1 LIMIT 13
3.2 TEST PROCEDURE 13
3.3 DEVIATION FROM TEST STANDARD 13
3.4 TEST SETUP 14
3.5 EUT OPERATING CONDITIONS 14
3.6 TEST RESULTS 14
4 . RADIATED EMISSION TEST 15
4.1 LIMIT 15
4.2 TEST PROCEDURE 16
4.3 DEVIATION FROM TEST STANDARD 16
4.4 TEST SETUP 17
4.5 EUT OPERATING CONDITIONS 18
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ 18
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ 18
4.8 TEST RESULTS - ABOVE 1000 MHZ 18
5 . NUMBER OF HOPPING FREQUENCY 19
5.1 LIMIT 19
5.2 TEST PROCEDURE 19
5.3 DEVIATION FROM STANDARD 19
5.4 TEST SETUP 19
5.5 EUT OPERATION CONDITIONS 19

Table of Contents Page

5.6 TEST RESULTS 19
6 . AVERAGE TIME OF OCCUPANCY 20
6.1 LIMIT 20
6.2 TEST PROCEDURE 20
6.3 DEVIATION FROM STANDARD 20
6.4 TEST SETUP 20
6.5 EUT OPERATION CONDITIONS 20
6.6 TEST RESULTS 20
7 . HOPPING CHANNEL SEPARATION MEASUREMENT 21
7.1 LIMIT 21
7.2 TEST PROCEDURE 21
7.3 DEVIATION FROM STANDARD 21
7.4 TEST SETUP 21
7.5 EUT OPERATION CONDITIONS 21
7.6 TEST RESULTS 21
8 . BANDWIDTH TEST 22
8.1 LIMIT 22
8.2 TEST PROCEDURE 22
8.3 DEVIATION FROM STANDARD 22
8.4 TEST SETUP 22
8.5 EUT OPERATION CONDITIONS 22
8.6 TEST RESULTS 22
9 . MAXIMUM OUTPUT POWER 23
9.1 LIMIT 23
9.2 TEST PROCEDURE 23
9.3 DEVIATION FROM STANDARD 23
9.4 TEST SETUP 23
9.5 EUT OPERATION CONDITIONS 23
9.6 TEST RESULTS 23
10 . CONDUCTED SPURIOUS EMISSION 24
10.1 LIMIT 24
10.2 TEST PROCEDURE 24
10.3 DEVIATION FROM STANDARD 24
10.4 TEST SETUP 24

Table of Contents **Page**

10.5 EUT OPERATION CONDITIONS 24

10.6 TEST RESULTS 24

11 . MEASUREMENT INSTRUMENTS LIST 25

12 . EUT TEST PHOTO 27

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS 29

APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ 30

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ 31

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ 34

APPENDIX E - NUMBER OF HOPPING FREQUENCY 71

APPENDIX F - AVERAGE TIME OF OCCUPANCY 74

APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT 77

APPENDIX H - BANDWIDTH 80

APPENDIX I - MAXIMUM OUTPUT POWER 83

APPENDIX J - CONDUCTED SPURIOUS EMISSION 86

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 08, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	**Test Item**	**Test Result**	**Judgment**	**Remark**
15.207	AC Power Line Conducted Emissions	APPENDIX A	N/A	------
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	------
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	------
15.247 (a)(1)(iii)	Average Time Of Occupancy	APPENDIX F	PASS	------
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	------
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	------
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	------
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	------
15.203	Antenna Requirement	------	PASS	Note(2)

Note:

(1) “N/A” denotes test is not applicable in this test report

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China
BTL's Test Firm Registration Number for FCC: 476765
BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. AC Power Line Conducted Emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
SH-C01	CISPR	9 kHz ~ 150 MHz	2.92

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Radiated Emissions-9K-30MHz	24°C	58%	AC 120V/60Hz	Forest Li
Radiated Emissions-30 MHz to 1GHz	24°C	58%	AC 120V/60Hz	Forest Li
Radiated Emissions-Above 1000 MHz	24°C	58%	AC 120V/60Hz	Forest Li
Number of Hopping Frequency	23°C	62%	AC 120V/60Hz	Forest Li
Average Time Of Occupancy	23°C	62%	AC 120V/60Hz	Forest Li
Hopping Channel Separation	23°C	62%	AC 120V/60Hz	Forest Li
Bandwidth	23°C	62%	AC 120V/60Hz	Forest Li
Maximum Output Power & e.i.r.p.	23°C	62%	AC 120V/60Hz	Forest Li
Conducted Spurious Emission	23°C	62%	AC 120V/60Hz	Forest Li

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	1) DOLFIN 2) MOJITO
Brand Name	Chiline
Test Model	CK1 CK2
Series Model	CKxxxxxxxx (The symbol "x" can be 0-9, a-z, A-Z,-) CKxxxxxxxx (The symbol "x" can be 0-9,a-z ,A-Z,-)
Model Difference(s)	Only the model name and color are different compared with the main model.
Software Version	Ver 21.6.0.6
Hardware Version	CK02AL-03/CK02AR-03
Power Source	Battery supply.
Power Rating	I/P: 5V ⎓ 1A O/P: 5V ⎓ 50mA
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK, π/4-DQPSK, 8-DPSK
Bit Rate of Transmitter	1 Mbps, 2Mbps, 3Mbps
Max. Output Power	9.13 dBm (0.00818 W) For 1Mbps 7.51 dBm (0.00564 W) For 2Mbps 7.45 dBm (0.00556W) For 3Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	FPC	N/A	-2.4

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)
Mode 2	TX Mode Channel 00 _1Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode Channel 00 _1Mbps

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

(1) The measurements are performed at the high, middle, low available channels.
(2) The measurements for Hopping Channel Separation and Bandwidth were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented

2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	RTLBTAPP-5.2.2.72		
Frequency (MHz)	2402	2441	2480
Parameters(1Mbps)	N/A	N/A	N/A
Parameters(3Mbps)	N/A	N/A	N/A

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

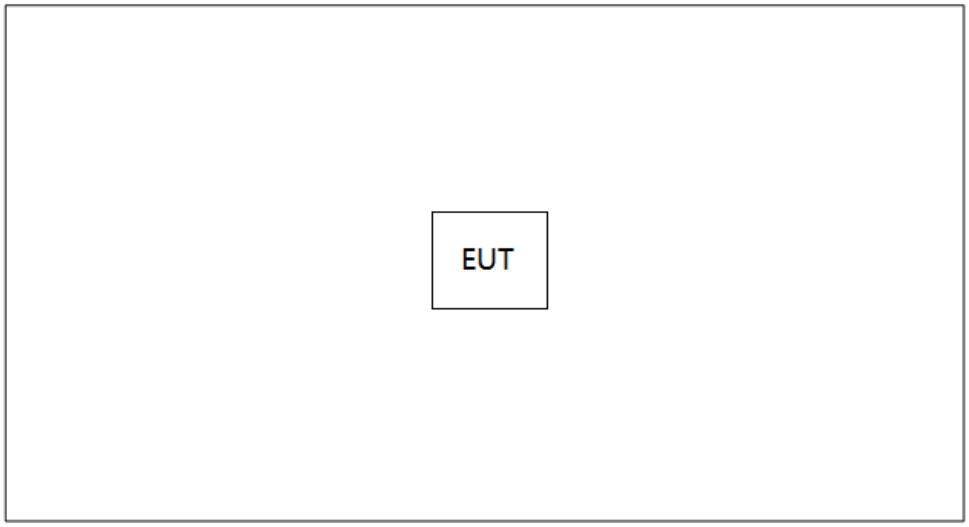

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-
-	-	-	-	-

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

(1) The tighter limit applies at the band edges.
(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

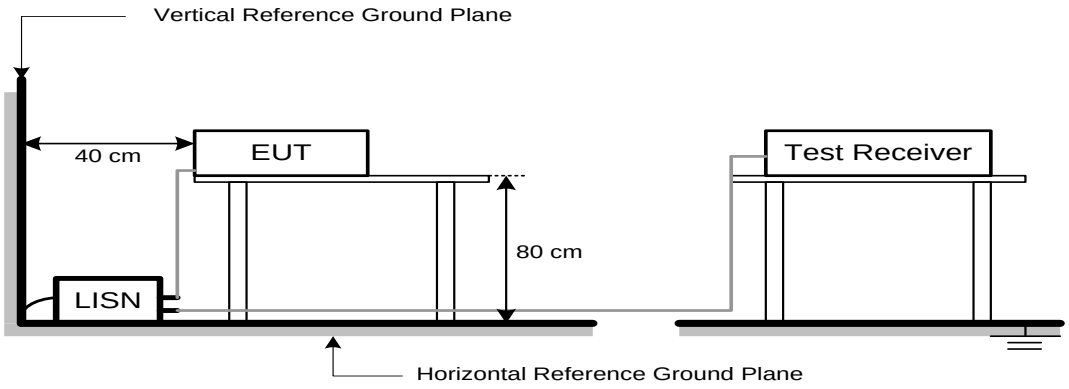

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSION TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1 GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1 GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

9 kHz-30 MHz

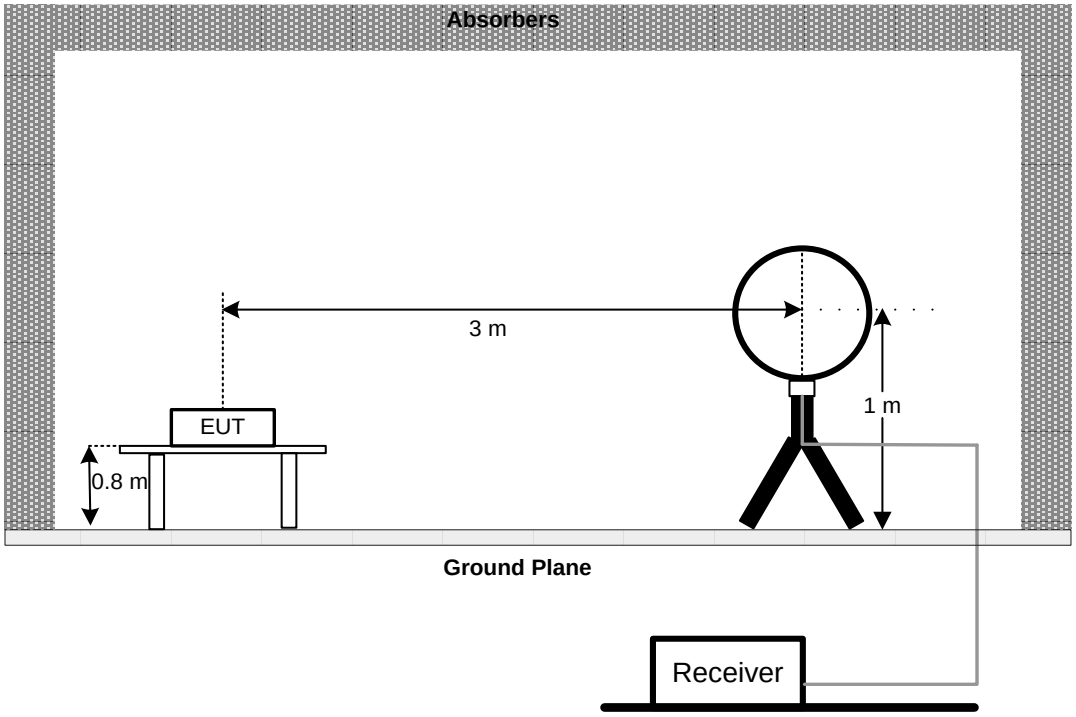

30 MHz to 1 GHz

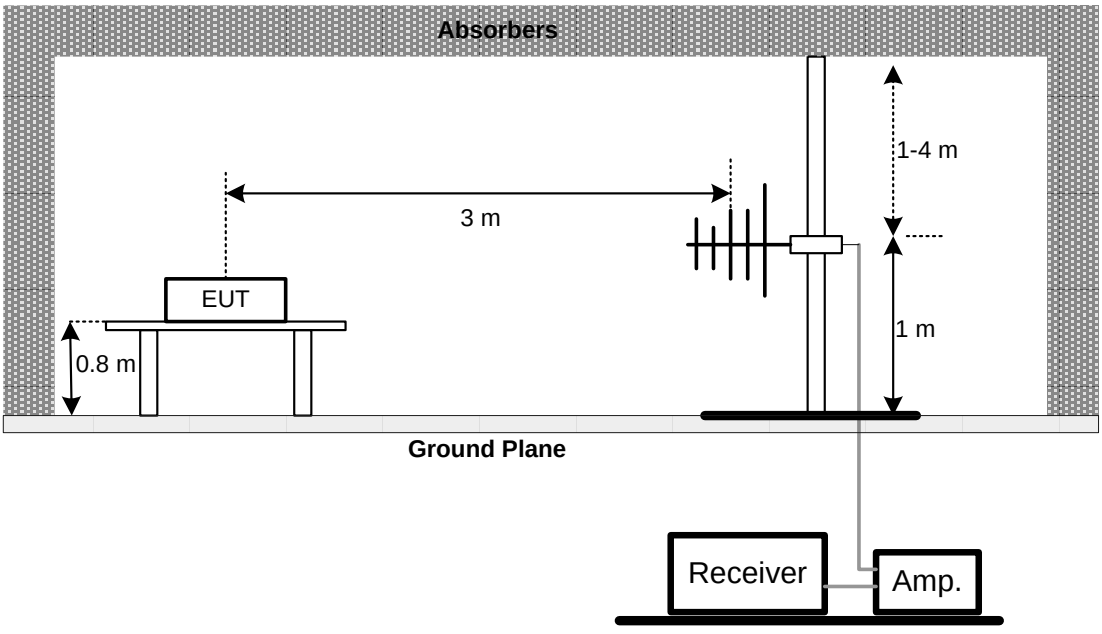

Above 1 GHz

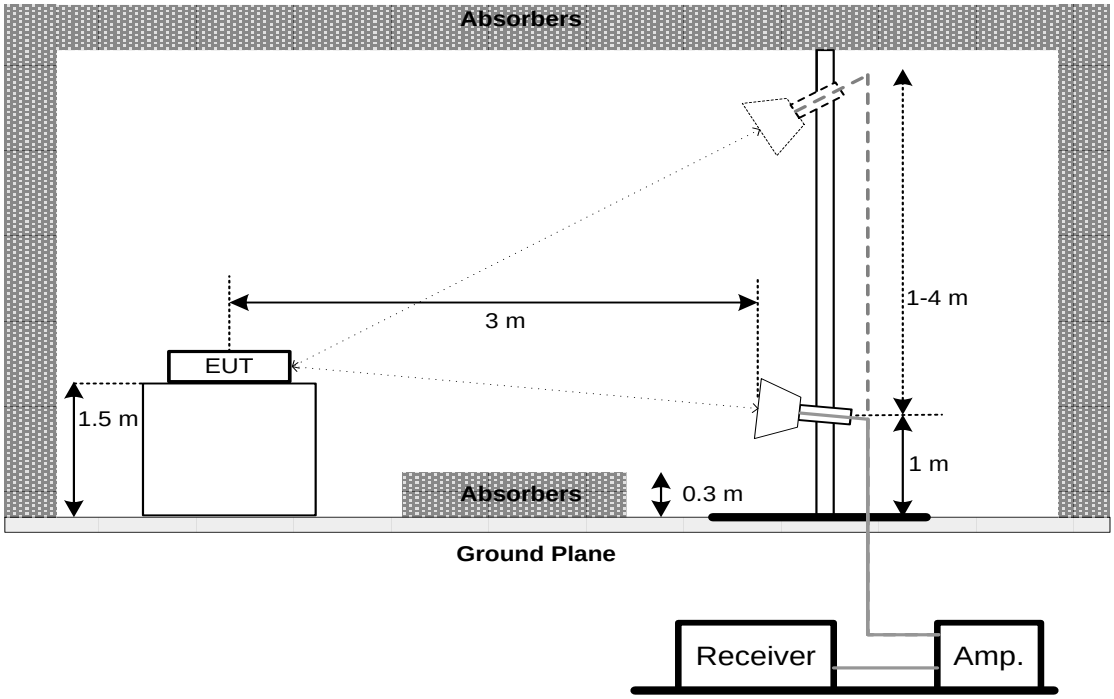

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

(1) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING FREQUENCY

5.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)(iii)	Number of Hopping Frequency

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX E

6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

6.2 TEST PROCEDURE

a. The transmitter output (antenna port) was connected to the spectrum analyzer
b. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
c. Use a video trigger with the trigger level set to enable triggering only on full pulses
d. Sweep Time is more than once pulse time
e. Set the center frequency on any frequency would be measure and set the frequency span to zero span
f. Measure the maximum time duration of one single pulse
g. Set the EUT for DH1, DH3 and DH5 packet transmitting
h. Measure the maximum time duration of one single pulse
i. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds
j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds
k. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
Video (or Average) Bandwidth (VBW) ≥ RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX G

8. BANDWIDTH TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)	Bandwidth

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX H

9. MAXIMUM OUTPUT POWER

9.1 LIMIT

FCC Part15 , Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)	Maximum Output Power	0.125 Watt or 21 dBm

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of t he hopping channel, whichever is greater, provided the systems operate with an output power no greater th an 125 mW.

9.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 1 MHz/3 MHz, VBW= 1 MHz/3 MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to the APPENDIX I

10. CONDUCTED SPURIOUS EMISSION

10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

10.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

Please refer to the APPENDIX J

11. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 21, 2021
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Aug. 23, 2021
3	Test Cable	emci	EMCRG400-BM-NM-10000	170628	Jul. 15, 2021
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 21, 2021
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 28, 2021
2	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 21, 2021
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 28, 2021
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 28, 2021
9	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Mar. 28, 2021
10	Pre-Amplifier	emci	EMC184045SE	980409	Mar. 28, 2021
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 21, 2021
12	Test Cable	emci	EMC102-KM-KM-800	170654	Apr. 16, 2021
13	Test Cable	emci	Super Reliable-40G-SS11-7000	W0030860001	Apr. 16, 2021
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Frequency					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Hopping Channel Separation Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Remark: “N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

12. EUT TEST PHOTO

Radiated Emissions Test Photos

30 MHz to 1000 MHz

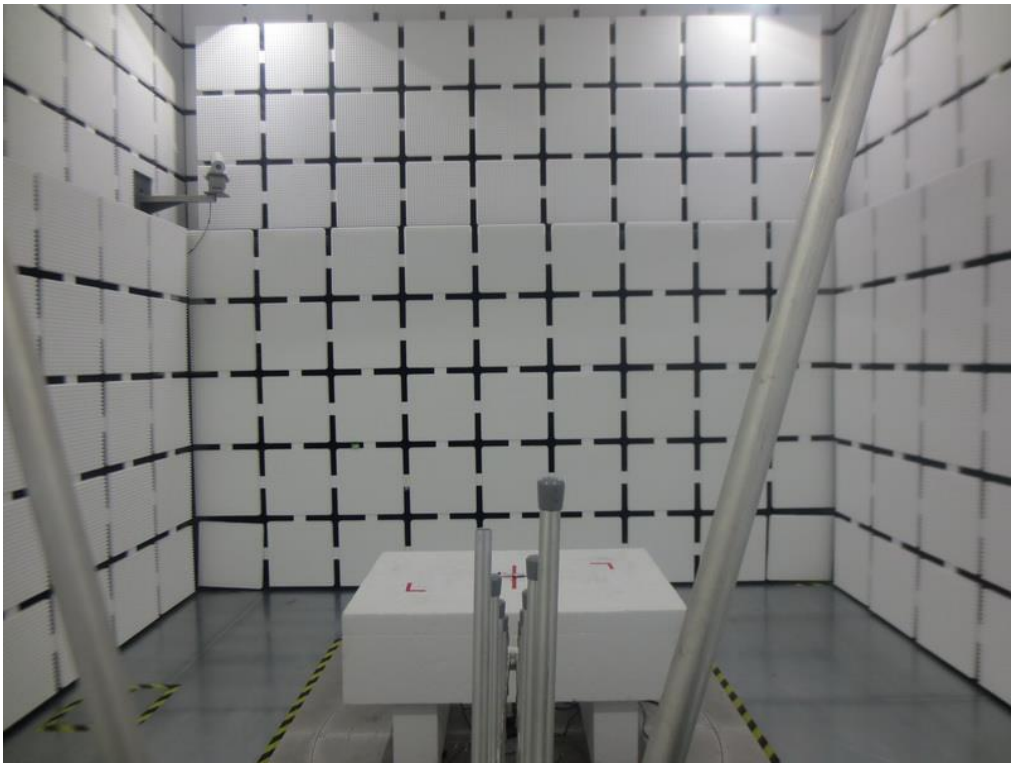

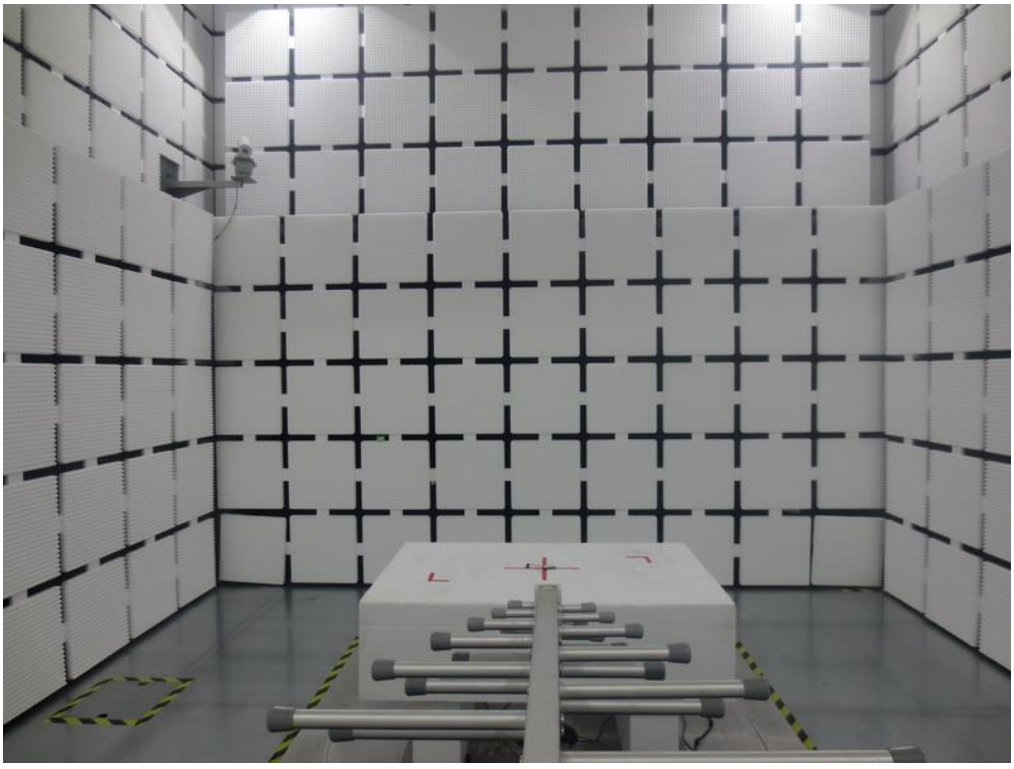

Radiated Emissions Test Photos

Above 1 GHz

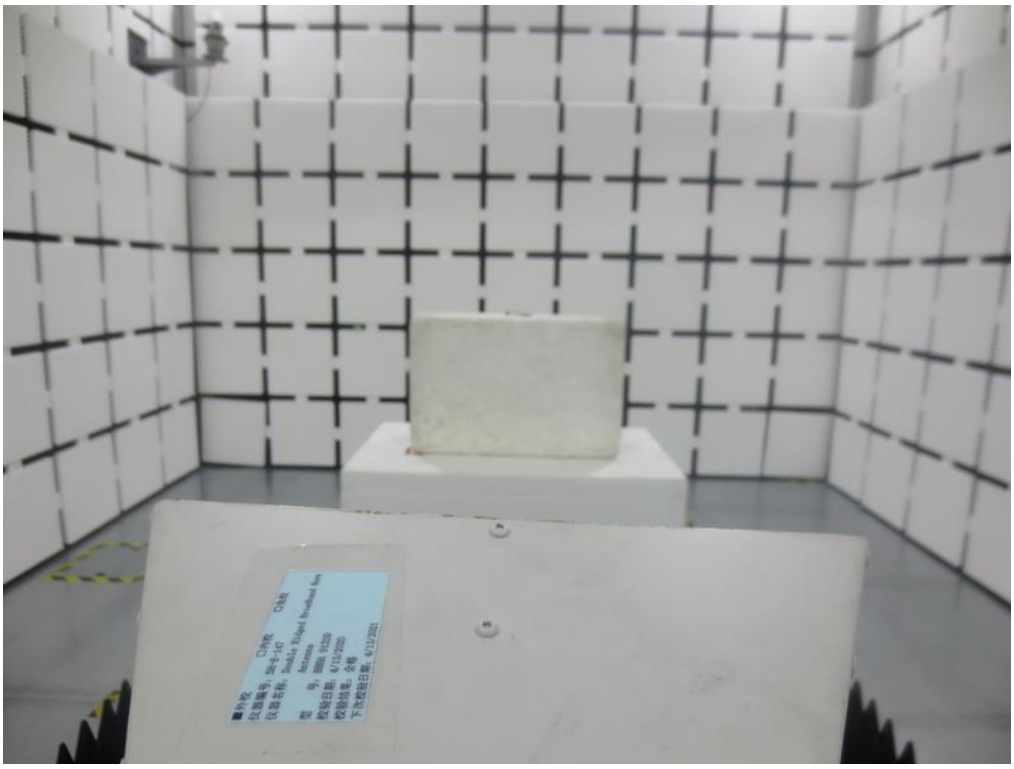

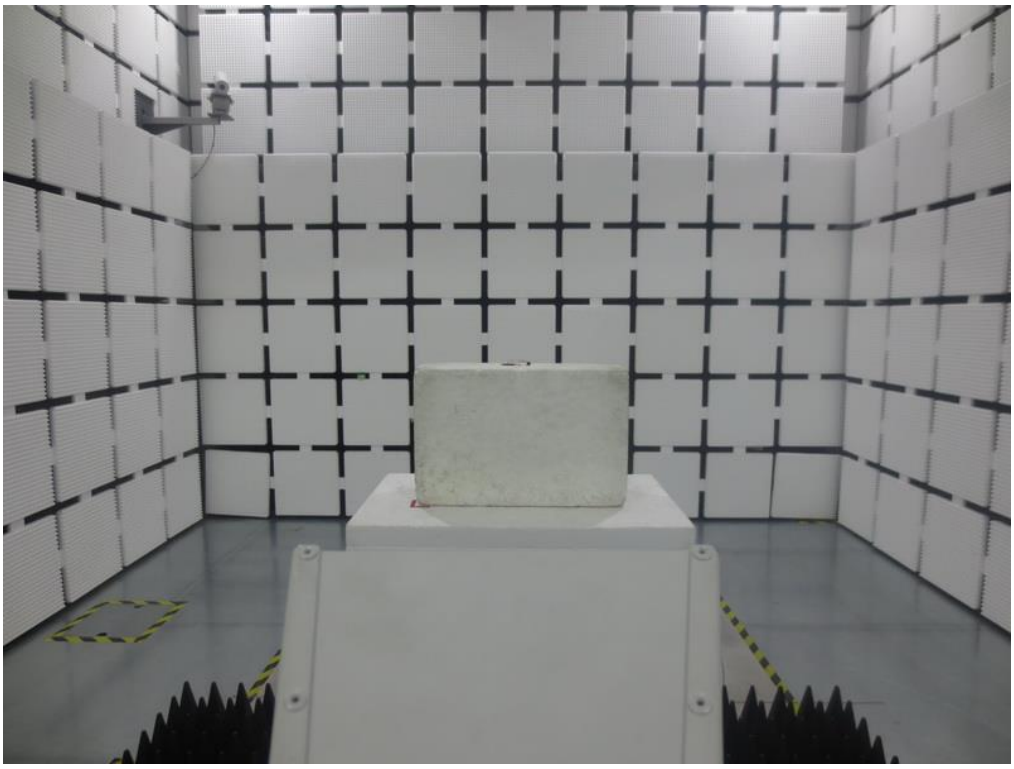

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ

Note: Below 30MHz, The measured value have enough margin over 20dB than the limit, therefore they are not reported

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode:	TX Mode Channel 00 _1Mbps

Vertical

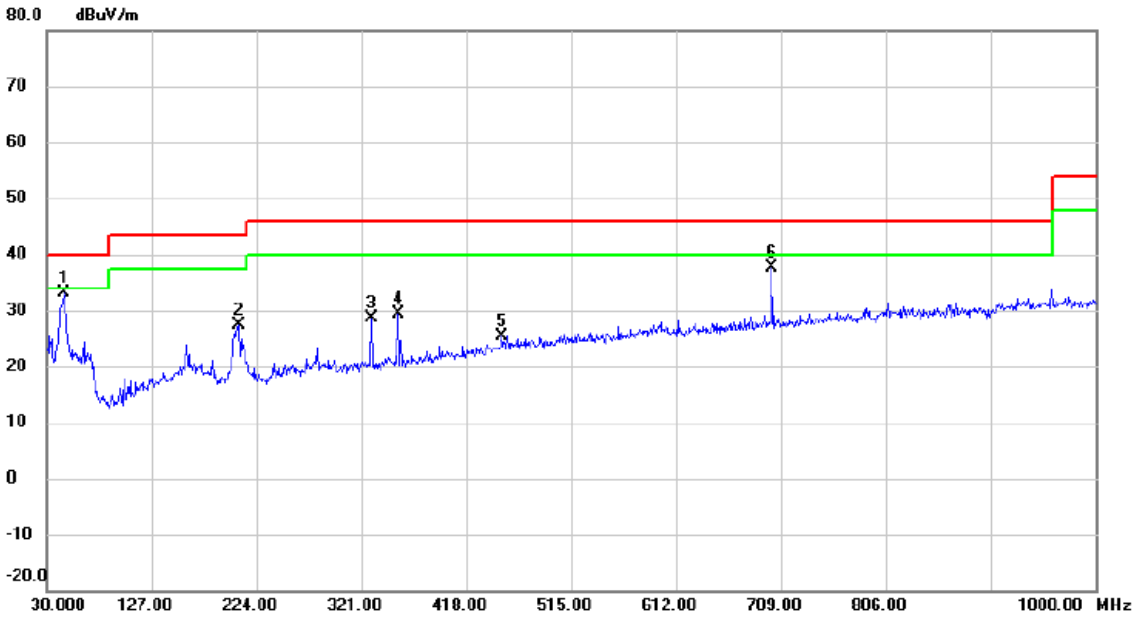

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	46.0050	50.06	-16.87	33.19	40.00	-6.81	peak	
2		207.5100	46.72	-19.32	27.40	43.50	-16.10	peak	
3		330.7000	43.44	-14.83	28.61	46.00	-17.39	peak	
4		355.4350	43.81	-14.42	29.39	46.00	-16.61	peak	
5		450.9800	37.33	-11.94	25.39	46.00	-20.61	peak	
6		700.2700	45.61	-8.03	37.58	46.00	-8.42	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 00 _1Mbps

Horizontal

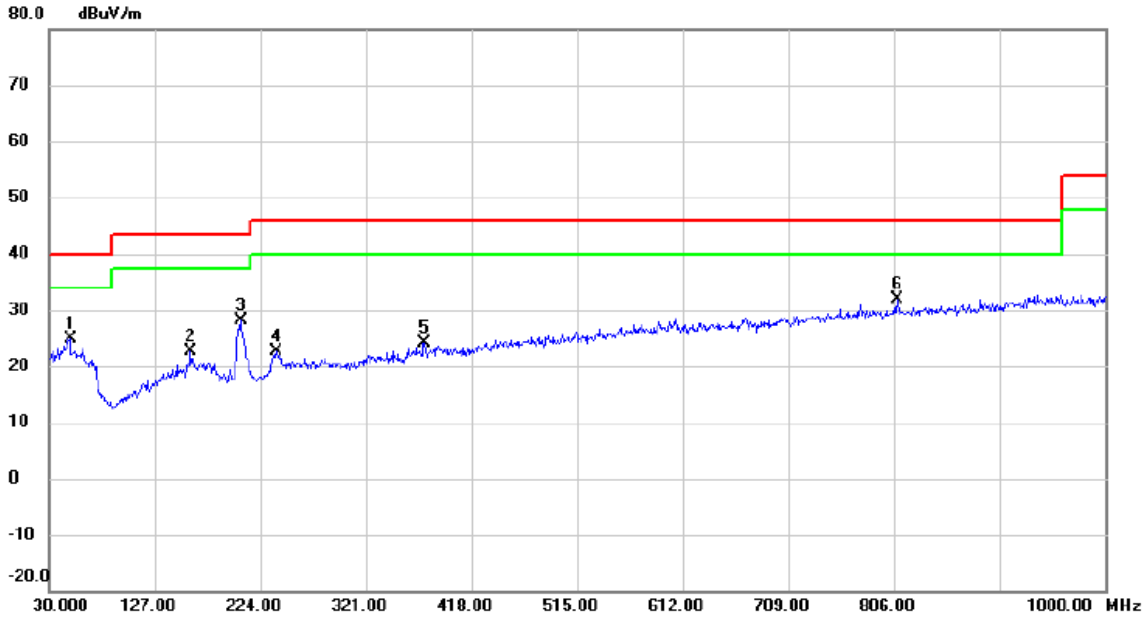

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		49.4000	41.77	-16.77	25.00	40.00	-15.00	peak	
2		159.9800	38.79	-16.05	22.74	43.50	-20.76	peak	
3		206.0550	47.35	-19.29	28.06	43.50	-15.44	peak	
4		239.0350	40.48	-17.83	22.65	46.00	-23.35	peak	
5		374.3500	38.17	-13.92	24.25	46.00	-21.75	peak	
6	*	809.3950	38.34	-6.50	31.84	46.00	-14.16	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode:	TX 2402 MHz _CH00_1Mbps

Vertical

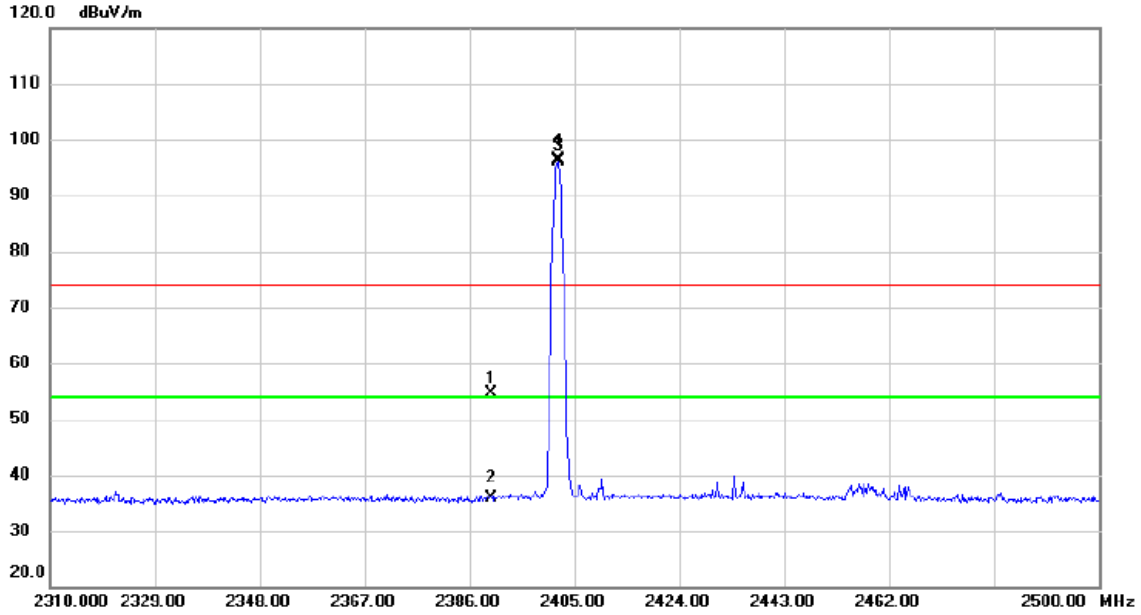

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.79	31.74	54.53	74.00	-19.47	peak	
2		2390.000	4.15	31.74	35.89	54.00	-18.11	AVG	
3	X	2401.960	64.54	31.72	96.26	74.00	22.26	peak	
4	*	2401.960	64.39	31.72	96.11	54.00	42.11	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Vertical

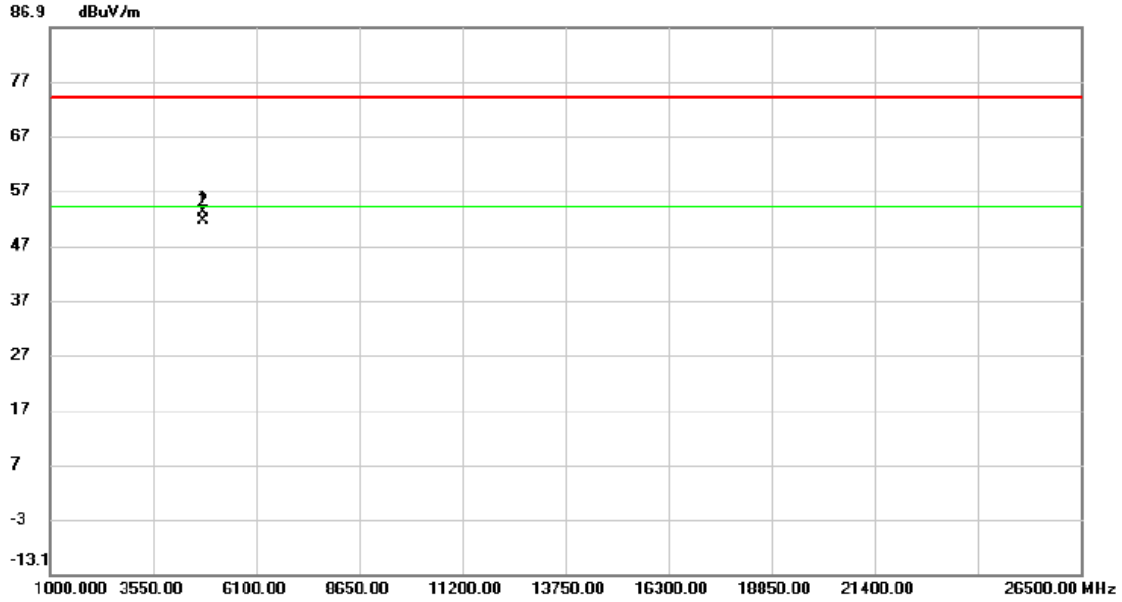

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4803.325	63.93	-10.95	52.98	74.00	-21.02	peak	
2	*	4803.988	62.59	-10.95	51.64	54.00	-2.36	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Horizontal

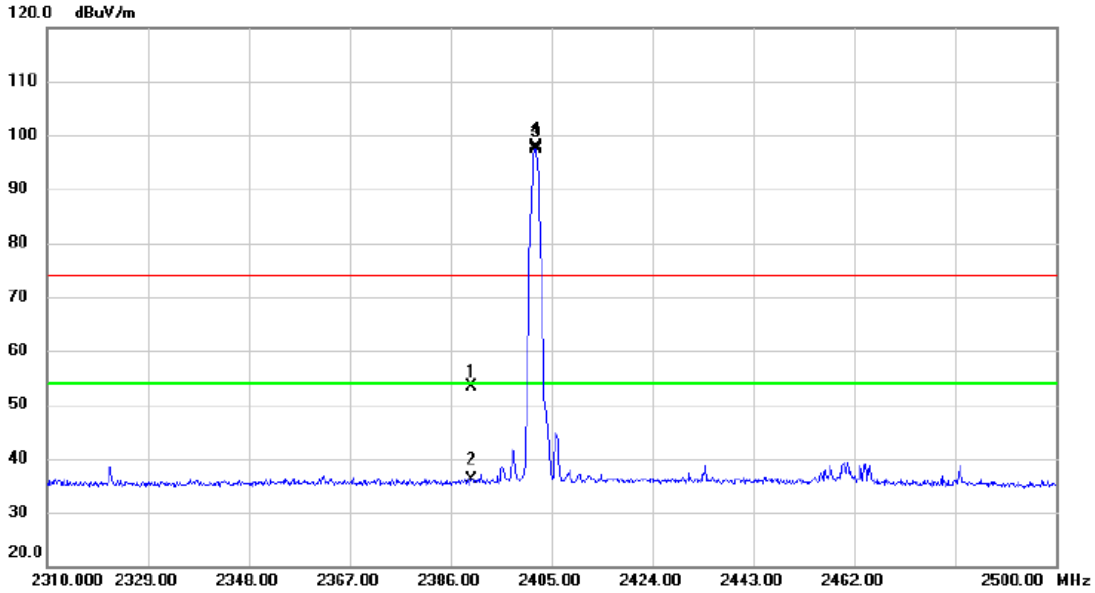

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	21.69	31.74	53.43	74.00	-20.57	peak	
2		2390.000	4.46	31.74	36.20	54.00	-17.80	AVG	
3	X	2401.960	66.10	31.72	97.82	74.00	23.82	peak	
4	*	2401.960	65.66	31.72	97.38	54.00	43.38	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Horizontal

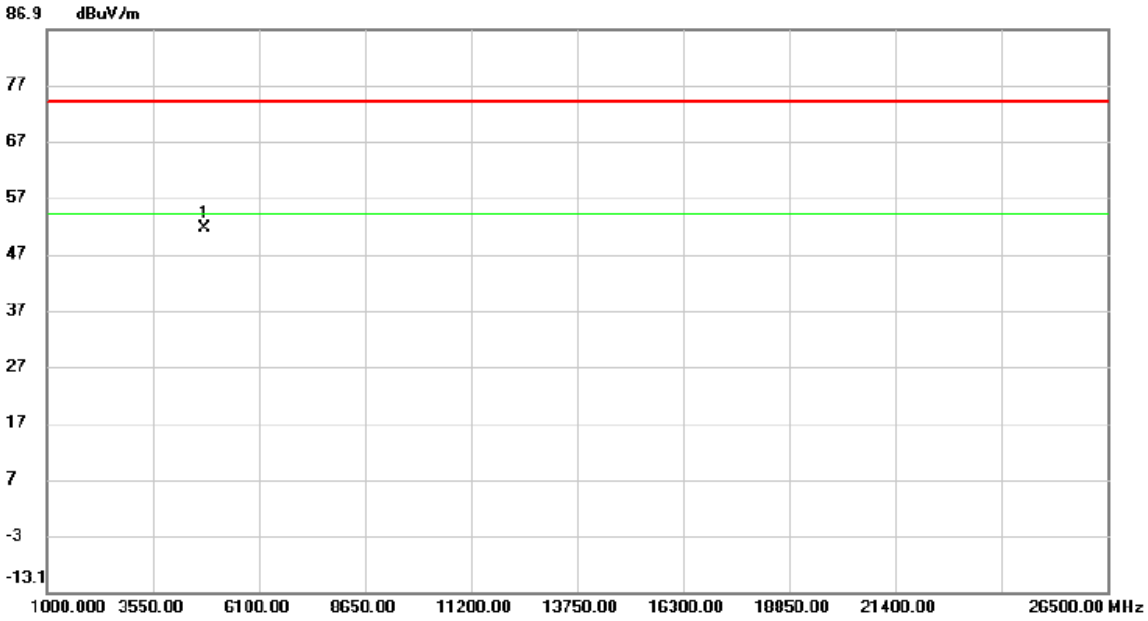

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4803.325	62.41	-10.95	51.46	74.00	-22.54	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Vertical

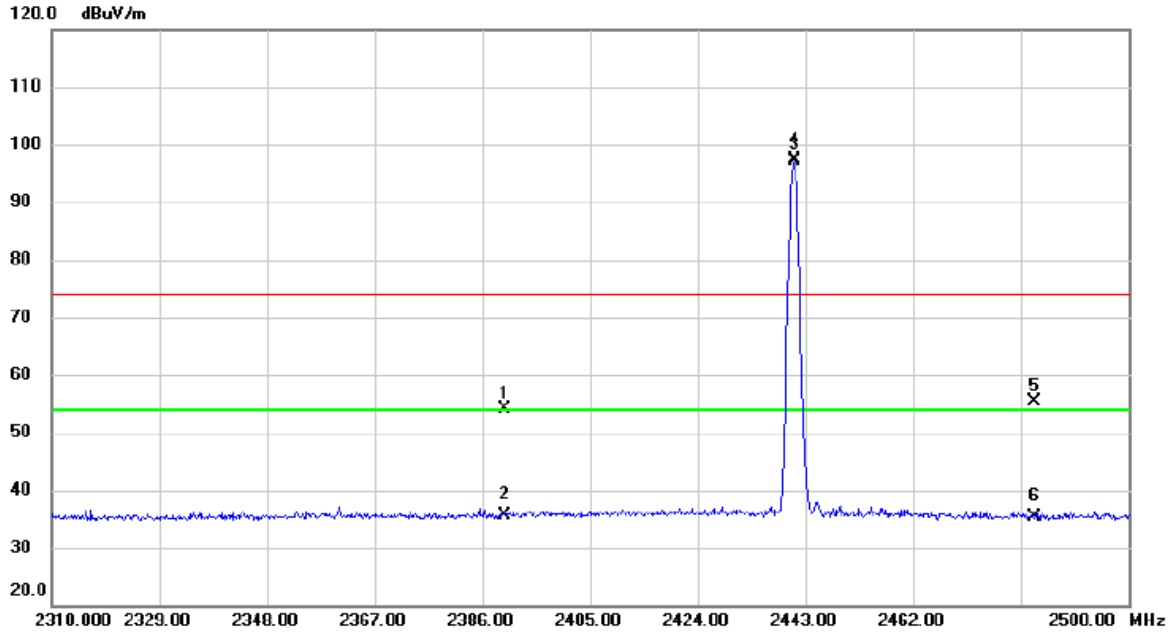

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.51	31.74	54.25	74.00	-19.75	peak	
2		2390.000	3.91	31.74	35.65	54.00	-18.35	AVG	
3	X	2441.005	65.74	31.72	97.46	74.00	23.46	peak	
4	*	2441.005	65.30	31.72	97.02	54.00	43.02	AVG	
5		2483.500	23.67	31.72	55.39	74.00	-18.61	peak	
6		2483.500	3.60	31.72	35.32	54.00	-18.68	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Vertical

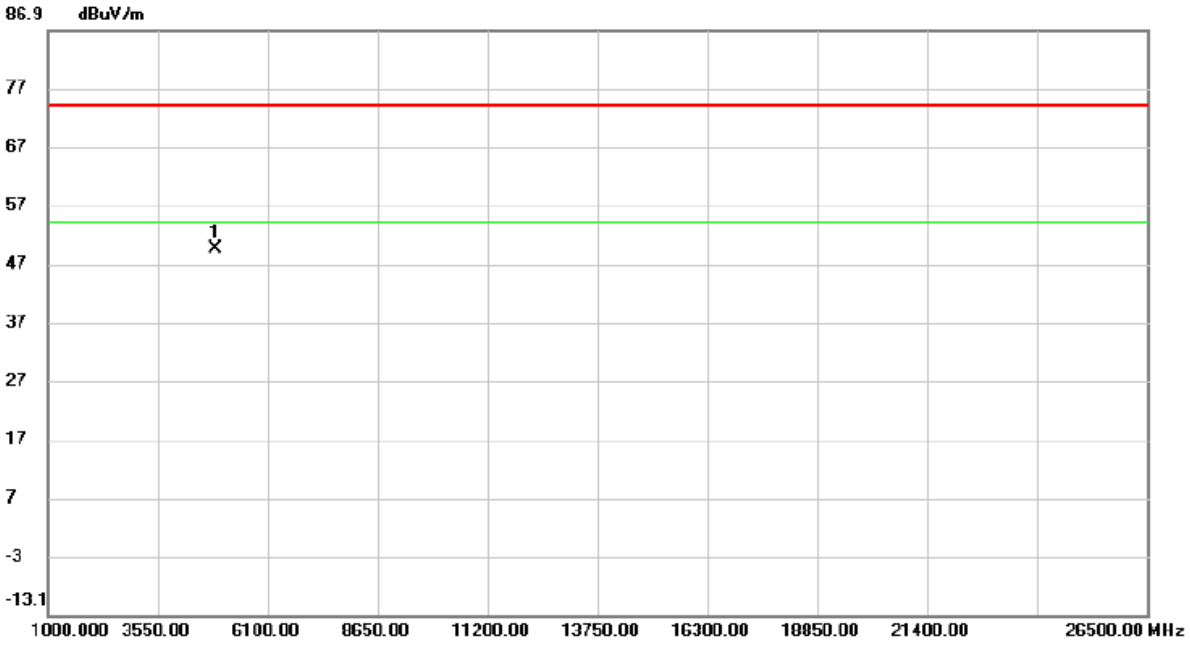

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4881.100	60.21	-10.78	49.43	74.00	-24.57	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Horizontal

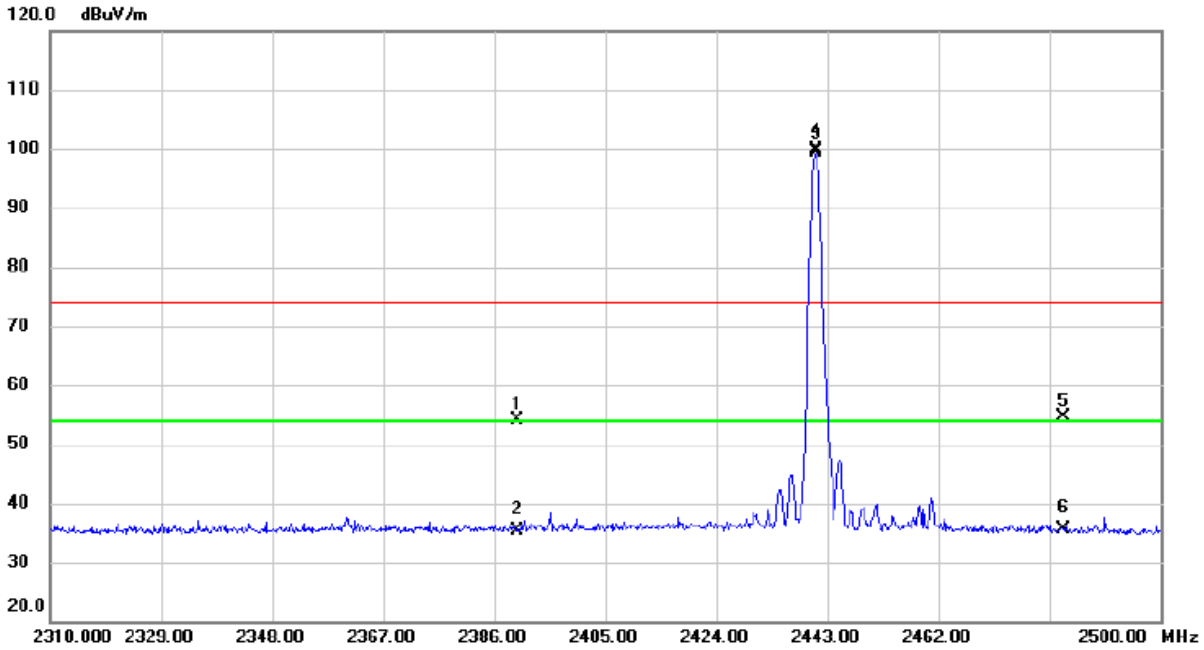

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.45	31.74	54.19	74.00	-19.81	peak	
2		2390.000	3.60	31.74	35.34	54.00	-18.66	AVG	
3	X	2441.005	68.09	31.72	99.81	74.00	25.81	peak	
4	*	2441.005	67.67	31.72	99.39	54.00	45.39	AVG	
5		2483.500	22.86	31.72	54.58	74.00	-19.42	peak	
6		2483.500	3.79	31.72	35.51	54.00	-18.49	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Horizontal

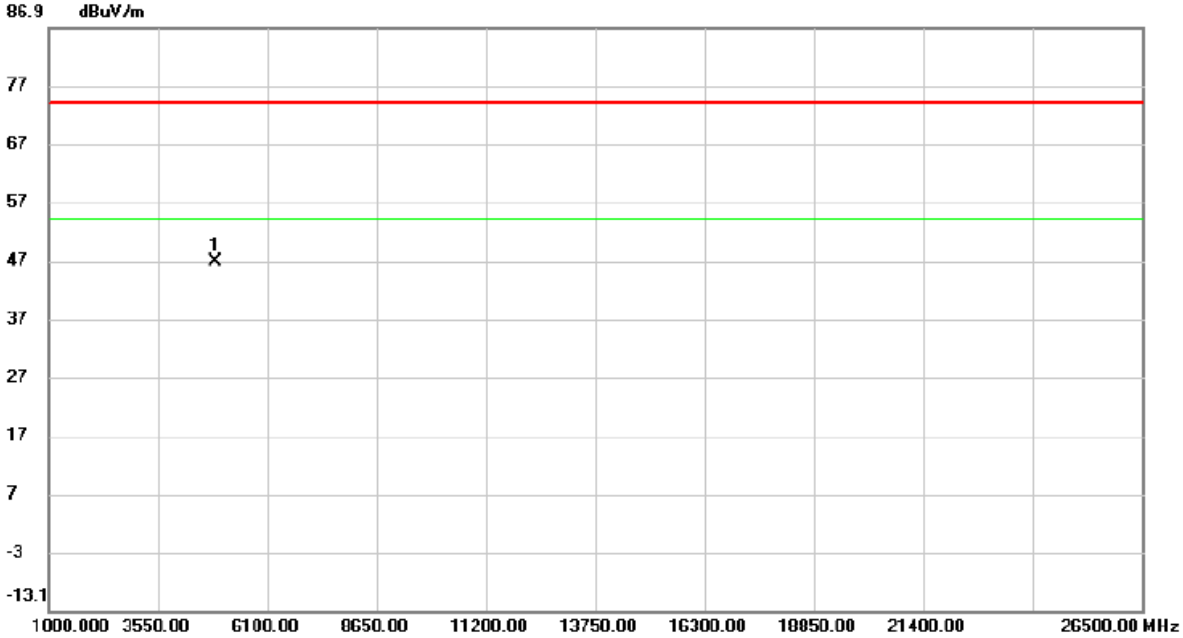

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4882.375	57.44	-10.78	46.66	74.00	-27.34	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Vertical

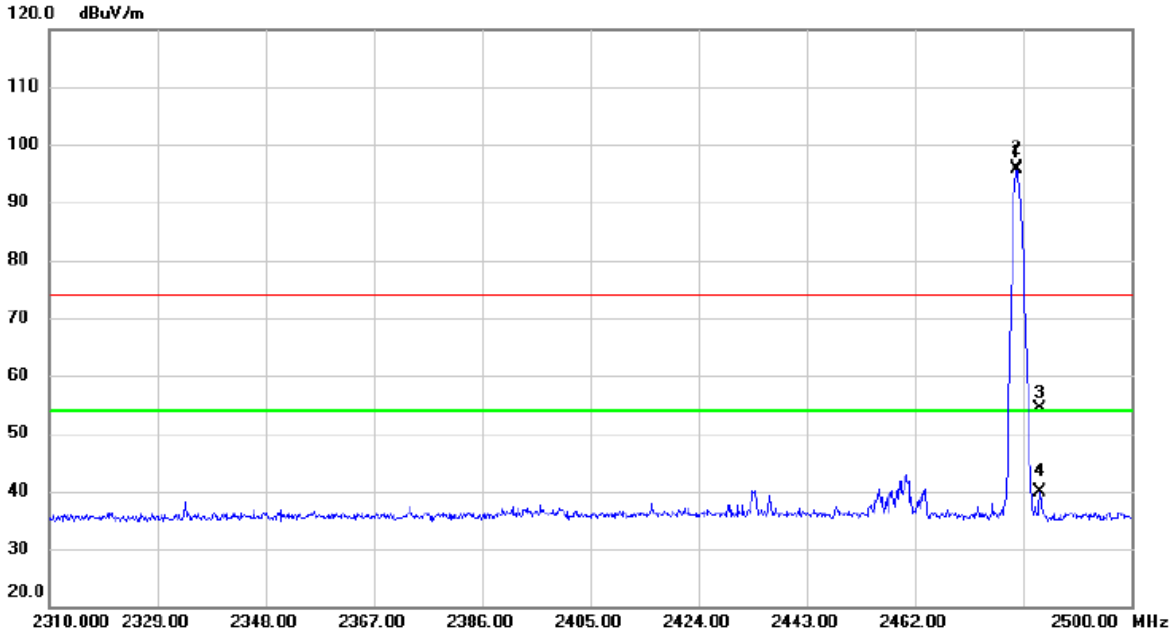

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.955	64.25	31.71	95.96	74.00	21.96	peak	
2	*	2479.955	63.96	31.71	95.67	54.00	41.67	AVG	
3		2484.040	22.63	31.72	54.35	74.00	-19.65	peak	
4		2484.040	8.12	31.72	39.84	54.00	-14.16	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Vertical

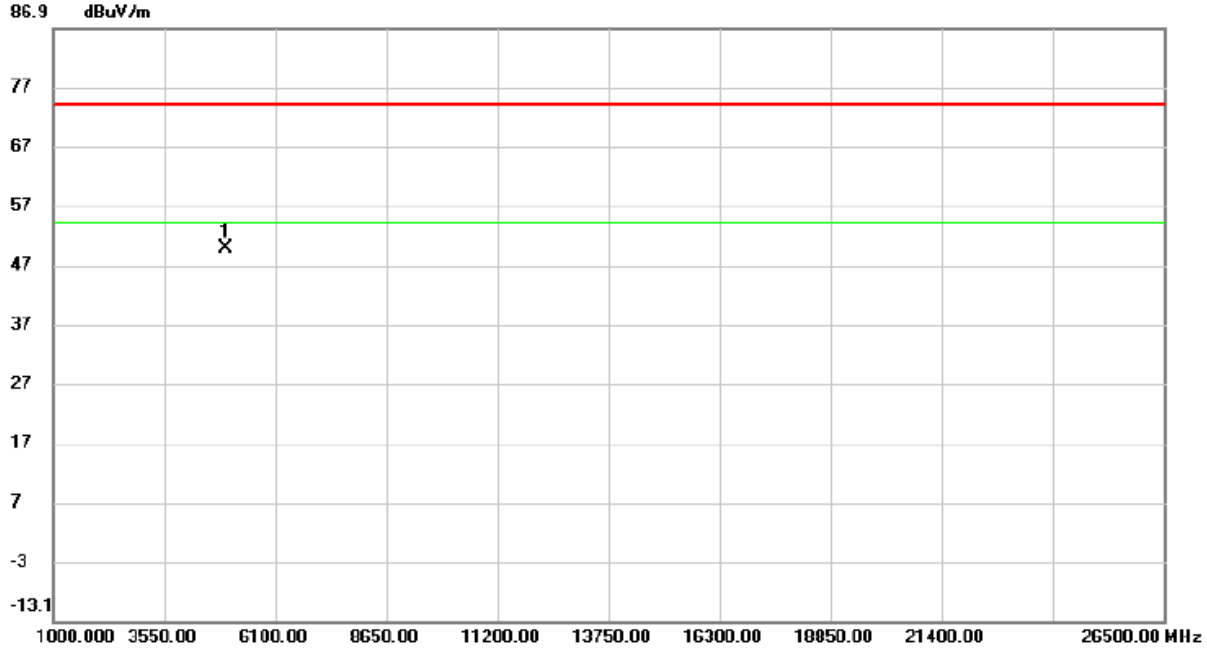

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.150	60.12	-10.46	49.66	74.00	-24.34	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Horizontal

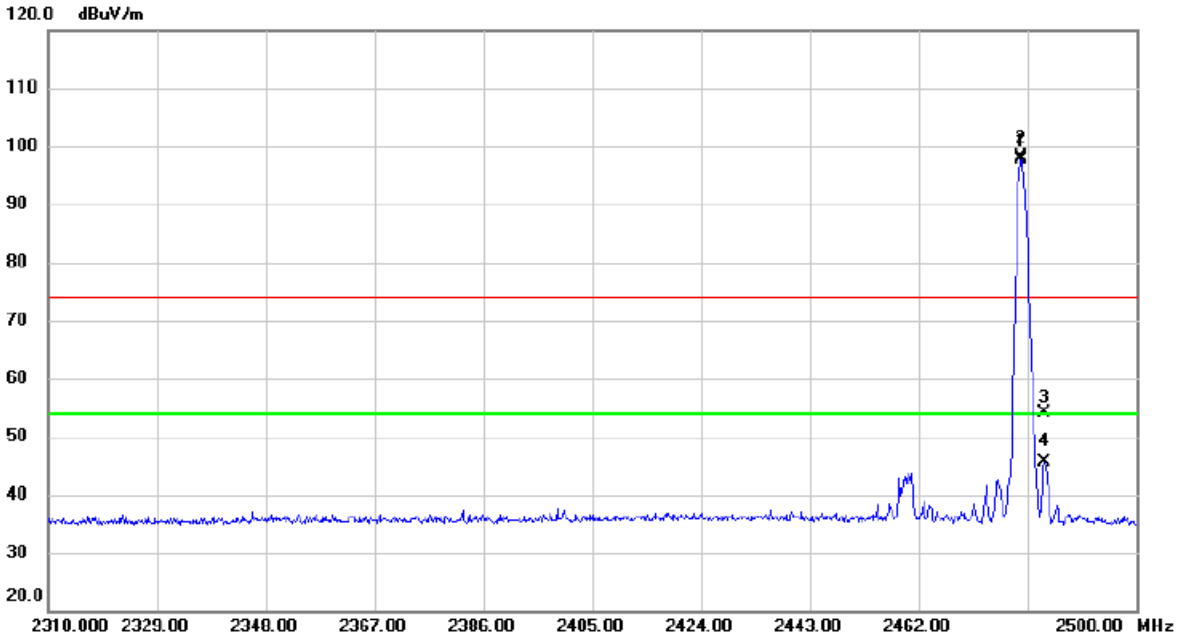

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.955	66.35	31.71	98.06	74.00	24.06	peak	
2	*	2479.955	66.04	31.71	97.75	54.00	43.75	AVG	
3		2483.945	22.49	31.72	54.21	74.00	-19.79	peak	
4		2483.945	14.01	31.72	45.73	54.00	-8.27	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Horizontal

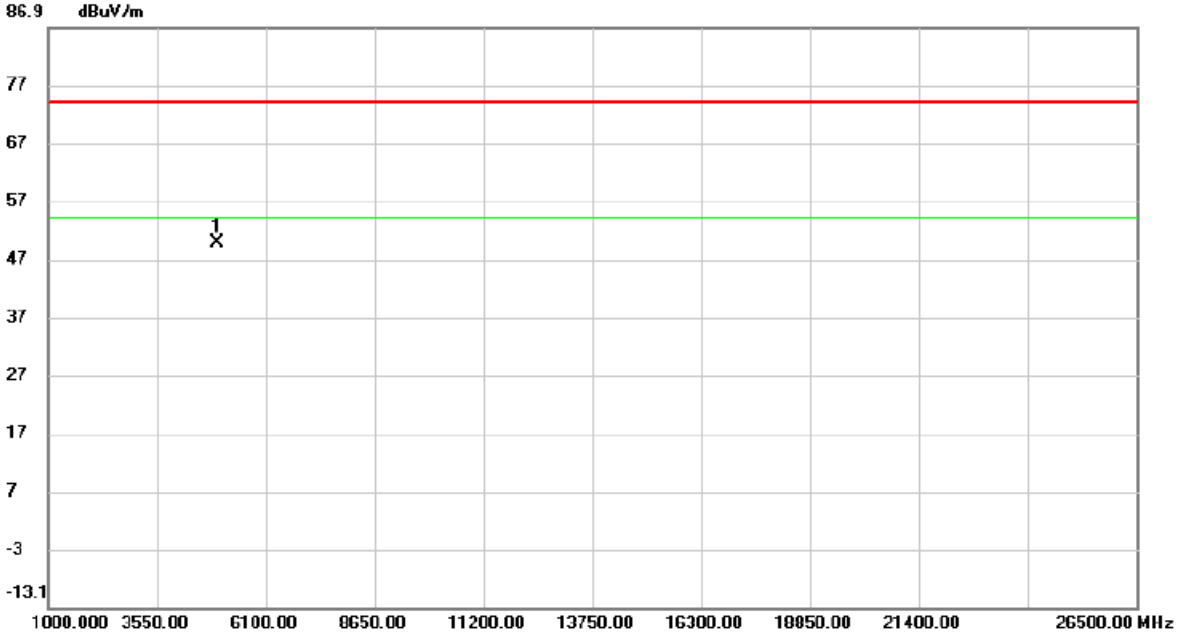

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.150	60.34	-10.46	49.88	74.00	-24.12	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_2Mbps

Vertical

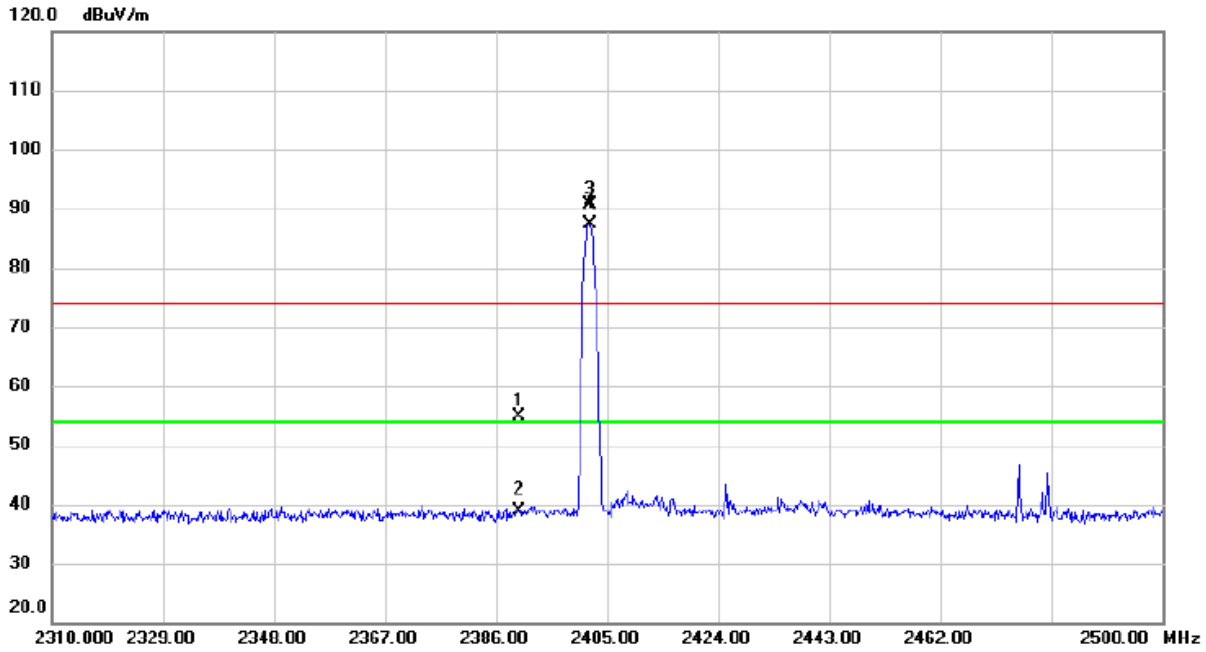

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.24	31.74	54.98	74.00	-19.02	peak	
2		2390.000	7.18	31.74	38.92	54.00	-15.08	AVG	
3	X	2401.960	58.84	31.72	90.56	74.00	16.56	peak	
4	*	2401.960	55.74	31.72	87.46	54.00	33.46	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_2Mbps

Vertical

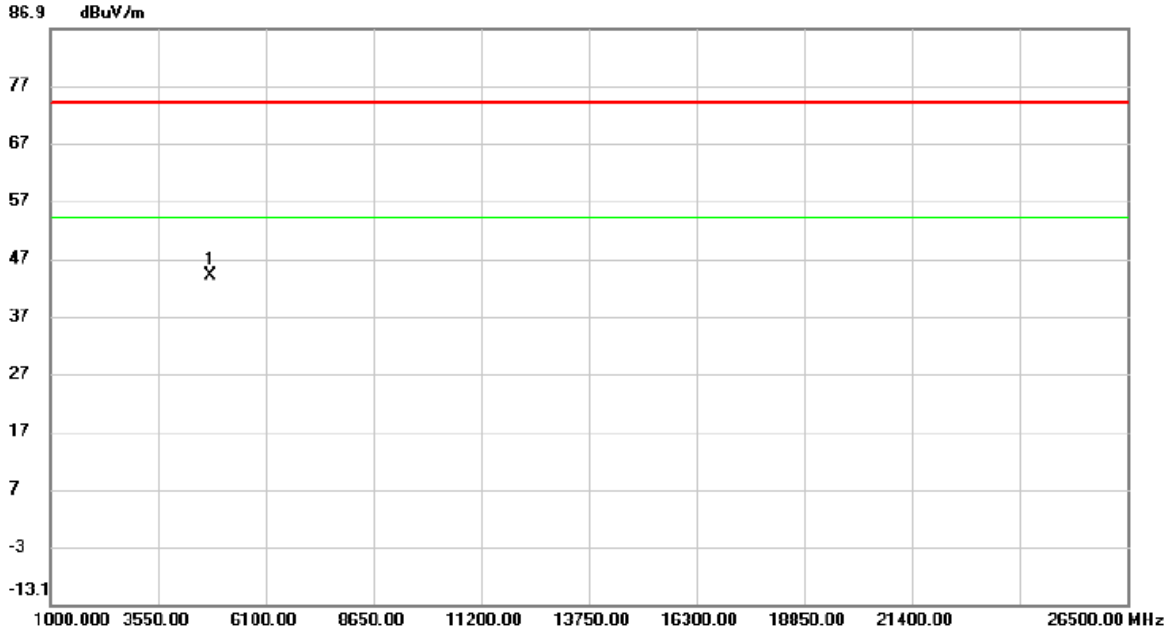

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.600	55.07	-10.95	44.12	74.00	-29.88	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_2Mbps

Horizontal

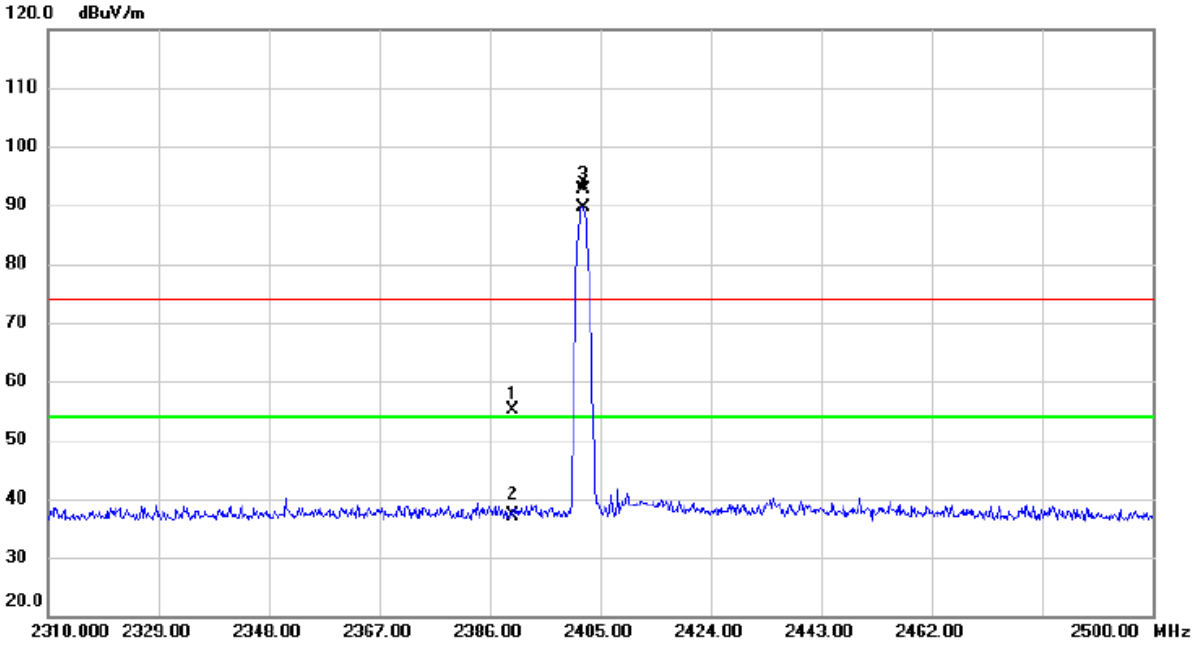

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.31	31.74	55.05	74.00	-18.95	peak	
2		2390.000	5.46	31.74	37.20	54.00	-16.80	AVG	
3	X	2401.960	60.91	31.72	92.63	74.00	18.63	peak	
4	*	2401.960	57.97	31.72	89.69	54.00	35.69	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_2Mbps

Horizontal

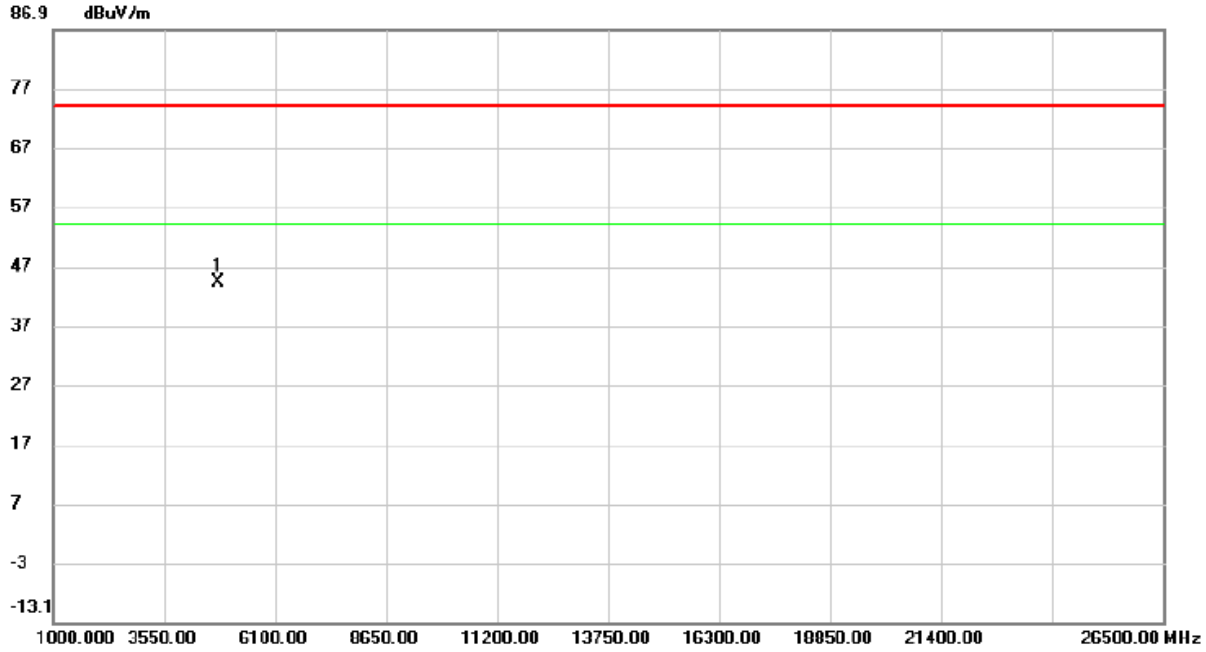

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4803.325	55.15	-10.95	44.20	74.00	-29.80	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_2Mbps

Vertical

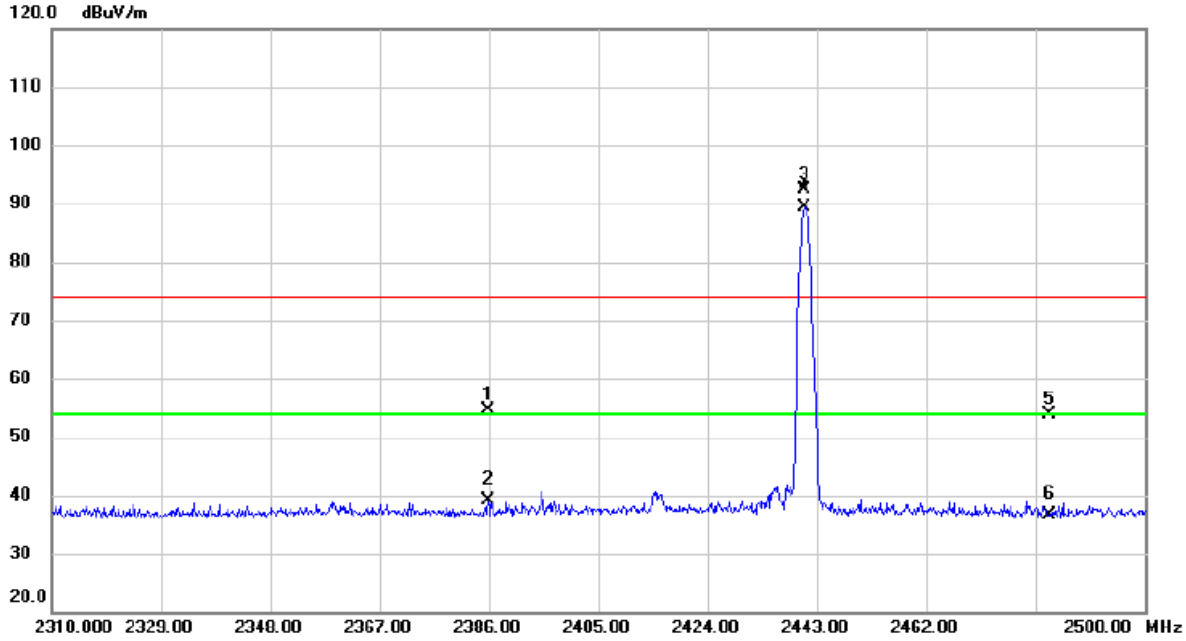

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2385.905	22.92	31.74	54.66	74.00	-19.34	peak	
2		2385.905	7.27	31.74	39.01	54.00	-14.99	AVG	
3	X	2440.910	60.74	31.72	92.46	74.00	18.46	peak	
4	*	2440.910	57.73	31.72	89.45	54.00	35.45	AVG	
5		2483.500	22.19	31.72	53.91	74.00	-20.09	peak	
6		2483.500	4.81	31.72	36.53	54.00	-17.47	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_2Mbps

Vertical

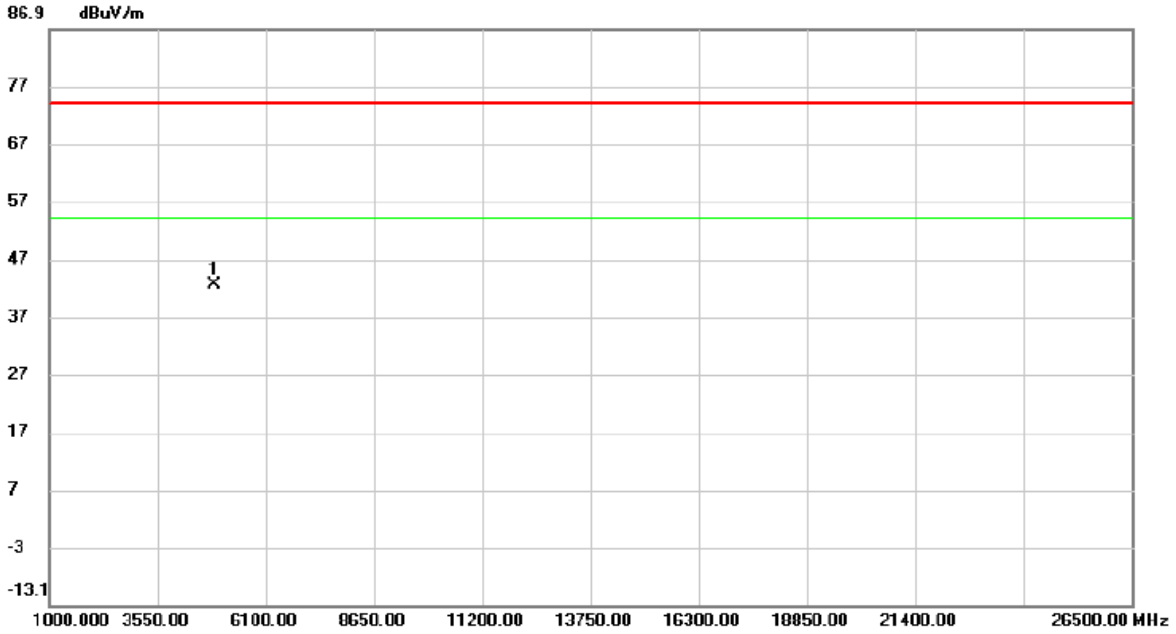

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4882.375	53.33	-10.78	42.55	74.00	-31.45	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_2Mbps

Horizontal

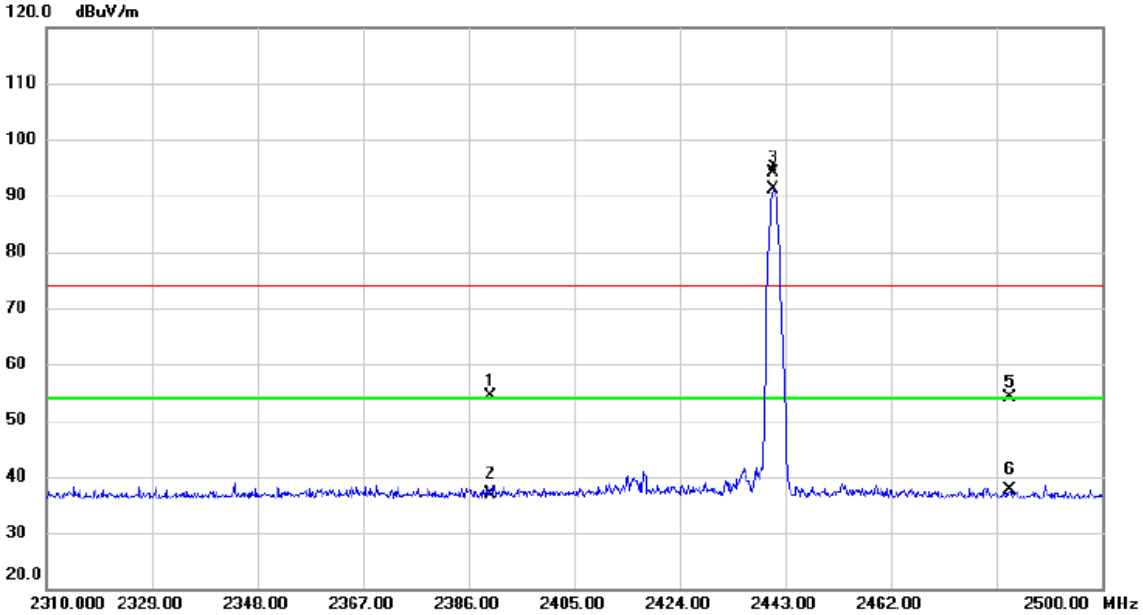

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.54	31.74	54.28	74.00	-19.72	peak	
2		2390.000	5.24	31.74	36.98	54.00	-17.02	AVG	
3	X	2440.910	62.39	31.72	94.11	74.00	20.11	peak	
4	*	2440.910	59.50	31.72	91.22	54.00	37.22	AVG	
5		2483.500	22.46	31.72	54.18	74.00	-19.82	peak	
6		2483.500	5.88	31.72	37.60	54.00	-16.40	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_2Mbps

Horizontal

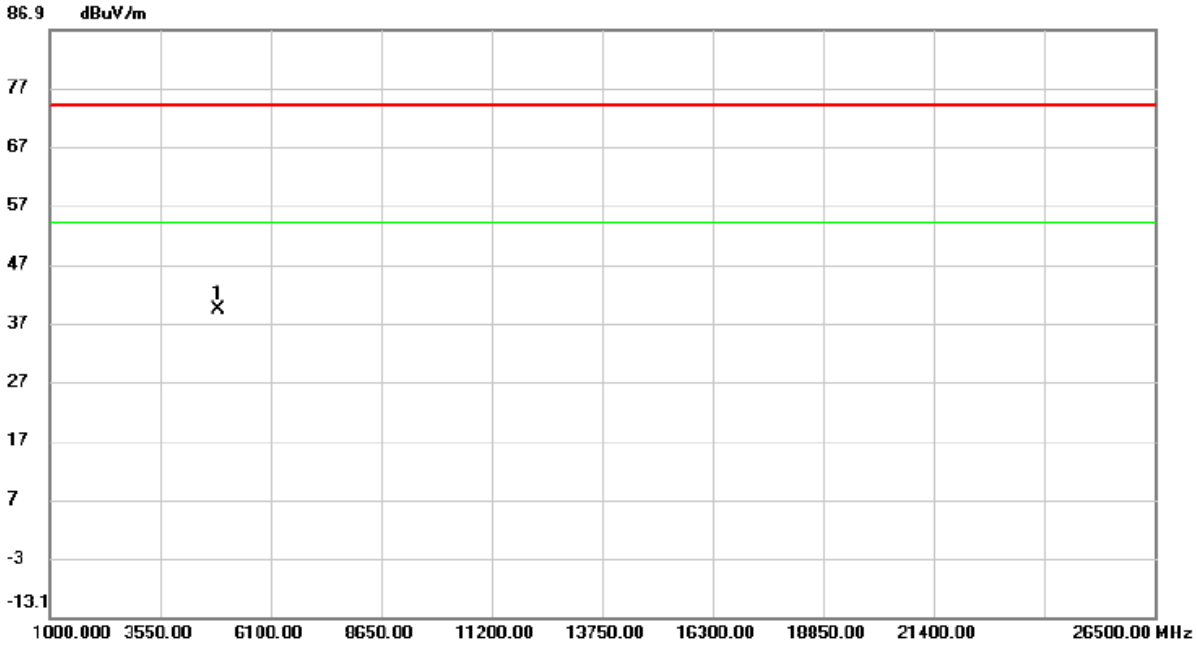

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4882.375	50.08	-10.78	39.30	74.00	-34.70	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_2Mbps

Vertical

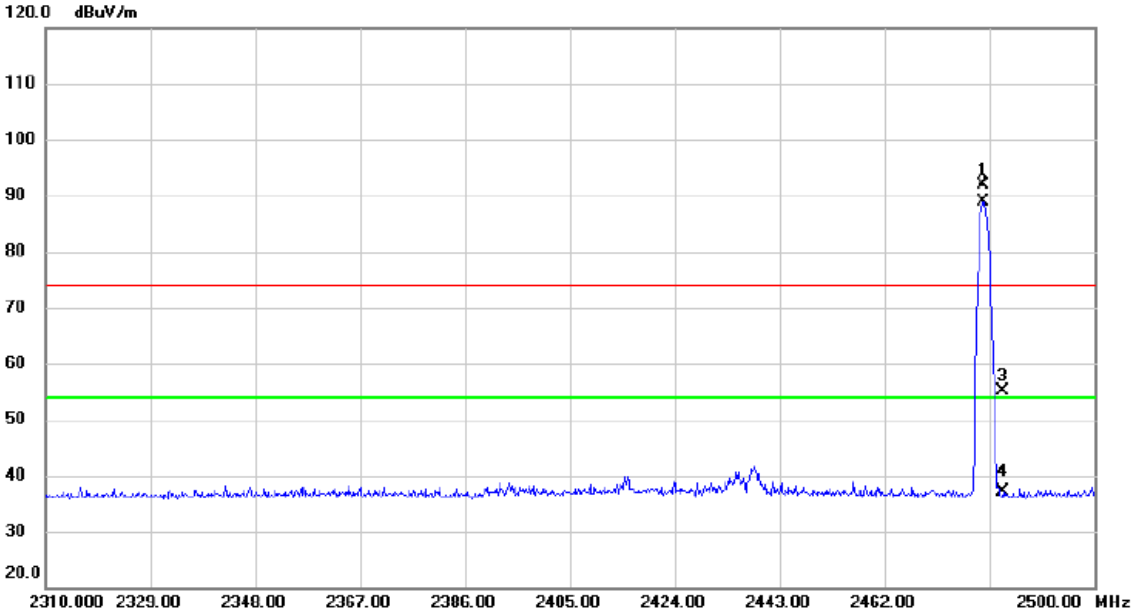

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.955	60.22	31.71	91.93	74.00	17.93	peak	
2	*	2479.955	57.23	31.71	88.94	54.00	34.94	AVG	
3		2483.500	23.34	31.72	55.06	74.00	-18.94	peak	
4		2483.500	5.37	31.72	37.09	54.00	-16.91	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_2Mbps

Vertical

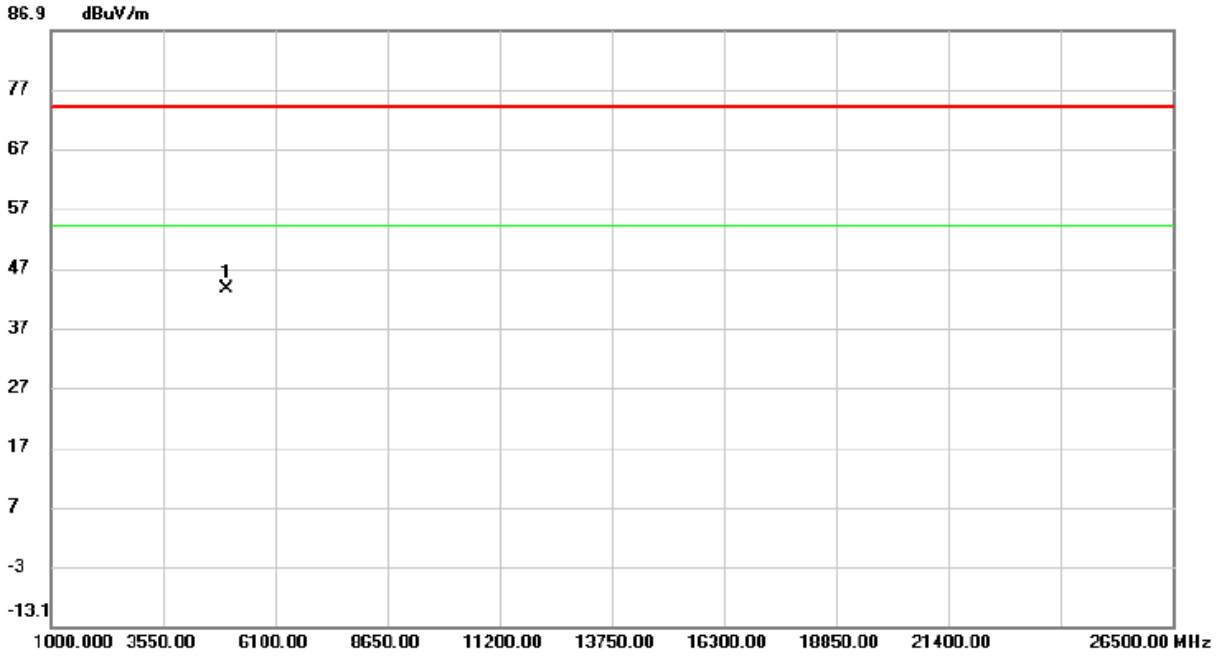

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4979.275	53.81	-10.37	43.44	74.00	-30.56	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_2Mbps

Horizontal

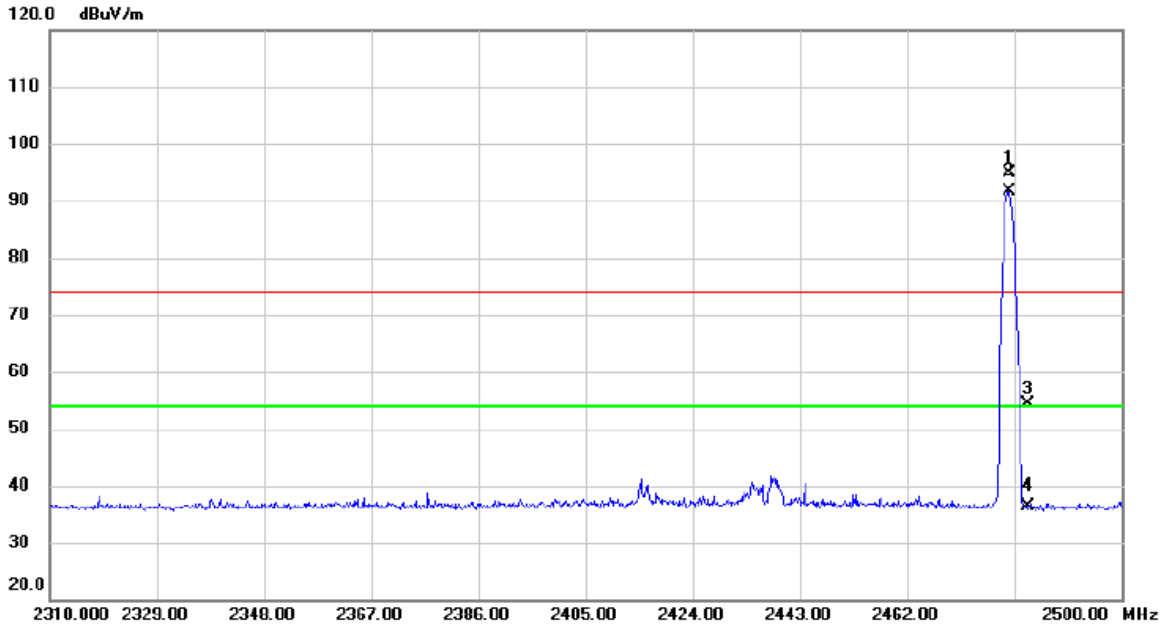

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2480.050	63.06	31.71	94.77	74.00	20.77	peak	
2	*	2480.050	59.94	31.71	91.65	54.00	37.65	AVG	
3		2483.500	22.68	31.72	54.40	74.00	-19.60	peak	
4		2483.500	4.71	31.72	36.43	54.00	-17.57	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_2Mbps

Horizontal

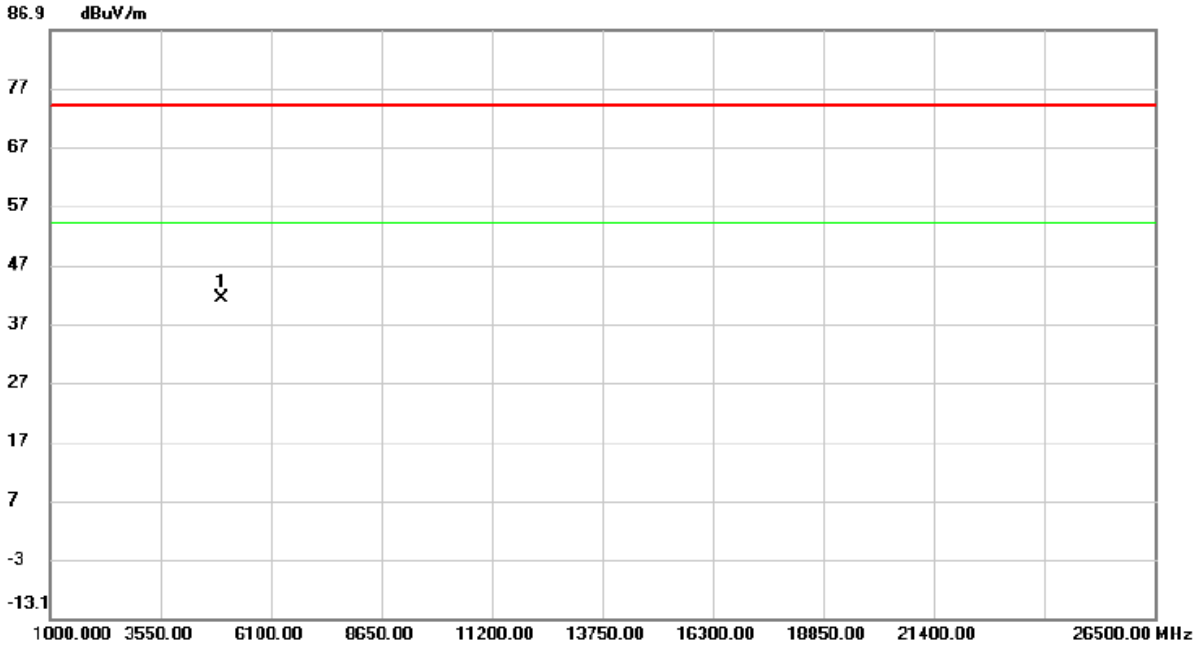

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.150	51.75	-10.46	41.29	74.00	-32.71	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Vertical

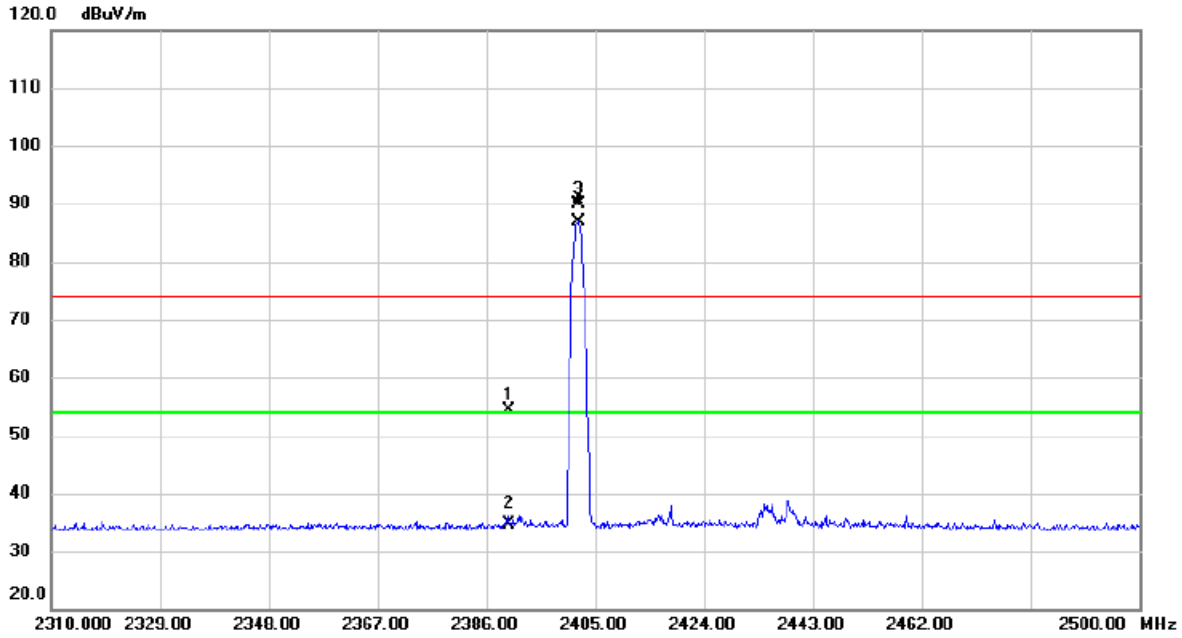

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.68	31.74	54.42	74.00	-19.58	peak	
2		2390.000	2.85	31.74	34.59	54.00	-19.41	AVG	
3	X	2402.055	58.07	31.72	89.79	74.00	15.79	peak	
4	*	2402.055	55.04	31.72	86.76	54.00	32.76	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Vertical

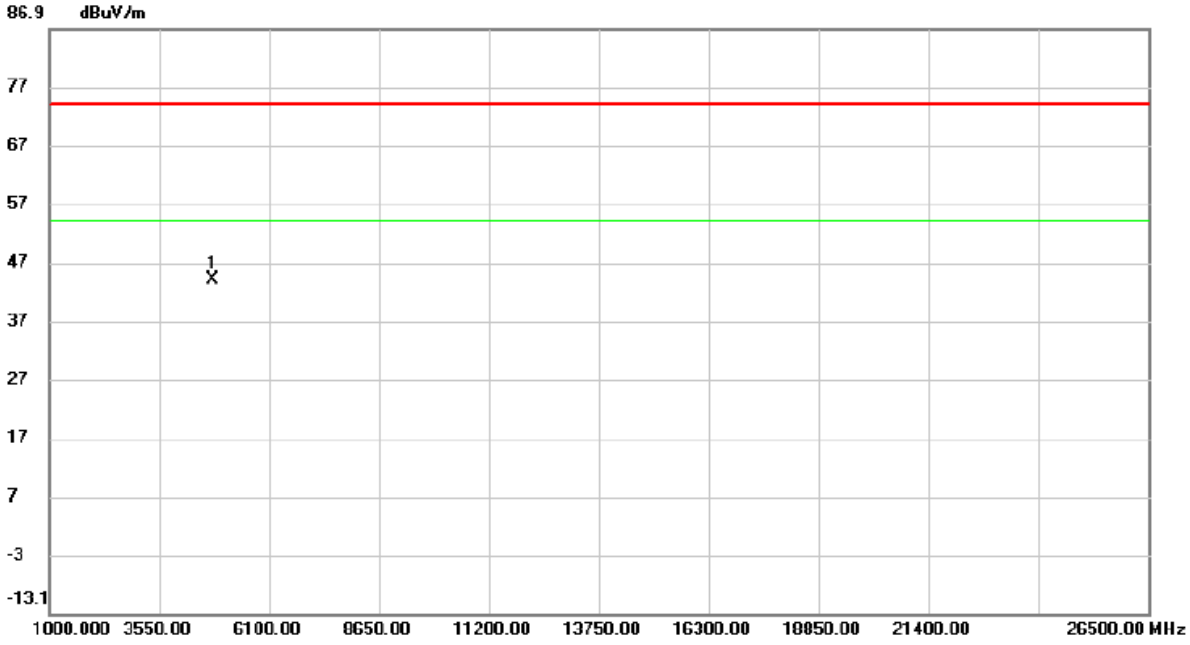

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.600	55.10	-10.95	44.15	74.00	-29.85	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Horizontal

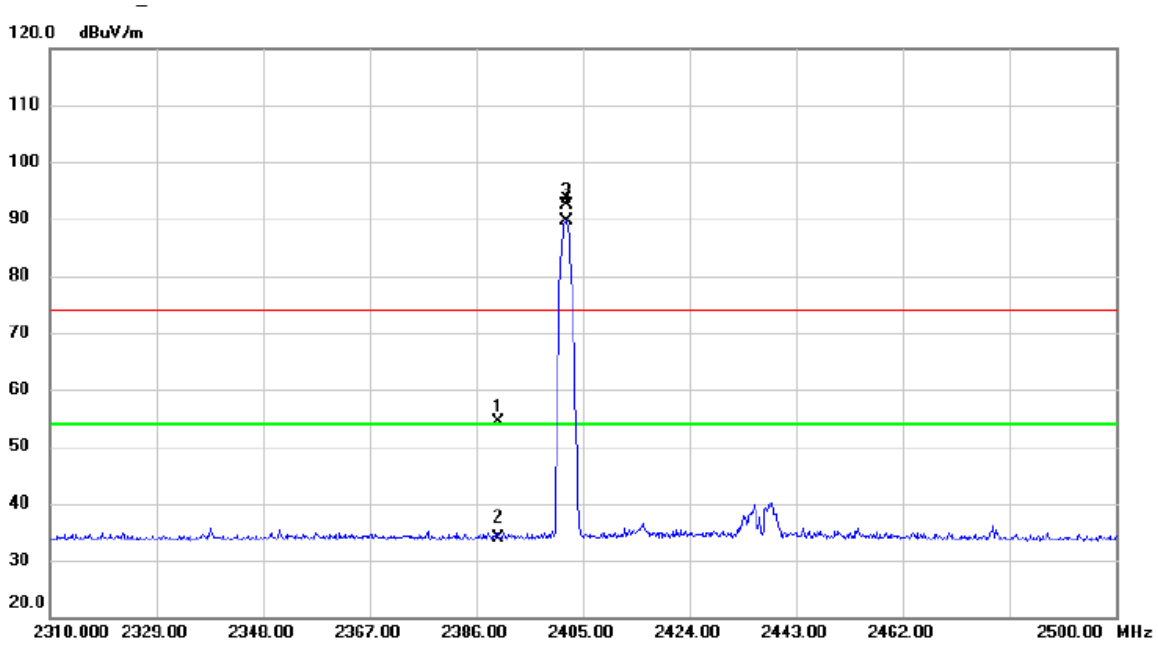

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.70	31.74	54.44	74.00	-19.56	peak	
2		2390.000	2.25	31.74	33.99	54.00	-20.01	AVG	
3	X	2401.960	60.77	31.72	92.49	74.00	18.49	peak	
4	*	2401.960	57.79	31.72	89.51	54.00	35.51	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Horizontal

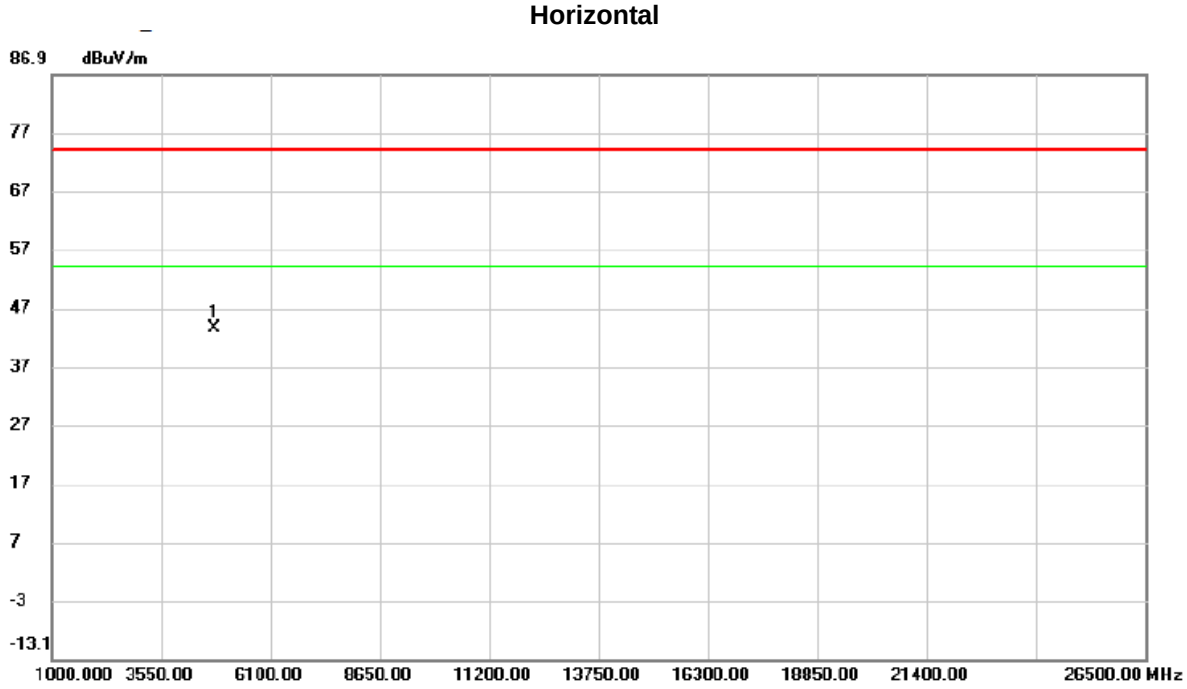

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4803.325	54.44	-10.95	43.49	74.00	-30.51	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Vertical

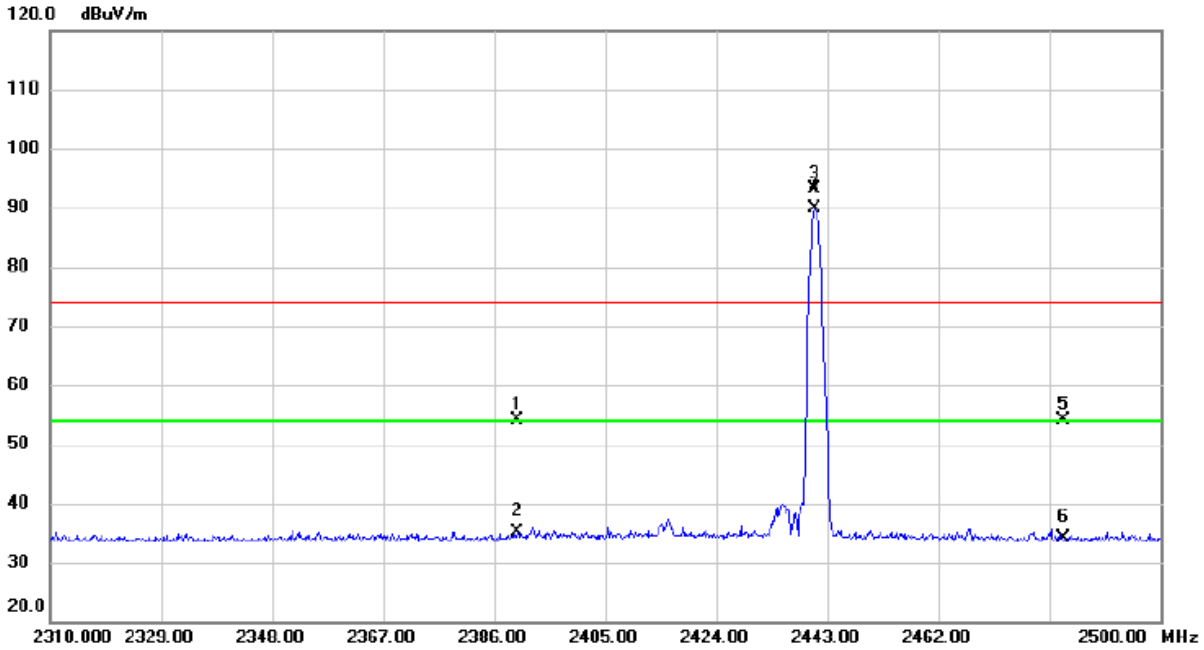

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.40	31.74	54.14	74.00	-19.86	peak	
2		2390.000	3.27	31.74	35.01	54.00	-18.99	AVG	
3	X	2440.910	61.29	31.72	93.01	74.00	19.01	peak	
4	*	2440.910	58.19	31.72	89.91	54.00	35.91	AVG	
5		2483.500	22.38	31.72	54.10	74.00	-19.90	peak	
6		2483.500	2.37	31.72	34.09	54.00	-19.91	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Vertical

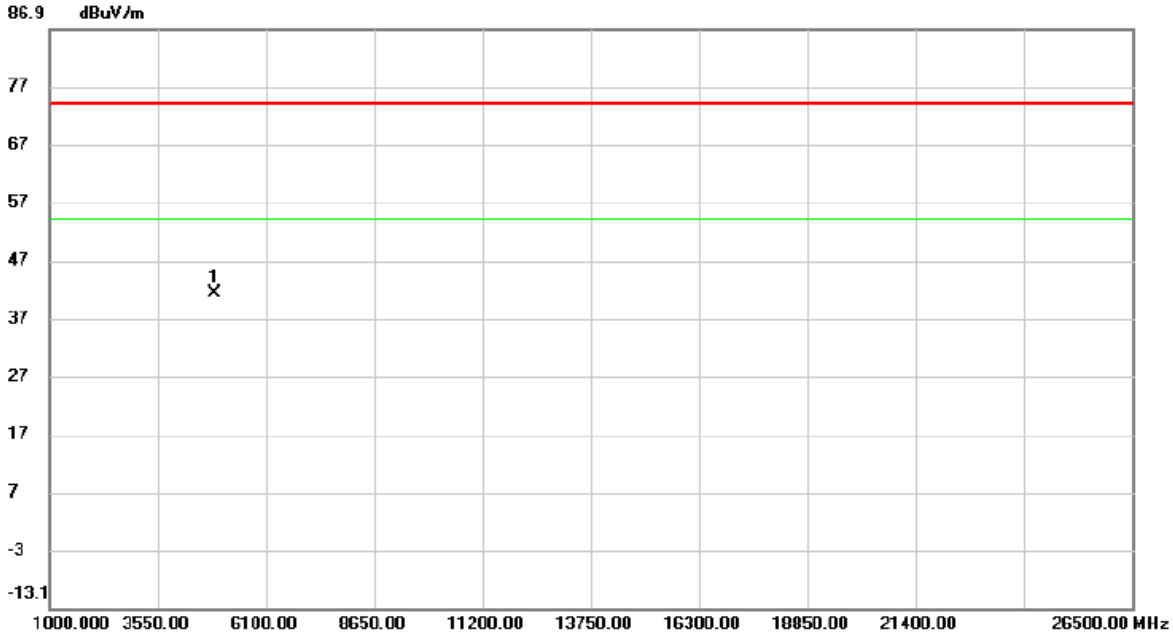

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4882.000	52.01	-10.78	41.23	74.00	-32.77	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Horizontal

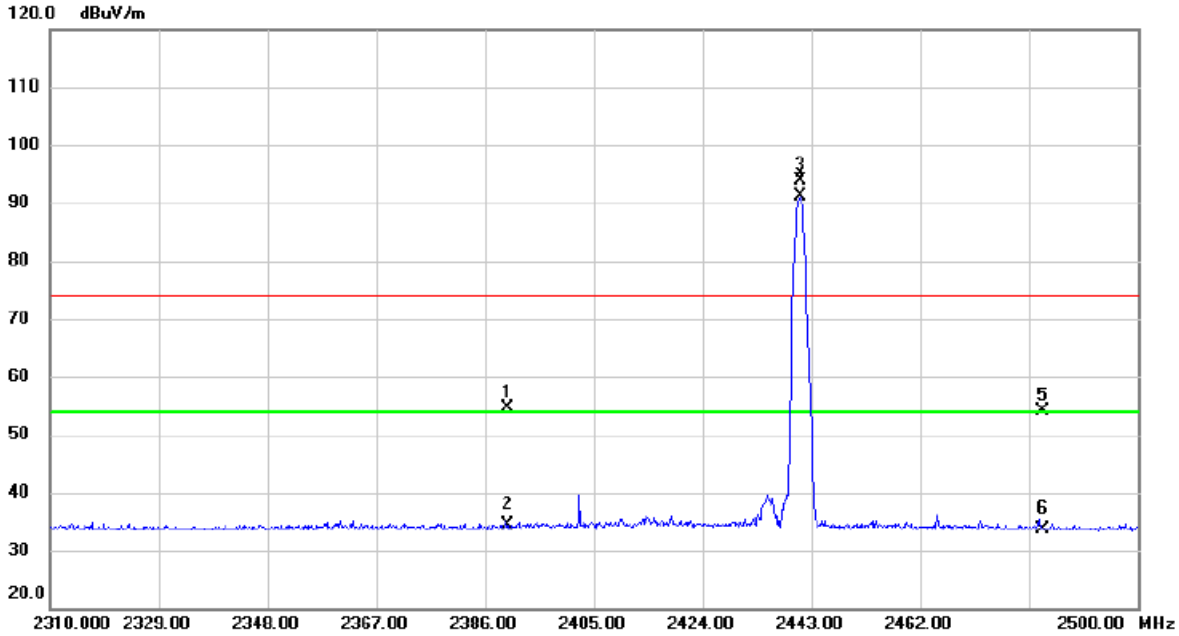

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.93	31.74	54.67	74.00	-19.33	peak	
2		2390.000	2.70	31.74	34.44	54.00	-19.56	AVG	
3	X	2441.005	62.21	31.72	93.93	74.00	19.93	peak	
4	*	2441.005	59.30	31.72	91.02	54.00	37.02	AVG	
5		2483.500	22.48	31.72	54.20	74.00	-19.80	peak	
6		2483.500	1.89	31.72	33.61	54.00	-20.39	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Horizontal

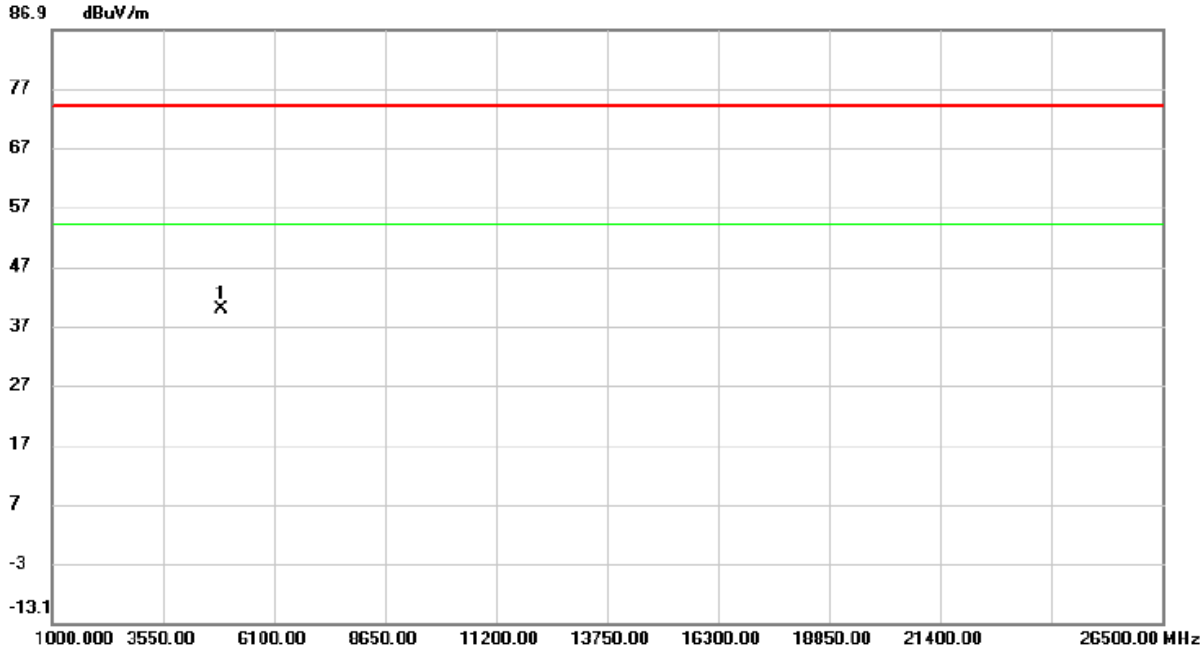

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4882.000	50.44	-10.78	39.66	74.00	-34.34	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Vertical

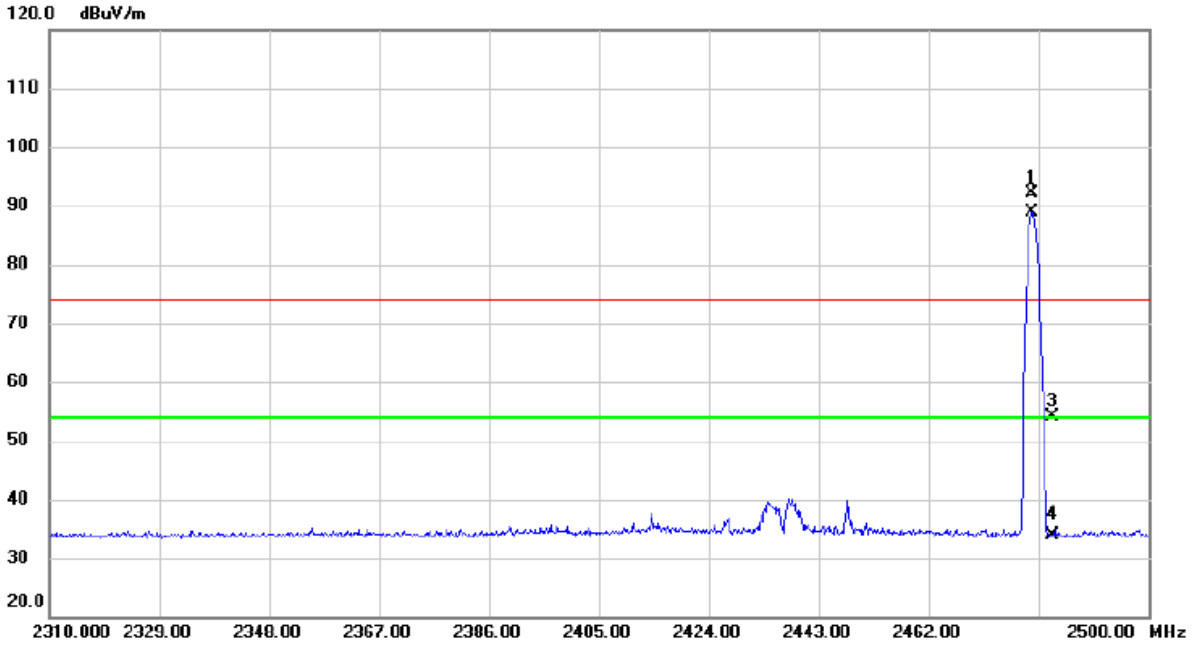

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.955	60.34	31.71	92.05	74.00	18.05	peak	
2	*	2479.955	57.21	31.71	88.92	54.00	34.92	AVG	
3		2483.500	22.48	31.72	54.20	74.00	-19.80	peak	
4		2483.500	2.21	31.72	33.93	54.00	-20.07	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Vertical

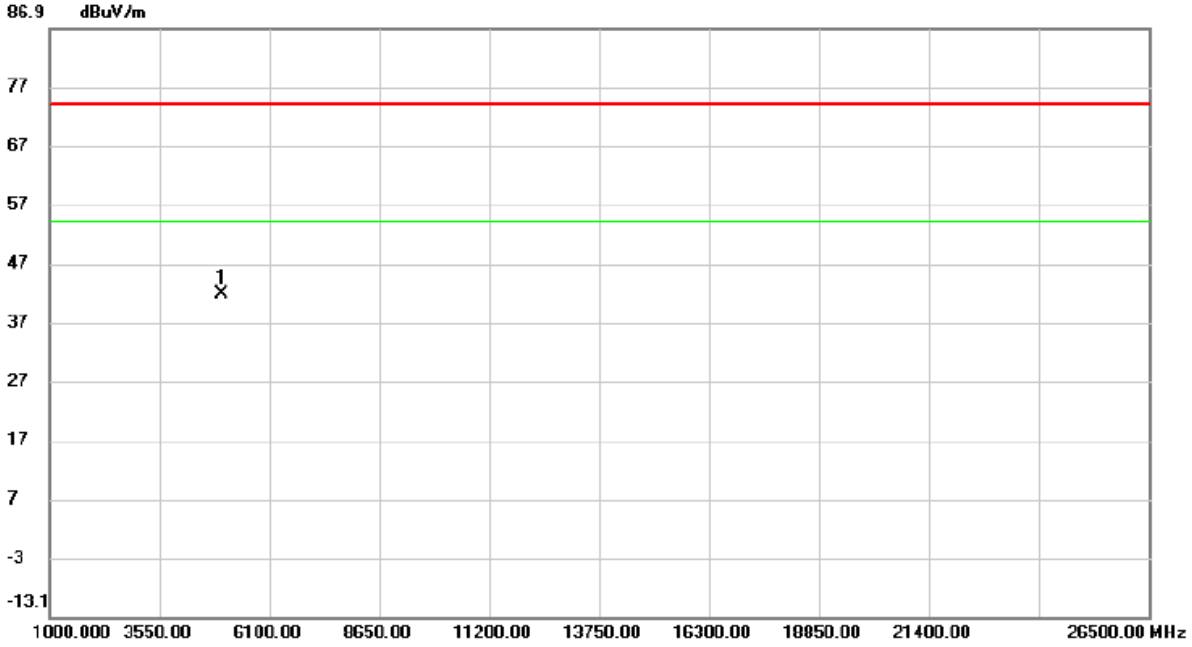

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4979.275	52.10	-10.37	41.73	74.00	-32.27	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Horizontal

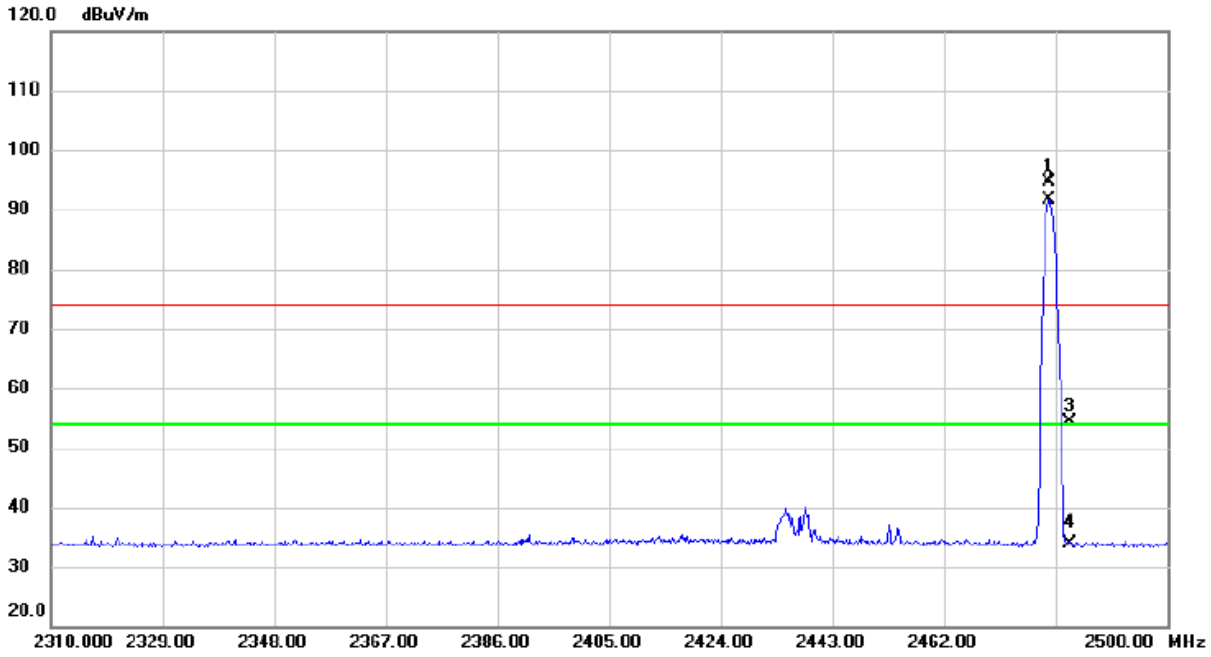

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.955	62.97	31.71	94.68	74.00	20.68	peak	
2	*	2479.955	59.90	31.71	91.61	54.00	37.61	AVG	
3		2483.500	22.69	31.72	54.41	74.00	-19.59	peak	
4		2483.500	2.17	31.72	33.89	54.00	-20.11	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Horizontal

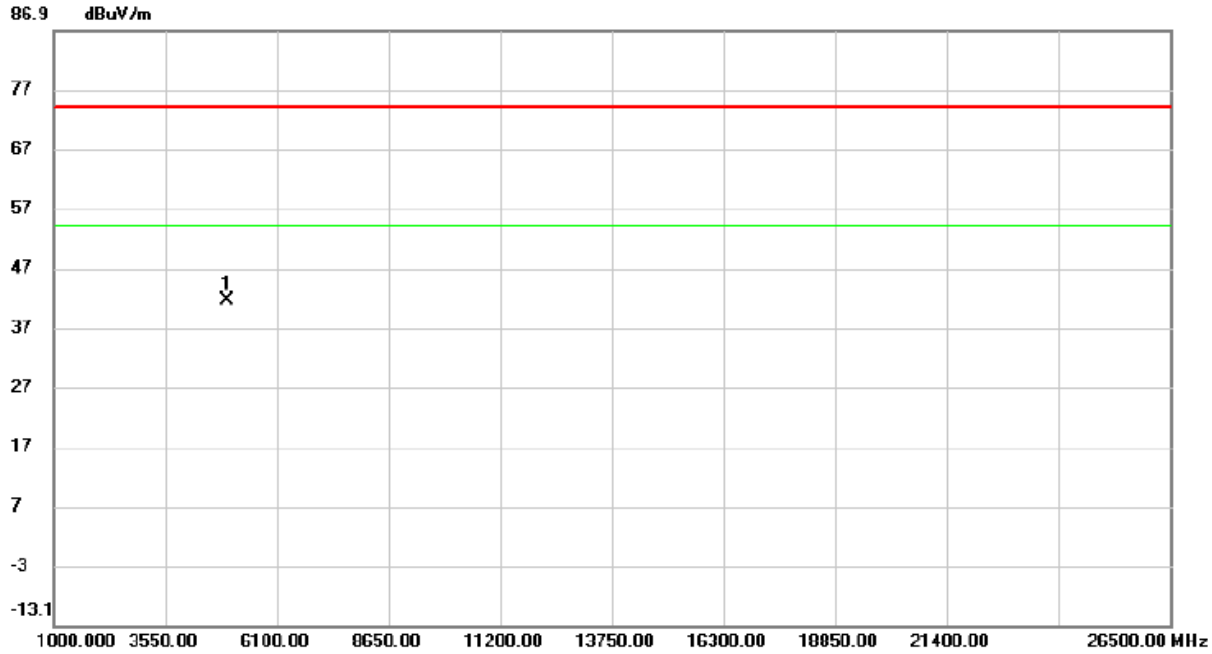

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.150	52.04	-10.46	41.58	74.00	-32.42	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - NUMBER OF HOPPING FREQUENCY

Test Mode	Hopping Mode_1Mbps
Number of Hopping Frequency	79

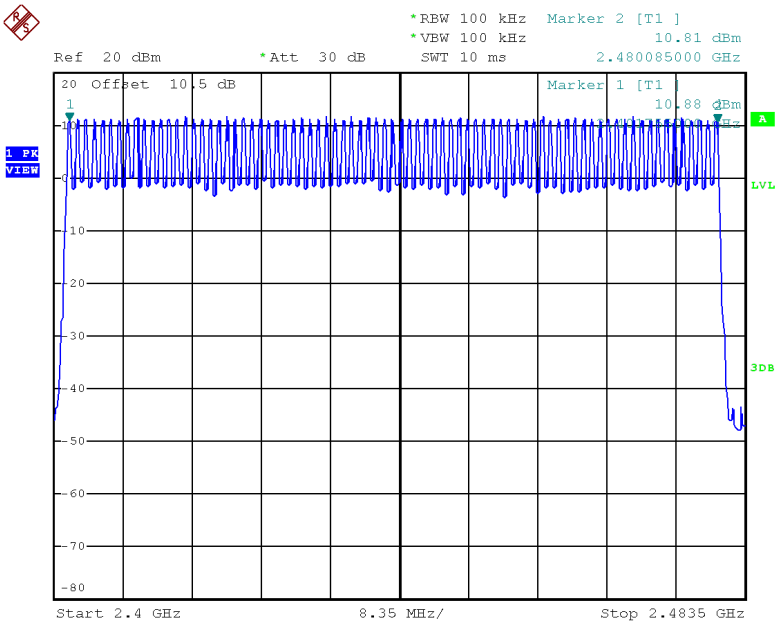

Date: 3.DEC.2020 17:19:00

Test Mode	Hopping Mode_2 Mbps
Number of Hopping Frequency	79

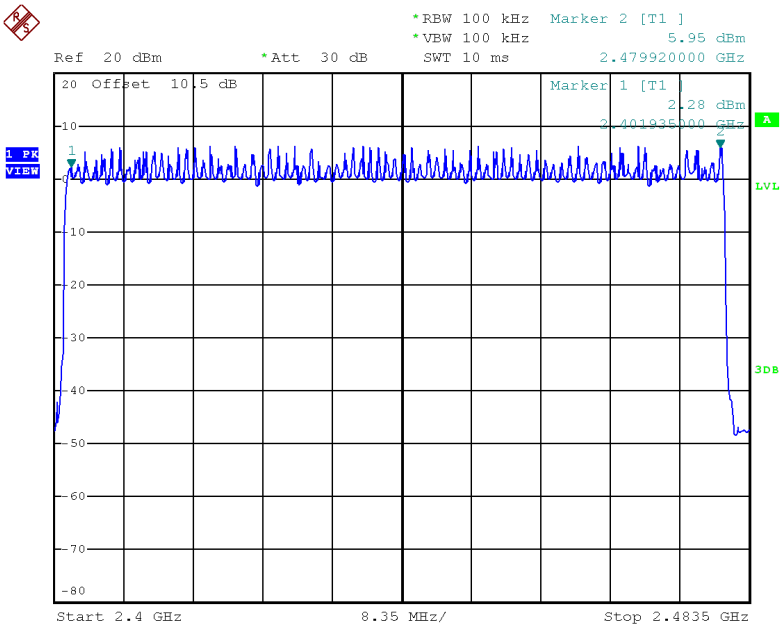

Date: 3.DEC.2020 17:21:39

Test Mode	Hopping Mode_3Mbps
Number of Hopping Frequency	79

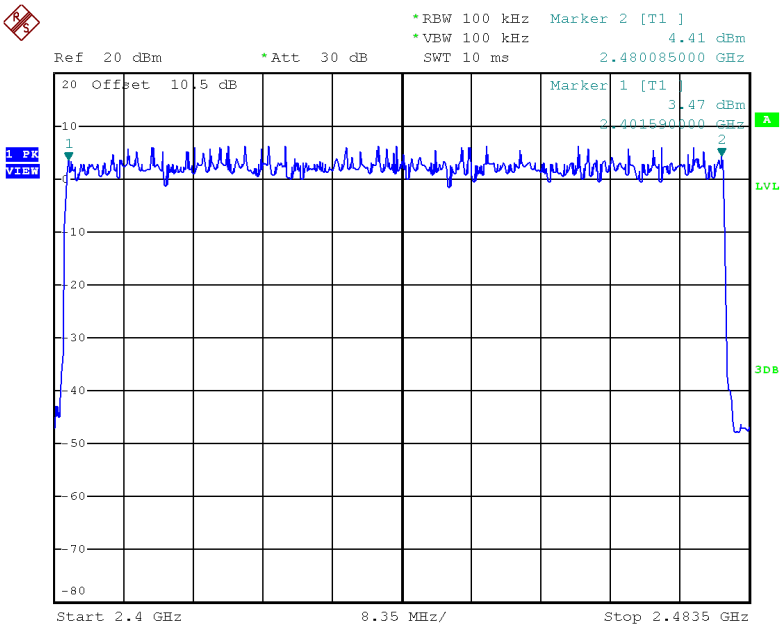

Date: 3.DEC.2020 17:37:34

APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode:	TX Mode_1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.892	0.31812	0.4000	Pass
2DH5	2402	3.744	0.41184	0.4000	Pass
3DH5	2402	3.472	0.38192	0.4000	Pass
DH5	2441	2.892	0.31812	0.4000	Pass
2DH5	2441	2.896	0.31856	0.4000	Pass
3DH5	2441	2.896	0.31856	0.4000	Pass
DH5	2480	2.892	0.31812	0.4000	Pass
2DH5	2480	2.896	0.31856	0.4000	Pass
3DH5	2480	2.896	0.31856	0.4000	Pass

CH00-DH5

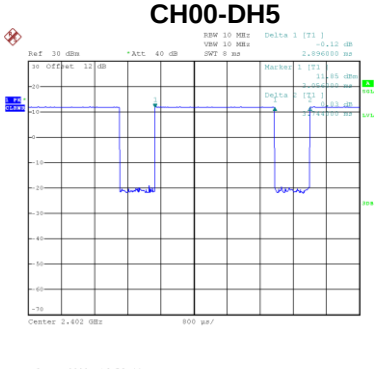

Date: 3.DEC.2020 16:58:44

CH39- DH5

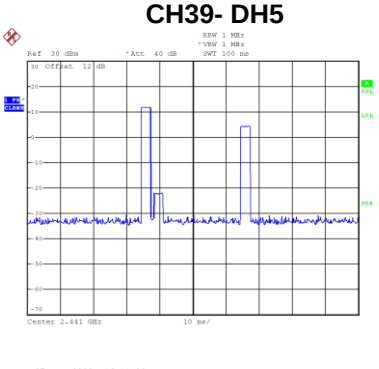

Date: 27.NOV.2020 16:11:02

CH78- DH5

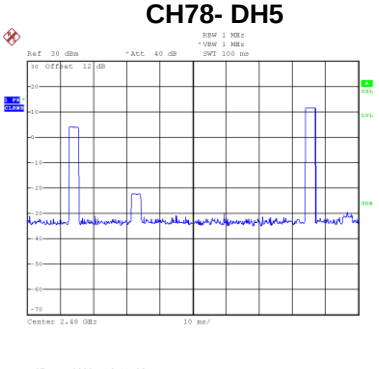

Date: 27.NOV.2020 16:11:28

CH00-2DH5

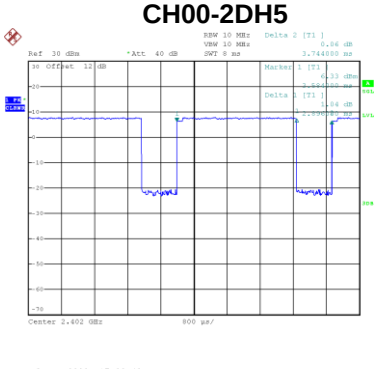

Date: 3.DEC.2020 17:00:42

CH39-2DH5

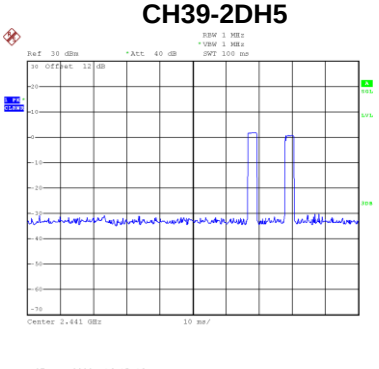

Date: 27.NOV.2020 16:15:18

CH78-2DH5

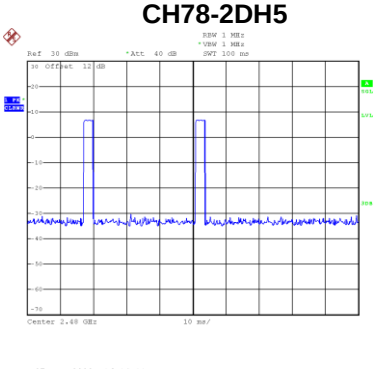

Date: 27.NOV.2020 16:14:11

CH00-3DH5

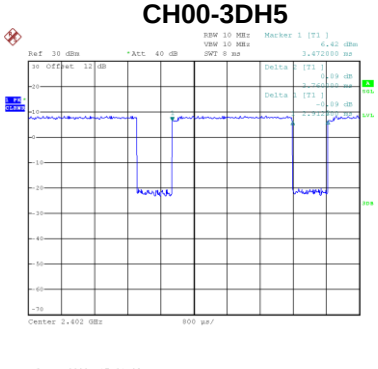

Date: 3.DEC.2020 17:01:23

CH39-3DH5

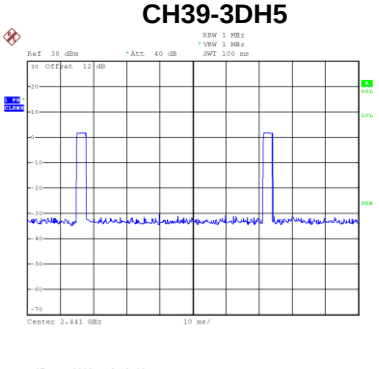

Date: 27.NOV.2020 16:19:28

CH78-3DH5

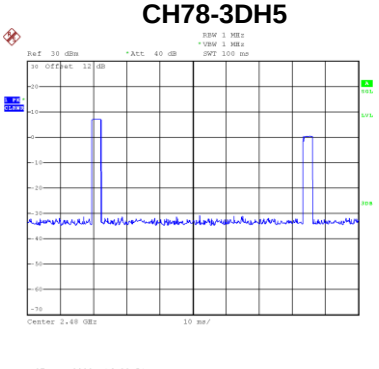

Date: 27.NOV.2020 16:20:51

APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode:	Hopping on _1Mbps

Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.002	0.68	Pass
39	2441	1.008	0.64	Pass
78	2480	1.002	0.64	Pass

CH00

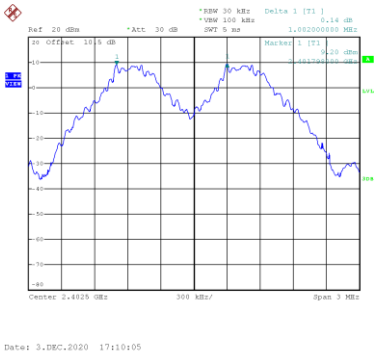

CH39

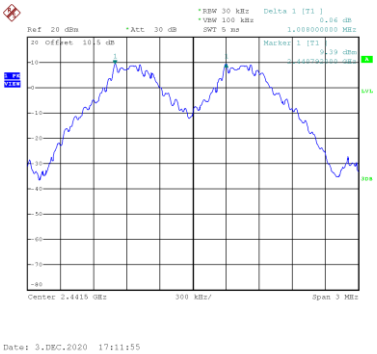

CH78

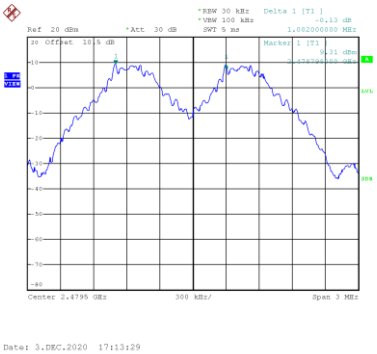

Test Mode:	Hopping on _2Mbps

Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.002	0.91	Pass
39	2441	1.002	0.91	Pass
78	2480	1.008	0.93	Pass

CH00

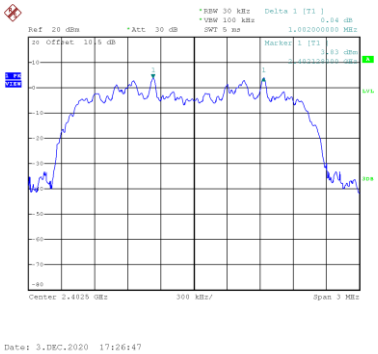

CH39

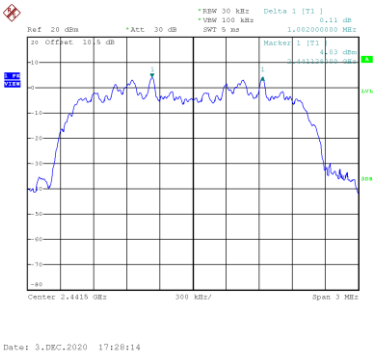

CH78

Test Mode:	Hopping on _3Mbps

Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.002	0.90	Pass
39	2441	1.002	0.90	Pass
78	2480	1.002	0.90	Pass

CH00

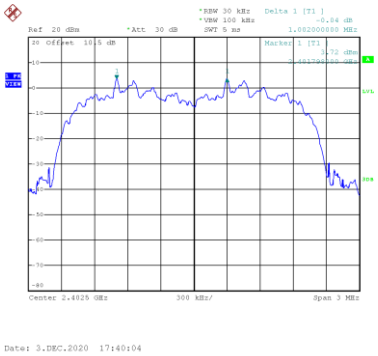

CH39

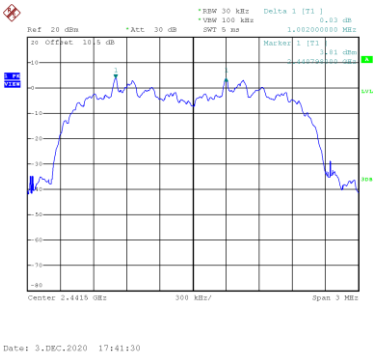

CH78

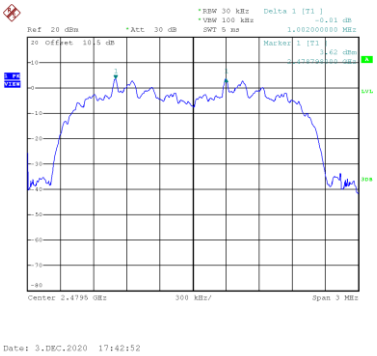

APPENDIX H - BANDWIDTH

Test Mode:	TX Mode _1Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	1.020	0.896
39	2441	0.961	0.961
78	2480	0.959	0.959

CH00

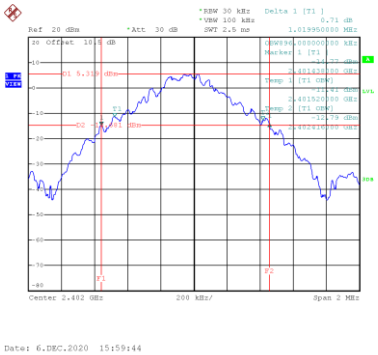

CH39

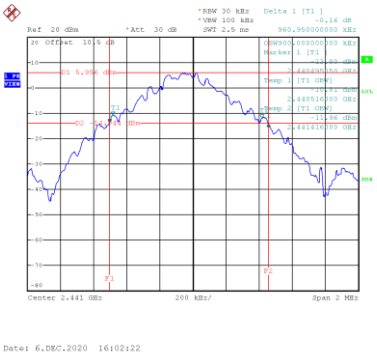

CH78

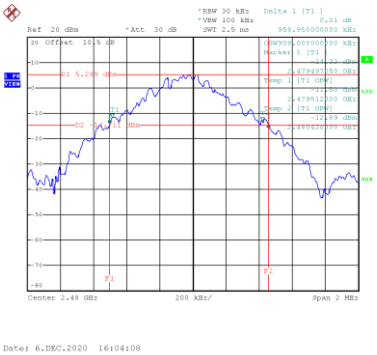

Test Mode:	TX Mode _2Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	1.362	1.196
39	2441	1.370	1.204
78	2480	1.388	1.208

CH00

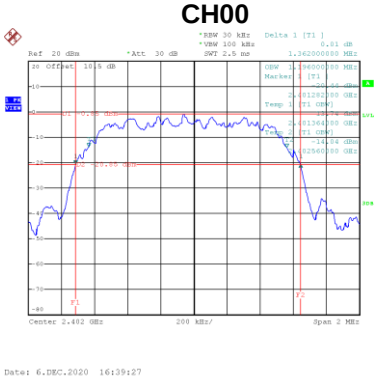

CH39

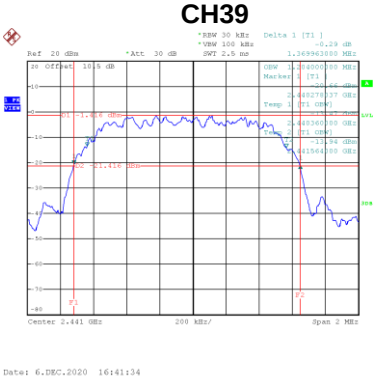

CH78

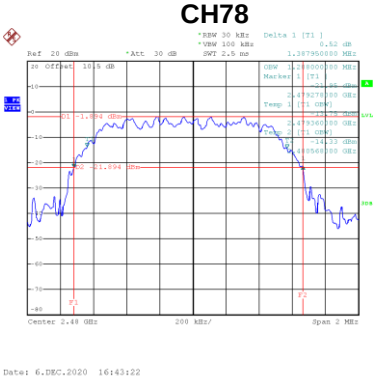

Test Mode:	TX Mode _3Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	1.350	1.212
39	2441	1.352	1.212
78	2480	1.354	1.204

CH00

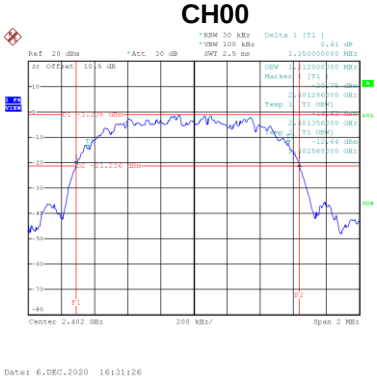

Date: 6.DEC.2020 16:31:26

CH39

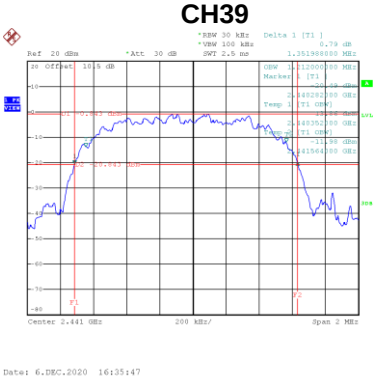

Date: 6.DEC.2020 16:35:47

CH78

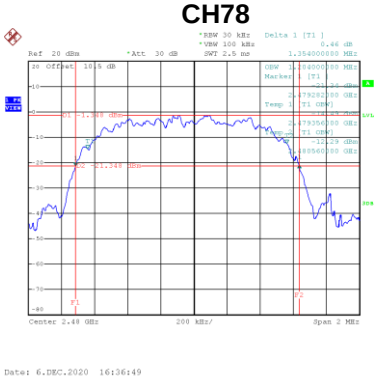

Date: 6.DEC.2020 16:36:49

APPENDIX I - MAXIMUM OUTPUT POWER

Test Mode:	TX Mode _1Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	8.97	0.0079	21.00	0.125	Pass
39	2441	9.13	0.0082	21.00	0.125	Pass
78	2480	8.93	0.0078	21.00	0.125	Pass

CH00

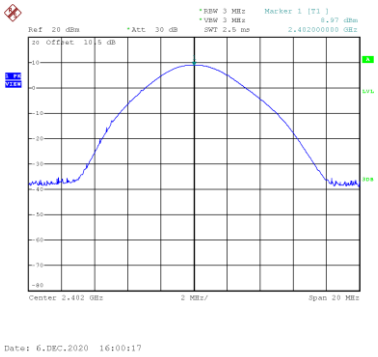

CH39

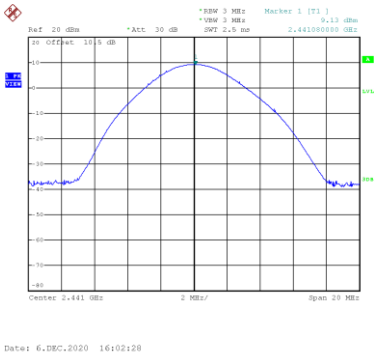

CH78

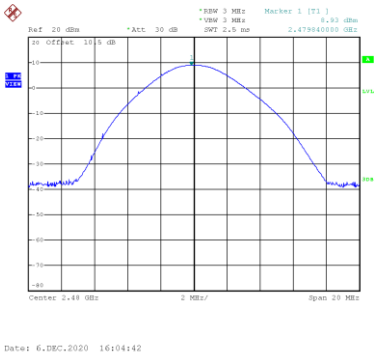

Test Mode:	TX Mode _2Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.50	0.0056	21.00	0.125	Pass
39	2441	7.51	0.0056	21.00	0.125	Pass
78	2480	7.28	0.0053	21.00	0.125	Pass

CH00

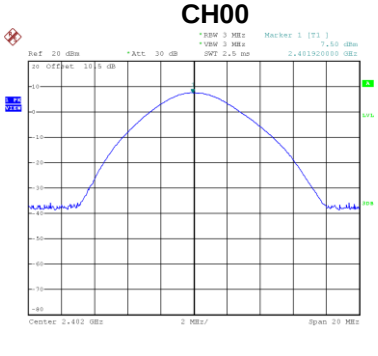

CH39

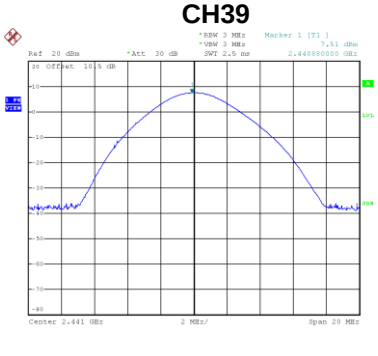

CH78

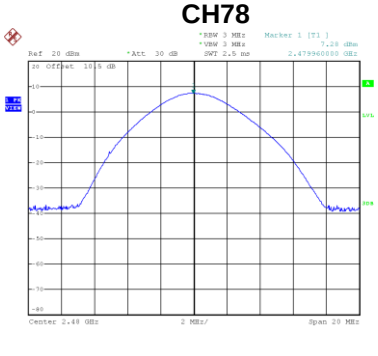

Test Mode:	TX Mode _3Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.31	0.0054	21.00	0.125	Pass
39	2441	7.45	0.0056	21.00	0.125	Pass
78	2480	7.42	0.0055	21.00	0.125	Pass

CH00

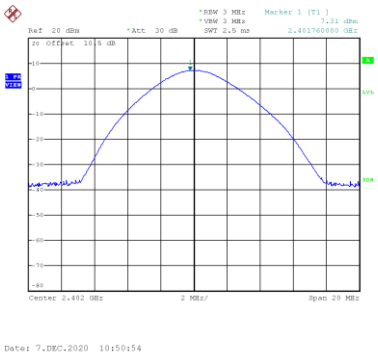

Date: 7.DEC.2020 10:50:54

CH39

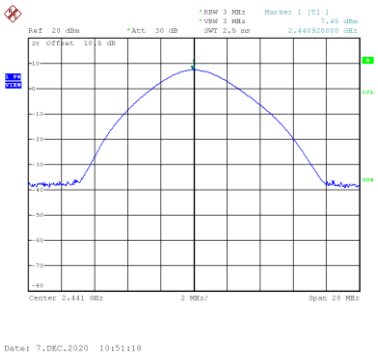

Date: 7.DEC.2020 10:51:18

CH78

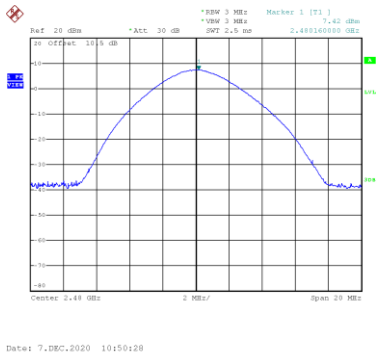

Date: 7.DEC.2020 10:50:28

APPENDIX J - CONDUCTED SPURIOUS EMISSION

Test Mode : TX Mode _1Mbps

Bandedge CH00 (Lower)

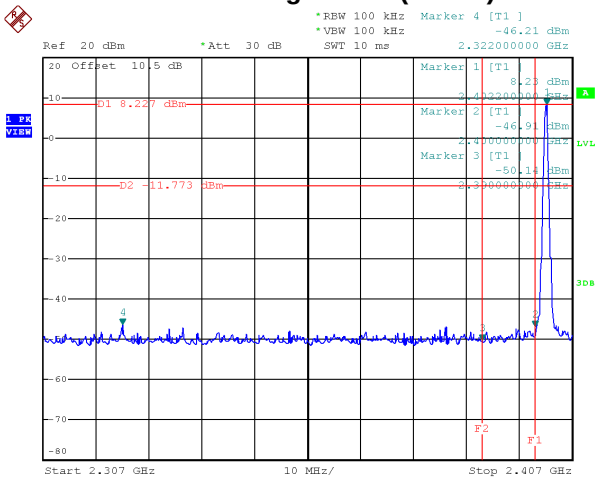

Date: 6.DEC.2020 15:59:13

Bandedge CH78 (Upper)

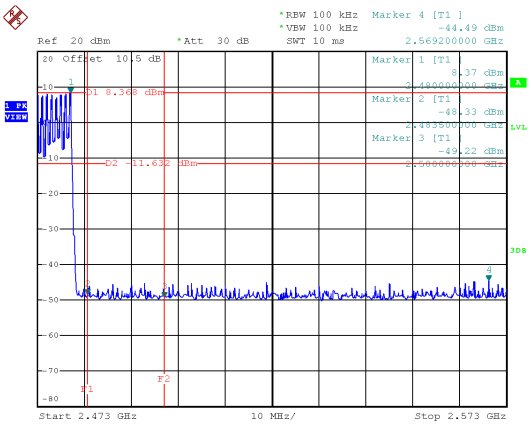

Date: 6.DEC.2020 16:22:43

Hopping on mode (Lower)

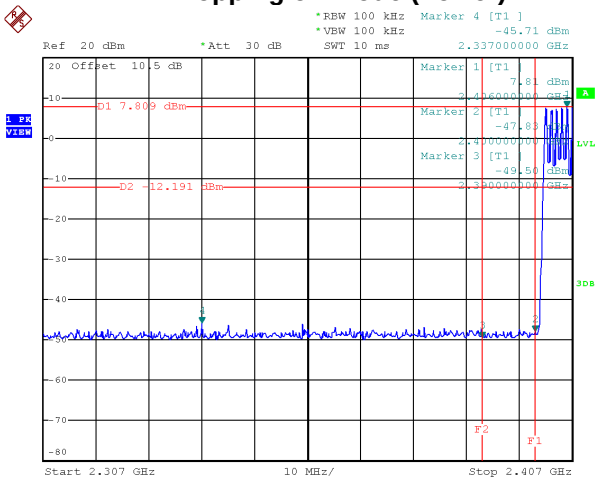

Date: 6.DEC.2020 16:22:08

Hopping on mode (Upper)

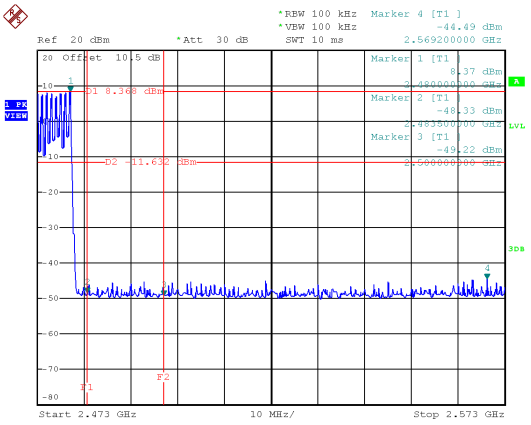

Date: 6.DEC.2020 16:22:43

CH00 – 10th Harmonic of the fundamental frequency

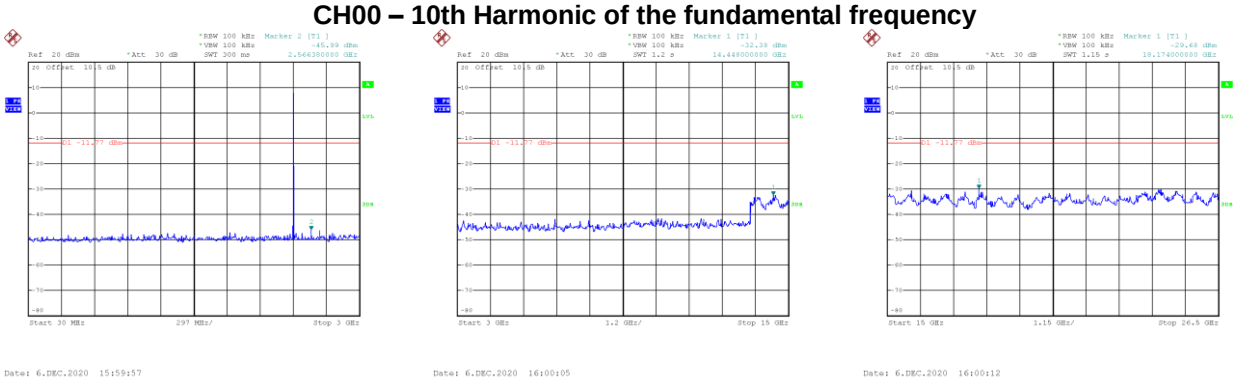

CH39 – 10th Harmonic of the fundamental frequency

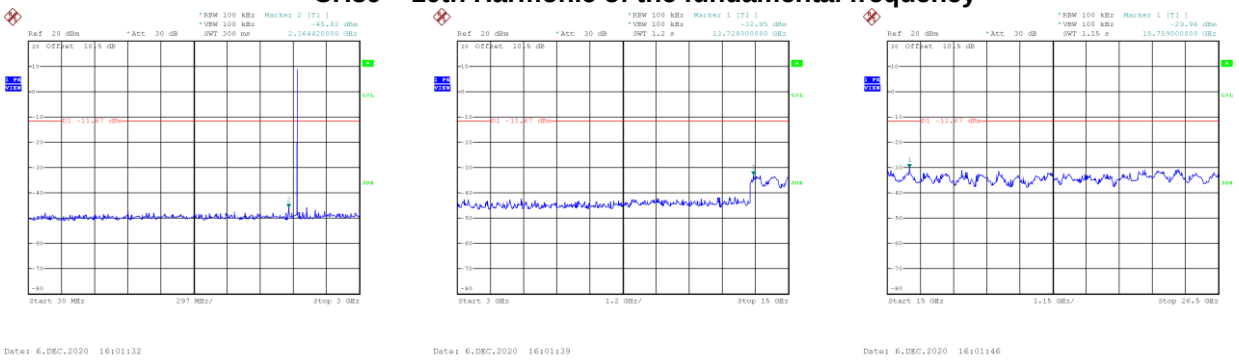

CH78 – 10th Harmonic of the fundamental frequency

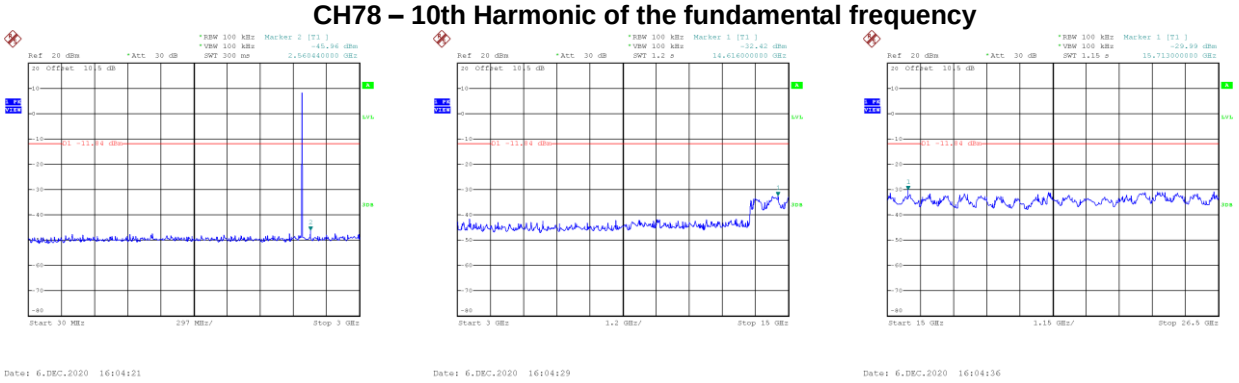

Test Mode : TX Mode _2Mbps

Bandedge CH00 (Lower)

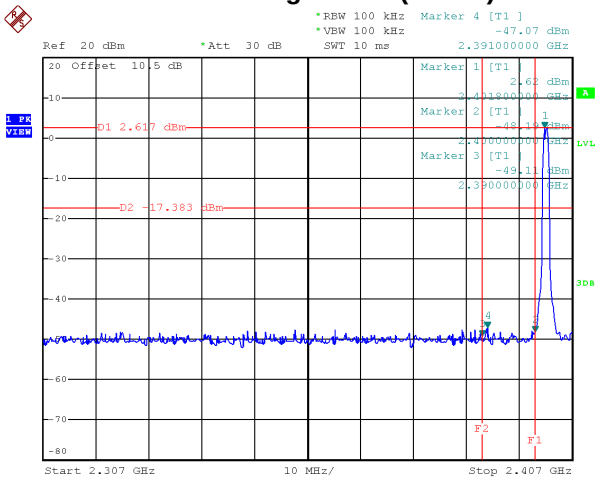

Date: 6.DEC.2020 16:39:05

Bandedge CH78 (Upper)

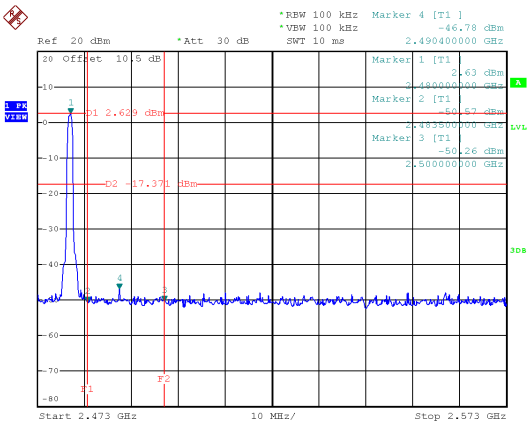

Date: 6.DEC.2020 16:42:55

Hopping on mode (Lower)

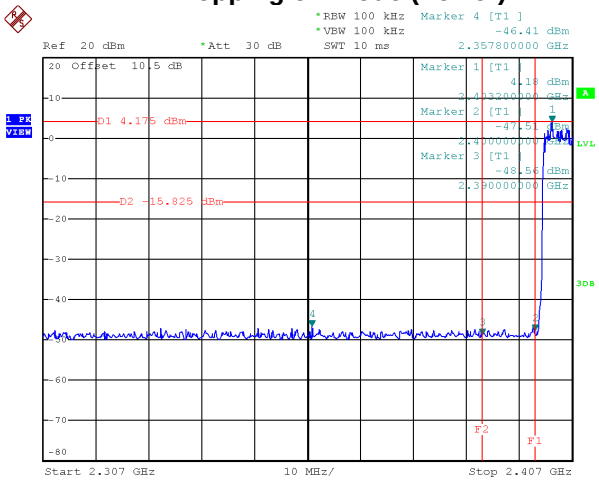

Date: 6.DEC.2020 16:24:45

Hopping on mode (Upper)

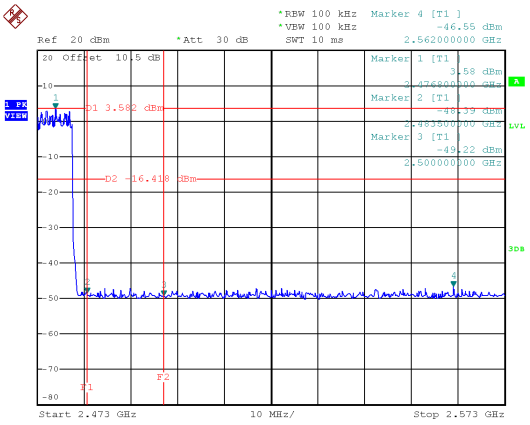

Date: 6.DEC.2020 16:25:19

CH00 – 10th Harmonic of the fundamental frequency

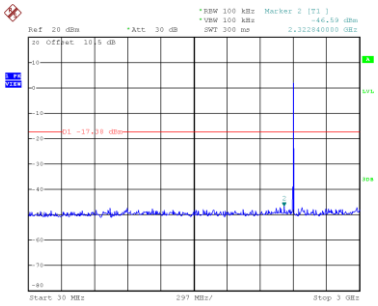

Date: 6.DEC.2020 16:39:40

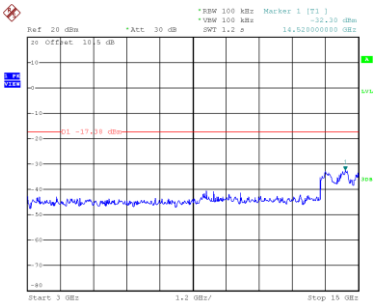

Date: 6.DEC.2020 16:39:48

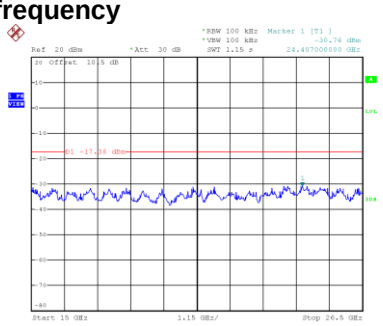

Date: 6.DEC.2020 16:39:55

CH39 – 10th Harmonic of the fundamental frequency

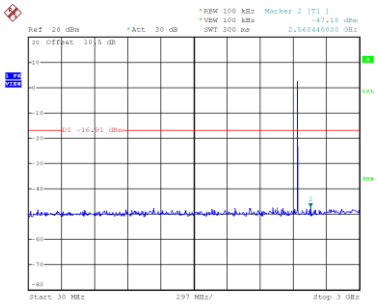

Date: 6.DEC.2020 16:40:57

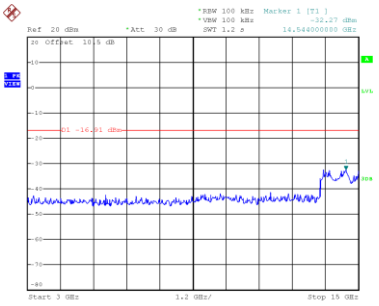

Date: 6.DEC.2020 16:41:05

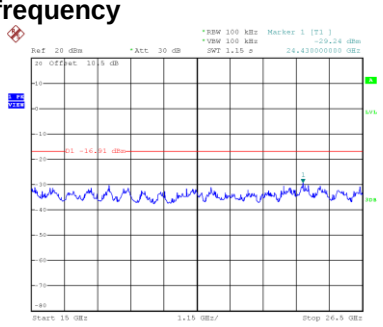

Date: 6.DEC.2020 16:41:12

CH78 – 10th Harmonic of the fundamental frequency

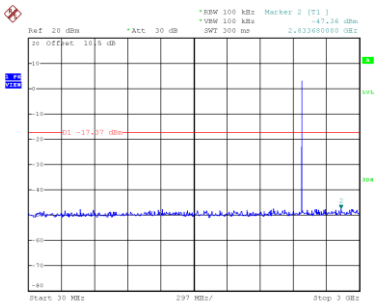

Date: 6.DEC.2020 16:43:35

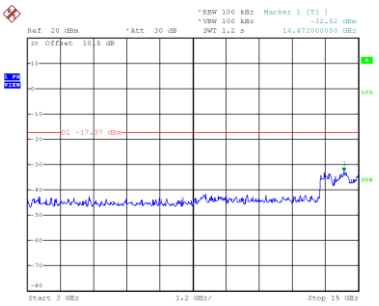

Date: 6.DEC.2020 16:43:42

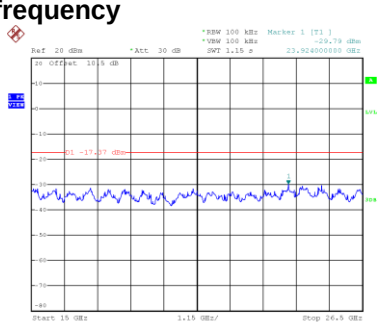

Date: 6.DEC.2020 16:43:50

Test Mode : TX Mode _3Mbps

Bandedge CH00 (Lower)

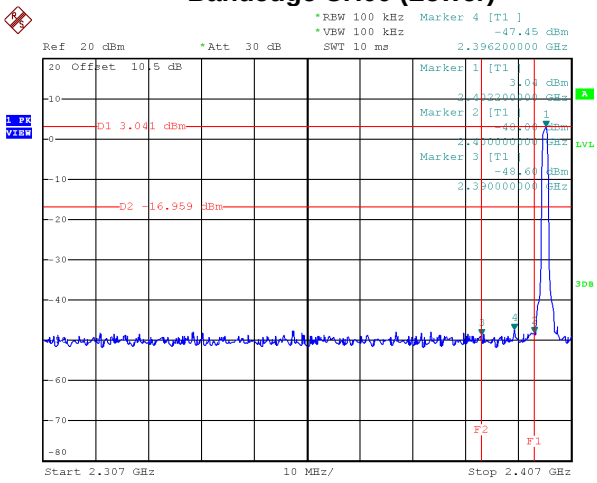

Date: 6.DEC.2020 16:31:03

Bandedge CH78 (Upper)

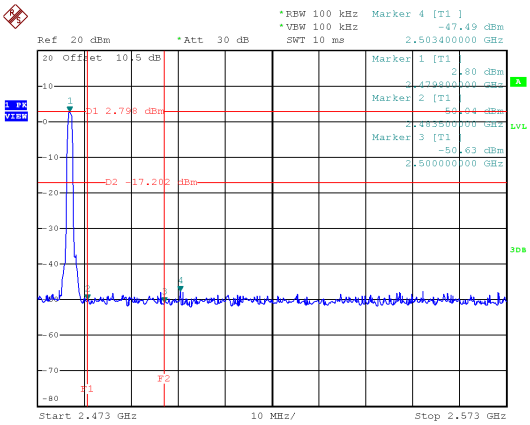

Date: 6.DEC.2020 16:36:25

Hopping on mode (Lower)

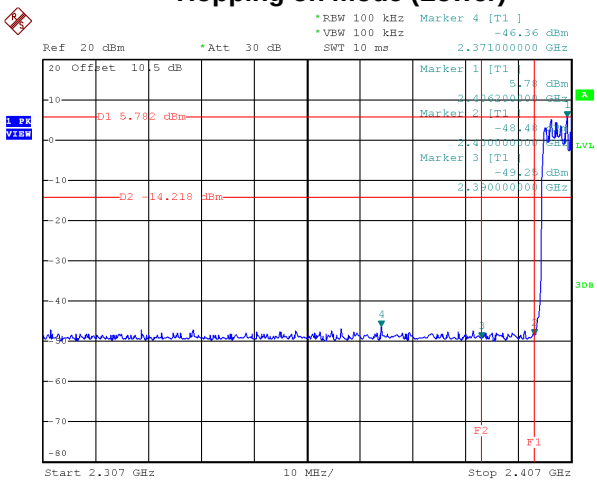

Date: 6.DEC.2020 16:27:28

Hopping on mode (Upper)

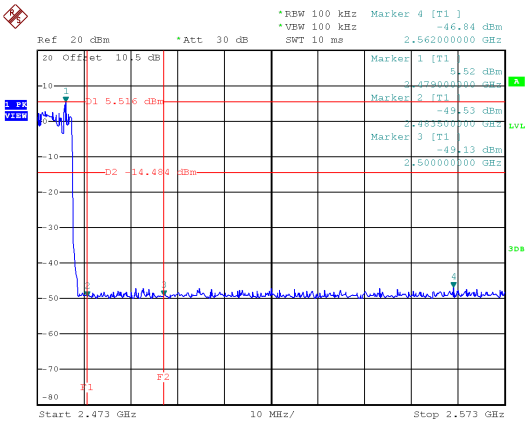

Date: 6.DEC.2020 16:28:02

CH00 – 10th Harmonic of the fundamental frequency

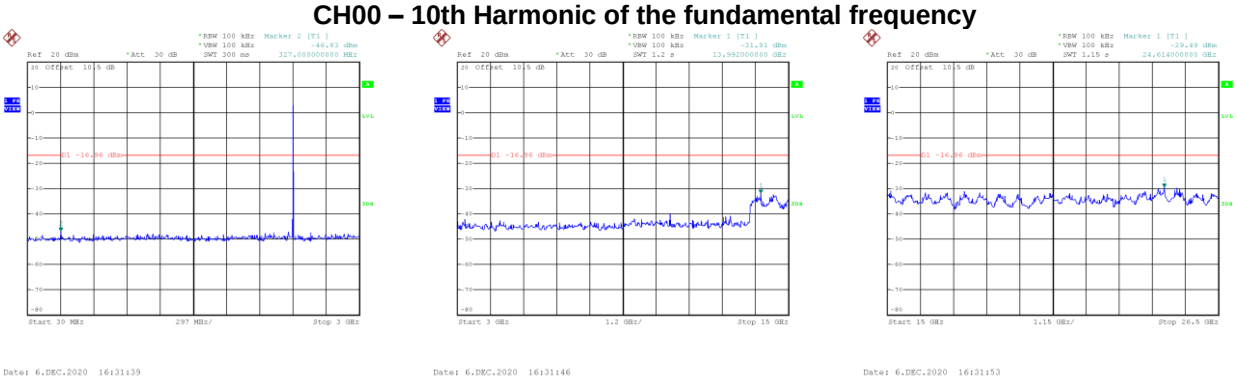

CH39 – 10th Harmonic of the fundamental frequency

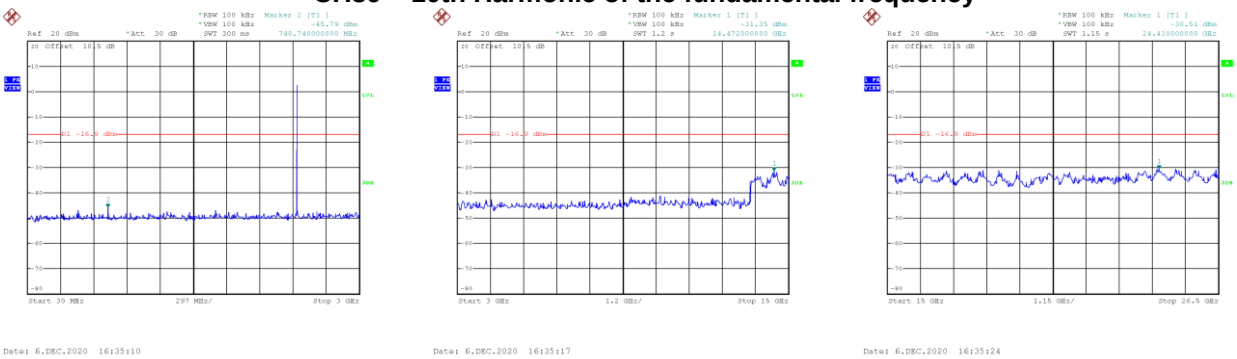

CH78 – 10th Harmonic of the fundamental frequency

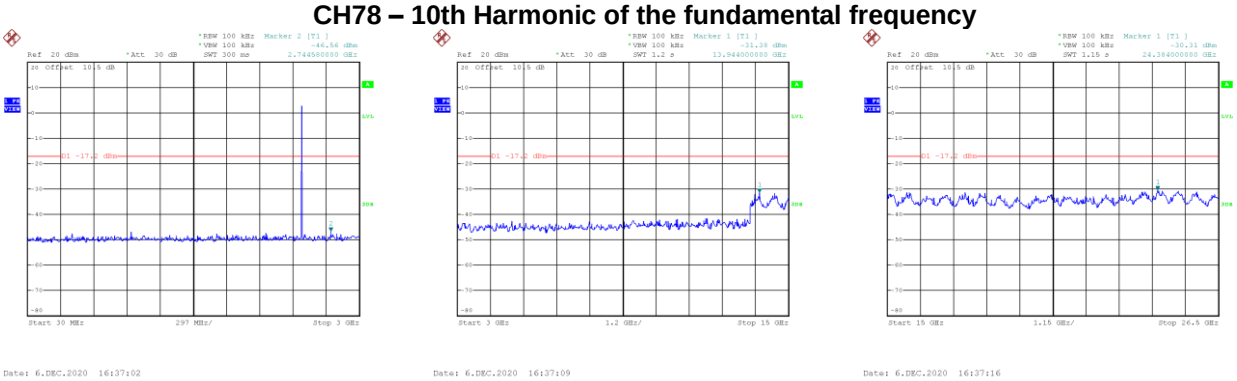

End of Test Report