


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	2.4G + 5G

Horizontal

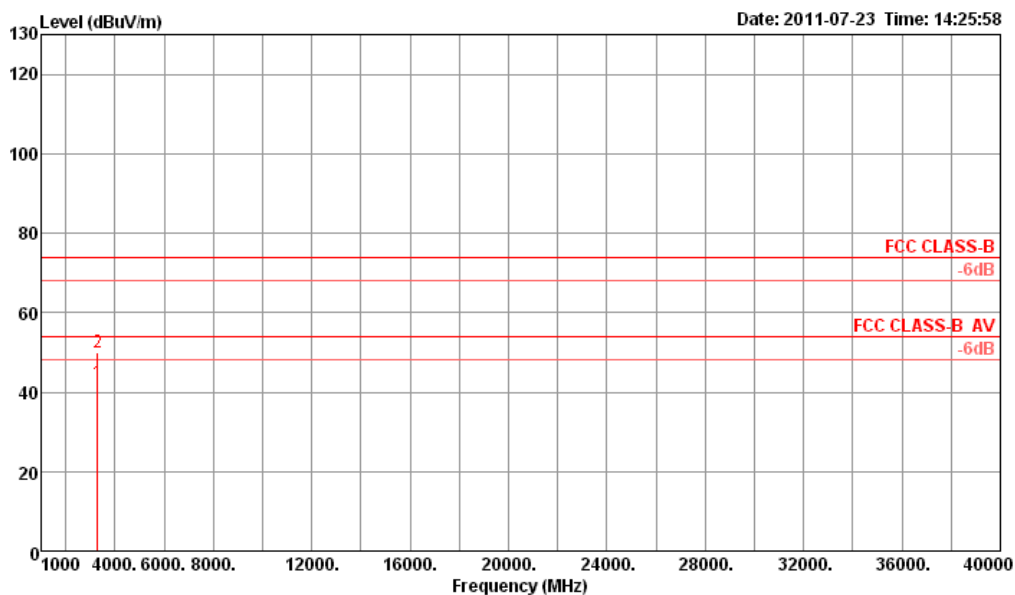

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase
1	3282.67	42.20	54.00	-11.80	43.55	3.40	30.45	35.20	Average	HORIZONTAL
2	3282.73	49.80	74.00	-24.20	51.15	3.40	30.45	35.20	Peak	HORIZONTAL

Vertical

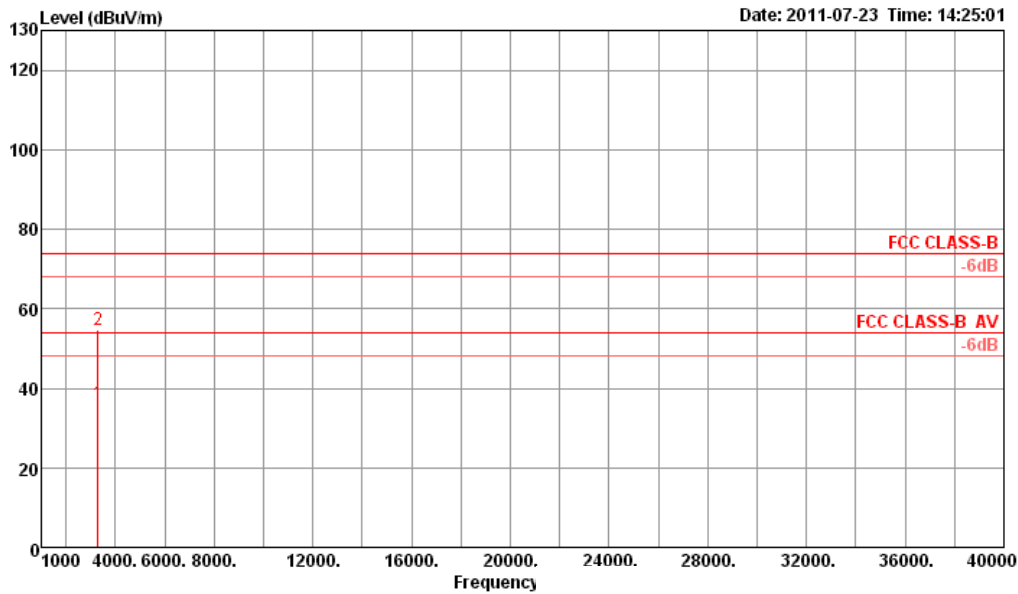

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark
			dBuV/m	dB	dBuV	dB	dB/m	dB	Pol/Phase
1	3282.40	36.16	54.00	-17.84	37.51	3.40	30.45	35.20	Average VERTICAL
2	3282.70	54.79	74.00	-19.21	56.14	3.40	30.45	35.20	Peak VERTICAL