DFS PORTION of FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-72474U

REPORT NUMBER: 12097277-E6V2

ISSUE DATE: JANUARY 29, 2018

Prepared for
SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP TESTING
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/19/18	Initial Issue	H. Lau
V2	01/29/18	Update Antenna Gain and Type Statements	D. Anderson

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 4

2. TEST METHODOLOGY 5

3. REFERENCE DOCUMENTS 5

4. FACILITIES AND ACCREDITATION 5

5. CALIBRATION AND UNCERTAINTY 5

5.1. MEASURING INSTRUMENT CALIBRATION 5

5.2. MEASUREMENT UNCERTAINTY 5

6. DYNAMIC FREQUENCY SELECTION 6

6.1. OVERVIEW 6

6.1.1. LIMITS 6
6.1.2. TEST AND MEASUREMENT SYSTEM 10
6.1.3. TEST AND MEASUREMENT SOFTWARE 12
6.1.4. TEST ROOM ENVIRONMENT 12
6.1.5. SETUP OF EUT 13
6.1.6. DESCRIPTION OF EUT 14

6.2. RESULTS FOR 20 MHz BANDWIDTH 16

6.2.1. TEST CHANNEL 16
6.2.2. RADAR WAVEFORM AND TRAFFIC 16
6.2.3. OVERLAPPING CHANNEL TESTS 19
6.2.4. MOVE AND CLOSING TIME 19

6.3. RESULTS FOR 40 MHz BANDWIDTH 23

6.3.1. TEST CHANNEL 23
6.3.2. RADAR WAVEFORM AND TRAFFIC 23
6.3.3. OVERLAPPING CHANNEL TESTS 26
6.3.4. MOVE AND CLOSING TIME 26

6.4. RESULTS FOR 80 MHz BANDWIDTH 30

6.4.1. TEST CHANNEL 30
6.4.2. RADAR WAVEFORM AND TRAFFIC 30
6.4.3. OVERLAPPING CHANNEL TESTS 33
6.4.4. MOVE AND CLOSING TIME 33
6.4.5. 30-MINUTE NON-OCCUPANCY PERIOD 37

7. SETUP PHOTOS 38

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: BH90001DAY

DATE TESTED: JANUARY 4, 2018

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
DFS Portion of CFR 47 Part 15 Subpart E	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

HENRY LAU
LABORATORY ENGINEER
UL Verification Services Inc.

Tested By:

RAY LI
EMC ENGINEER
UL Verification Services Inc.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the DFS portion of FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, KDB 905462 D02 and D03.

3. REFERENCE DOCUMENTS

Measurements of transmitter parameters as referenced in this report are documented in UL Verification Services report number 12097277-E5V1.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services, Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty level has been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Time	± 0.02 %

The Uncertainty figure is valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6. DYNAMIC FREQUENCY SELECTION

6.1. OVERVIEW

6.1.1. LIMITS

FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client **(without DFS)**	Client **(with DFS)**
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.		

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes)
E.I.R.P. ≥ 200 mill watt	-64 dBm
E.I.R.P. < 200 mill watt and power spectral density < 10 dBm/MHz	-62 dBm
E.I.R.P. < 200 mill watt that do not meet power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.

Table 4: DFS Response requirement values

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1)
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3)

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: {(1/360) x (19 x 10^6 PRI_{usec})}	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the *Detection Bandwidth* test, *Channel Move Time*, and *Channel Closing Time* tests.					

Table 6 – Long Pulse Radar Test Signal

Radar Waveform Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

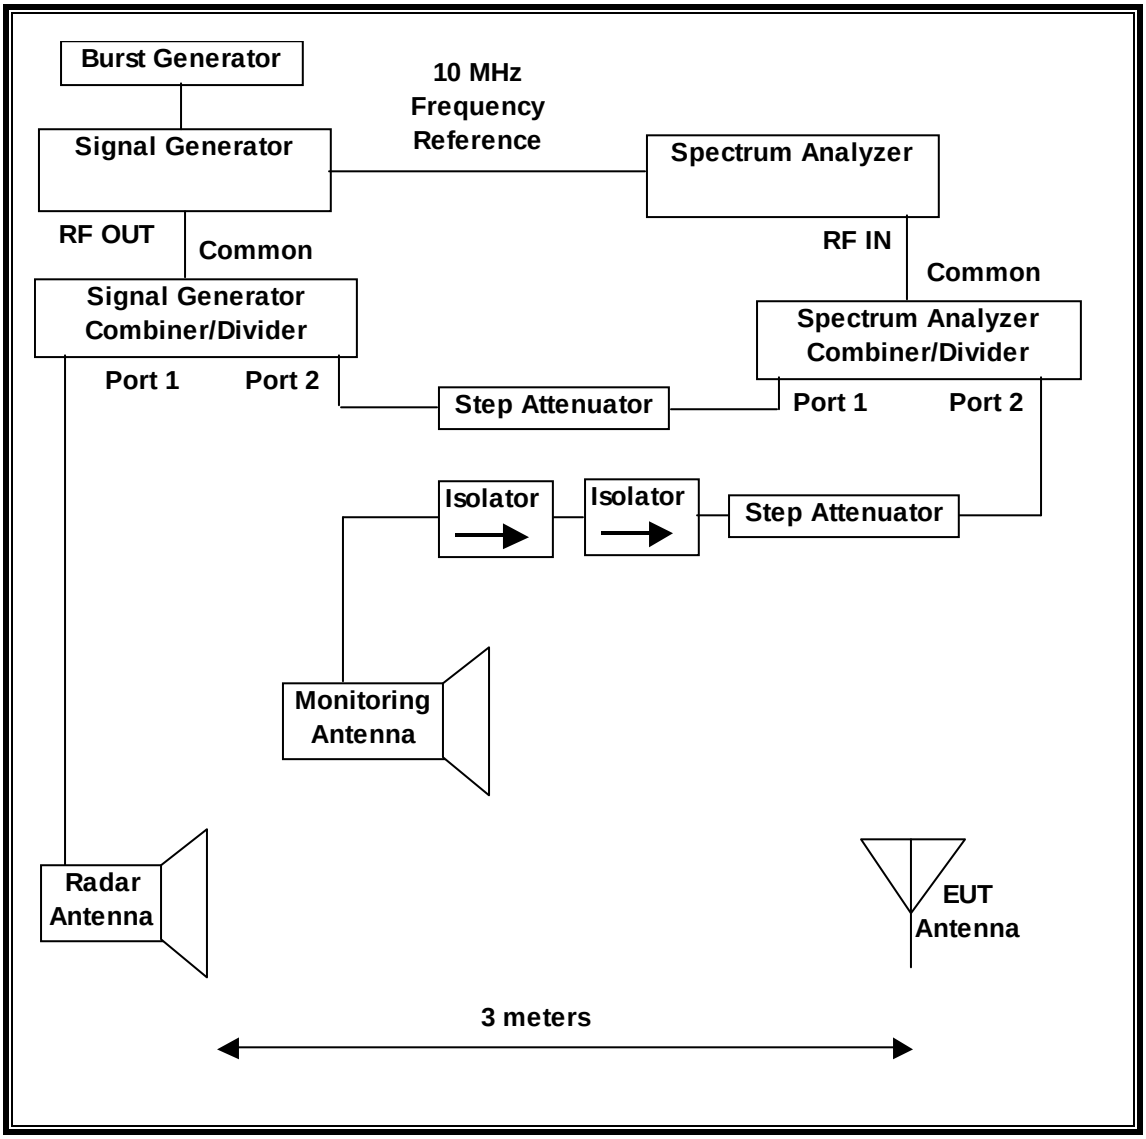

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Iperf is utilyzed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Serial Number**	**Cal Due**
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	US51350187	06/22/18
Signal Generator, MXG X-Series RF Vector	Agilent	N5182B	MY51350337	04/21/18

6.1.3. TEST AND MEASUREMENT SOFTWARE

The following test and measurement software was utilized for the tests documented in this report:

TEST SOFTWARE LIST		
Name	**Version**	**Test / Function**
Aggregate Time-PXA	3.0	Channel Loading and Aggregate Closing Time
PXA Read	3.0.0.9	Signal Generator Screen Capture
SGXProject.exe	1.7	Radar Waveform Generation and Download

6.1.4. TEST ROOM ENVIRONMENT

The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

ENVIRONMENT CONDITION

Parameter	Value
Temperature	26.2 °C
Humidity	37 %

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.1.5. SETUP OF EUT

RADIATED METHOD EUT TEST SETUP

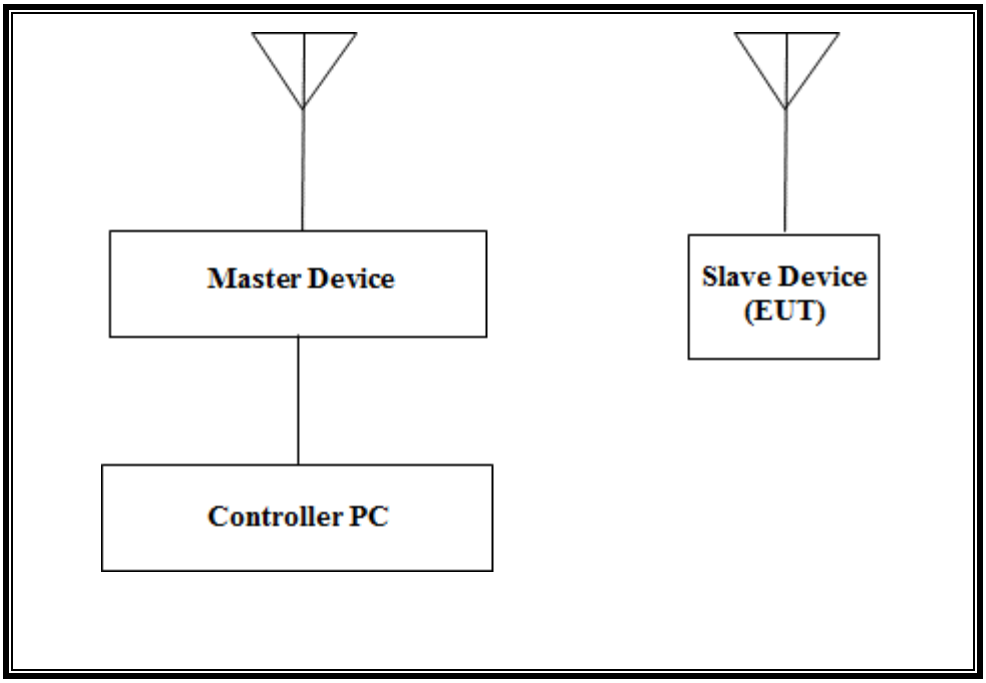

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Serial Number**	**FCC ID**
802.11ac Dual Band Wireless Access Point (Master Device)	Cisco	AIR-CAP3702E-A-K9	FTX181570A6	LDK102087
P.O.E. Injector (Master AP)	Phihong	POE30U-560(G)	PHI170102N2	DoC
Notebook PC (Controller)	Lenovo	Type 4236-B92	PB-HEX04 12/05	DoC
AC Adapter (Controller PC)	Lenovo	42T4418	11S42T4418Z1ZGWG08R 90M	DoC

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.1.6. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 12.1 dBm EIRP in the 5250-5350 MHz band and 11.14 dBm EIRP in the 5470-5725 MHz band.

Two antenna assemblies utilized with the EUT have a gain of -2.1 dBi & -4.3 dBi in the 5250-5350 MHz band and -0.8 dBi & -5.4 dBi in the 5470-5725 MHz band.

Two antennas are utilized to meet the diversity and MIMO operational requirements.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is –64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is –64 + 1 = -63 dBm.

The calibrated radiated DFS Detection Threshold level is set to –64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses two transmitter/receiver chains, each connected to an antenna to perform radiated tests.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the Master Device to the Slave Device using iPerf version 2.0.5 software package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the EUT is Android Version 8.0.0 build: 51.1.A.0.271.

The software installed in the access point is version AP3G2-K9W7-M Version 15.3(3)JAB.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

UNIFORM CHANNEL SPREADING

This is requirement not applicable to Slave Devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID:LDK102087. The minimum antenna gain for the Master Device is 6 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is –64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is –64 + 1 = -63 dBm.

The calibrated radiated DFS Detection Threshold level is set to –64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.2. RESULTS FOR 20 MHz BANDWIDTH

6.2.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5500 MHz.

6.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

SHORT PULSE RADAR TYPE 0 AT MASTER

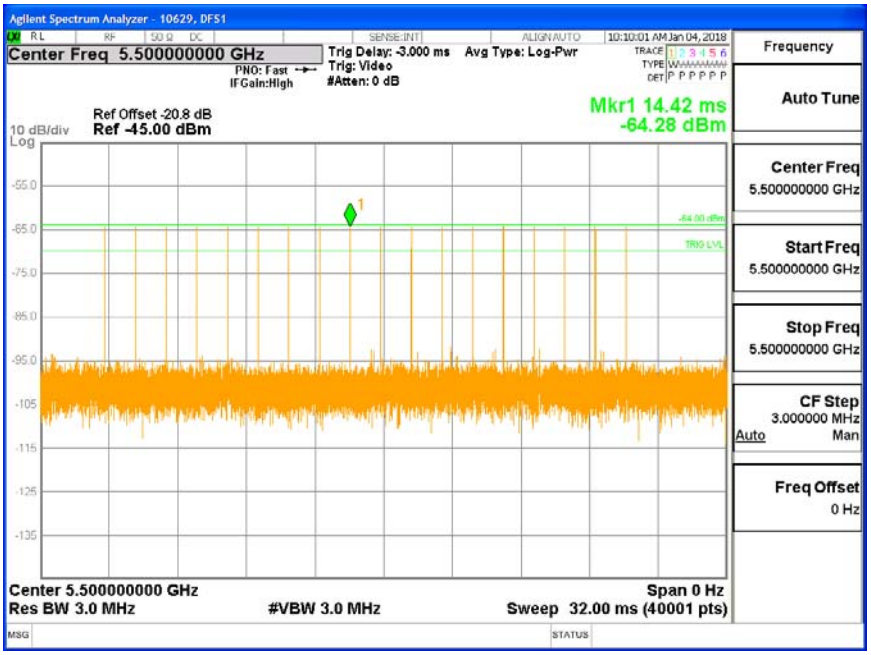

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

TRAFFIC

SLAVE TRAFFIC

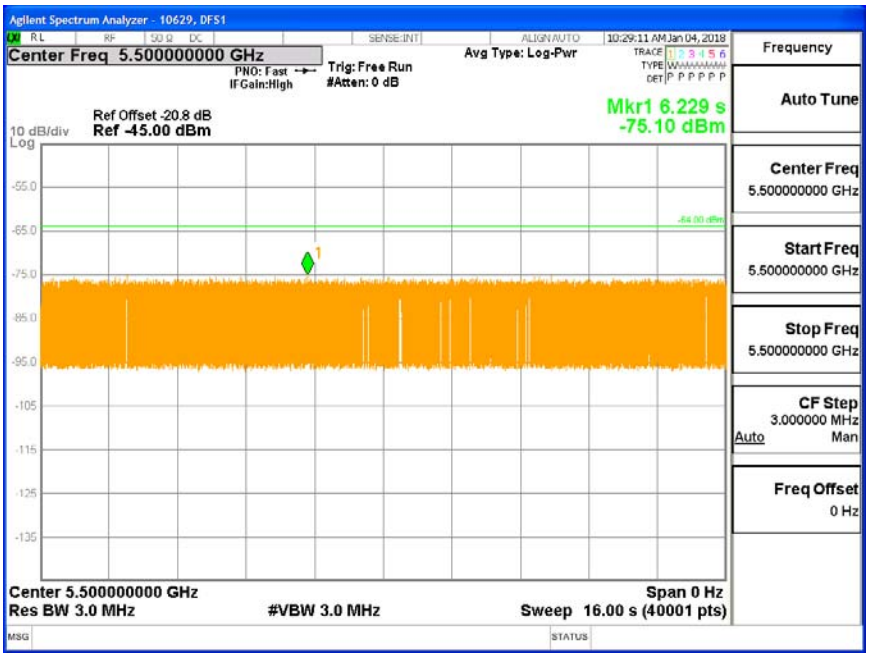

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL LOADING

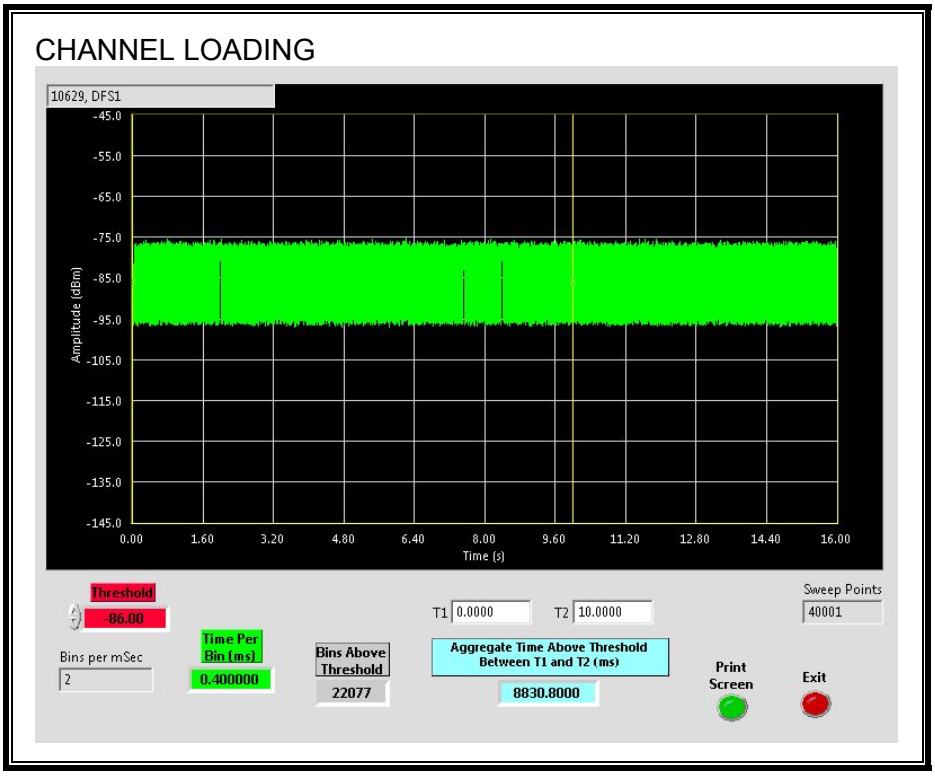

The level of traffic loading on the channel by the EUT is 88.308%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

6.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.089	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

MOVE TIME

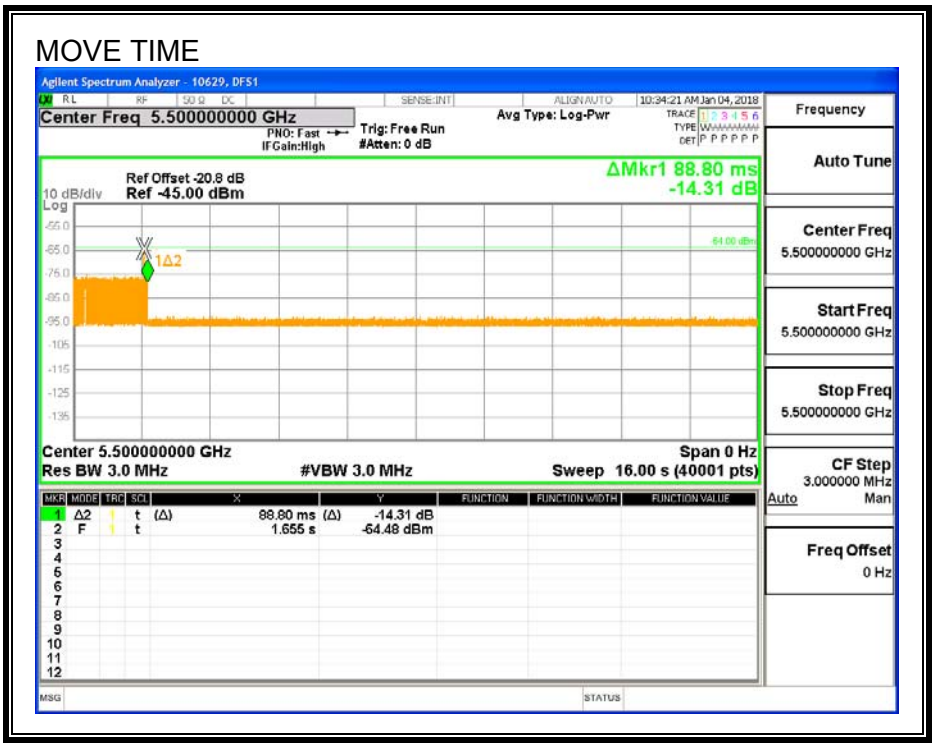

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL CLOSING TIME

CLOSING TIME

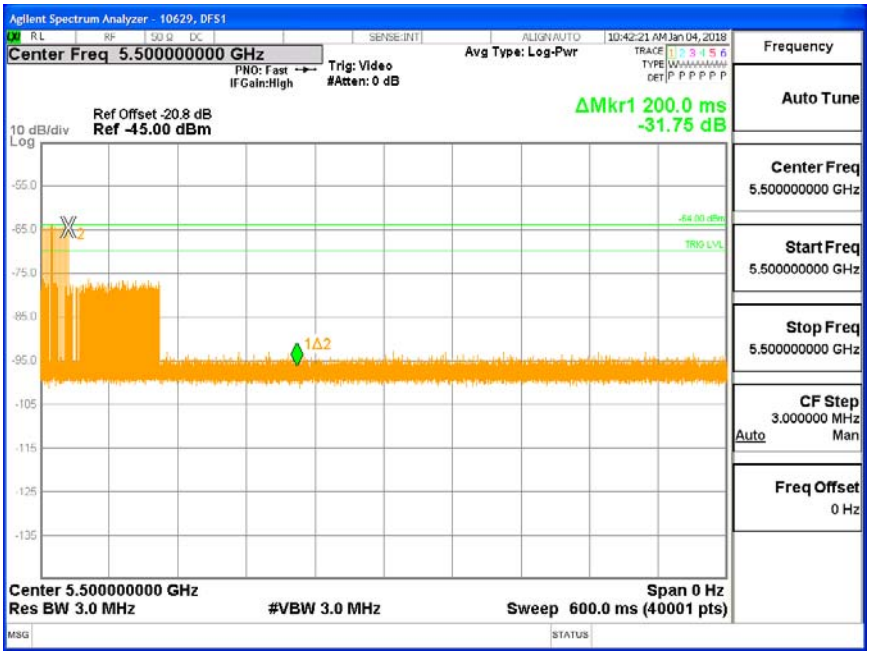

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

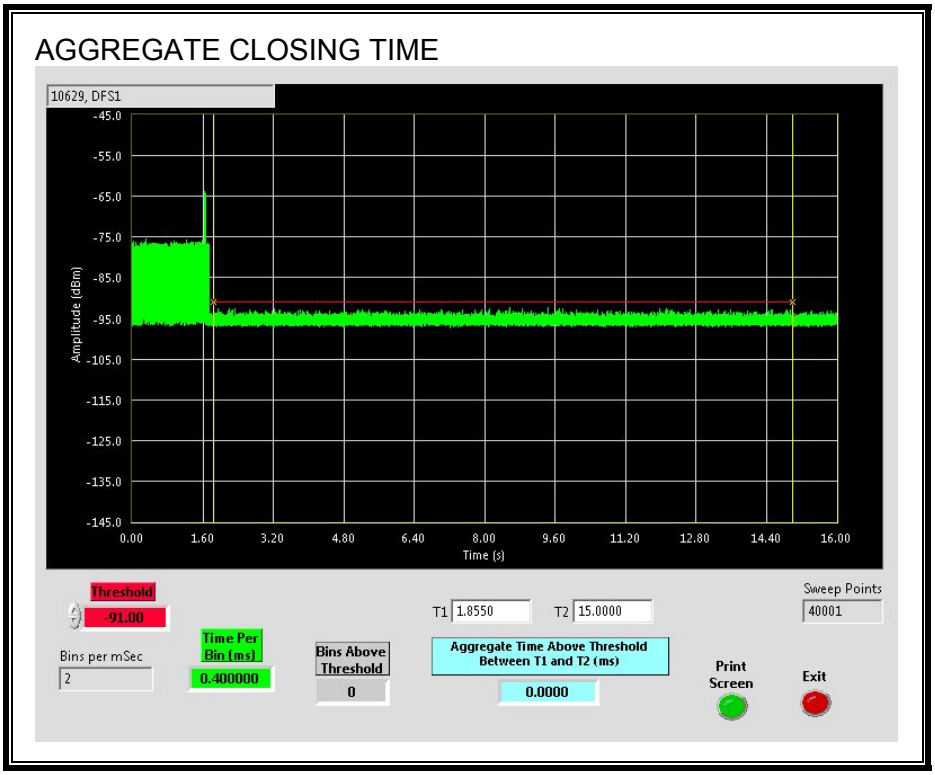

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.3. RESULTS FOR 40 MHz BANDWIDTH

6.3.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5510 MHz.

6.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

SHORT PULSE RADAR TYPE 0 AT MASTER

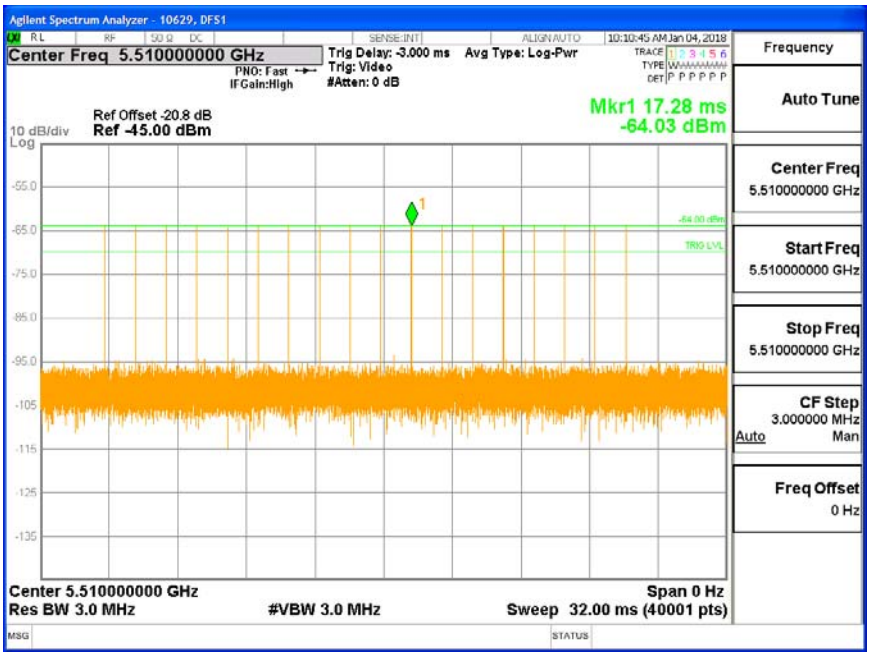

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

TRAFFIC

SLAVE TRAFFIC

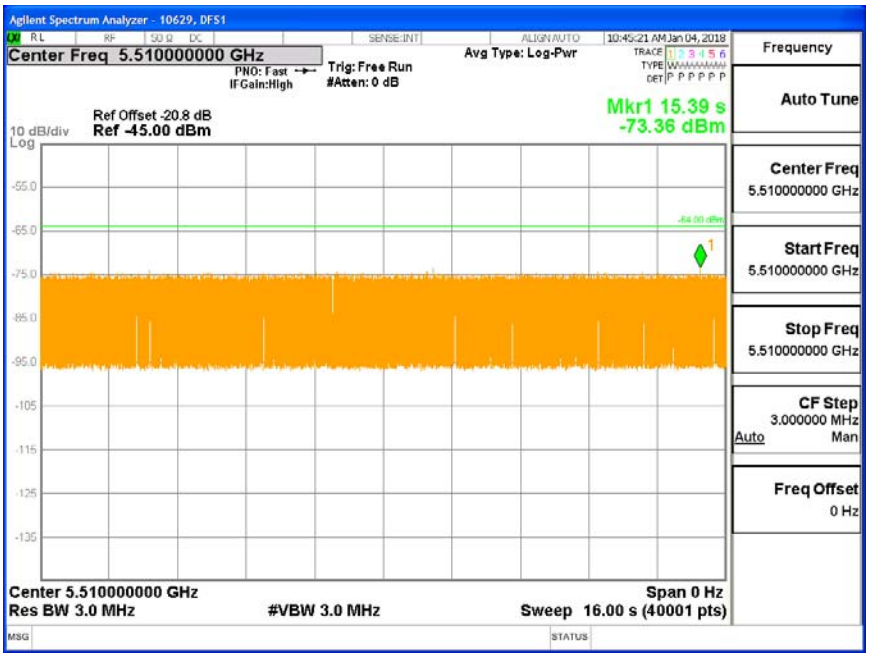

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL LOADING

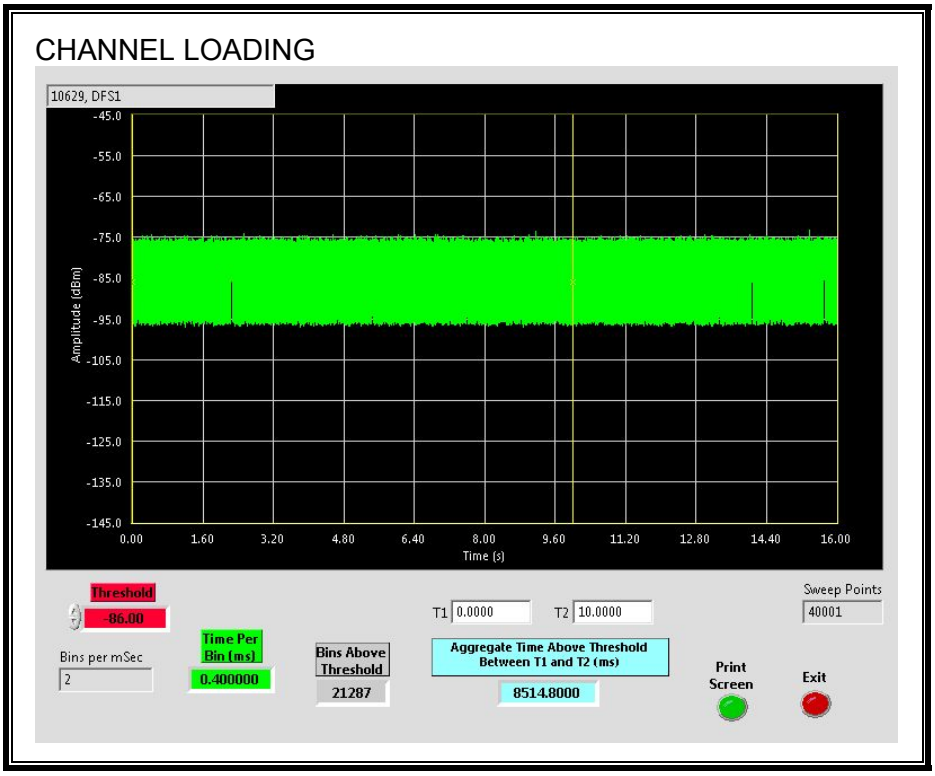

The level of traffic loading on the channel by the EUT is 85.148%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

6.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.060	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

MOVE TIME

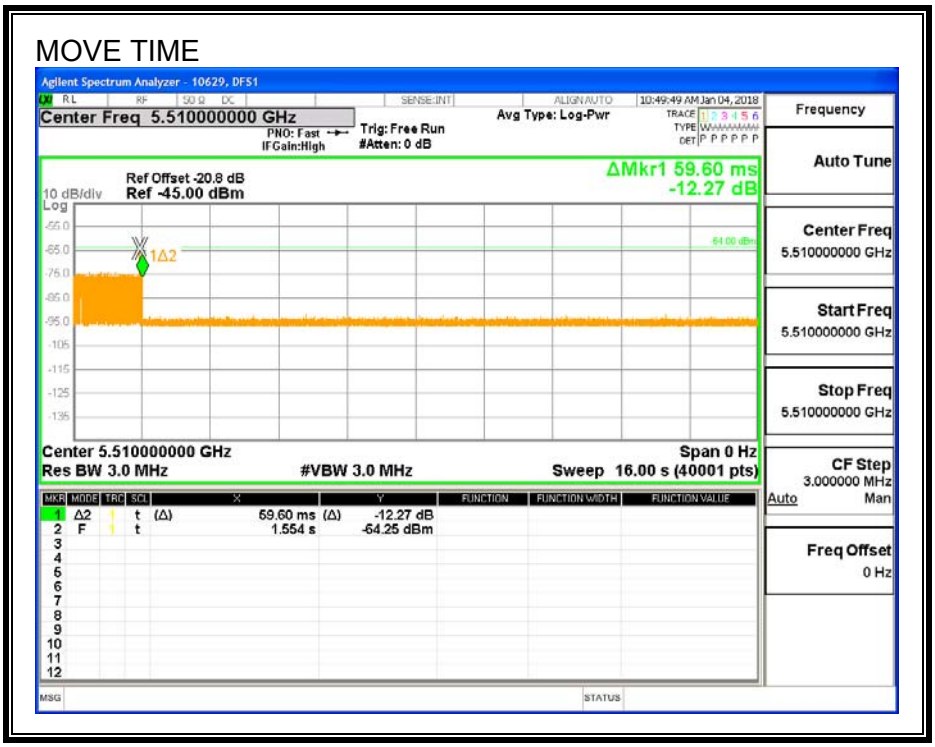

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL CLOSING TIME

CLOSING TIME

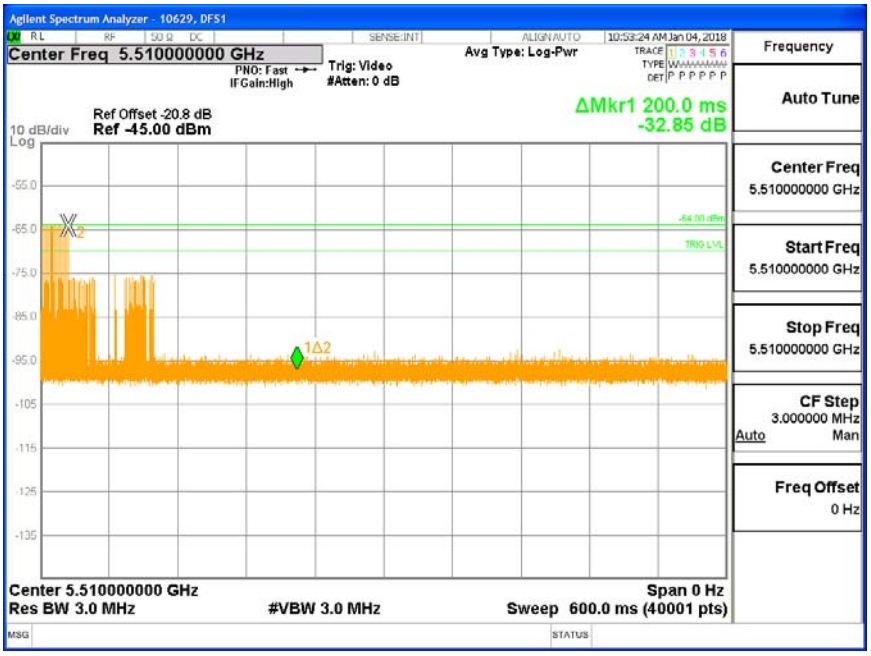

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

AGGREGATE CLOSING TIME

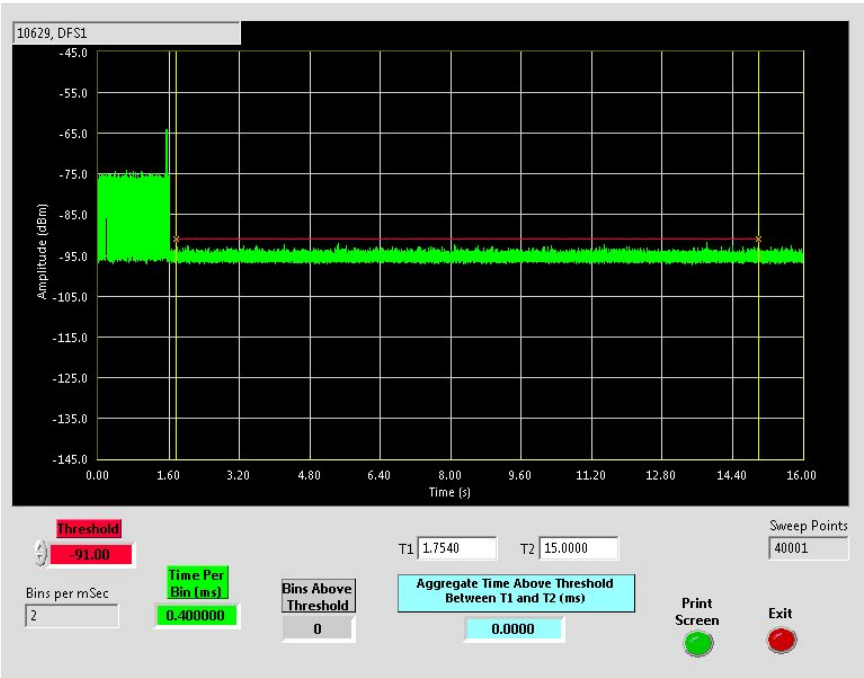

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.4. RESULTS FOR 80 MHz BANDWIDTH

6.4.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5530 MHz.

6.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

SHORT PULSE RADAR TYPE 0 AT MASTER

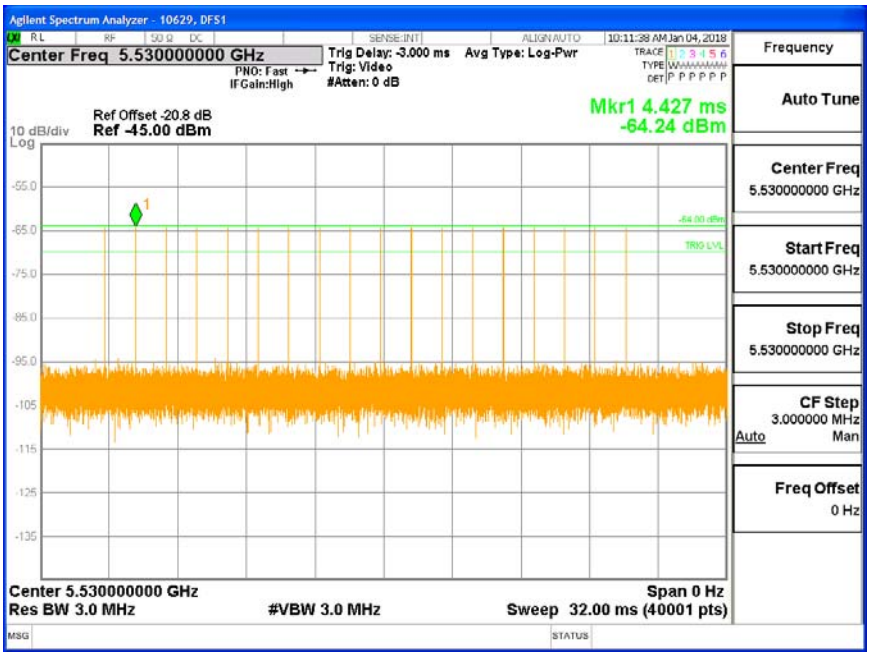

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

TRAFFIC

SLAVE TRAFFIC

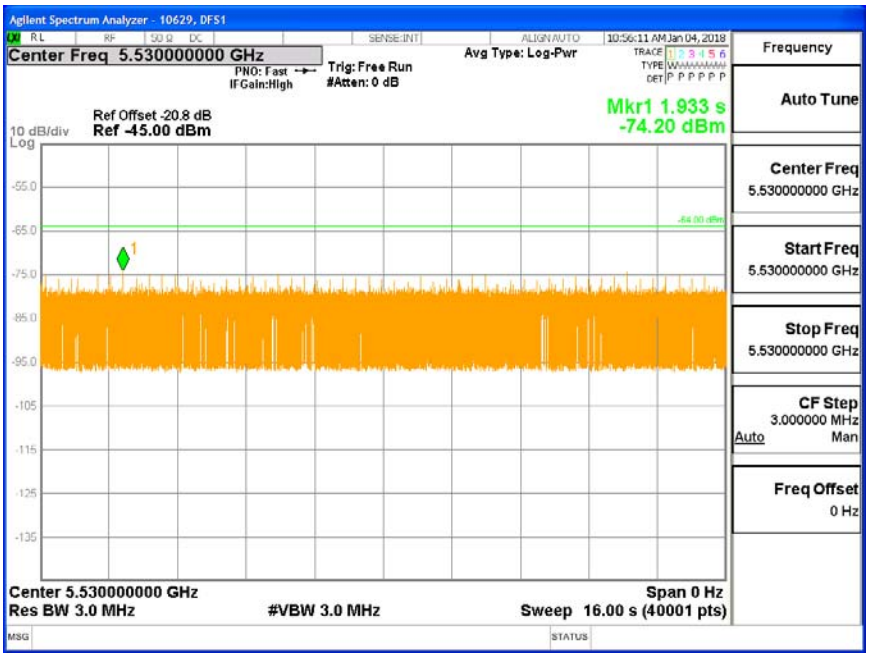

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL LOADING

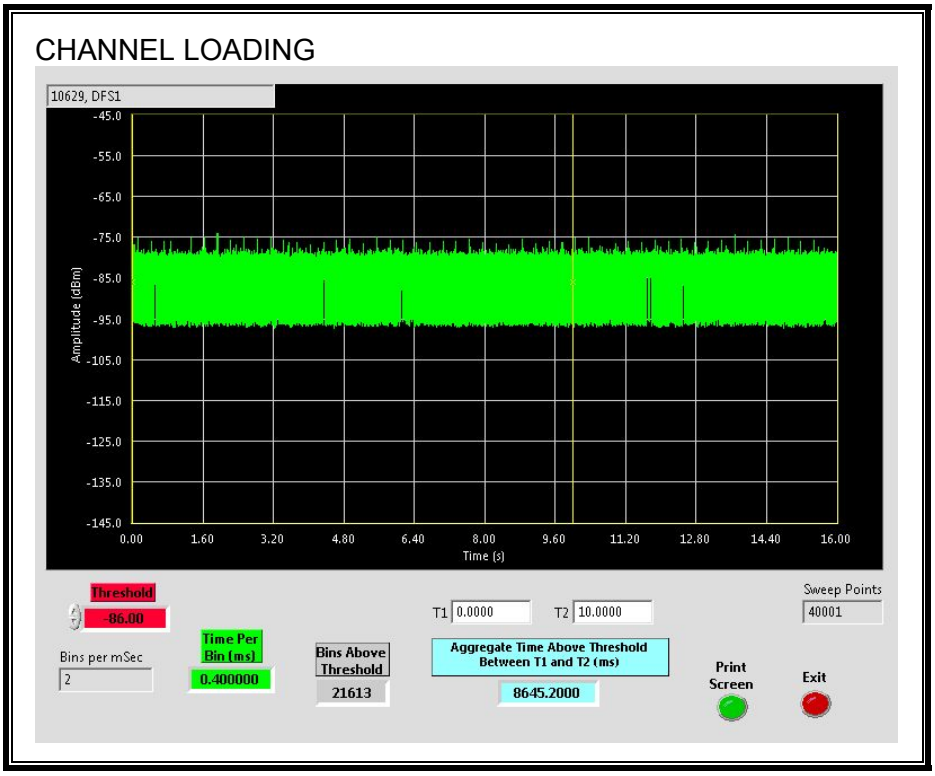

The level of traffic loading on the channel by the EUT is 86.452%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

6.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.071	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

MOVE TIME

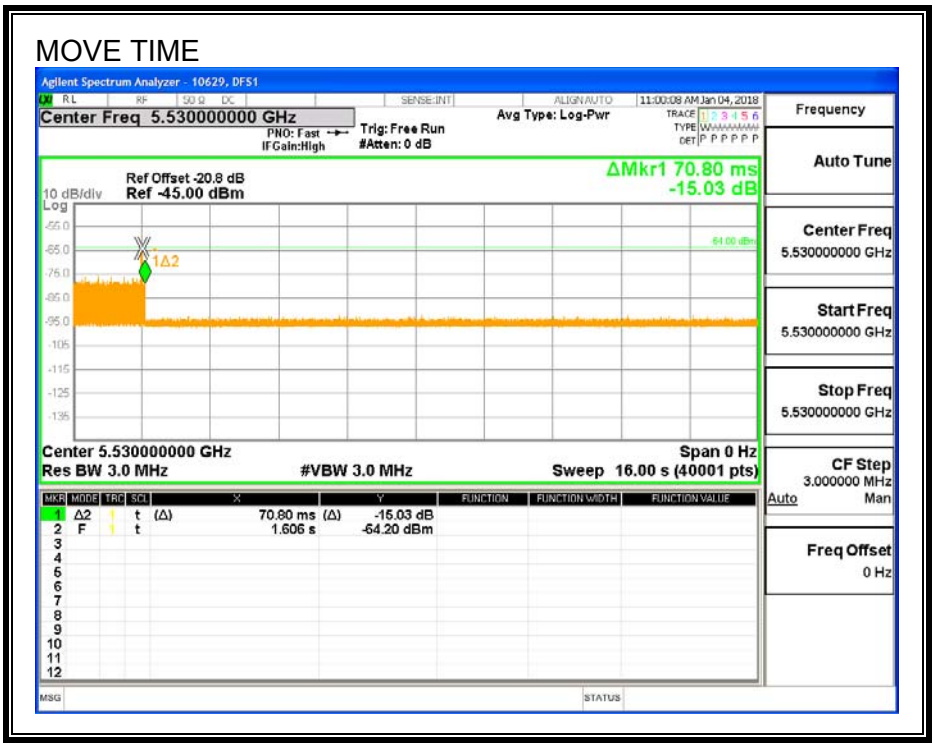

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

CHANNEL CLOSING TIME

CLOSING TIME

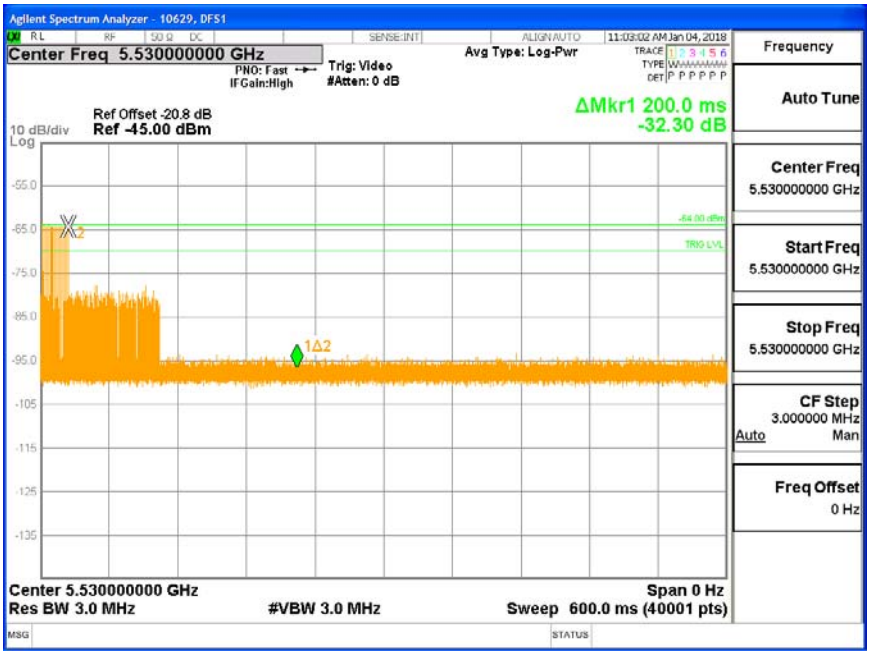

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

AGGREGATE CLOSING TIME

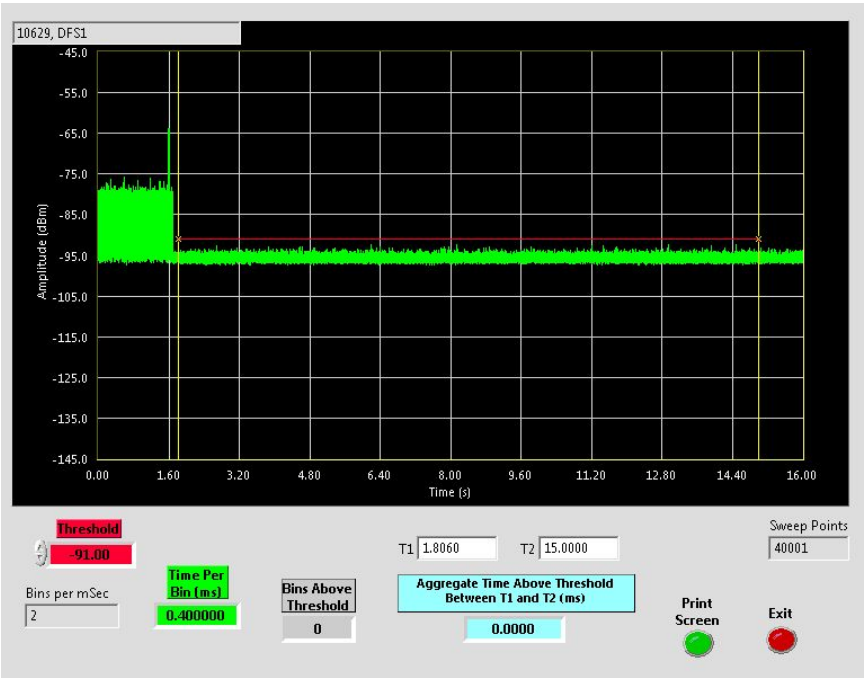

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .

6.4.5. 30-MINUTE NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

30-MINUTE NON-OCCUPANCY

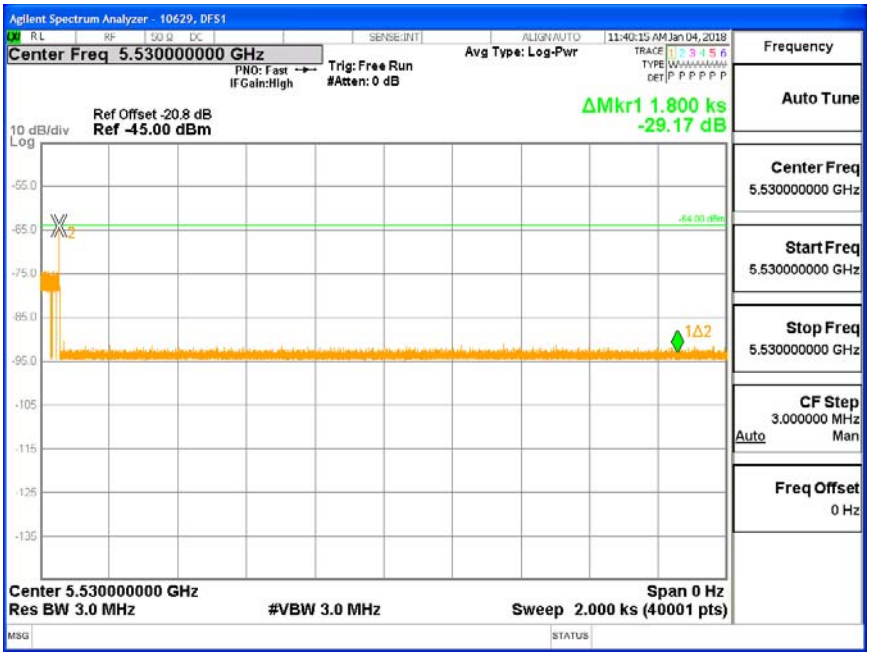

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc. .