



Test Report

Product Name : Wireless-B Ethernet Bridge

Model No.: WET11 v2

FCC ID.: Q87-WET11V2

Applicant : Cisco-Linksys, LLC

Address : 17401 Armstrong Ave. Irvine, CA 92614

Date of Receipt : Jul 21, 2003

Date of Test : Jul 25, 2003

Report No. : 037H060FI

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : Jul 25, 2003

Report No. : 037H060FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name : Wireless-B Ethernet Bridge

Applicant : Cisco-Linksys, LLC

Address : 17401 Armstrong Ave. Irvine, CA 92614

Manufacturer : CyberTAN Technology, Inc.

Model No. : WET11 v2

FCC ID. : Q87-WET11V2

Rated Voltage : AC 120V/60Hz

Trade Name : Cisco-Linksys, LLC

Measurement Standard : FCC Part 15 Subpart C Paragraph 15.247

Measurement Procedure : ANSI C63.4: 1992

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : 
(Lydia Tsai)

Tested By : 
(Kenny Jwo)

Approved By : 
(Kevin Wang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	10
2.4. Test Procedure	11
2.5. Test Result of Conducted Emission.....	12
3. Peak Power Output	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limits	14
3.4. Test Result of Peak Power Output.....	15
4. Radiated Emission.....	16
4.1. Test Equipment.....	16
4.2. Test Setup	16
4.3. Limits	17
4.4. Test Procedure	17
4.5. Test Result of Radiated Emission.....	18
5. Band Edge	24
5.1. Test Equipment.....	24
5.2. Test Setup	24
5.3. Limits	26
5.4. Test Procedure	26
5.5. Test Result of Band Edge	27
6. Occupied Bandwidth.....	30
6.1. Test Equipment.....	30
6.2. Test Setup	30
6.3. Limits	30
6.4. Test Result of Occupied Bandwidth	31
7. Power Density	32
7.1. Test Equipment.....	32
7.2. Test Setup	32
7.3. Limits	32
7.4. Test Result of Power Density	33
8. EMI Reduction Method During Compliance Testing	34

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : Wireless-B Ethernet Bridge
Trade Name : Cisco-Linksys, LLC
FCC ID. : Q87-WET11V2
Model No. : WET11 v2
Frequency Range : 2412MHz to 2462MHz
Channel Number : 11
Data Speed : 1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Type of Modulation : Direct Sequence Spread Spectrum
Antenna Type : Connector (Reverse SMA)
Antenna Gain : 4dBi
Channel Control : Auto
Power Adapter : Cisco-Linksys, LLC, AD1605CF
Cable Out: Non-shielded, 1.7m

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2412 MHz	Channel 5:	2432 MHz	Channel 9:	2452 MHz
Channel 2:	2417 MHz	Channel 6:	2437 MHz	Channel 10:	2457 MHz
Channel 3:	2422 MHz	Channel 7:	2442 MHz	Channel 11:	2462 MHz
Channel 4:	2427 MHz	Channel 8:	2447 MHz		

Note:

1. This device is a 2.4GHz Wireless-B Ethernet Bridge included a 2.4GHz receiving function, a 2.4GHz transmitting function.
2. Regards to the frequency band operation; the highest rate that was included the lowest 、 middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. This device is a composite device in accordance with Part 15 regulations. The function receiving was measured and made a test report that the report number is 037H060F under Declaration of Conformity.

1.2. Operational Description

EUT is a Wireless-B Ethernet Bridge with 11 channels. This device provided four kind of transmitting speed 1,2,5.5 and 11Mbps. The device of RF carrier is DQPSK, DB PSK and CCK.

The device adapts direct sequence spread spectrum modulation. The Connector antenna was provides diversity function to improve the receiving function.

This Wireless-B Ethernet Bridge is an IEEE 802.11b Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direst Sequence Spread Spectrum (DSSS) radio transmission, the Wireless-B Ethernet Bridge transfers data at speeds up to 64/128-bit Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any 802.11b network.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	Access Point	Cyber TAN	AT-WA3404	N/A	Non-shielded, 1.8m
(2)	Notebook PC	DELL	Latitude 600	N/A	Non-shielded, 1.7m, a ferrite core bonded
(3)	HUB	D-Link	DHS-3218	N/A	Non-shielded, 1.8m
(4)	Notebook PC	DELL	Latitude 600	N/A	Non-shielded, 1.7m, a ferrite core bonded

Signal Cable Type	Signal cable Description
A. LAN Cable	Non-shielded, 3.0m
B. LAN Cable	Non-shielded, 10m
C. LAN Cable	Non-shielded, 3.0m

1.4. Configuration of tested System

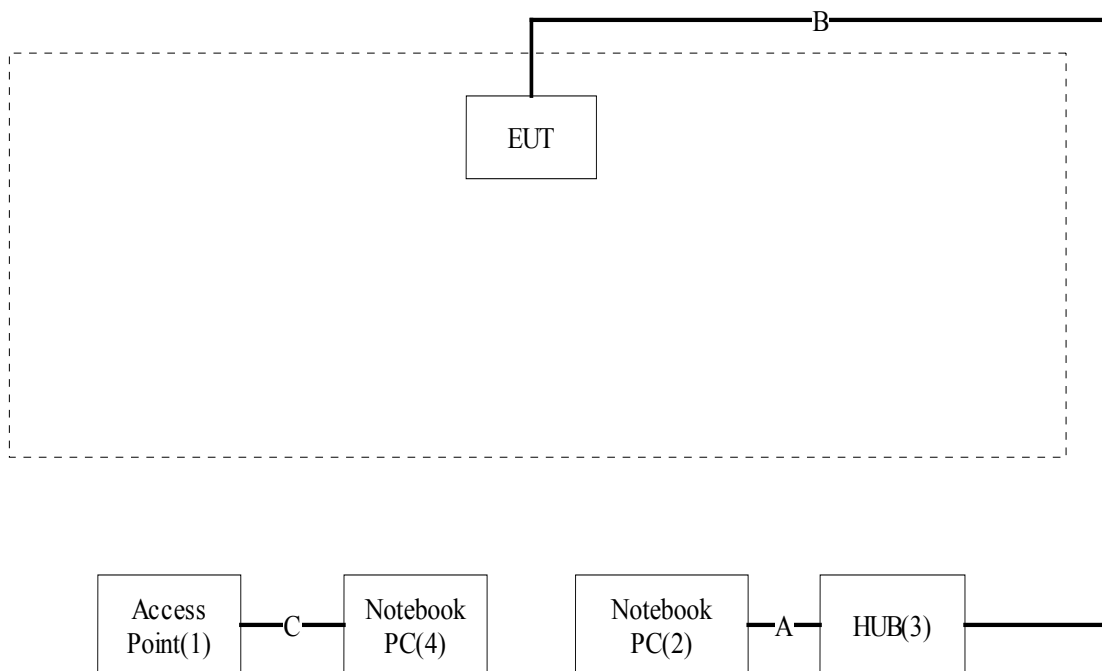

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.3.
- (2) Turn on the power of all equipment.
- (3) Boot the PC from Hard Disk.
- (4) Data will communicate between personal computer EUT.
- (5) The personal computer's monitor will show the transmitting and receiving characteristics when the communication is success.
- (6) Wireless LAN function was used to perform the wireless data transmission.
- (7) Repeat the above procedure (4) to (6).

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2
August 30, 2001 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwan, R.O.C.
TEL : 886-3-592-8858 / FAX : 886-3-592-8859
E-Mail: service@quietek.com

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30 / 825442/018	Aug., 2002	
2	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2003	Peripherals
3	L.I.S.N.	R & S	ESH3-Z5 / 825562/002	Feb., 2003	EUT
4	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2003	
5	No.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

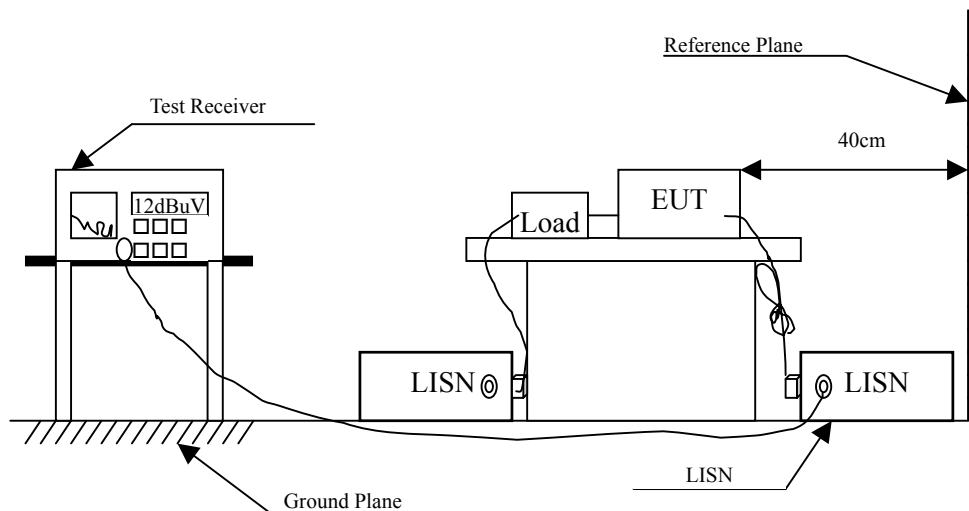

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result of Conducted Emission

Product : Wireless-B Ethernet Bridge
Test Item : Conducted Emission
Power Line : Line 1
Test Mode : Normal Operation

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.263	0.01	0.15	47.53	47.69	61.33
*0.525	0.02	0.22	42.24	42.48	56.00
0.790	0.02	0.26	38.75	39.03	56.00
1.052	0.04	0.28	36.81	37.14	56.00
3.682	0.24	0.40	36.33	36.97	56.00
11.903	-0.03	0.51	24.77	25.25	60.00
Average					
0.263	0.01	0.15	37.50	37.66	51.34
0.525	0.02	0.22	41.30	41.54	46.00
0.790	0.02	0.26	37.70	37.98	46.00
1.052	0.04	0.28	36.00	36.33	46.00
3.682	0.24	0.40	30.20	30.84	46.00
11.903	-0.03	0.51	19.90	20.38	50.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Wireless-B Ethernet Bridge
Test Item : Conducted Emission
Power Line : Line 2
Test Mode : Normal Operation

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
*0.263	0.01	0.15	42.87	43.03	61.33
0.787	0.02	0.26	36.41	36.69	56.00
1.051	0.04	0.28	37.27	37.60	56.00
1.843	0.09	0.34	40.28	40.70	56.00
3.684	0.24	0.40	36.39	37.03	56.00
7.620	0.26	0.47	21.77	22.50	60.00
Average					
0.263	0.01	0.15	37.70	37.86	51.34
0.787	0.02	0.26	33.60	33.88	46.00
1.051	0.04	0.28	34.80	35.13	46.00
1.843	0.09	0.34	33.60	34.02	46.00
3.684	0.24	0.40	29.60	30.24	46.00
7.620	0.26	0.47	12.60	13.33	50.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

3. Peak Power Output

3.1. Test Equipment


The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			Sep., 2002	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

3.2. Test Setup

Conduction Power Measurement

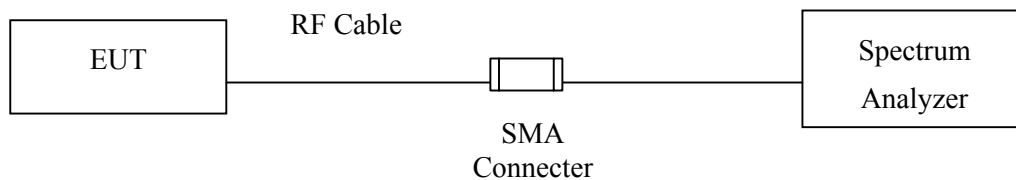

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Result of Peak Power Output

Product : Wireless-B Ethernet Bridge
 Test Item : Peak Power Output
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2412.00	17.49dBm	1 Watt= 30 dBm	Pass
6	2437.00	18.00dBm	1 Watt= 30 dBm	Pass
11	2462.00	17.70dBm	1 Watt= 30 dBm	Pass

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °

4. Radiated Emission


4.1. Test Equipment

The following test equipment are used during the test:

Item		Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
1	X	Test Receiver	R & S	ESCS 30 / 825442/017	Jan., 2003
2	X	Spectrum Analyzer	Advantest	R3261C / 81720266	N/A
3	X	Pre-Amplifier	HP	8447D / 2944A09276	N/A
4	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2002
5	X	Spectrum Analyzer	R & S	FSP40 / 100005	Aug., 2002
6	X	Pre-Amplifier	HP	8449B / 3008A01123	Feb., 2003
7	X	Horn Antenna	Schwarzbeck	BBHA 9120D / BBHA9120D312	Sep., 2002
8		No.1 OATS			Sep., 2002

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

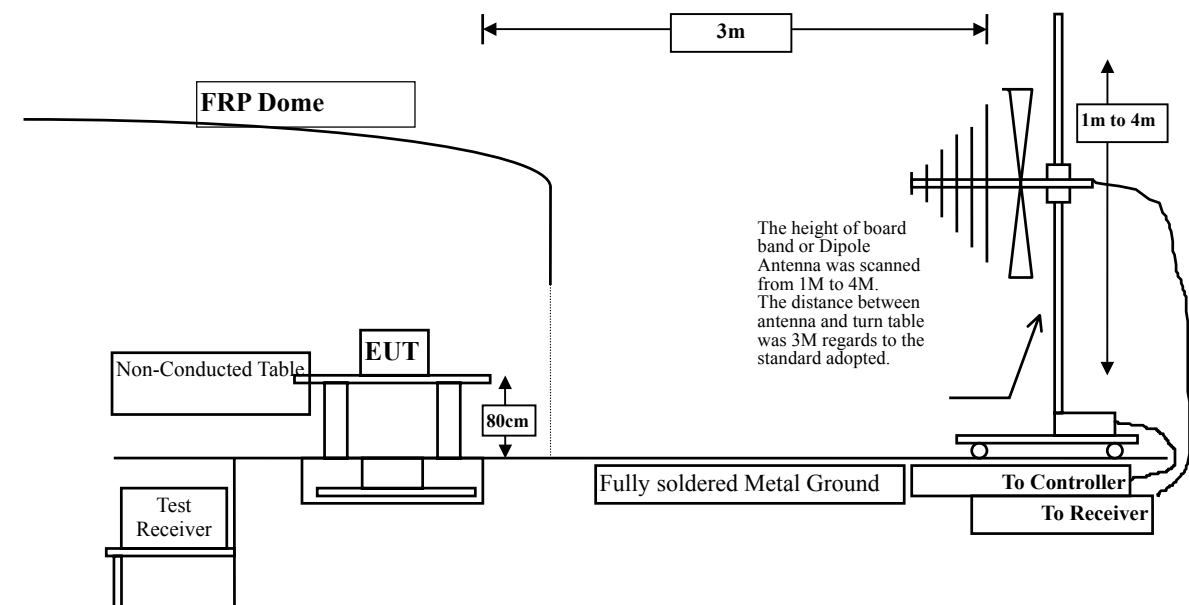

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Test Result of Radiated Emission

Product : Wireless-B Ethernet Bridge
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 1

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.600	4.24	31.31	34.38	38.49	39.66	34.34	74.00
7235.600	5.63	36.54	34.94	40.80	48.03	25.97	74.00
9647.920	7.00	37.98	34.45	39.46	< 49.99	24.01	74.00
12060.32	8.39	38.59	33.23	39.05	< 52.80	21.20	74.00

Vertical

Peak Detector:

4823.800	4.24	31.31	34.38	40.62	41.79	32.21	74.00
7235.800	5.63	36.54	34.94	47.06	54.29	19.71	74.00
9647.720	7.00	37.98	34.45	40.54	51.07	22.93	74.00
12059.72	8.39	38.59	33.23	39.39	< 53.14	20.86	74.00
14472.20	9.77	41.87	34.96	35.94	< 52.63	21.37	74.00

Average Detector:

7240.100	5.63	36.54	34.94	42.07	49.30	4.70	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless-B Ethernet Bridge
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	4.27	31.37	34.37	36.99	38.27	35.73	74.00
7311.000	5.67	36.57	34.97	42.38	49.64	24.36	74.00
9748.200	7.07	38.13	34.31	39.21	< 50.10	23.90	74.00
12185.20	8.47	38.51	33.31	38.00	< 51.66	22.34	74.00

Vertical

Peak Detector:

4874.200	4.27	31.37	34.37	37.81	39.09	34.91	74.00
7310.600	5.67	36.57	34.97	48.12	55.38	18.62	74.00
9748.100	7.07	38.13	34.31	41.70	52.59	21.41	74.00
12185.00	8.47	38.51	33.31	38.92	< 52.58	21.42	74.00
14622.20	9.87	41.43	35.02	36.13	< 52.41	21.59	74.00

Average Detector:

7308.600	5.67	36.56	34.97	39.85	47.11	6.89	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless-B Ethernet Bridge
Test Item : Harmonic Radiated Emission
Test Site : No.1 OATS
Test Mode : Channel 11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4924.600	4.30	31.43	34.36	37.61	38.98	35.02	74.00
7384.800	5.72	36.58	35.02	39.78	47.07	26.93	74.00
9848.000	7.13	38.17	34.18	39.86	< 50.98	23.02	74.00
12310.30	8.53	38.43	33.39	39.02	< 52.60	21.40	74.00

Vertical

Peak Detector:

4923.800	4.30	31.43	34.36	41.97	43.34	30.66	74.00
7385.800	5.72	36.58	35.02	47.43	54.72	19.28	74.00
9847.900	7.13	38.17	34.18	42.02	53.14	20.86	74.00
12309.90	8.53	38.43	33.39	38.33	< 51.91	22.09	74.00
14772.10	9.95	40.96	35.07	37.30	< 53.14	20.86	74.00

Average Detector:

7383.700	5.72	36.58	35.02	38.49	45.78	8.22	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless-B Ethernet Bridge
Test Item : General Radiated Emission
Test Site : No.1 OATS
Test Mode : Channel 1

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

*49.400	1.10	3.83	22.60	41.20	23.52	16.48	40.00
108.570	1.34	7.19	22.60	40.00	25.93	17.57	43.50
189.080	1.67	9.31	22.60	37.80	26.18	17.32	43.50
249.220	1.92	9.21	22.60	37.20	25.73	20.27	46.00
385.990	2.48	16.22	22.60	31.00	27.10	18.90	46.00
433.520	2.67	15.14	22.60	32.60	27.81	18.19	46.00

Vertical

64.920	1.16	9.57	22.60	45.40	33.53	6.47	40.00
*89.170	1.26	13.43	22.60	45.40	37.49	6.01	43.50
127.970	1.42	12.45	22.60	42.80	34.07	9.43	43.50
168.710	1.59	19.74	22.60	38.00	36.73	6.77	43.50
227.880	1.83	12.56	22.60	42.60	34.39	11.61	46.00
248.250	1.91	12.49	22.60	39.40	31.20	14.80	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss-PreAMP.

Product : Wireless-B Ethernet Bridge
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

49.400	1.10	3.83	22.60	42.80	25.12	14.88	40.00
127.970	1.42	7.22	22.60	36.20	22.24	21.26	43.50
159.980	1.55	9.60	22.60	36.60	25.15	18.35	43.50
*193.930	1.69	9.30	22.60	42.40	30.78	12.72	43.50
248.250	1.91	9.08	22.60	35.40	23.80	22.20	46.00
310.330	2.17	13.92	22.60	32.00	25.49	20.51	46.00

Vertical

49.400	1.10	11.64	22.60	43.80	33.94	6.06	40.00
*62.980	1.15	9.68	22.60	47.20	35.43	4.57	40.00
108.570	1.34	13.53	22.60	42.80	35.07	8.43	43.50
163.860	1.57	20.80	22.60	37.40	37.16	6.34	43.50
190.050	1.67	18.56	22.60	38.60	36.23	7.27	43.50
228.850	1.83	12.44	22.60	42.20	33.87	12.13	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss-PreAMP.

Product : Wireless-B Ethernet Bridge
Test Item : General Radiated Emission
Test Site : No.1 OATS
Test Mode : Channel 11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

*108.570	1.34	7.19	22.60	44.80	30.73	12.77	43.50
145.430	1.49	8.80	22.60	42.00	29.69	13.81	43.50
188.110	1.66	9.32	22.60	38.40	26.78	16.72	43.50
385.020	2.48	16.12	22.60	31.40	27.40	18.60	46.00
434.490	2.68	15.13	22.60	32.80	28.01	17.99	46.00
536.340	3.10	21.71	22.60	27.20	29.41	16.59	46.00

Vertical

76.560	1.21	10.09	22.60	45.60	34.30	5.70	40.00
108.570	1.34	13.53	22.60	46.00	38.27	5.23	43.50
160.950	1.56	19.89	22.60	36.80	35.64	7.86	43.50
*189.080	1.67	18.48	22.60	41.00	38.55	4.95	43.50
228.850	1.83	12.44	22.60	44.00	35.67	10.33	46.00
327.790	2.24	16.03	22.60	34.40	30.07	15.93	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss-PreAMP.

5. Band Edge

5.1. Test Equipment

The following test equipment are used during the test:

RF Conducted Measurement:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			N/A	


RF Radiated Measurement:

Item		Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
1	X	Spectrum Analyzer	R & S	FSP40 / 100005	Aug., 2002
2	X	Pre-Amplifier	HP	8449B / 3008A01123	Feb., 2003
3		Loop Antenna	R & S	HFH2-Z2 / 833799/004	Sep., 2002
4		BiconiLog Antenna	Schwarzbeck	VULB 9166 / 1061	Sep., 2002
5		Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2002
6	X	Horn Antenna	Schwarzbeck	BBHA 9120D / BBHA9120D312	Sep., 2002
7		No.1 OATS			Sep., 2002


- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

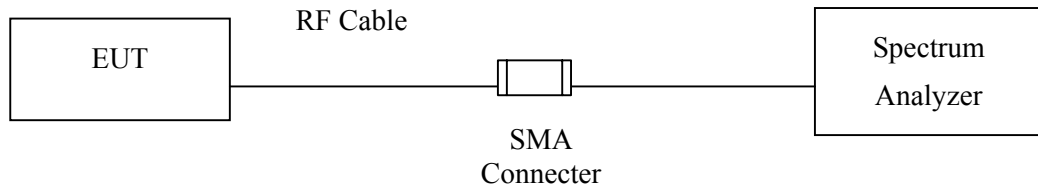

RF Radiated Measurement:

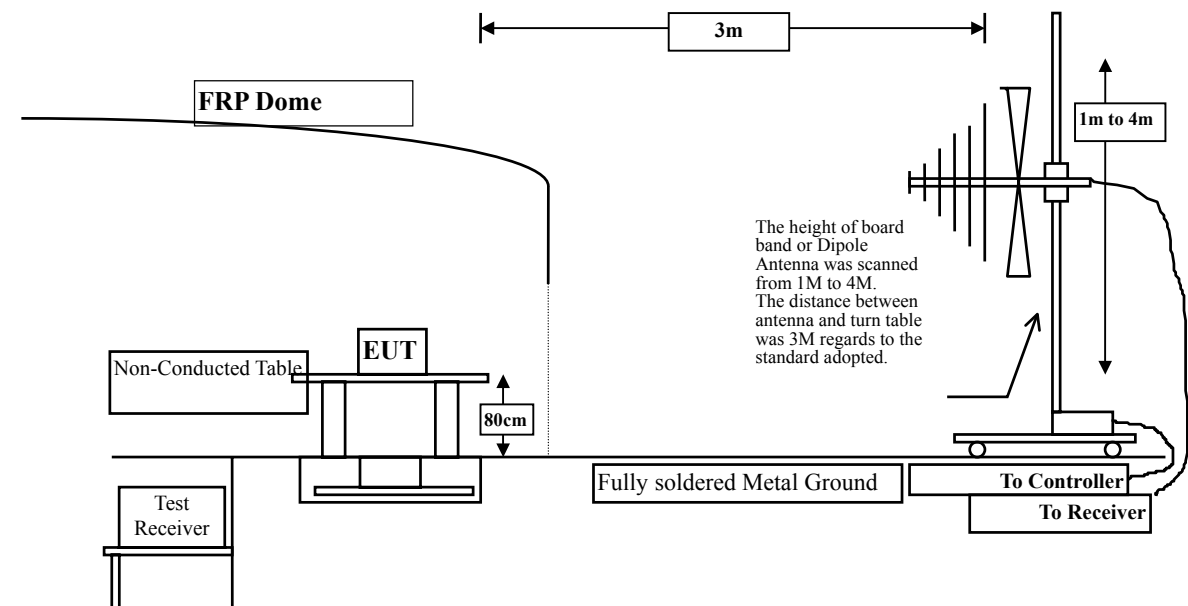

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

5.5. Test Result of Band Edge

Product : Wireless-B Ethernet Bridge
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 1

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


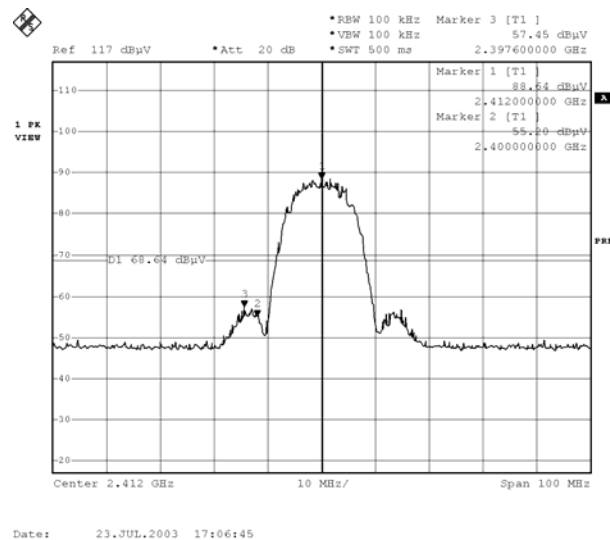


Figure Channel 1: (Vertical)

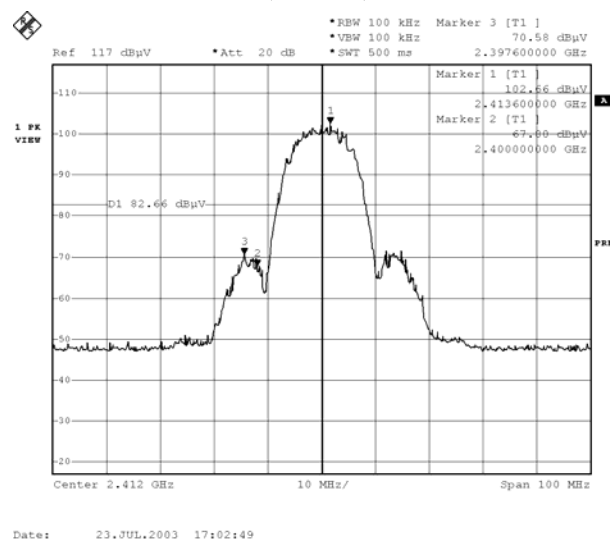

Product : Wireless-B Ethernet Bridge
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11

RF Radiated Measurement: (Peak Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2488.00	48.38	27.58	2.91	34.56	44.31	74	Pass
11 (Vertical)	2487.60	61.64	27.58	2.91	34.56	57.57	74	Pass

Figure Channel 11:


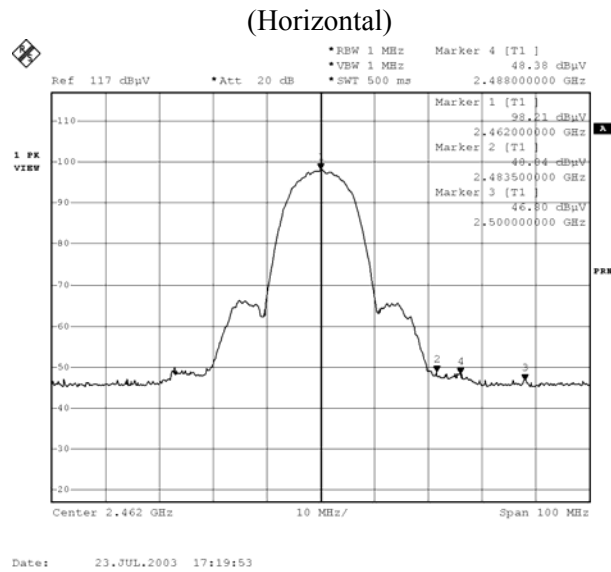


Figure Channel 11:

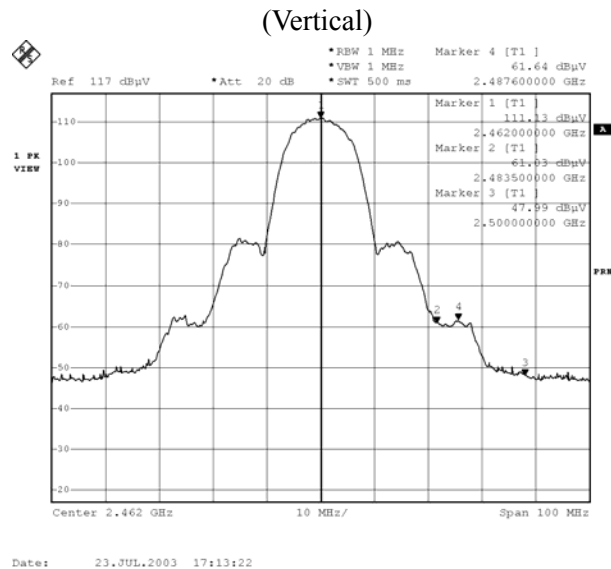


Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless-B Ethernet Bridge
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11

RF Radiated Measurement: (Average Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11 (Vertical)	2486.50	52.11	27.59	2.90	34.58	48.02	74	Pass

Figure Channel 11: (Vertical)

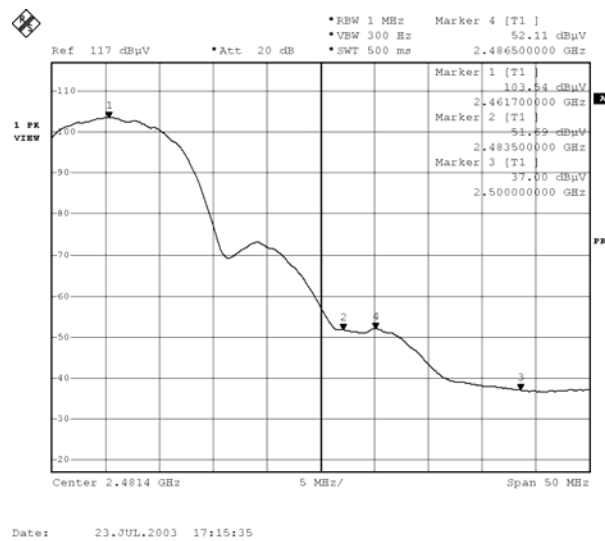

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

6. Occupied Bandwidth


6.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

6.2. Test Setup

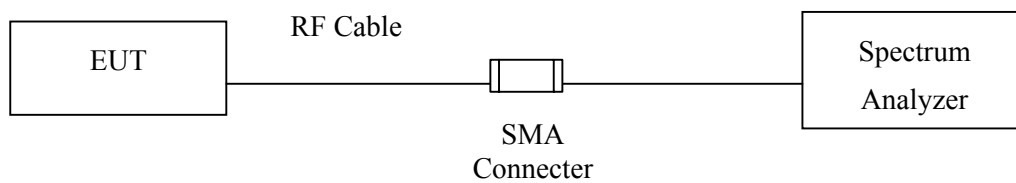

6.3. Limits


The minimum 6dB bandwidth shall be at least 500kHz.

6.4. Test Result of Occupied Bandwidth

Product : Wireless-B Ethernet Bridge
 Test Item : Occupied Bandwidth
 Test Site : No.1 OATS
 Test Mode : Normal Operation


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	11600	>500	Pass
6	2437.40	11400	>500	Pass
11	2462.60	11200	>500	Pass

Channel 1:

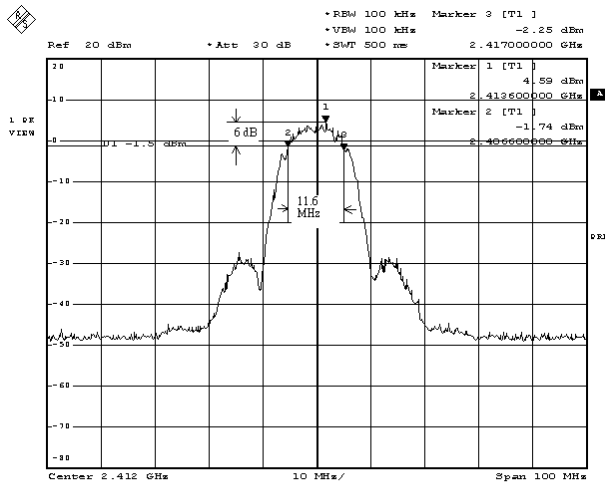


Date: 24.JUL.2003 16:00:42

Channel 6

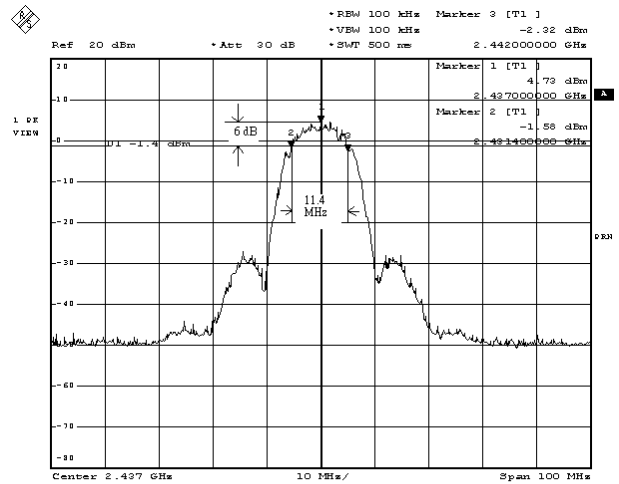

Date: 24.JUL.2003 16:18:50

Channel 11:

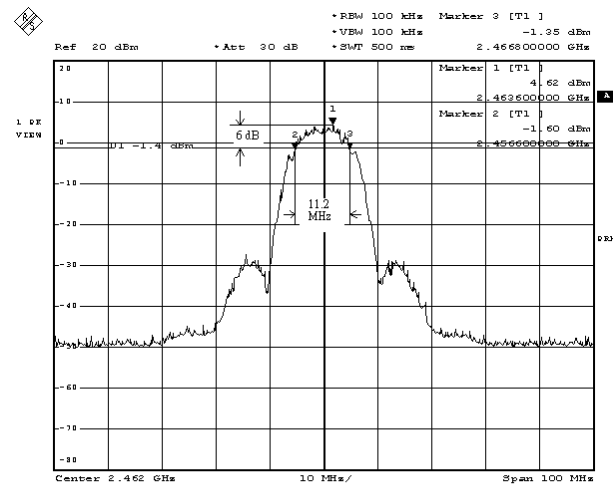

Date: 24.JUL.2003 16:21:00

7. Power Density


7.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

7.2. Test Setup

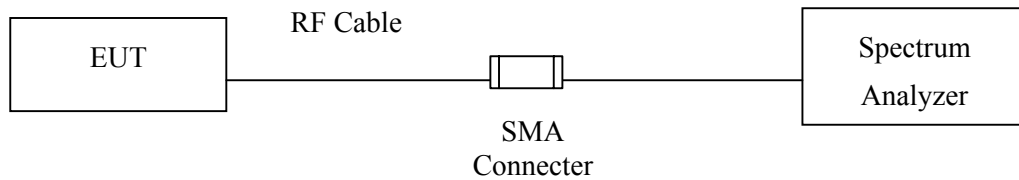

7.3. Limits


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.4. Test Result of Power Density

Product : Wireless-B Ethernet Bridge
 Test Item : Power Density
 Test Site : No.1 OATS
 Test Mode : Normal Operation


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1	2411.966	-10.05	< 8dBm	Pass
6	2436.962	-9.98	< 8dBm	Pass
11	2416.962	-9.86	< 8dBm	Pass

Channel 1:

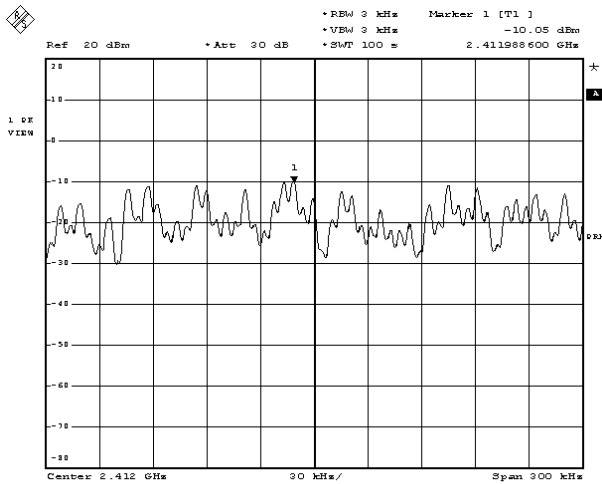


Date: 24.JUL.2009 16:27:21

Channel 6

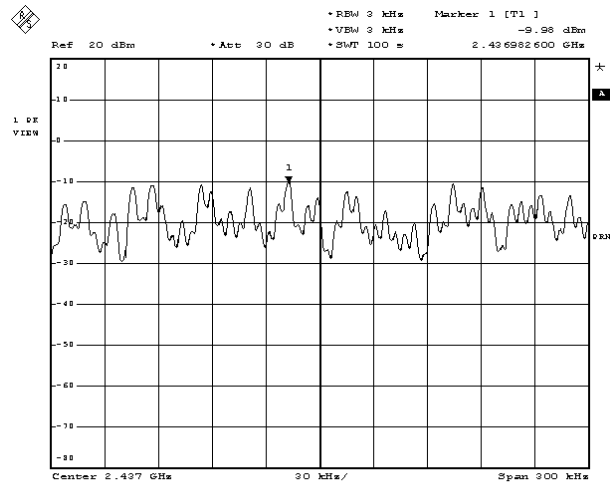

Date: 24.JUL.2009 16:30:21

Channel 11:

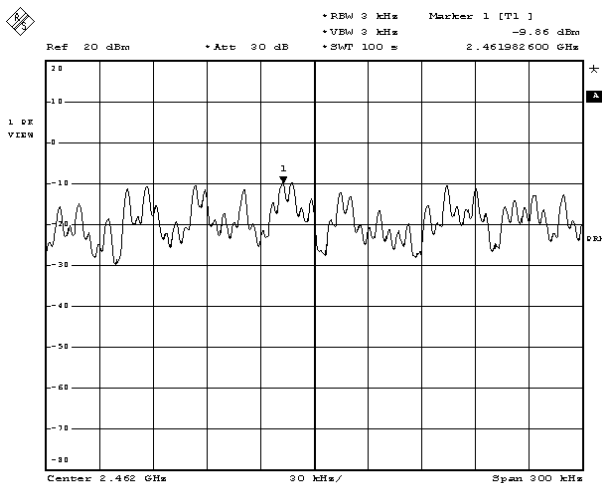

Date: 24.JUL.2009 16:33:09

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs