



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0745

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APIN0745

Trademark: 
Hewlett Packard
Enterprise

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Result: Complies

Received Date: 2025-07-21

Test Date: 2025-07-30 ~ 2025-08-25

Reviewed By:

Jame Yuan

Jame Yuan

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1034072-U202	V01	Initial Report	2025-10-10	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details	8
2. Test Configuration	9
2.1. Test Mode	9
2.2. Test System Connection Diagram	9
2.3. Test Software	9
2.4. Applied Standards	10
2.5. Test Environment Condition	10
3. Antenna Requirements	11
4. Measuring Instrument	12
5. Decision Rules and Measurement Uncertainty	13
5.1. Decision Rules	13
5.2. Measurement Uncertainty	13
6. Test Result	14
6.1. Summary	14
6.2. 6 dB Bandwidth Measurement	15
6.2.1. Test Limit	15
6.2.2. Test Procedure	15
6.2.3. Test Setting	15
6.2.4. Test Setup	15
6.2.5. Test Result	15
6.3. Output Power Measurement	16
6.3.1. Test Limit	16
6.3.2. Test Procedure	16
6.3.3. Test Setting	16
6.3.4. Test Setup	16
6.3.5. Test Result	16
6.4. Power Spectral Density Measurement	17
6.4.1. Test Limit	17

6.4.2.	Test Procedure	17
6.4.3.	Test Setting	17
6.4.4.	Test Setup	17
6.4.5.	Test Result	17
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	18
6.5.1.	Test Limit	18
6.5.2.	Test Procedure	18
6.5.3.	Test Setting	18
6.5.4.	Test Setup	18
6.5.5.	Test Result	19
6.6.	Radiated Spurious Emission Measurement.....	20
6.6.1.	Test Limit	20
6.6.2.	Test Procedure	20
6.6.3.	Test Setting	20
6.6.4.	Test Setup	22
6.6.5.	Test Result	23
6.7.	Radiated Restricted Band Edge Measurement	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	25
6.7.3.	Test Setting	25
6.7.4.	Test Setup	26
6.7.5.	Test Result	27
6.8.	AC Conducted Emissions Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Setup	28
6.8.3.	Test Result	28
Appendix A - Test Result.....		29
A.1	Duty Cycle Test Result	29
A.2	6 dB Bandwidth Test Result	30
A.3	Output Power Test Result	32
A.4	Power Spectral Density Test Result.....	34
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	36
A.6	Radiated Spurious Emission Test Result.....	40
A.7	Radiated Restricted Band Edge Test Result.....	52
A.8	AC Conducted Emissions Test Result	84
Appendix B - Test Setup Photograph		86
Appendix C - EUT Photograph		87

1.1. Applicant

6280 America Center Drive, San Jose CA 95002, United States

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

☒	Test Site - MRT Suzhou Laboratory	
	Laboratory Location (Suzhou - Wuzhong)	
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
	Laboratory Location (Suzhou - SIP)	
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
	Laboratory Location (Suzhou - Wujiang)	
Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China		
Laboratory Accreditations		
A2LA: 3628.01		CNAS: L10551
FCC: CN1166		ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory	
	Laboratory Location (Shenzhen)	
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
	Laboratory Accreditations	
	A2LA: 3628.02	
FCC: CN1284		ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory	
	Laboratory Location (Taiwan)	
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
	Laboratory Accreditations	
TAF: 3261		
FCC: 291082, TW3261		ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0745
Serial No.	CNTZMWR044 (Conducted) CNTZMWR057 (Radiated)
Software Version	7.2GA F.1.01 include Aruba MCU code
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	single mode, BLE only
Zigbee Specification	802.15.4
Antenna Specification	Refer to clause 1.7
Operating Temp.	0 ~ 40 °C
Power Type	PoE Input
Accessory	
PoE Injector	Model: PA-1600-86 Input: 100-240 V ~ 2.0 A, 50/60 Hz Output: 54.0 V = 1.11 A, 60.0 W
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	2400 ~ 2483.5 MHz
Channel Number	40
Type of Modulation	GFSK
Data Rate	1 Mbps & 2 Mbps

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)			
		Ant 1	Ant 2	Ant 3	Ant 4
BLE-H & ZigBee-H					
Dipole	2400 ~ 2483.5	--	--	--	5.6
BLE-V & ZigBee-V					
PIFA	2400 ~ 2483.5	--	--	5.0	--

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)				Uncorrelated Gain (dBi)	Correlated Gain (dBi)
		Ant 1	Ant 2	Ant 3	Ant 4		
Wi-Fi Antenna (2.4G 2Tx)							
Dipole	2400 ~ 2483.5	5.9	--	--	--	4.2	7.1
PIFA	2400 ~ 2483.5	--	4.7	--	--		
Wi-Fi Antenna (5G 4Tx)							
Dipole	5150 ~ 5850	5.6	--	--	5.8	4.2	7.2
PIFA	5150 ~ 5850	--	5.8	5.5	--		

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)				Uncorrelated Gain (dBi)	Correlated Gain (dBi)
		Ant 5	Ant 6	Ant 7	Ant 8		
Wi-Fi Antenna (6G 4Tx)							
Dipole	5925 ~ 7125	5.6	--	5.6	--	4.1	6.9
PIFA	5925 ~ 7125	--	5.5	--	5.9		

Notes:

1. The EUT supports Cyclic Delay Diversity (CDD) mode.
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.
3. For beamforming operation, Aruba OS automatically backs power down based on CDD power.
4. The detail calculation method of directional gain refers to antenna specification provided by the applicant.


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1 Mbps
Mode 2: Transmit by BLE-2 Mbps

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

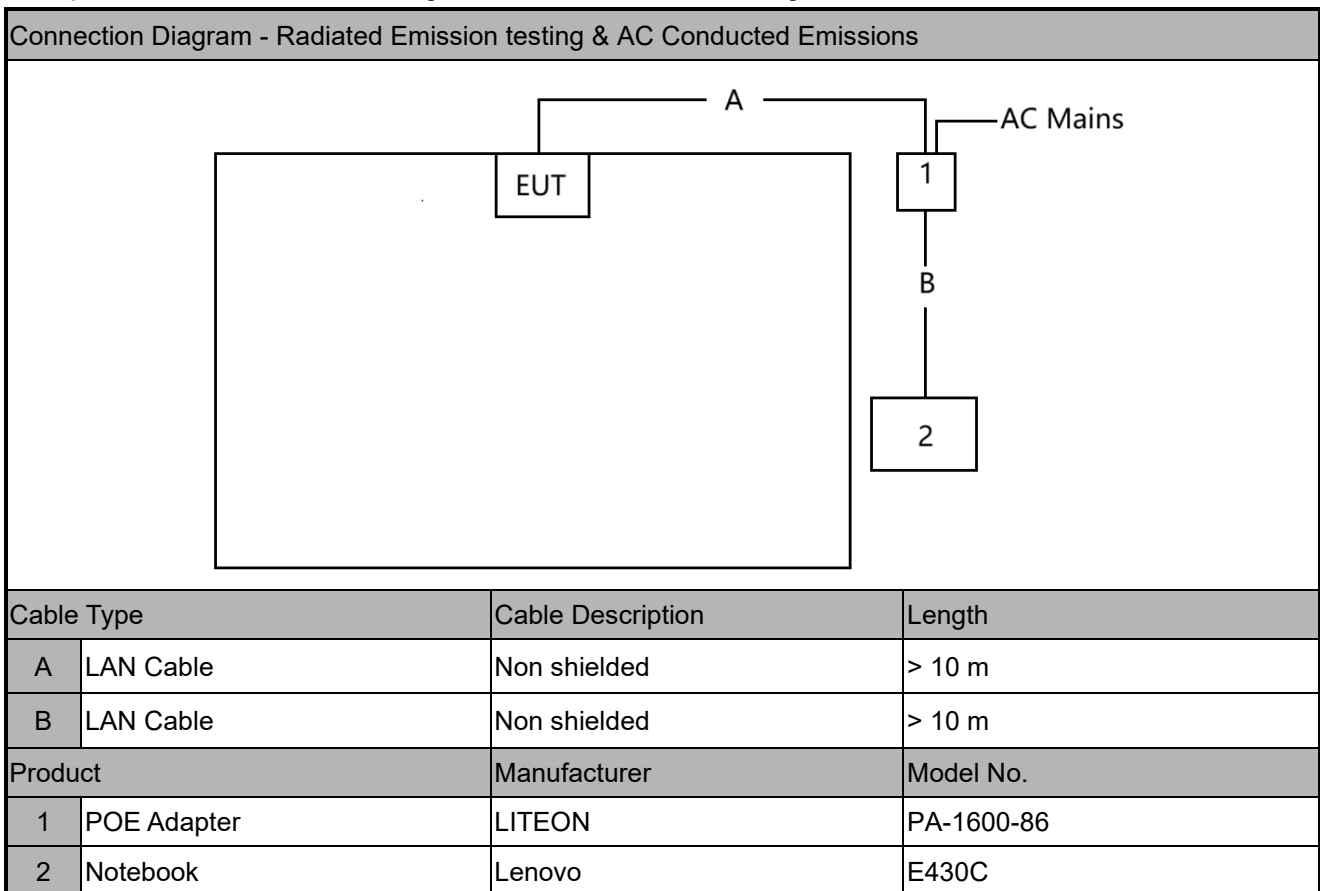

2.3. Test Software

The test utility software used during testing was "Telnet".

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01 v05r02
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2025-10-16	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2026-04-17	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2026-04-26	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2025-09-23	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2026-03-18	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2025-11-03	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2025-10-16	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2026-04-17	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2025-12-19	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2026-05-15	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2025-09-01 2026-08-31	SIP-AC2
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2026-01-23	WZ-SR6
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2026-04-26	WZ-SR6
USB Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2026-06-17	WZ-SR6
Attenuator	MVE	MVE2213	MRTSUE11091	1 year	2026-06-02	WZ-SR6
RF Cable	UCwave	UCE500	MRTSUE07373	1 year	2026-07-20	WZ-SR6
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2026-04-26	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2026-04-24	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2025-09-01 2026-08-31	WZ-SR2

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
Controller_MF 7802BS	1.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.58 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.35 dB
Coplanar:	9 kHz ~ 30 MHz: 2.37 dB
Horizontal:	30 MHz ~ 200 MHz: 3.47 dB
	200 MHz ~ 1 GHz: 4.17 dB
	1 GHz ~ 40 GHz: 4.97 dB
Vertical:	30 MHz ~ 200 MHz: 4.07 dB
	200 MHz ~ 1 GHz: 5.28 dB
	1 GHz ~ 40 GHz: 4.84 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.5 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 1.5 dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.5 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 3.2%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6 dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
3. The device supports H and V antennas for BLE transmission, with only one active at a time. The V antenna (higher power) is selected for all items, while the H antenna has been verified for Output Power and General Field Strength.

6.2. 6 dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6 dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1% to 5% of the OBW, but not less than 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

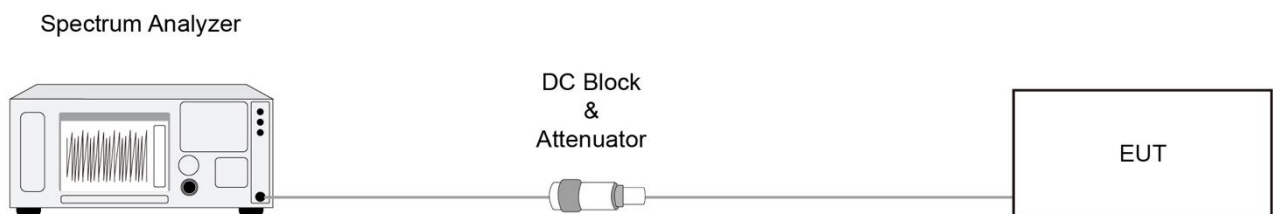

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30 dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10-2020 - Section 11.9.1.2

ANSI C63.10-2020 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50 MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50 MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50 MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

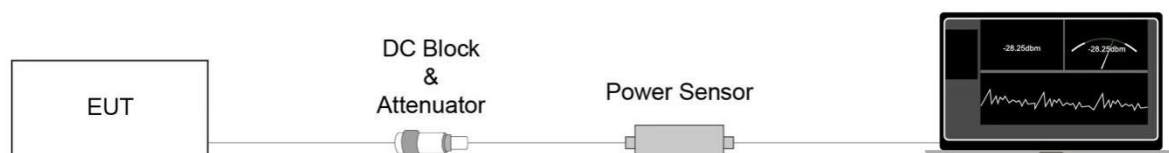

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2020 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

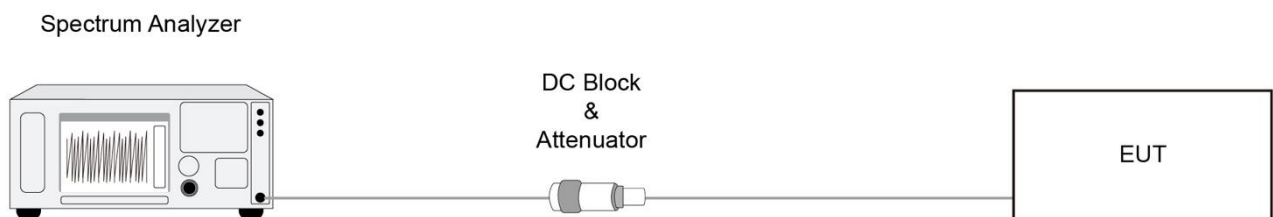

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

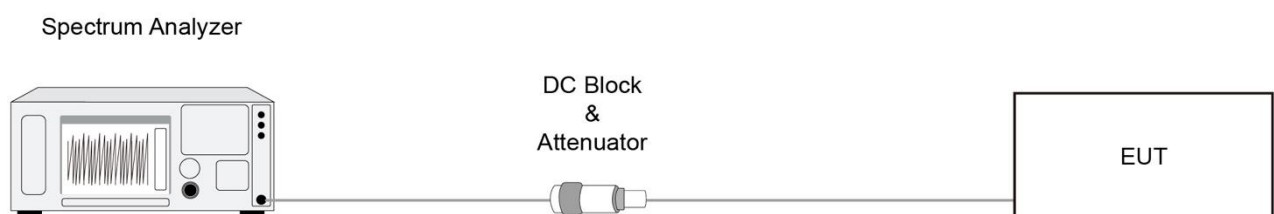

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30 MHz to 1 GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1 GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1 GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
(For 1 Mbps, VBW = 2.7 kHz; For 2 Mbps, VBW = 5.6 kHz)
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30 MHz Test Setup:

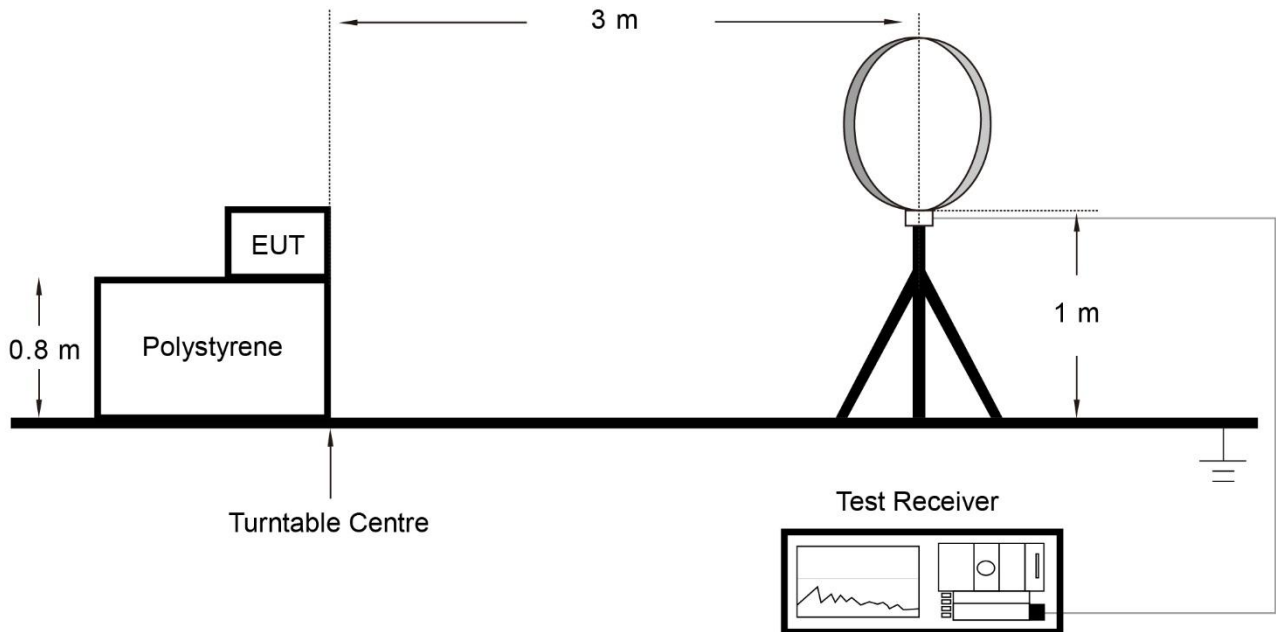

Below 1 GHz Test Setup:

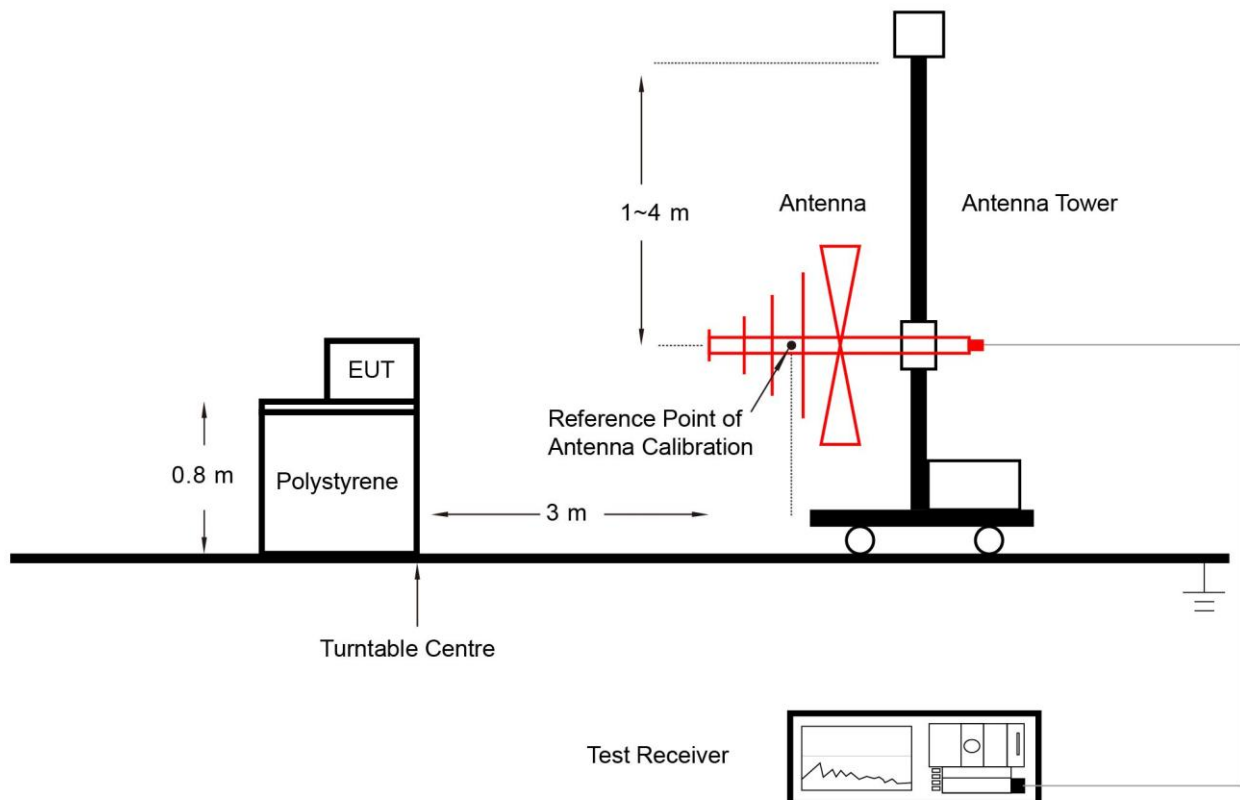

Above 1 GHz Test Setup:

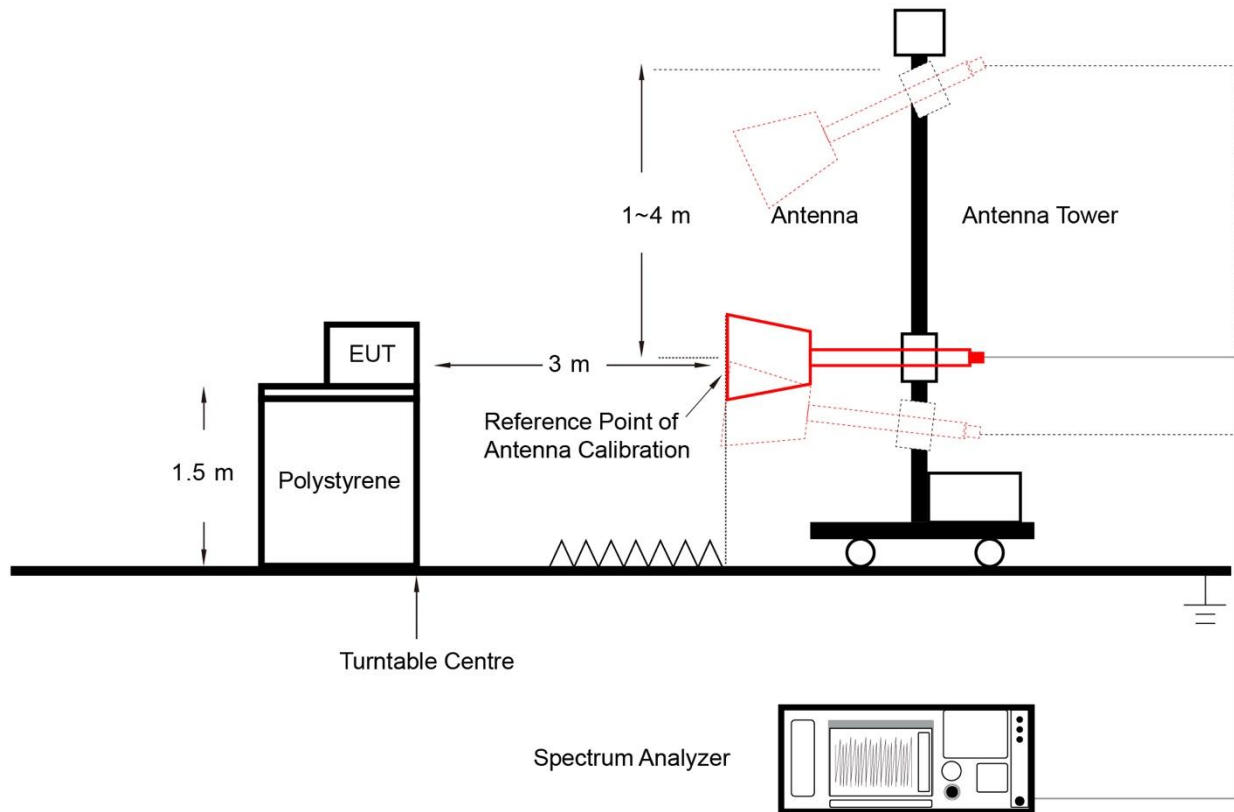

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 - Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

(For 1Mbps, VBW = 2.7 kHz; For 2Mbps, VBW = 5.6 kHz)

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

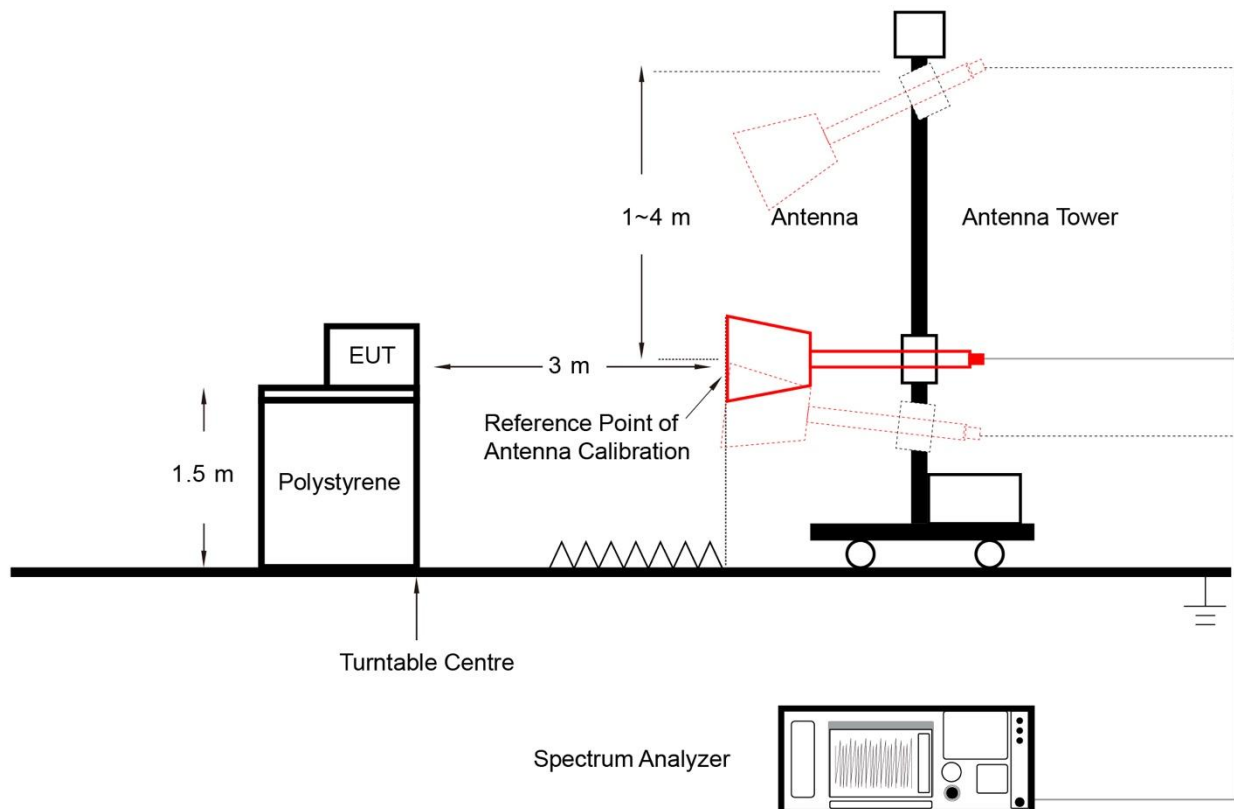

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.8.2. Test Setup

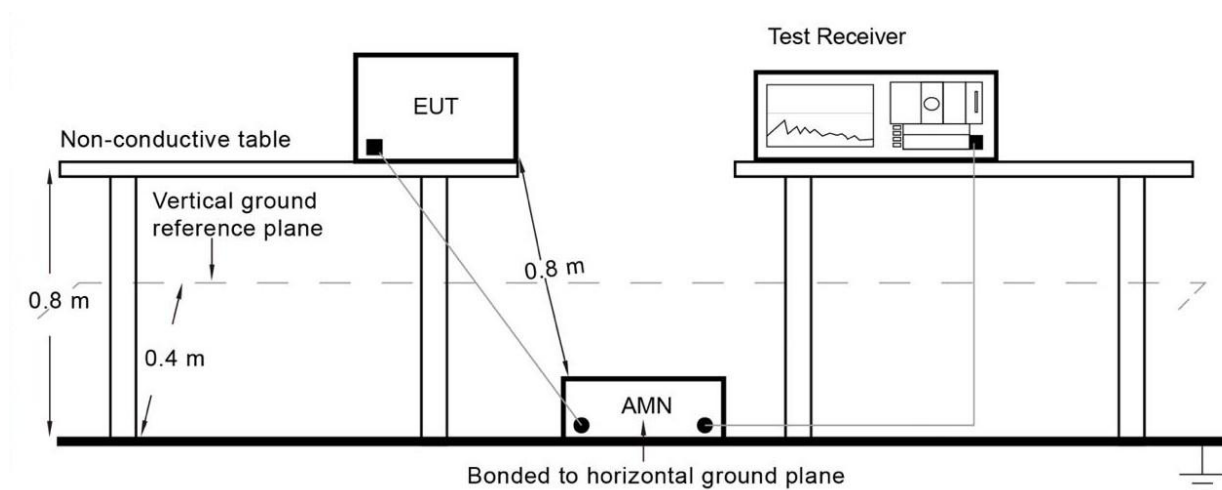

6.8.3. Test Result



Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-11		


Test Mode	Duty Cycle
BLE-1 Mbps	60.53%
BLE-2 Mbps	31.20%
Duty Cycle (T = Transmission Duration)	
BLE-1 Mbps (T = 378.7 μ s)	BLE-2 Mbps (T = 194.7 μ s)

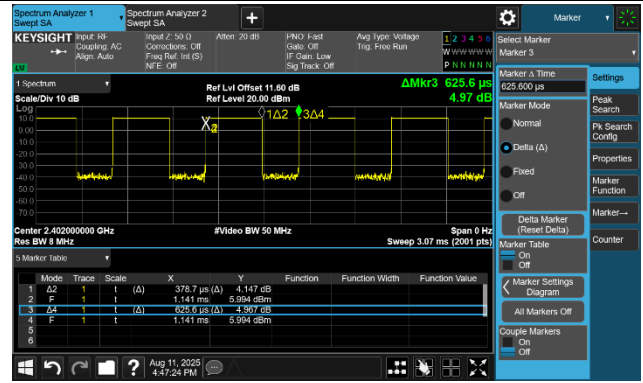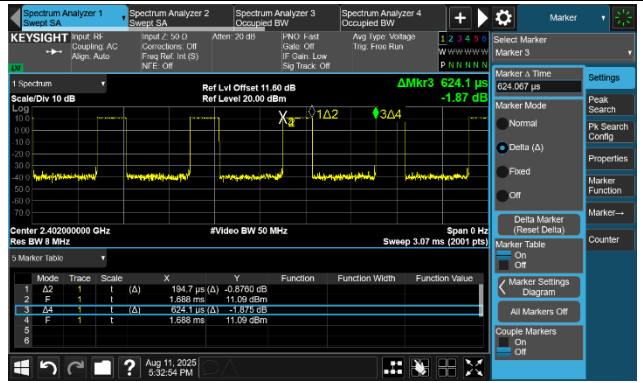



A.2 6 dB Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-11		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE	1 Mbps	00	2402	0.7137	≥ 0.5
BLE	1 Mbps	19	2440	0.7141	≥ 0.5
BLE	1 Mbps	39	2480	0.7106	≥ 0.5
BLE	2 Mbps	00	2402	1.240	≥ 0.5
BLE	2 Mbps	19	2440	1.182	≥ 0.5
BLE	2 Mbps	39	2480	1.177	≥ 0.5

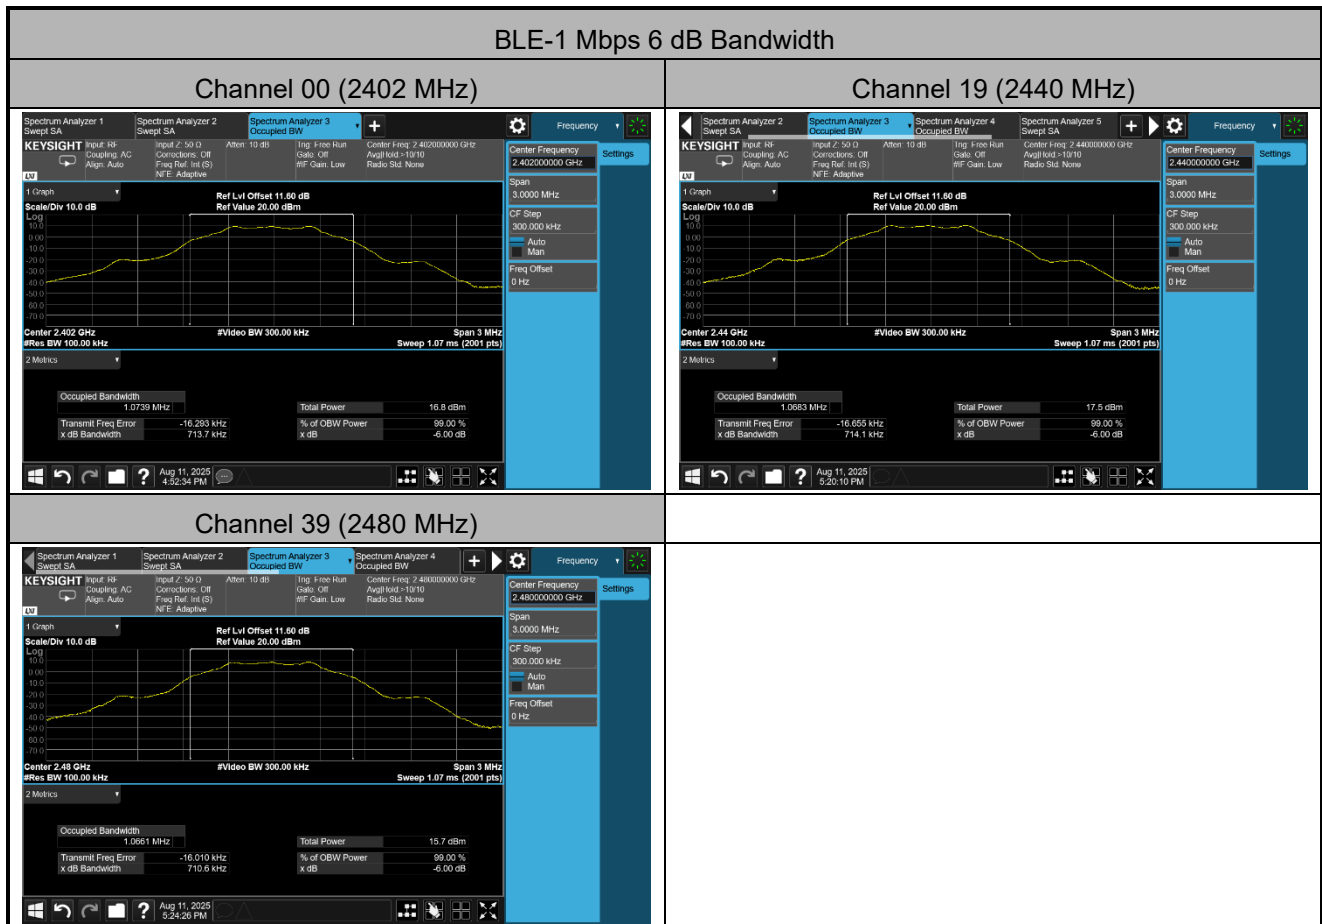

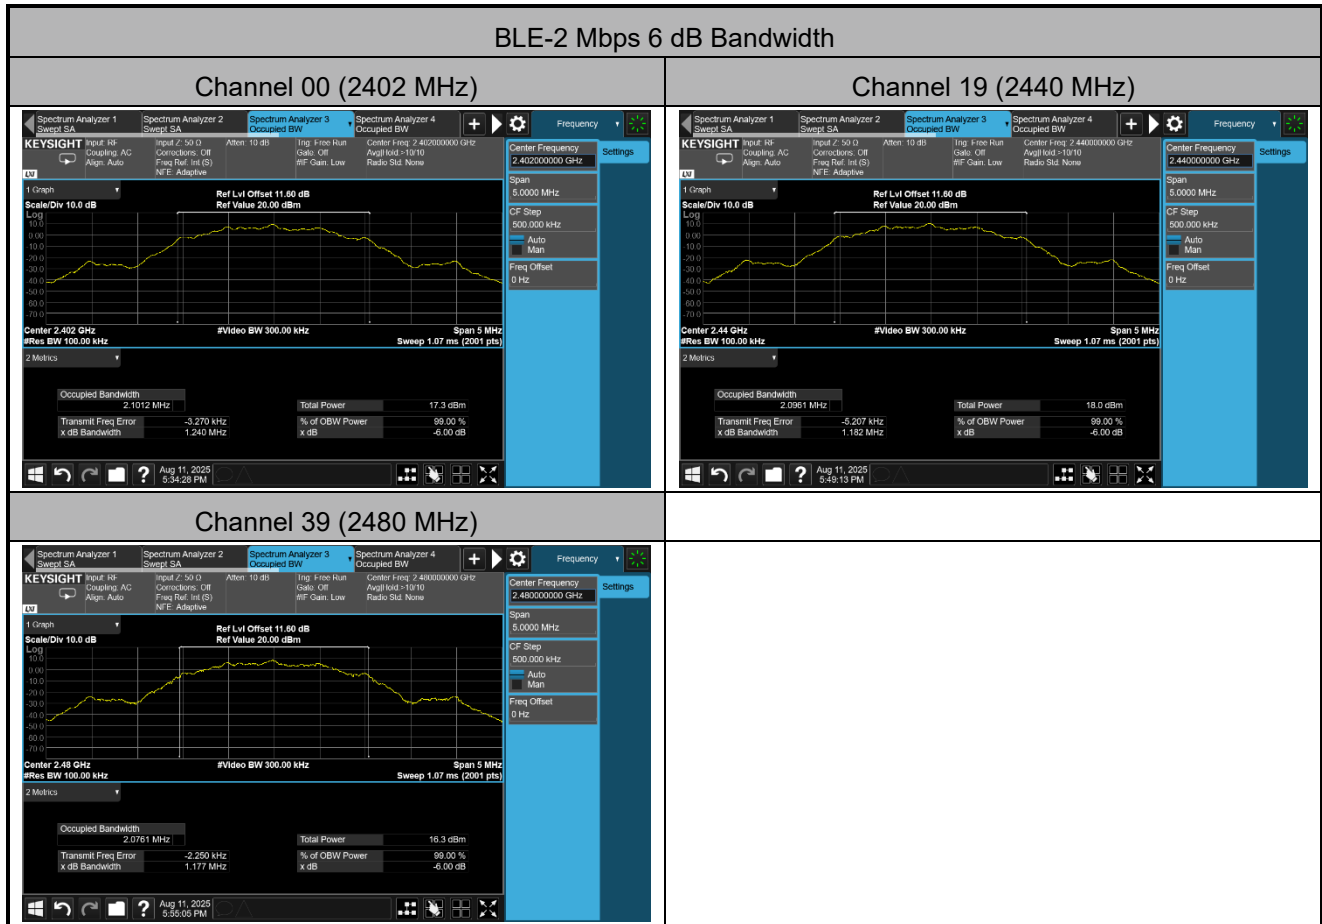

A.3 Output Power Test Result

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-11		

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
Horizontal						
BLE	1 Mbps	00	2402	10.84	≤ 30.00	Pass
BLE	1 Mbps	19	2440	11.42	≤ 30.00	Pass
BLE	1 Mbps	39	2480	10.14	≤ 30.00	Pass
BLE	2 Mbps	00	2402	10.96	≤ 30.00	Pass
BLE	2 Mbps	19	2440	11.47	≤ 30.00	Pass
BLE	2 Mbps	39	2480	10.05	≤ 30.00	Pass
Vertical						
BLE	1 Mbps	00	2402	10.85	≤ 30.00	Pass
BLE	1 Mbps	19	2440	11.53	≤ 30.00	Pass
BLE	1 Mbps	39	2480	10.08	≤ 30.00	Pass
BLE	2 Mbps	00	2402	10.94	≤ 30.00	Pass
BLE	2 Mbps	19	2440	11.48	≤ 30.00	Pass
BLE	2 Mbps	39	2480	10.12	≤ 30.00	Pass


Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
Horizontal						
BLE	1 Mbps	00	2402	10.05	≤ 30.00	Pass
BLE	1 Mbps	19	2440	10.78	≤ 30.00	Pass
BLE	1 Mbps	39	2480	9.60	≤ 30.00	Pass
BLE	2 Mbps	00	2402	10.39	≤ 30.00	Pass
BLE	2 Mbps	19	2440	10.94	≤ 30.00	Pass
BLE	2 Mbps	39	2480	9.55	≤ 30.00	Pass
Vertical						
BLE	1 Mbps	00	2402	10.10	≤ 30.00	Pass
BLE	1 Mbps	19	2440	10.90	≤ 30.00	Pass
BLE	1 Mbps	39	2480	9.40	≤ 30.00	Pass
BLE	2 Mbps	00	2402	10.36	≤ 30.00	Pass
BLE	2 Mbps	19	2440	11.01	≤ 30.00	Pass
BLE	2 Mbps	39	2480	9.51	≤ 30.00	Pass


A.4 Power Spectral Density Test Result

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-11		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE	1 Mbps	00	2402	-5.030	≤ 8.00	Pass
BLE	1 Mbps	19	2440	-4.250	≤ 8.00	Pass
BLE	1 Mbps	39	2480	-5.710	≤ 8.00	Pass
BLE	2 Mbps	00	2402	-6.980	≤ 8.00	Pass
BLE	2 Mbps	19	2440	-6.160	≤ 8.00	Pass
BLE	2 Mbps	39	2480	-7.690	≤ 8.00	Pass

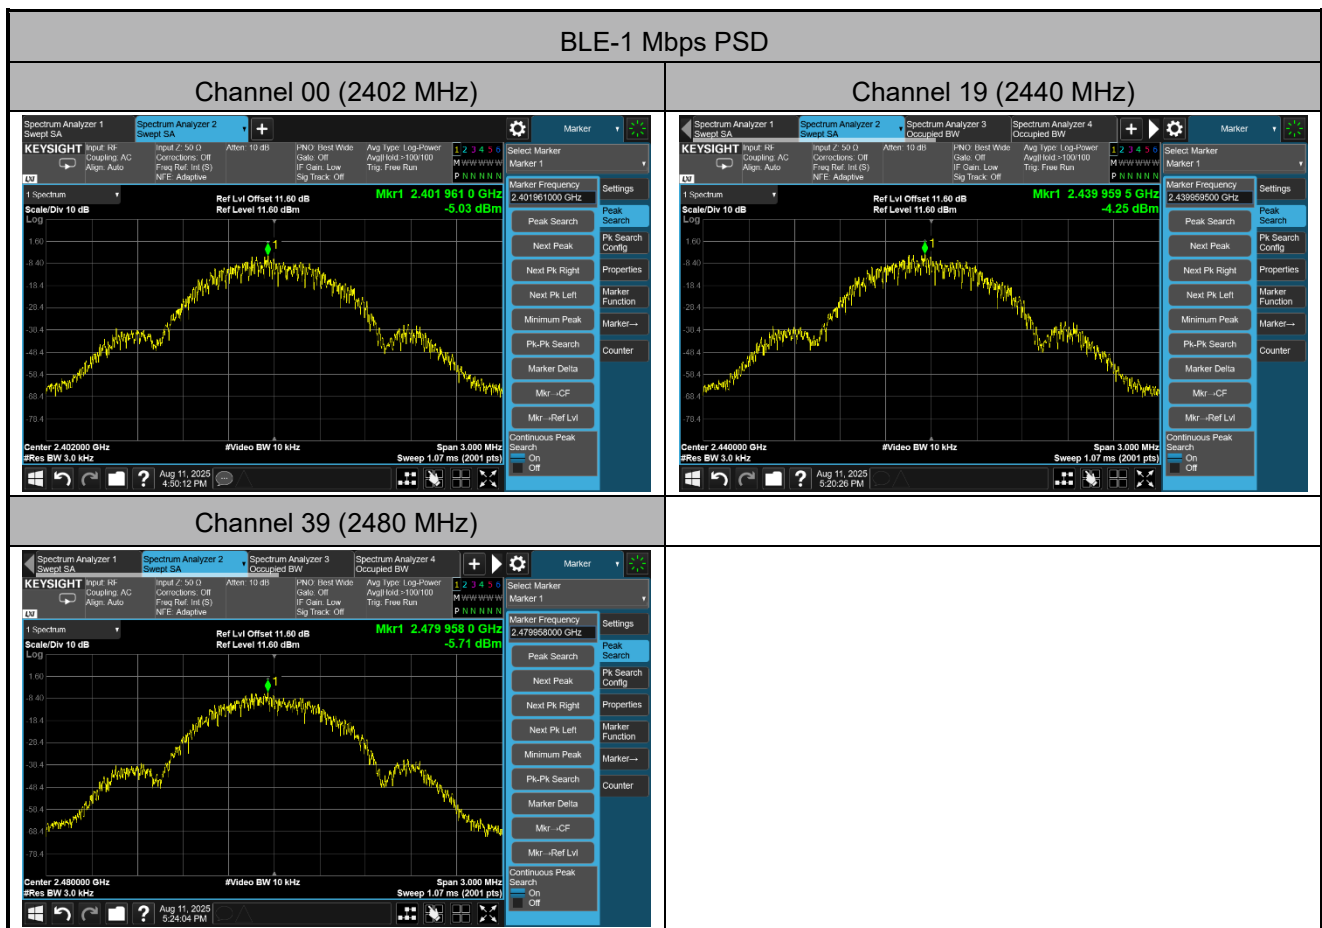


BLE-2 Mbps PSD

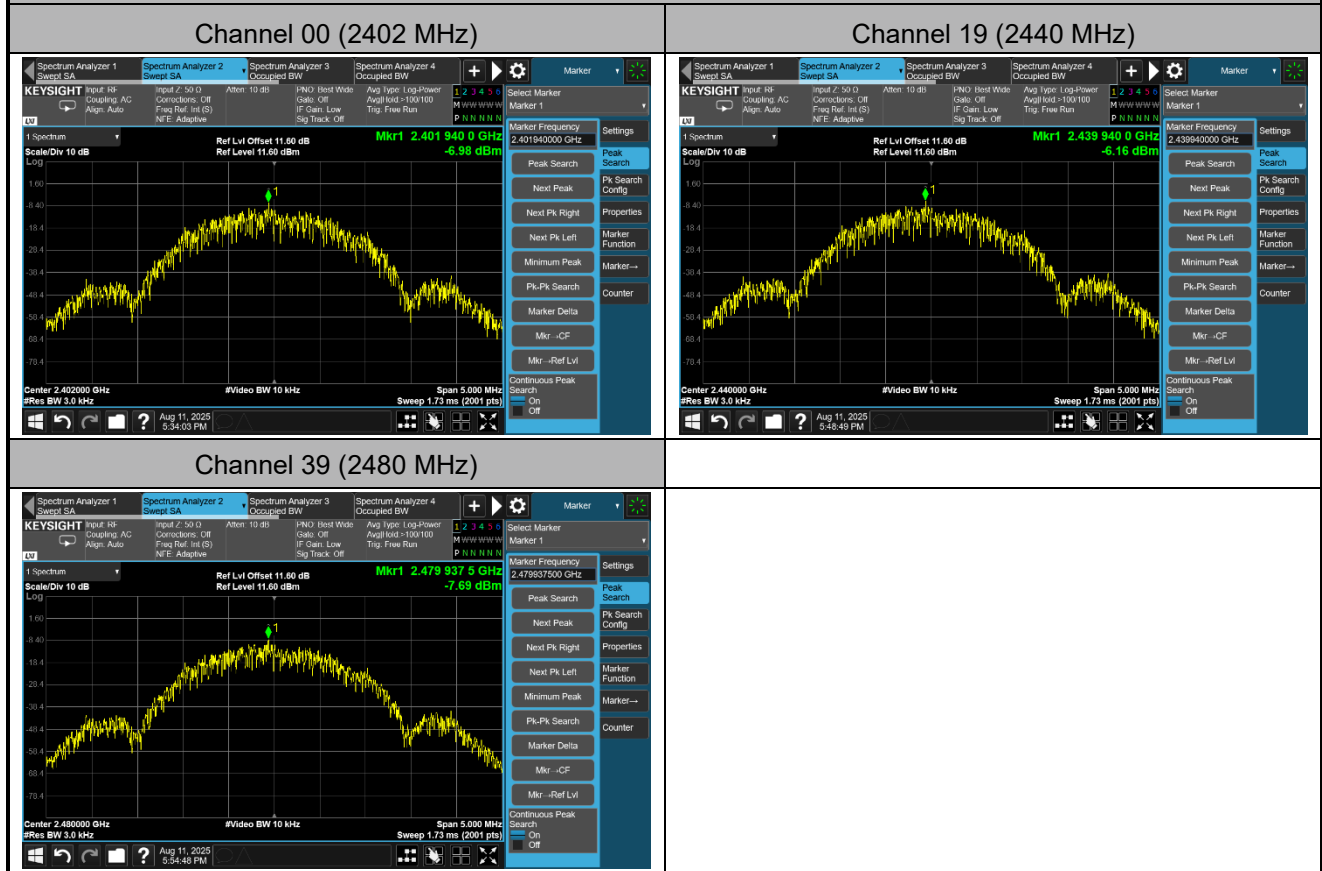

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-11		

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit (dBc)	Result
BLE	1	00	2402	20	Pass
BLE	1	19	2440	20	Pass
BLE	1	39	2480	20	Pass
BLE	2	00	2402	20	Pass
BLE	2	19	2440	20	Pass
BLE	2	39	2480	20	Pass

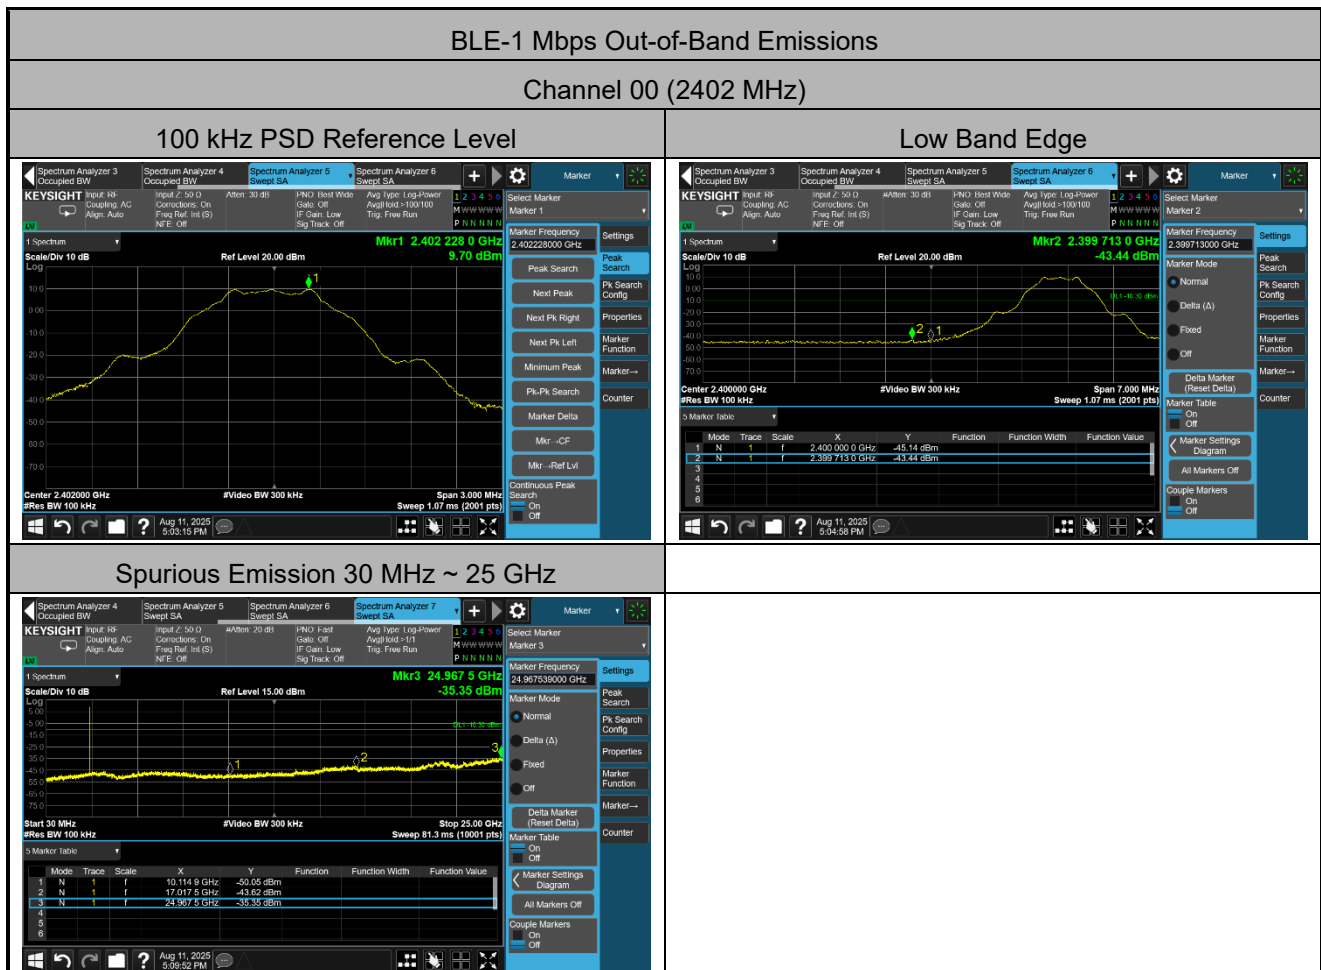


Channel 19 (2440 MHz)

100 kHz PSD Reference Level

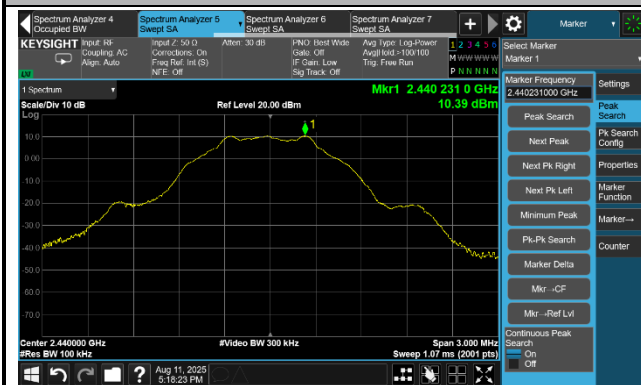


Spurious Emission 30 MHz ~ 25 GHz

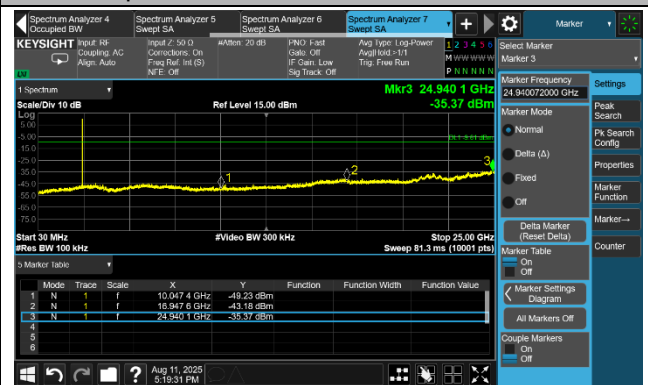


Channel 39 (2480 MHz)


100 kHz PSD Reference Level

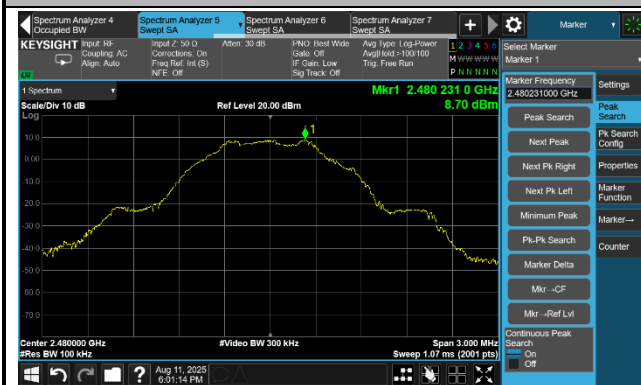

High Band Edge

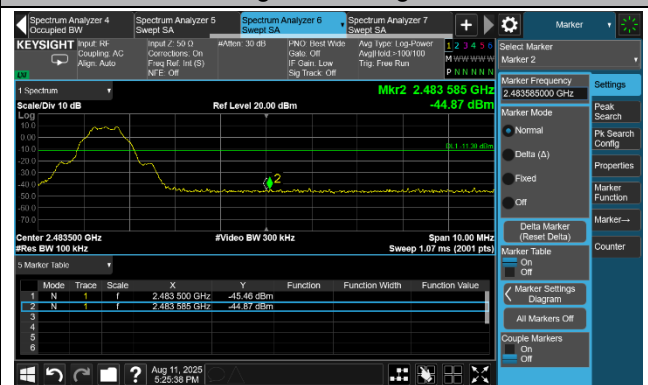


Spurious Emission 30 MHz ~ 25 GHz

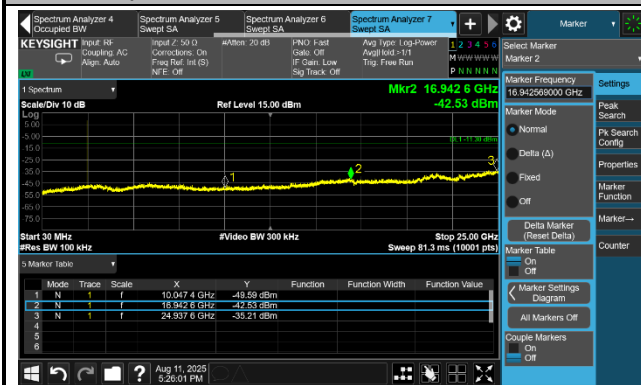


BLE-2 Mbps Out-of-Band Emissions

Channel 00 (2402 MHz)


100 kHz PSD Reference Level

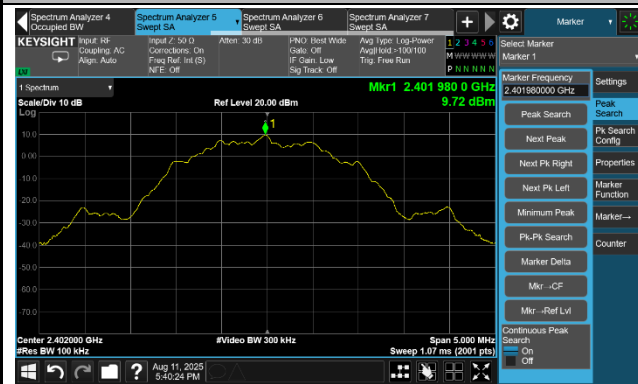

Low Band Edge

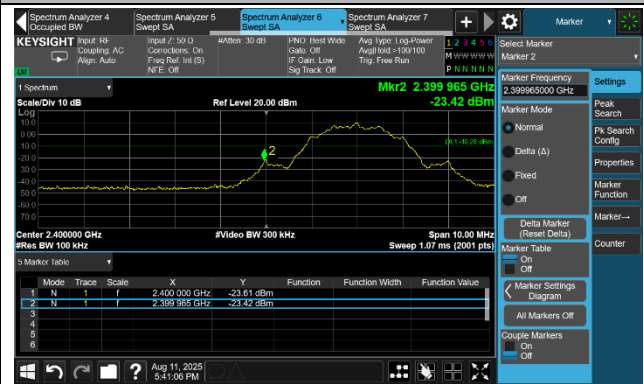


Spurious Emission 30 MHz ~ 25 GHz

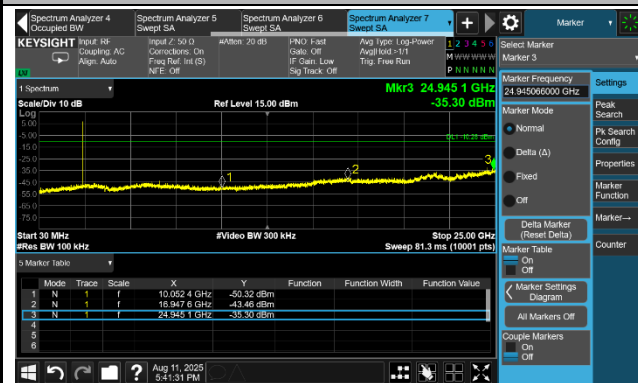


Channel 19 (2440 MHz)

100 kHz PSD Reference Level

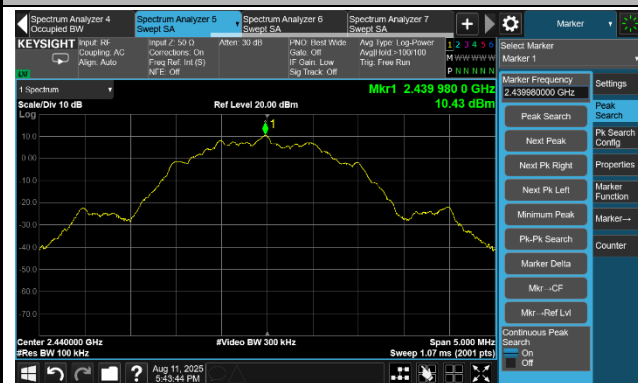


Spurious Emission 30 MHz ~ 25 GHz

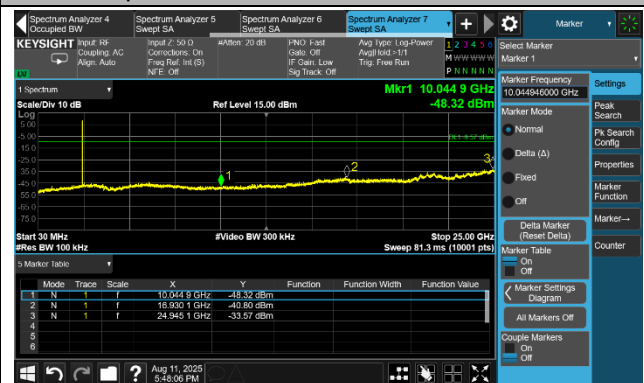


Channel 39 (2480 MHz)


100 kHz PSD Reference Level

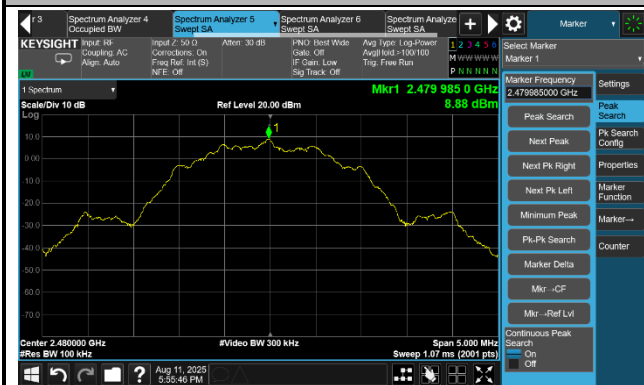

High Band Edge

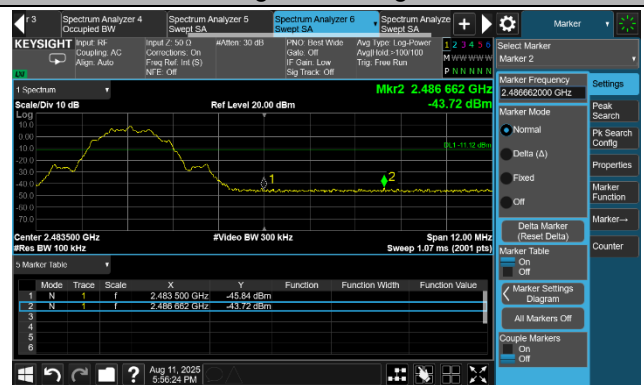

Spurious Emission 30 MHz ~ 25 GHz

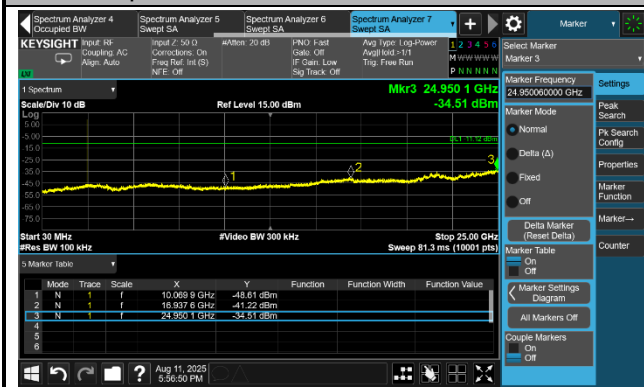

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-08-07	Test Mode	BLE-H-1 Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	9394.60	31.27	12.86	44.13	74.00	-29.87	Peak	Horizontal
	11789.90	29.98	16.14	46.12	74.00	-27.88	Peak	Horizontal
	17949.00	15.47	28.64	44.11	54.00	-9.89	Average	Horizontal
	17949.00	30.71	28.64	59.35	74.00	-14.65	Peak	Horizontal
	10730.80	31.51	14.96	46.46	74.00	-27.54	Peak	Vertical
	15643.80	31.72	17.39	49.11	74.00	-24.89	Peak	Vertical
	17984.70	15.14	27.86	43.00	54.00	-11.00	Average	Vertical
	17984.70	31.28	27.86	59.14	74.00	-14.86	Peak	Vertical
19	9369.10	28.96	12.97	41.93	74.00	-32.07	Peak	Horizontal
	11890.20	30.45	16.06	46.51	74.00	-27.49	Peak	Horizontal
	17923.50	15.48	28.18	43.66	54.00	-10.34	Average	Horizontal
	17923.50	30.19	28.18	58.37	74.00	-15.63	Peak	Horizontal
	8250.50	32.37	10.46	42.83	74.00	-31.17	Peak	Vertical
	11696.40	29.85	16.26	46.12	74.00	-27.88	Peak	Vertical
	17847.00	15.42	28.53	43.95	54.00	-10.05	Average	Vertical
	17847.00	30.51	28.53	59.04	74.00	-14.96	Peak	Vertical
39	9403.10	31.84	12.85	44.69	74.00	-29.31	Peak	Horizontal
	11900.40	30.28	16.04	46.33	74.00	-27.67	Peak	Horizontal
	17928.60	15.47	28.34	43.81	54.00	-10.19	Average	Horizontal
	17928.60	30.77	28.34	59.11	74.00	-14.89	Peak	Horizontal
	9126.00	28.72	12.76	41.48	74.00	-32.52	Peak	Vertical
	12140.10	30.79	16.18	46.96	74.00	-27.04	Peak	Vertical
	17858.90	15.46	28.58	44.04	54.00	-9.96	Average	Vertical
	17858.90	30.04	28.58	58.62	74.00	-15.38	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-08-07	Test Mode	BLE-H-2 Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	9406.50	31.74	12.85	44.58	74.00	-29.42	Peak	Horizontal
	11745.70	30.46	16.06	46.52	74.00	-27.48	Peak	Horizontal
	17949.00	15.47	28.64	44.11	54.00	-9.89	Average	Horizontal
	17949.00	30.99	28.64	59.63	74.00	-14.37	Peak	Horizontal
	9326.60	31.83	13.10	44.93	74.00	-29.07	Peak	Vertical
	10690.00	31.41	14.68	46.09	74.00	-27.91	Peak	Vertical
	17932.00	15.47	28.47	43.94	54.00	-10.06	Average	Vertical
	17932.00	30.95	28.47	59.42	74.00	-14.58	Peak	Vertical
19	9418.40	29.82	12.78	42.61	74.00	-31.39	Peak	Horizontal
	12041.50	30.24	15.97	46.20	74.00	-27.80	Peak	Horizontal
	17930.30	15.47	28.42	43.89	54.00	-10.11	Average	Horizontal
	17930.30	30.26	28.42	58.68	74.00	-15.32	Peak	Horizontal
	9369.10	30.12	12.97	43.09	74.00	-30.91	Peak	Vertical
	11616.50	29.22	16.31	45.54	74.00	-28.46	Peak	Vertical
	17920.10	15.74	28.08	43.82	54.00	-10.18	Average	Vertical
	17920.10	31.05	28.08	59.13	74.00	-14.87	Peak	Vertical
39	8204.60	32.45	10.56	43.00	74.00	-31.00	Peak	Horizontal
	12104.40	30.14	16.10	46.25	74.00	-27.75	Peak	Horizontal
	17932.00	15.42	28.47	43.89	54.00	-10.11	Average	Horizontal
	17932.00	30.59	28.47	59.06	74.00	-14.94	Peak	Horizontal
	8172.30	32.41	10.42	42.83	74.00	-31.17	Peak	Vertical
	12097.60	30.07	16.11	46.19	74.00	-27.81	Peak	Vertical
	17828.30	15.49	27.45	42.94	54.00	-11.06	Average	Vertical
	17828.30	32.19	27.45	59.64	74.00	-14.36	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-08-07	Test Mode	BLE-V-1 Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	9425.20	31.73	12.75	44.48	74.00	-29.52	Peak	Horizontal
	11516.20	29.57	16.38	45.95	74.00	-28.05	Peak	Horizontal
	17932.00	15.46	28.47	43.93	54.00	-10.07	Average	Horizontal
	17932.00	30.40	28.47	58.87	74.00	-15.13	Peak	Horizontal
	9122.60	31.46	12.73	44.19	74.00	-29.81	Peak	Vertical
	12203.00	30.13	16.24	46.37	74.00	-27.63	Peak	Vertical
	17952.40	15.36	28.58	43.94	54.00	-10.06	Average	Vertical
	17952.40	30.83	28.58	59.40	74.00	-14.60	Peak	Vertical
19	9418.40	31.44	12.78	44.22	74.00	-29.78	Peak	Horizontal
	12089.10	30.28	16.14	46.42	74.00	-27.58	Peak	Horizontal
	17954.10	15.47	28.54	44.01	54.00	-9.99	Average	Horizontal
	17954.10	30.32	28.54	58.87	74.00	-15.13	Peak	Horizontal
	9386.10	31.36	12.90	44.26	74.00	-29.74	Peak	Vertical
	12131.60	30.06	16.13	46.19	74.00	-27.81	Peak	Vertical
	17925.20	15.74	28.23	43.97	54.00	-10.03	Average	Vertical
	17925.20	30.96	28.23	59.19	74.00	-14.81	Peak	Vertical
39	8381.40	31.16	10.63	41.79	74.00	-32.21	Peak	Horizontal
	12036.40	30.31	15.94	46.25	74.00	-27.75	Peak	Horizontal
	17857.20	15.69	28.61	44.30	54.00	-9.70	Average	Horizontal
	17857.20	31.19	28.61	59.80	74.00	-14.20	Peak	Horizontal
	8172.30	32.21	10.42	42.63	74.00	-31.37	Peak	Vertical
	11628.40	29.91	16.28	46.19	74.00	-27.81	Peak	Vertical
	17967.70	15.42	28.26	43.68	54.00	-10.32	Average	Vertical
	17967.70	31.17	28.26	59.43	74.00	-14.57	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-08-07	Test Mode	BLE-V-2 Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	9418.40	32.14	12.78	44.92	74.00	-29.08	Peak	Horizontal
	11628.40	29.97	16.28	46.25	74.00	-27.75	Peak	Horizontal
	17930.30	15.46	28.42	43.88	54.00	-10.12	Average	Horizontal
	17930.30	30.35	28.42	58.78	74.00	-15.22	Peak	Horizontal
	8315.10	32.90	10.54	43.45	74.00	-30.55	Peak	Vertical
	10861.70	31.64	15.54	47.18	74.00	-26.82	Peak	Vertical
	17762.00	15.46	27.55	43.01	54.00	-10.99	Average	Vertical
	17762.00	31.82	27.55	59.37	74.00	-14.63	Peak	Vertical
19	9459.20	32.79	12.63	45.42	74.00	-28.58	Peak	Horizontal
	12140.10	30.99	16.18	47.17	74.00	-26.83	Peak	Horizontal
	17952.40	15.46	28.58	44.04	54.00	-9.96	Average	Horizontal
	17952.40	30.49	28.58	59.07	74.00	-14.93	Peak	Horizontal
	9404.80	31.86	12.85	44.71	74.00	-29.29	Peak	Vertical
	11857.90	30.35	16.07	46.41	74.00	-27.59	Peak	Vertical
	17952.40	15.46	28.58	44.04	54.00	-9.96	Average	Vertical
	17952.40	31.15	28.58	59.73	74.00	-14.27	Peak	Vertical
39	8327.00	32.27	10.55	42.81	74.00	-31.19	Peak	Horizontal
	11524.70	29.54	16.35	45.88	74.00	-28.12	Peak	Horizontal
	17947.30	15.94	28.63	44.57	54.00	-9.43	Average	Horizontal
	17947.30	29.59	28.63	58.21	74.00	-15.79	Peak	Horizontal
	9391.20	29.63	12.87	42.50	74.00	-31.50	Peak	Vertical
	11864.70	27.40	16.07	43.48	74.00	-30.52	Peak	Vertical
	18000.00	15.24	27.93	43.17	54.00	-10.83	Average	Vertical
	18000.00	27.65	27.93	55.58	74.00	-18.42	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 30 MHz:

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2440 MHz		

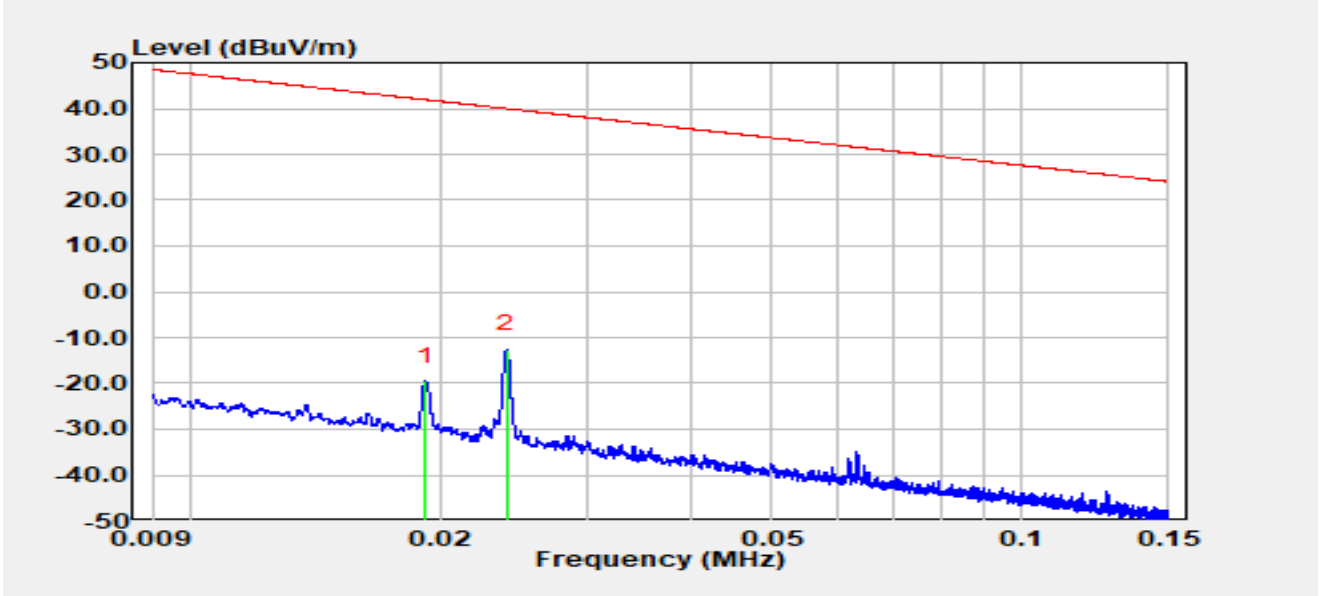


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.02	41.15	-60.66	-19.50	-61.44	41.93	Peak
2	*	0.02	48.19	-60.80	-12.62	-52.60	39.98	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2440 MHz		

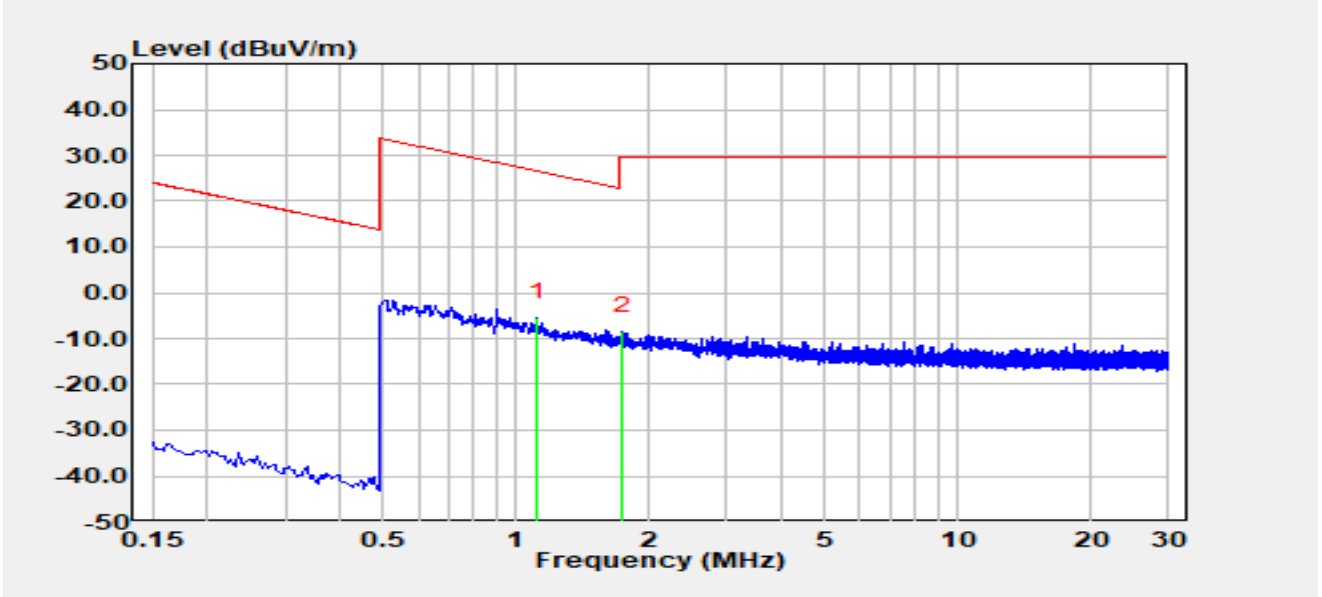


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	1.12	15.55	-20.90	-5.35	-31.99	26.64	Peak
2		1.74	12.37	-20.84	-8.46	-37.96	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2440 MHz		

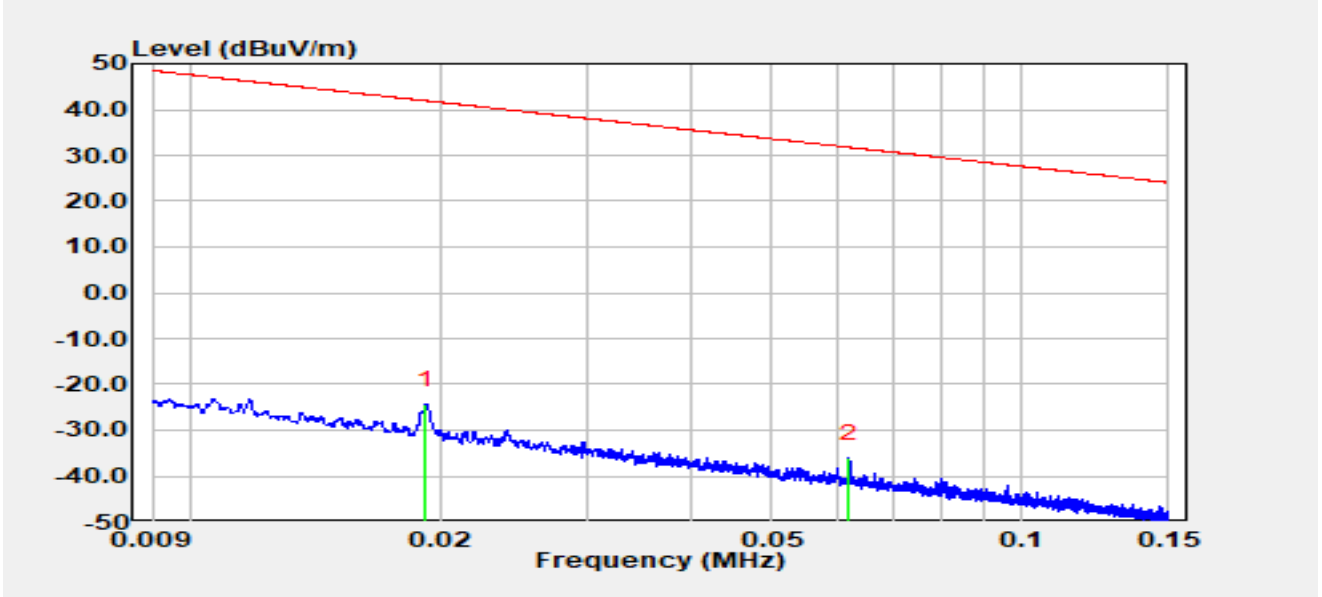


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.02	36.19	-60.66	-24.47	-66.39	41.92	Peak
2		0.06	24.84	-61.05	-36.21	-67.96	31.75	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-08-06
Temperature	24.7 °C	Humidity	54.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Lucas Wang
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2440 MHz		

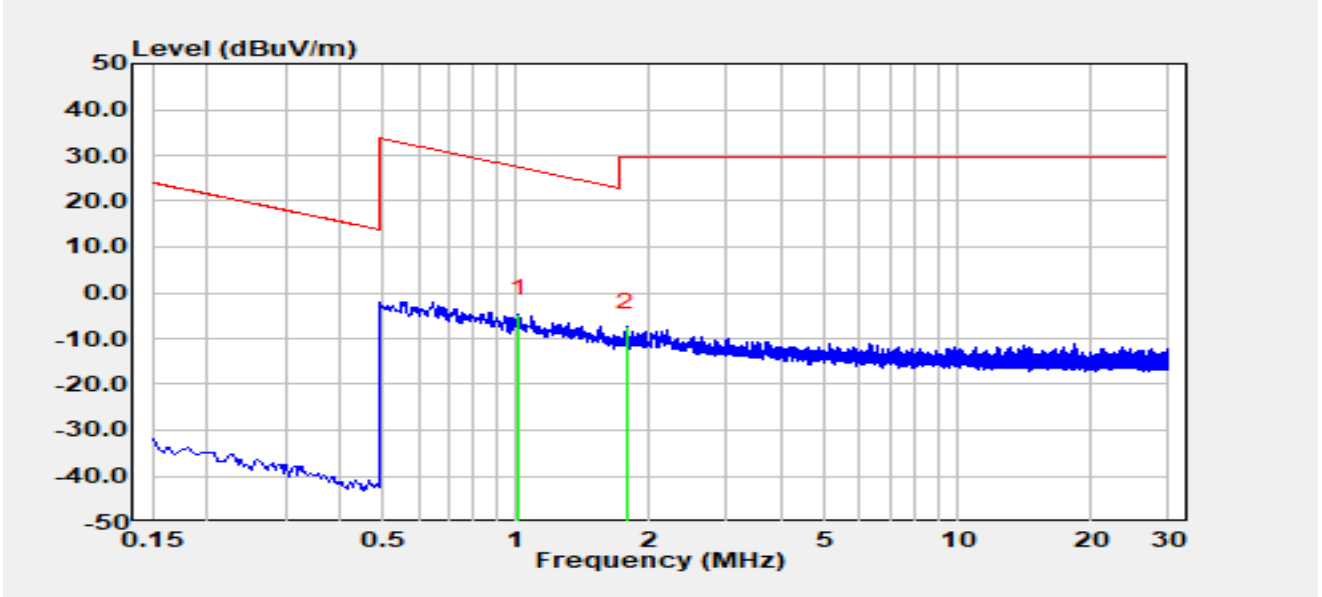


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	1.01	16.34	-20.91	-4.57	-32.11	27.54	Peak
2		1.78	13.35	-20.83	-7.48	-36.98	29.50	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC2	Test Date	2025-07-30
Temperature	23.1 °C	Humidity	65.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Fusco Pan
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE at 2440 MHz		

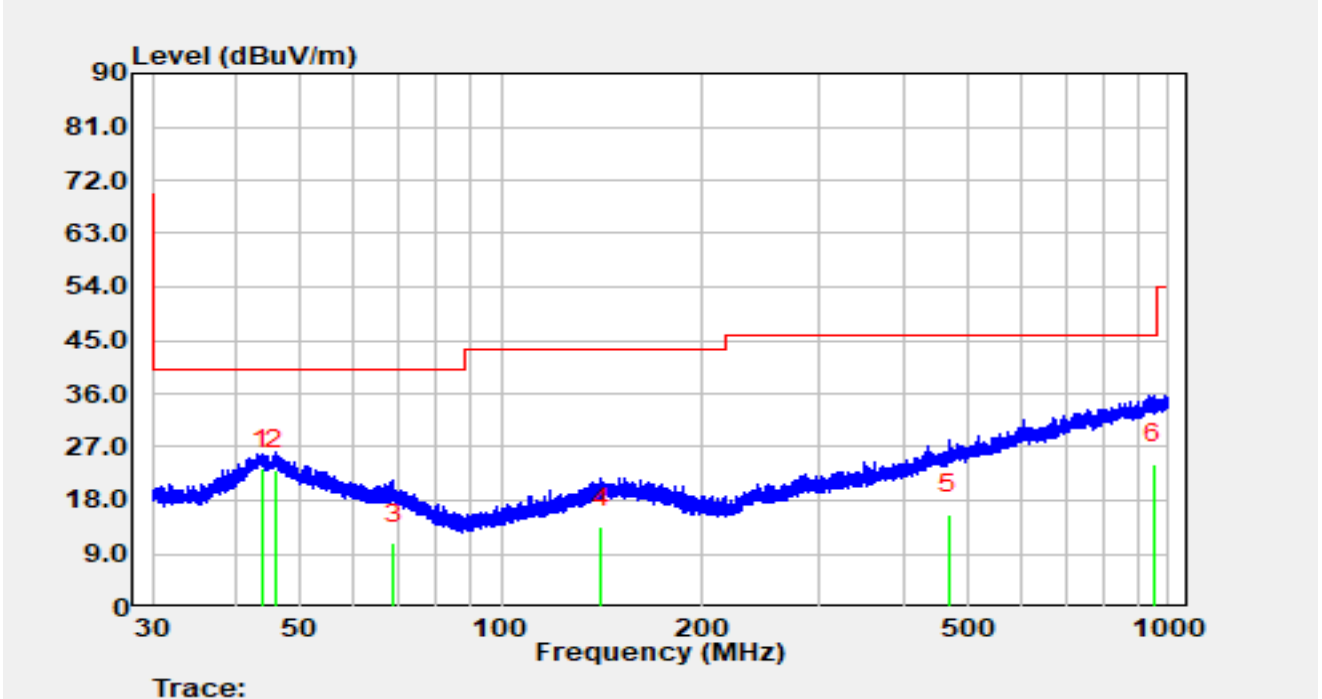


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	43.766	3.10	20.25	23.35	-16.65	40.00	QP
2		45.727	2.80	20.44	23.24	-16.76	40.00	QP
3		68.993	-7.30	18.13	10.83	-29.17	40.00	QP
4		141.181	-6.40	19.82	13.42	-30.08	43.50	QP
5		468.548	-9.30	24.96	15.66	-30.34	46.00	QP
6		948.428	-8.20	32.39	24.19	-21.81	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-07-30
Temperature	23.1 °C	Humidity	65.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Fusco Pan
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE at 2440 MHz		

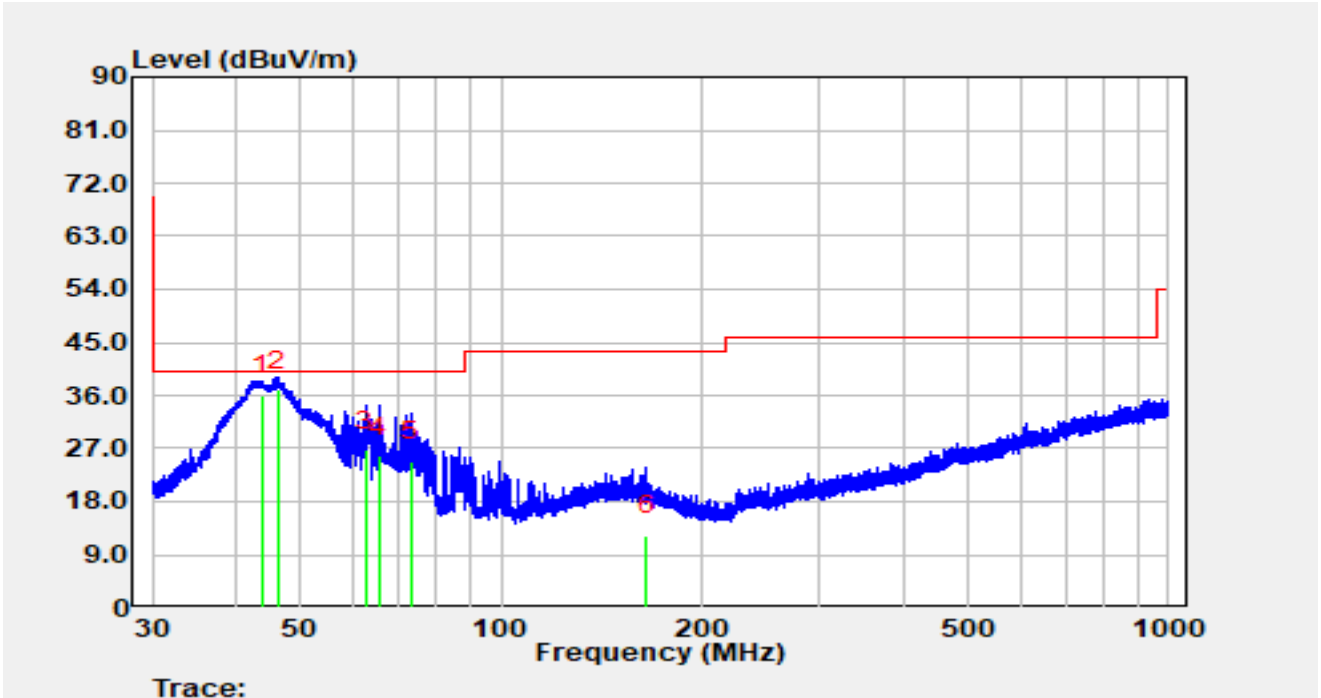


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		43.705	15.90	20.24	36.14	-3.86	40.00	QP
2	*	46.146	16.40	20.46	36.86	-3.14	40.00	QP
3		62.497	7.50	19.30	26.80	-13.20	40.00	QP
4		65.527	6.90	18.79	25.69	-14.31	40.00	QP
5		73.179	7.30	17.57	24.87	-15.13	40.00	QP
6		164.792	-7.60	19.86	12.26	-31.24	43.50	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission above 18 GHz:

Site	WZ-AC2	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	43.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2440 MHz		

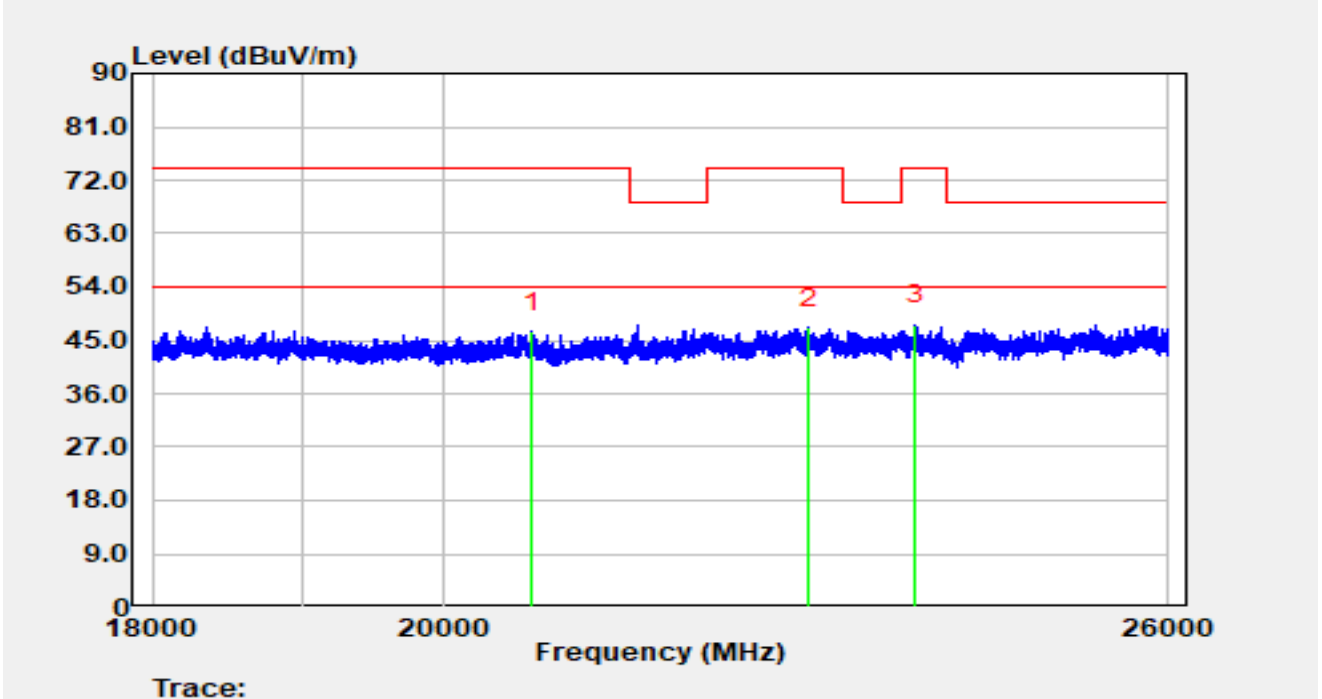


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		20651.20	54.57	-8.09	46.48	-27.52	74.00	Peak
2		22832.00	53.32	-6.19	47.14	-26.86	74.00	Peak
3	*	23728.80	53.66	-6.05	47.62	-26.38	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	43.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2440 MHz		

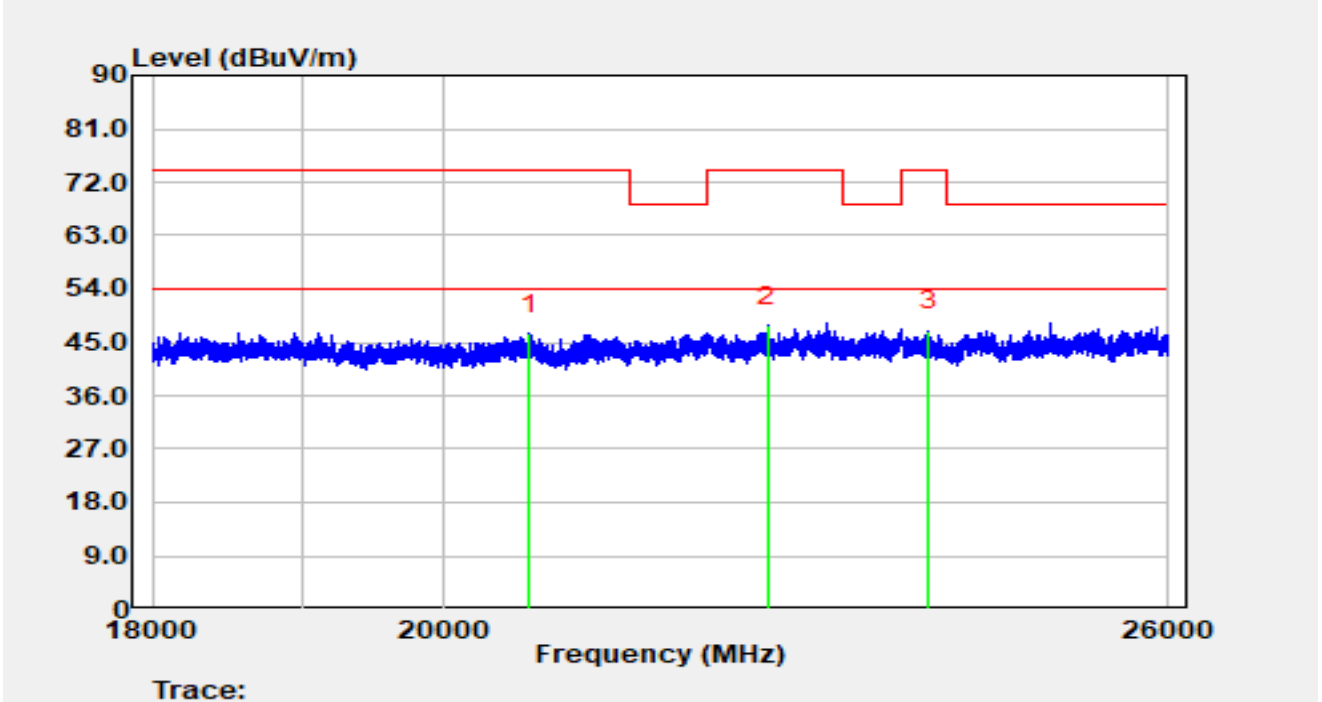


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		20633.60	54.83	-8.44	46.40	-27.60	74.00	Peak
2	*	22491.20	54.75	-6.94	47.82	-26.18	74.00	Peak
3		23832.80	52.45	-5.54	46.91	-27.09	74.00	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.7 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2402 MHz		

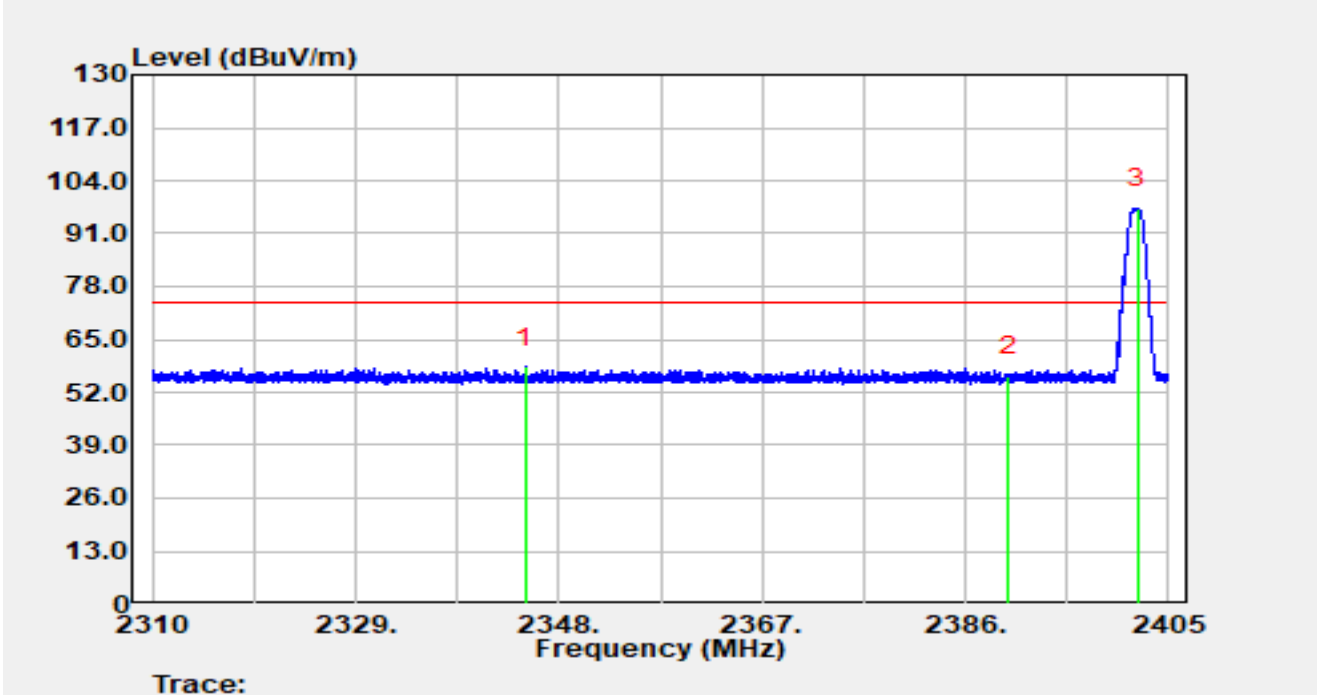


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.88	26.63	31.56	58.19	-15.81	74.00	Peak
2		2390.00	24.59	31.43	56.02	-17.98	74.00	Peak
3		2402.06	65.74	31.41	97.15	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2402 MHz		

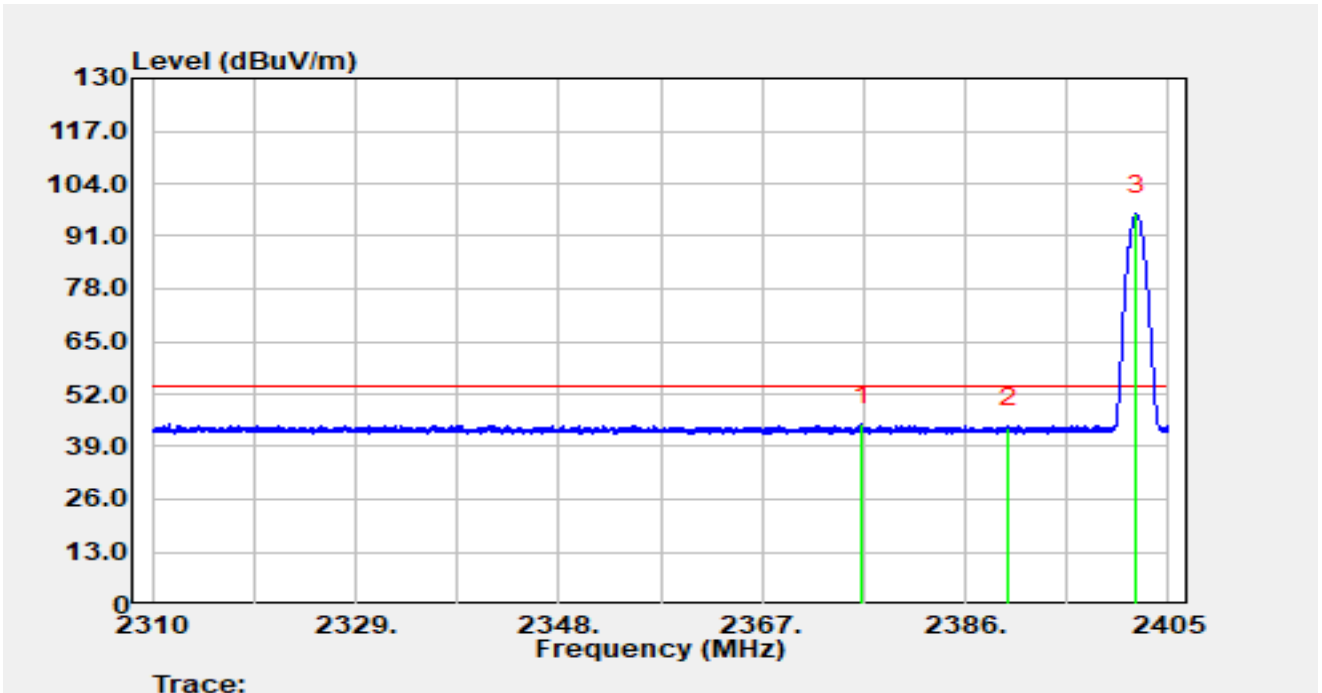


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2376.33	13.05	31.46	44.50	-9.50	54.00	Average
2		2390.00	12.37	31.43	43.80	-10.20	54.00	Average
3		2401.96	65.12	31.41	96.53	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2402 MHz		

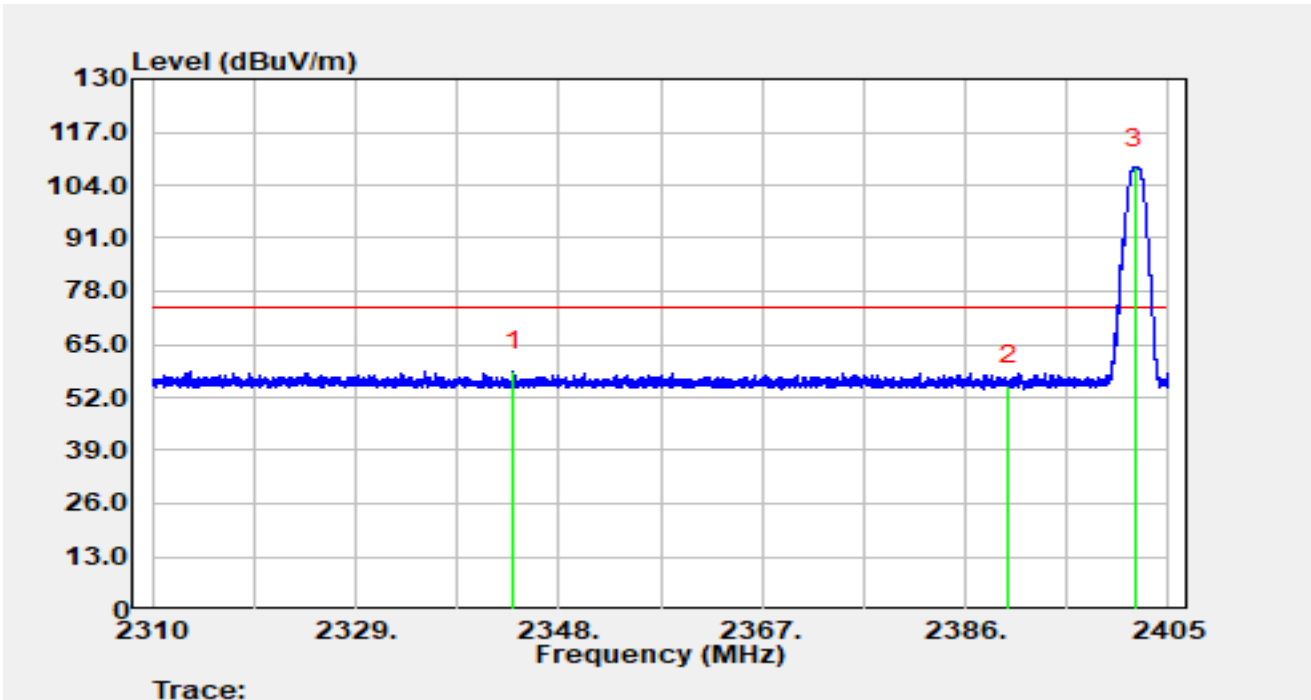


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2343.75	26.97	31.57	58.53	-15.47	74.00	Peak
2		2390.00	23.69	31.43	55.12	-18.88	74.00	Peak
3		2401.91	76.94	31.41	108.36	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2402 MHz		

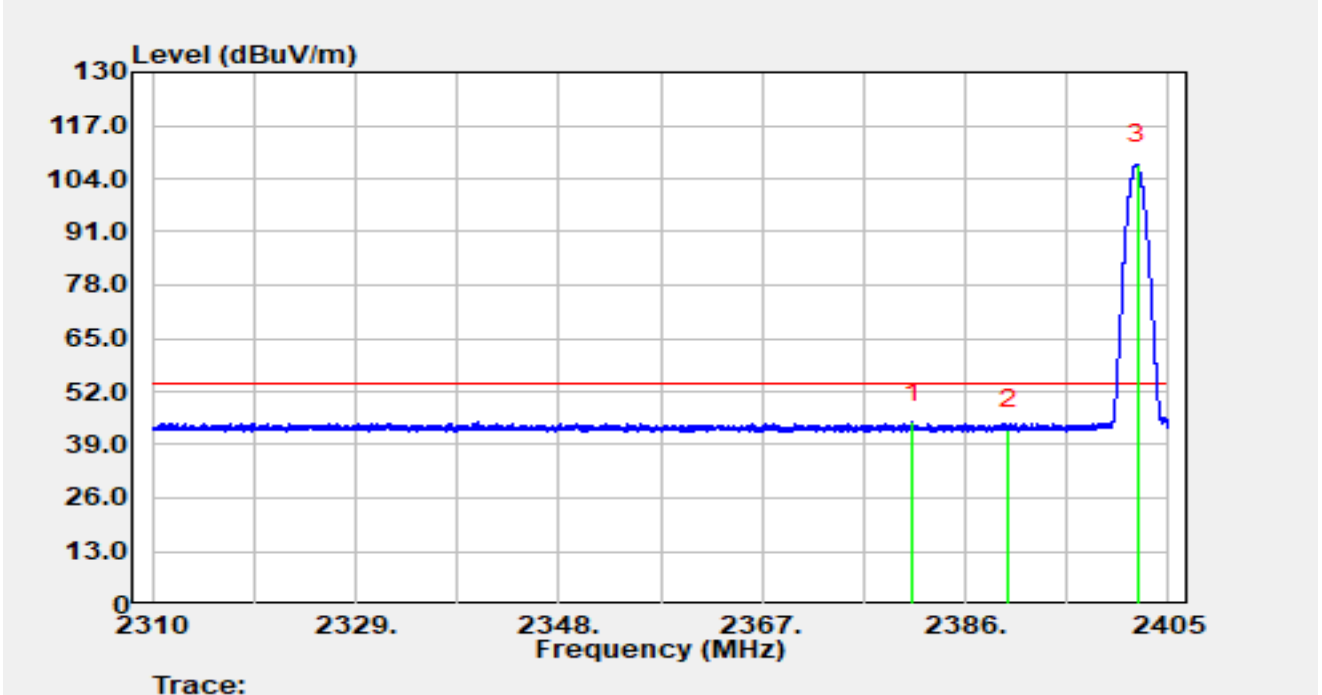


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2381.05	13.06	31.44	44.50	-9.50	54.00	Average
2		2390.00	11.28	31.43	42.71	-11.29	54.00	Average
3		2402.06	76.21	31.41	107.62	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2480 MHz		

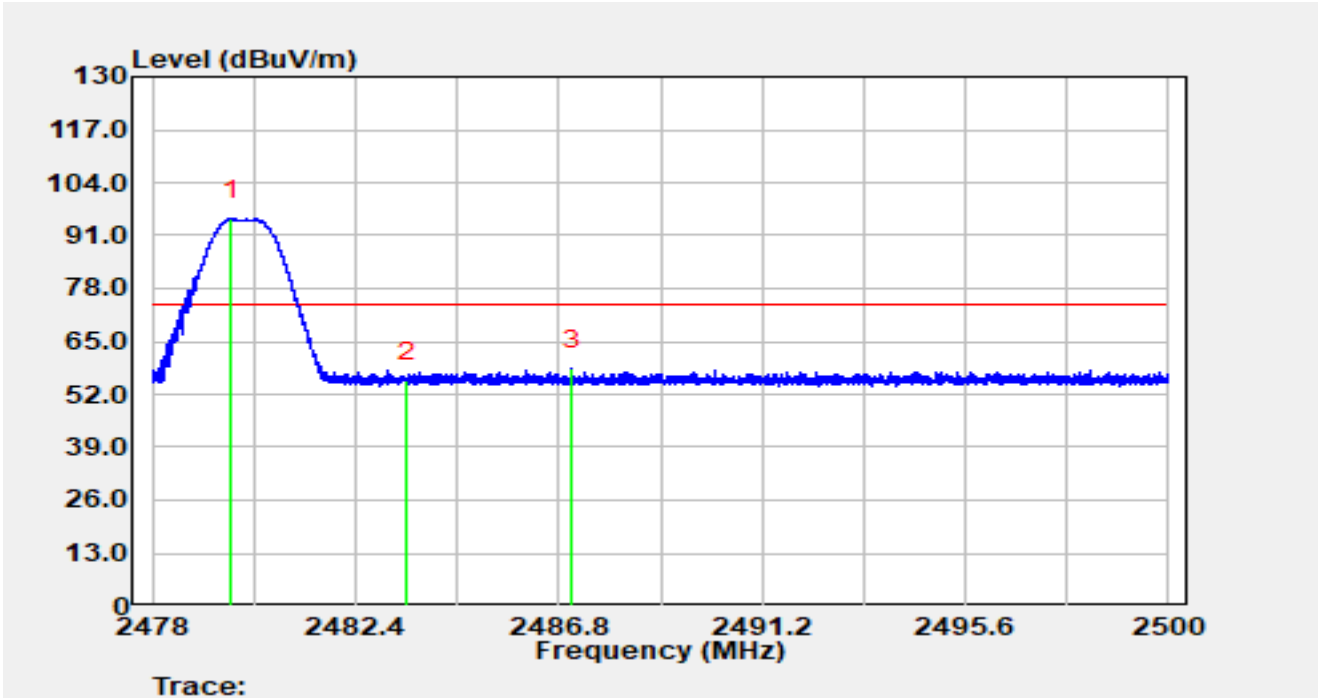


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.71	63.73	31.33	95.05	N/A	N/A	Peak
2		2483.50	23.87	31.32	55.19	-18.81	74.00	Peak
3	*	2487.09	26.93	31.31	58.24	-15.76	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2480 MHz		

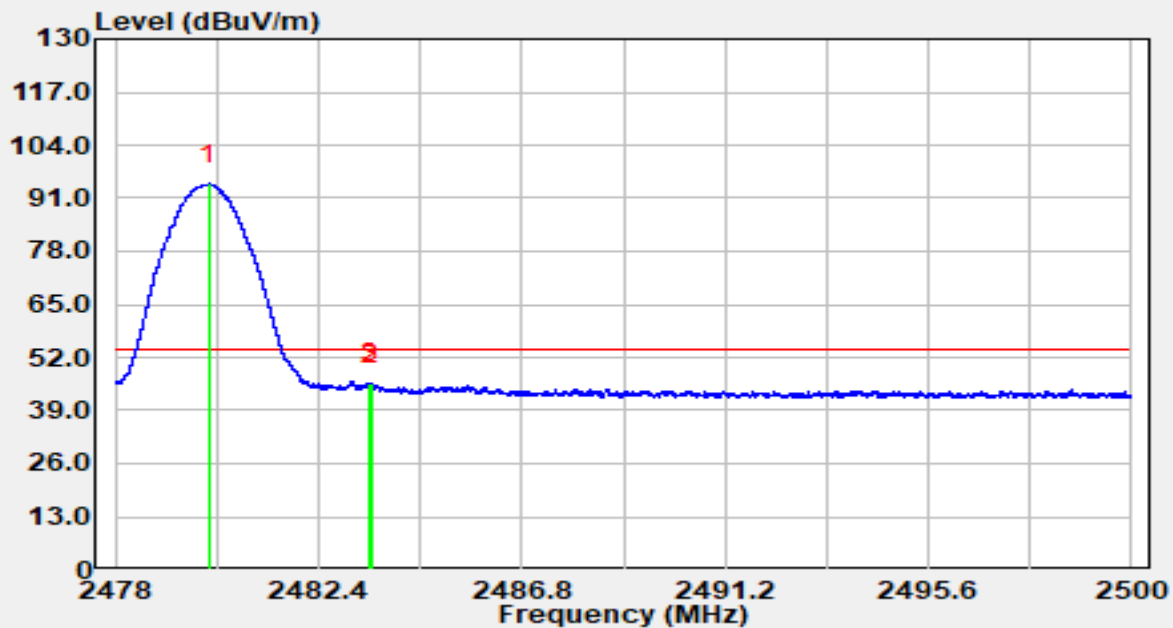


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.02	63.12	31.33	94.44	N/A	N/A	Average
2		2483.50	14.12	31.32	45.44	-8.56	54.00	Average
3	*	2483.53	14.32	31.32	45.64	-8.36	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2480 MHz		

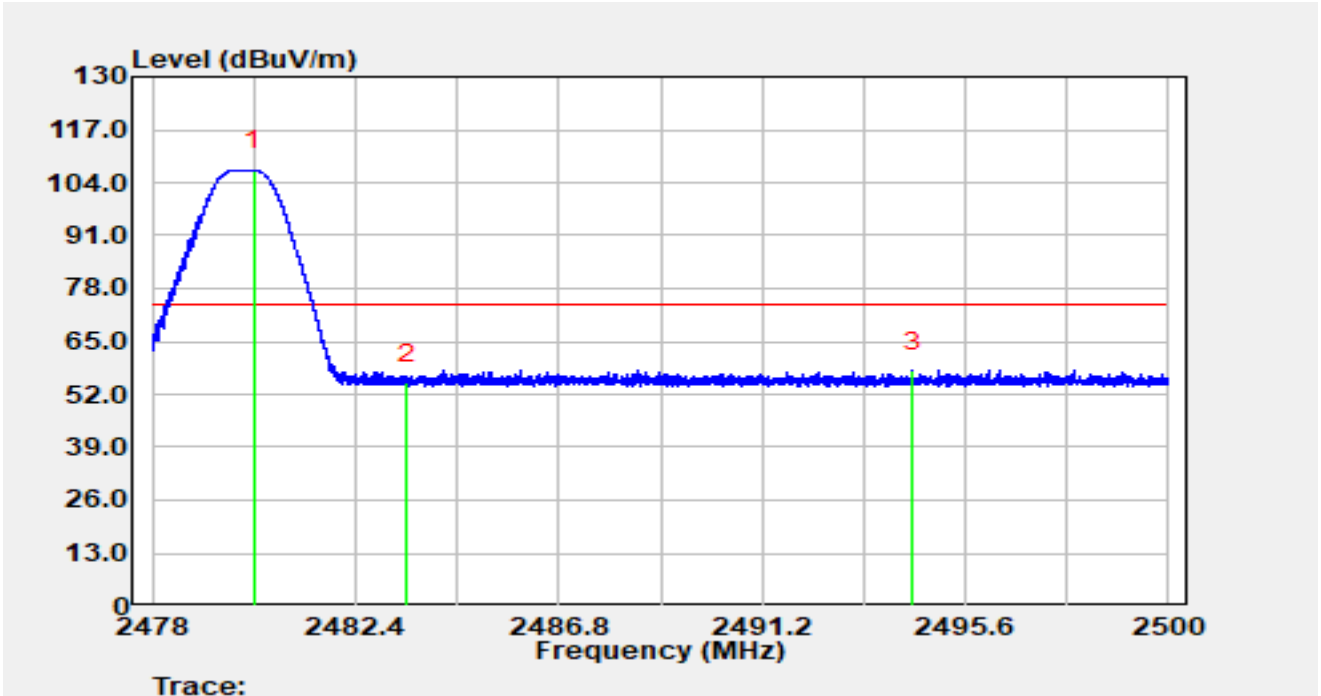


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.19	75.78	31.33	107.10	N/A	N/A	Peak
2		2483.50	23.47	31.32	54.79	-19.21	74.00	Peak
3	*	2494.45	26.57	31.31	57.88	-16.12	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2480 MHz		

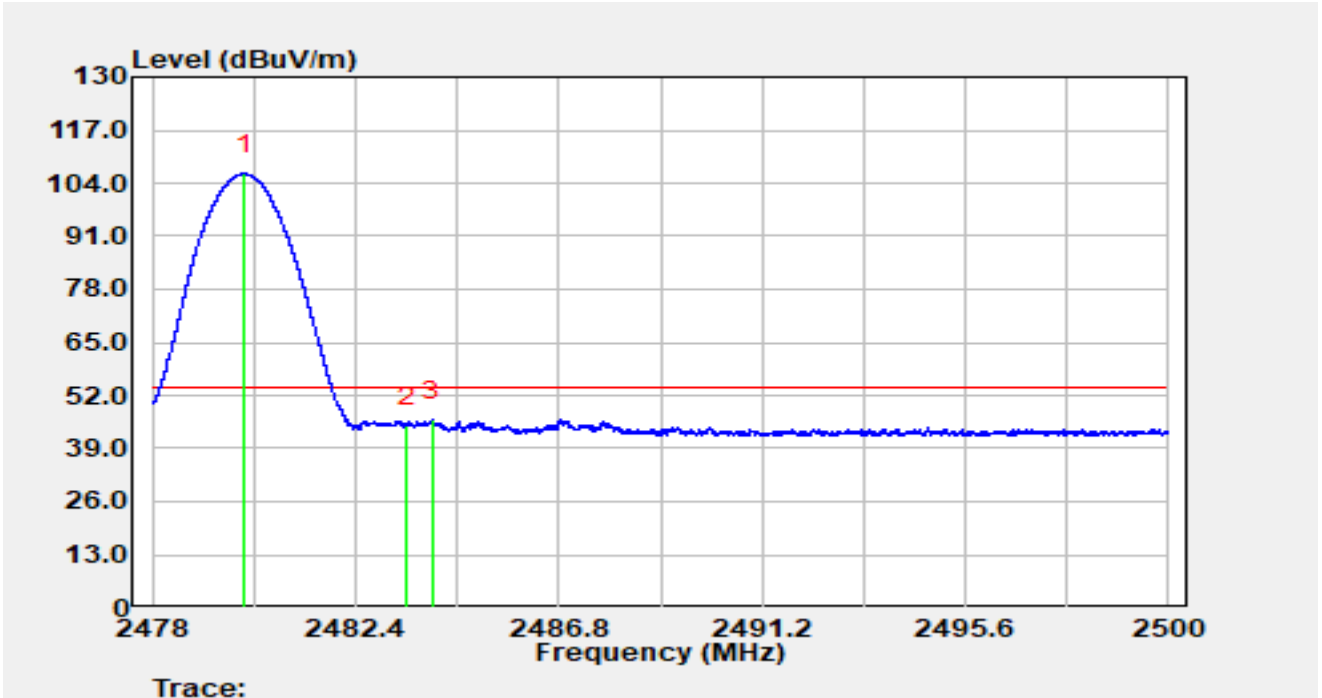


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.00	75.10	31.33	106.42	N/A	N/A	Average
2		2483.50	13.31	31.32	44.63	-9.37	54.00	Average
3	*	2484.06	14.55	31.32	45.87	-8.13	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2402 MHz		

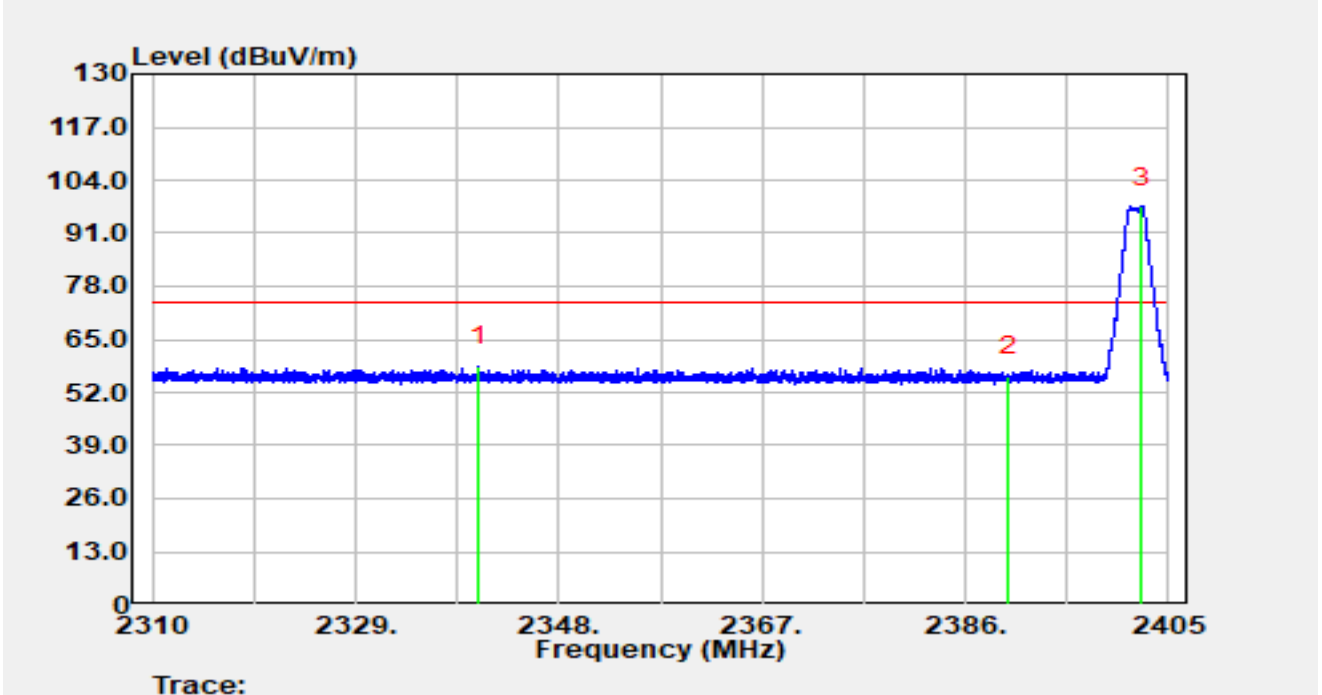


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2340.48	26.84	31.57	58.41	-15.59	74.00	Peak
2		2390.00	24.55	31.43	55.98	-18.02	74.00	Peak
3		2402.46	66.16	31.41	97.57	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2402 MHz		

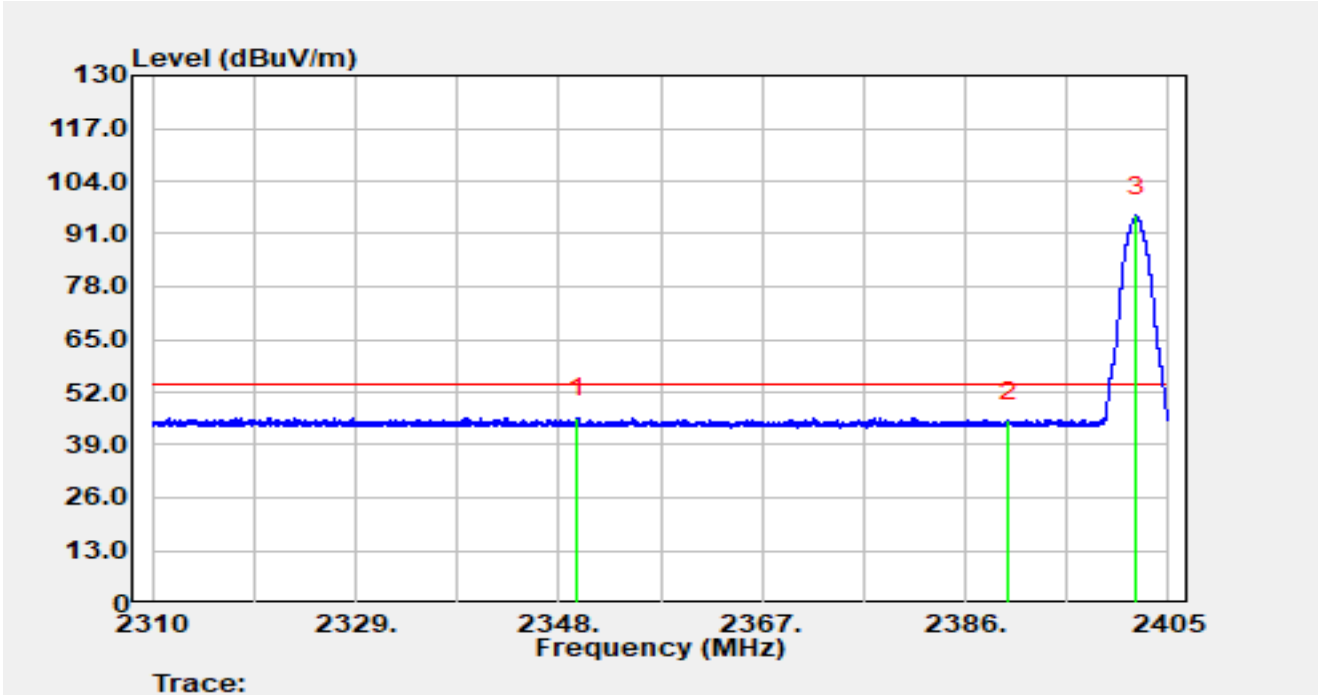


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2349.78	14.31	31.55	45.86	-8.14	54.00	Average
2		2390.00	13.50	31.43	44.93	-9.07	54.00	Average
3		2401.97	64.06	31.41	95.47	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2402 MHz		

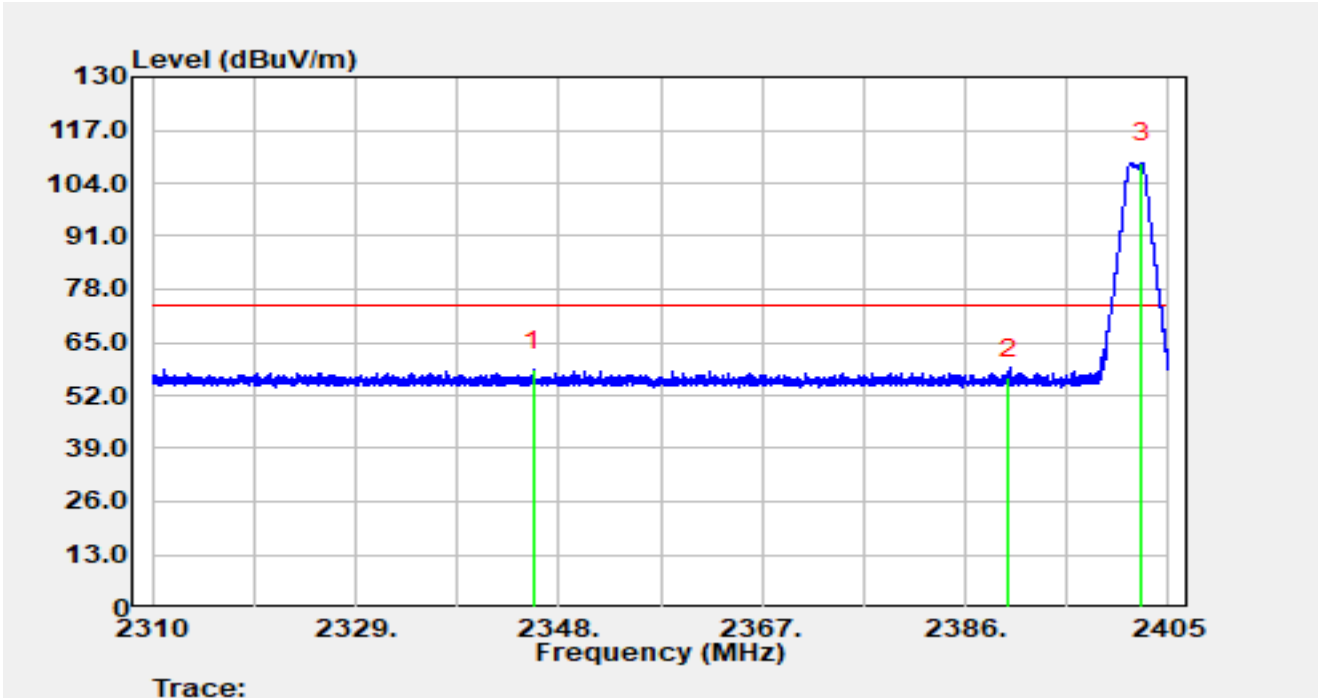


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2345.61	26.80	31.56	58.36	-15.64	74.00	Peak
2		2390.00	24.82	31.43	56.25	-17.75	74.00	Peak
3		2402.46	77.51	31.41	108.92	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2402 MHz		

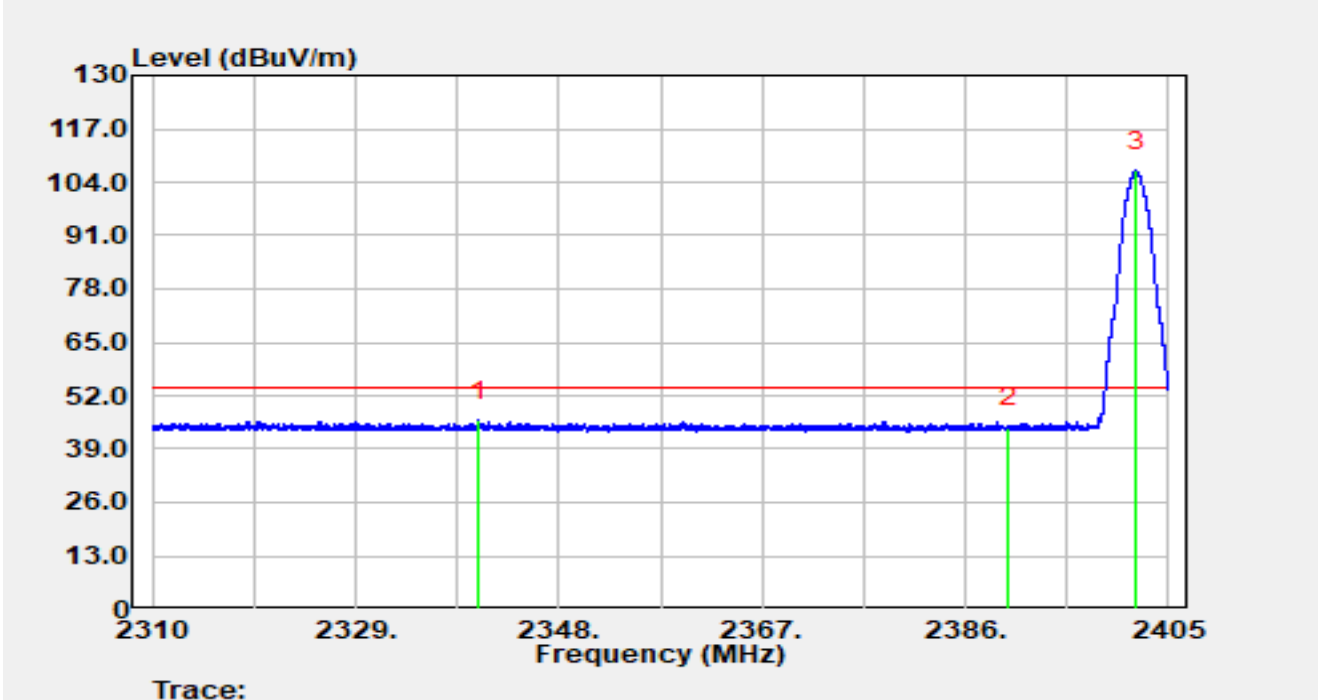


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2340.46	14.50	31.57	46.08	-7.92	54.00	Average
2		2390.00	12.74	31.43	44.17	-9.83	54.00	Average
3		2402.02	75.34	31.41	106.75	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2480 MHz		

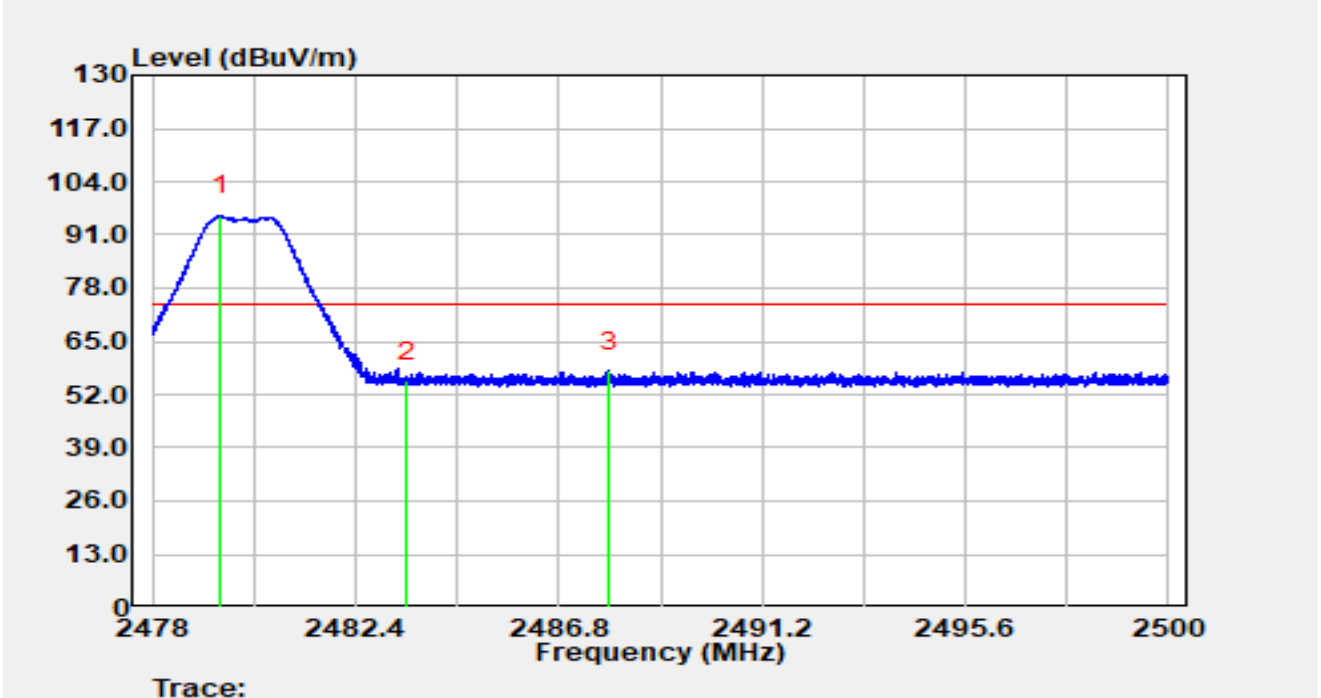


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.47	64.39	31.33	95.71	N/A	N/A	Peak
2		2483.50	24.08	31.32	55.40	-18.60	74.00	Peak
3	*	2487.89	26.48	31.31	57.80	-16.20	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2480 MHz		

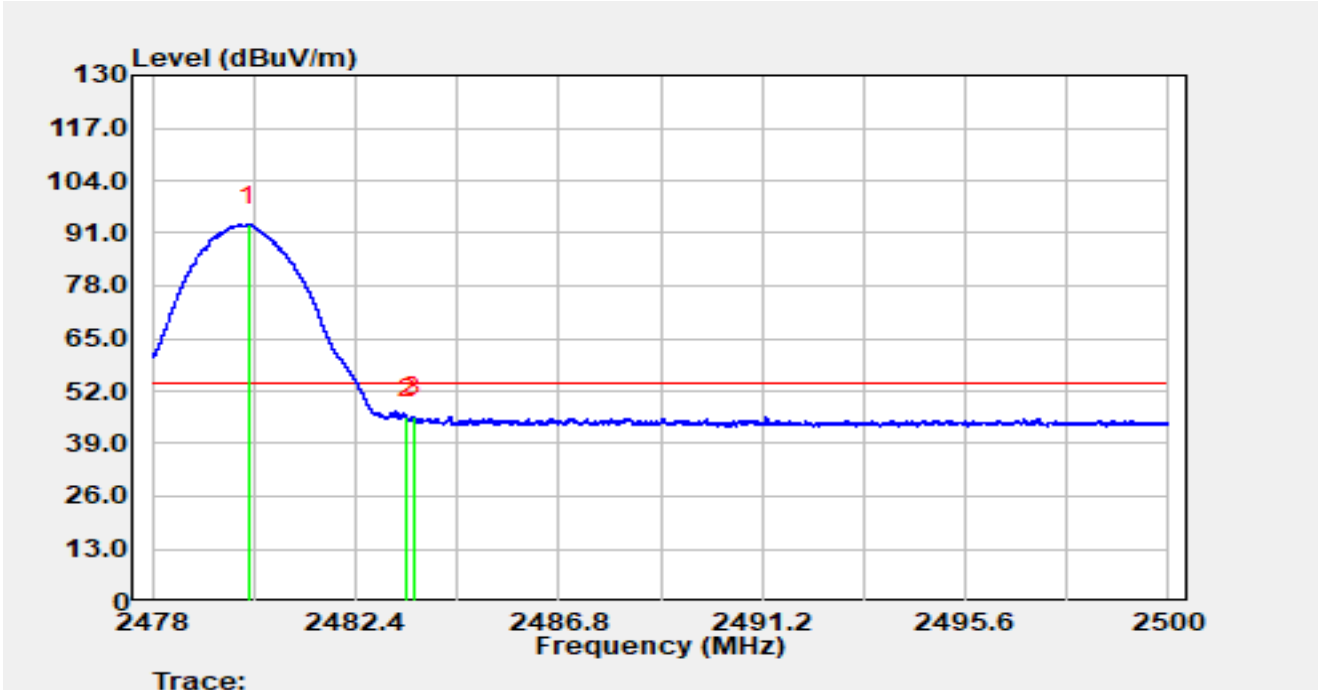


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.09	61.73	31.33	93.06	N/A	N/A	Average
2		2483.50	14.22	31.32	45.54	-8.46	54.00	Average
3	*	2483.65	14.46	31.32	45.78	-8.22	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2480 MHz		

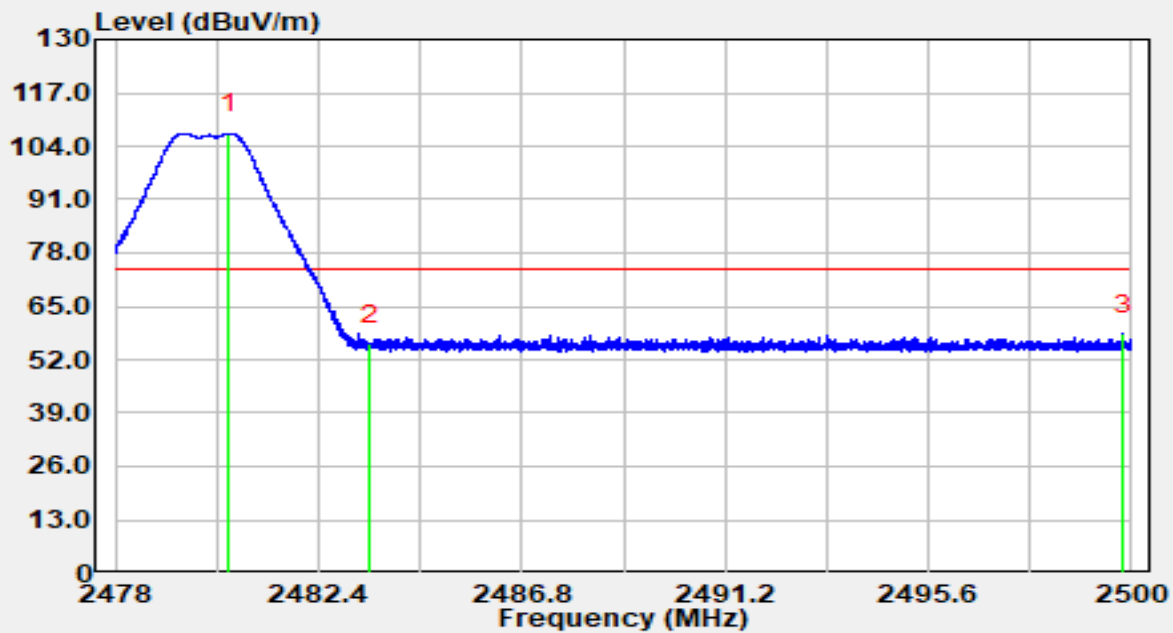


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.45	75.86	31.32	107.18	N/A	N/A	Peak
2		2483.50	24.42	31.32	55.74	-18.26	74.00	Peak
3	*	2499.82	26.85	31.31	58.16	-15.84	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2480 MHz		

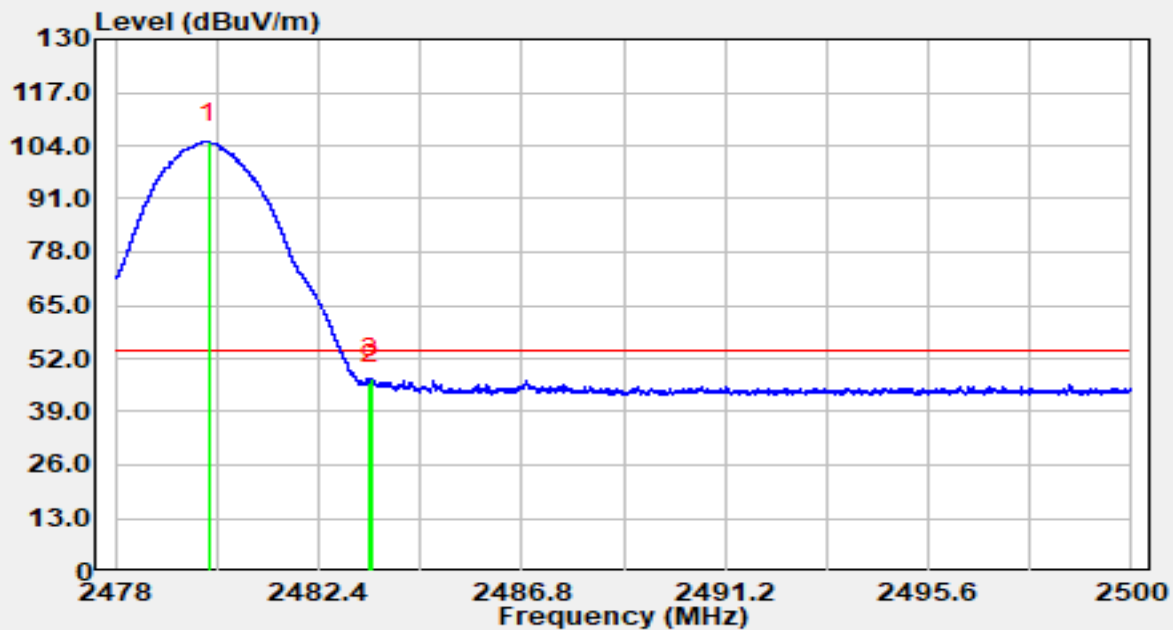


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2480.03	73.59	31.33	104.92	N/A	N/A	Average
2		2483.50	14.73	31.32	46.05	-7.95	54.00	Average
3	*	2483.53	15.79	31.32	47.11	-6.89	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2402 MHz		

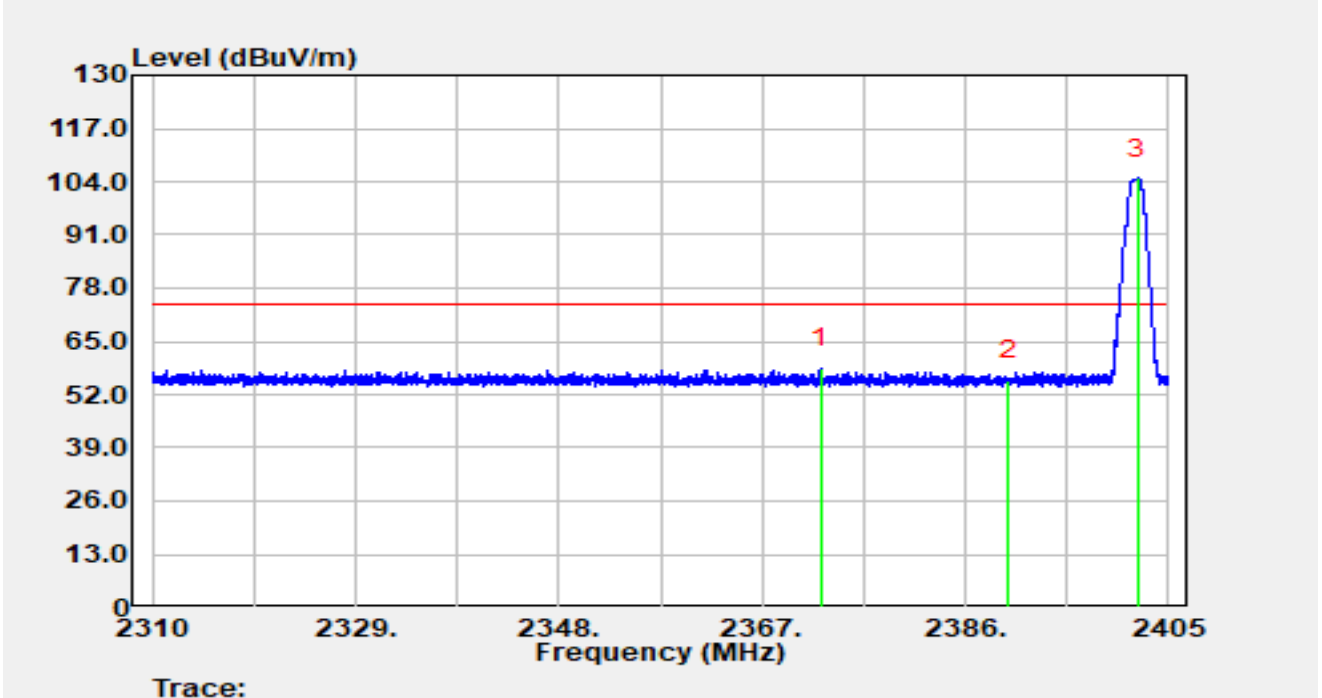


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.43	27.01	31.47	58.48	-15.52	74.00	Peak
2		2390.00	24.24	31.43	55.67	-18.33	74.00	Peak
3		2402.07	73.33	31.41	104.74	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2402 MHz		

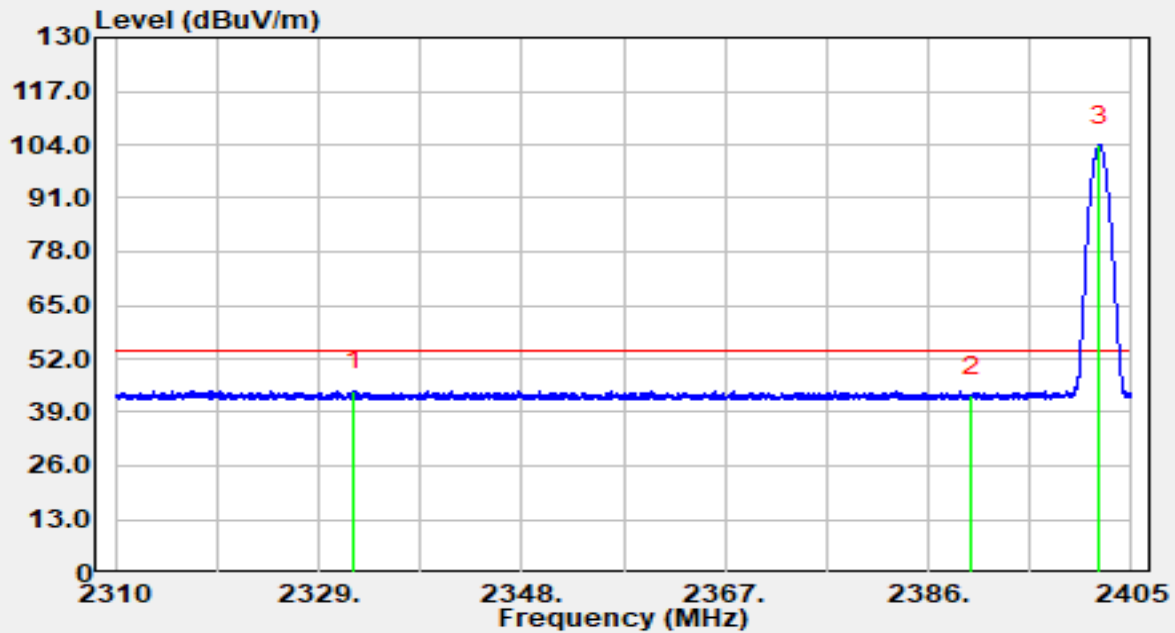


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2332.36	12.57	31.60	44.18	-9.82	54.00	Average
2		2390.00	11.64	31.43	43.07	-10.93	54.00	Average
3		2402.03	72.52	31.41	103.93	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2402 MHz		

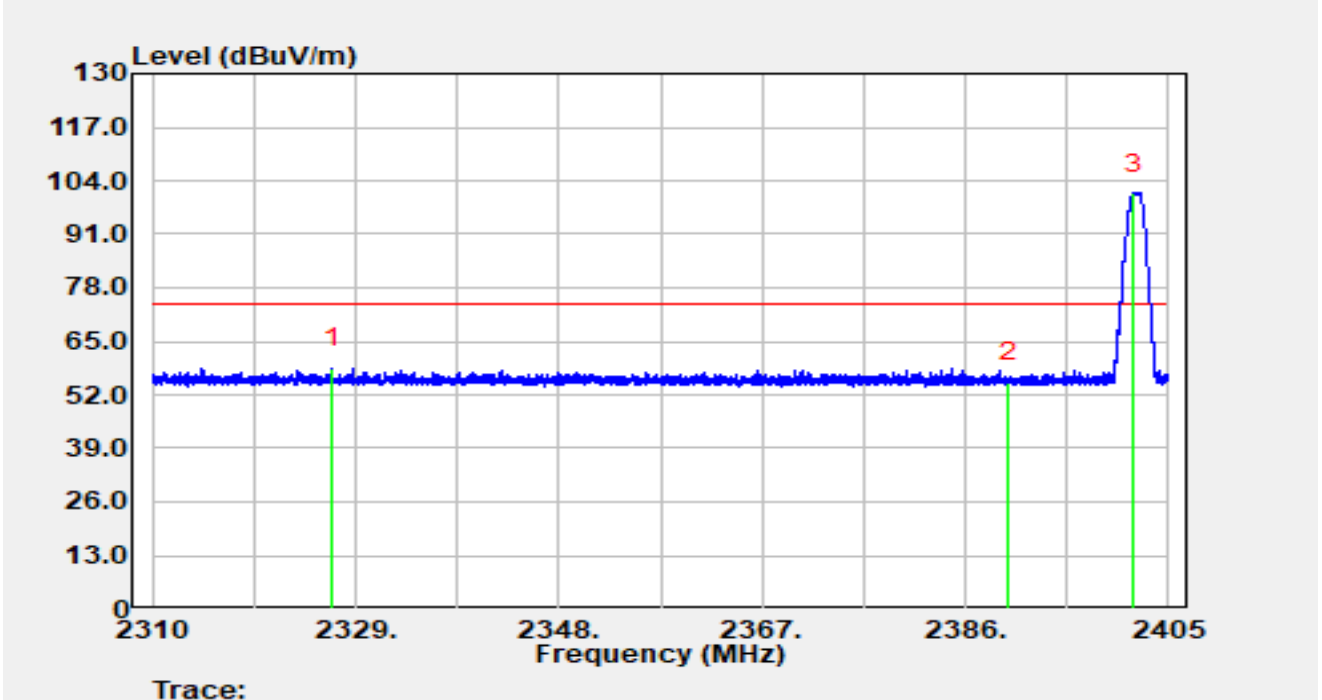


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2326.78	26.88	31.62	58.49	-15.51	74.00	Peak
2		2390.00	23.63	31.43	55.06	-18.94	74.00	Peak
3		2401.73	69.64	31.41	101.05	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2402 MHz		

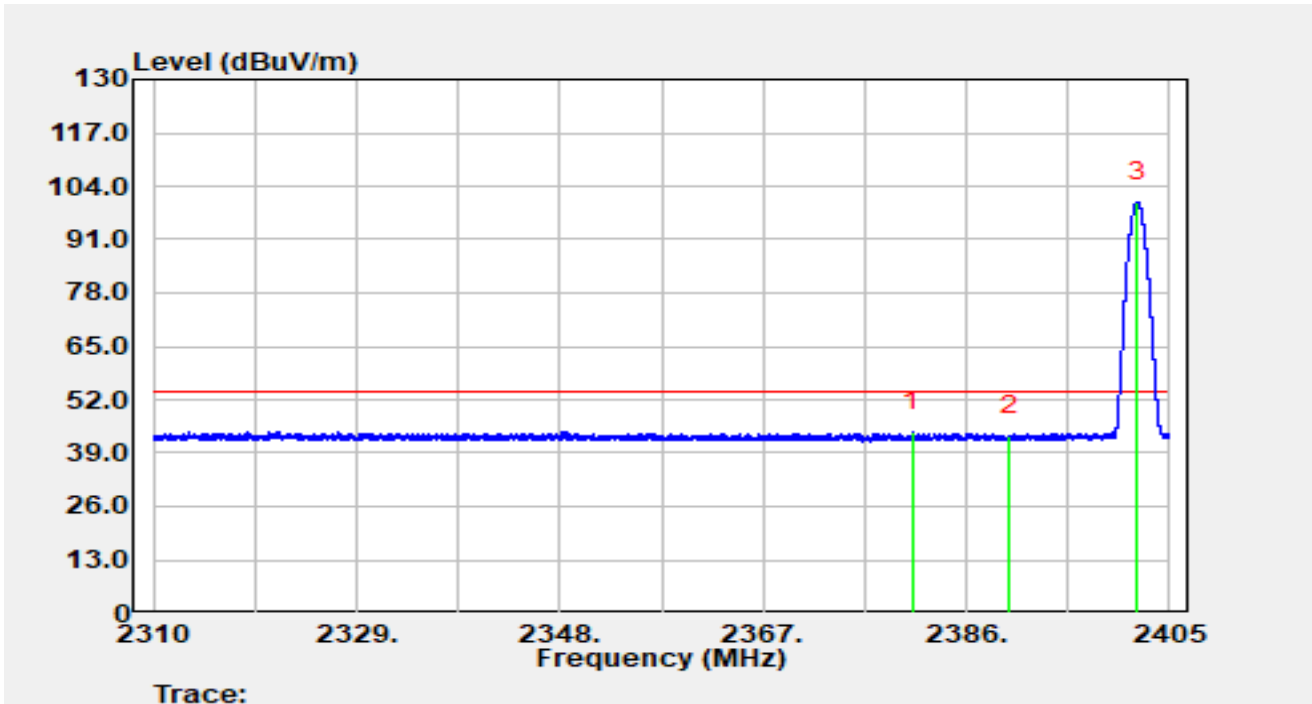


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.99	12.89	31.44	44.33	-9.67	54.00	Average
2		2390.00	11.87	31.43	43.30	-10.70	54.00	Average
3		2401.97	68.78	31.41	100.20	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2480 MHz		

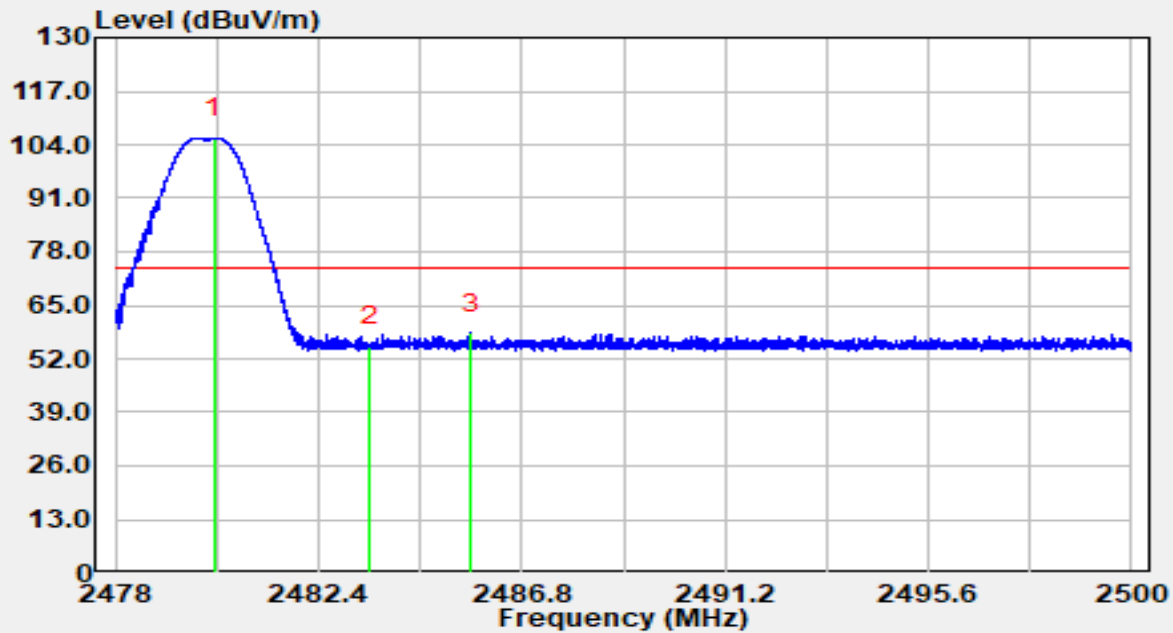


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.13	74.23	31.33	105.55	N/A	N/A	Peak
2		2483.50	23.72	31.32	55.04	-18.96	74.00	Peak
3	*	2485.70	26.98	31.32	58.30	-15.70	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 1M at 2480 MHz		

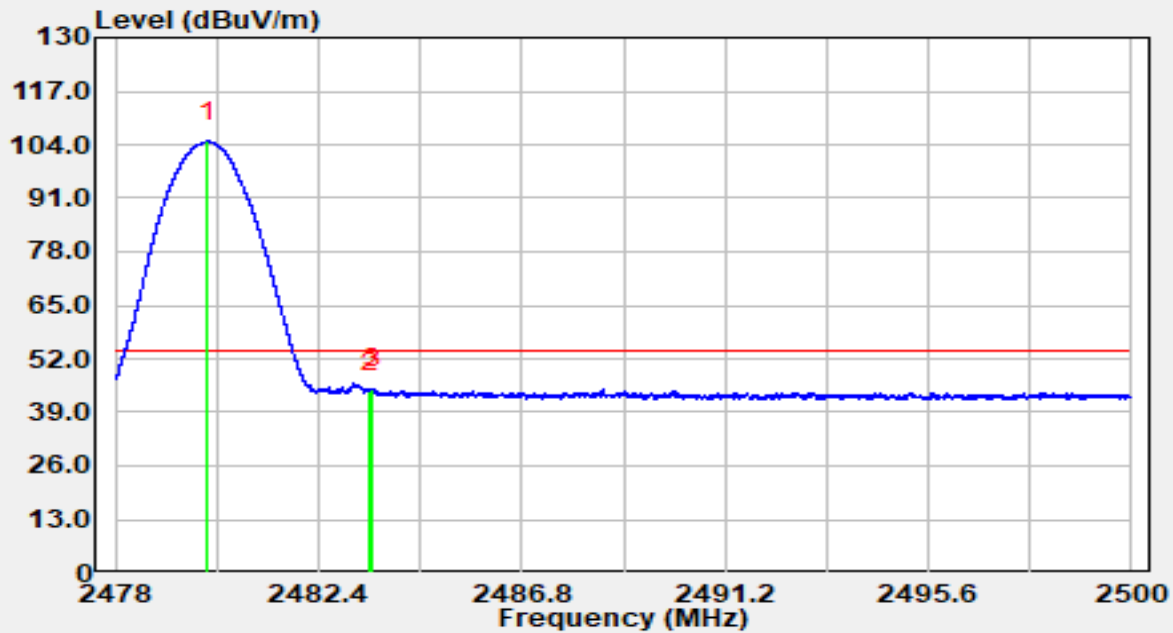


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.99	73.44	31.33	104.76	N/A	N/A	Average
2		2483.50	12.76	31.32	44.08	-9.92	54.00	Average
3	*	2483.56	13.44	31.32	44.76	-9.24	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2480 MHz		

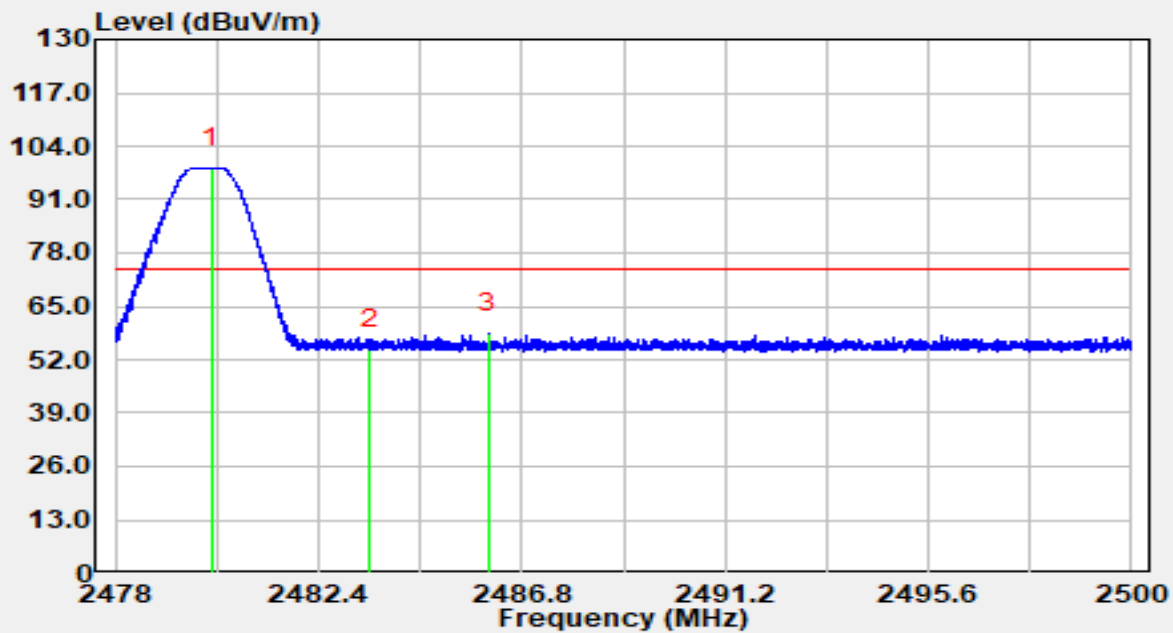


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.07	67.47	31.33	98.79	N/A	N/A	Peak
2		2483.50	23.26	31.32	54.58	-19.42	74.00	Peak
3	*	2486.08	27.24	31.32	58.56	-15.44	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 1M at 2480 MHz		

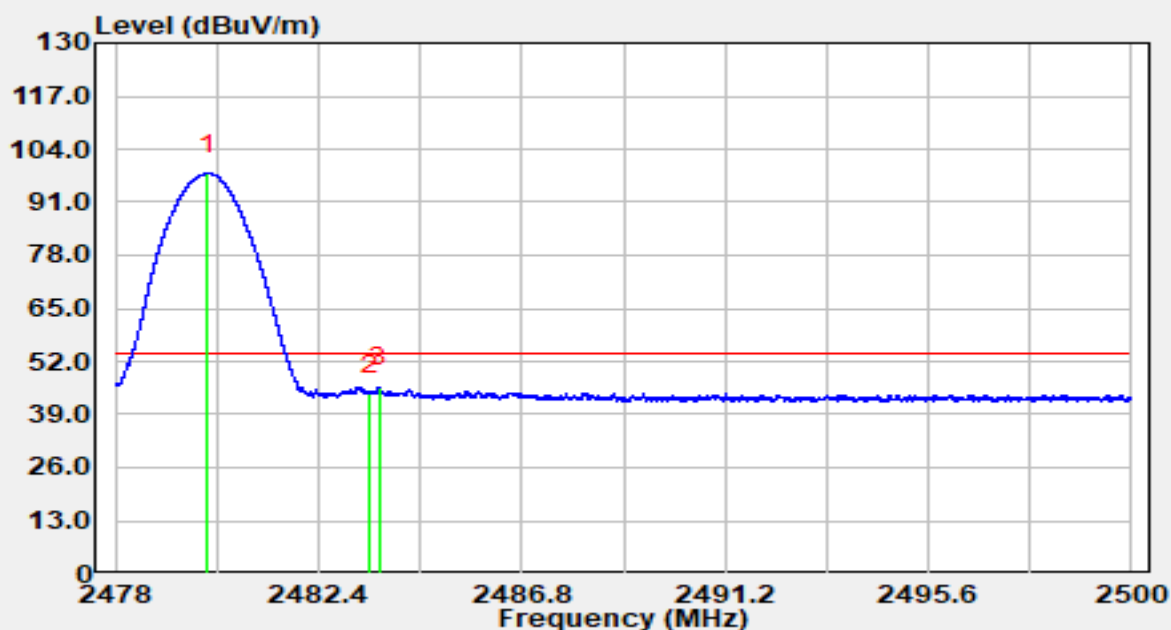


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.99	66.77	31.33	98.10	N/A	N/A	Average
2		2483.50	12.74	31.32	44.06	-9.94	54.00	Average
3	*	2483.71	14.40	31.32	45.72	-8.28	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2402 MHz		

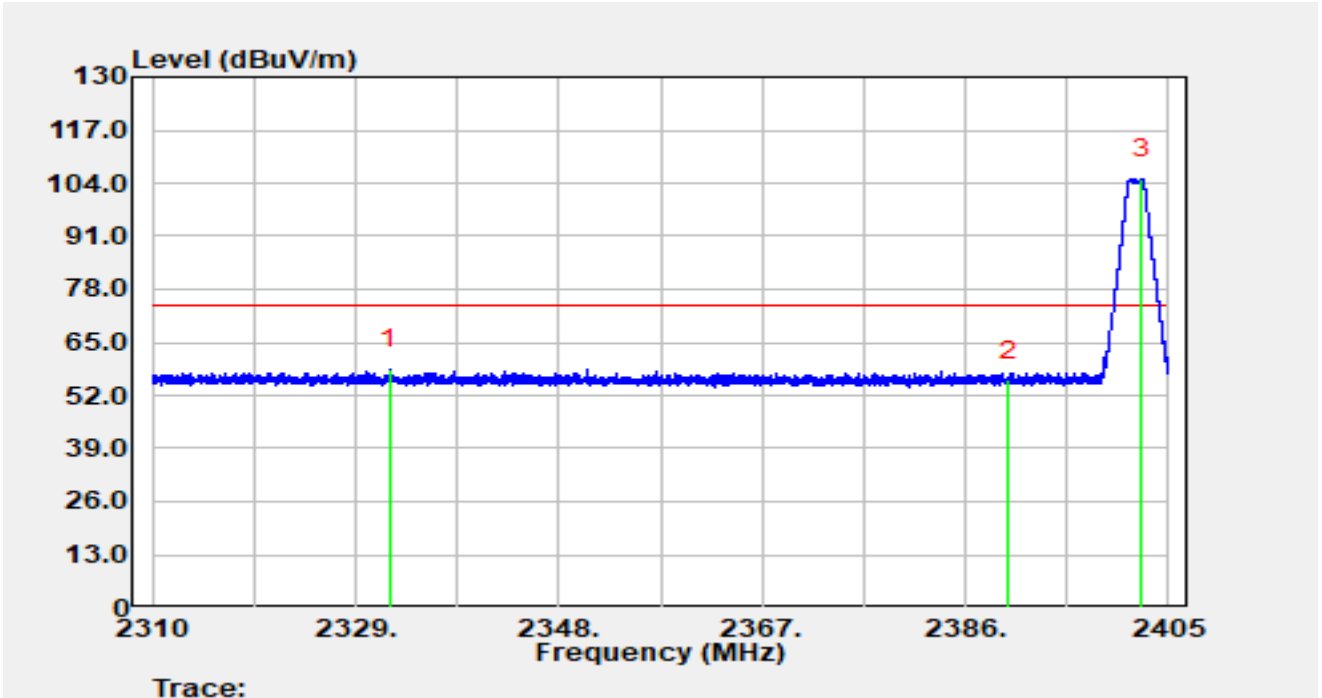


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2332.23	26.81	31.60	58.42	-15.58	74.00	Peak
2		2390.00	24.25	31.43	55.68	-18.32	74.00	Peak
3		2402.46	73.79	31.41	105.20	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2402 MHz		

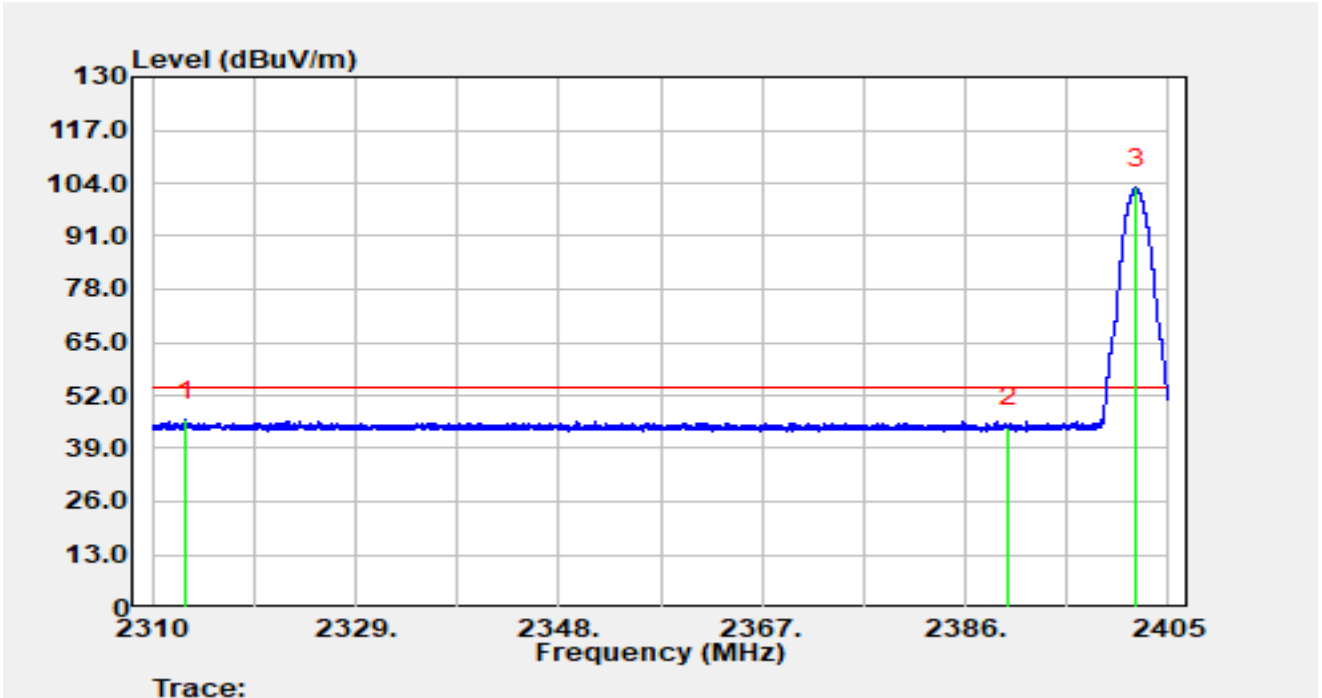


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2313.08	14.27	31.65	45.92	-8.08	54.00	Average
2		2390.00	12.72	31.43	44.15	-9.85	54.00	Average
3		2402.03	71.51	31.41	102.92	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2402 MHz		

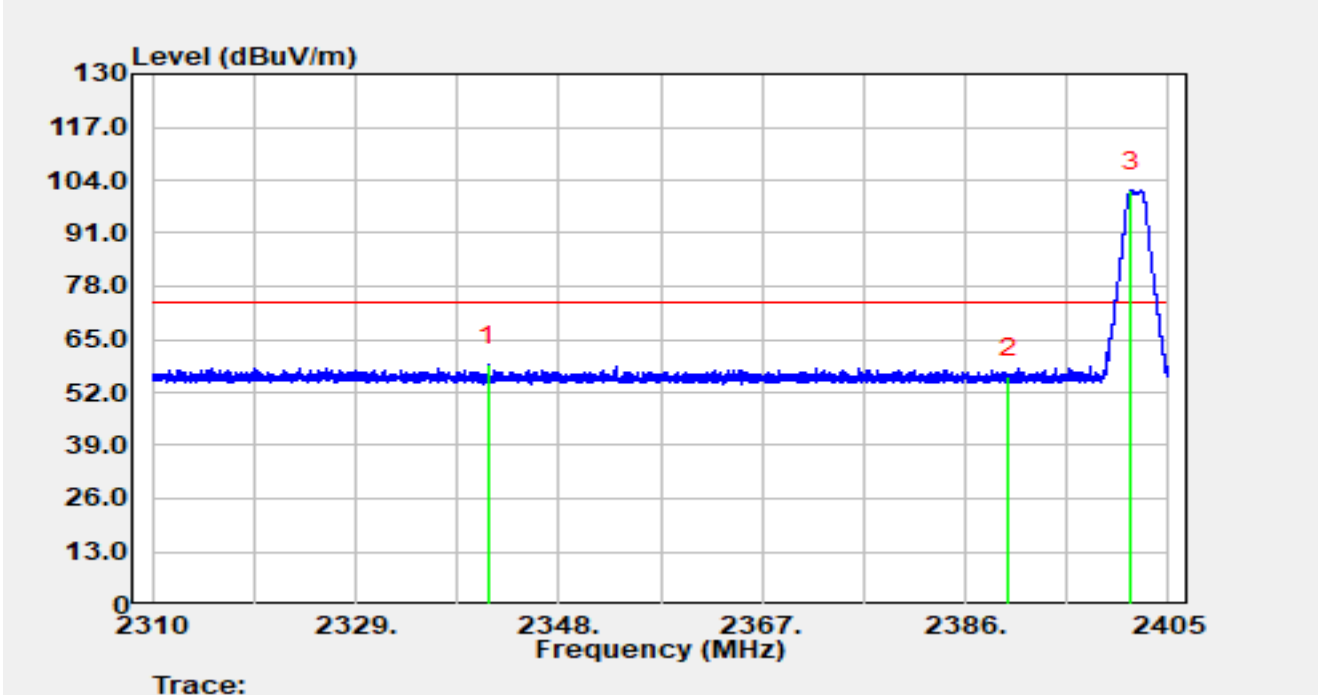


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2341.41	27.11	31.57	58.68	-15.32	74.00	Peak
2		2390.00	24.48	31.43	55.91	-18.09	74.00	Peak
3		2401.49	70.09	31.41	101.50	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2402 MHz		

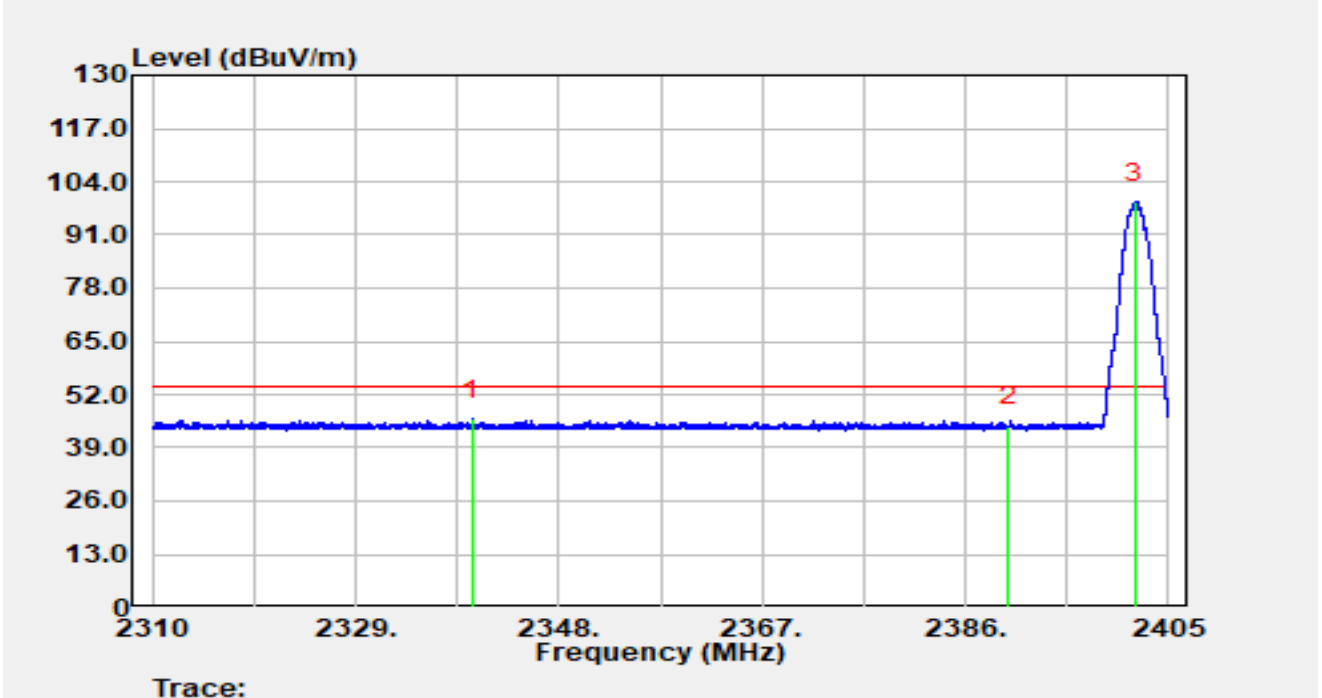


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2339.92	14.36	31.58	45.94	-8.06	54.00	Average
2		2390.00	12.82	31.43	44.24	-9.76	54.00	Average
3		2401.90	67.65	31.41	99.06	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2480 MHz		

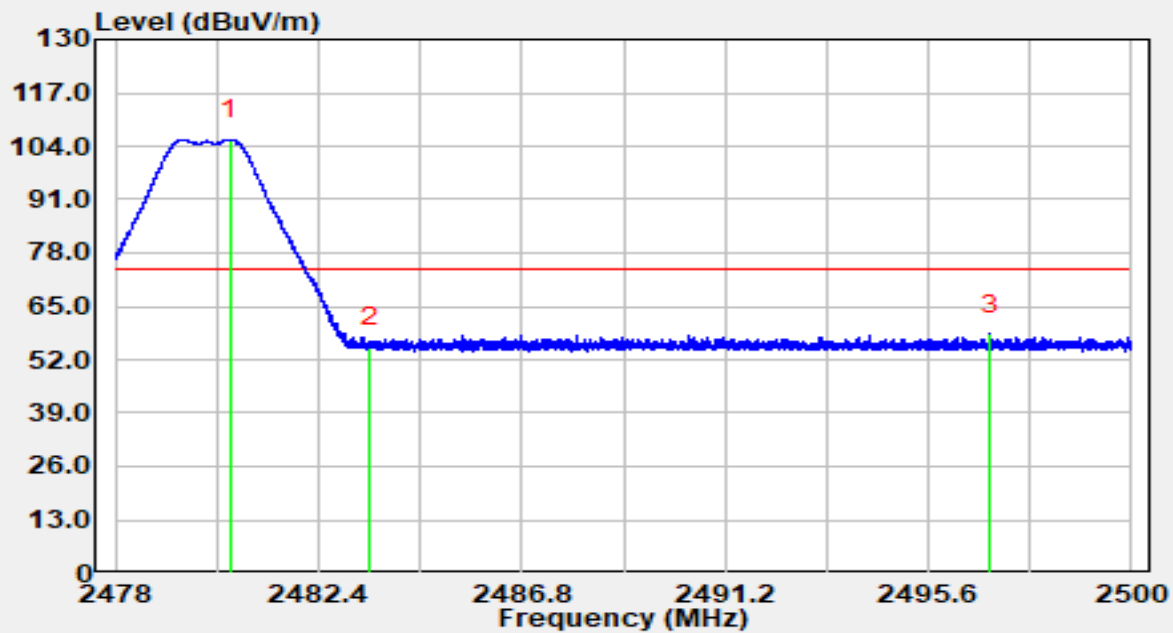


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.48	74.34	31.32	105.67	N/A	N/A	Peak
2		2483.50	23.85	31.32	55.17	-18.83	74.00	Peak
3	*	2496.94	26.84	31.31	58.15	-15.85	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by BLE 2M at 2480 MHz		

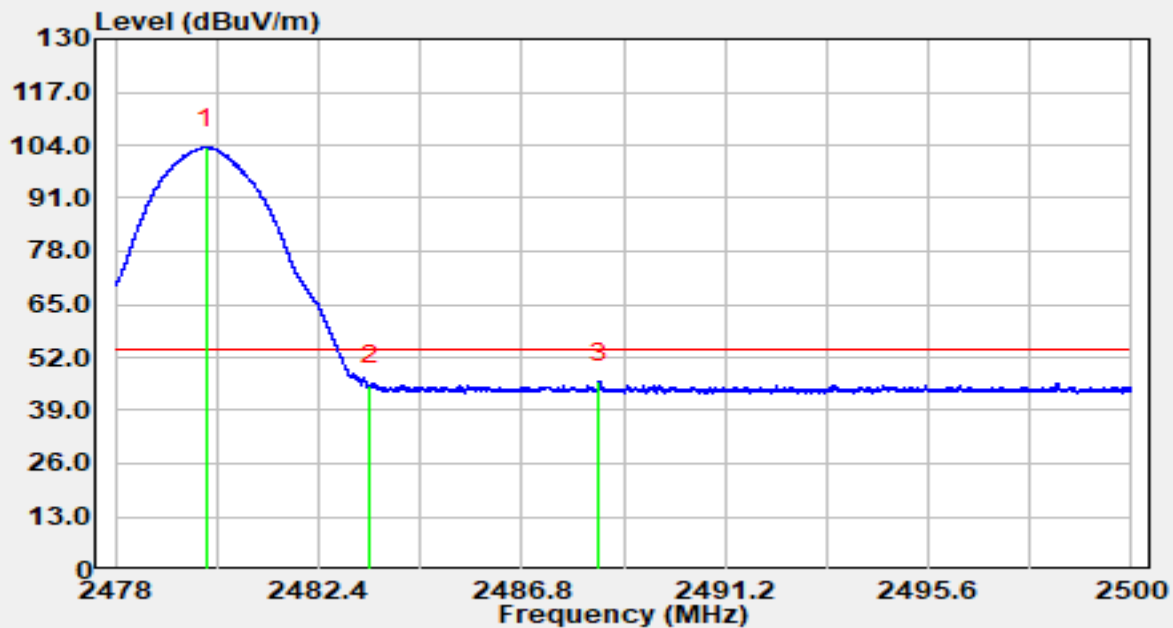


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.97	72.16	31.33	103.49	N/A	N/A	Average
2		2483.50	13.89	31.32	45.21	-8.79	54.00	Average
3	*	2488.48	14.71	31.31	46.03	-7.97	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2480 MHz		

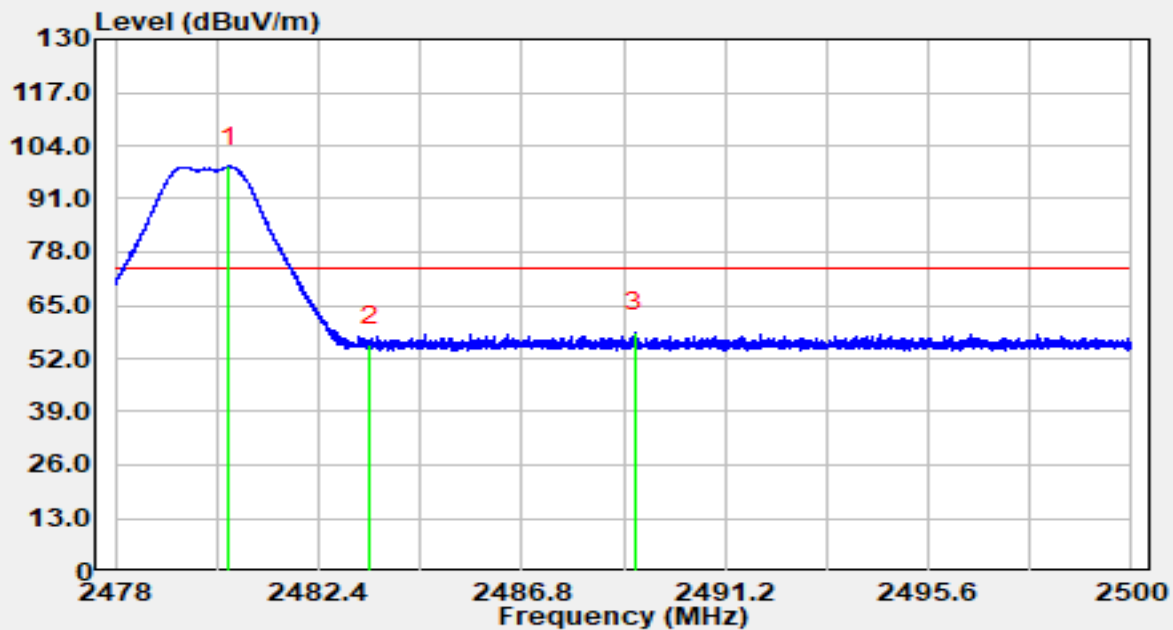


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.46	67.67	31.32	98.99	N/A	N/A	Peak
2		2483.50	24.09	31.32	55.41	-18.59	74.00	Peak
3	*	2489.24	27.13	31.31	58.44	-15.56	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-08-07
Temperature	25.5 °C	Humidity	41.6%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by BLE 2M at 2480 MHz		

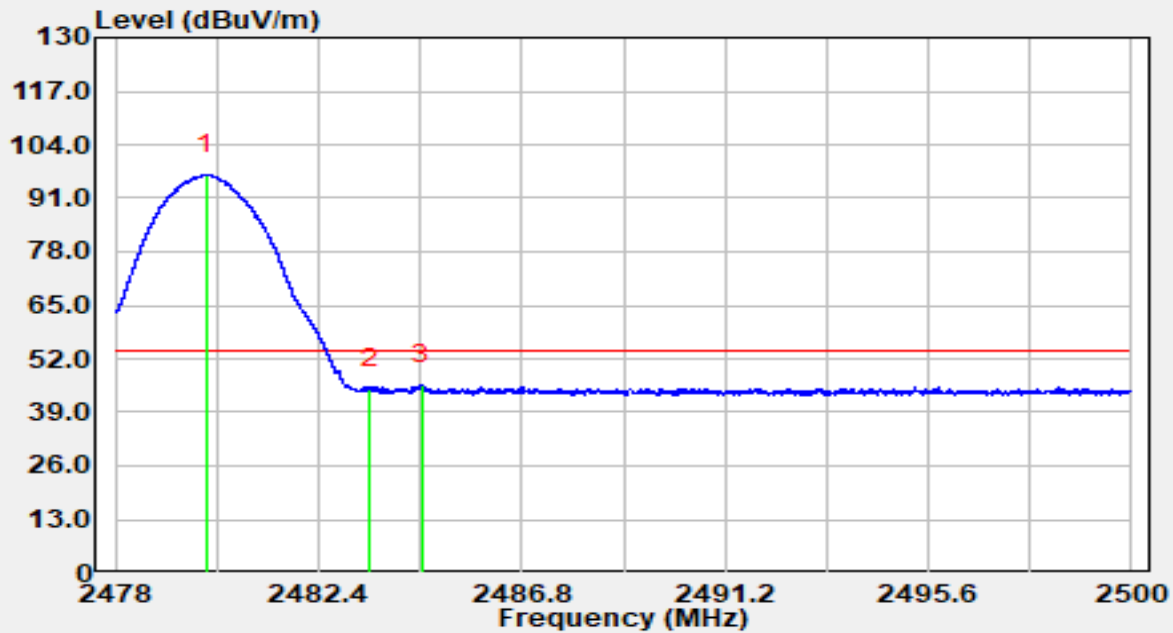

Trace:


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.96	65.43	31.33	96.75	N/A	N/A	Average
2		2483.50	13.46	31.32	44.78	-9.22	54.00	Average
3	*	2484.62	14.38	31.32	45.70	-8.30	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by BLE 1M at 2440 MHz		

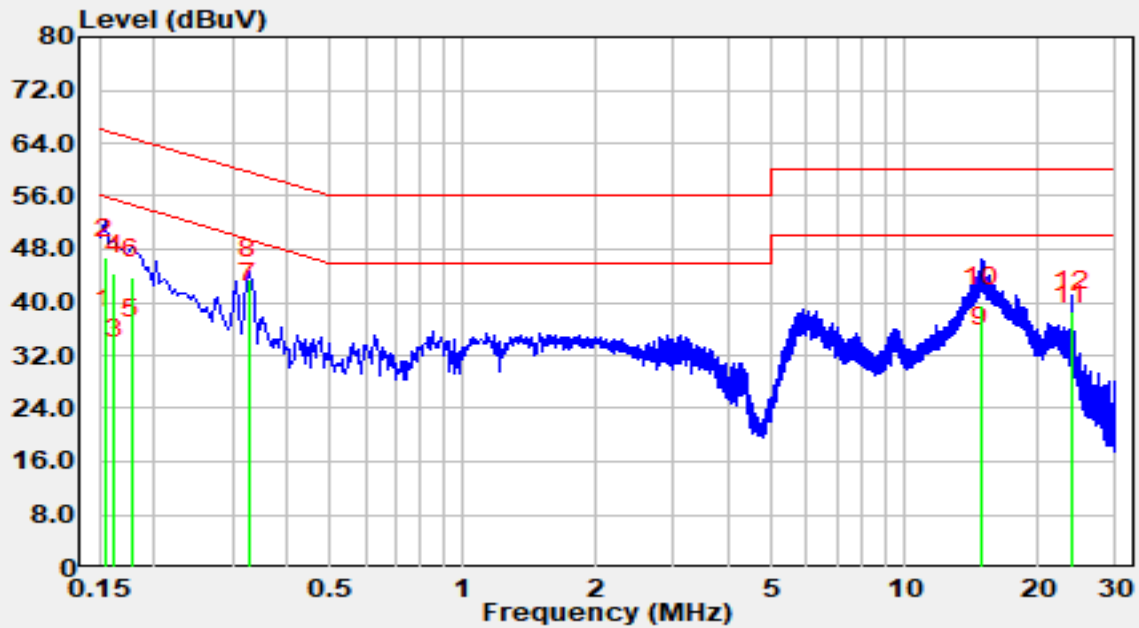


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	26.50	9.67	36.17	-19.61	55.78	Average
2		0.15	37.00	9.67	46.67	-19.11	65.78	QP
3		0.16	22.00	9.67	31.67	-23.69	55.36	Average
4		0.16	34.70	9.67	44.37	-20.99	65.36	QP
5		0.18	24.80	9.68	34.48	-20.10	54.58	Average
6		0.18	34.00	9.68	43.68	-20.90	64.58	QP
7	*	0.33	30.40	9.73	40.13	-9.42	49.55	Average
8		0.33	33.80	9.73	43.53	-16.02	59.55	QP
9		14.89	23.00	10.41	33.41	-16.59	50.00	Average
10		14.89	29.00	10.41	39.41	-20.59	60.00	QP
11		23.90	26.10	10.67	36.77	-13.23	50.00	Average
12		23.90	28.00	10.67	38.67	-21.33	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by BLE 1M at 2440 MHz		

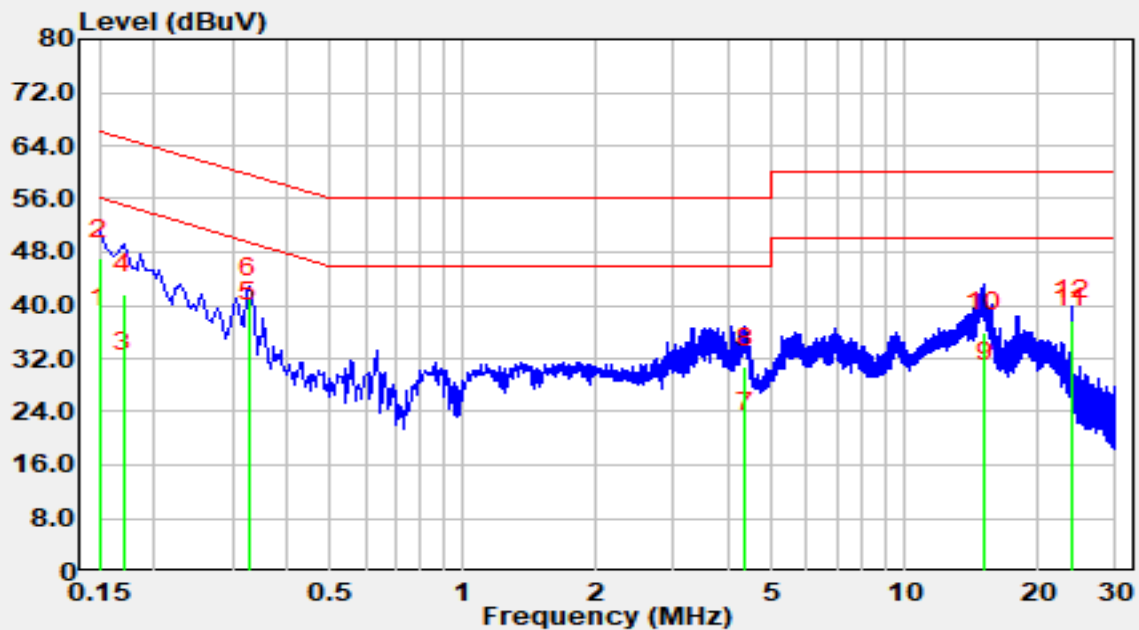

Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	26.90	9.79	36.69	-19.31	56.00	Average
2		0.15	37.30	9.79	47.09	-18.91	66.00	QP
3		0.17	20.10	9.80	29.90	-25.06	54.96	Average
4		0.17	31.90	9.80	41.70	-23.26	64.96	QP
5	*	0.33	27.80	9.83	37.63	-11.92	49.55	Average
6		0.33	31.30	9.83	41.13	-18.42	59.55	QP
7		4.36	10.70	10.19	20.89	-25.11	46.00	Average
8		4.36	20.60	10.19	30.79	-25.21	56.00	QP
9		15.20	17.90	10.55	28.45	-21.55	50.00	Average
10		15.20	25.40	10.55	35.95	-24.05	60.00	QP
11		23.90	25.80	10.80	36.60	-13.40	50.00	Average
12		23.90	27.00	10.80	37.80	-22.20	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1034072-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1034072-UE" file.

_____ The End _____