


|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Vertical

130 dBuV/m

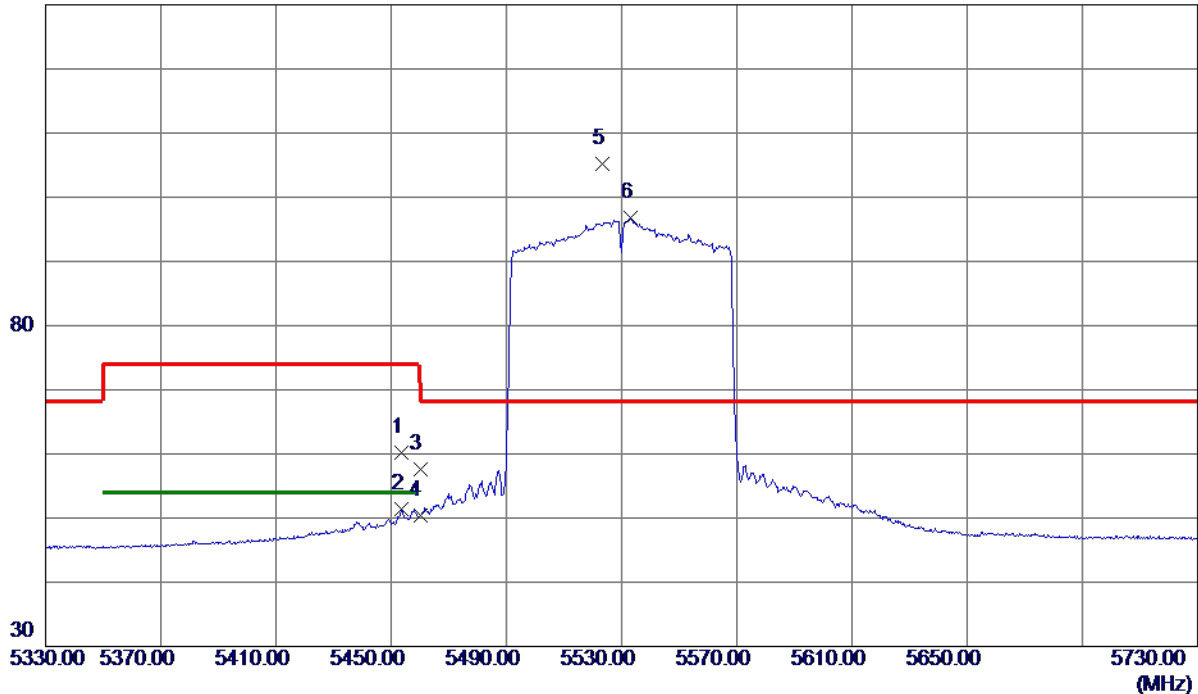

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5453.6000    | 43.23                      | 16.88                   | 60.11                     | 74.00           | -13.89       | Peak     |          |
| 2   | 5453.6000    | 34.50                      | 16.88                   | 51.38                     | 54.00           | -2.62        | AVG      |          |
| 3   | 5460.0000    | 40.69                      | 16.89                   | 57.58                     | 74.00           | -16.42       | Peak     |          |
| 4   | 5460.0000    | 33.46                      | 16.89                   | 50.35                     | 54.00           | -3.65        | AVG      |          |
| 5 * | 5523.4000    | 88.15                      | 17.05                   | 105.20                    | 68.30           | 36.90        | Peak     | No Limit |
| 6   | 5533.2000    | 79.69                      | 17.08                   | 96.77                     | 999.00          | -902.23      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11058.8530   | 39.31                      | 14.00                   | 53.31                     | 54.00           | -0.69        | AVG      |         |
| 2   | 11061.6980   | 52.56                      | 14.00                   | 66.56                     | 74.00           | -7.44        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Horizontal

130 dBuV/m

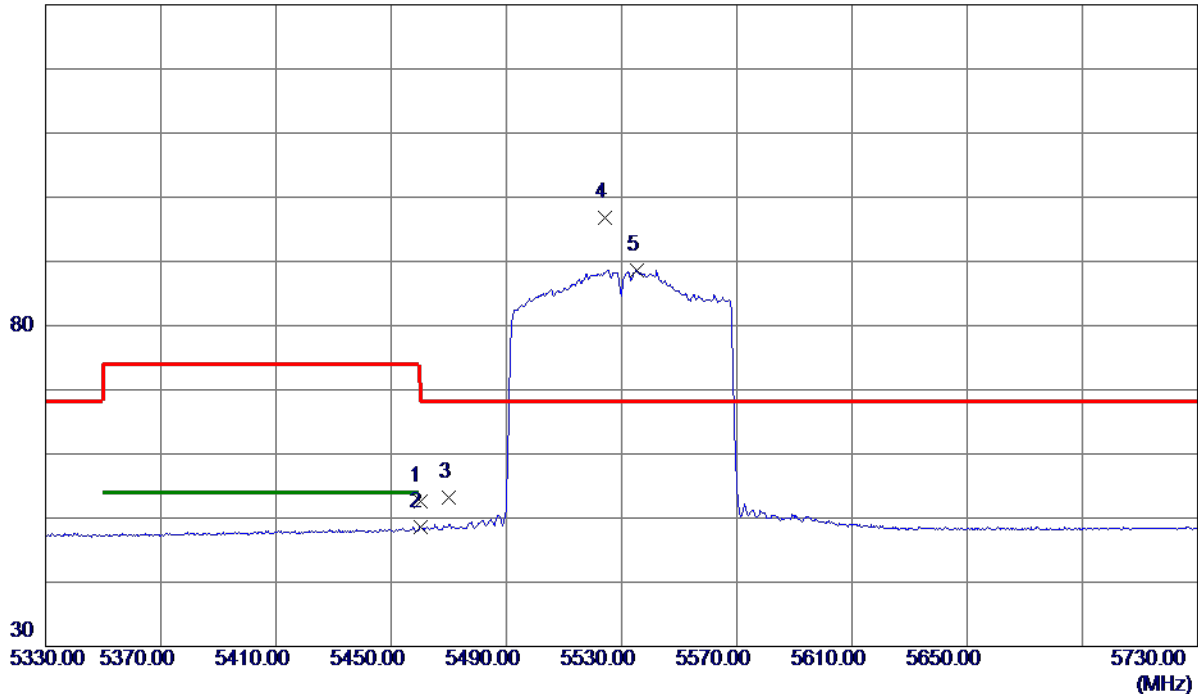

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 35.77                      | 16.89                   | 52.66                     | 74.00           | -21.34       | Peak     |          |
| 2   | 5460.0000    | 31.64                      | 16.89                   | 48.53                     | 54.00           | -5.47        | AVG      |          |
| 3   | 5470.0000    | 36.22                      | 16.91                   | 53.13                     | 68.30           | -15.17       | Peak     |          |
| 4 * | 5524.2000    | 79.78                      | 17.06                   | 96.84                     | 68.30           | 28.54        | Peak     | No Limit |
| 5   | 5535.2000    | 71.58                      | 17.09                   | 88.67                     | 999.00          | -910.33      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5530 MHz |

## Horizontal

80 dBuV/m

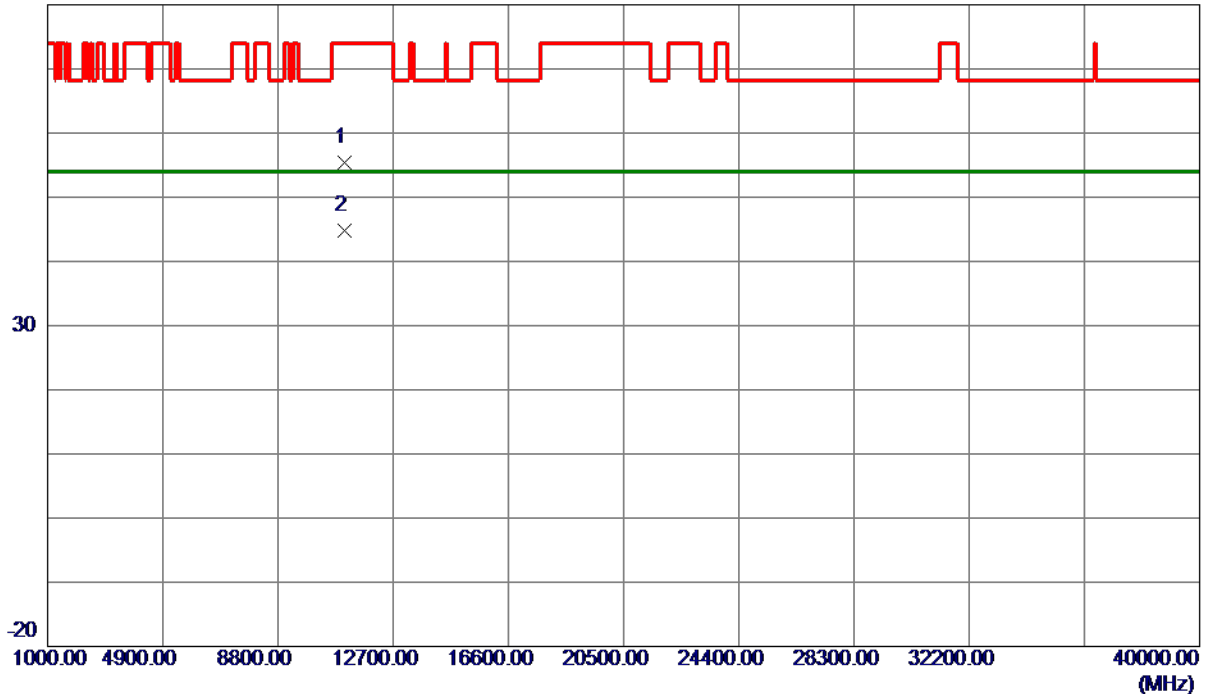

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.4300   | 41.34                      | 14.00                   | 55.34                     | 74.00           | -18.66       | Peak     |         |
| 2 * | 11060.7580   | 30.72                      | 14.00                   | 44.72                     | 54.00           | -9.28        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

## Vertical

130 dBuV/m

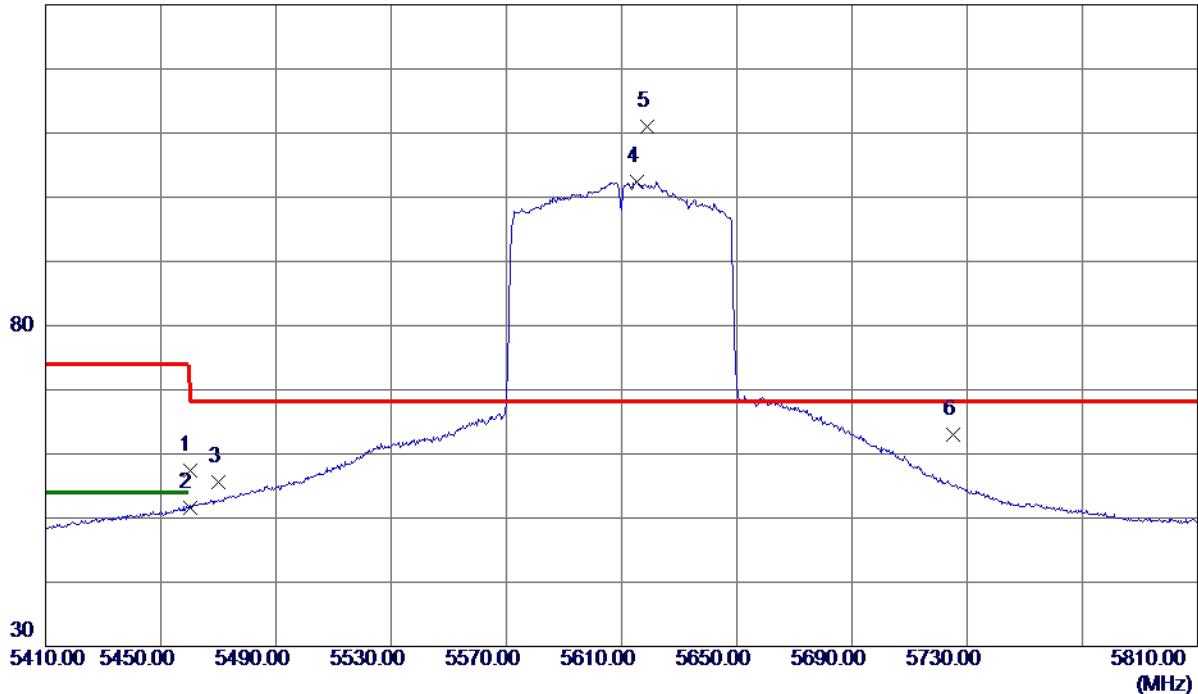

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.60                      | 16.89                   | 57.49                     | 74.00           | -16.51       | Peak     |          |
| 2   | 5460.0000    | 34.75                      | 16.89                   | 51.64                     | 54.00           | -2.36        | AVG      |          |
| 3   | 5470.0000    | 38.77                      | 16.91                   | 55.68                     | 68.30           | -12.62       | Peak     |          |
| 4   | 5615.2000    | 85.07                      | 17.33                   | 102.40                    | 999.00          | -896.60      | AVG      | No Limit |
| 5 * | 5618.8000    | 93.61                      | 17.34                   | 110.95                    | 68.30           | 42.65        | Peak     | No Limit |
| 6   | 5725.0000    | 45.31                      | 17.65                   | 62.96                     | 68.30           | -5.34        | Peak     |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11218.0320   | 39.29                      | 14.20                   | 53.49                     | 54.00           | -0.51        | AVG      |         |
| 2   | 11220.9150   | 51.31                      | 14.20                   | 65.51                     | 74.00           | -8.49        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

## Horizontal

130 dBuV/m

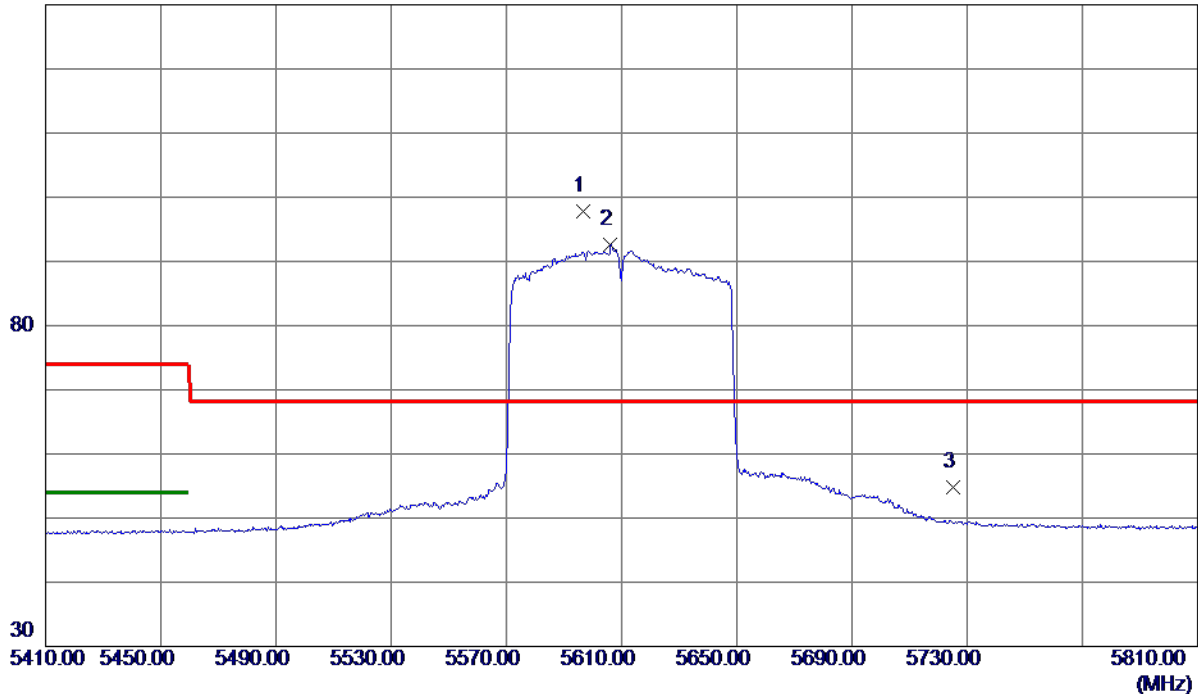

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5596.6000    | 80.53                      | 17.27                   | 97.80                     | 68.30           | 29.50        | Peak     | No Limit |
| 2   | 5606.2000    | 75.35                      | 17.30                   | 92.65                     | 999.00          | -906.35      | AVG      | No Limit |
| 3   | 5725.0000    | 37.21                      | 17.65                   | 54.86                     | 68.30           | -13.44       | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                     |
|-----------------|-------------------------------------|
| Orthogonal Axis | X                                   |
| Test Mode       | UNII-2C_TX AC (VHT80) Mode 5610 MHz |

## Horizontal

80 dBuV/m

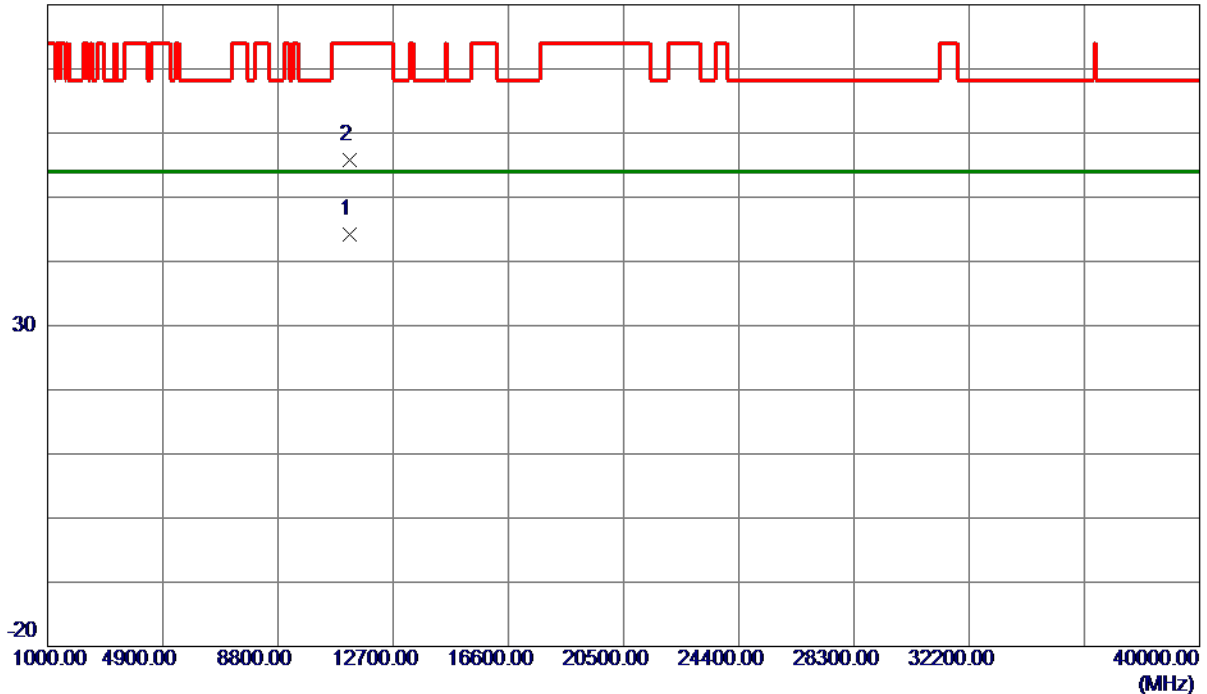

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11220.4220   | 30.08                      | 14.20                   | 44.28                     | 54.00           | -9.72        | AVG      |         |
| 2   | 11220.4740   | 41.66                      | 14.20                   | 55.86                     | 74.00           | -18.14       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Vertical

130 dBuV/m

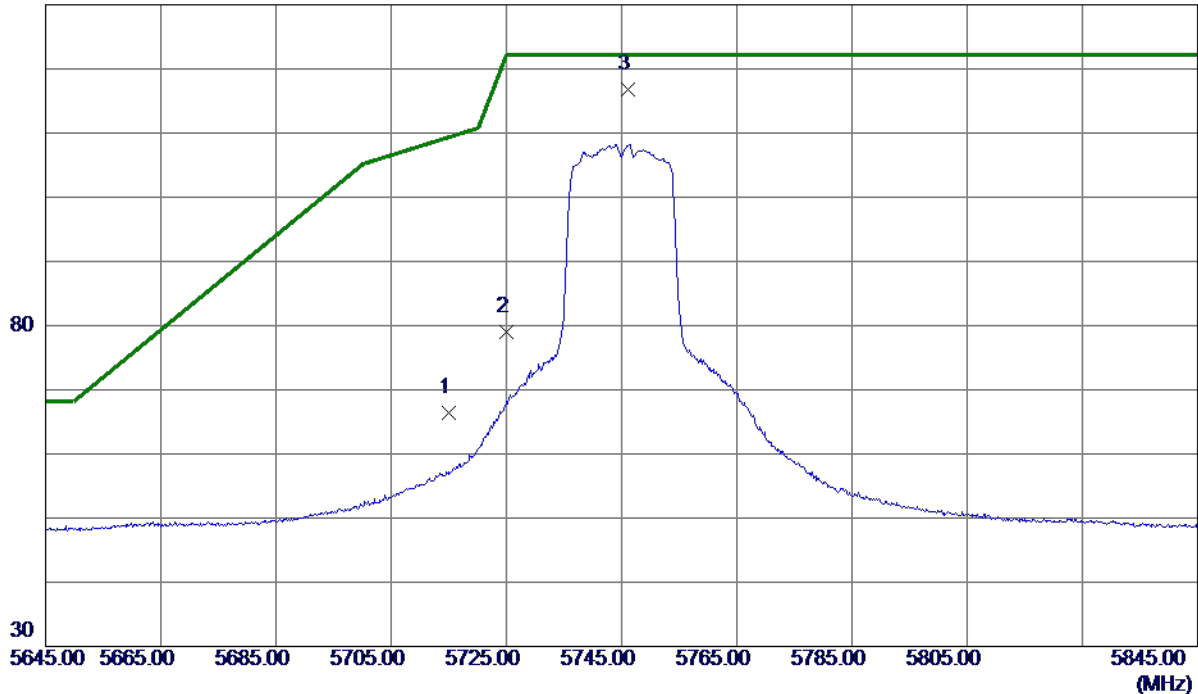

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 48.71                      | 17.62                   | 66.33                     | 109.40          | -43.07       | Peak     |         |
| 2   | 5725.0000    | 61.40                      | 17.65                   | 79.05                     | 122.20          | -43.15       | Peak     |         |
| 3 * | 5746.1000    | 99.15                      | 17.72                   | 116.87                    | 122.20          | -5.33        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Vertical

80 dBuV/m

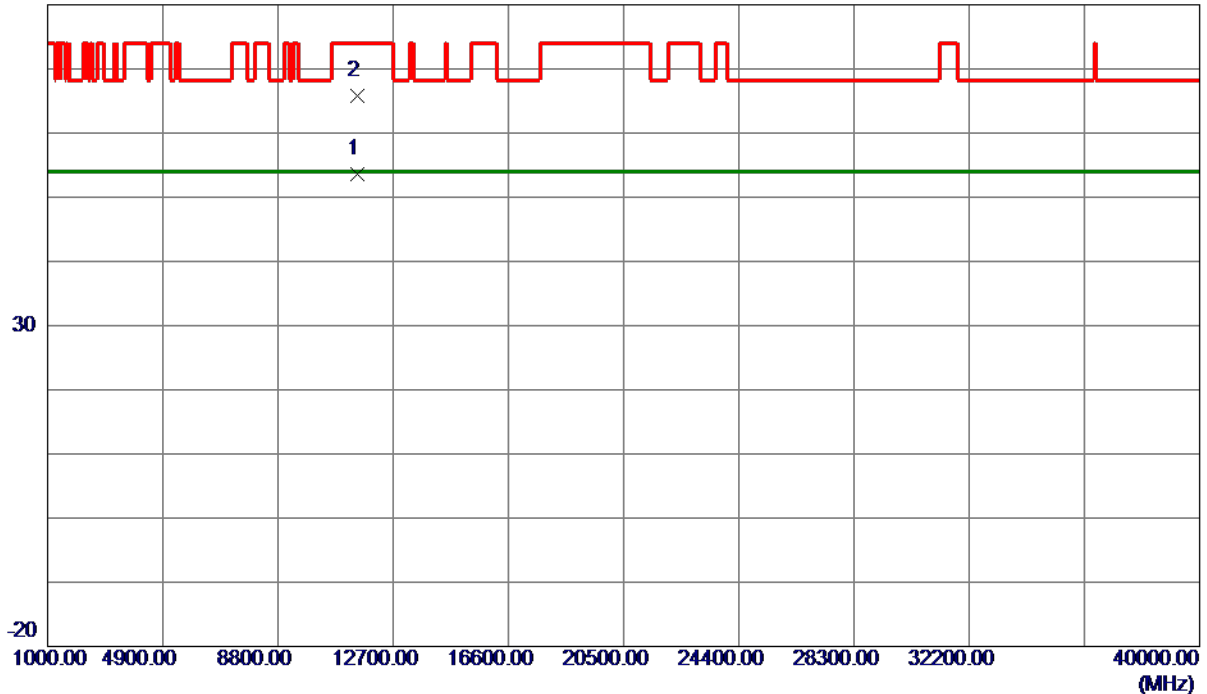

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11488.8230   | 39.02                      | 14.55                   | 53.57                     | 54.00           | -0.43        | AVG      |         |
| 2   | 11489.2699   | 51.23                      | 14.55                   | 65.78                     | 74.00           | -8.22        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Horizontal

130 dBuV/m

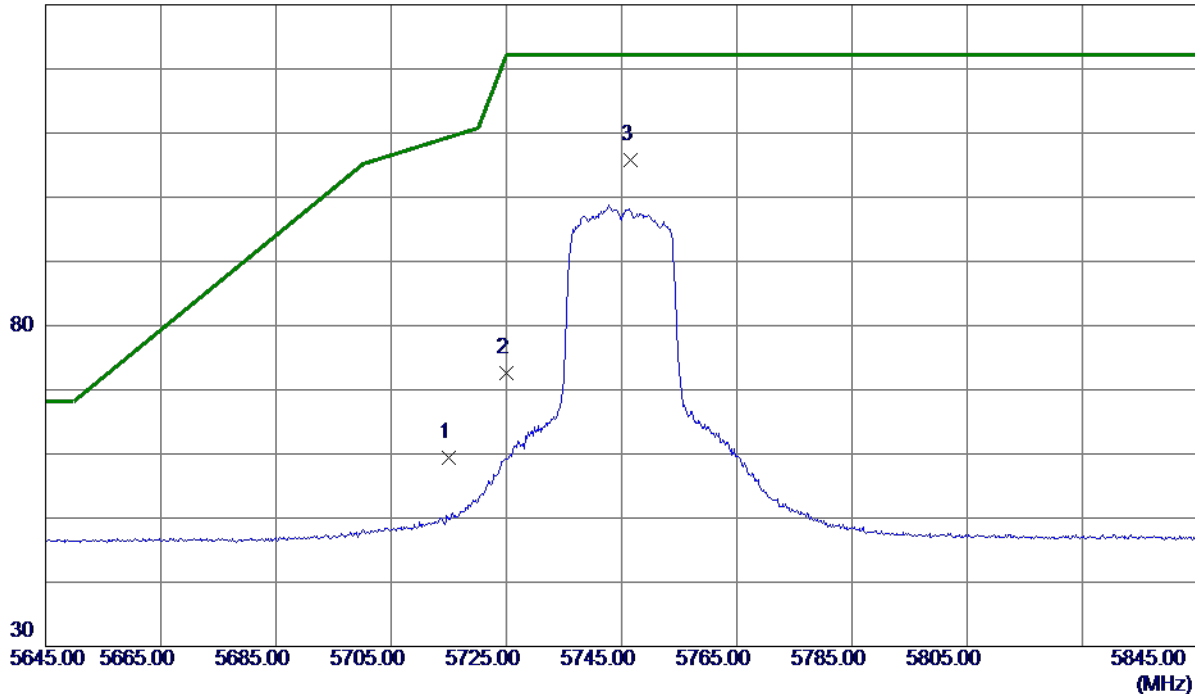

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 41.85                      | 17.62                   | 59.47                     | 109.40          | -49.93       | Peak     |         |
| 2   | 5725.0000    | 54.97                      | 17.65                   | 72.62                     | 122.20          | -49.58       | Peak     |         |
| 3 * | 5746.6000    | 88.08                      | 17.72                   | 105.80                    | 122.20          | -16.40       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5745 MHz |

## Horizontal

80 dBuV/m

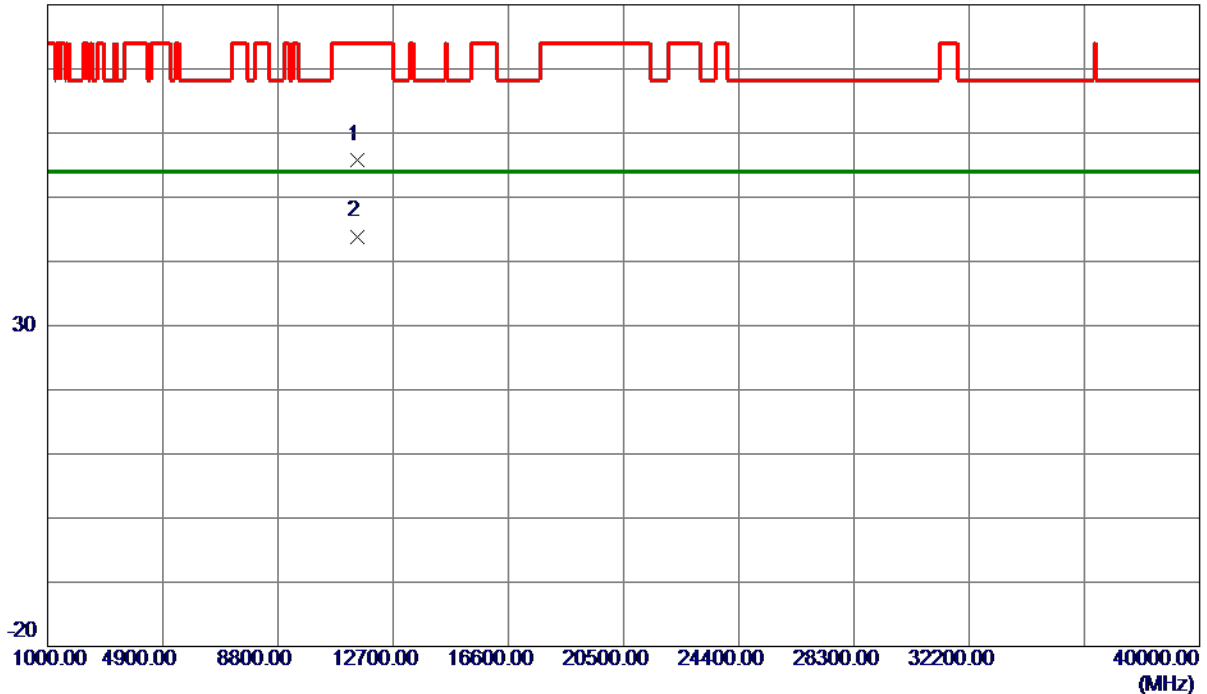


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11489.3120   | 41.26                      | 14.55                   | 55.81                     | 74.00           | -18.19       | Peak     |         |
| 2 * | 11489.9360   | 29.35                      | 14.55                   | 43.90                     | 54.00           | -10.10       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Vertical

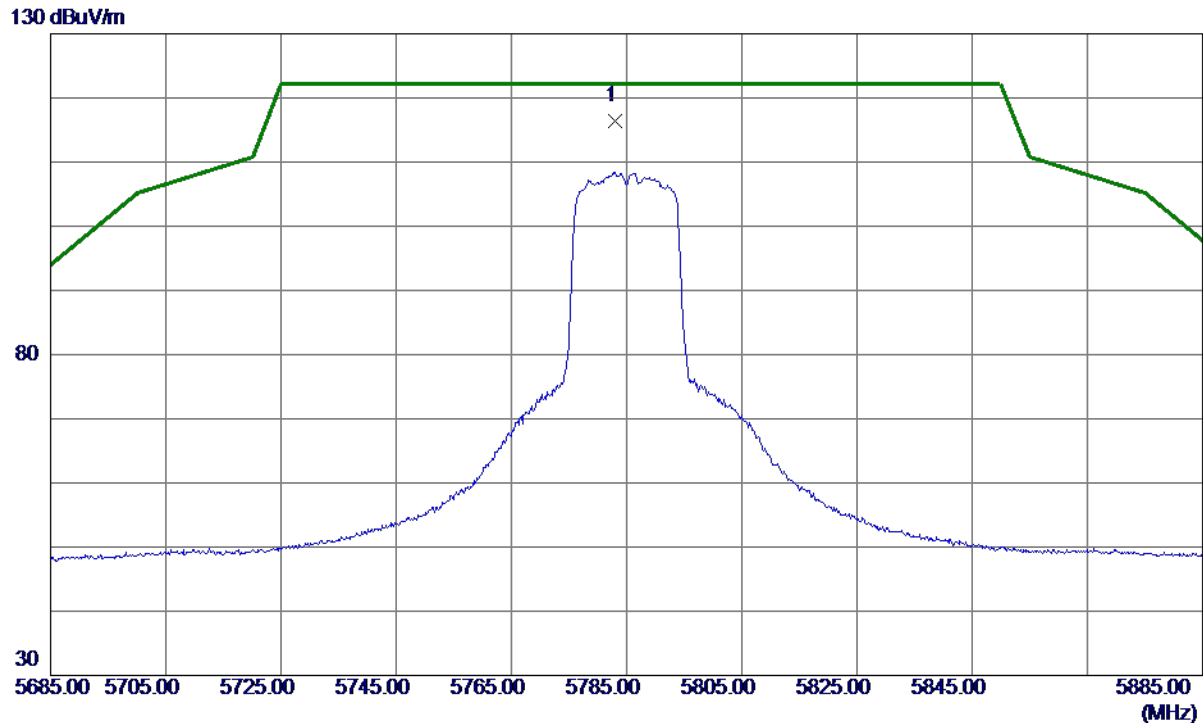

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5783.0000    | 98.50                      | 17.83                   | 116.33                    | 122.20          | -5.87        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Vertical

80 dBuV/m

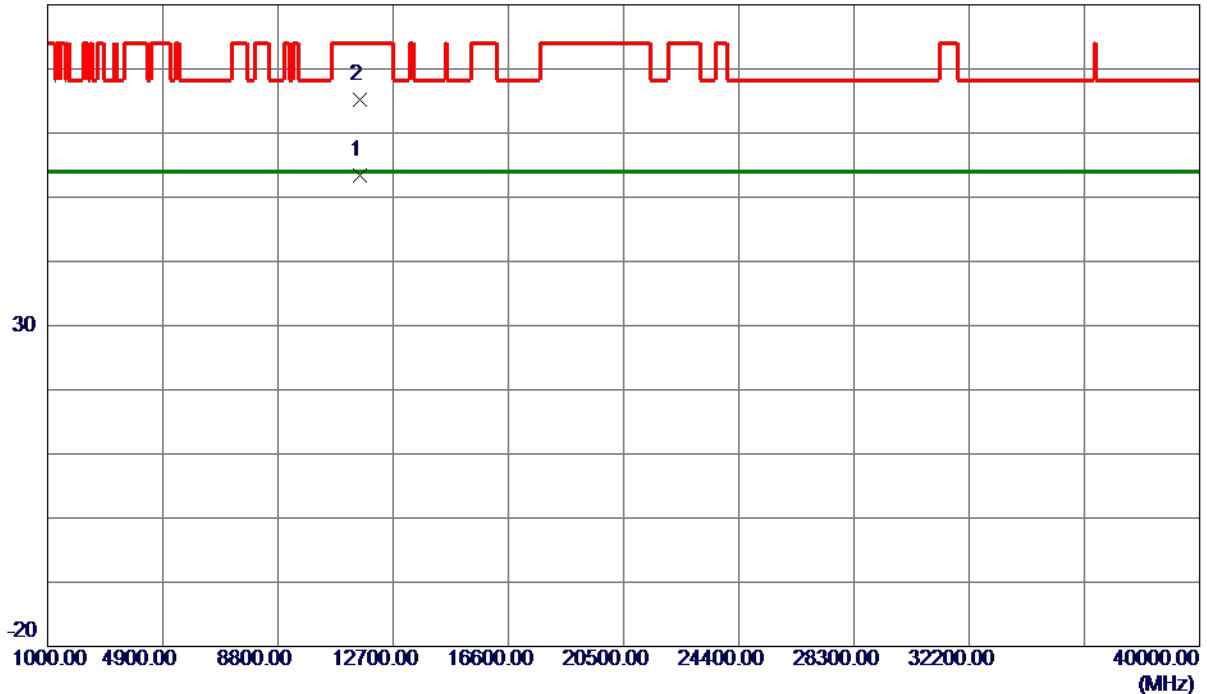

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11569.2330   | 38.88                      | 14.57                   | 53.45                     | 54.00           | -0.55        | AVG      |         |
| 2   | 11571.9230   | 50.69                      | 14.57                   | 65.26                     | 74.00           | -8.74        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Horizontal

130 dBuV/m

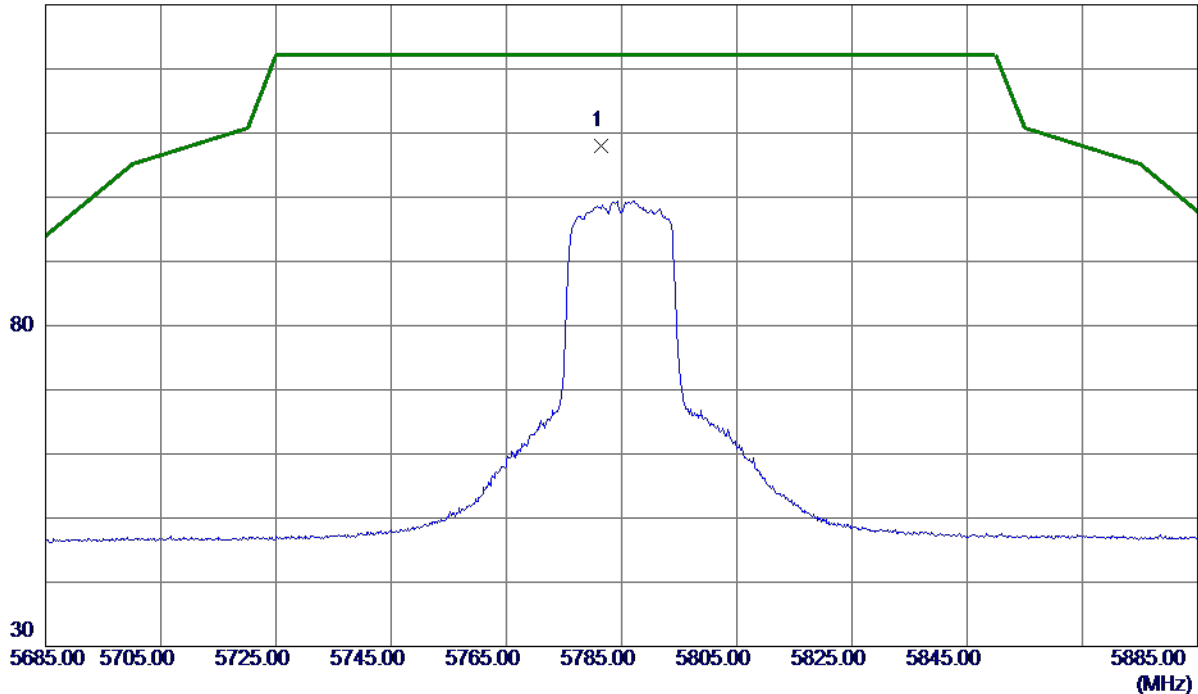

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5781.5000    | 90.26                      | 17.82                   | 108.08                    | 122.20          | -14.12       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5785 MHz |

## Horizontal

80 dBuV/m

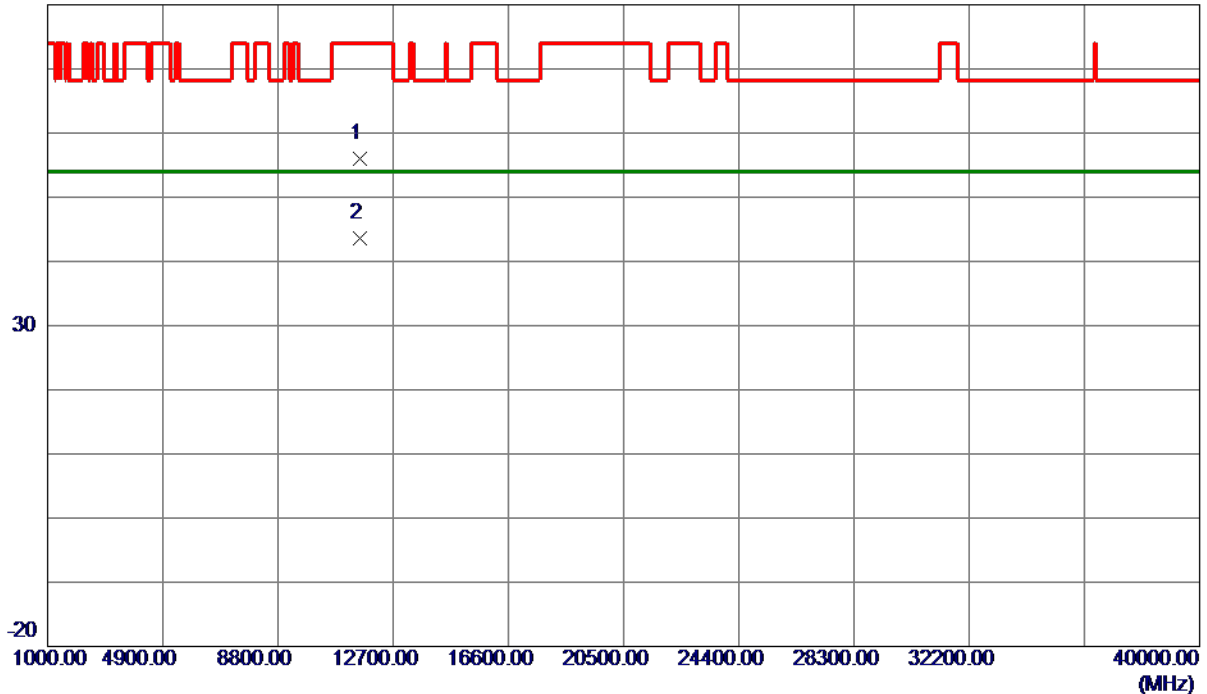


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11569.2539   | 41.35                      | 14.57                   | 55.92                     | 74.00           | -18.08       | Peak     |         |
| 2 * | 11570.9160   | 29.10                      | 14.57                   | 43.67                     | 54.00           | -10.33       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Vertical

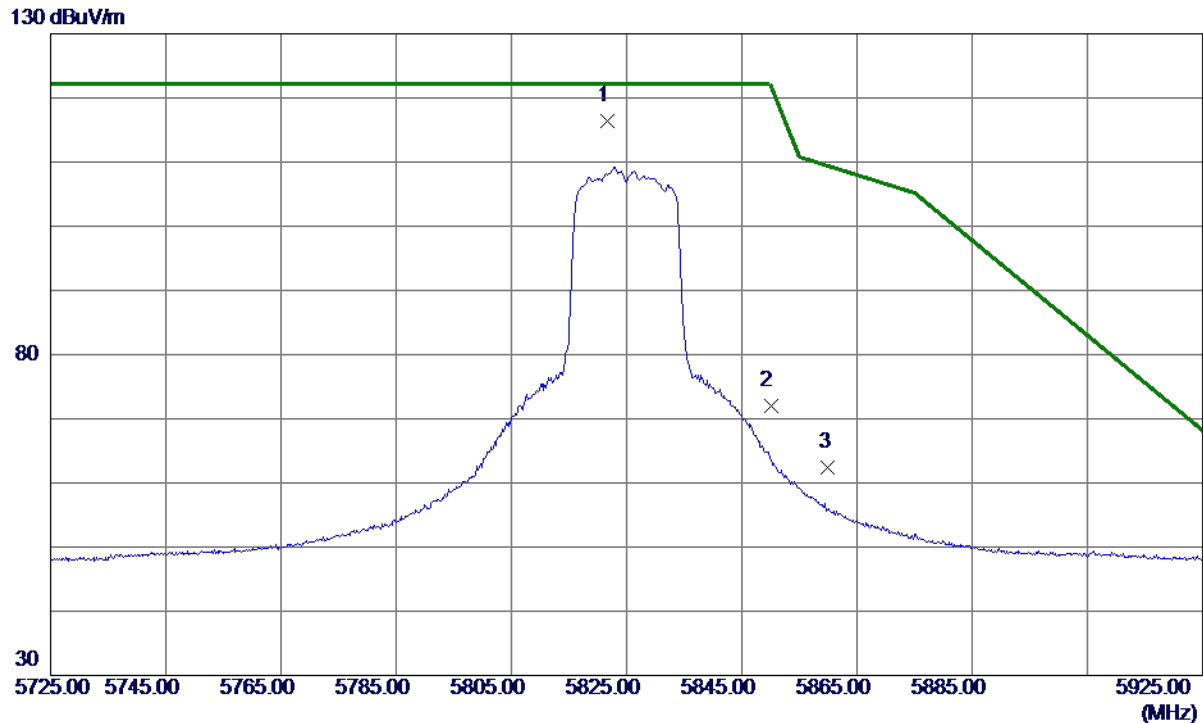

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5821.6000    | 98.37                      | 17.94                   | 116.31                    | 122.20          | -5.89        | Peak     |         |
| 2   | 5850.0000    | 54.07                      | 18.02                   | 72.09                     | 122.20          | -50.11       | Peak     |         |
| 3   | 5860.0000    | 44.33                      | 18.05                   | 62.38                     | 109.40          | -47.02       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Vertical

80 dBuV/m

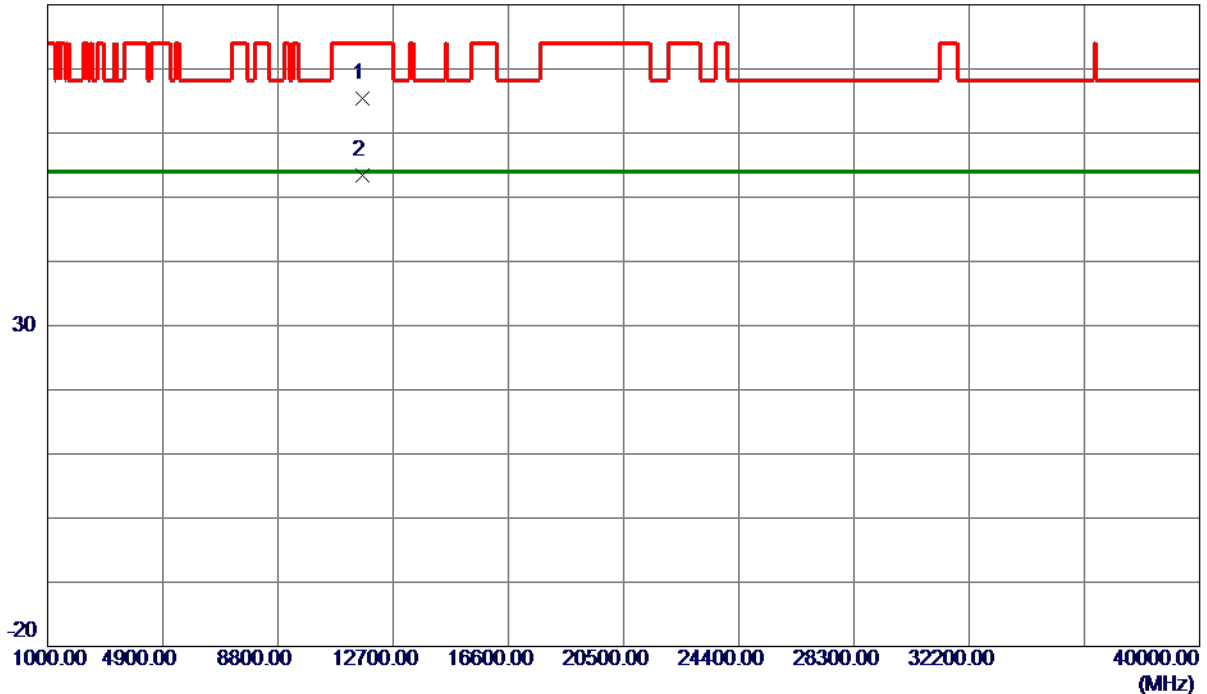

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11648.2120   | 50.83                      | 14.57                   | 65.40                     | 74.00           | -8.60        | Peak     |         |
| 2 * | 11650.6449   | 38.82                      | 14.57                   | 53.39                     | 54.00           | -0.61        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Horizontal

130 dBuV/m

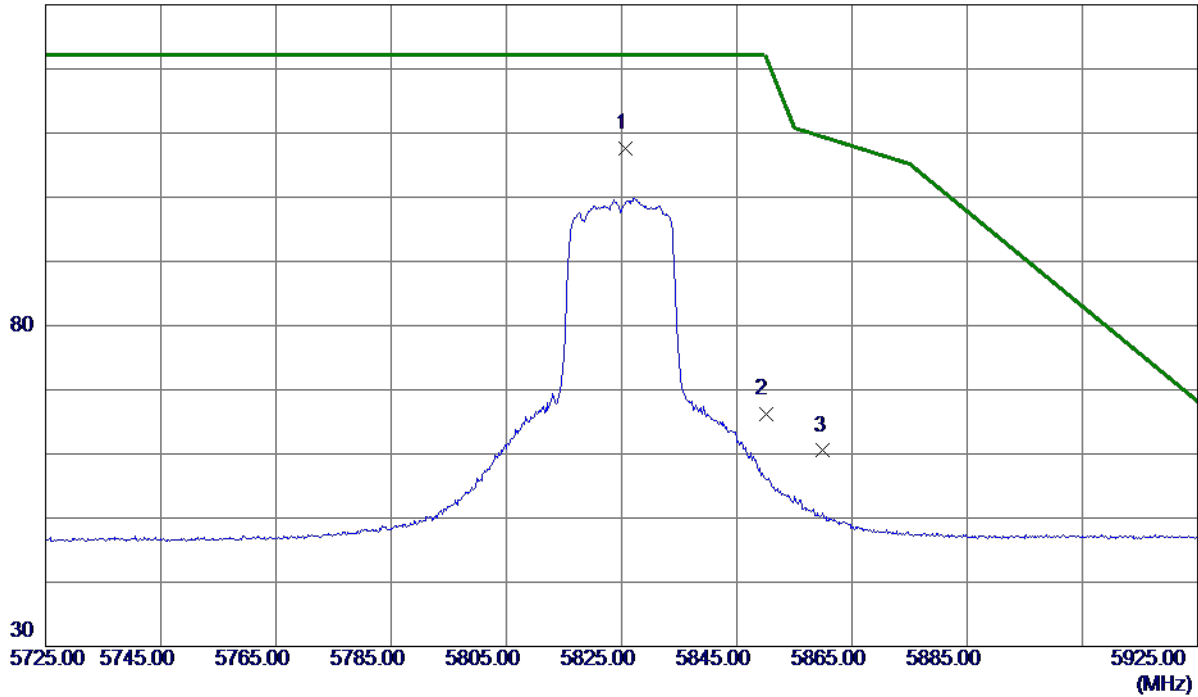

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5825.6000    | 89.68                      | 17.95                   | 107.63                    | 122.20          | -14.57       | Peak     |         |
| 2   | 5850.0000    | 48.10                      | 18.02                   | 66.12                     | 122.20          | -56.08       | Peak     |         |
| 3   | 5860.0000    | 42.45                      | 18.05                   | 60.50                     | 109.40          | -48.90       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT20) Mode 5825 MHz |

## Horizontal

80 dBuV/m

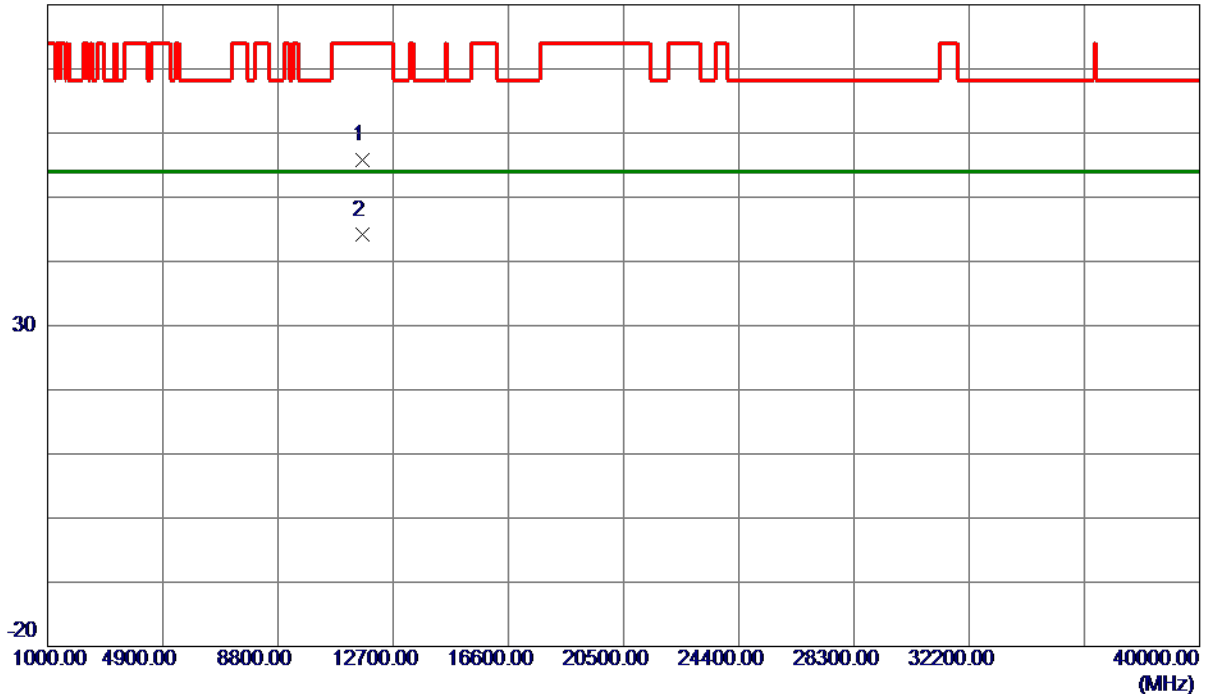

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11649.4460   | 41.26                      | 14.57                   | 55.83                     | 74.00           | -18.17       | Peak     |         |
| 2 * | 11649.9240   | 29.53                      | 14.57                   | 44.10                     | 54.00           | -9.90        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Vertical

130 dBuV/m

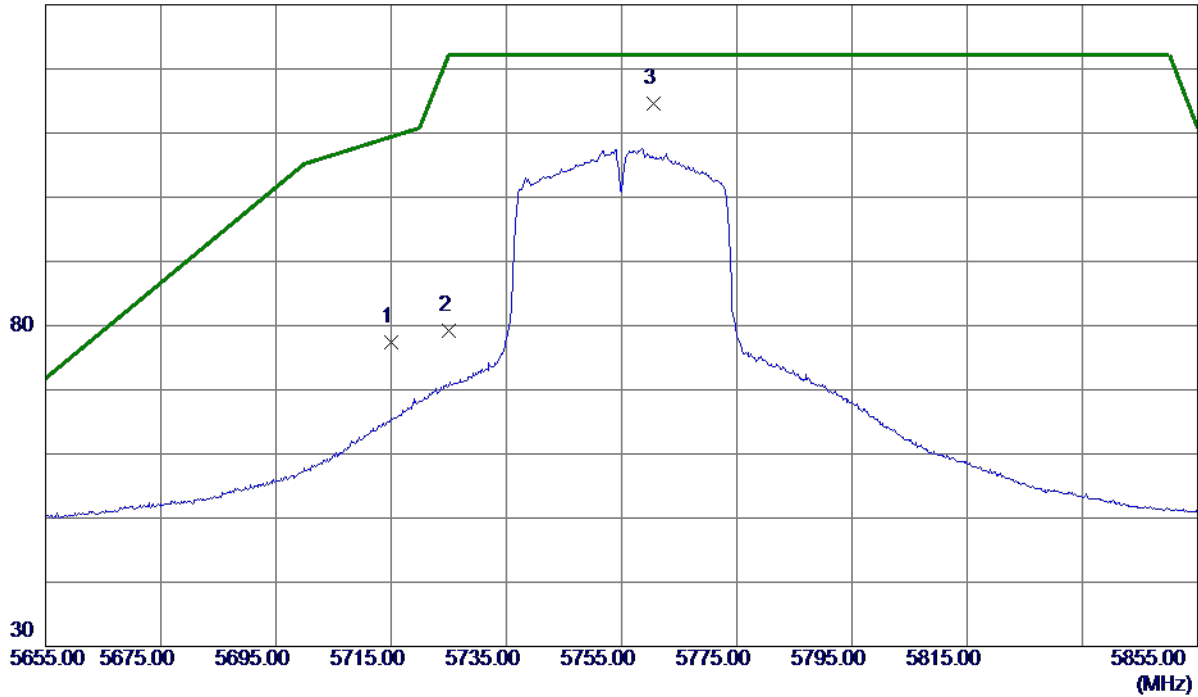

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 59.78                      | 17.62                   | 77.40                     | 109.40          | -32.00       | Peak     |         |
| 2   | 5725.0000    | 61.60                      | 17.65                   | 79.25                     | 122.20          | -42.95       | Peak     |         |
| 3 * | 5760.5000    | 96.90                      | 17.76                   | 114.66                    | 122.20          | -7.54        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Vertical

80 dBuV/m

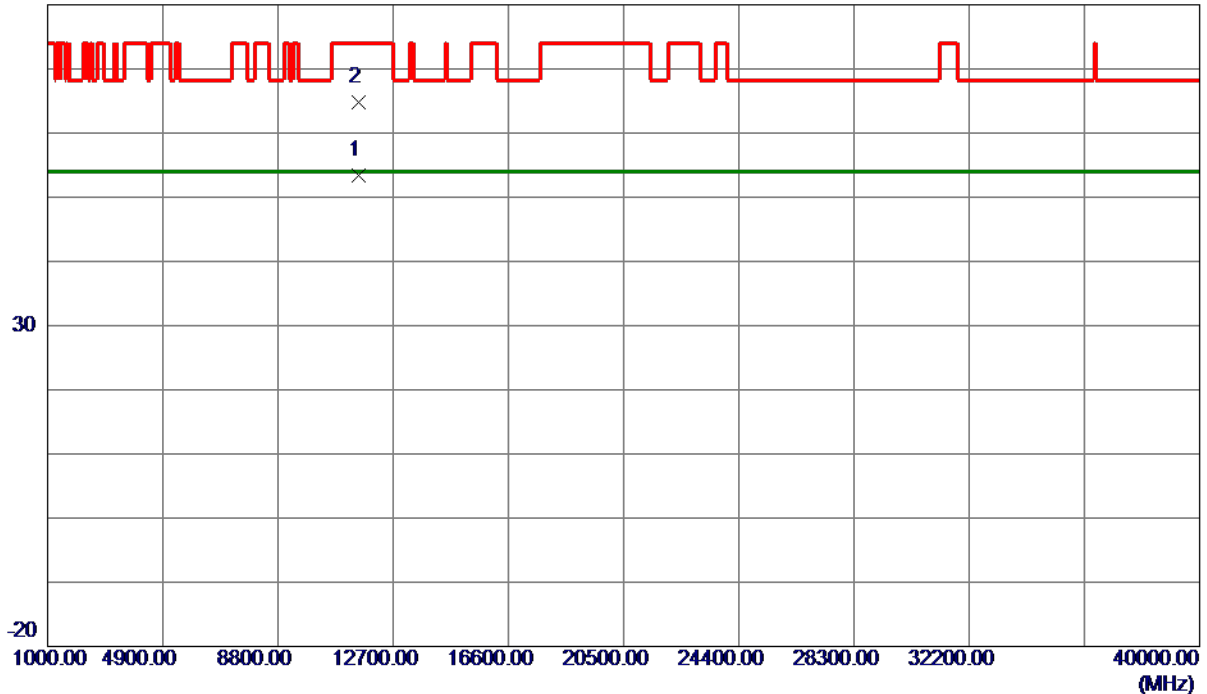

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.7200   | 38.85                      | 14.57                   | 53.42                     | 54.00           | -0.58        | AVG      |         |
| 2   | 11510.8600   | 50.18                      | 14.57                   | 64.75                     | 74.00           | -9.25        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Horizontal

130 dBuV/m

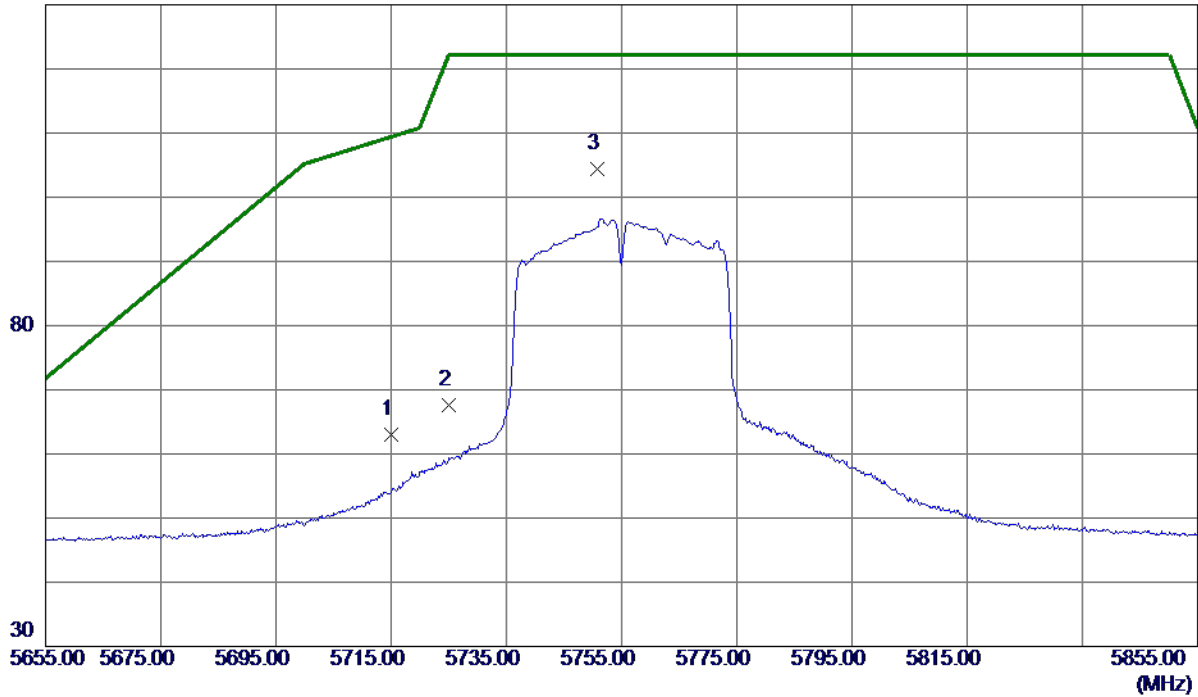

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 45.46                      | 17.62                   | 63.08                     | 109.40          | -46.32       | Peak     |         |
| 2   | 5725.0000    | 49.91                      | 17.65                   | 67.56                     | 122.20          | -54.64       | Peak     |         |
| 3 * | 5750.7000    | 86.60                      | 17.73                   | 104.33                    | 122.20          | -17.87       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5755 MHz |

## Horizontal

80 dBuV/m

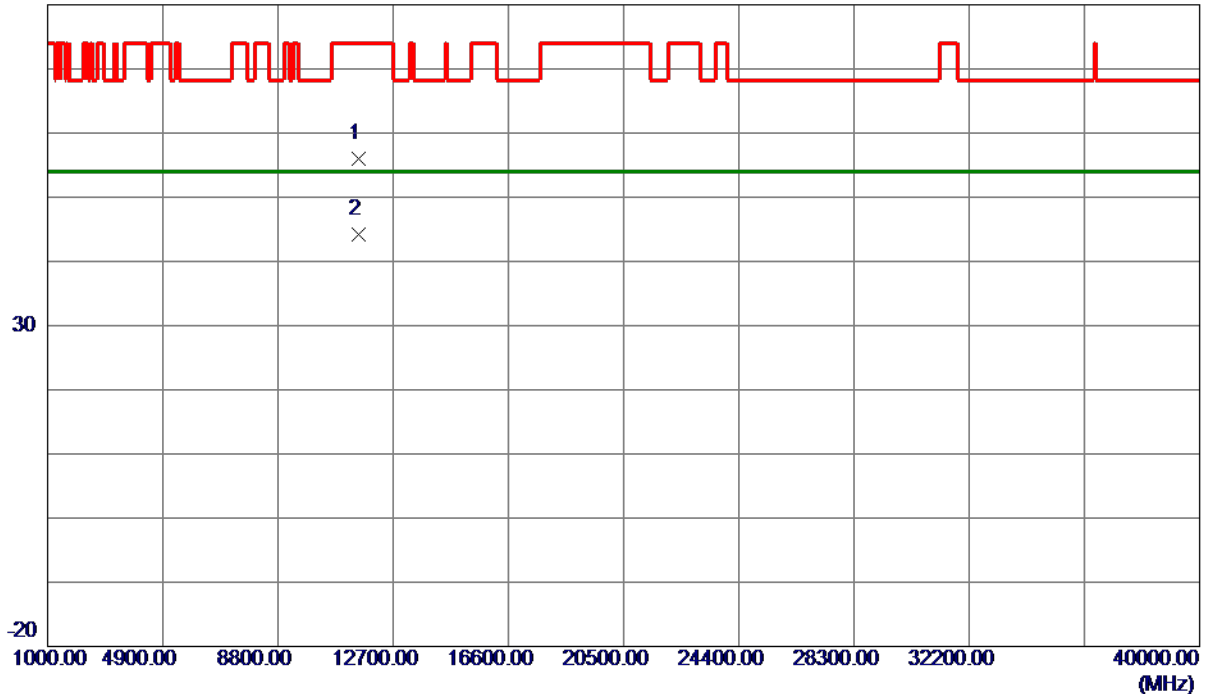


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11509.0160   | 41.38                      | 14.57                   | 55.95                     | 74.00           | -18.05       | Peak     |         |
| 2 * | 11510.9900   | 29.55                      | 14.57                   | 44.12                     | 54.00           | -9.88        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Vertical

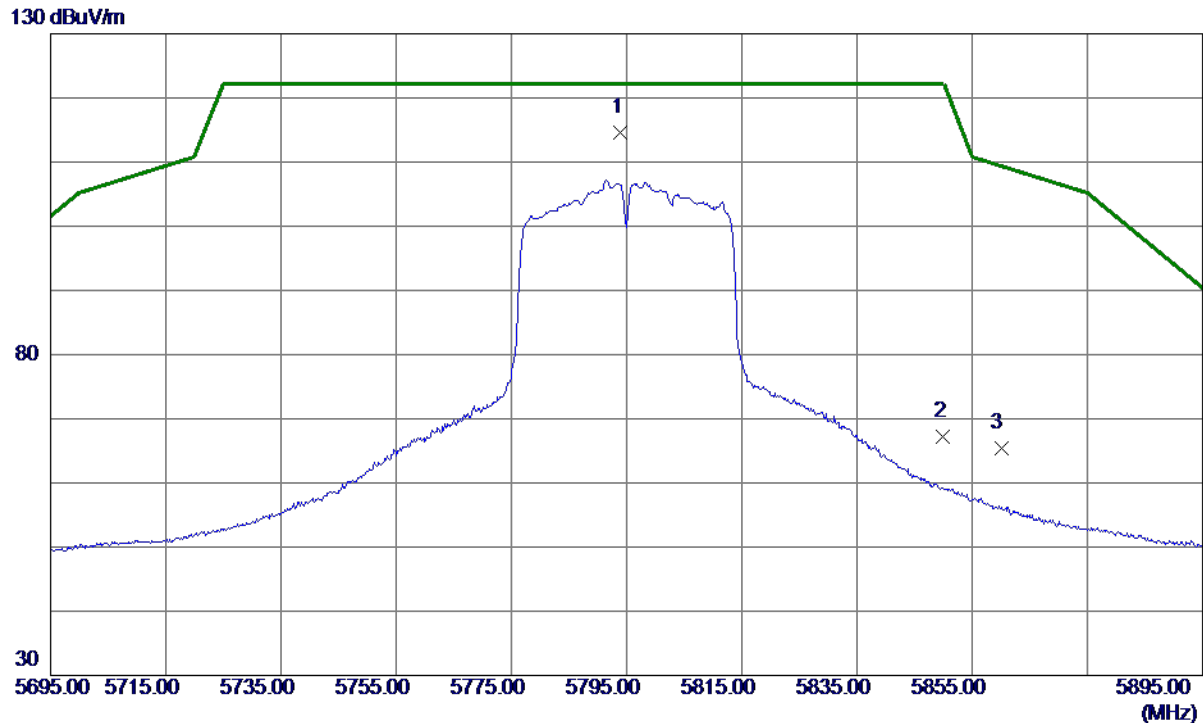

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5794.0000    | 96.68                      | 17.86                   | 114.54                    | 122.20          | -7.66        | Peak     |         |
| 2   | 5850.0000    | 49.21                      | 18.02                   | 67.23                     | 122.20          | -54.97       | Peak     |         |
| 3   | 5860.0000    | 47.32                      | 18.05                   | 65.37                     | 109.40          | -44.03       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Vertical

80 dBuV/m

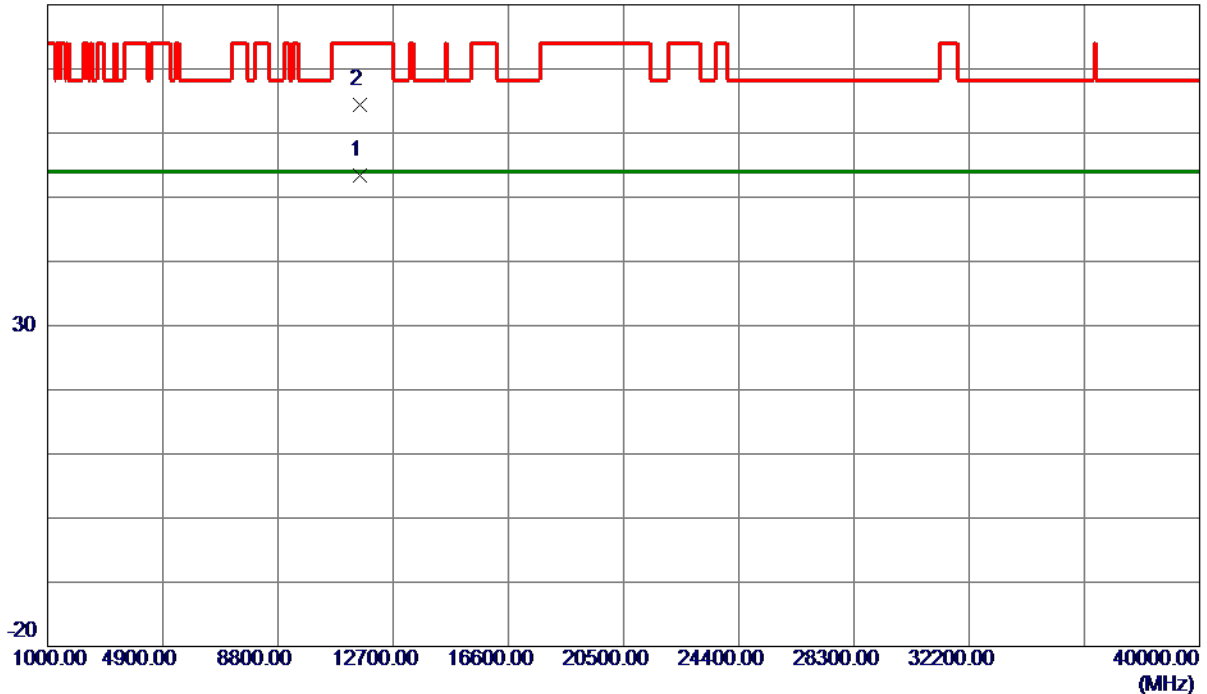

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11589.0420   | 38.78                      | 14.57                   | 53.35                     | 54.00           | -0.65        | AVG      |         |
| 2   | 11589.8650   | 49.75                      | 14.57                   | 64.32                     | 74.00           | -9.68        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Horizontal

130 dBuV/m

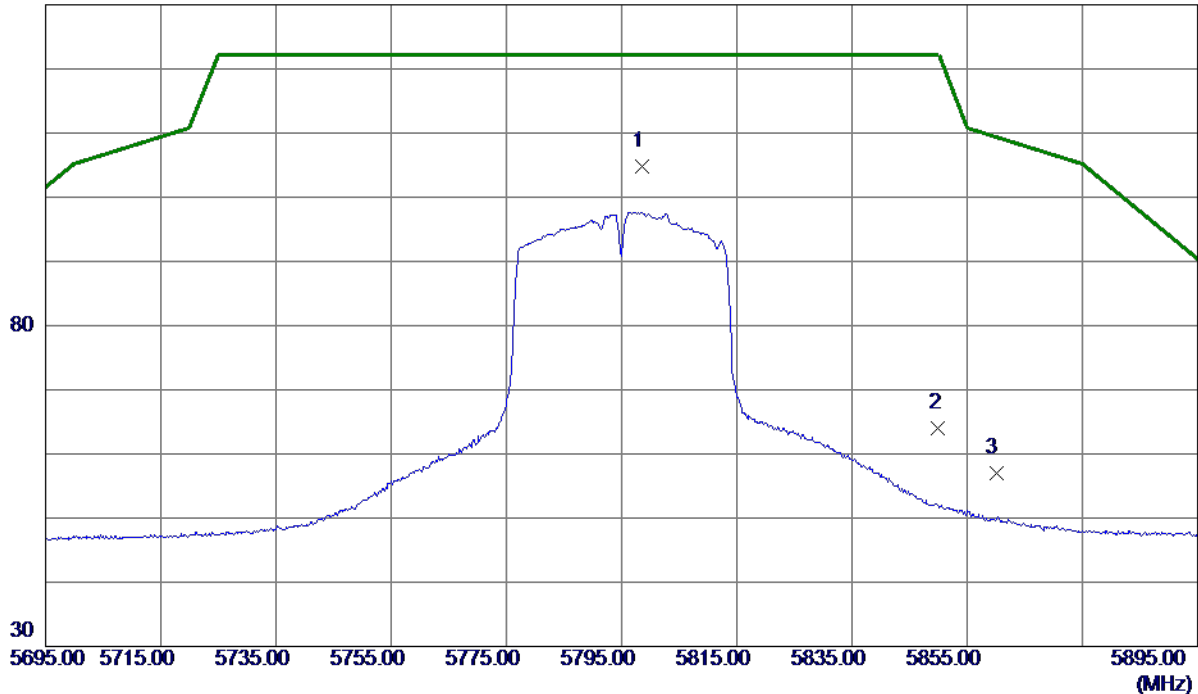

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5798.6000    | 86.92                      | 17.87                   | 104.79                    | 122.20          | -17.41       | Peak     |         |
| 2   | 5850.0000    | 45.92                      | 18.02                   | 63.94                     | 122.20          | -58.26       | Peak     |         |
| 3   | 5860.0000    | 38.97                      | 18.05                   | 57.02                     | 109.40          | -52.38       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT40) Mode 5795 MHz |

## Horizontal

80 dBuV/m

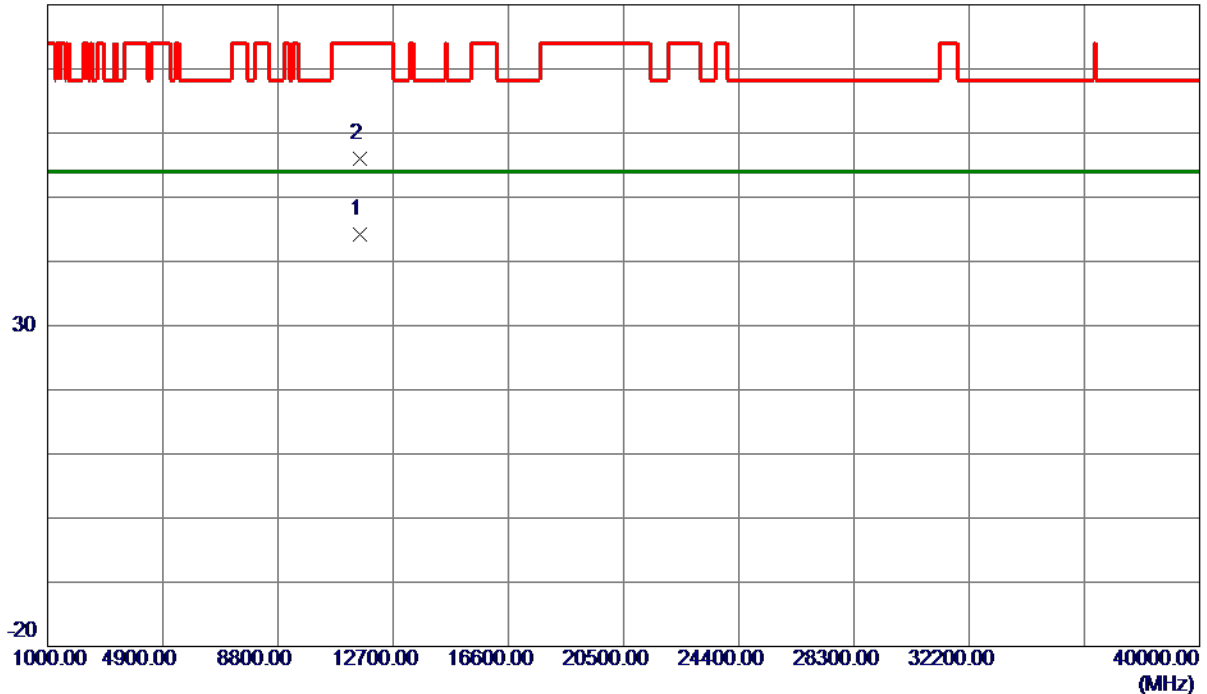

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.3520   | 29.57                      | 14.57                   | 44.14                     | 54.00           | -9.86        | AVG      |         |
| 2   | 11590.6180   | 41.38                      | 14.57                   | 55.95                     | 74.00           | -18.05       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Vertical

130 dBuV/m

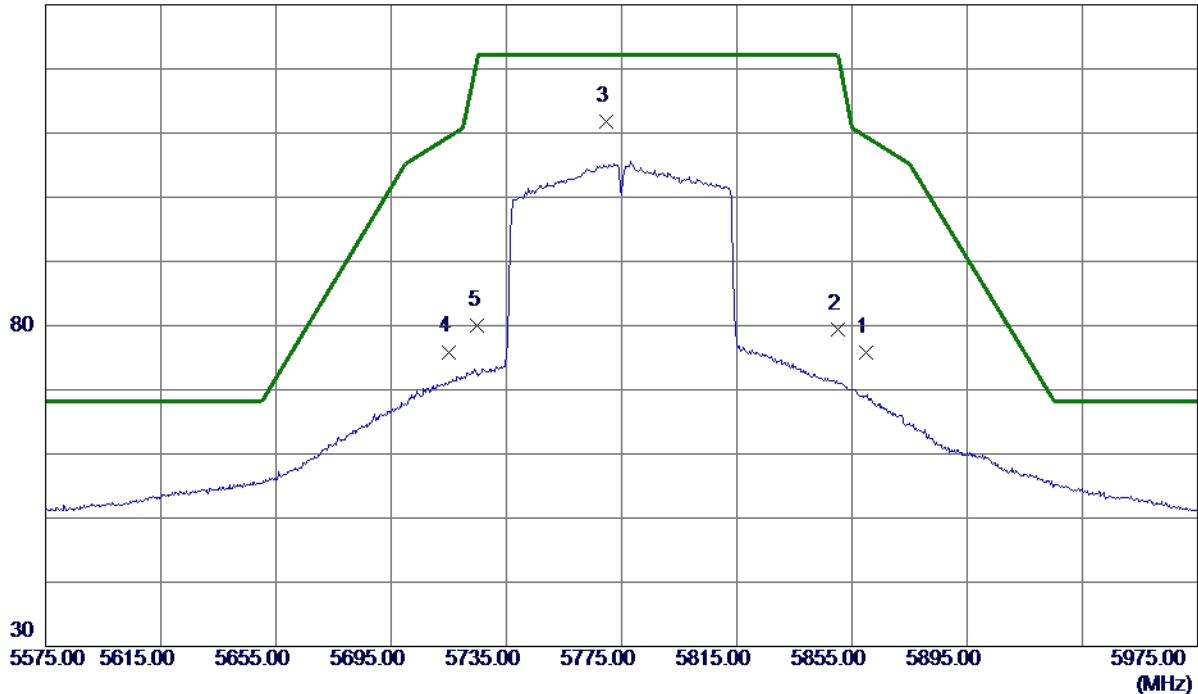

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5860.0000    | 57.81                      | 18.05                   | 75.86                     | 109.40          | -33.54       | Peak     |         |
| 2   | 5850.0000    | 61.35                      | 18.02                   | 79.37                     | 122.20          | -42.83       | Peak     |         |
| 3 * | 5769.6000    | 93.97                      | 17.79                   | 111.76                    | 122.20          | -10.44       | Peak     |         |
| 4   | 5715.0000    | 58.28                      | 17.62                   | 75.90                     | 109.40          | -33.50       | Peak     |         |
| 5   | 5725.0000    | 62.32                      | 17.65                   | 79.97                     | 122.20          | -42.23       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Vertical

80 dBuV/m

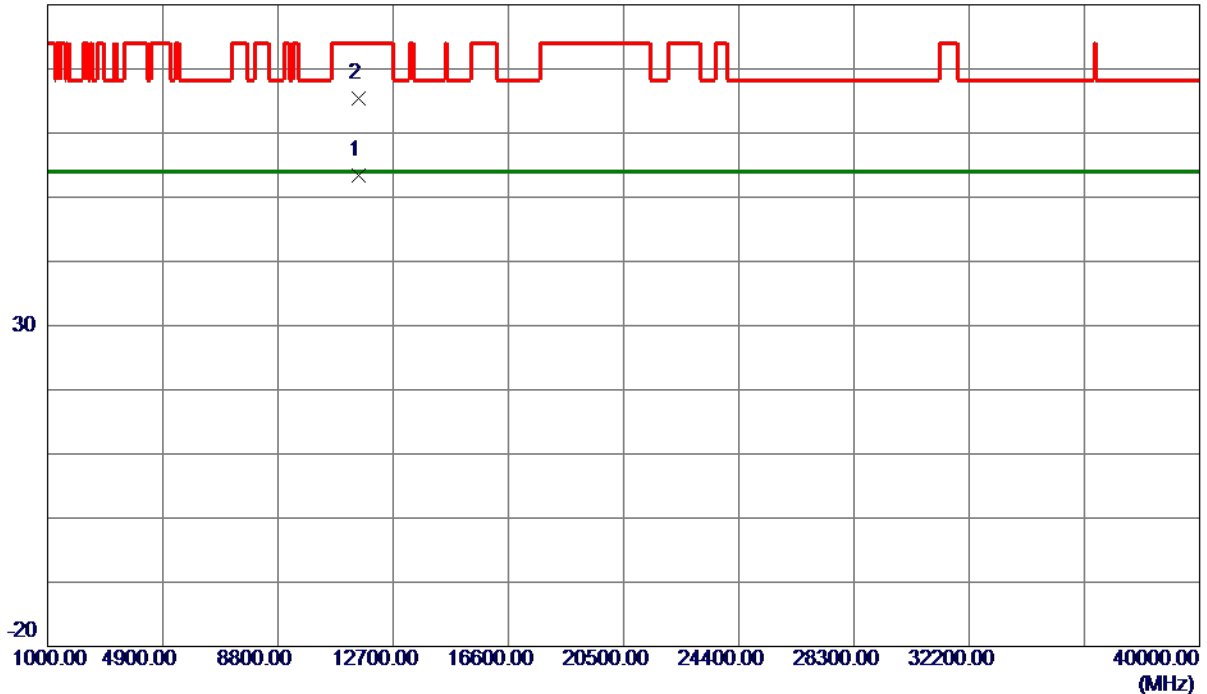

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11548.0150   | 38.88                      | 14.57                   | 53.45                     | 54.00           | -0.55        | AVG      |         |
| 2   | 11551.3300   | 50.91                      | 14.57                   | 65.48                     | 74.00           | -8.52        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Horizontal

130 dBuV/m

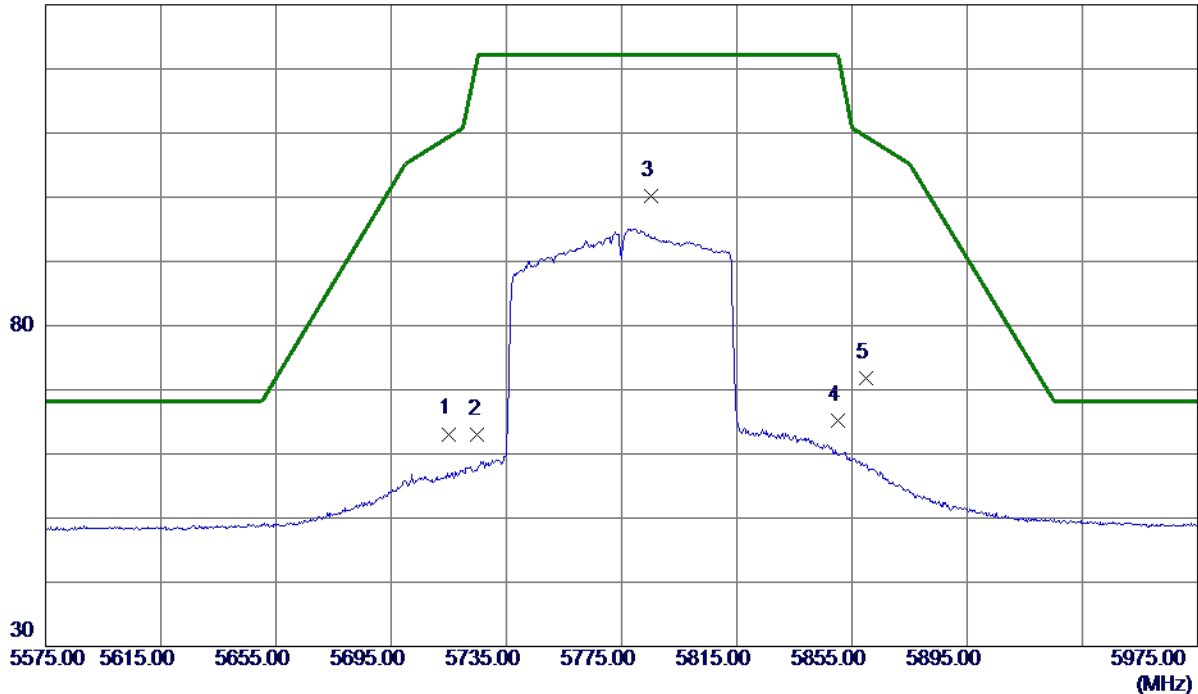

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 45.48                      | 17.62                   | 63.10                     | 109.40          | -46.30       | Peak     |         |
| 2   | 5725.0000    | 45.30                      | 17.65                   | 62.95                     | 122.20          | -59.25       | Peak     |         |
| 3 * | 5785.4000    | 82.34                      | 17.83                   | 100.17                    | 122.20          | -22.03       | Peak     |         |
| 4   | 5850.0000    | 47.21                      | 18.02                   | 65.23                     | 122.20          | -56.97       | Peak     |         |
| 5   | 5860.0000    | 53.74                      | 18.05                   | 71.79                     | 109.40          | -37.61       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-3_TX AC (VHT80) Mode 5775 MHz |

## Horizontal

80 dBuV/m

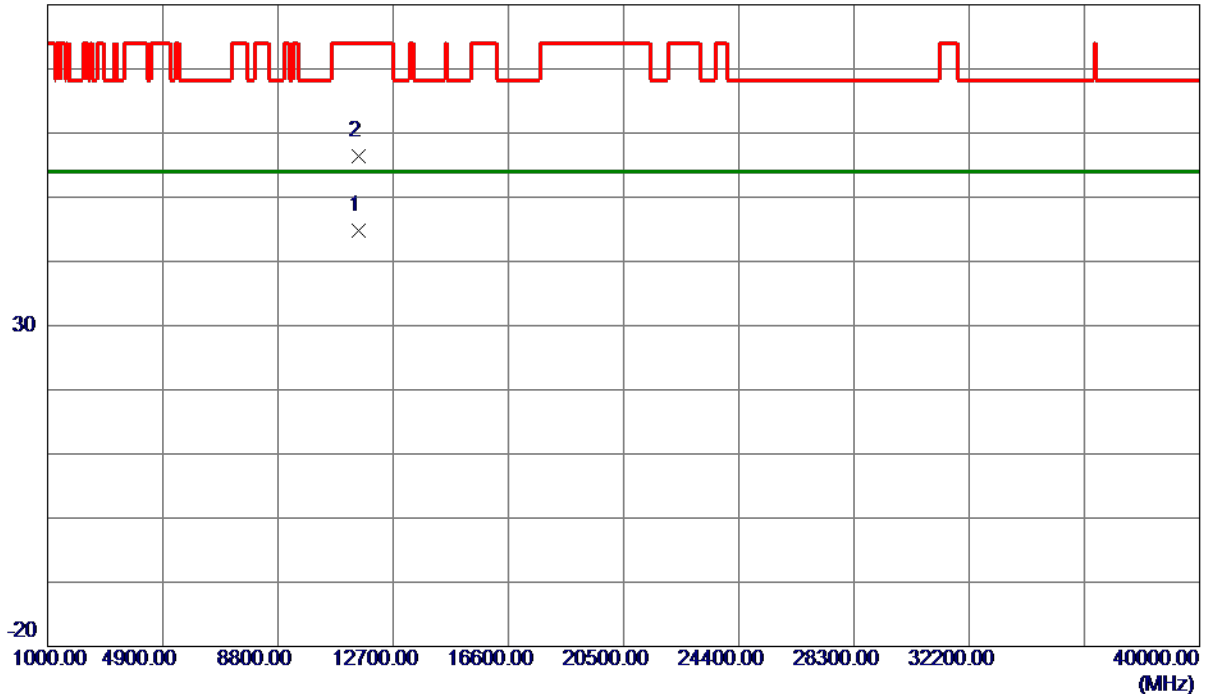

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11549.8700   | 30.30                      | 14.57                   | 44.87                     | 54.00           | -9.13        | AVG      |         |
| 2   | 11550.1520   | 41.80                      | 14.57                   | 56.37                     | 74.00           | -17.63       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5180 MHz |

## Vertical

130 dBuV/m

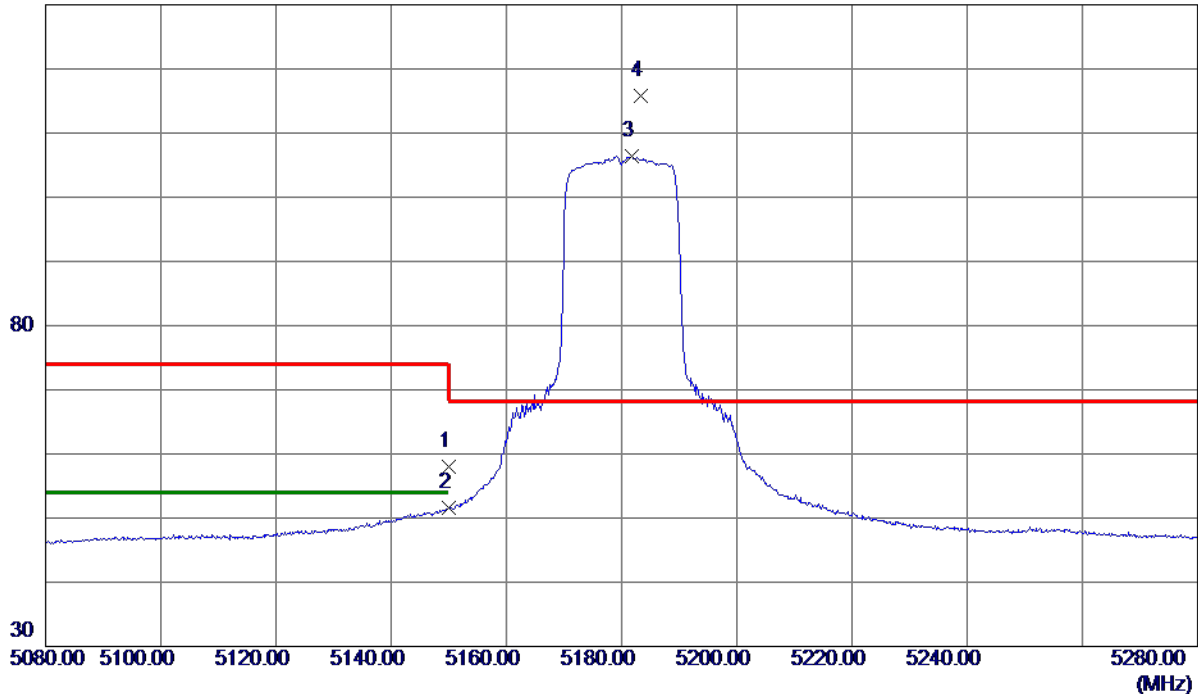

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 41.81                      | 16.16                   | 57.97                     | 74.00           | -16.03       | Peak     |          |
| 2   | 5150.0000    | 35.41                      | 16.16                   | 51.57                     | 54.00           | -2.43        | AVG      |          |
| 3   | 5181.7000    | 90.19                      | 16.23                   | 106.42                    | 999.00          | -892.58      | AVG      | No Limit |
| 4 * | 5183.3000    | 99.54                      | 16.23                   | 115.77                    | 68.30           | 47.47        | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5180 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10359.6630   | 54.26                      | 13.51                   | 67.77                     | 68.30           | -0.53        | Peak     |         |
| 2   | 10359.8550   | 39.25                      | 13.51                   | 52.76                     | 54.00           | -1.24        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5180 MHz |

## Horizontal

130 dBuV/m

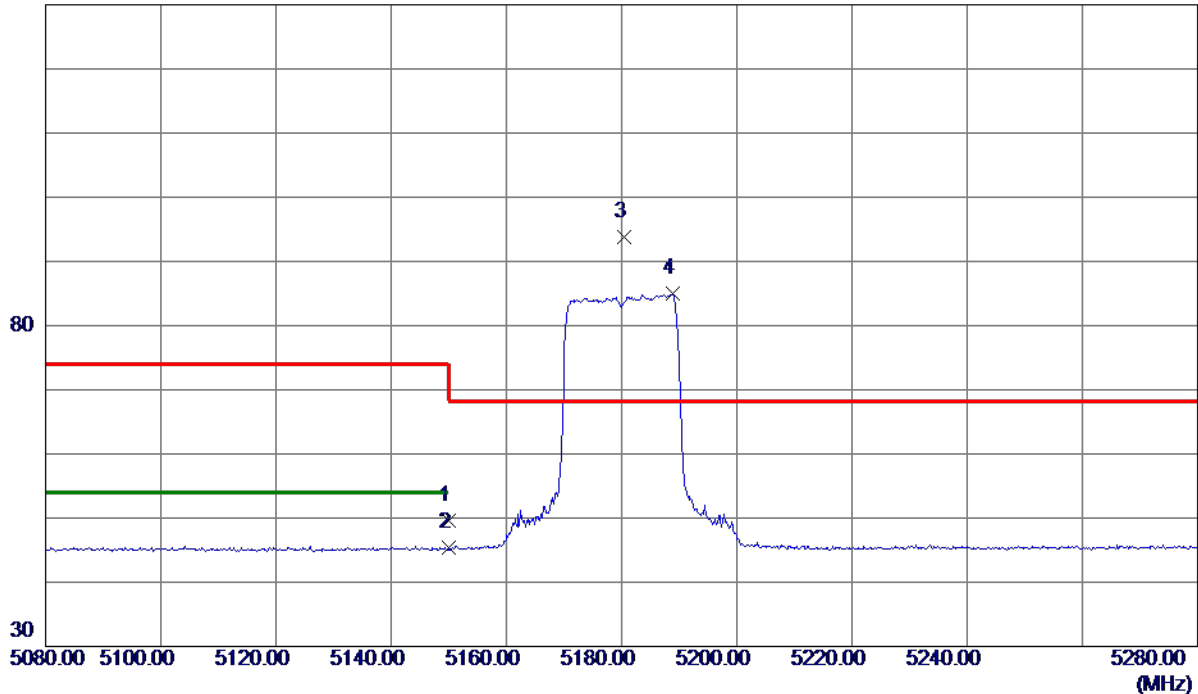

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 33.43                      | 16.16                   | 49.59                     | 74.00           | -24.41       | Peak     |          |
| 2   | 5150.0000    | 29.21                      | 16.16                   | 45.37                     | 54.00           | -8.63        | AVG      |          |
| 3 * | 5180.5000    | 77.63                      | 16.23                   | 93.86                     | 68.30           | 25.56        | Peak     | No Limit |
| 4   | 5188.8000    | 68.67                      | 16.25                   | 84.92                     | 999.00          | -914.08      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5180 MHz |

## Horizontal

80 dBuV/m

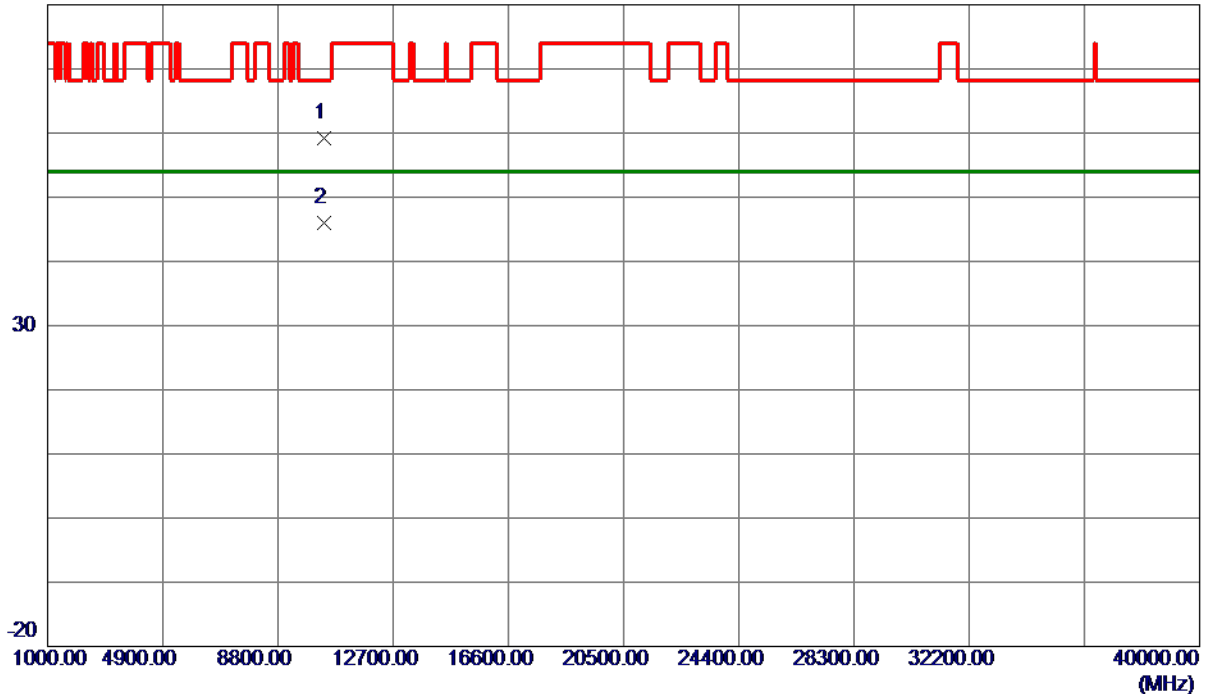

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10359.1660   | 45.63                      | 13.51                   | 59.14                     | 68.30           | -9.16        | Peak     |         |
| 2 * | 10359.5210   | 32.58                      | 13.51                   | 46.09                     | 54.00           | -7.91        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5200 MHz |

## Vertical

130 dBuV/m

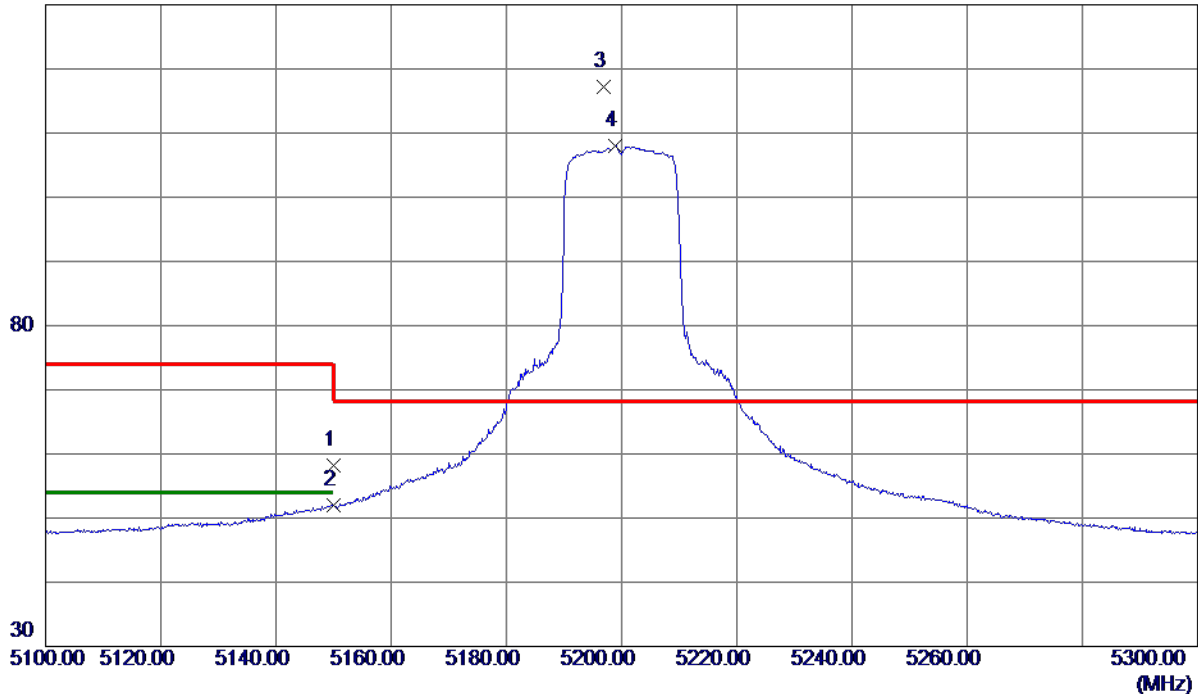

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 42.00                      | 16.16                   | 58.16                     | 74.00           | -15.84       | Peak     |          |
| 2   | 5150.0000    | 35.78                      | 16.16                   | 51.94                     | 54.00           | -2.06        | AVG      |          |
| 3 * | 5196.9000    | 100.95                     | 16.27                   | 117.22                    | 68.30           | 48.92        | Peak     | No Limit |
| 4   | 5198.8000    | 91.70                      | 16.27                   | 107.97                    | 999.00          | -891.03      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5200 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10399.1630   | 54.17                      | 13.55                   | 67.72                     | 68.30           | -0.58        | Peak     |         |
| 2   | 10399.9950   | 39.62                      | 13.55                   | 53.17                     | 54.00           | -0.83        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5200 MHz |

## Horizontal

130 dBuV/m

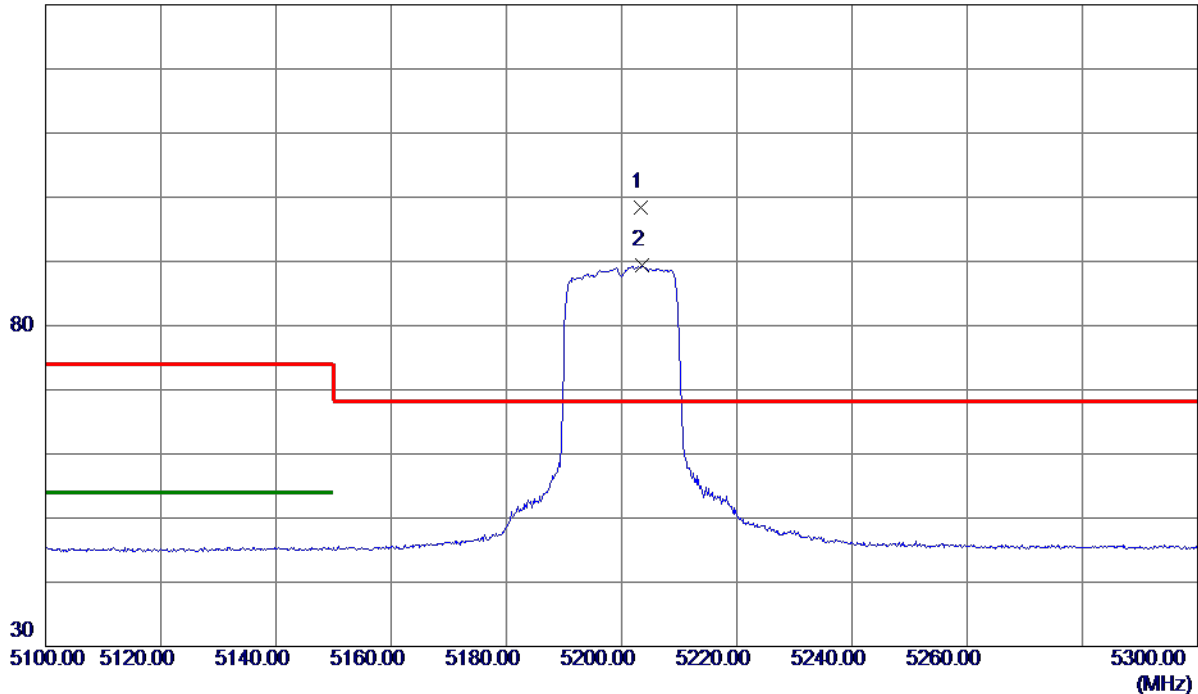

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5203.3000    | 82.18                      | 16.28                   | 98.46                     | 68.30           | 30.16        | Peak     | No Limit |
| 2   | 5203.6000    | 73.15                      | 16.28                   | 89.43                     | 999.00          | -909.57      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5200 MHz |

## Horizontal

80 dBuV/m

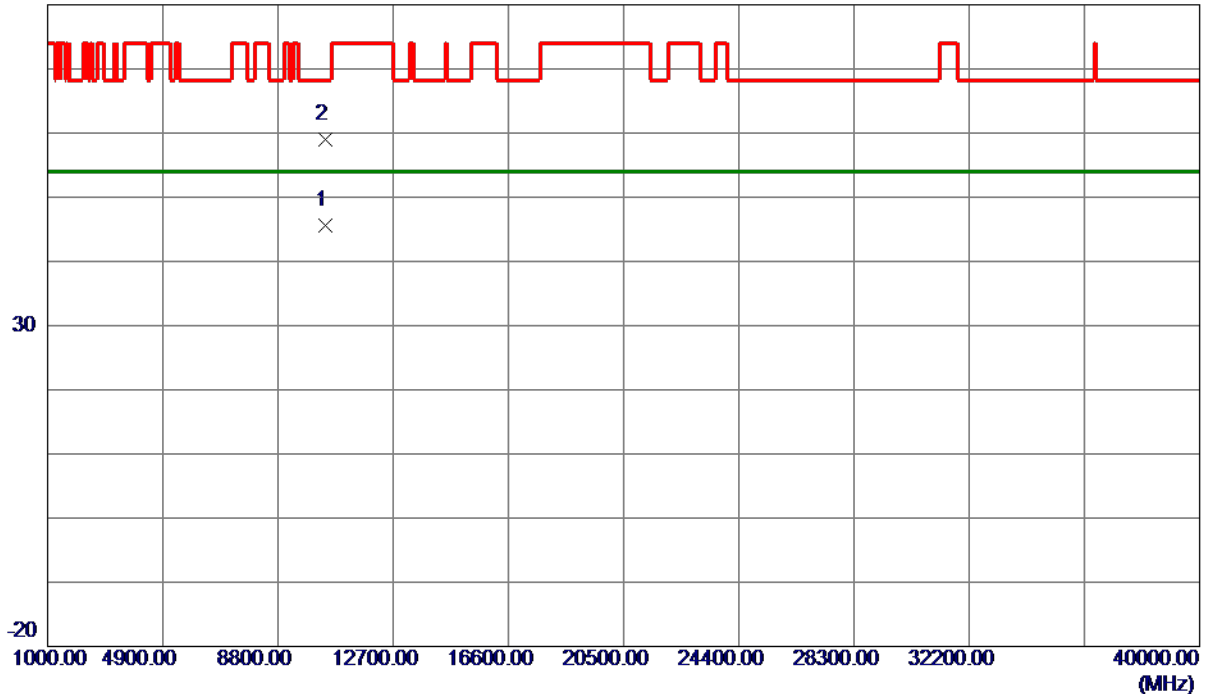

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.0359   | 31.99                      | 13.55                   | 45.54                     | 54.00           | -8.46        | AVG      |         |
| 2   | 10400.1160   | 45.46                      | 13.55                   | 59.01                     | 68.30           | -9.29        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5240 MHz |

## Vertical

130 dBuV/m

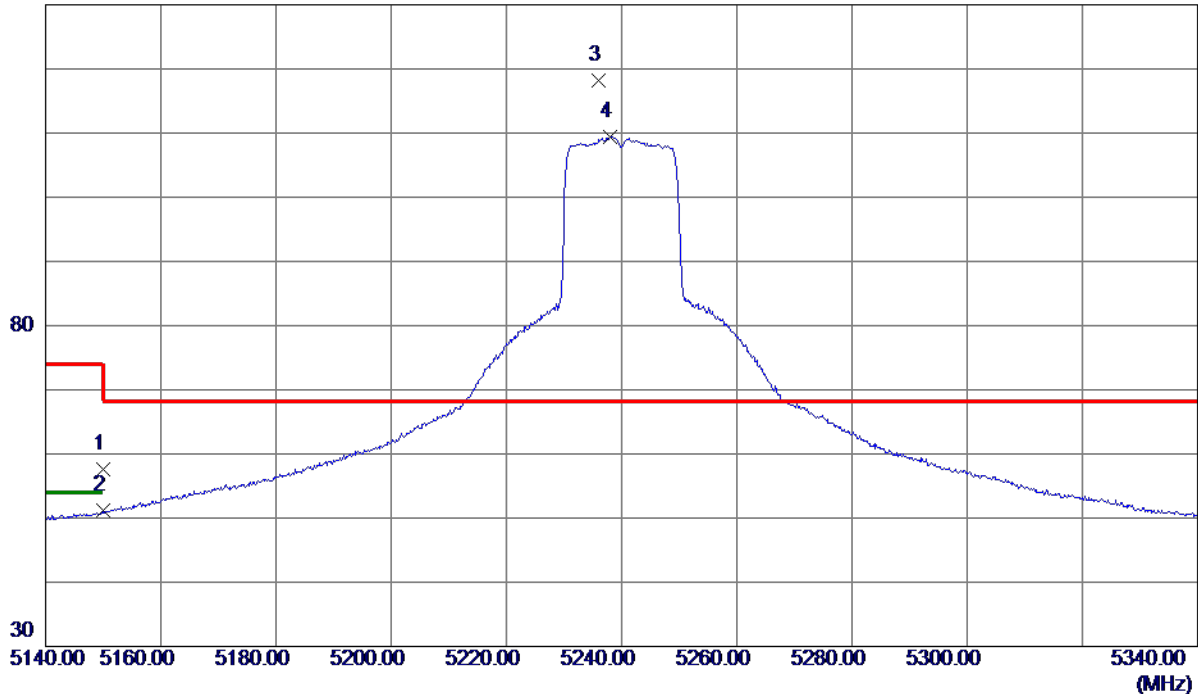

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 41.39                      | 16.16                   | 57.55                     | 74.00           | -16.45       | Peak     |          |
| 2   | 5150.0000    | 34.96                      | 16.16                   | 51.12                     | 54.00           | -2.88        | AVG      |          |
| 3 * | 5236.1000    | 101.94                     | 16.36                   | 118.30                    | 68.30           | 50.00        | Peak     | No Limit |
| 4   | 5238.1000    | 92.97                      | 16.36                   | 109.33                    | 999.00          | -889.67      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5240 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10478.0670   | 54.49                      | 13.62                   | 68.11                     | 68.30           | -0.19        | Peak     |         |
| 2   | 10478.2250   | 39.87                      | 13.62                   | 53.49                     | 54.00           | -0.51        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5240 MHz |

## Horizontal

130 dBuV/m

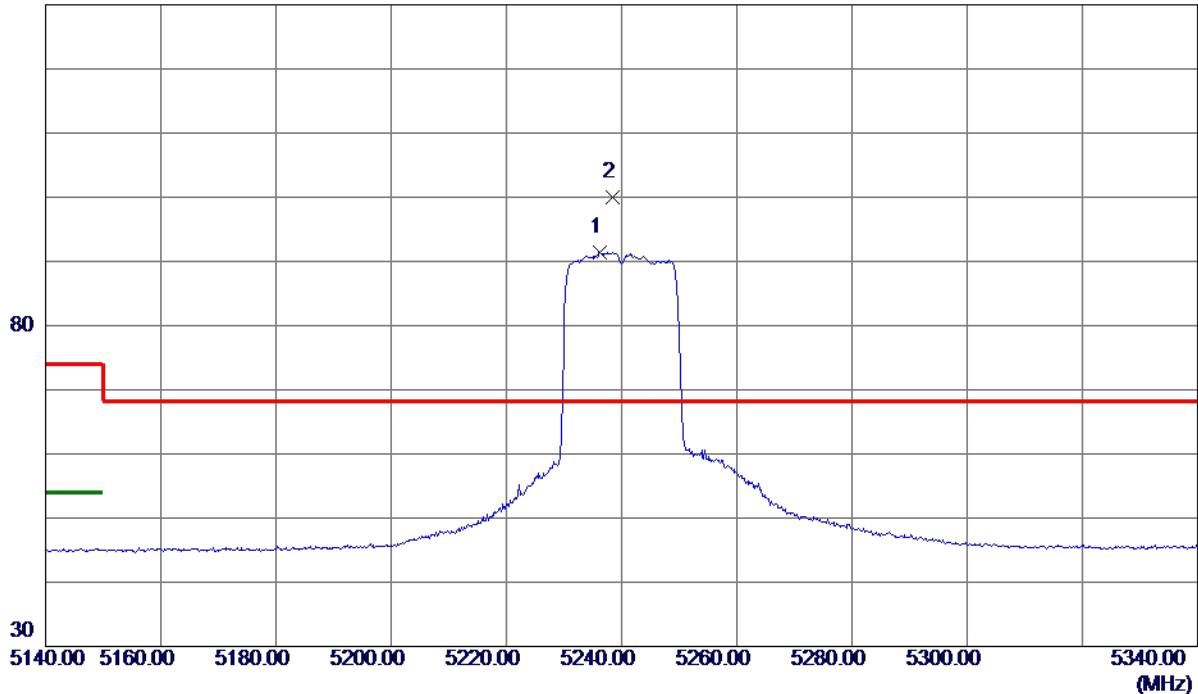

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5236.2000    | 75.06                      | 16.36                   | 91.42                     | 999.00          | -907.58      | AVG      | No Limit |
| 2 * | 5238.4000    | 83.61                      | 16.37                   | 99.98                     | 68.30           | 31.68        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE20) Mode 5240 MHz |

## Horizontal

80 dBuV/m

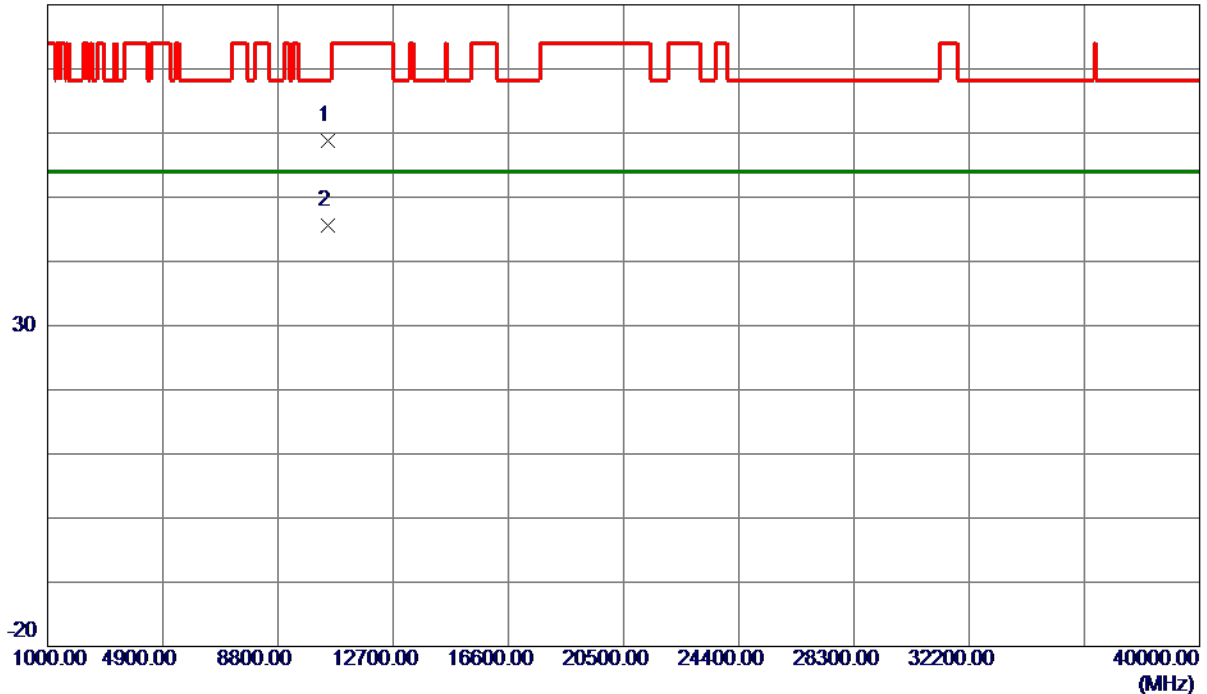

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10479.1640   | 45.17                      | 13.63                   | 58.80                     | 68.30           | -9.50        | Peak     |         |
| 2 * | 10480.0810   | 32.03                      | 13.63                   | 45.66                     | 54.00           | -8.34        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5190 MHz |

## Vertical

130 dBuV/m

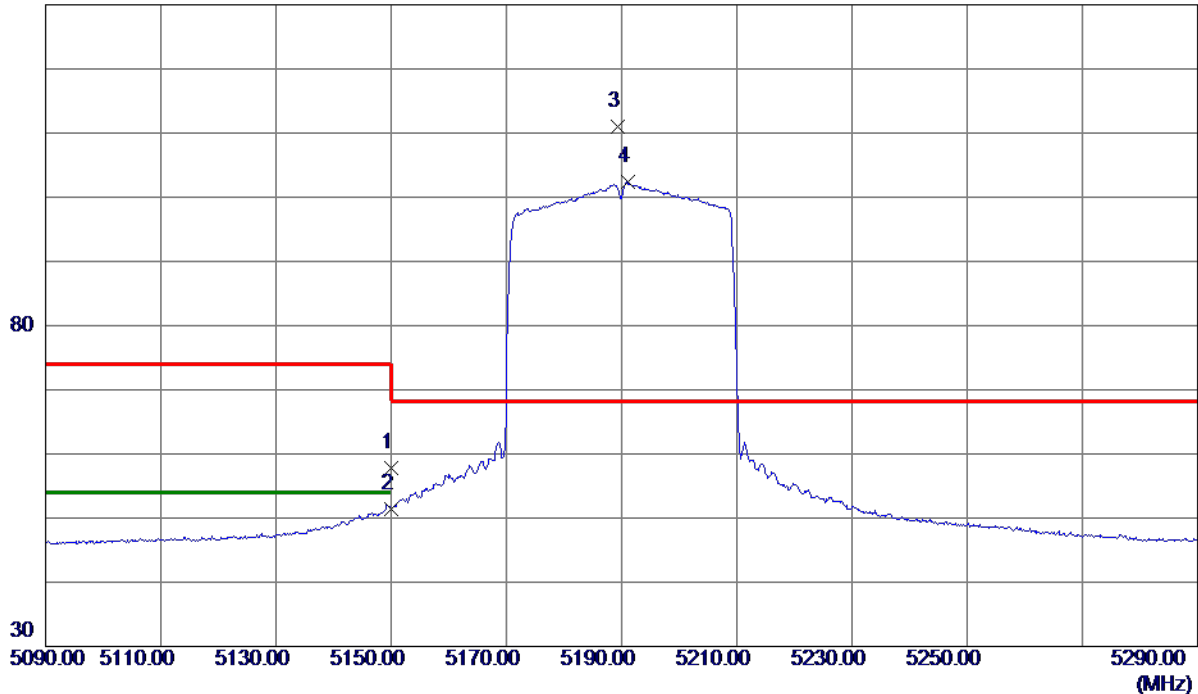

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 41.70                      | 16.16                   | 57.86                     | 74.00           | -16.14       | Peak     |          |
| 2   | 5150.0000    | 35.32                      | 16.16                   | 51.48                     | 54.00           | -2.52        | AVG      |          |
| 3 * | 5189.4000    | 94.83                      | 16.25                   | 111.08                    | 68.30           | 42.78        | Peak     | No Limit |
| 4   | 5191.1000    | 86.11                      | 16.25                   | 102.36                    | 999.00          | -896.64      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5190 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10380.5410   | 38.83                      | 13.53                   | 52.36                     | 54.00           | -1.64        | AVG      |         |
| 2 * | 10381.8300   | 54.10                      | 13.54                   | 67.64                     | 68.30           | -0.66        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5190 MHz |

## Horizontal

130 dBuV/m

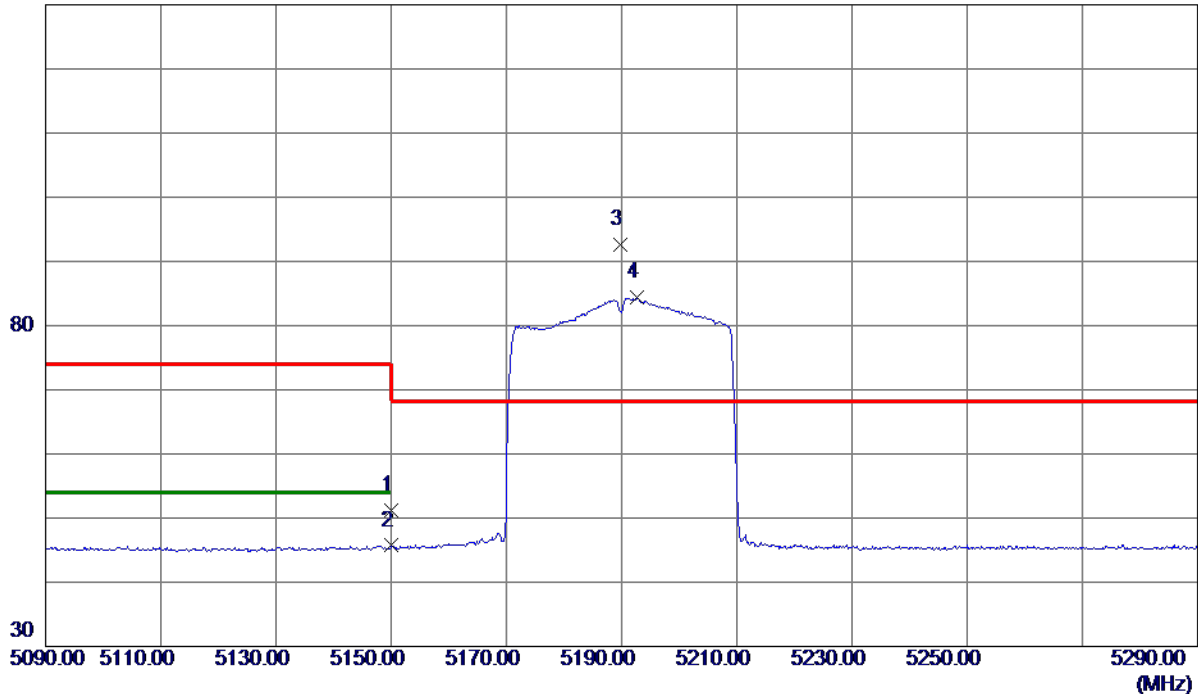

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 34.99                      | 16.16                   | 51.15                     | 74.00           | -22.85       | Peak     |          |
| 2   | 5150.0000    | 29.54                      | 16.16                   | 45.70                     | 54.00           | -8.30        | AVG      |          |
| 3 * | 5189.8000    | 76.38                      | 16.25                   | 92.63                     | 68.30           | 24.33        | Peak     | No Limit |
| 4   | 5192.7000    | 68.05                      | 16.26                   | 84.31                     | 999.00          | -914.69      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5190 MHz |

## Horizontal

80 dBuV/m

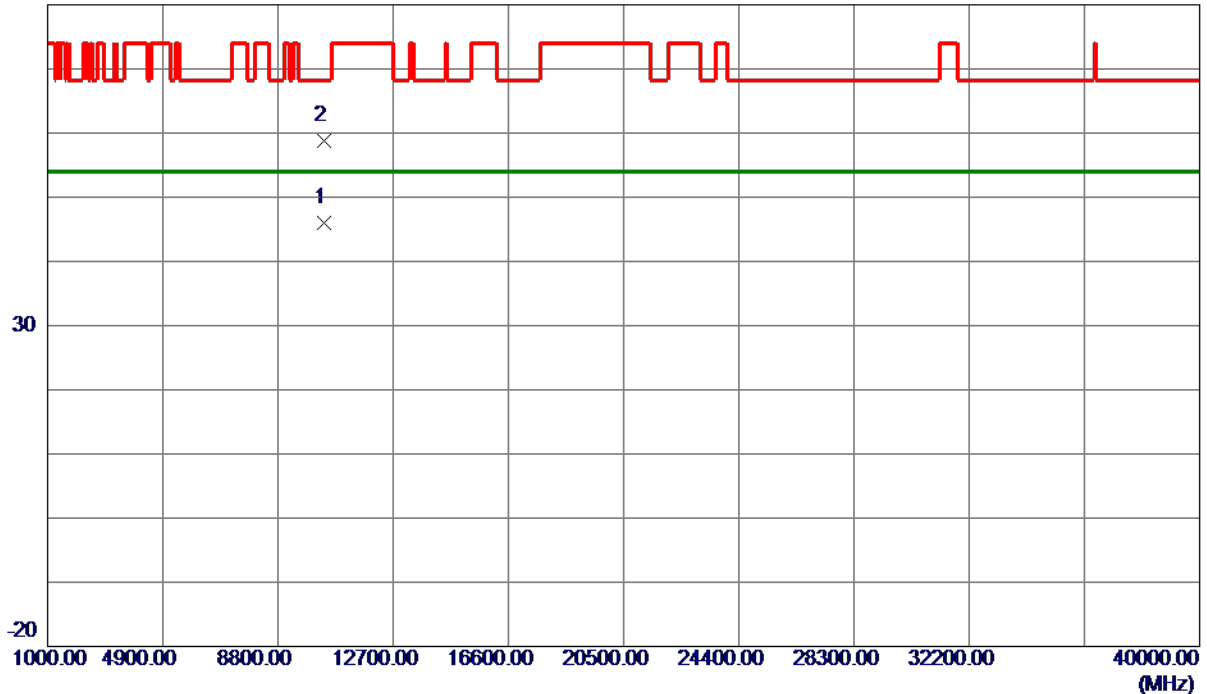

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0020   | 32.39                      | 13.53                   | 45.92                     | 54.00           | -8.08        | AVG      |         |
| 2   | 10380.1160   | 45.32                      | 13.53                   | 58.85                     | 68.30           | -9.45        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5230 MHz |

## Vertical

130 dBuV/m

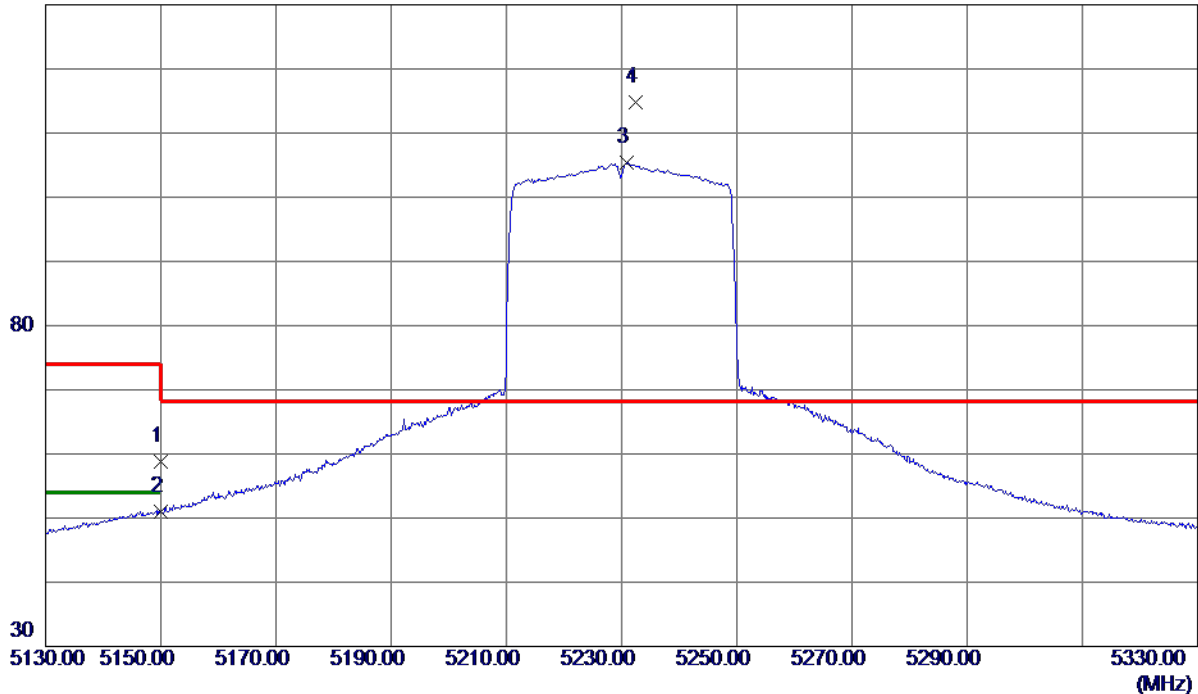

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 42.59                      | 16.16                   | 58.75                     | 74.00           | -15.25       | Peak     |          |
| 2   | 5150.0000    | 34.85                      | 16.16                   | 51.01                     | 54.00           | -2.99        | AVG      |          |
| 3   | 5230.8000    | 89.12                      | 16.35                   | 105.47                    | 999.00          | -893.53      | AVG      | No Limit |
| 4 * | 5232.5000    | 98.53                      | 16.35                   | 114.88                    | 68.30           | 46.58        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5230 MHz |

## Vertical

80 dBuV/m

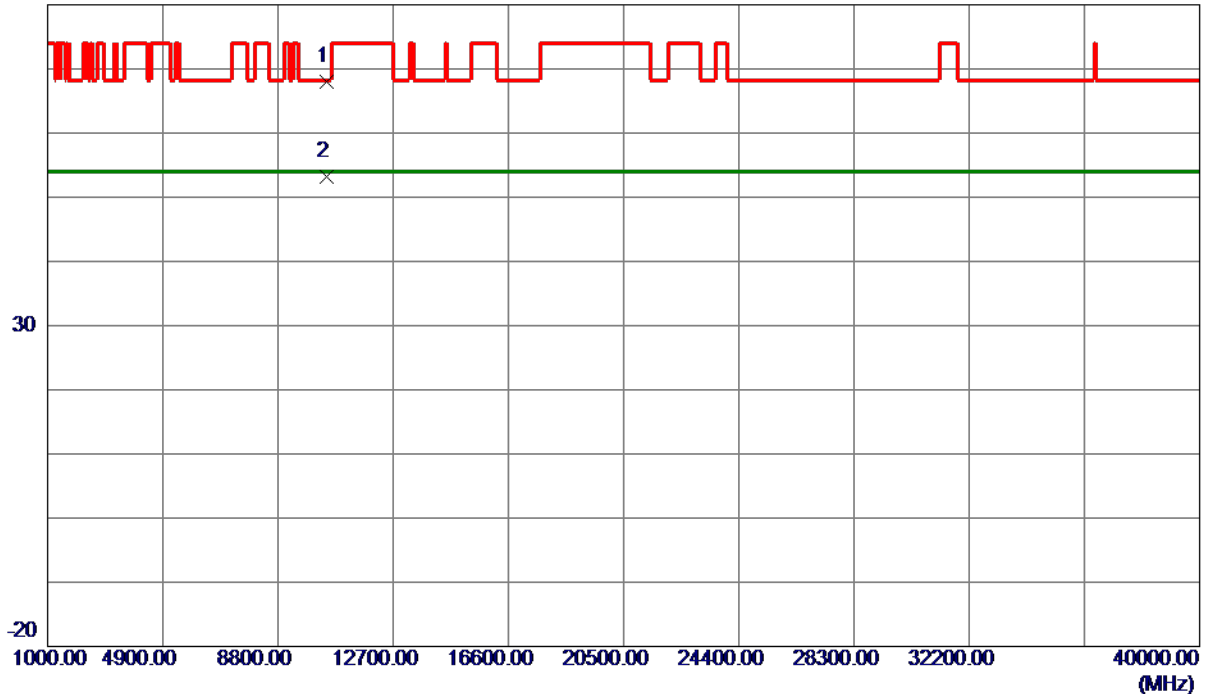

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10462.1400   | 54.32                      | 13.61                   | 67.93                     | 68.30           | -0.37        | Peak     |         |
| 2   | 10462.2539   | 39.64                      | 13.61                   | 53.25                     | 54.00           | -0.75        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5230 MHz |

## Horizontal

130 dBuV/m

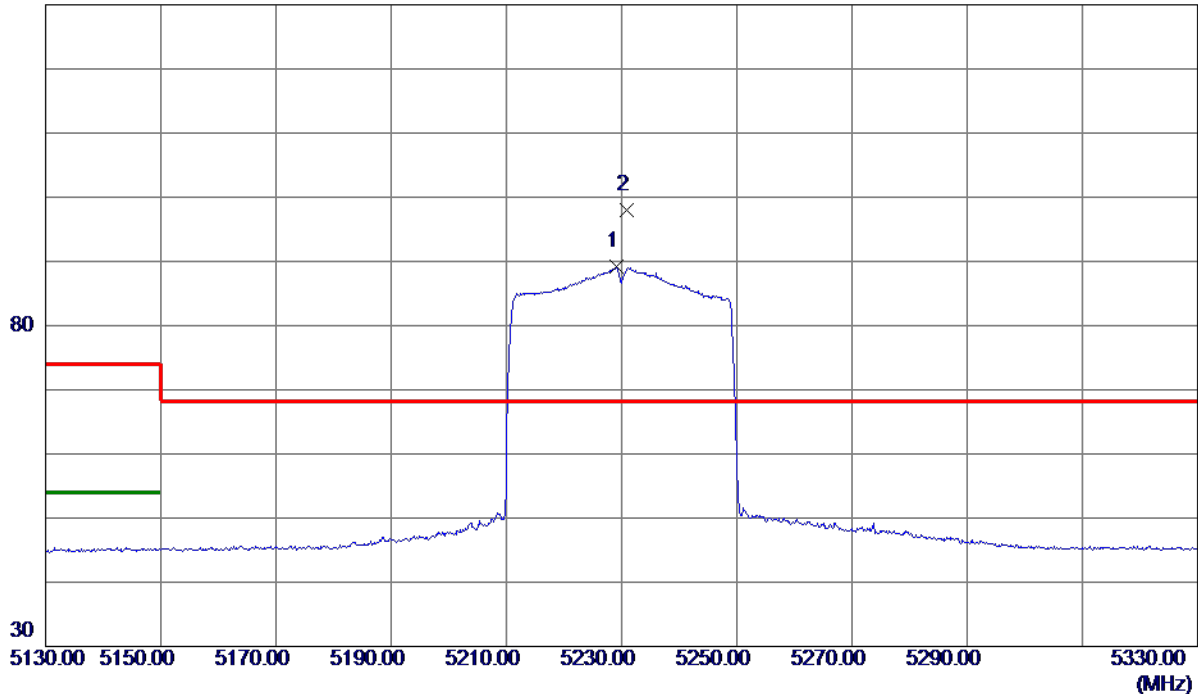

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5229.1000    | 72.86                      | 16.34                   | 89.20                     | 999.00          | -909.80      | AVG      | No Limit |
| 2 * | 5230.9000    | 81.62                      | 16.35                   | 97.97                     | 68.30           | 29.67        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE40) Mode 5230 MHz |

## Horizontal

80 dBuV/m

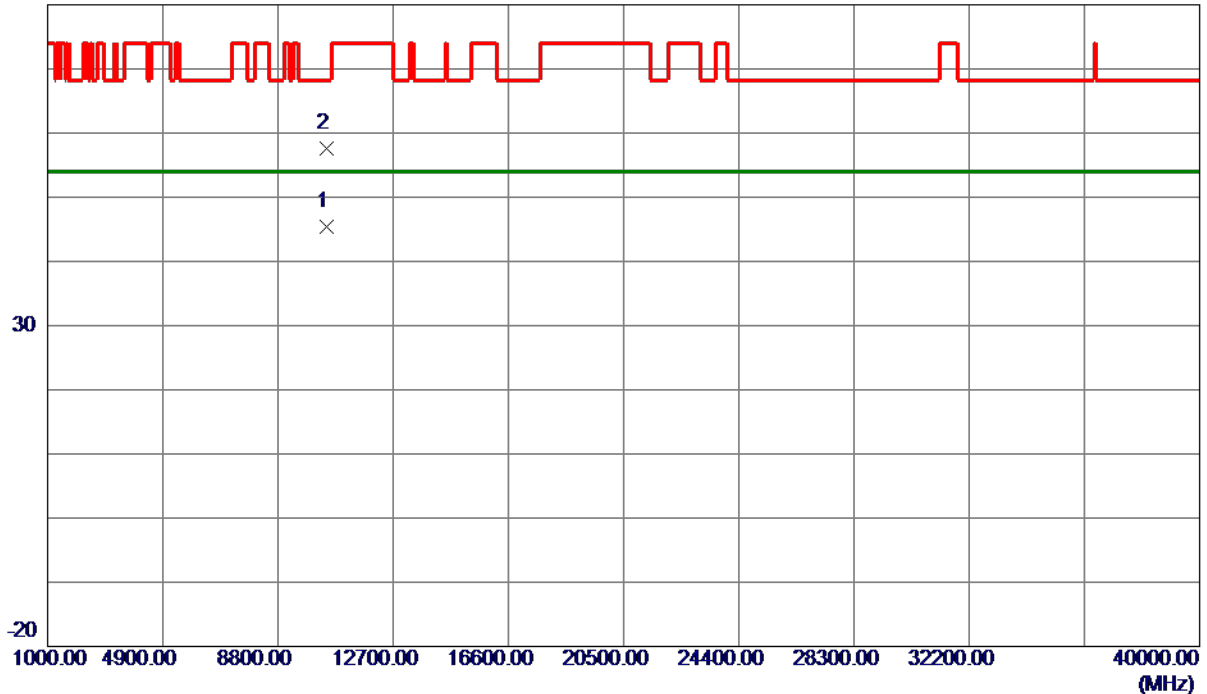

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.2150   | 31.86                      | 13.61                   | 45.47                     | 54.00           | -8.53        | AVG      |         |
| 2   | 10460.5020   | 44.06                      | 13.61                   | 57.67                     | 68.30           | -10.63       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE80) Mode 5210 MHz |

## Vertical

130 dBuV/m

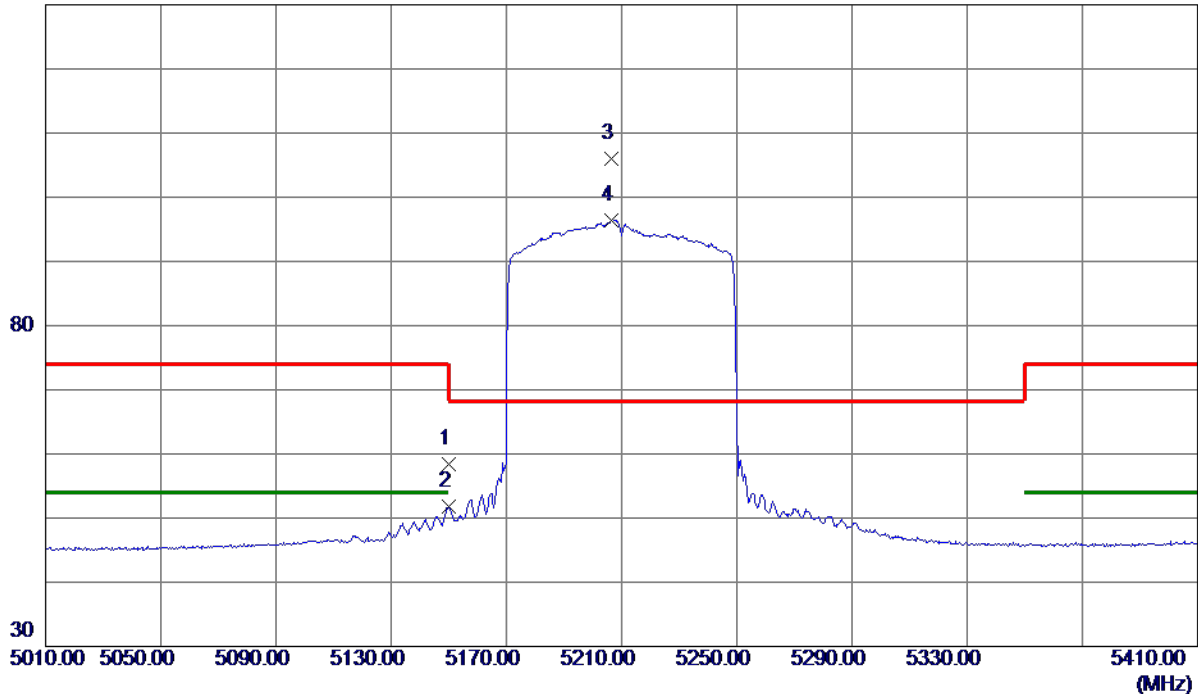

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 42.20                      | 16.16                   | 58.36                     | 74.00           | -15.64       | Peak     |          |
| 2   | 5150.0000    | 35.55                      | 16.16                   | 51.71                     | 54.00           | -2.29        | AVG      |          |
| 3 * | 5206.4000    | 89.61                      | 16.29                   | 105.90                    | 68.30           | 37.60        | Peak     | No Limit |
| 4   | 5206.6000    | 80.12                      | 16.29                   | 96.41                     | 999.00          | -902.59      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE80) Mode 5210 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10420.2530   | 39.69                      | 13.57                   | 53.26                     | 54.00           | -0.74        | AVG      |         |
| 2 * | 10420.7800   | 54.11                      | 13.57                   | 67.68                     | 68.30           | -0.62        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE80) Mode 5210 MHz |

## Horizontal

130 dBuV/m

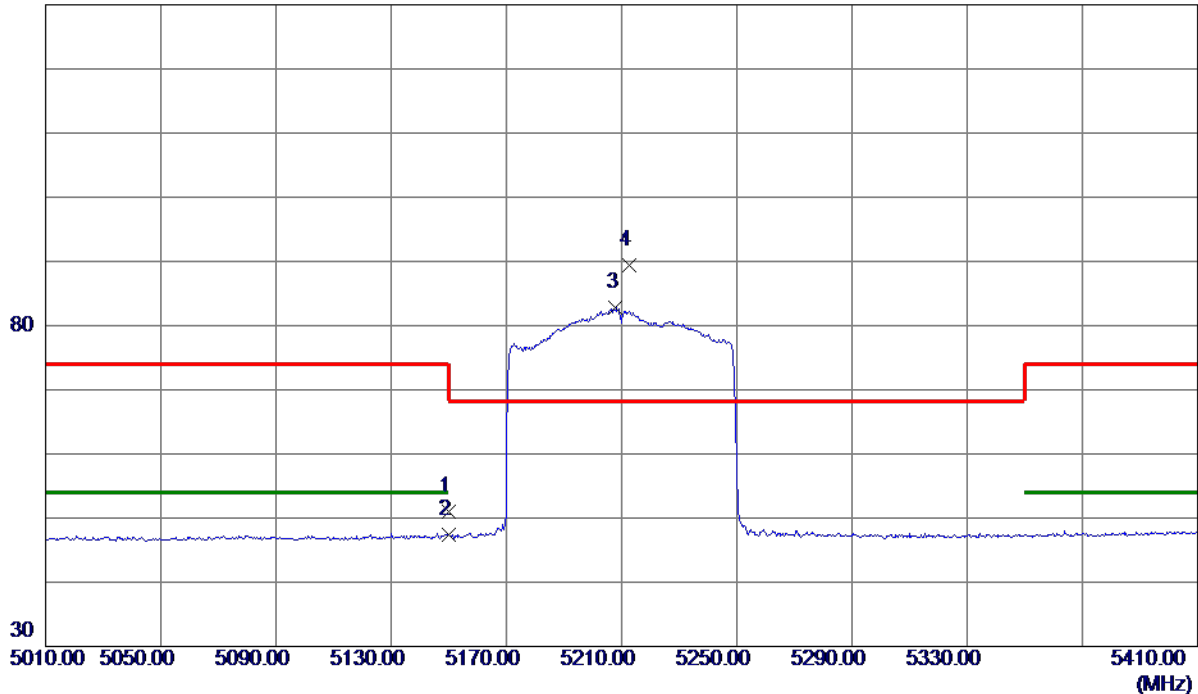

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 34.77                      | 16.16                   | 50.93                     | 74.00           | -23.07       | Peak     |          |
| 2   | 5150.0000    | 31.29                      | 16.16                   | 47.45                     | 54.00           | -6.55        | AVG      |          |
| 3   | 5208.0000    | 66.51                      | 16.29                   | 82.80                     | 999.00          | -916.20      | AVG      | No Limit |
| 4 * | 5212.8000    | 73.05                      | 16.30                   | 89.35                     | 68.30           | 21.05        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-1_TX AX (HE80) Mode 5210 MHz |

## Horizontal

80 dBuV/m

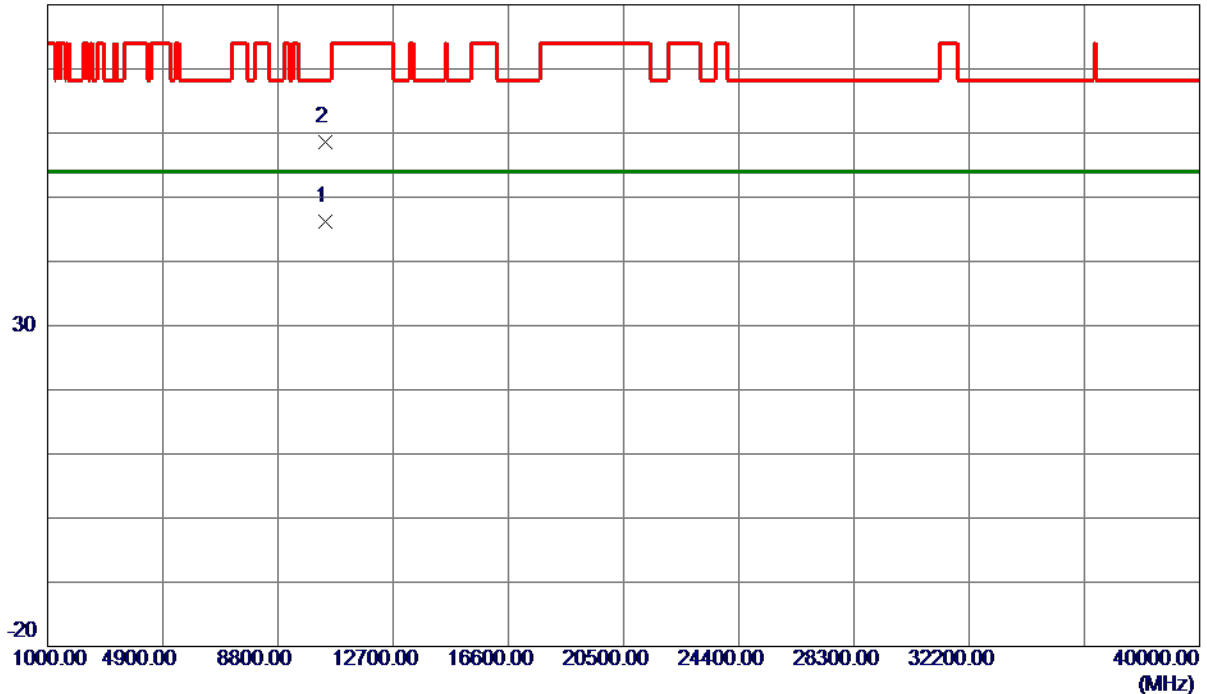


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10419.0860   | 32.54                      | 13.57                   | 46.11                     | 54.00           | -7.89        | AVG      |         |
| 2   | 10419.4980   | 45.01                      | 13.57                   | 58.58                     | 68.30           | -9.72        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5260 MHz |

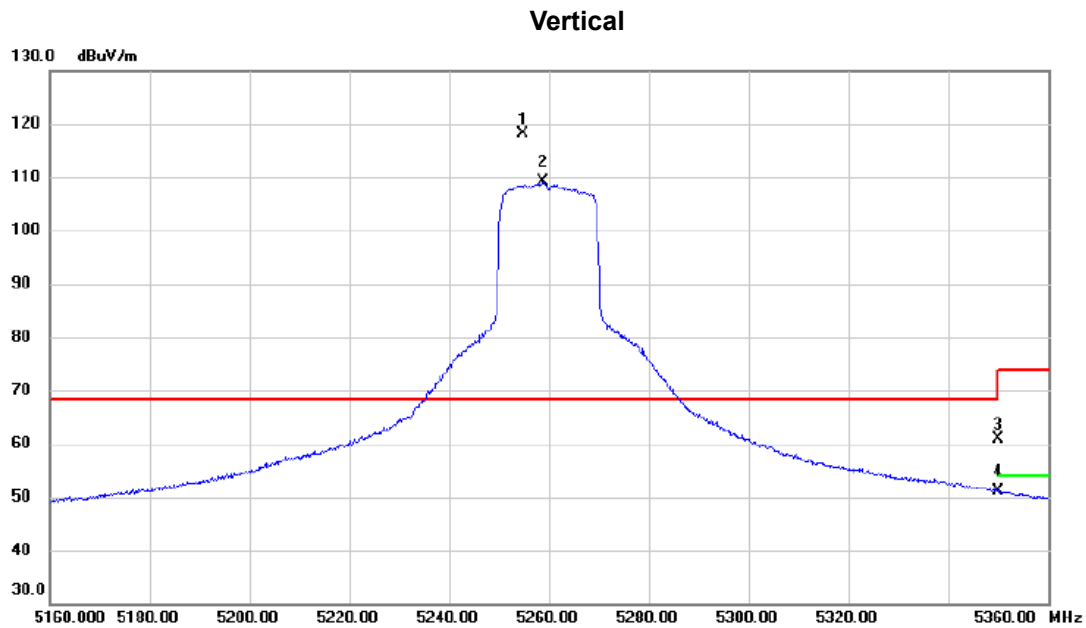

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5254.800     | 101.84                   | 16.41                   | 118.25                     | 68.30           | 49.95        | peak     | No Limit |
| 2   | X   | 5258.900     | 92.74                    | 16.42                   | 109.16                     | 68.30           | 40.86        | AVG      | No Limit |
| 3   |     | 5350.000     | 44.28                    | 16.63                   | 60.91                      | 74.00           | -13.09       | peak     |          |
| 4   |     | 5350.000     | 34.61                    | 16.63                   | 51.24                      | 54.00           | -2.76        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5260 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10520.0279   | 54.37                      | 13.66                   | 68.03                     | 68.30           | -0.27        | Peak     |         |
| 2   | 10520.6849   | 39.03                      | 13.66                   | 52.69                     | 54.00           | -1.31        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5260 MHz |

## Horizontal

130 dBuV/m

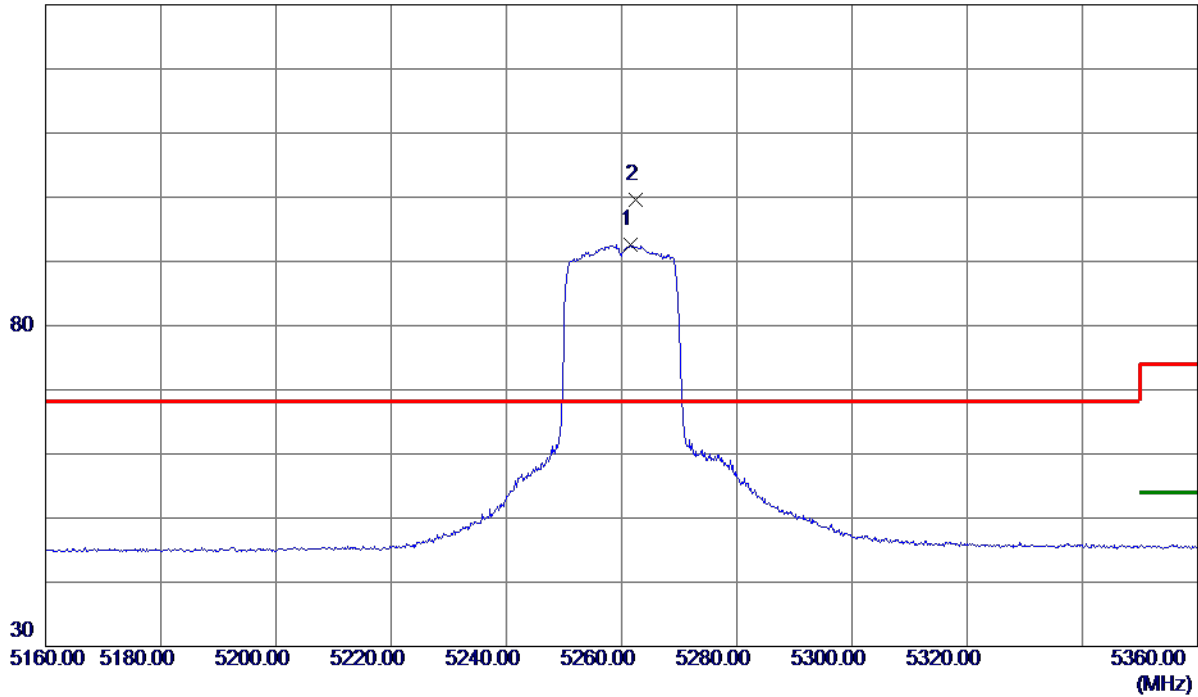

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5261.5000    | 76.16                      | 16.42                   | 92.58                     | 999.00          | -906.42      | AVG      | No Limit |
| 2 * | 5262.5000    | 83.24                      | 16.42                   | 99.66                     | 68.30           | 31.36        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5260 MHz |

## Horizontal

80 dBuV/m

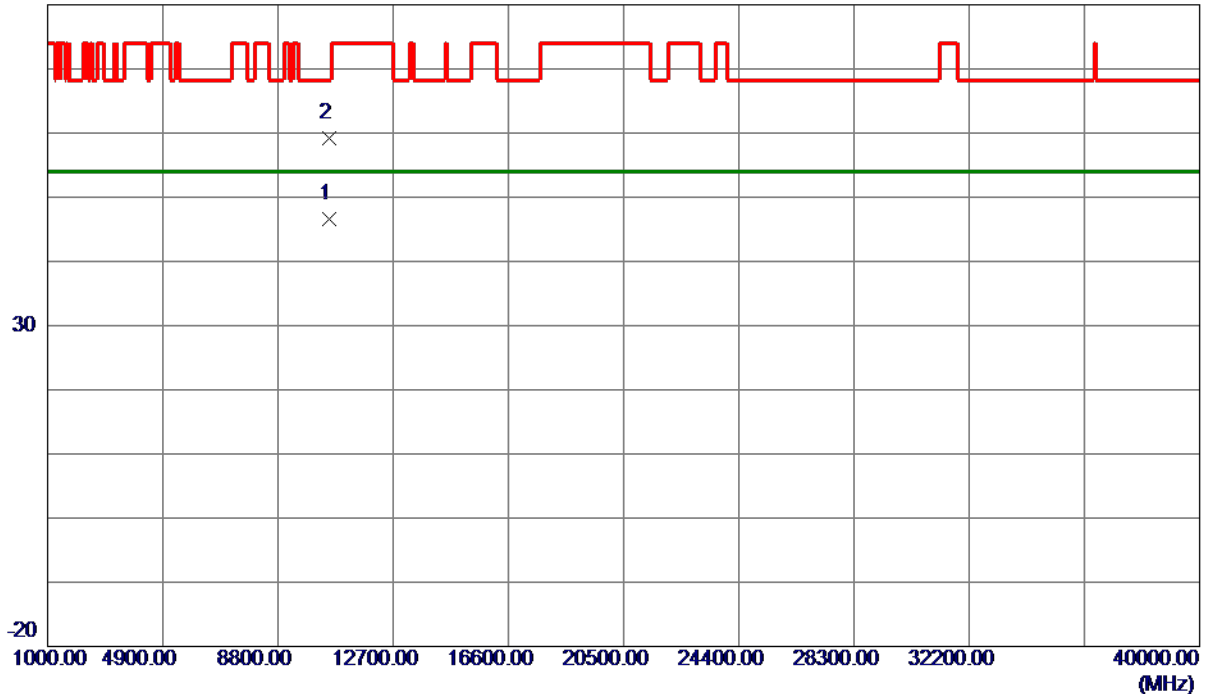


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10520.2450   | 33.03                      | 13.66                   | 46.69                     | 54.00           | -7.31        | AVG      |         |
| 2   | 10520.6040   | 45.57                      | 13.66                   | 59.23                     | 68.30           | -9.07        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5300 MHz |

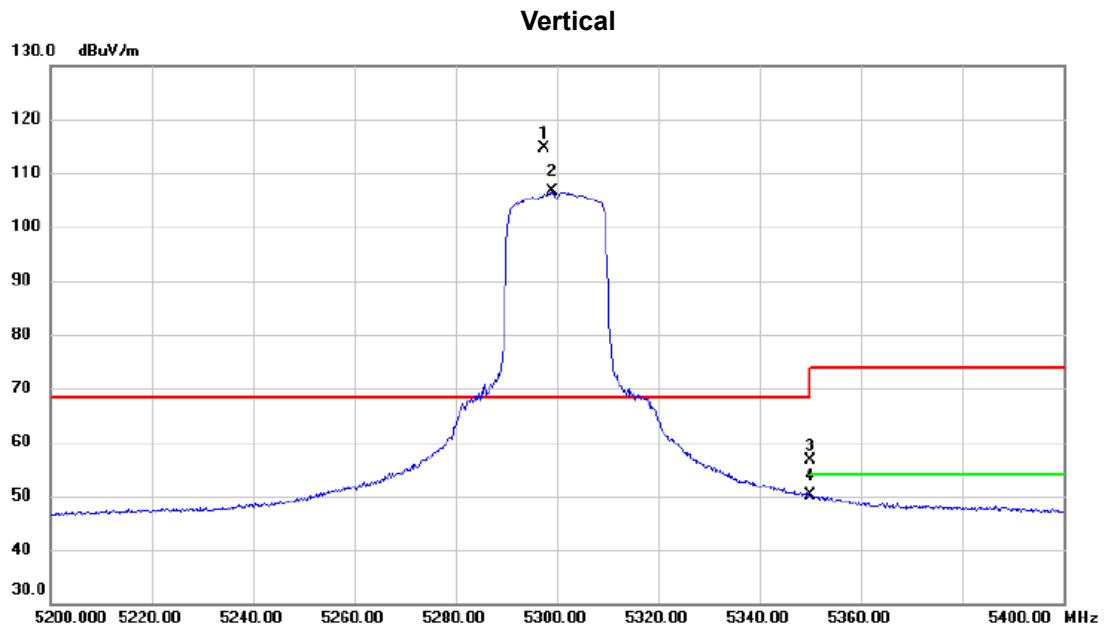

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5297.500     | 98.07                    | 16.51                   | 114.58                     | 68.30           | 46.28        | peak     | No Limit |
| 2   | X   | 5299.100     | 90.00                    | 16.52                   | 106.52                     | 68.30           | 38.22        | AVG      | No Limit |
| 3   |     | 5350.000     | 40.02                    | 16.63                   | 56.65                      | 74.00           | -17.35       | peak     |          |
| 4   |     | 5350.000     | 33.48                    | 16.63                   | 50.11                      | 54.00           | -3.89        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5300 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10599.5220   | 53.69                      | 13.70                   | 67.39                     | 68.30           | -0.91        | Peak     |         |
| 2 * | 10601.2350   | 40.19                      | 13.70                   | 53.89                     | 54.00           | -0.11        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5300 MHz |

## Horizontal

130 dBuV/m

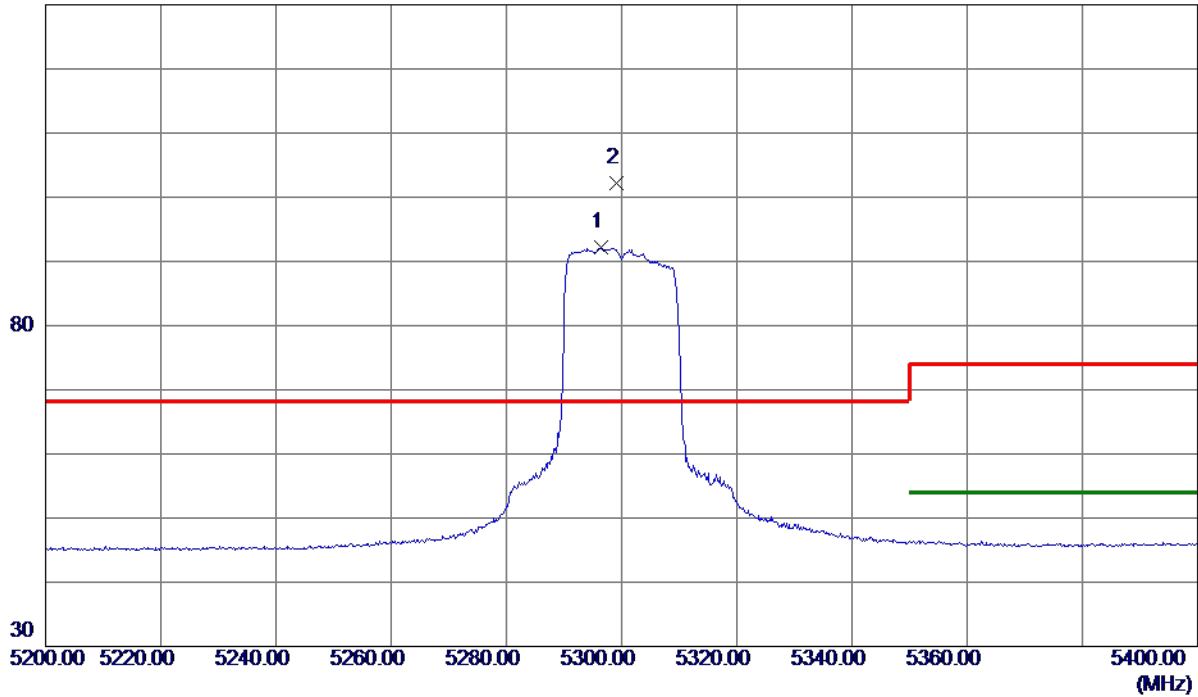

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5296.4000    | 75.70                      | 16.50                   | 92.20                     | 999.00          | -906.80      | AVG      | No Limit |
| 2 * | 5299.2000    | 85.60                      | 16.51                   | 102.11                    | 68.30           | 33.81        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5300 MHz |

## Horizontal

80 dBuV/m

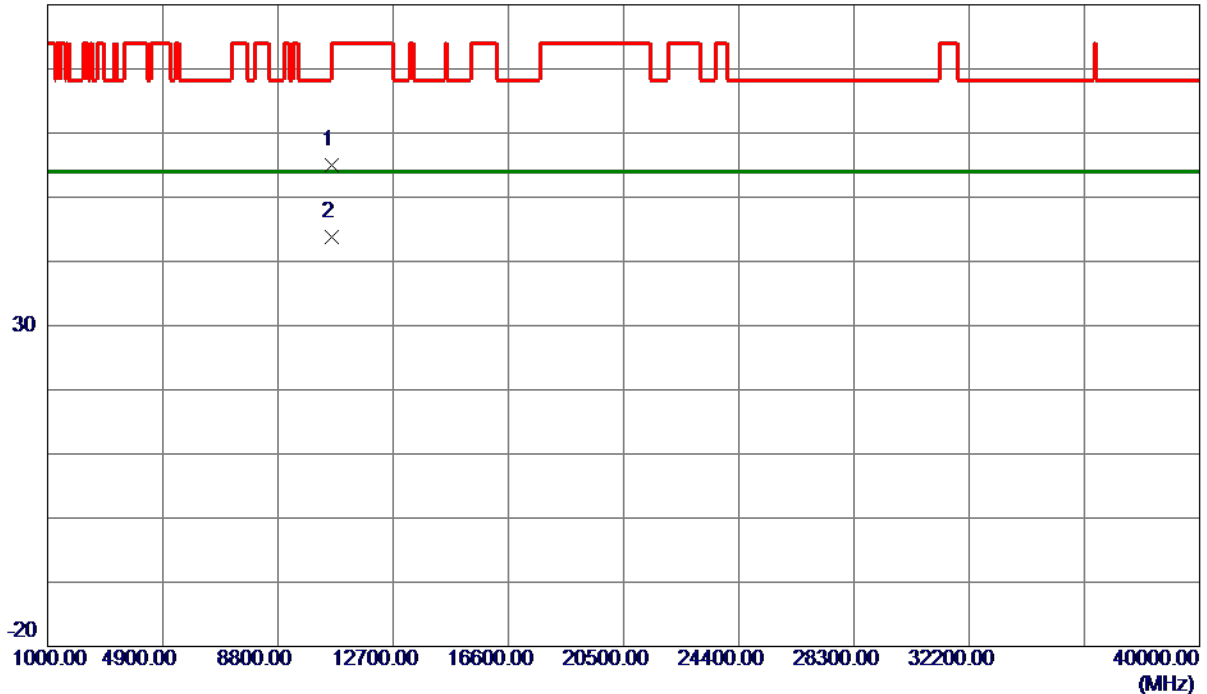


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10600.0260   | 41.32                      | 13.70                   | 55.02                     | 74.00           | -18.98       | Peak     |         |
| 2 * | 10600.5340   | 30.11                      | 13.70                   | 43.81                     | 54.00           | -10.19       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5320 MHz |

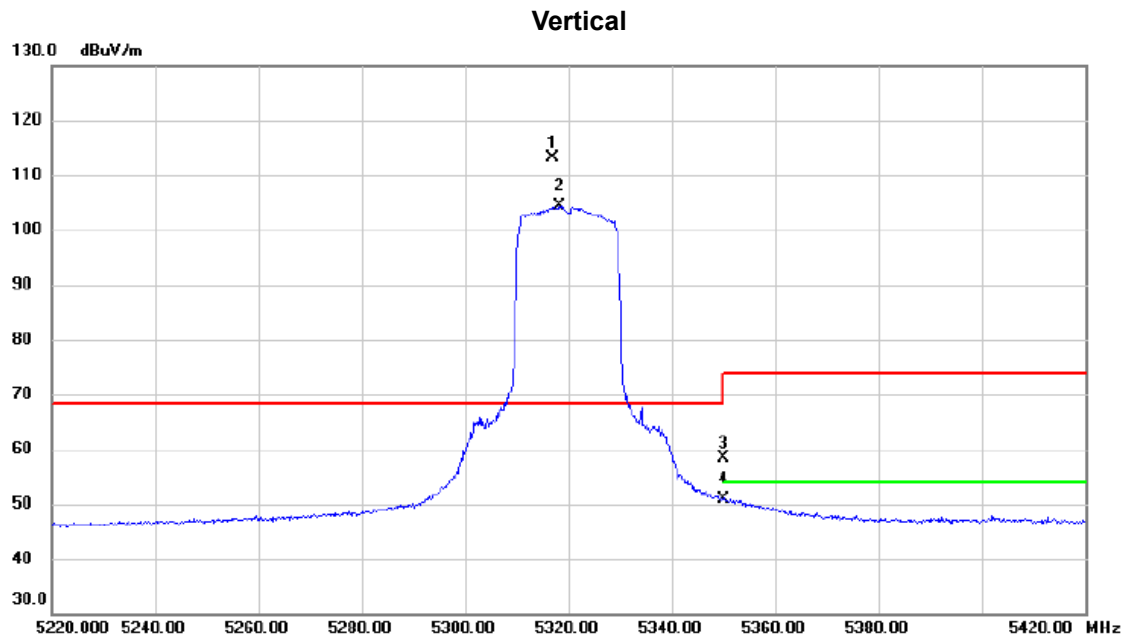

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5316.800     | 96.68                    | 16.55                   | 113.23                     | 68.30           | 44.93        | peak     | No Limit |
| 2   | X   | 5318.300     | 87.73                    | 16.55                   | 104.28                     | 68.30           | 35.98        | AVG      | No Limit |
| 3   |     | 5350.000     | 41.63                    | 16.63                   | 58.26                      | 74.00           | -15.74       | peak     |          |
| 4   |     | 5350.000     | 34.35                    | 16.63                   | 50.98                      | 54.00           | -3.02        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5320 MHz |

## Vertical

80 dBuV/m




| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10639.1200   | 39.50                      | 13.72                   | 53.22                     | 54.00           | -0.78        | AVG      |         |
| 2   | 10639.6769   | 53.70                      | 13.72                   | 67.42                     | 74.00           | -6.58        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5320 MHz |

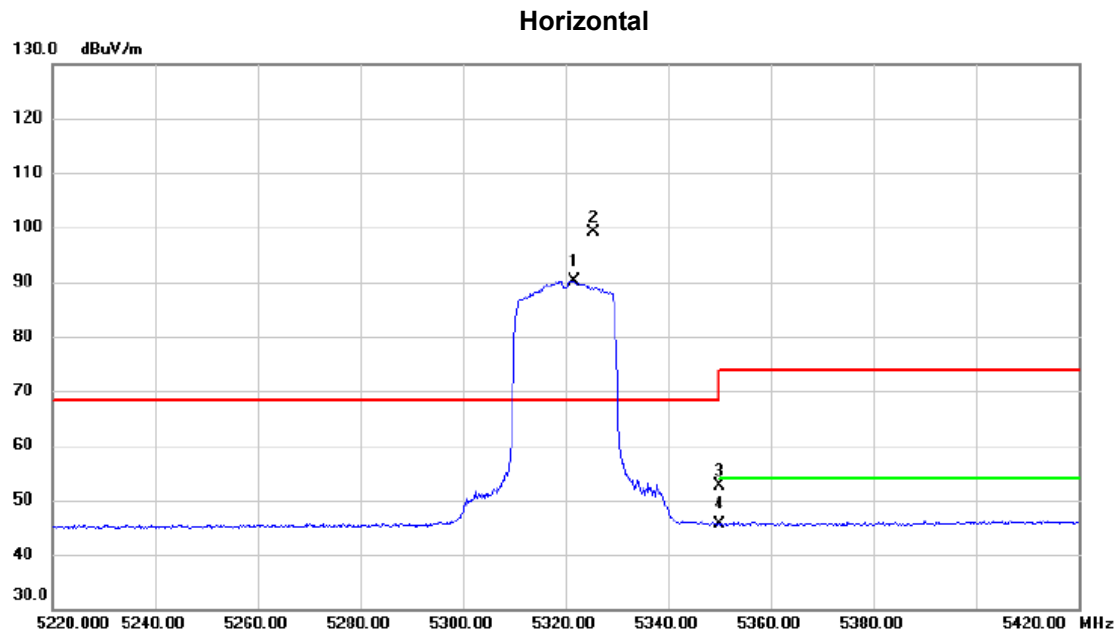

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5321.600     | 73.60                    | 16.56                   | 90.16                      | 68.30           | 21.86        | AVG      | No Limit |
| 2   | *   | 5325.400     | 82.68                    | 16.57                   | 99.25                      | 68.30           | 30.95        | peak     | No Limit |
| 3   |     | 5350.000     | 35.94                    | 16.63                   | 52.57                      | 74.00           | -21.43       | peak     |          |
| 4   |     | 5350.000     | 28.92                    | 16.63                   | 45.55                      | 54.00           | -8.45        | AVG      |          |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE20) Mode 5320 MHz |

## Horizontal

80 dBuV/m

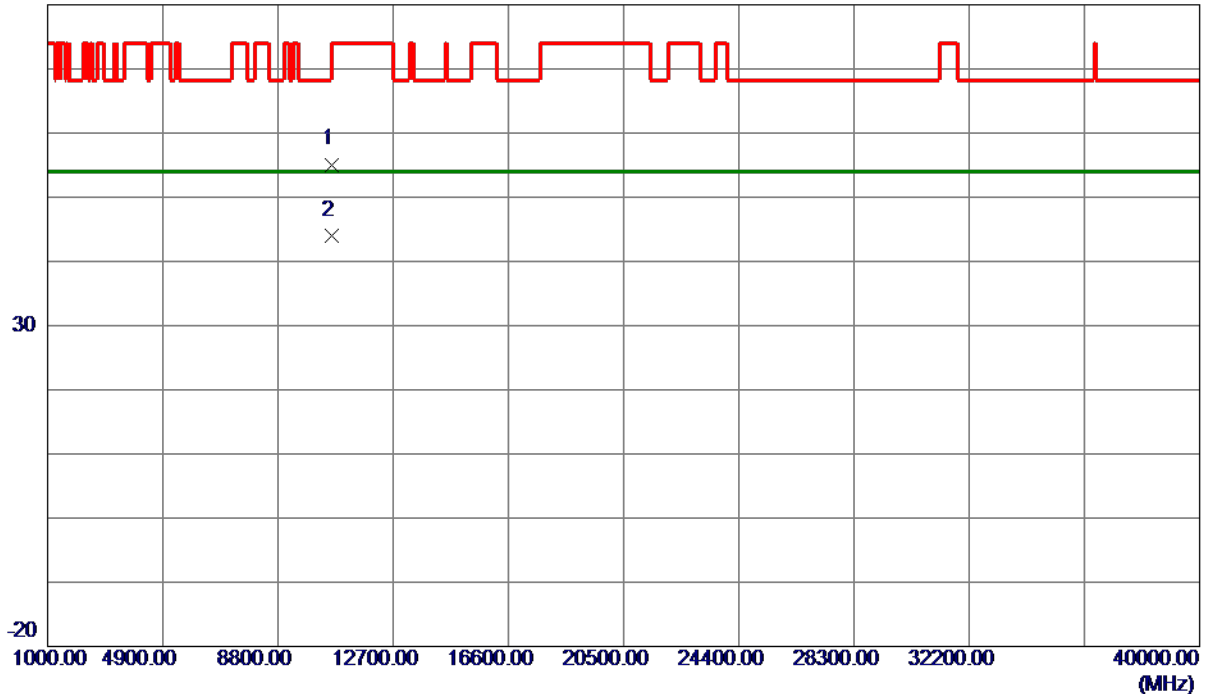


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.2500   | 41.38                      | 13.72                   | 55.10                     | 74.00           | -18.90       | Peak     |         |
| 2 * | 10640.3560   | 30.27                      | 13.72                   | 43.99                     | 54.00           | -10.01       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5270 MHz |

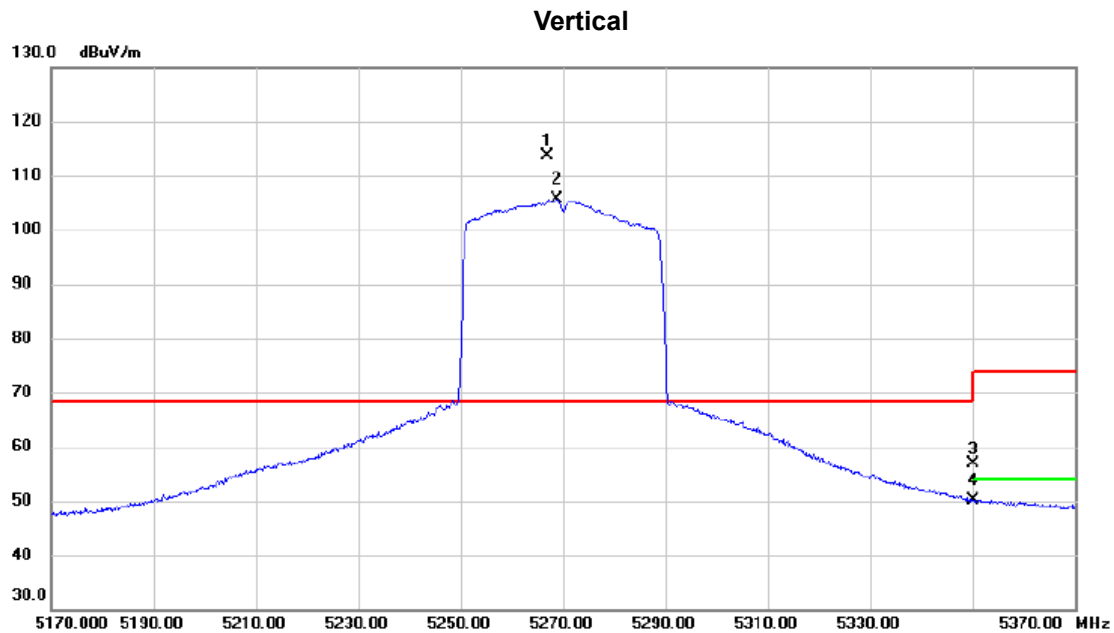

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5266.900     | 97.15                    | 16.44                   | 113.59                     | 68.30           | 45.29        | peak     | No Limit |
| 2   | X   | 5268.900     | 89.15                    | 16.44                   | 105.59                     | 68.30           | 37.29        | AVG      | No Limit |
| 3   |     | 5350.000     | 40.20                    | 16.63                   | 56.83                      | 74.00           | -17.17       | peak     |          |
| 4   |     | 5350.000     | 33.42                    | 16.63                   | 50.05                      | 54.00           | -3.95        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5270 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10539.5000   | 53.75                      | 13.67                   | 67.42                     | 68.30           | -0.88        | Peak     |         |
| 2 * | 10539.5279   | 39.53                      | 13.67                   | 53.20                     | 54.00           | -0.80        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5270 MHz |

## Horizontal

130 dBuV/m

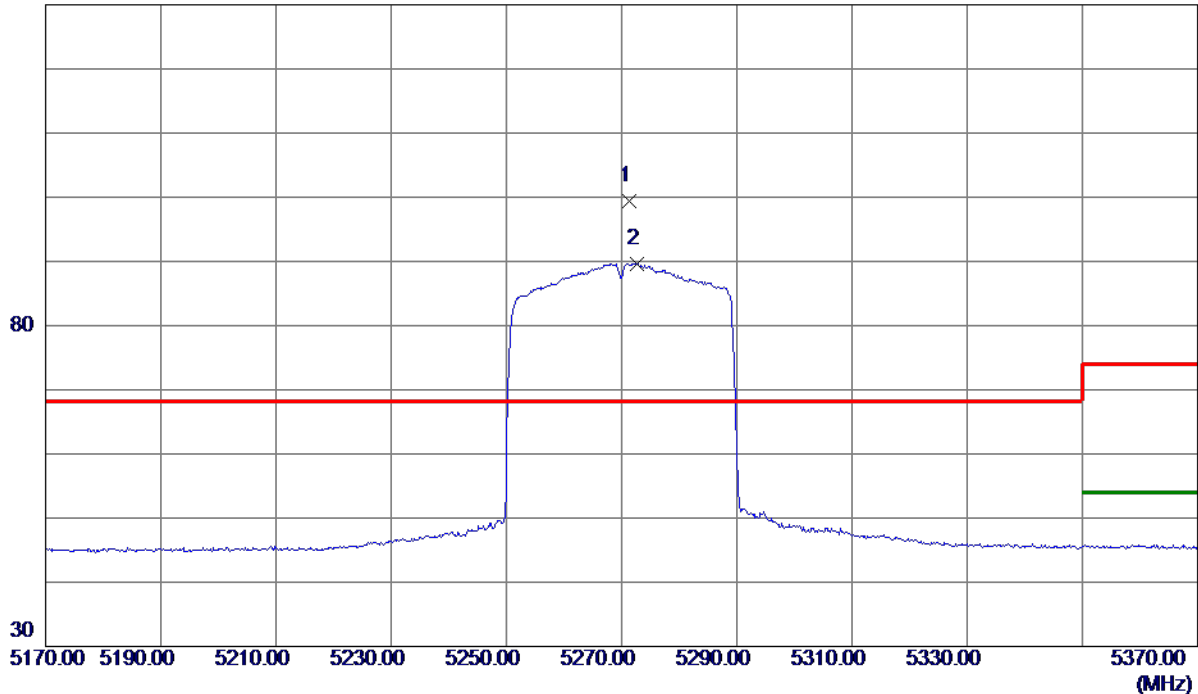

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5271.3000    | 82.87                      | 16.44                   | 99.31                     | 68.30           | 31.01        | Peak     | No Limit |
| 2   | 5272.7000    | 73.20                      | 16.45                   | 89.65                     | 999.00          | -909.35      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5270 MHz |

## Horizontal

80 dBuV/m

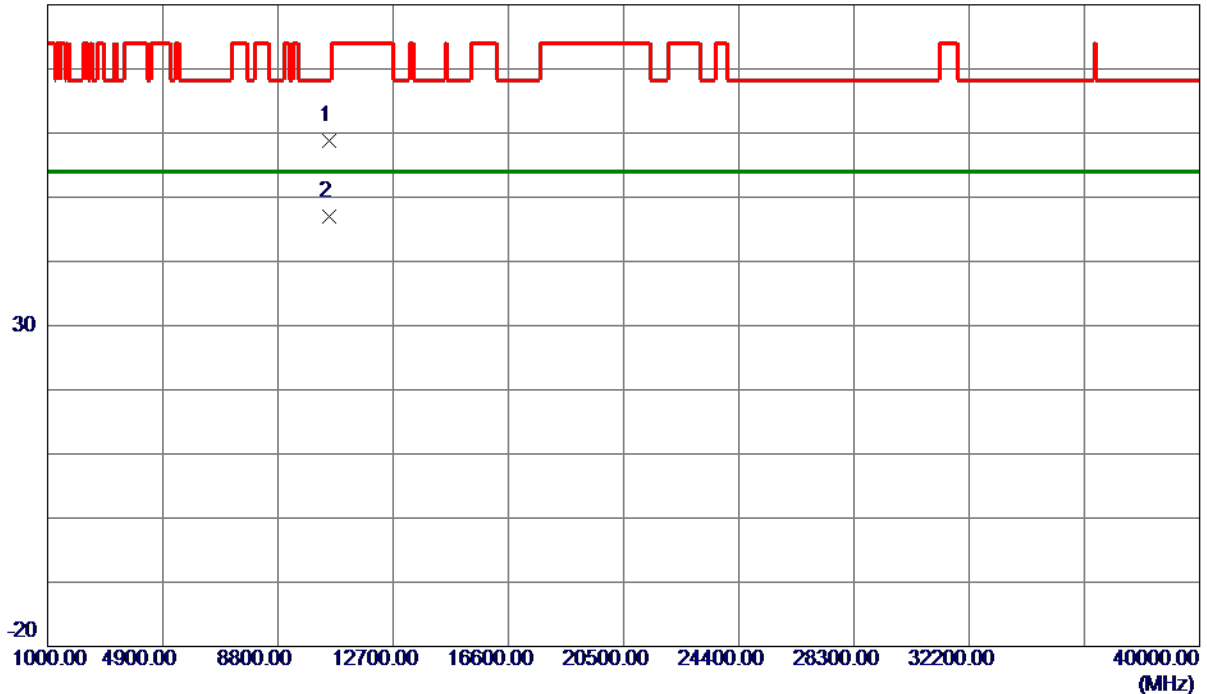


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10539.1320   | 45.15                      | 13.67                   | 58.82                     | 68.30           | -9.48        | Peak     |         |
| 2 * | 10539.1320   | 33.28                      | 13.67                   | 46.95                     | 54.00           | -7.05        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5310 MHz |

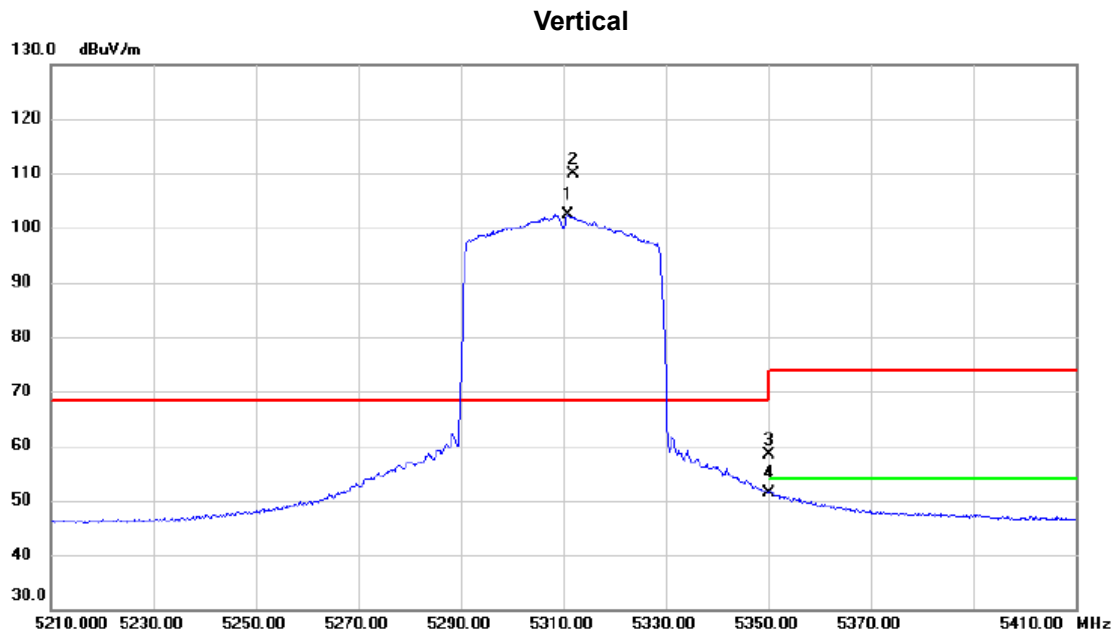

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5310.800     | 85.75                    | 16.53                   | 102.28                     | 68.30           | 33.98        | AVG      | No Limit |
| 2   | *   | 5312.000     | 93.42                    | 16.53                   | 109.95                     | 68.30           | 41.65        | peak     | No Limit |
| 3   |     | 5350.000     | 41.85                    | 16.63                   | 58.48                      | 74.00           | -15.52       | peak     |          |
| 4   |     | 5350.000     | 34.87                    | 16.63                   | 51.50                      | 54.00           | -2.50        | AVG      |          |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5310 MHz |

## Vertical

80 dBuV/m

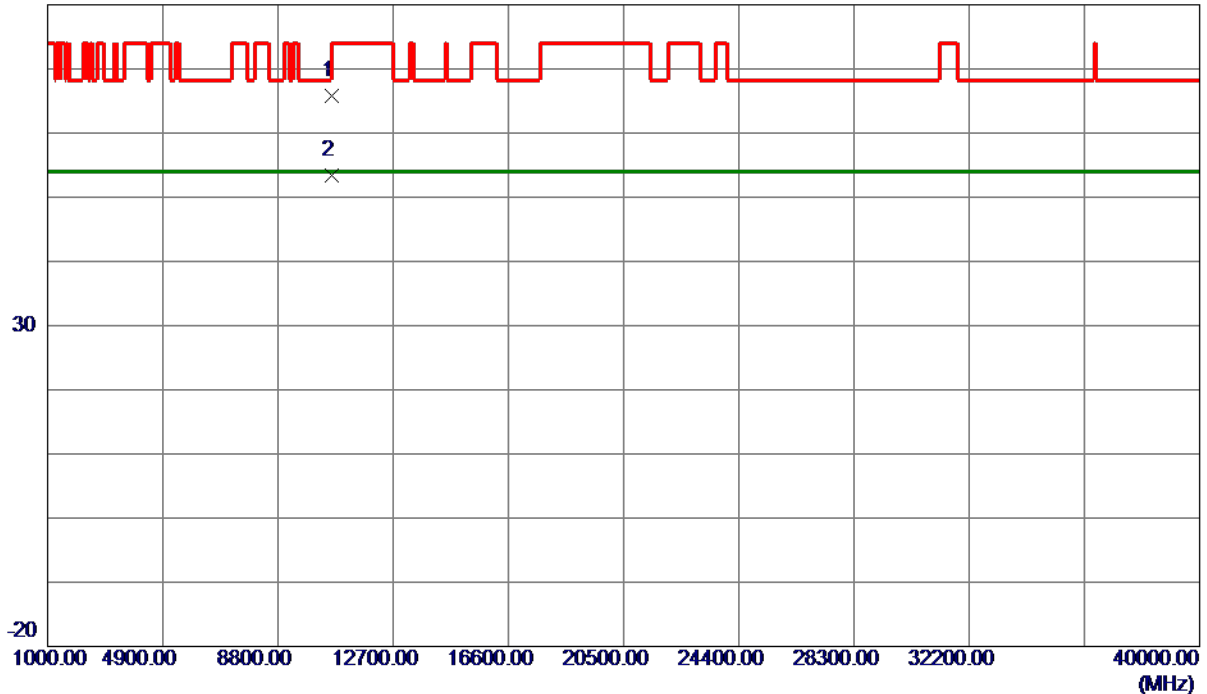


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10619.0730   | 52.03                      | 13.71                   | 65.74                     | 74.00           | -8.26        | Peak     |         |
| 2 * | 10619.5550   | 39.63                      | 13.71                   | 53.34                     | 54.00           | -0.66        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5310 MHz |

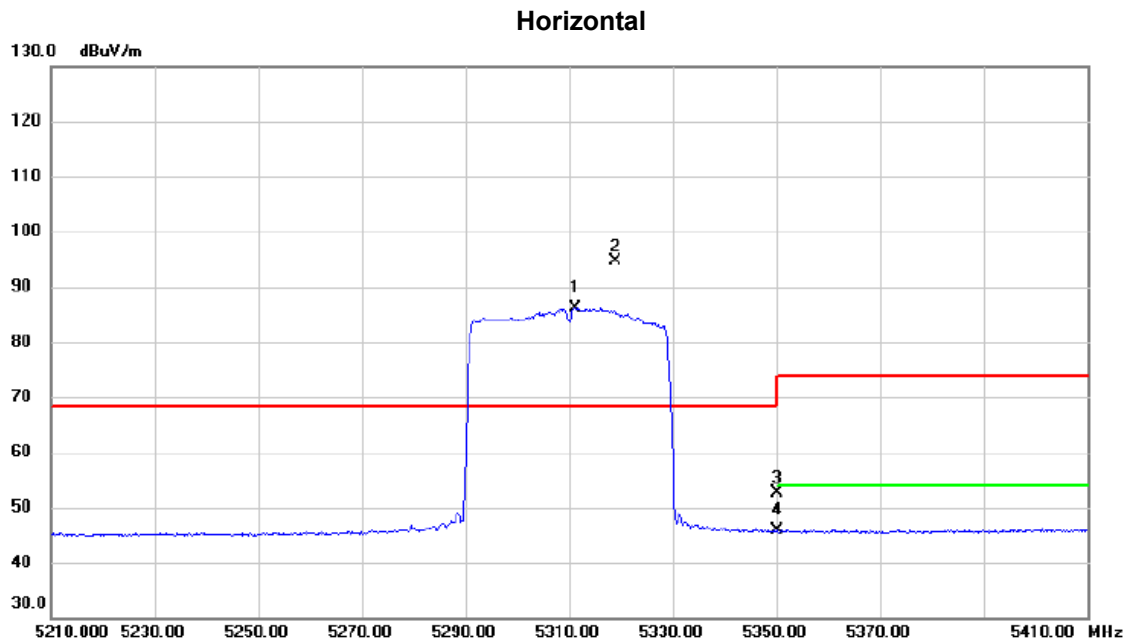

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5311.200     | 69.56                    | 16.53                   | 86.09                      | 68.30           | 17.79        | AVG      | No Limit |
| 2   | *   | 5318.800     | 78.02                    | 16.55                   | 94.57                      | 68.30           | 26.27        | peak     | No Limit |
| 3   |     | 5350.000     | 35.99                    | 16.63                   | 52.62                      | 74.00           | -21.38       | peak     |          |
| 4   |     | 5350.000     | 29.31                    | 16.63                   | 45.94                      | 54.00           | -8.06        | AVG      |          |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE40) Mode 5310 MHz |

## Horizontal

80 dBuV/m

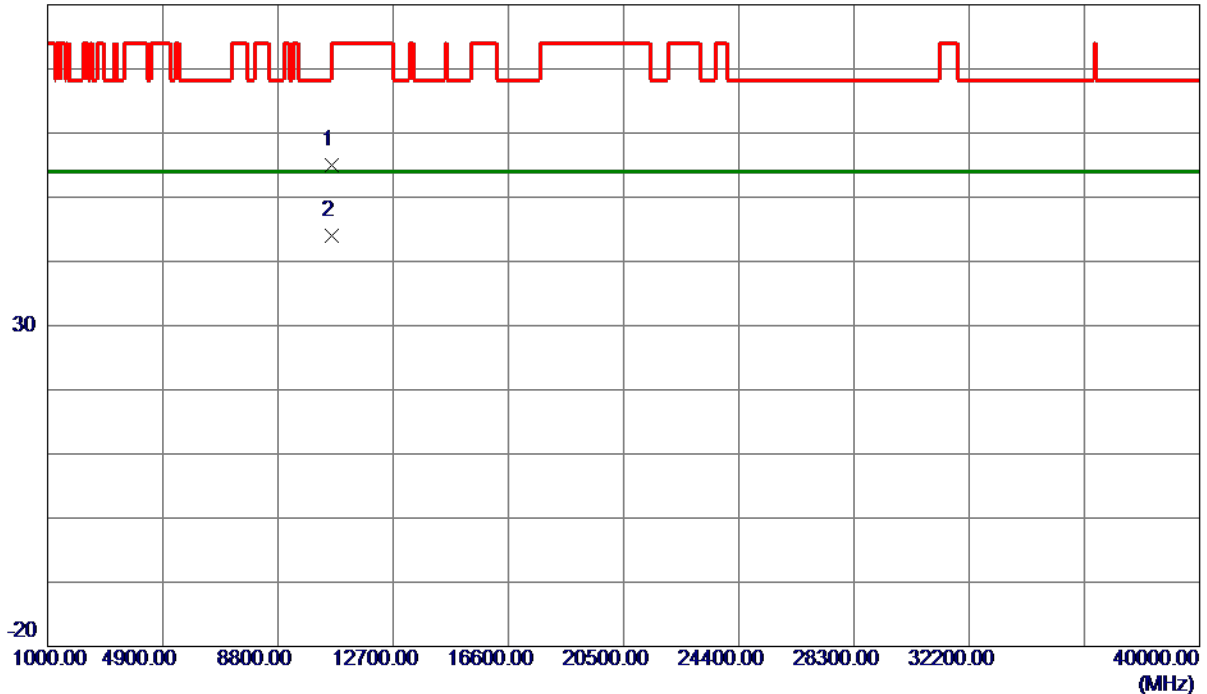


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10620.6000   | 41.36                      | 13.71                   | 55.07                     | 74.00           | -18.93       | Peak     |         |
| 2 * | 10620.6300   | 30.25                      | 13.71                   | 43.96                     | 54.00           | -10.04       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE80) Mode 5290 MHz |

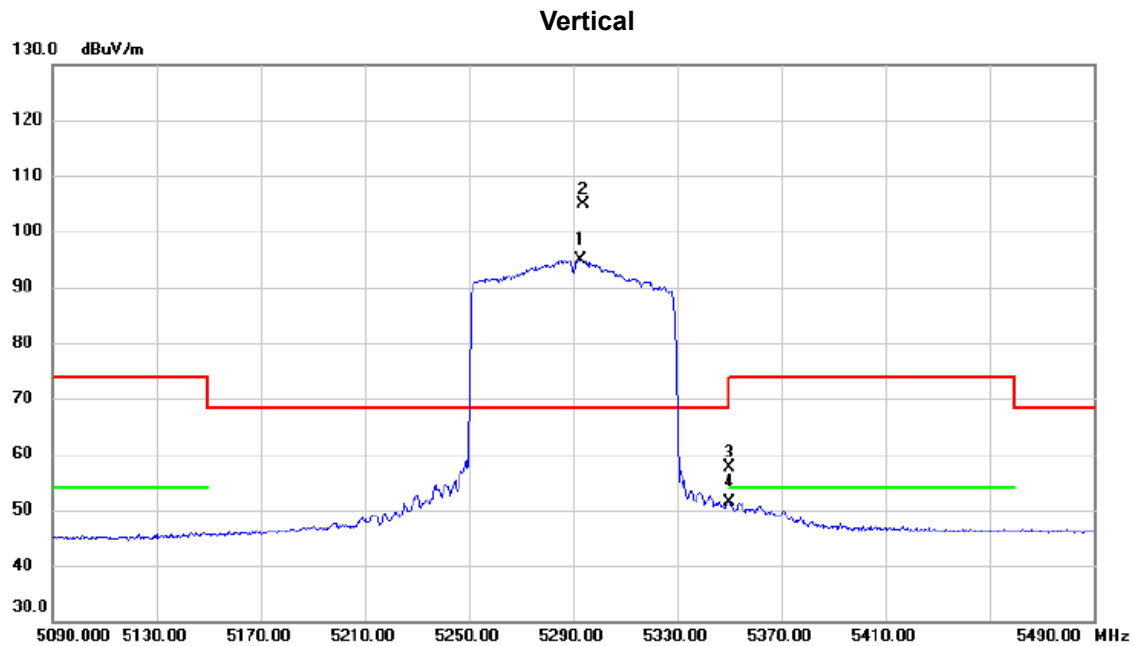

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5293.200     | 78.32                    | 16.50                   | 94.82                      | 68.30           | 26.52        | AVG      | No Limit |
| 2   | *   | 5293.800     | 88.32                    | 16.50                   | 104.82                     | 68.30           | 36.52        | peak     | No Limit |
| 3   |     | 5350.000     | 40.97                    | 16.63                   | 57.60                      | 74.00           | -16.40       | peak     |          |
| 4   |     | 5350.000     | 34.68                    | 16.63                   | 51.31                      | 54.00           | -2.69        | AVG      |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE80) Mode 5290 MHz |

## Vertical

80 dBuV/m




| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10581.8530   | 38.54                      | 13.69                   | 52.23                     | 54.00           | -1.77        | AVG      |         |
| 2 * | 10582.2820   | 53.91                      | 13.69                   | 67.60                     | 68.30           | -0.70        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE80) Mode 5290 MHz |

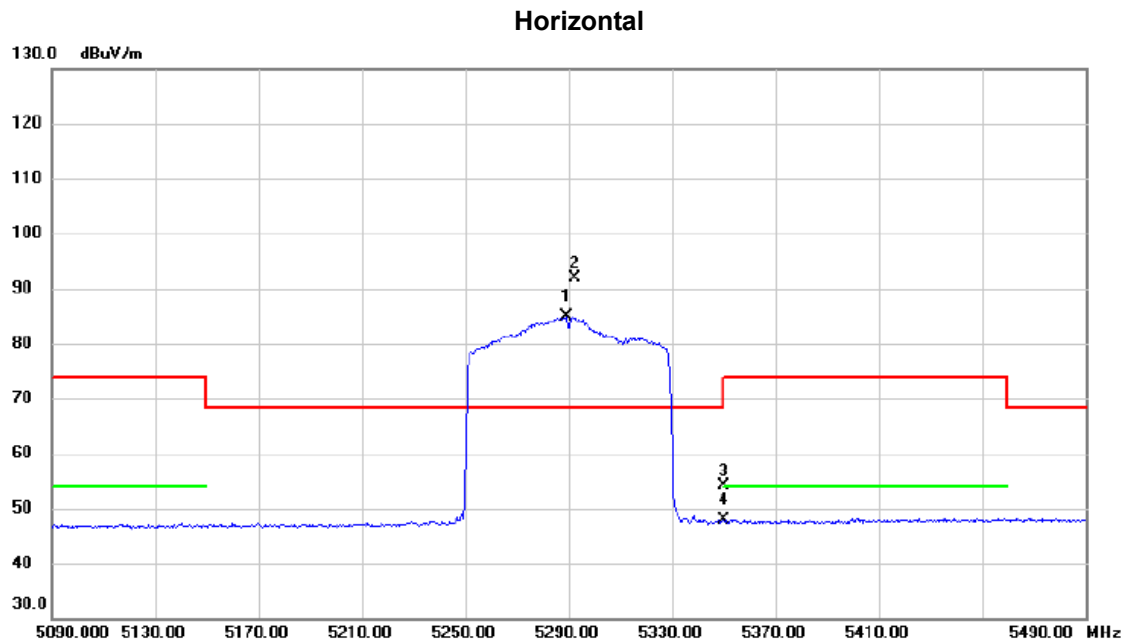

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5289.000     | 68.39                    | 16.49                   | 84.88                      | 68.30           | 16.58        | AVG      | No Limit |
| 2   | *   | 5292.400     | 75.38                    | 16.50                   | 91.88                      | 68.30           | 23.58        | peak     | No Limit |
| 3   |     | 5350.000     | 37.40                    | 16.63                   | 54.03                      | 74.00           | -19.97       | peak     |          |
| 4   |     | 5350.000     | 31.16                    | 16.63                   | 47.79                      | 54.00           | -6.21        | AVG      |          |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2A_TX AX (HE80) Mode 5290 MHz |

## Horizontal

80 dBuV/m

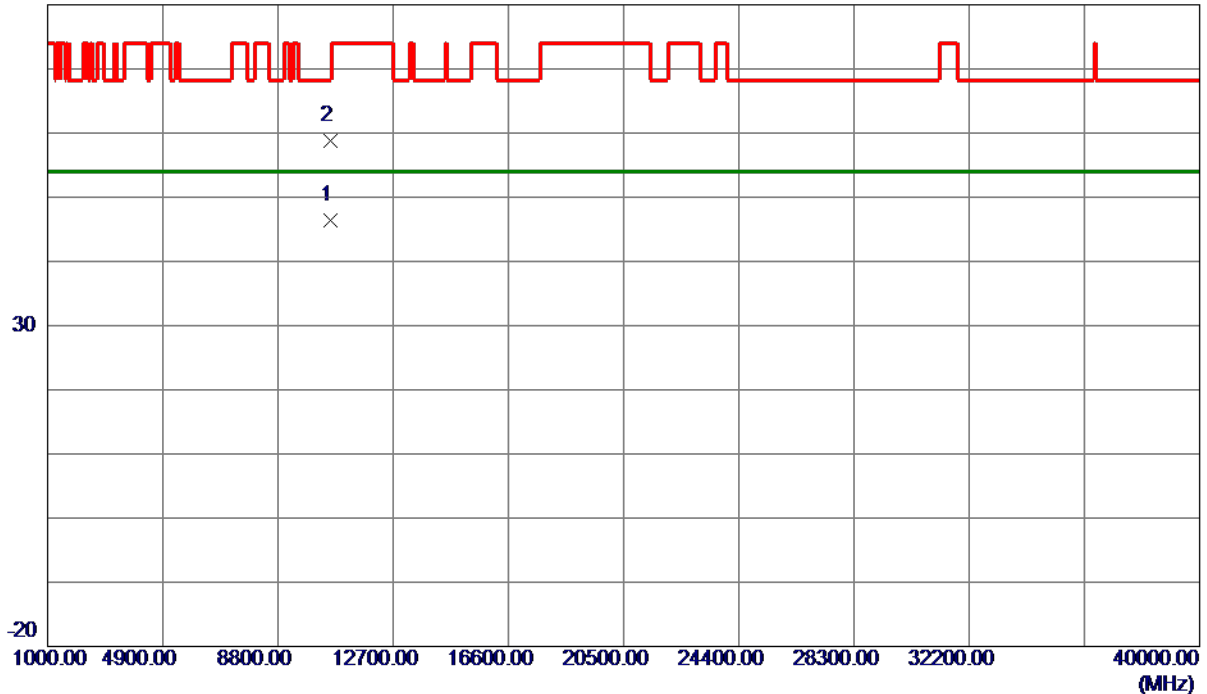

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10580.0850   | 32.63                      | 13.69                   | 46.32                     | 54.00           | -7.68        | AVG      |         |
| 2   | 10580.7760   | 45.11                      | 13.69                   | 58.80                     | 68.30           | -9.50        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5500 MHz |

## Vertical

130 dBuV/m

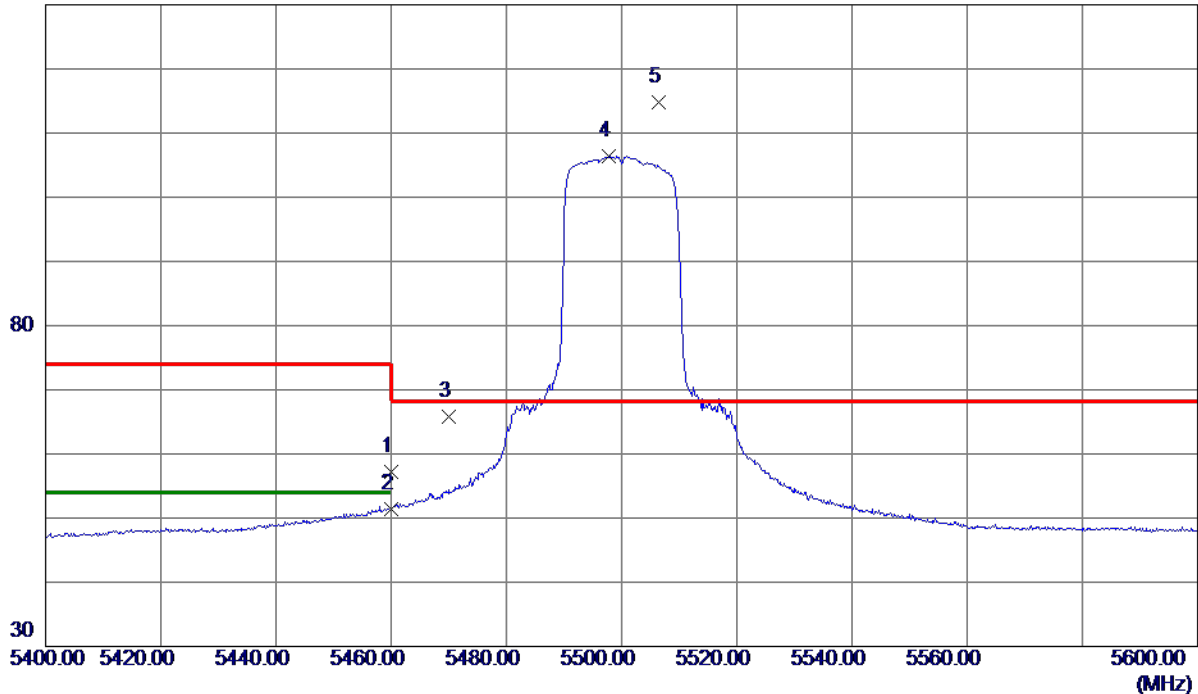

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.27                      | 16.89                   | 57.16                     | 74.00           | -16.84       | Peak     |          |
| 2   | 5460.0000    | 34.47                      | 16.89                   | 51.36                     | 54.00           | -2.64        | AVG      |          |
| 3   | 5470.0000    | 48.87                      | 16.91                   | 65.78                     | 68.30           | -2.52        | Peak     |          |
| 4   | 5497.7000    | 89.45                      | 16.98                   | 106.43                    | 999.00          | -892.57      | AVG      | No Limit |
| 5 * | 5506.4000    | 97.71                      | 17.00                   | 114.71                    | 68.30           | 46.41        | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5500 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10999.3780   | 53.12                      | 13.92                   | 67.04                     | 74.00           | -6.96        | Peak     |         |
| 2 * | 10999.6030   | 39.46                      | 13.92                   | 53.38                     | 54.00           | -0.62        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5500 MHz |

## Horizontal

130 dBuV/m

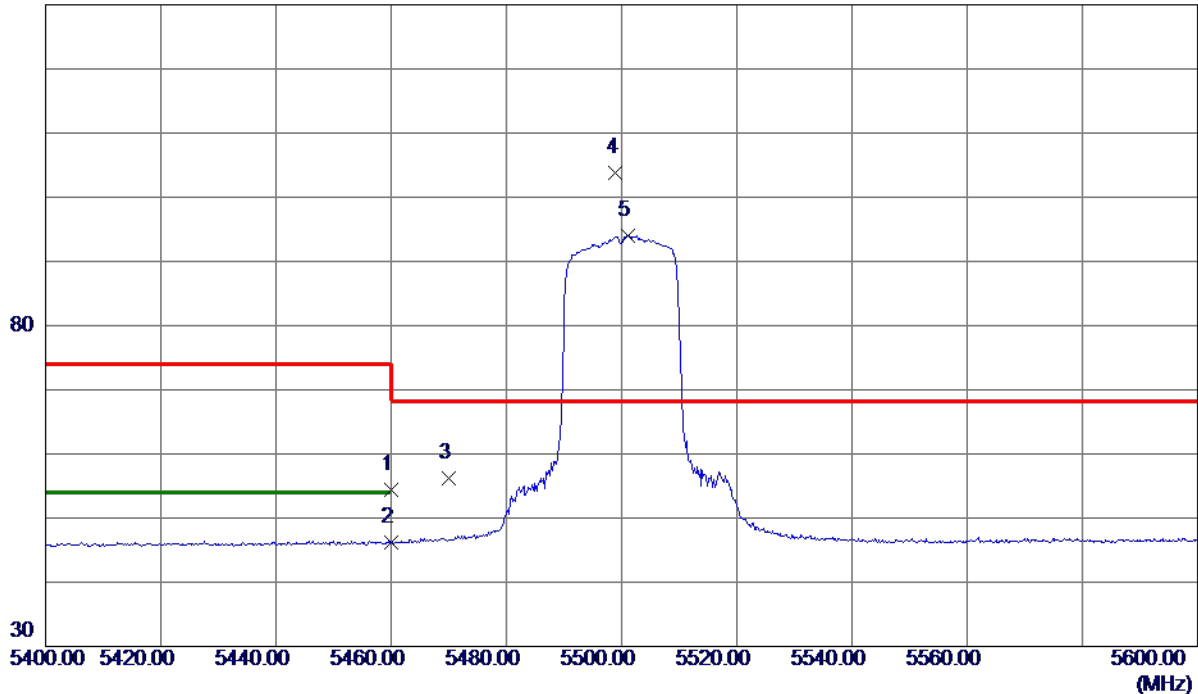

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 37.49                      | 16.89                   | 54.38                     | 74.00           | -19.62       | Peak     |          |
| 2   | 5460.0000    | 29.31                      | 16.89                   | 46.20                     | 54.00           | -7.80        | AVG      |          |
| 3   | 5470.0000    | 39.35                      | 16.91                   | 56.26                     | 68.30           | -12.04       | Peak     |          |
| 4 * | 5499.0000    | 86.89                      | 16.98                   | 103.87                    | 68.30           | 35.57        | Peak     | No Limit |
| 5   | 5501.2000    | 76.98                      | 16.99                   | 93.97                     | 999.00          | -905.03      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5500 MHz |

## Horizontal

80 dBuV/m

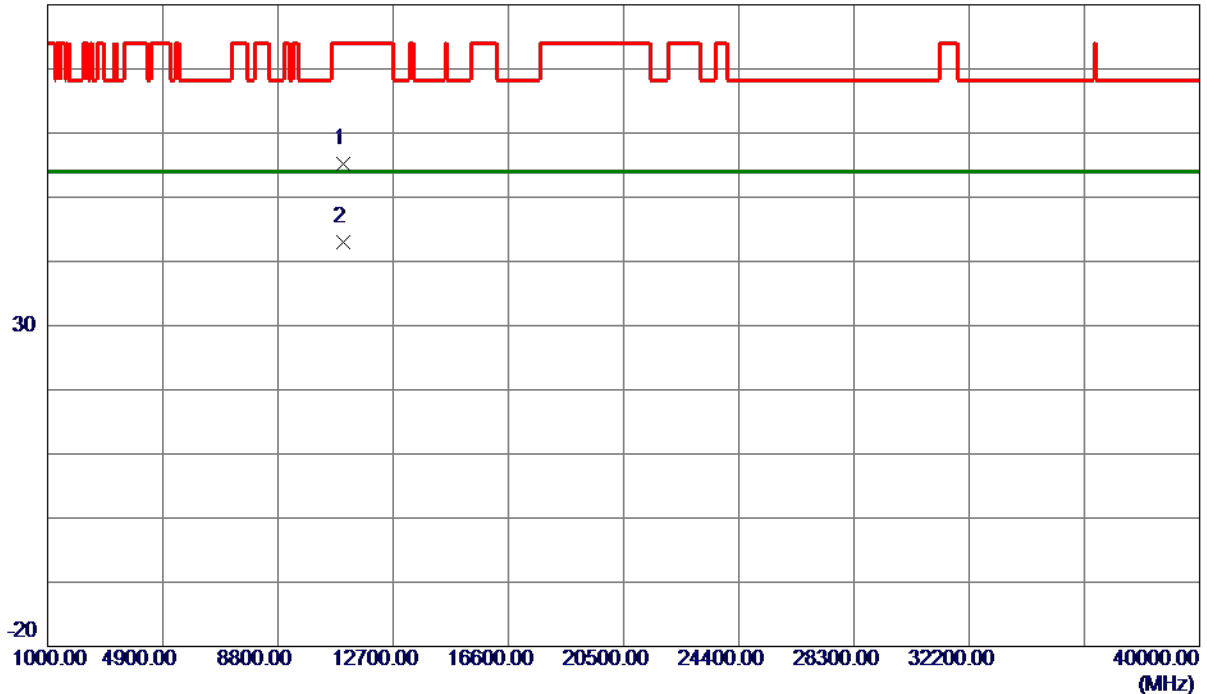

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11000.3640   | 41.33                      | 13.92                   | 55.25                     | 74.00           | -18.75       | Peak     |         |
| 2 * | 11000.5540   | 29.13                      | 13.92                   | 43.05                     | 54.00           | -10.95       | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5580 MHz |

## Vertical

130 dBuV/m

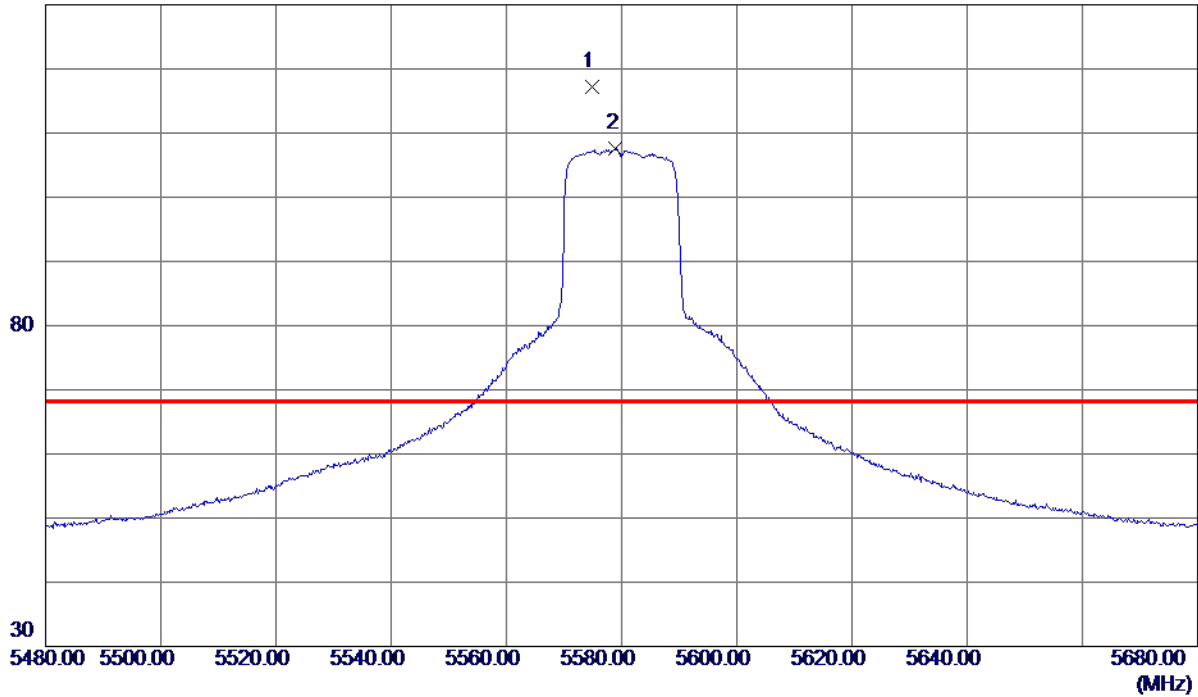

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5574.8000    | 99.90                      | 17.21                   | 117.11                    | 68.30           | 48.81        | Peak     | No Limit |
| 2   | 5579.0000    | 90.42                      | 17.22                   | 107.64                    | 999.00          | -891.36      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5580 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11158.1449   | 39.13                      | 14.12                   | 53.25                     | 54.00           | -0.75        | AVG      |         |
| 2   | 11159.5050   | 53.42                      | 14.13                   | 67.55                     | 74.00           | -6.45        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5580 MHz |

## Horizontal

130 dBuV/m

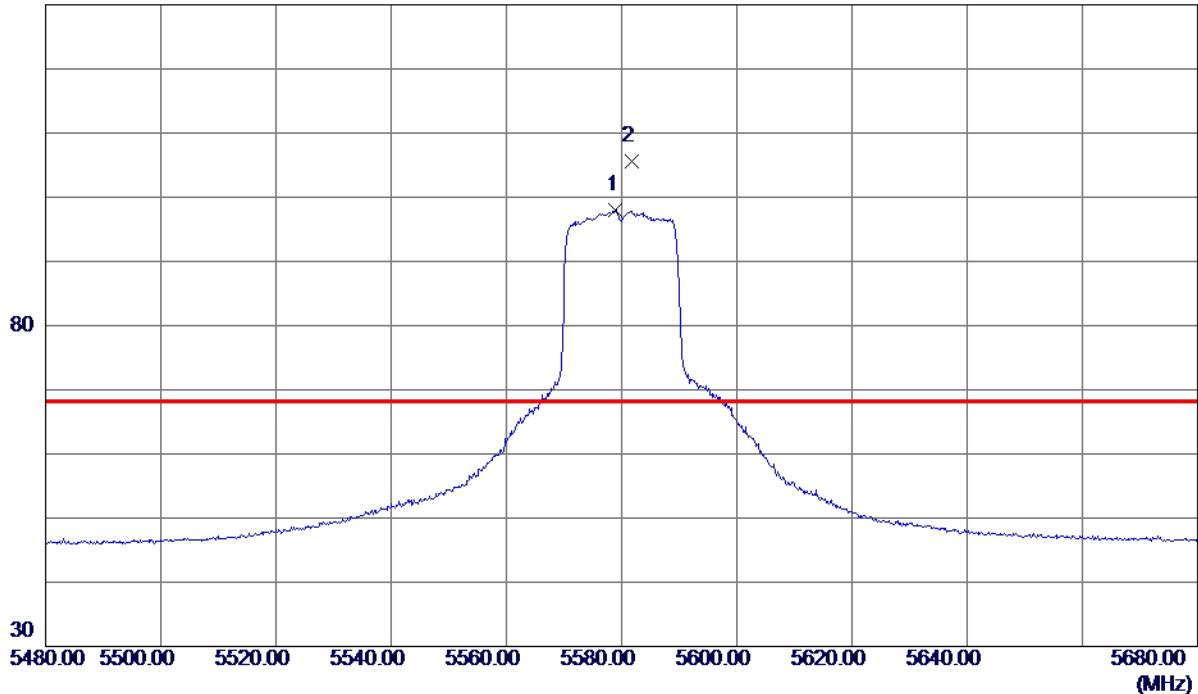

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5579.0000    | 80.72                      | 17.22                   | 97.94                     | 999.00          | -901.06      | AVG      | No Limit |
| 2 * | 5581.8000    | 88.38                      | 17.23                   | 105.61                    | 68.30           | 37.31        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5580 MHz |

## Horizontal

80 dBuV/m

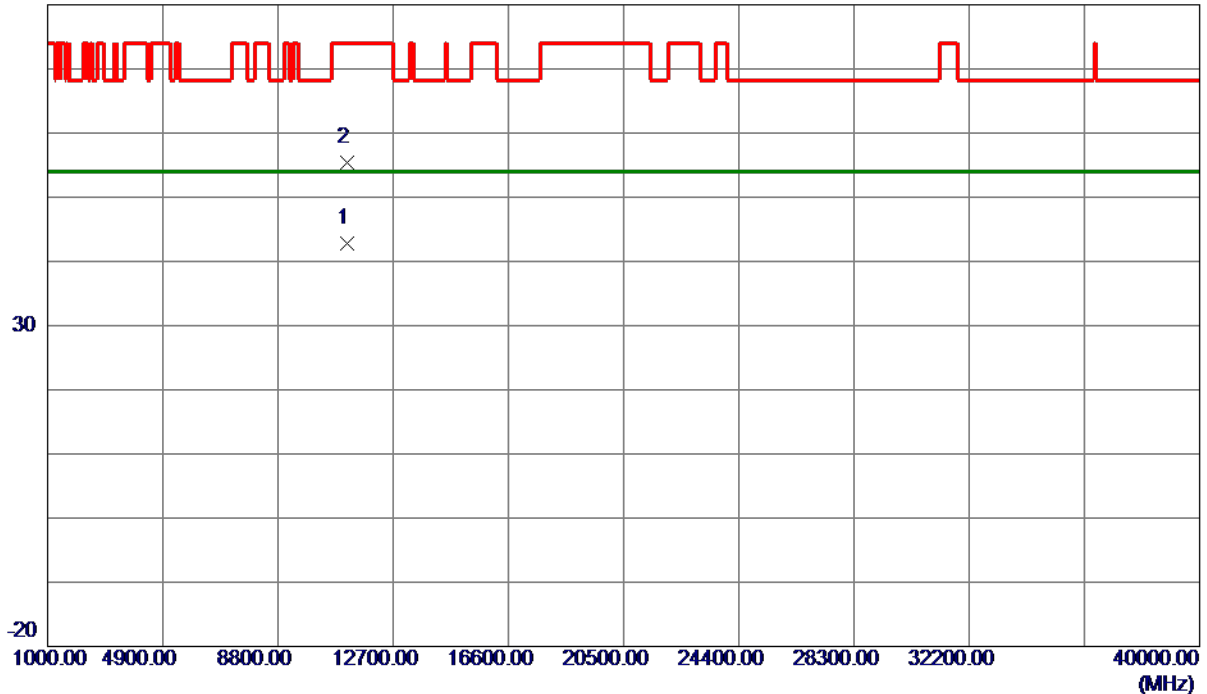

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11159.7580   | 28.63                      | 14.13                   | 42.76                     | 54.00           | -11.24       | AVG      |         |
| 2   | 11160.3620   | 41.32                      | 14.13                   | 55.45                     | 74.00           | -18.55       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5700 MHz |

## Vertical

130 dBuV/m

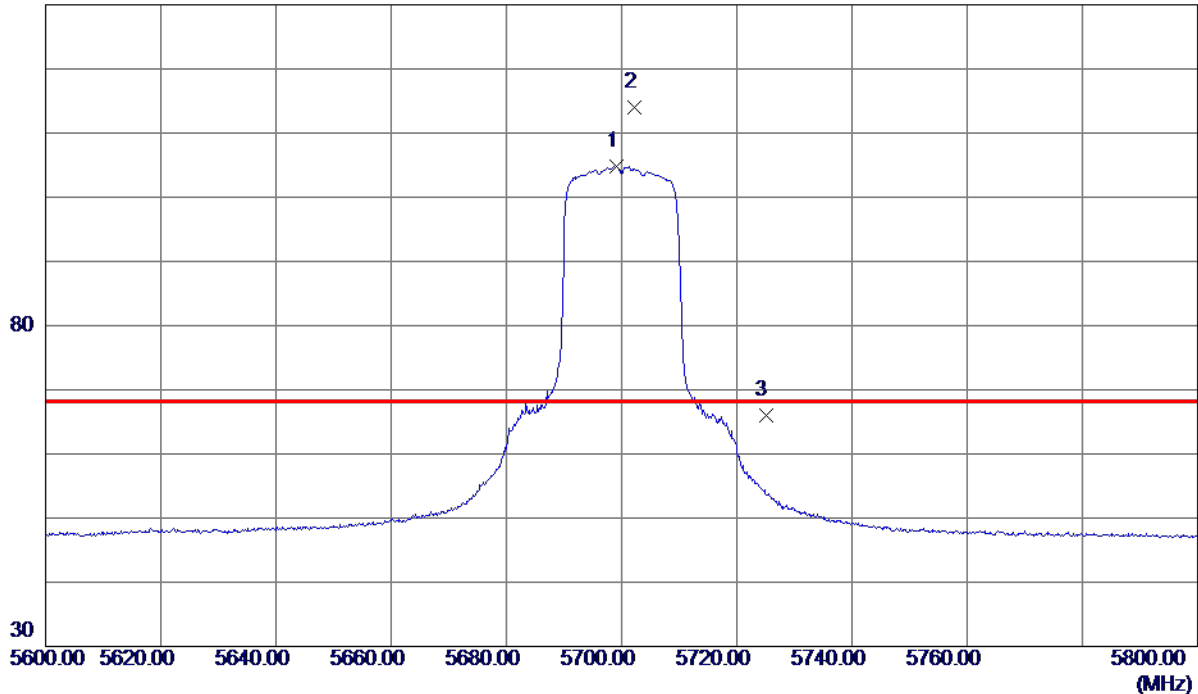

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5699.1000    | 87.29                      | 17.58                   | 104.87                    | 999.00          | -894.13      | AVG      | No Limit |
| 2 * | 5702.2000    | 96.49                      | 17.59                   | 114.08                    | 68.30           | 45.78        | Peak     | No Limit |
| 3   | 5725.0000    | 48.27                      | 17.65                   | 65.92                     | 68.30           | -2.38        | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5700 MHz |

## Vertical

80 dBuV/m

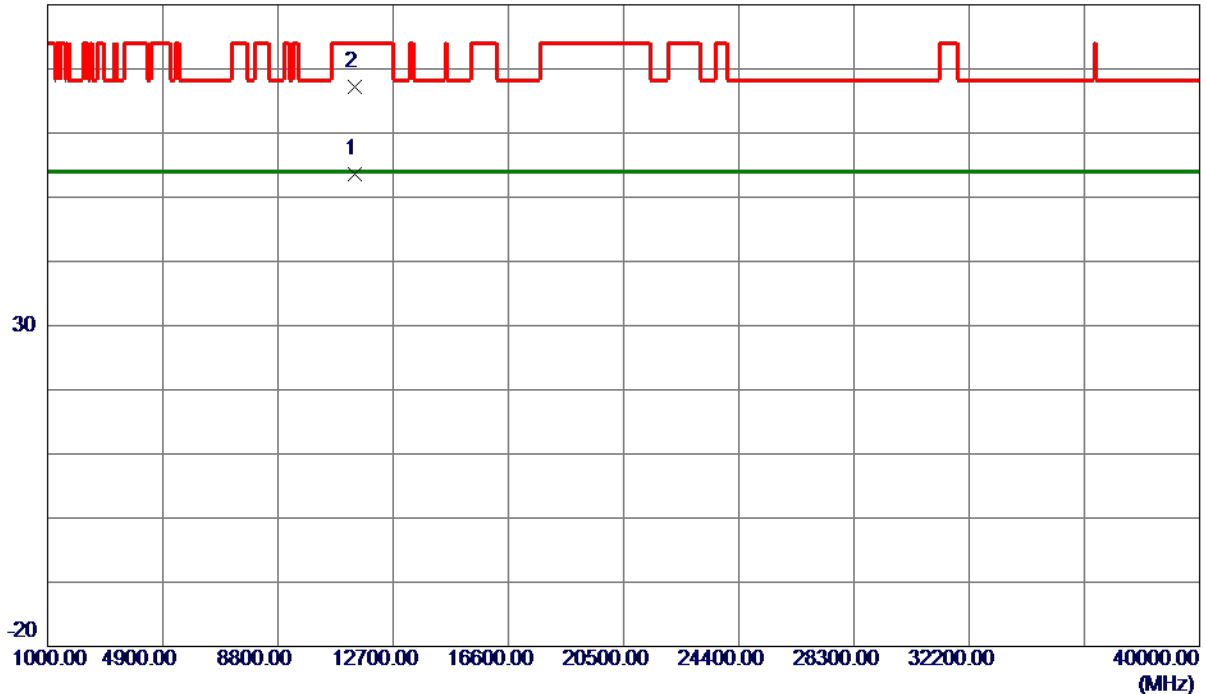

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.3230   | 39.10                      | 14.44                   | 53.54                     | 54.00           | -0.46        | AVG      |         |
| 2   | 11400.5380   | 52.70                      | 14.44                   | 67.14                     | 74.00           | -6.86        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5700 MHz |

## Horizontal

130 dBuV/m

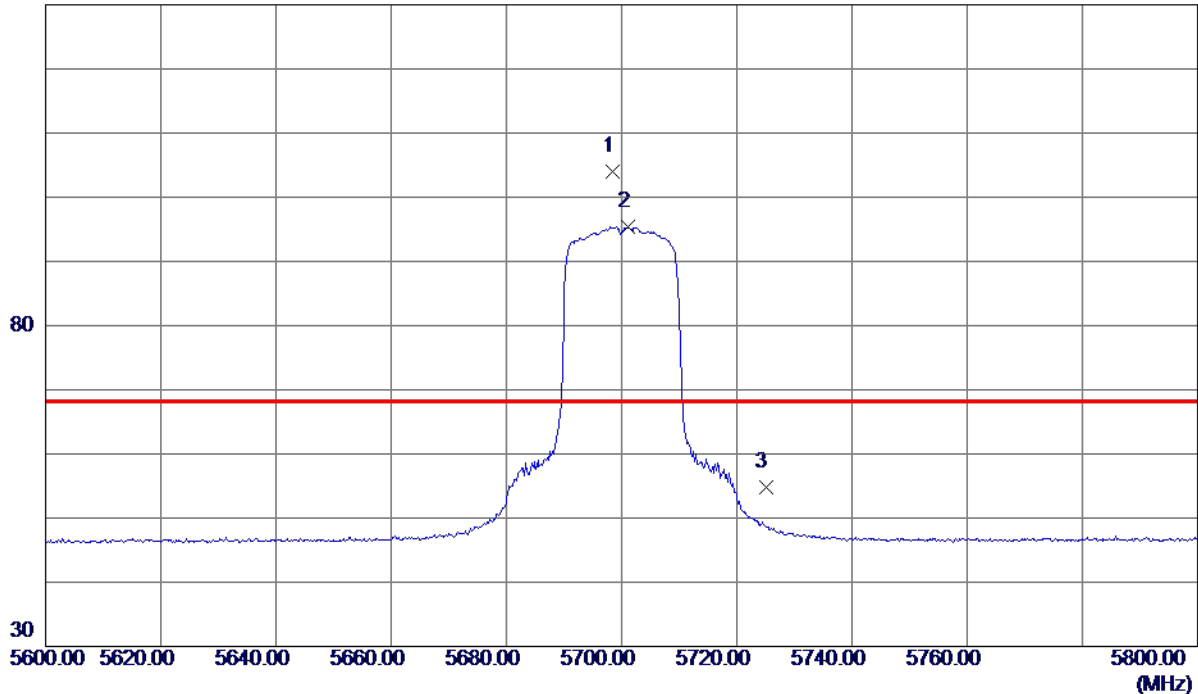

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5698.4000    | 86.40                      | 17.57                   | 103.97                    | 68.30           | 35.67        | Peak     | No Limit |
| 2   | 5701.1000    | 77.90                      | 17.58                   | 95.48                     | 999.00          | -903.52      | AVG      | No Limit |
| 3   | 5725.0000    | 37.18                      | 17.65                   | 54.83                     | 68.30           | -13.47       | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE20) Mode 5700 MHz |

## Horizontal

80 dBuV/m

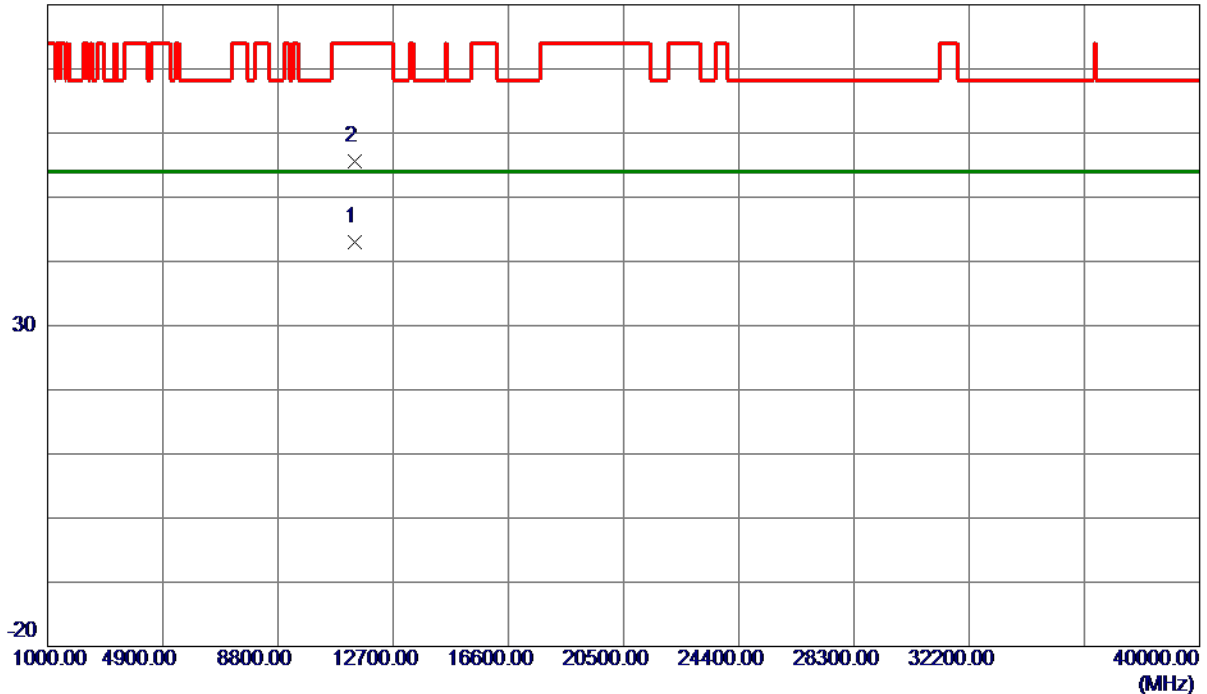

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11399.2699   | 28.63                      | 14.44                   | 43.07                     | 54.00           | -10.93       | AVG      |         |
| 2   | 11400.6480   | 41.21                      | 14.44                   | 55.65                     | 74.00           | -18.35       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5510 MHz |

## Vertical

130 dBuV/m

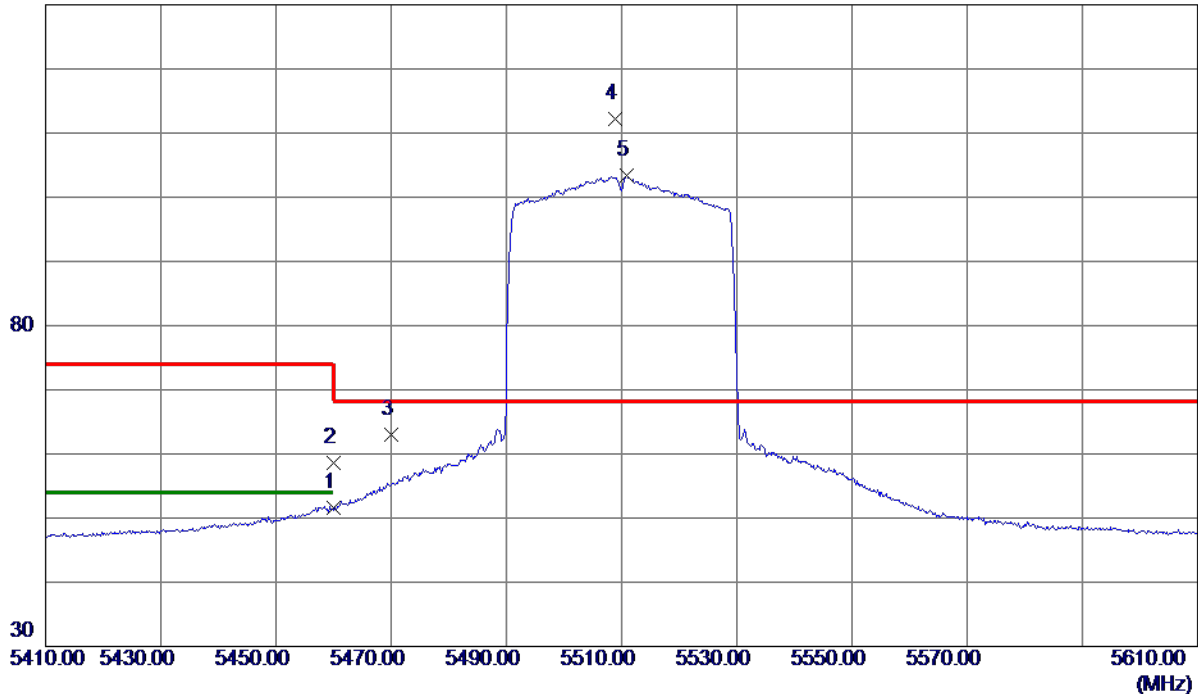

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 34.67                      | 16.89                   | 51.56                     | 74.00           | -22.44       | Peak     |          |
| 2   | 5460.0000    | 41.73                      | 16.89                   | 58.62                     | 74.00           | -15.38       | Peak     |          |
| 3   | 5470.0000    | 46.09                      | 16.91                   | 63.00                     | 68.30           | -5.30        | Peak     |          |
| 4 * | 5508.9000    | 95.15                      | 17.01                   | 112.16                    | 68.30           | 43.86        | Peak     | No Limit |
| 5   | 5510.8000    | 86.35                      | 17.02                   | 103.37                    | 68.30           | 35.07        | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5510 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11019.6769   | 39.70                      | 13.95                   | 53.65                     | 54.00           | -0.35        | AVG      |         |
| 2   | 11020.4720   | 52.54                      | 13.95                   | 66.49                     | 74.00           | -7.51        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5510 MHz |

## Horizontal

130 dBuV/m

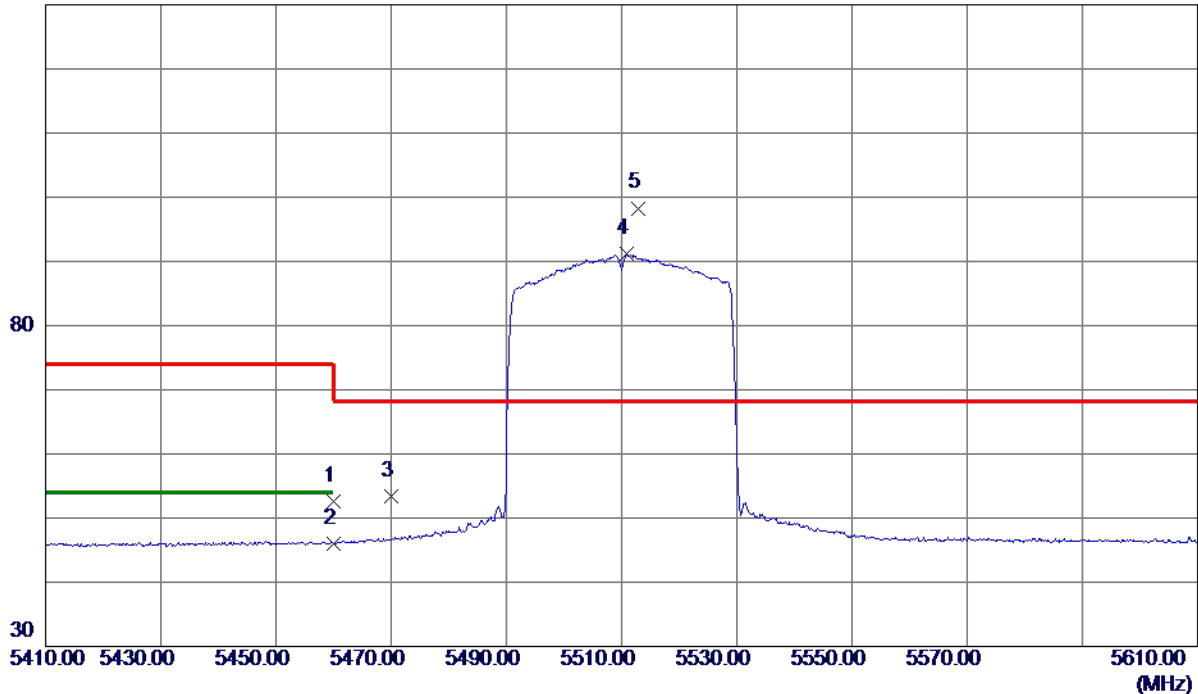

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 35.79                      | 16.89                   | 52.68                     | 74.00           | -21.32       | Peak     |          |
| 2   | 5460.0000    | 29.20                      | 16.89                   | 46.09                     | 54.00           | -7.91        | AVG      |          |
| 3   | 5470.0000    | 36.46                      | 16.91                   | 53.37                     | 68.30           | -14.93       | Peak     |          |
| 4   | 5510.9000    | 74.12                      | 17.02                   | 91.14                     | 999.00          | -907.86      | AVG      | No Limit |
| 5 * | 5512.9940    | 81.28                      | 17.02                   | 98.30                     | 68.30           | 30.00        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5510 MHz |

## Horizontal

80 dBuV/m

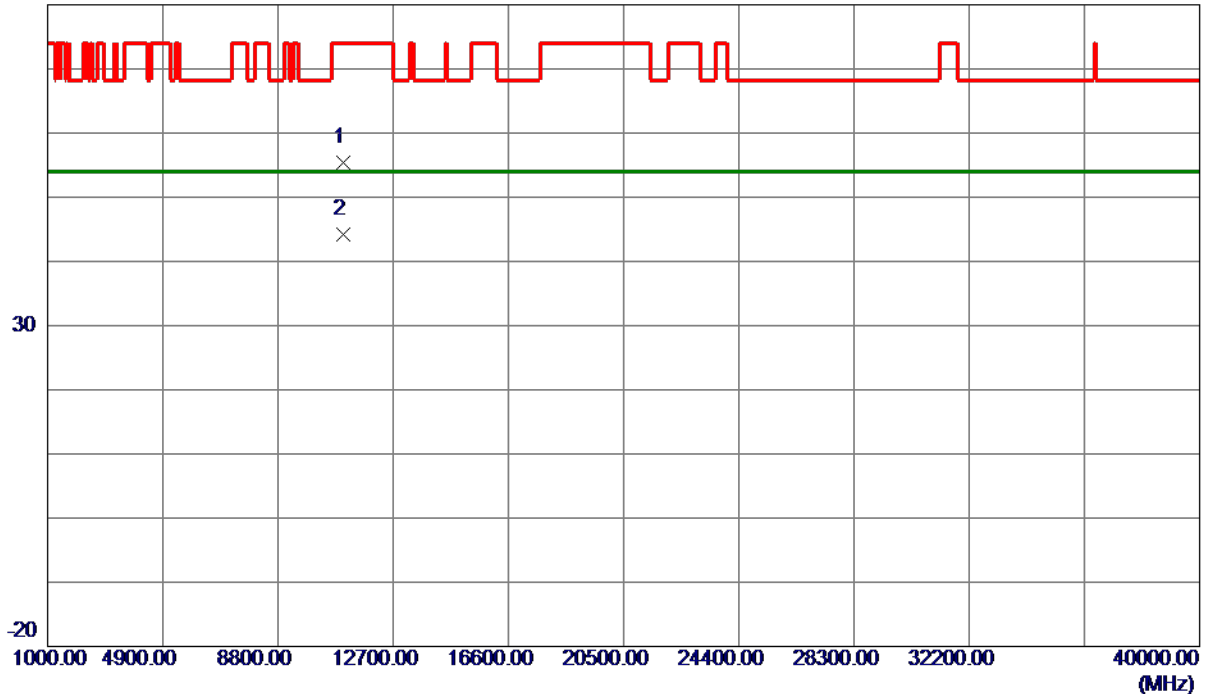

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11019.2939   | 41.37                      | 13.94                   | 55.31                     | 74.00           | -18.69       | Peak     |         |
| 2 * | 11020.2040   | 30.17                      | 13.95                   | 44.12                     | 54.00           | -9.88        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5550 MHz |

## Vertical

130 dBuV/m

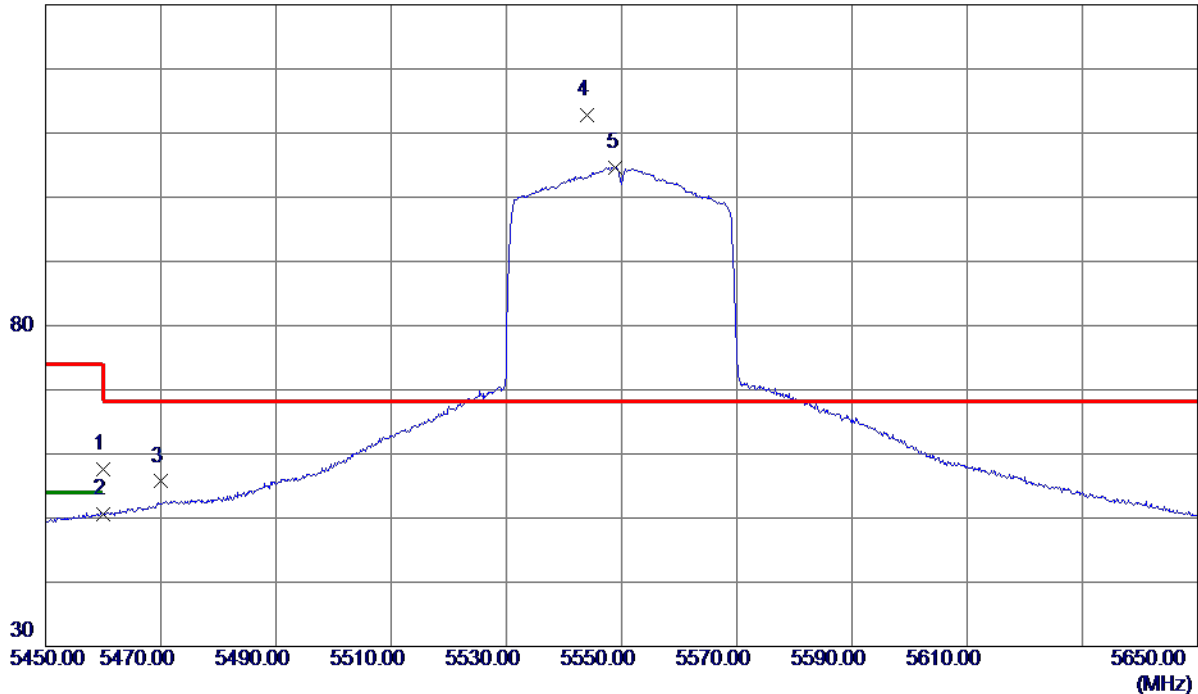

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.70                      | 16.89                   | 57.59                     | 74.00           | -16.41       | Peak     |          |
| 2   | 5460.0000    | 33.76                      | 16.89                   | 50.65                     | 54.00           | -3.35        | AVG      |          |
| 3   | 5470.0000    | 38.79                      | 16.91                   | 55.70                     | 68.30           | -12.60       | Peak     |          |
| 4 * | 5544.0000    | 95.74                      | 17.12                   | 112.86                    | 68.30           | 44.56        | Peak     | No Limit |
| 5   | 5549.0000    | 87.54                      | 17.13                   | 104.67                    | 999.00          | -894.33      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5550 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.3500   | 39.84                      | 14.05                   | 53.89                     | 54.00           | -0.11        | AVG      |         |
| 2   | 11100.3970   | 54.24                      | 14.05                   | 68.29                     | 74.00           | -5.71        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5550 MHz |

## Horizontal

130 dBuV/m

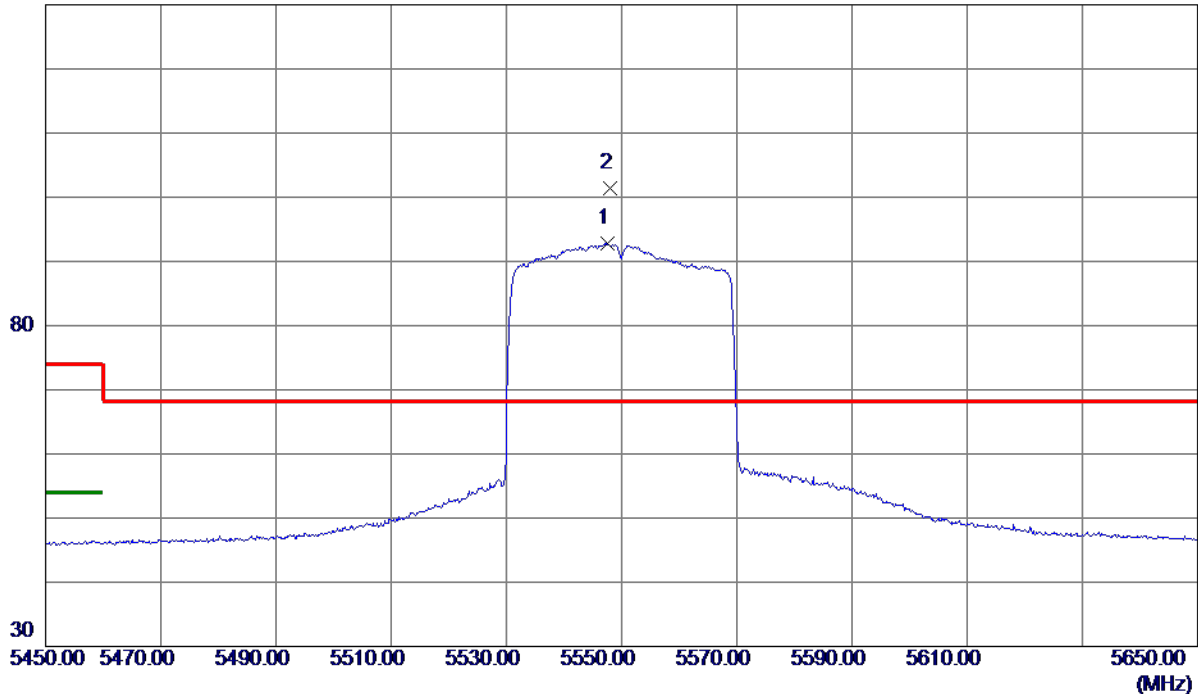

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5547.5000    | 75.75                      | 17.13                   | 92.88                     | 999.00          | -906.12      | AVG      | No Limit |
| 2 * | 5548.1000    | 84.23                      | 17.13                   | 101.36                    | 68.30           | 33.06        | Peak     | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5550 MHz |

## Horizontal

80 dBuV/m

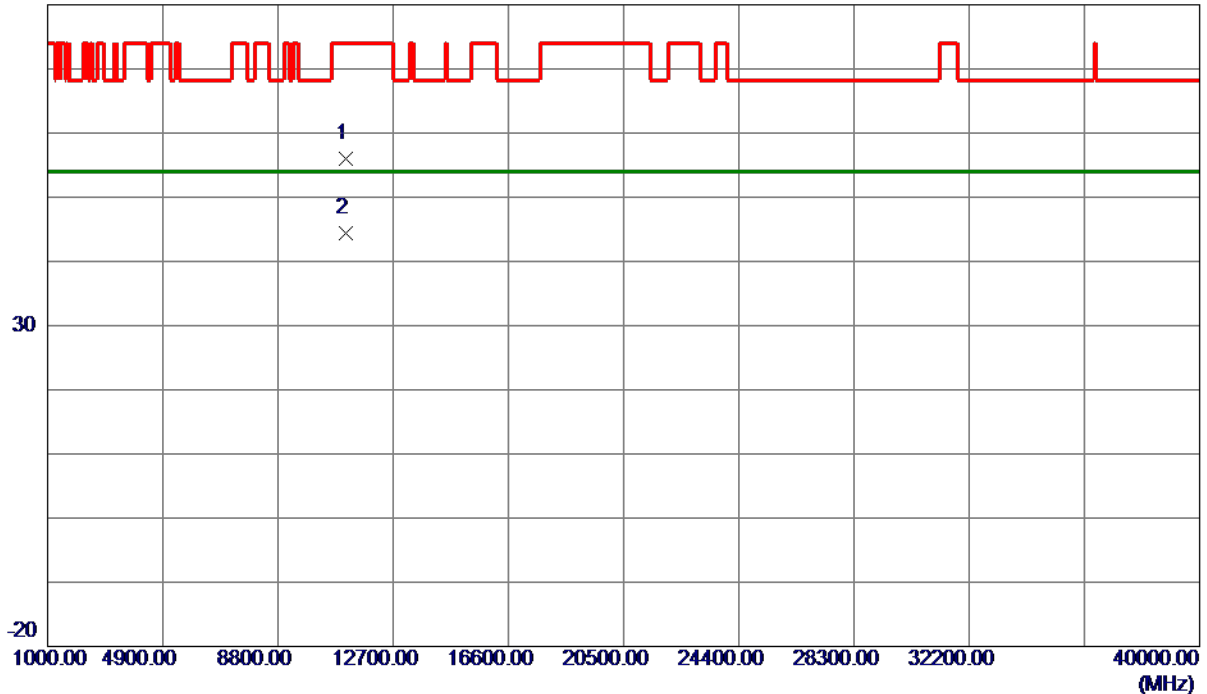

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11099.7160   | 41.88                      | 14.05                   | 55.93                     | 74.00           | -18.07       | Peak     |         |
| 2 * | 11100.9780   | 30.36                      | 14.05                   | 44.41                     | 54.00           | -9.59        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5670 MHz |

## Vertical

130 dBuV/m

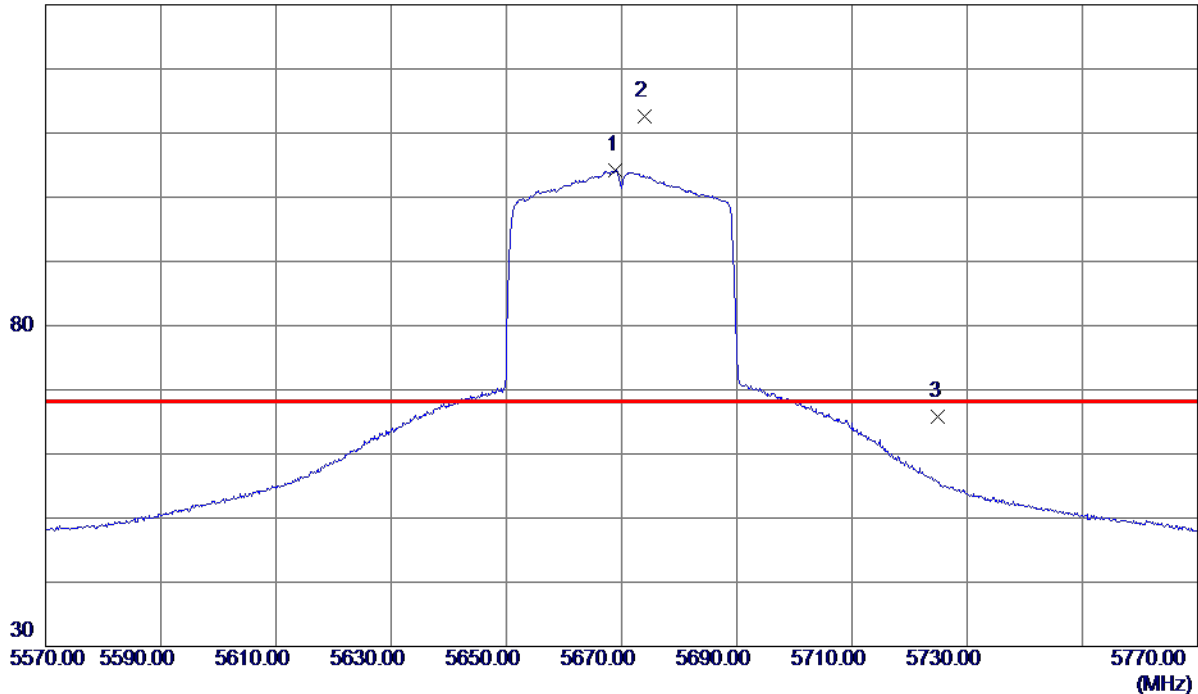

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5669.0000    | 86.71                      | 17.49                   | 104.20                    | 999.00          | -894.80      | AVG      | No Limit |
| 2 * | 5674.1000    | 95.16                      | 17.50                   | 112.66                    | 68.30           | 44.36        | Peak     | No Limit |
| 3   | 5725.0000    | 48.12                      | 17.65                   | 65.77                     | 68.30           | -2.53        | Peak     |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5670 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11339.5400   | 51.47                      | 14.36                   | 65.83                     | 74.00           | -8.17        | Peak     |         |
| 2 * | 11342.4170   | 38.86                      | 14.36                   | 53.22                     | 54.00           | -0.78        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5670 MHz |

## Horizontal

130 dBuV/m

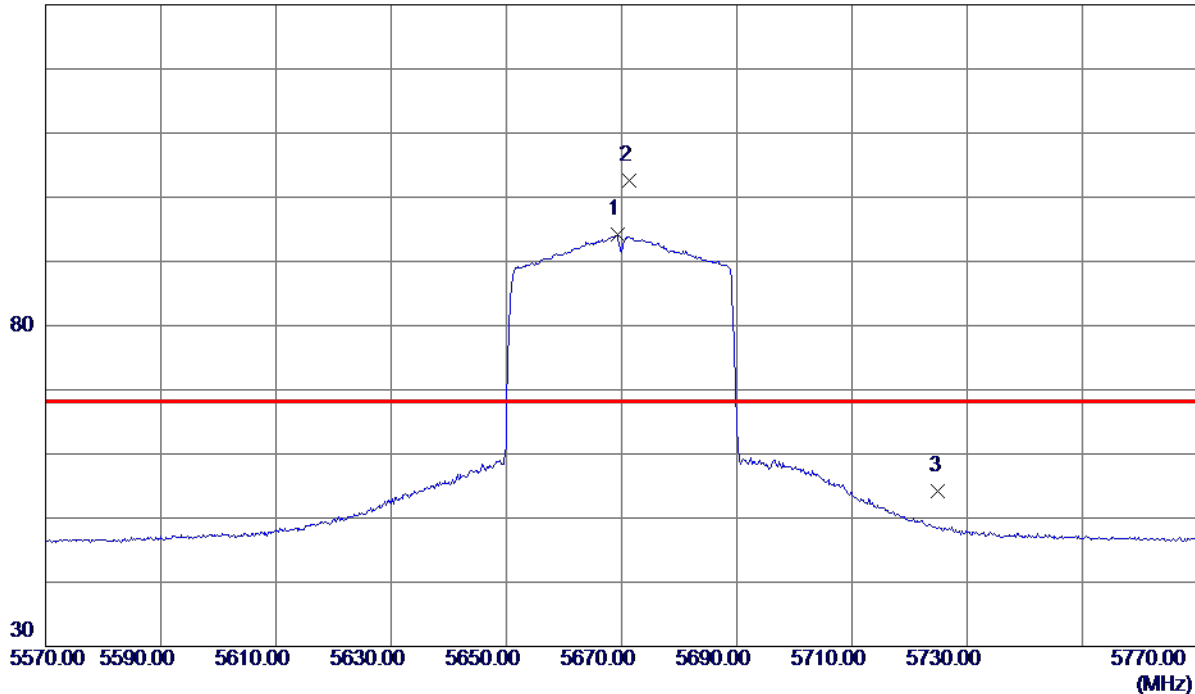

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5669.3000    | 76.66                      | 17.49                   | 94.15                     | 999.00          | -904.85      | AVG      | No Limit |
| 2 * | 5671.4000    | 85.14                      | 17.49                   | 102.63                    | 68.30           | 34.33        | Peak     | No Limit |
| 3   | 5725.0000    | 36.46                      | 17.65                   | 54.11                     | 68.30           | -14.19       | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE40) Mode 5670 MHz |

## Horizontal

80 dBuV/m

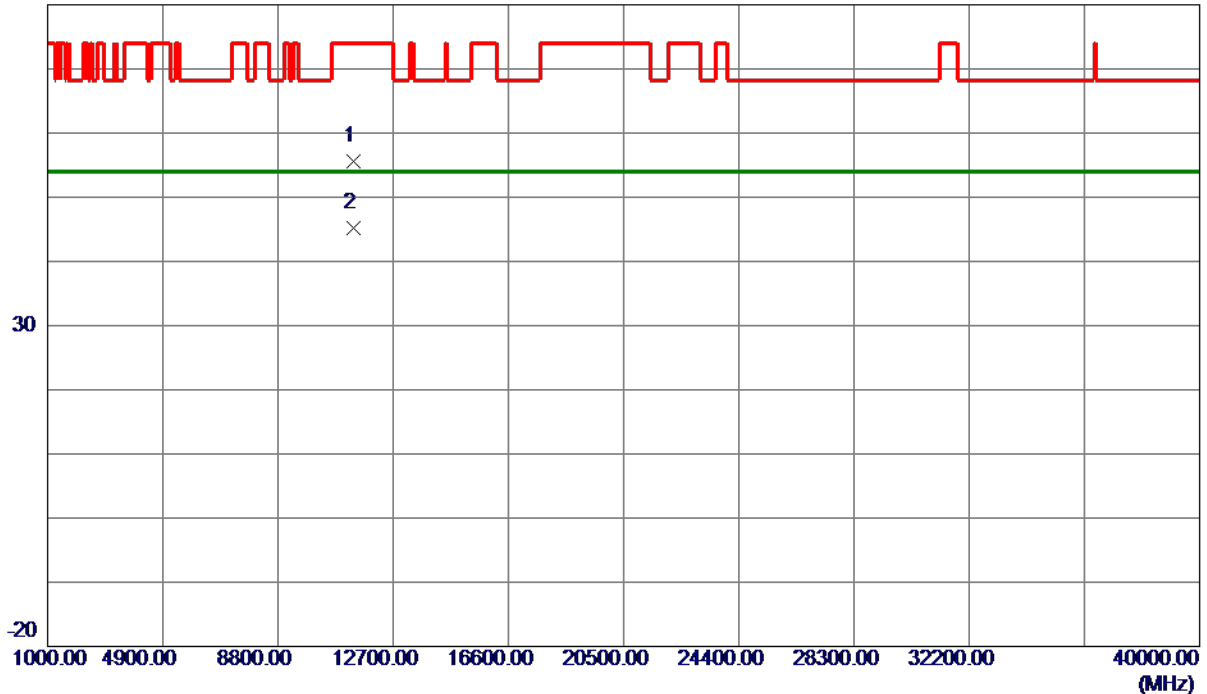

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11339.6520   | 41.19                      | 14.36                   | 55.55                     | 74.00           | -18.45       | Peak     |         |
| 2 * | 11340.8920   | 30.75                      | 14.36                   | 45.11                     | 54.00           | -8.89        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5530 MHz |

## Vertical

130 dBuV/m

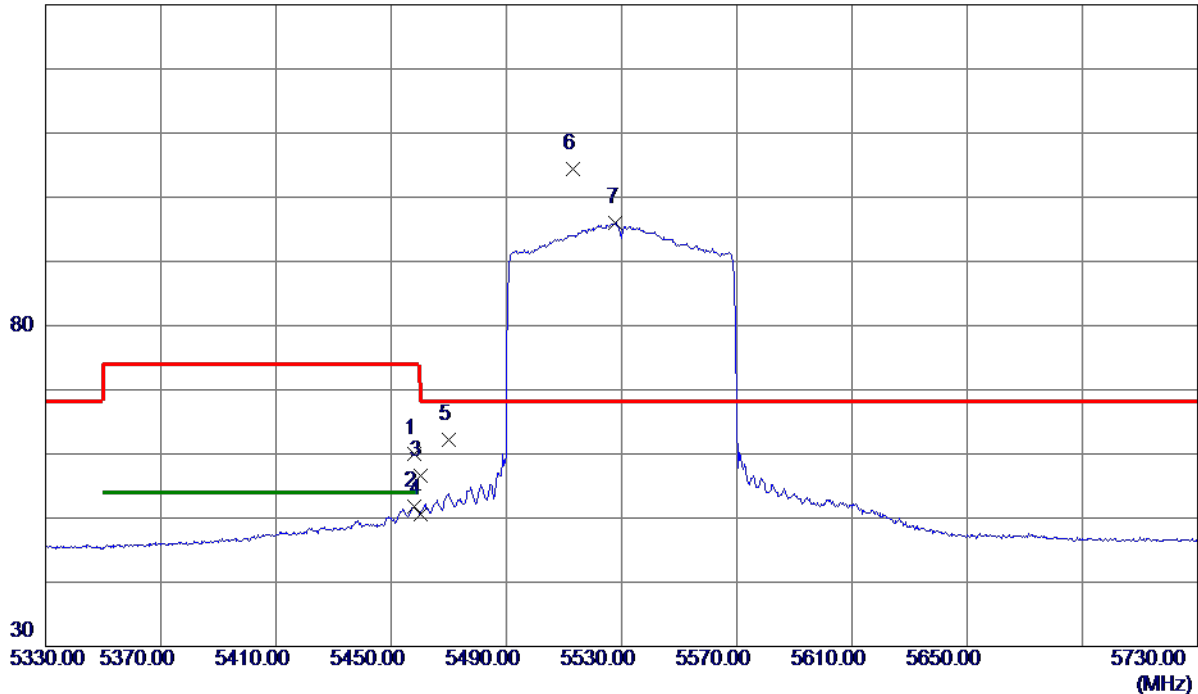

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5458.0000    | 43.19                      | 16.89                   | 60.08                     | 74.00           | -13.92       | Peak     |          |
| 2   | 5458.0000    | 34.94                      | 16.89                   | 51.83                     | 54.00           | -2.17        | AVG      |          |
| 3   | 5460.0000    | 39.64                      | 16.89                   | 56.53                     | 74.00           | -17.47       | Peak     |          |
| 4   | 5460.0000    | 33.80                      | 16.89                   | 50.69                     | 54.00           | -3.31        | AVG      |          |
| 5   | 5470.0000    | 45.25                      | 16.91                   | 62.16                     | 68.30           | -6.14        | Peak     |          |
| 6 * | 5513.0000    | 87.42                      | 17.02                   | 104.44                    | 68.30           | 36.14        | Peak     | No Limit |
| 7   | 5528.0000    | 78.89                      | 17.07                   | 95.96                     | 999.00          | -903.04      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5530 MHz |

## Vertical

80 dBuV/m

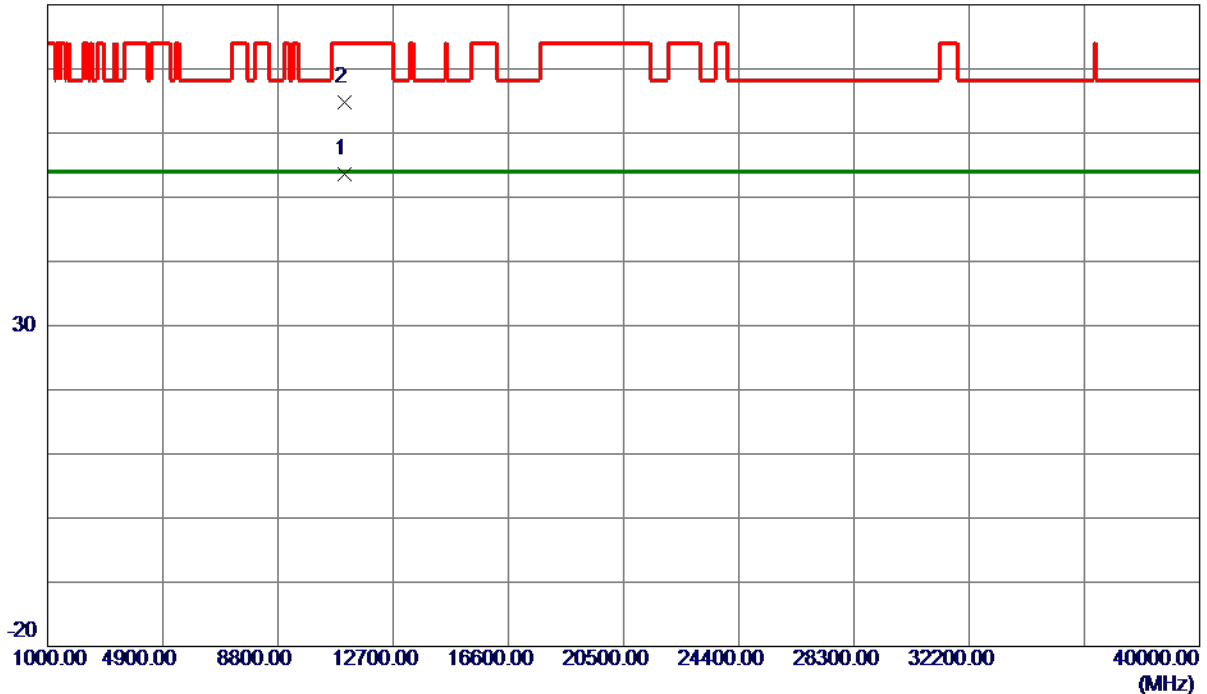

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.4150   | 39.51                      | 14.00                   | 53.51                     | 54.00           | -0.49        | AVG      |         |
| 2   | 11062.2900   | 50.74                      | 14.00                   | 64.74                     | 74.00           | -9.26        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5530 MHz |

## Horizontal

130 dBuV/m

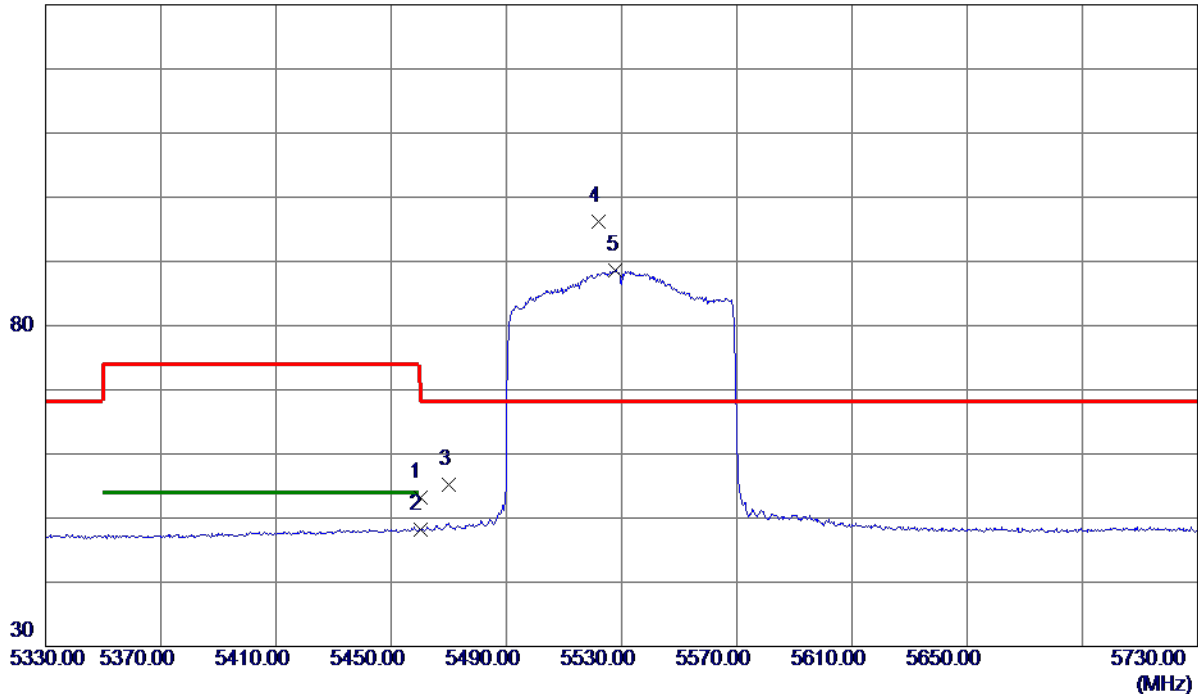

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 36.36                      | 16.89                   | 53.25                     | 74.00           | -20.75       | Peak     |          |
| 2   | 5460.0000    | 31.25                      | 16.89                   | 48.14                     | 54.00           | -5.86        | AVG      |          |
| 3   | 5470.0000    | 38.27                      | 16.91                   | 55.18                     | 68.30           | -13.12       | Peak     |          |
| 4 * | 5522.0000    | 79.17                      | 17.05                   | 96.22                     | 68.30           | 27.92        | Peak     | No Limit |
| 5   | 5528.0000    | 71.47                      | 17.07                   | 88.54                     | 999.00          | -910.46      | AVG      | No Limit |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5530 MHz |

## Horizontal

80 dBuV/m

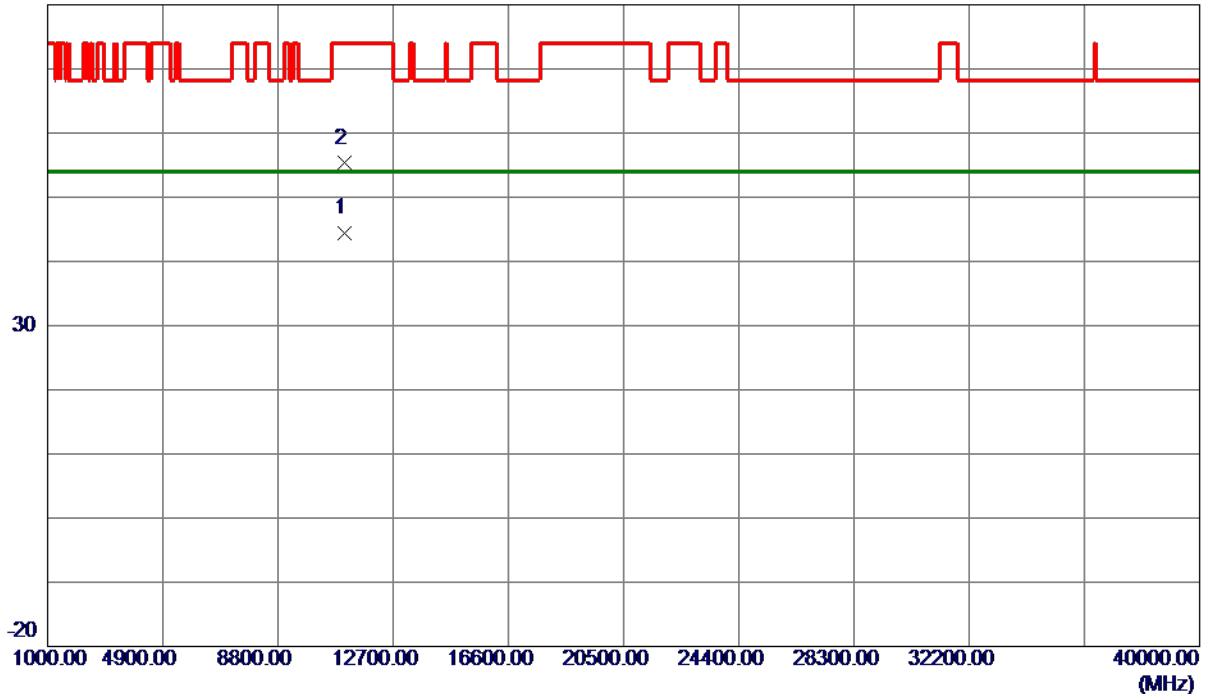

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11059.3640   | 30.32                      | 14.00                   | 44.32                     | 54.00           | -9.68        | AVG      |         |
| 2   | 11059.8400   | 41.30                      | 14.00                   | 55.30                     | 74.00           | -18.70       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5610 MHz |

## Vertical

130 dBuV/m

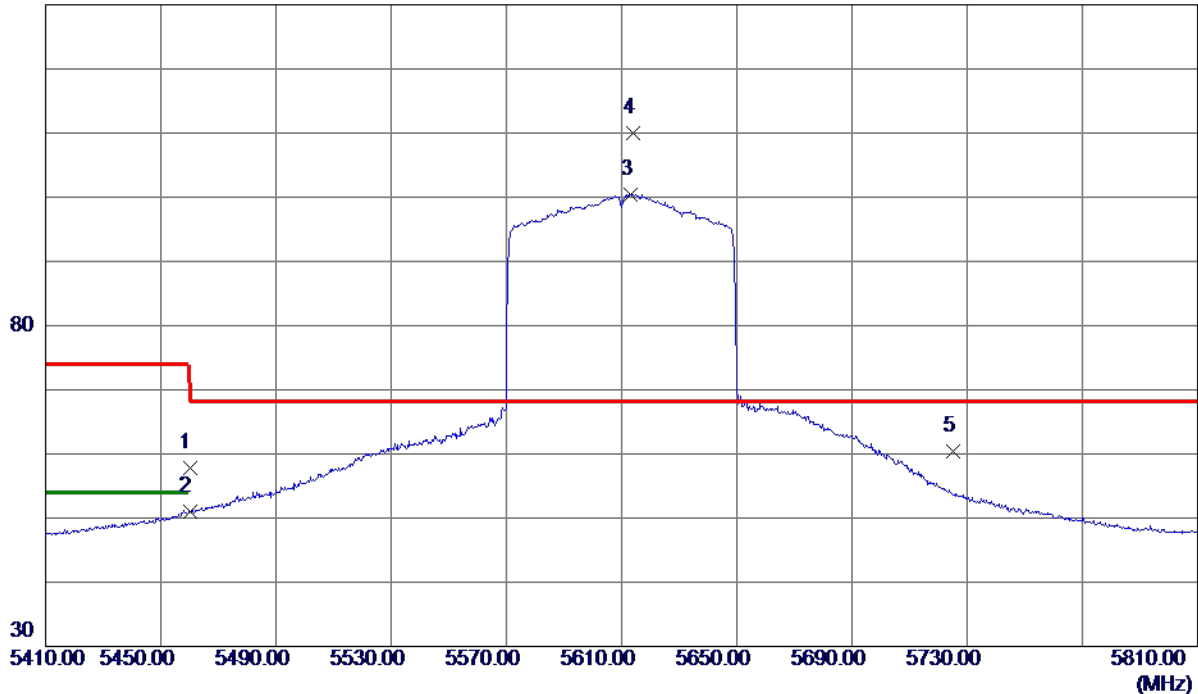

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.94                      | 16.89                   | 57.83                     | 74.00           | -16.17       | Peak     |          |
| 2   | 5460.0000    | 34.07                      | 16.89                   | 50.96                     | 54.00           | -3.04        | AVG      |          |
| 3   | 5613.2000    | 83.11                      | 17.32                   | 100.43                    | 999.00          | -898.57      | AVG      | No Limit |
| 4 * | 5614.2000    | 92.78                      | 17.32                   | 110.10                    | 68.30           | 41.80        | Peak     | No Limit |
| 5   | 5725.0000    | 42.69                      | 17.65                   | 60.34                     | 68.30           | -7.96        | Peak     |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5610 MHz |

## Vertical

80 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11220.5300   | 39.68                      | 14.20                   | 53.88                     | 54.00           | -0.12        | AVG      |         |
| 2   | 11220.5480   | 52.82                      | 14.20                   | 67.02                     | 74.00           | -6.98        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5610 MHz |

## Horizontal

130 dBuV/m

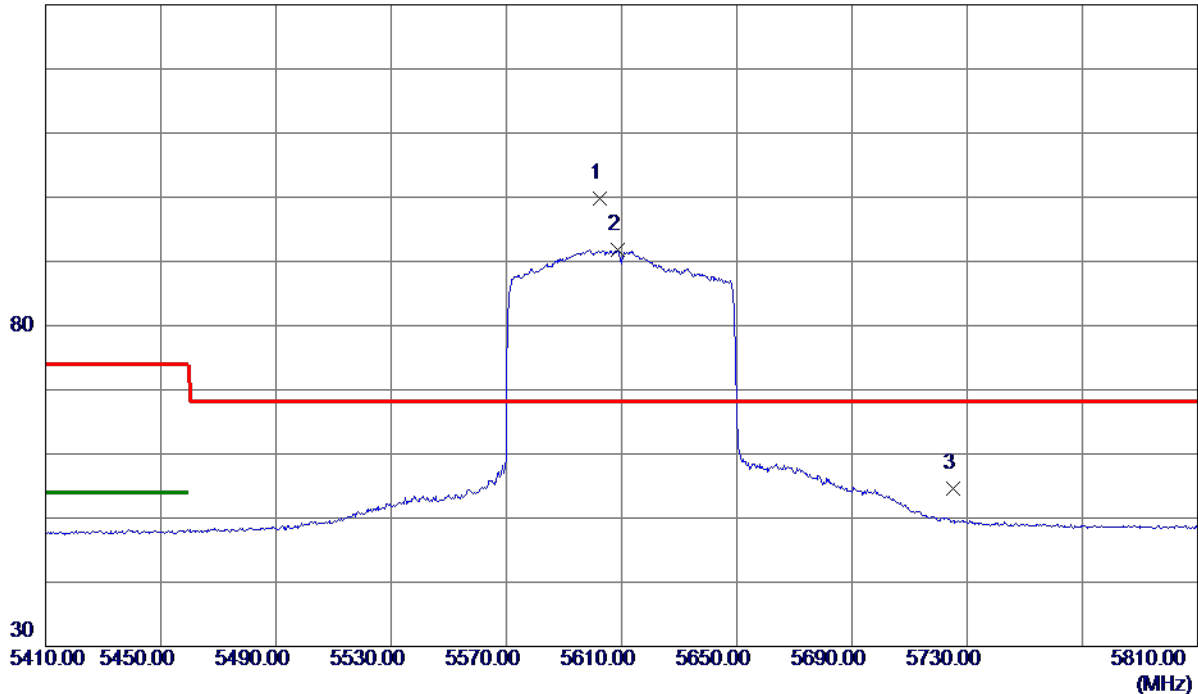

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5602.6000    | 82.43                      | 17.29                   | 99.72                     | 68.30           | 31.42        | Peak     | No Limit |
| 2   | 5608.8000    | 74.42                      | 17.31                   | 91.73                     | 999.00          | -907.27      | AVG      | No Limit |
| 3   | 5725.0000    | 36.94                      | 17.65                   | 54.59                     | 68.30           | -13.71       | Peak     |          |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                    |
|-----------------|------------------------------------|
| Orthogonal Axis | X                                  |
| Test Mode       | UNII-2C_TX AX (HE80) Mode 5610 MHz |

## Horizontal

80 dBuV/m

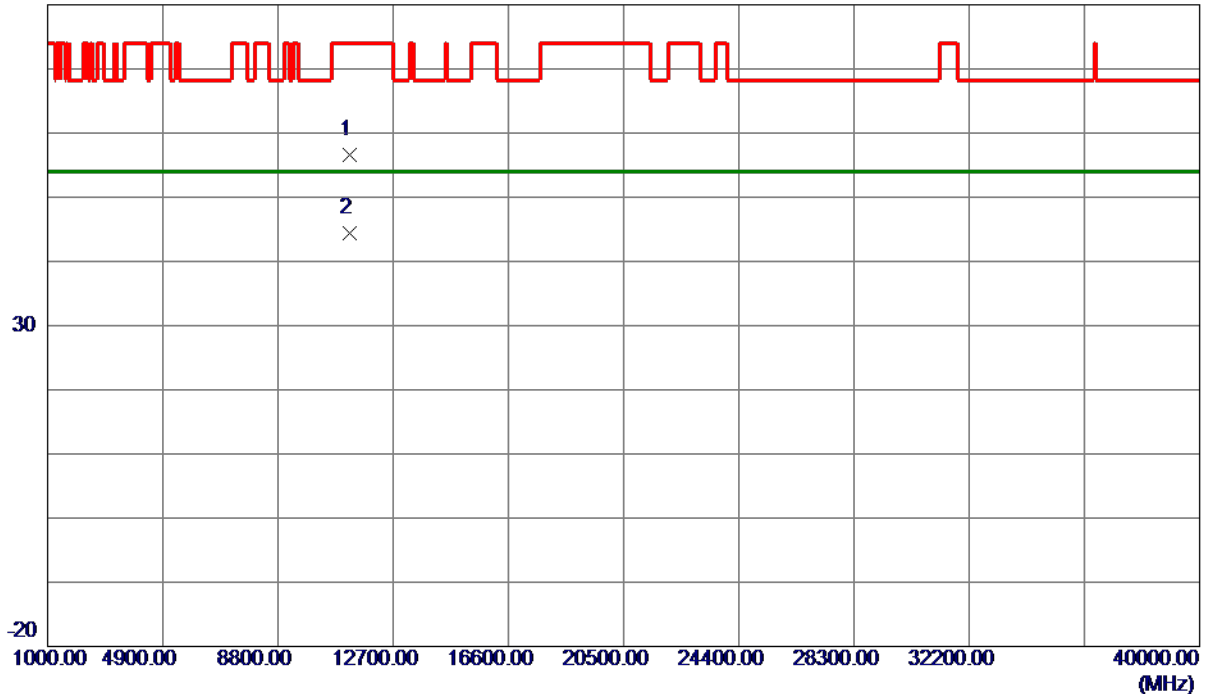

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11219.8680   | 42.37                      | 14.20                   | 56.57                     | 74.00           | -17.43       | Peak     |         |
| 2 * | 11219.9960   | 30.12                      | 14.20                   | 44.32                     | 54.00           | -9.68        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5745 MHz |

## Vertical

130 dBuV/m

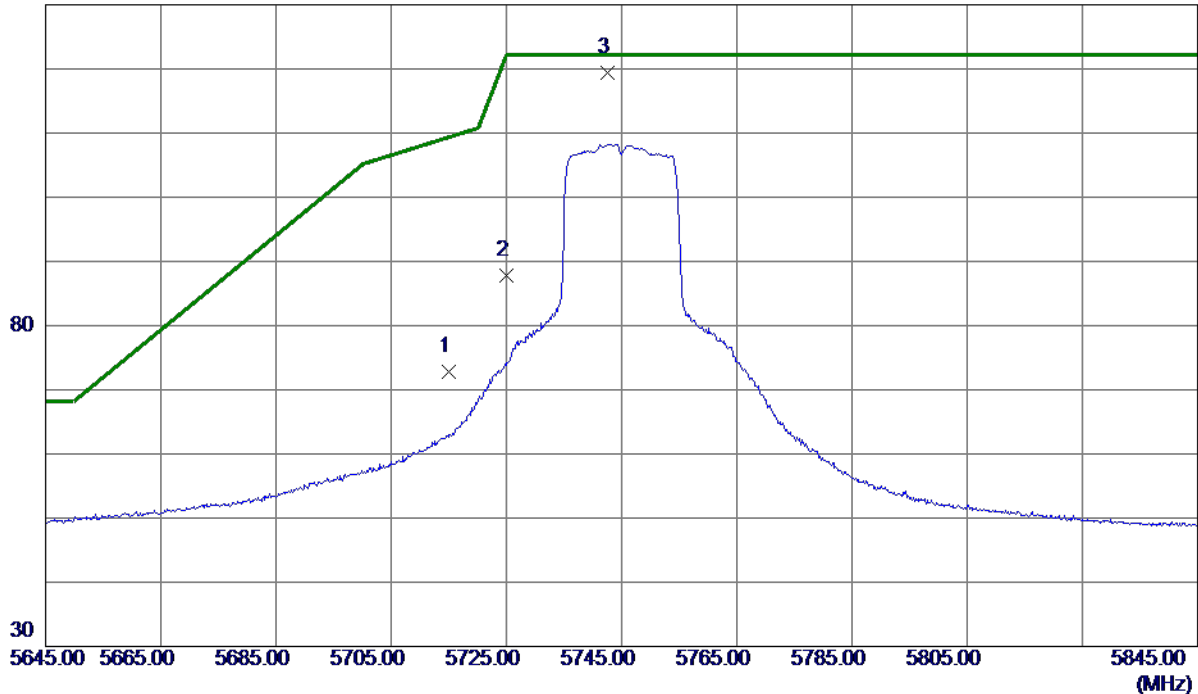

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 55.09                      | 17.62                   | 72.71                     | 109.40          | -36.69       | Peak     |         |
| 2   | 5725.0000    | 70.07                      | 17.65                   | 87.72                     | 122.20          | -34.48       | Peak     |         |
| 3 * | 5742.5000    | 101.77                     | 17.71                   | 119.48                    | 122.20          | -2.72        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5745 MHz |

## Vertical

80 dBuV/m

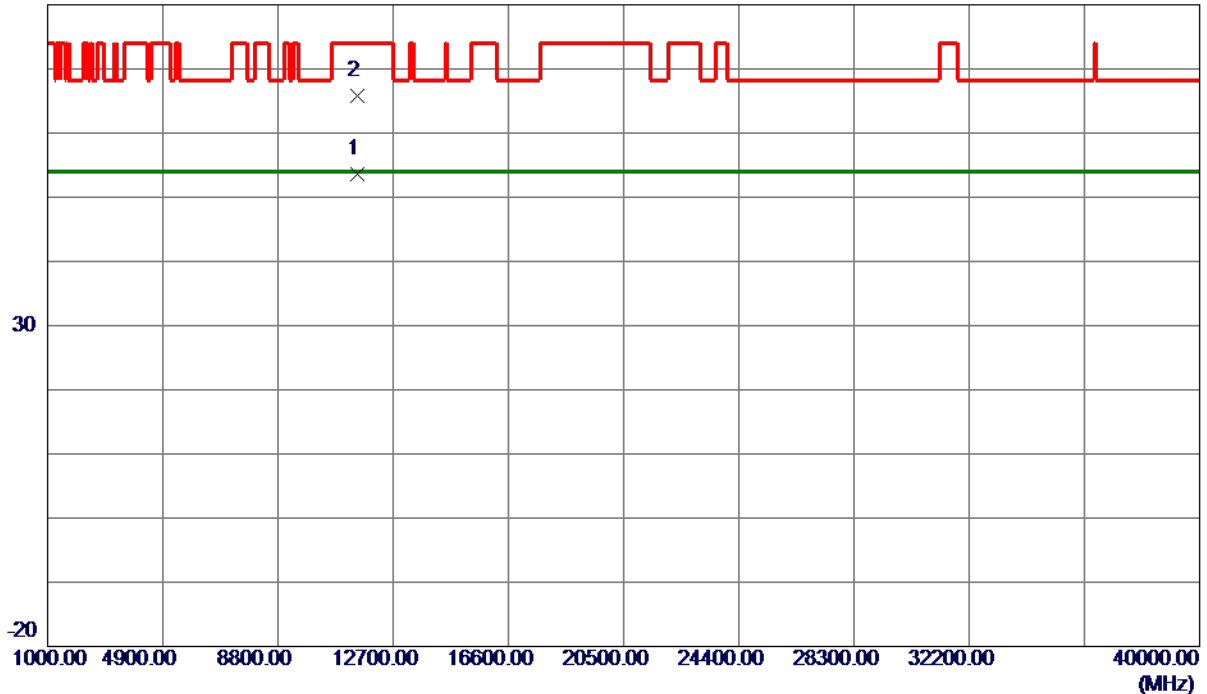

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11489.2470   | 39.05                      | 14.55                   | 53.60                     | 54.00           | -0.40        | AVG      |         |
| 2   | 11490.6730   | 51.18                      | 14.55                   | 65.73                     | 74.00           | -8.27        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5745 MHz |

## Horizontal

130 dBuV/m

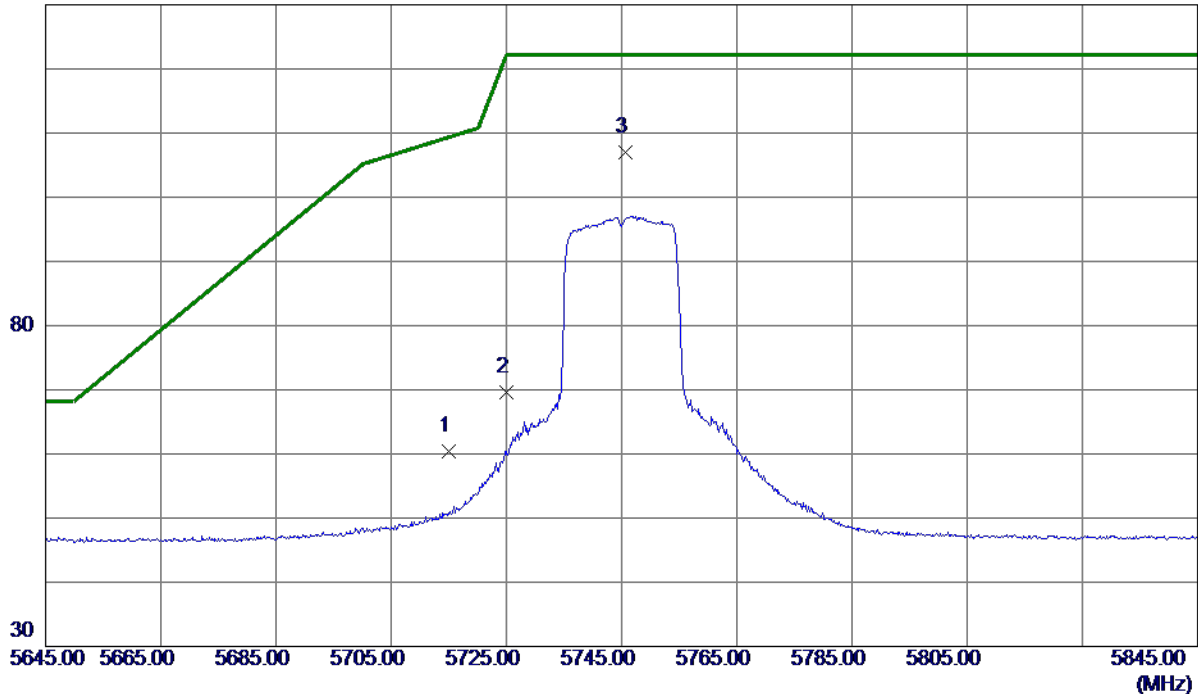

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 42.70                      | 17.62                   | 60.32                     | 109.40          | -49.08       | Peak     |         |
| 2   | 5725.0000    | 51.98                      | 17.65                   | 69.63                     | 122.20          | -52.57       | Peak     |         |
| 3 * | 5745.6000    | 89.39                      | 17.71                   | 107.10                    | 122.20          | -15.10       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5745 MHz |

## Horizontal

80 dBuV/m

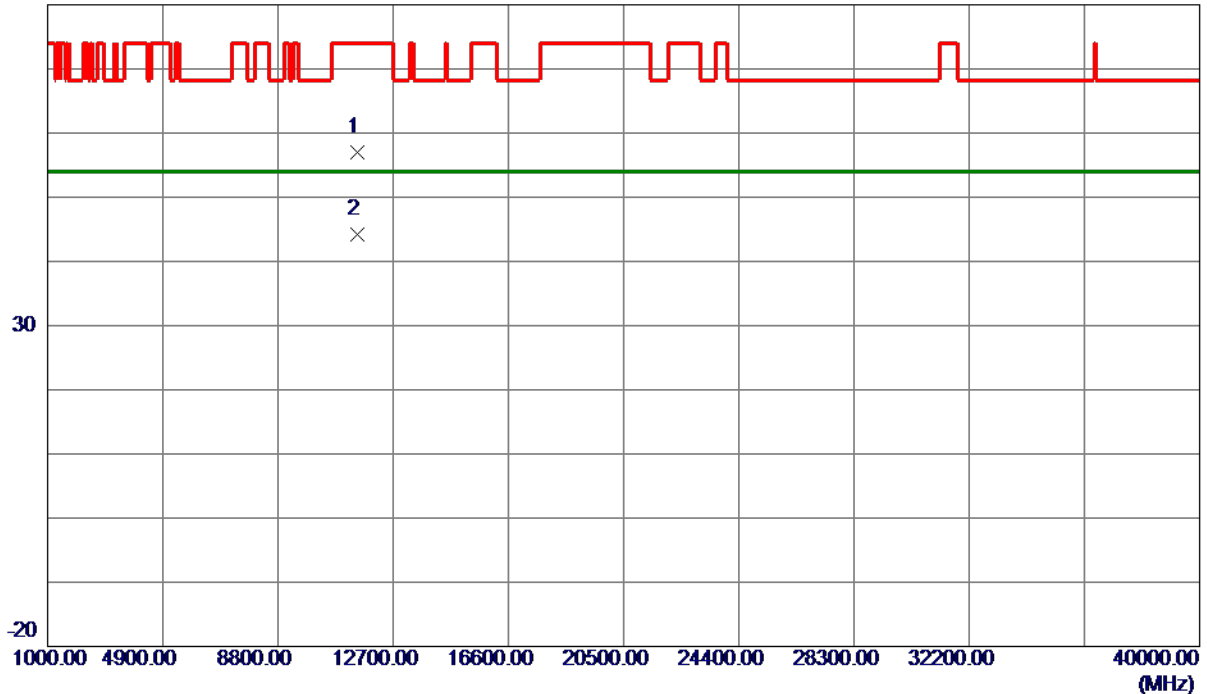

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11489.2500   | 42.41                      | 14.55                   | 56.96                     | 74.00           | -17.04       | Peak     |         |
| 2 * | 11489.4300   | 29.62                      | 14.55                   | 44.17                     | 54.00           | -9.83        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5785 MHz |

## Vertical

130 dBuV/m

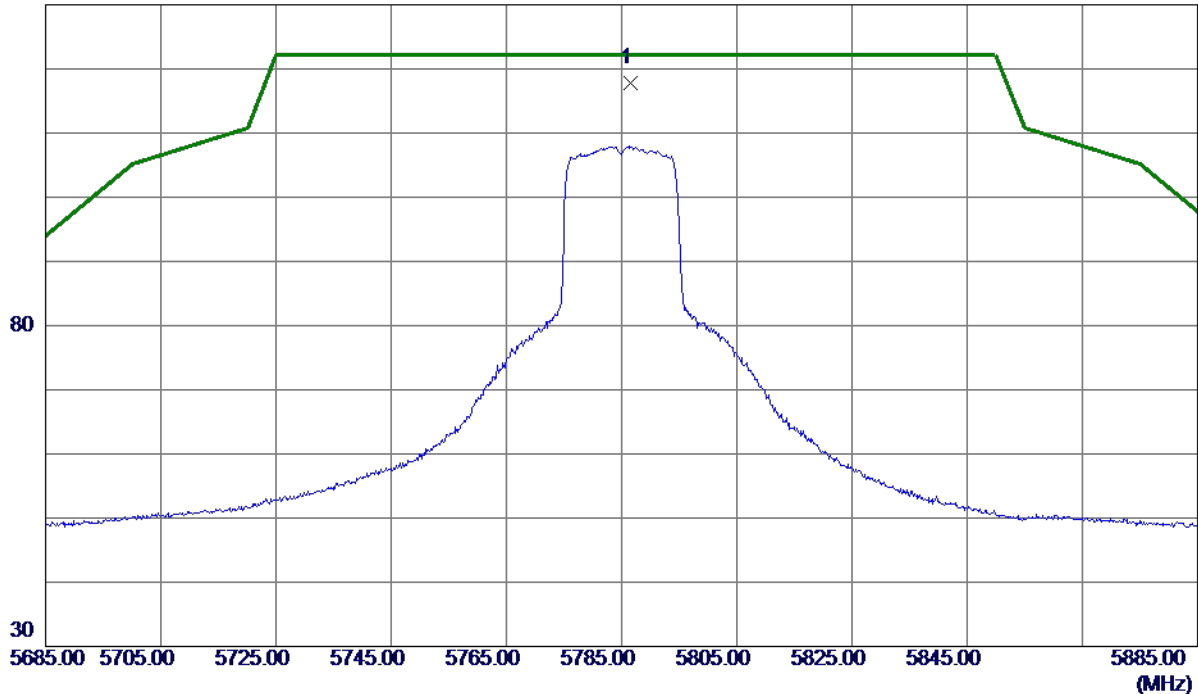

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5786.5000    | 100.04                     | 17.84                   | 117.88                    | 122.20          | -4.32        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5785 MHz |

## Vertical

80 dBuV/m

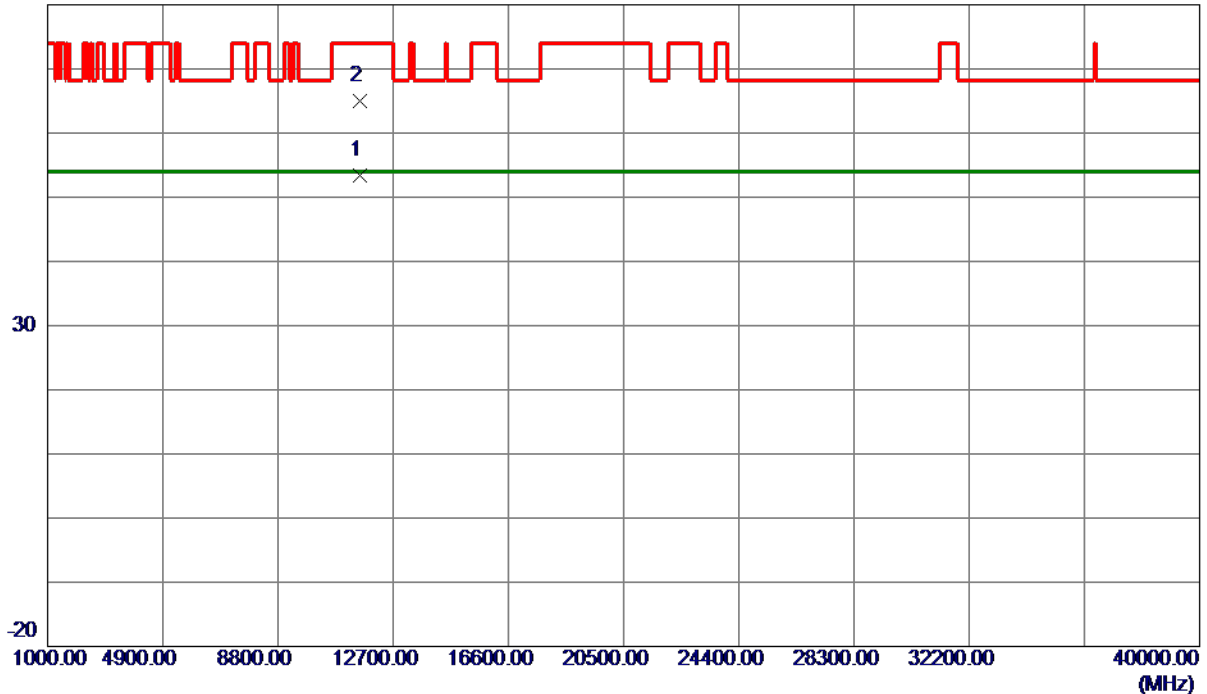


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11571.4650   | 38.86                      | 14.57                   | 53.43                     | 54.00           | -0.57        | AVG      |         |
| 2   | 11571.7880   | 50.53                      | 14.57                   | 65.10                     | 74.00           | -8.90        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5785 MHz |

## Horizontal

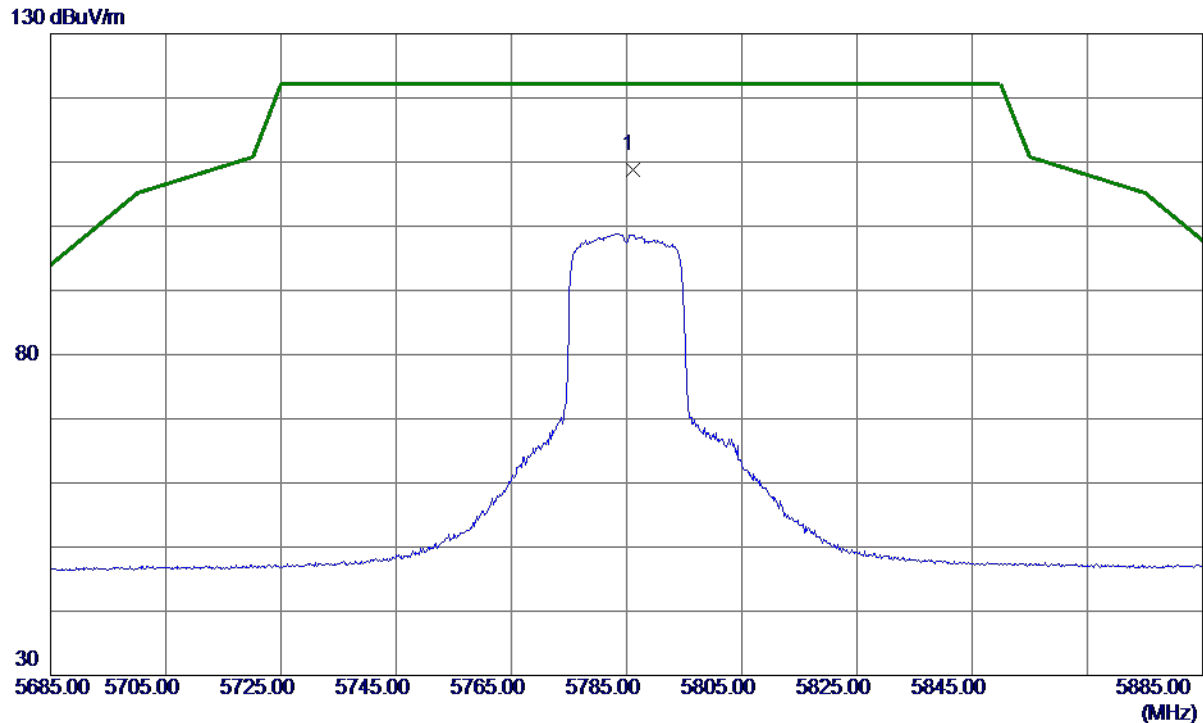

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5786.0000    | 90.88                      | 17.83                   | 108.71                    | 122.20          | -13.49       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5785 MHz |

## Horizontal

80 dBuV/m

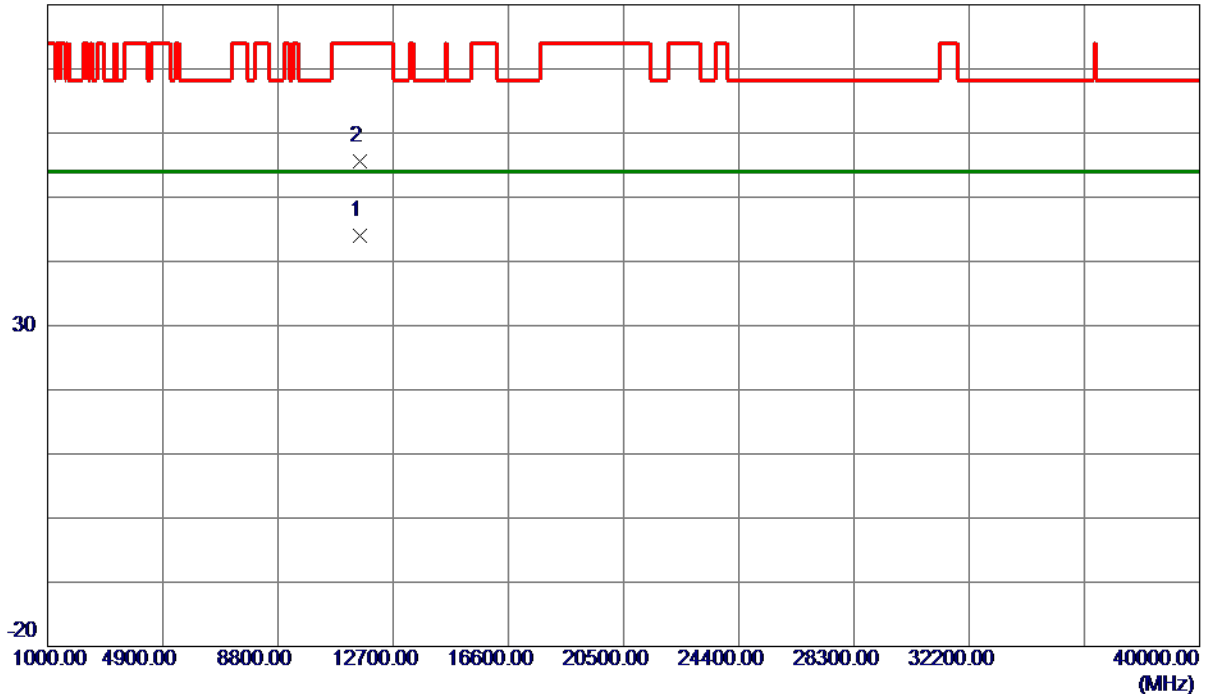

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.4340   | 29.46                      | 14.57                   | 44.03                     | 54.00           | -9.97        | AVG      |         |
| 2   | 11570.5340   | 41.09                      | 14.57                   | 55.66                     | 74.00           | -18.34       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5825 MHz |

## Vertical

130 dBuV/m

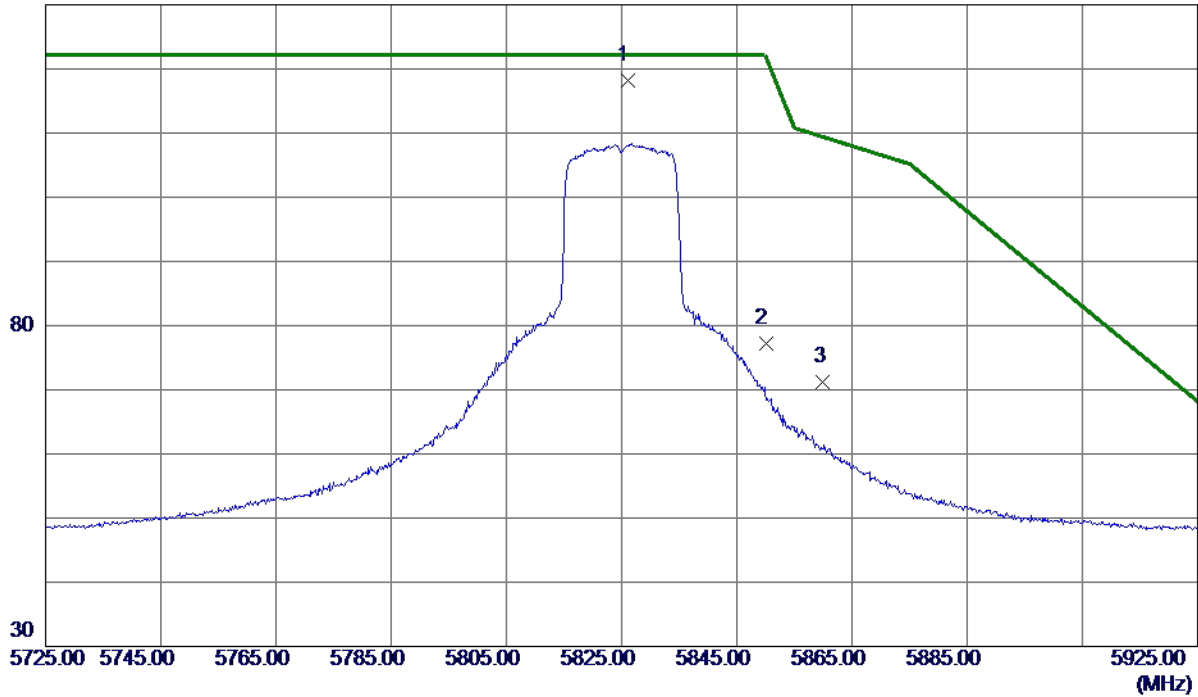

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5826.0000    | 100.35                     | 17.95                   | 118.30                    | 122.20          | -3.90        | Peak     |         |
| 2   | 5850.0000    | 59.18                      | 18.02                   | 77.20                     | 122.20          | -45.00       | Peak     |         |
| 3   | 5860.0000    | 53.15                      | 18.05                   | 71.20                     | 109.40          | -38.20       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5825 MHz |

## Vertical

80 dBuV/m

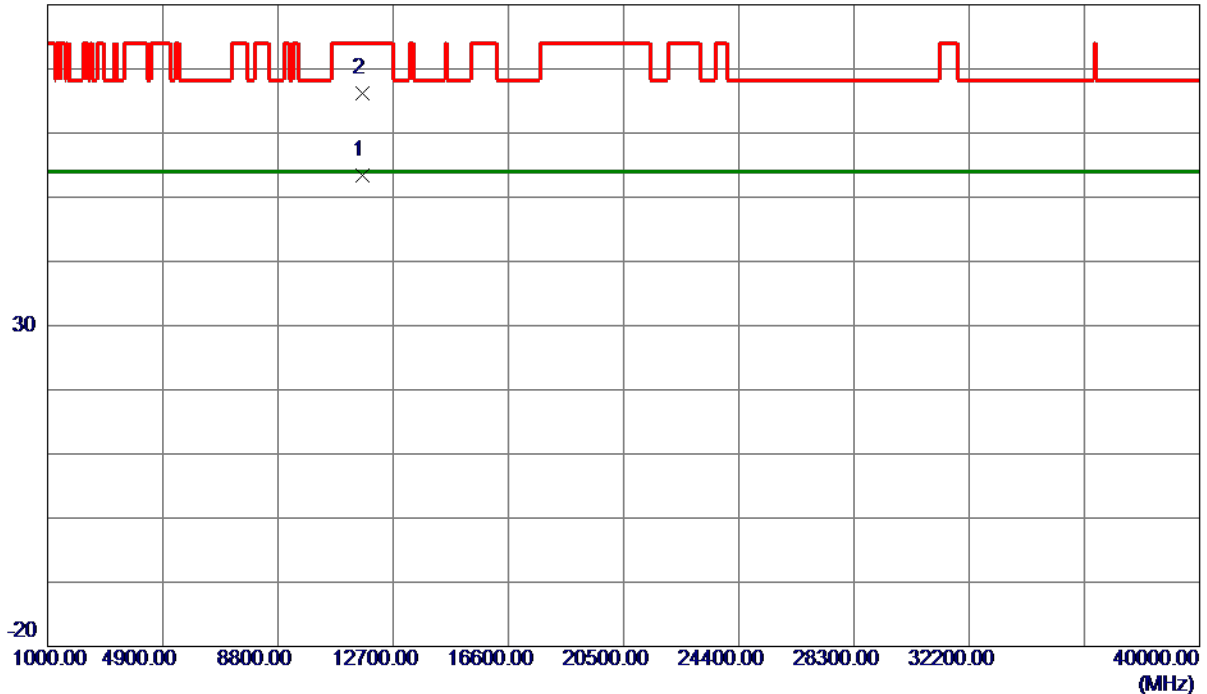

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11648.4700   | 38.82                      | 14.57                   | 53.39                     | 54.00           | -0.61        | AVG      |         |
| 2   | 11648.8620   | 51.67                      | 14.57                   | 66.24                     | 74.00           | -7.76        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5825 MHz |

## Horizontal

130 dBuV/m

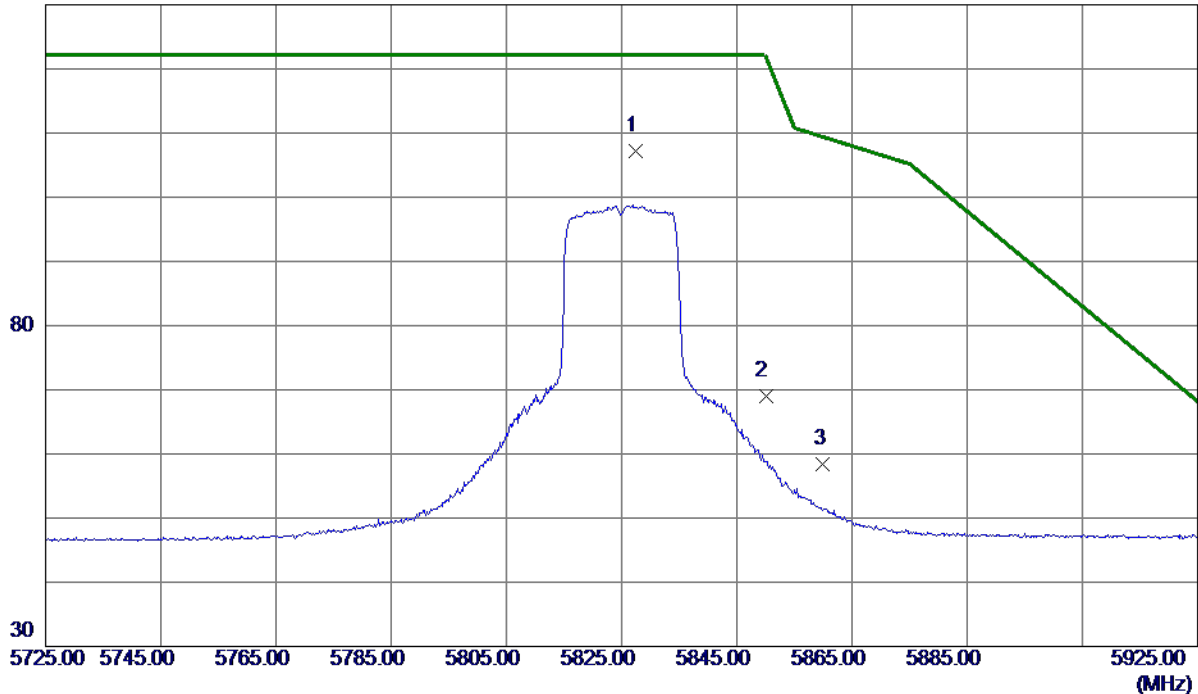

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5827.4000    | 89.18                      | 17.96                   | 107.14                    | 122.20          | -15.06       | Peak     |         |
| 2   | 5850.0000    | 50.93                      | 18.02                   | 68.95                     | 122.20          | -53.25       | Peak     |         |
| 3   | 5860.0000    | 40.32                      | 18.05                   | 58.37                     | 109.40          | -51.03       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE20) Mode 5825 MHz |

## Horizontal

80 dBuV/m

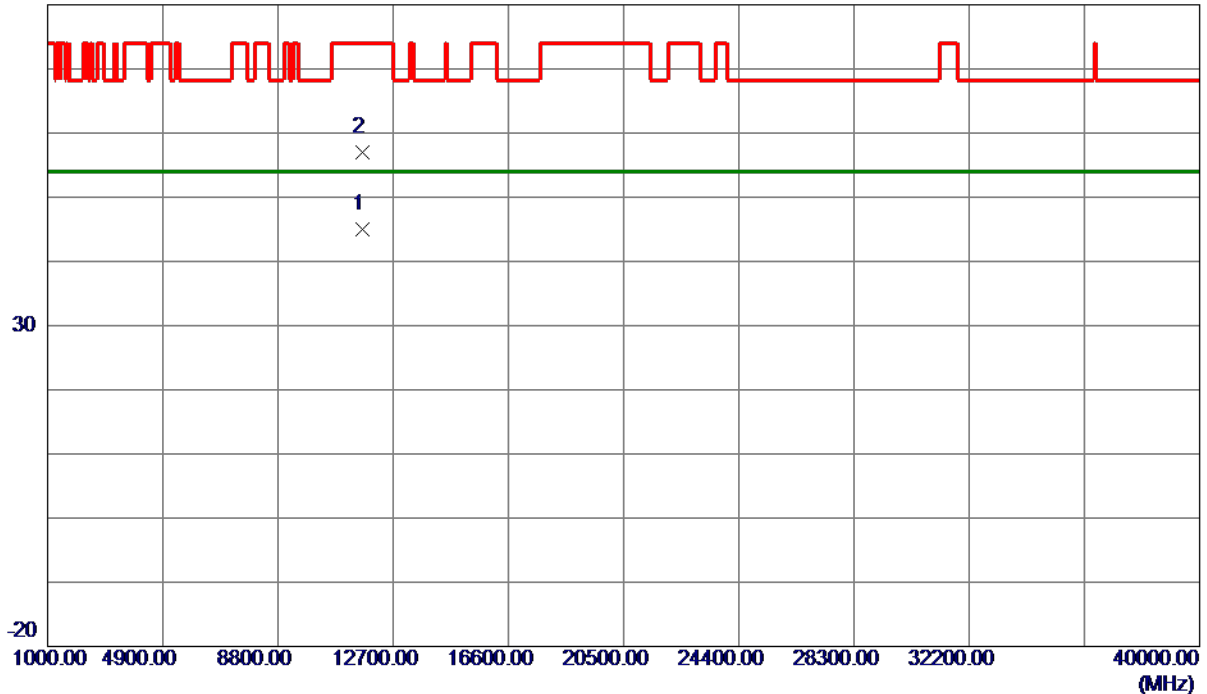

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.4160   | 30.36                      | 14.57                   | 44.93                     | 54.00           | -9.07        | AVG      |         |
| 2   | 11650.8680   | 42.48                      | 14.57                   | 57.05                     | 74.00           | -16.95       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5755 MHz |

## Vertical

130 dBuV/m

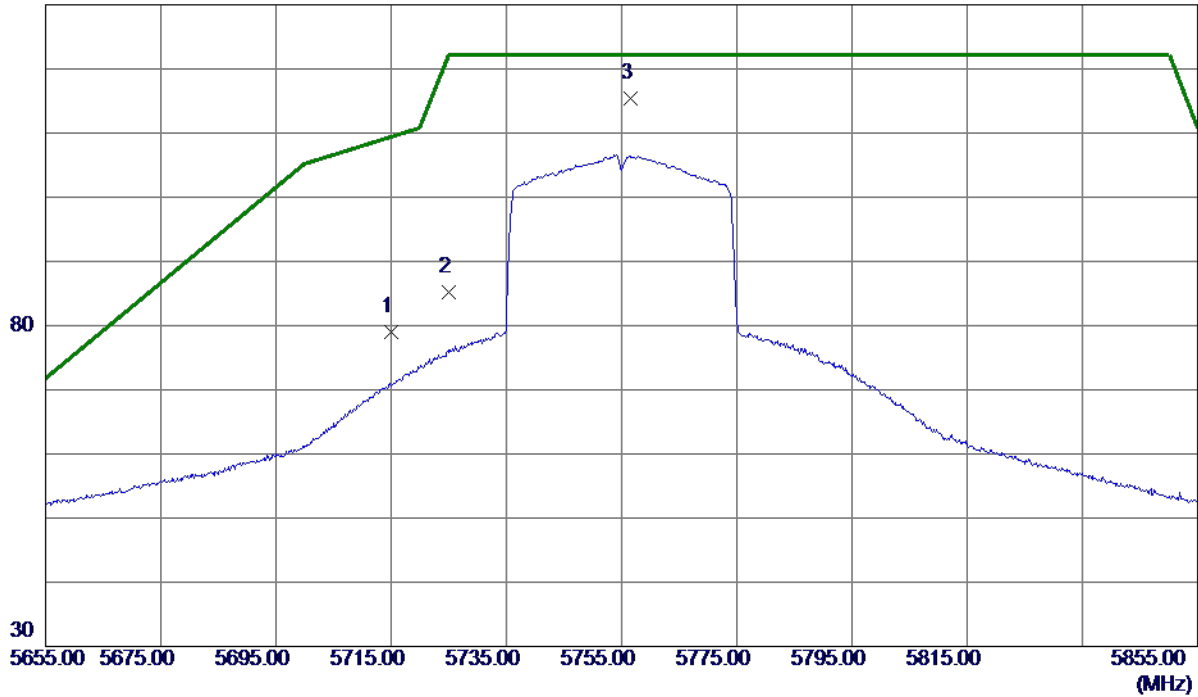

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 61.42                      | 17.62                   | 79.04                     | 109.40          | -30.36       | Peak     |         |
| 2   | 5725.0000    | 67.47                      | 17.65                   | 85.12                     | 122.20          | -37.08       | Peak     |         |
| 3 * | 5756.5000    | 97.61                      | 17.75                   | 115.36                    | 122.20          | -6.84        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5755 MHz |

## Vertical

80 dBuV/m

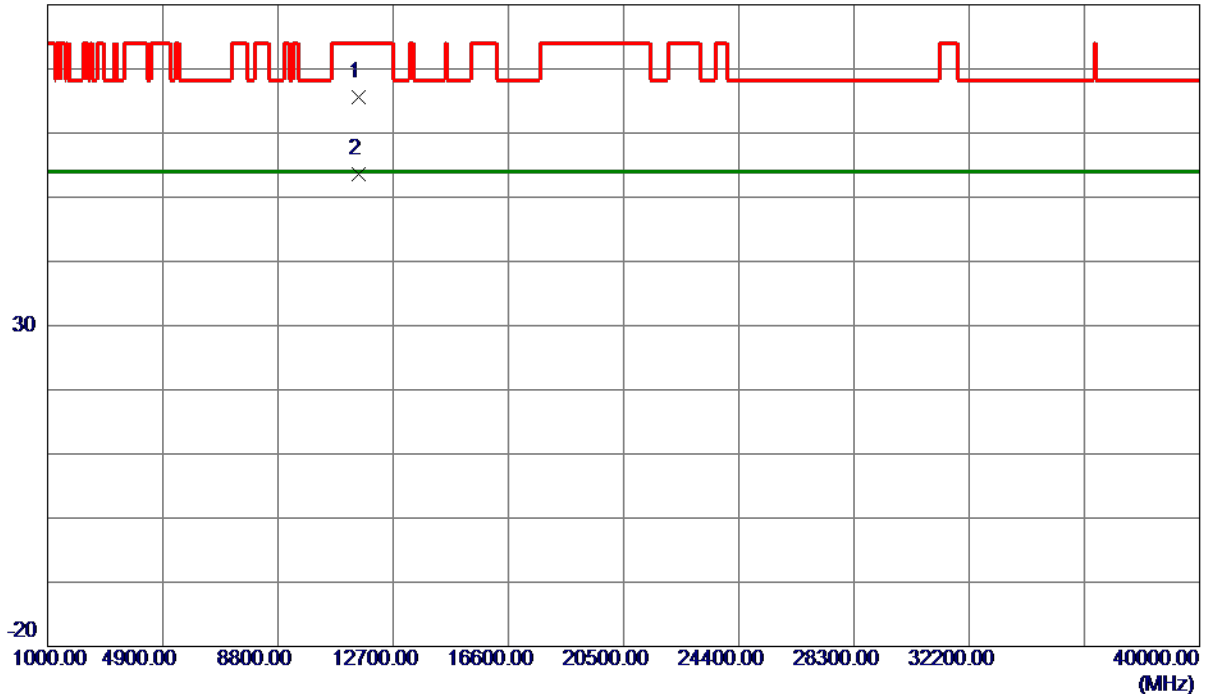

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11508.7020   | 51.03                      | 14.57                   | 65.60                     | 74.00           | -8.40        | Peak     |         |
| 2 * | 11511.0480   | 39.08                      | 14.57                   | 53.65                     | 54.00           | -0.35        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5755 MHz |

## Horizontal

130 dBuV/m

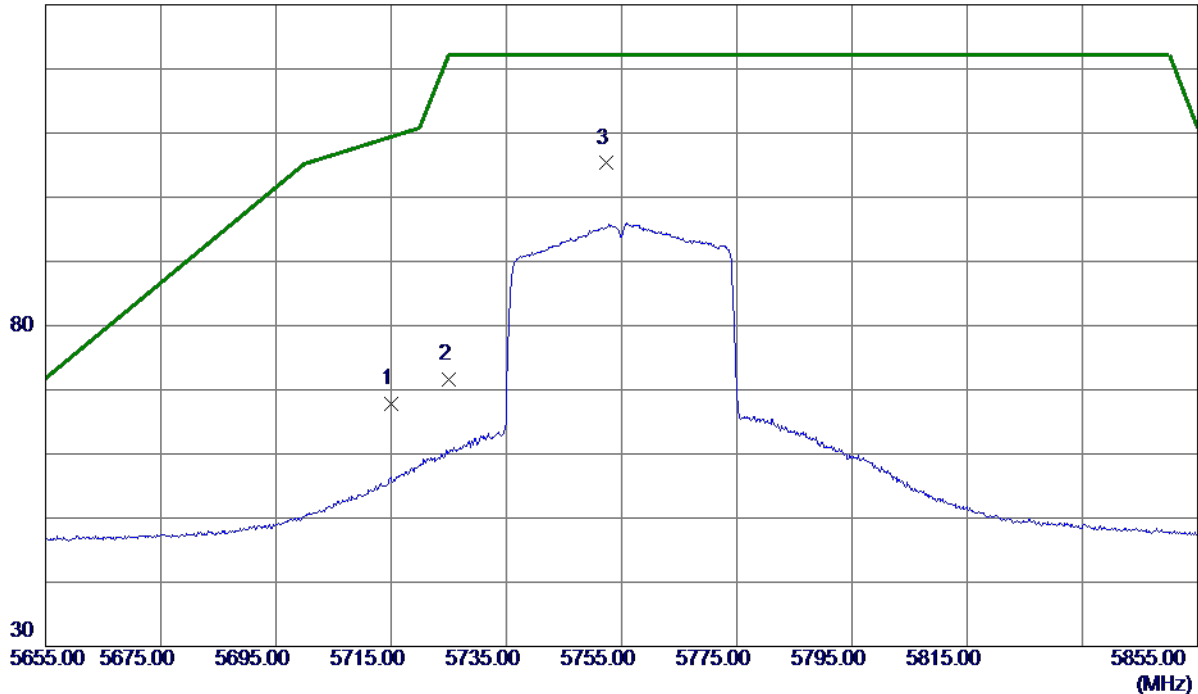

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 50.27                      | 17.62                   | 67.89                     | 109.40          | -41.51       | Peak     |         |
| 2   | 5725.0000    | 53.98                      | 17.65                   | 71.63                     | 122.20          | -50.57       | Peak     |         |
| 3 * | 5752.3000    | 87.57                      | 17.73                   | 105.30                    | 122.20          | -16.90       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5755 MHz |

## Horizontal

80 dBuV/m

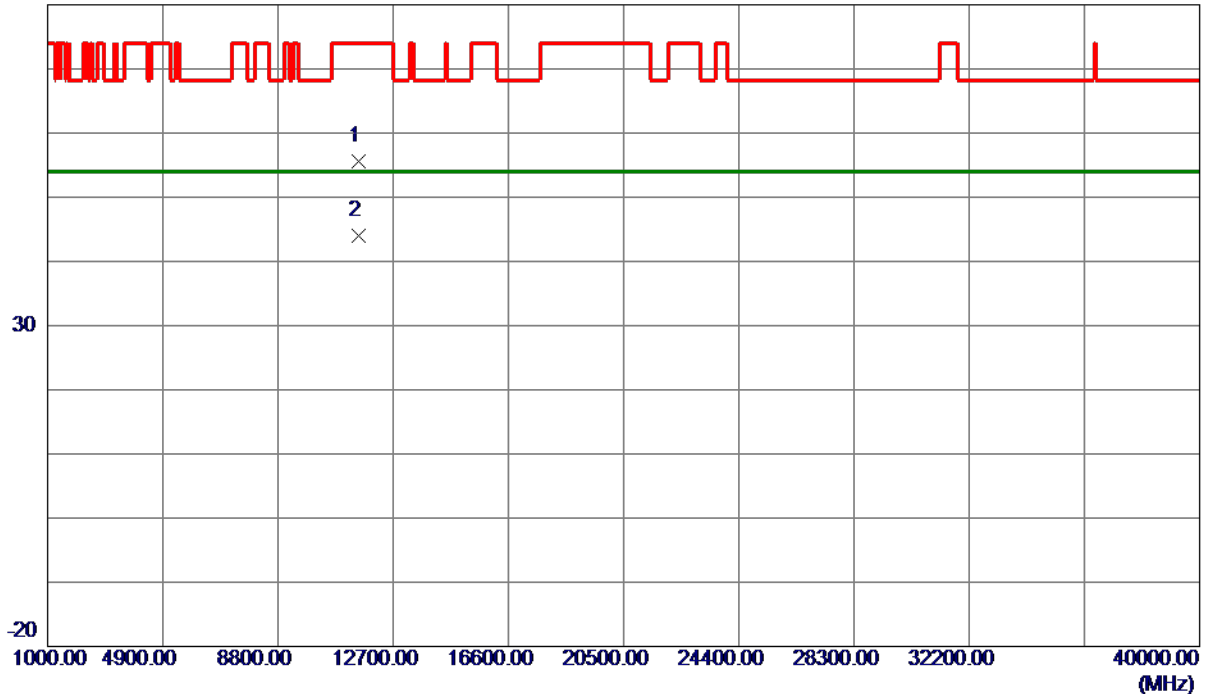

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11509.1900   | 41.02                      | 14.57                   | 55.59                     | 74.00           | -18.41       | Peak     |         |
| 2 * | 11510.5740   | 29.47                      | 14.57                   | 44.04                     | 54.00           | -9.96        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5795 MHz |

## Vertical

130 dBuV/m

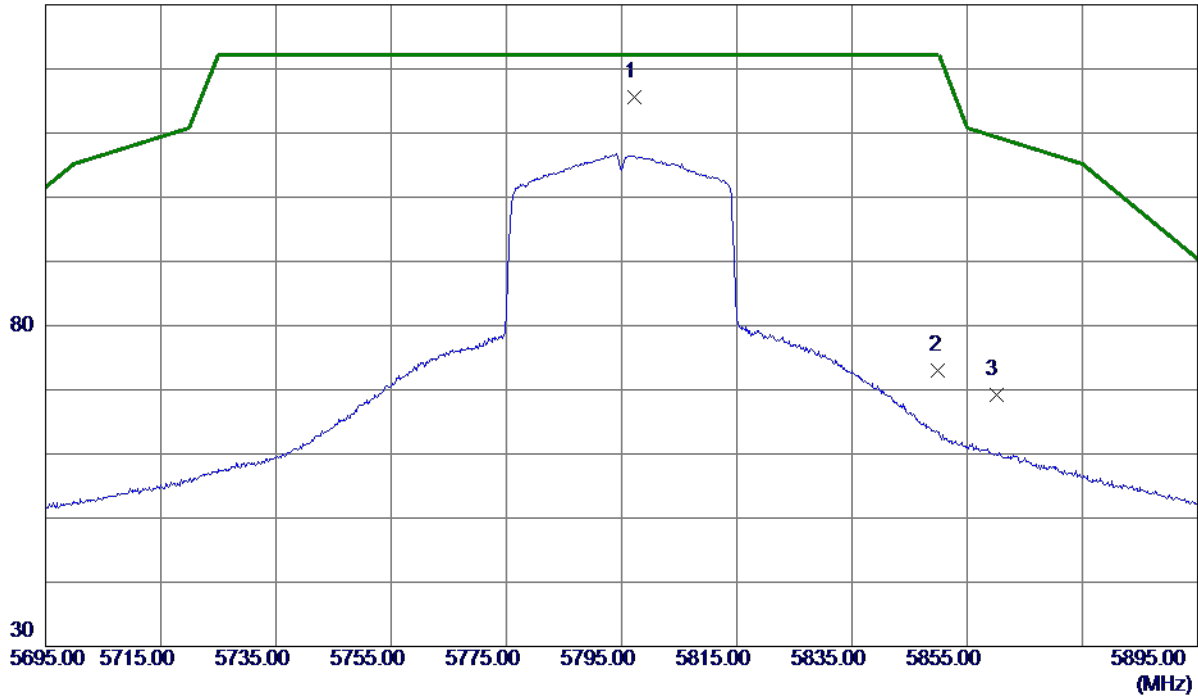

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5797.3000    | 97.75                      | 17.87                   | 115.62                    | 122.20          | -6.58        | Peak     |         |
| 2   | 5850.0000    | 55.06                      | 18.02                   | 73.08                     | 122.20          | -49.12       | Peak     |         |
| 3   | 5860.0000    | 51.06                      | 18.05                   | 69.11                     | 109.40          | -40.29       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5795 MHz |

## Vertical

80 dBuV/m

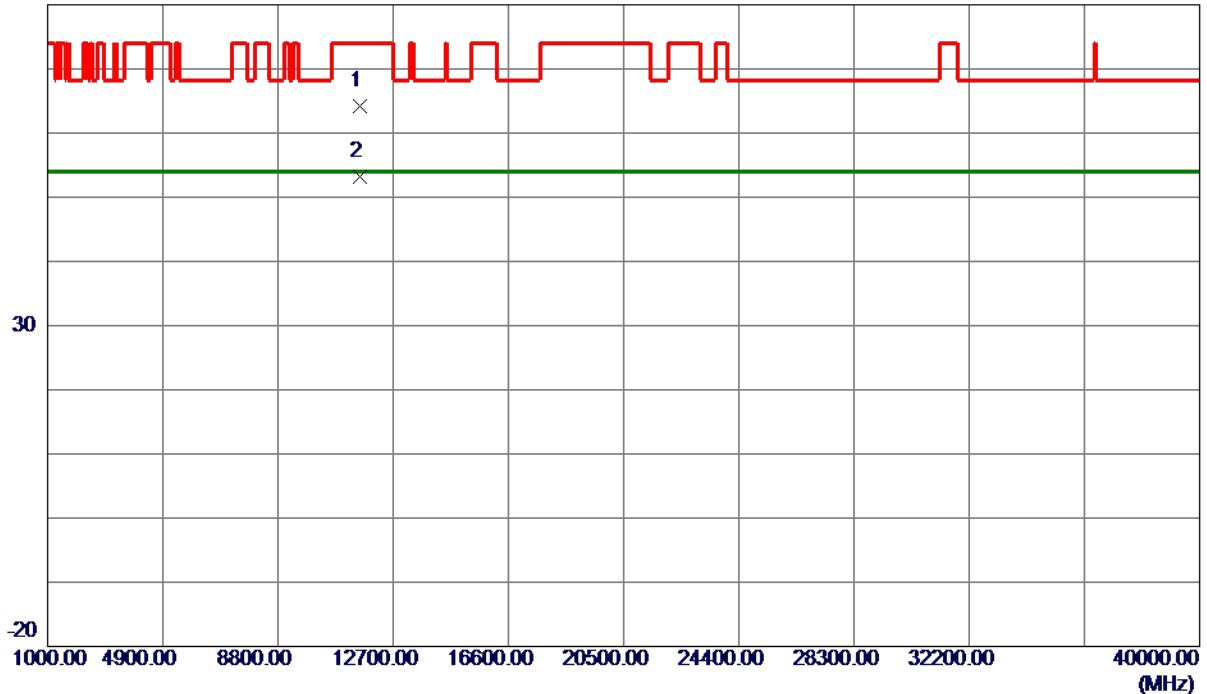

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11588.2330   | 49.62                      | 14.57                   | 64.19                     | 74.00           | -9.81        | Peak     |         |
| 2 * | 11589.3400   | 38.70                      | 14.57                   | 53.27                     | 54.00           | -0.73        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5795 MHz |

## Horizontal

130 dBuV/m

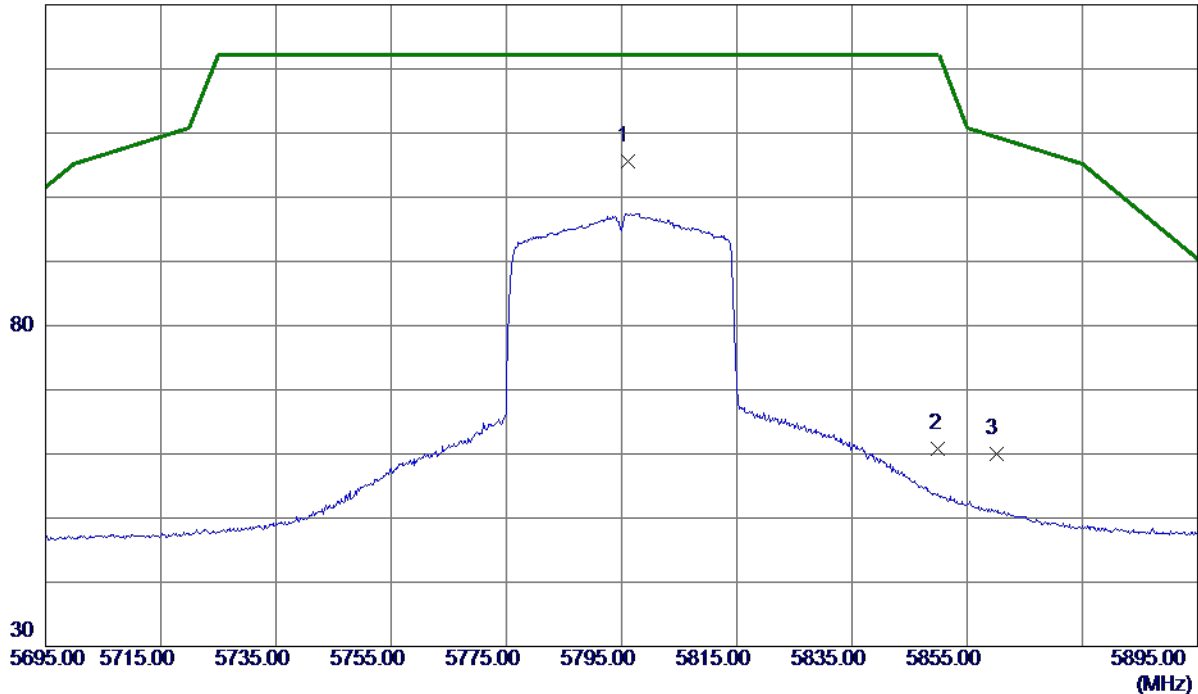

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5796.0000    | 87.65                      | 17.86                   | 105.51                    | 122.20          | -16.69       | Peak     |         |
| 2   | 5850.0000    | 42.85                      | 18.02                   | 60.87                     | 122.20          | -61.33       | Peak     |         |
| 3   | 5860.0000    | 41.87                      | 18.05                   | 59.92                     | 109.40          | -49.48       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE40) Mode 5795 MHz |

## Horizontal

80 dBuV/m

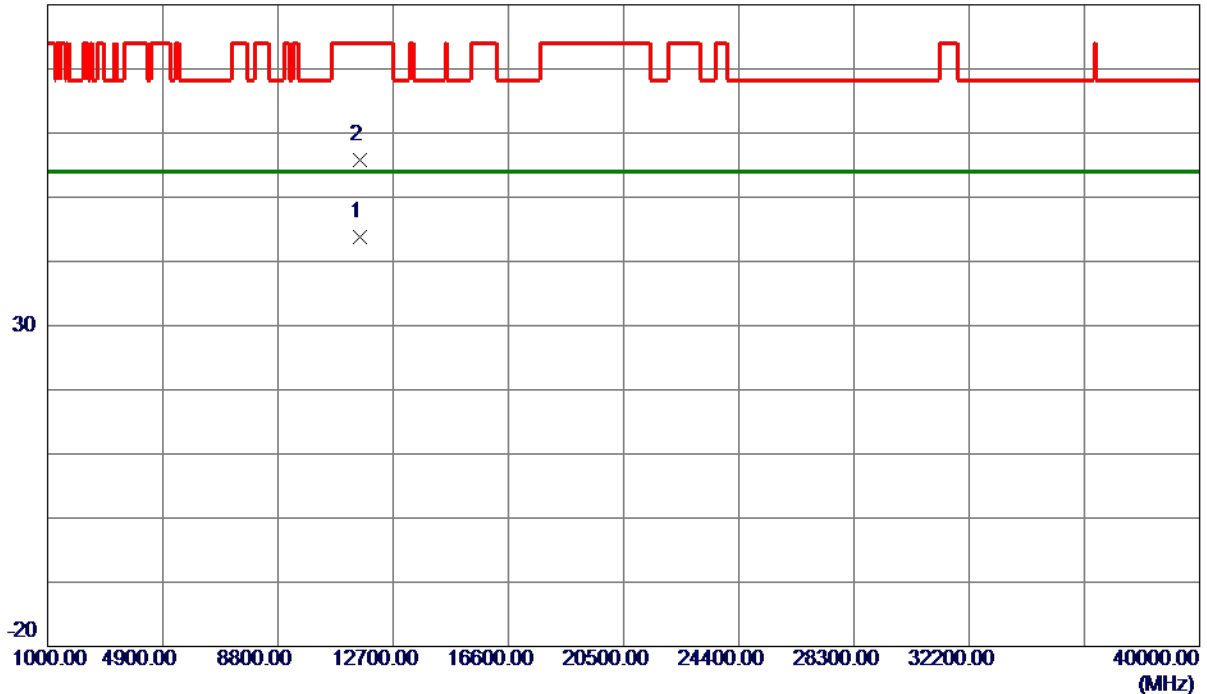

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11589.1400   | 29.31                      | 14.57                   | 43.88                     | 54.00           | -10.12       | AVG      |         |
| 2   | 11590.5340   | 41.28                      | 14.57                   | 55.85                     | 74.00           | -18.15       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE80) Mode 5775 MHz |

## Vertical

130 dBuV/m

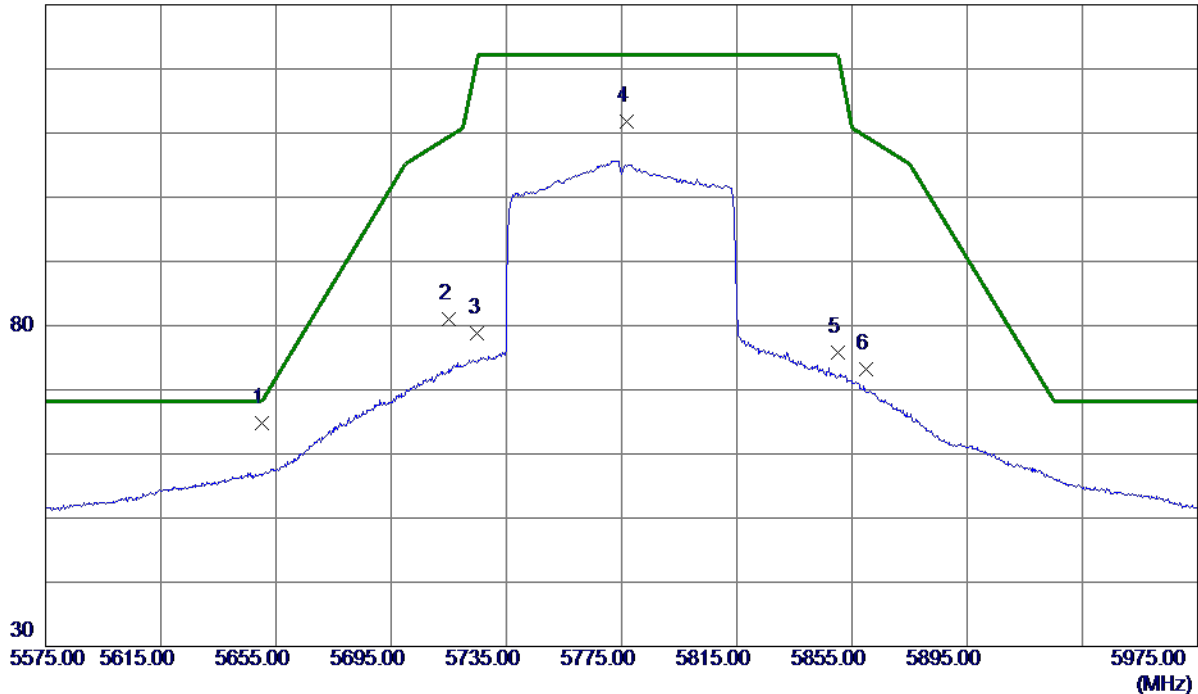

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5650.0000    | 47.31                      | 17.43                   | 64.74                     | 68.20           | -3.46        | Peak     |         |
| 2   | 5715.0000    | 63.43                      | 17.62                   | 81.05                     | 109.40          | -28.35       | Peak     |         |
| 3   | 5725.0000    | 61.09                      | 17.65                   | 78.74                     | 122.20          | -43.46       | Peak     |         |
| 4   | 5776.6000    | 93.97                      | 17.81                   | 111.78                    | 122.20          | -10.42       | Peak     |         |
| 5   | 5850.0000    | 57.79                      | 18.02                   | 75.81                     | 122.20          | -46.39       | Peak     |         |
| 6   | 5860.0000    | 55.18                      | 18.05                   | 73.23                     | 109.40          | -36.17       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE80) Mode 5775 MHz |

## Vertical

80 dBuV/m

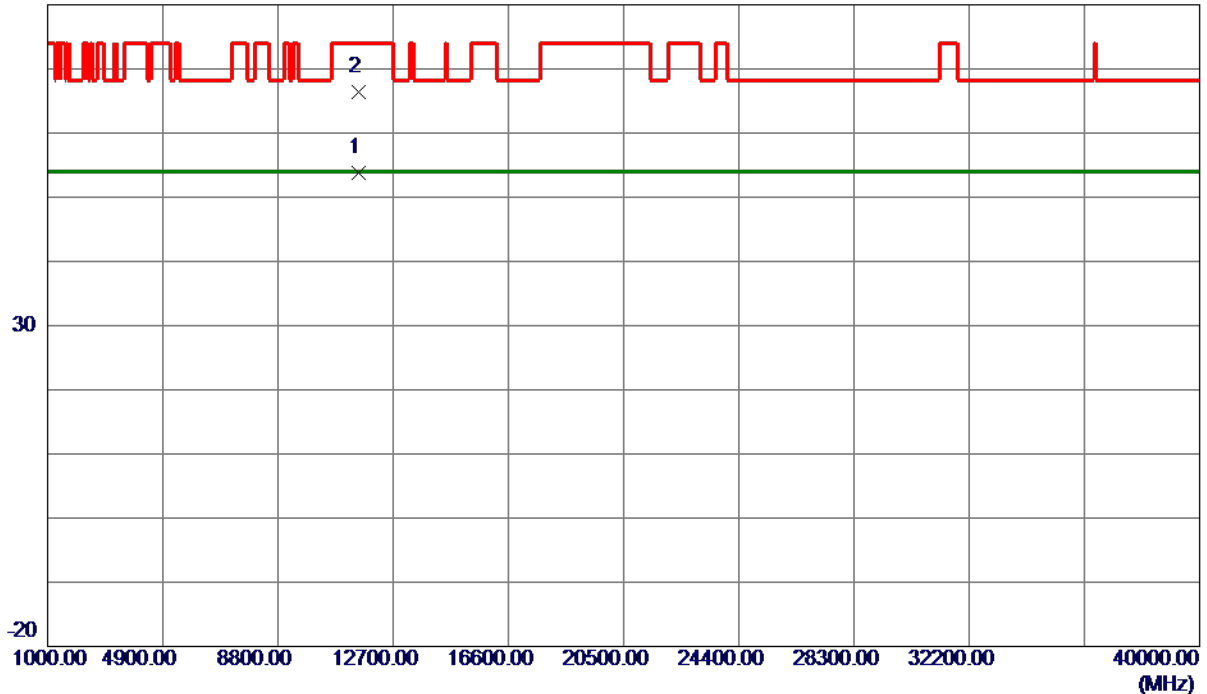

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11550.2820   | 39.27                      | 14.57                   | 53.84                     | 54.00           | -0.16        | AVG      |         |
| 2   | 11550.9150   | 51.74                      | 14.57                   | 66.31                     | 74.00           | -7.69        | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE80) Mode 5775 MHz |

## Horizontal

130 dBuV/m

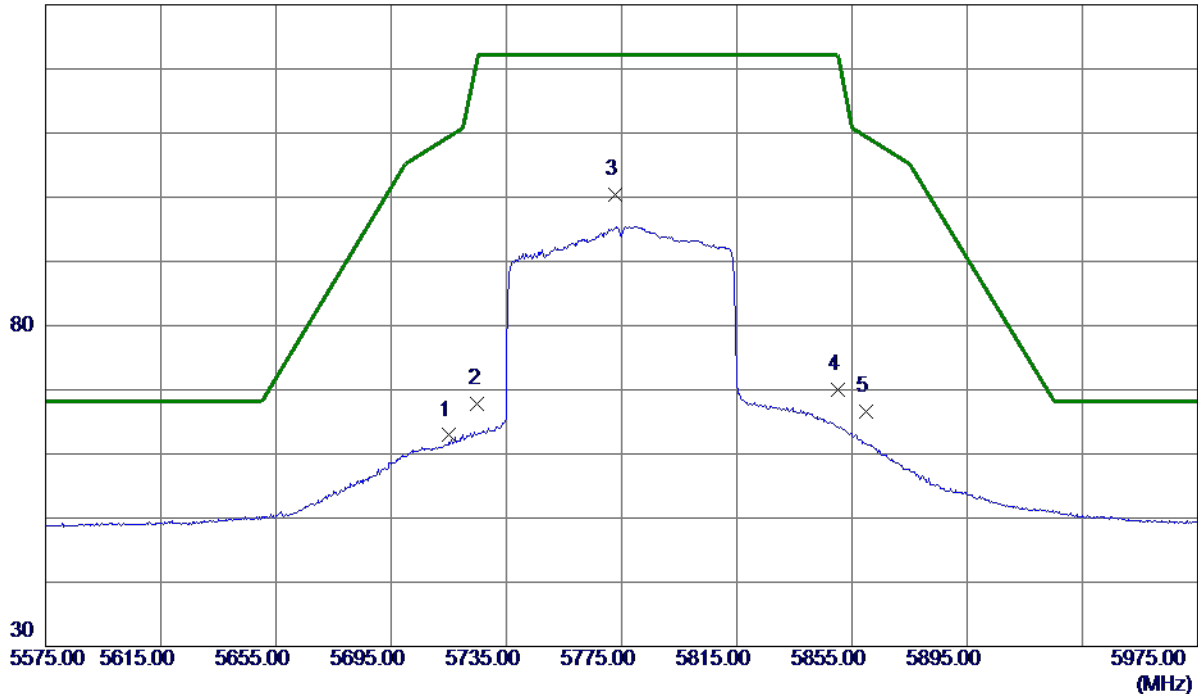

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 45.28                      | 17.62                   | 62.90                     | 109.40          | -46.50       | Peak     |         |
| 2   | 5725.0000    | 50.17                      | 17.65                   | 67.82                     | 122.20          | -54.38       | Peak     |         |
| 3 * | 5772.6000    | 82.57                      | 17.79                   | 100.36                    | 122.20          | -21.84       | Peak     |         |
| 4   | 5850.0000    | 51.96                      | 18.02                   | 69.98                     | 122.20          | -52.22       | Peak     |         |
| 5   | 5860.0000    | 48.62                      | 18.05                   | 66.67                     | 109.40          | -42.73       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                   |
|-----------------|-----------------------------------|
| Orthogonal Axis | X                                 |
| Test Mode       | UNII-3_TX AX (HE80) Mode 5775 MHz |

## Horizontal

80 dBuV/m

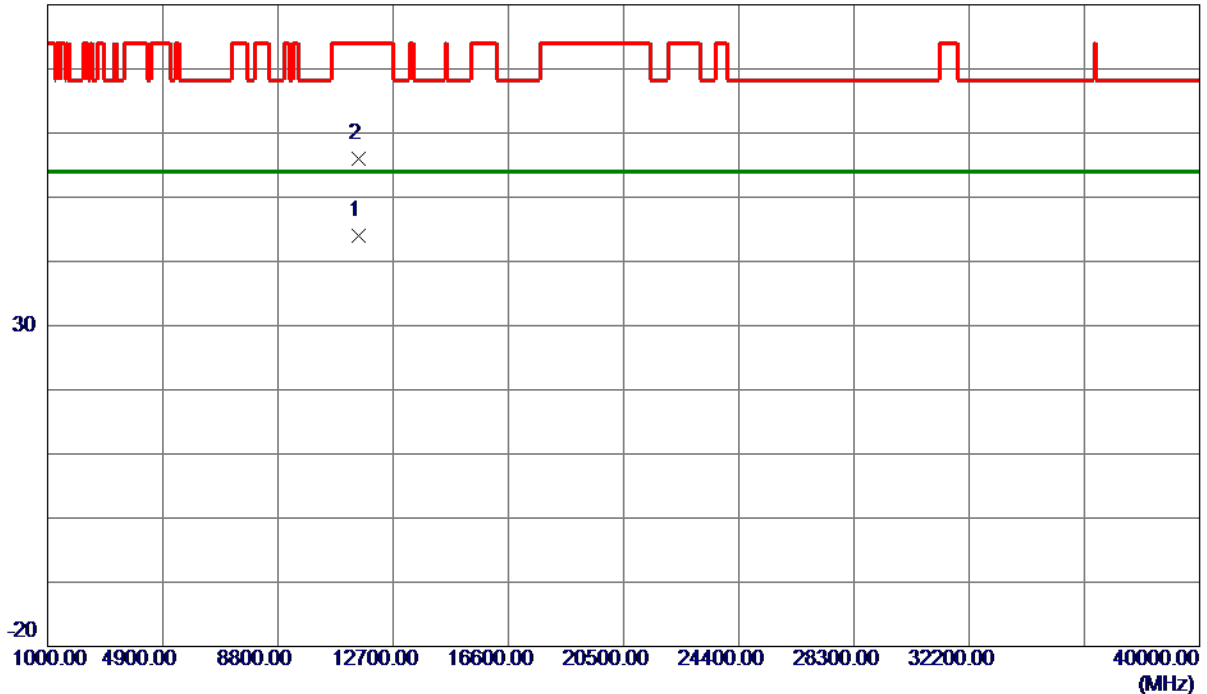

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11550.2460   | 29.51                      | 14.57                   | 44.08                     | 54.00           | -9.92        | AVG      |         |
| 2   | 11550.5300   | 41.35                      | 14.57                   | 55.92                     | 74.00           | -18.08       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

The worst case of simultaneous transmission:

|            |                                                           |
|------------|-----------------------------------------------------------|
| Test Mode: | TX WLAN 2.4G N20 Mode 2412MHz + WLAN 5G AX20 Mode 5300MHz |
|------------|-----------------------------------------------------------|

## Vertical

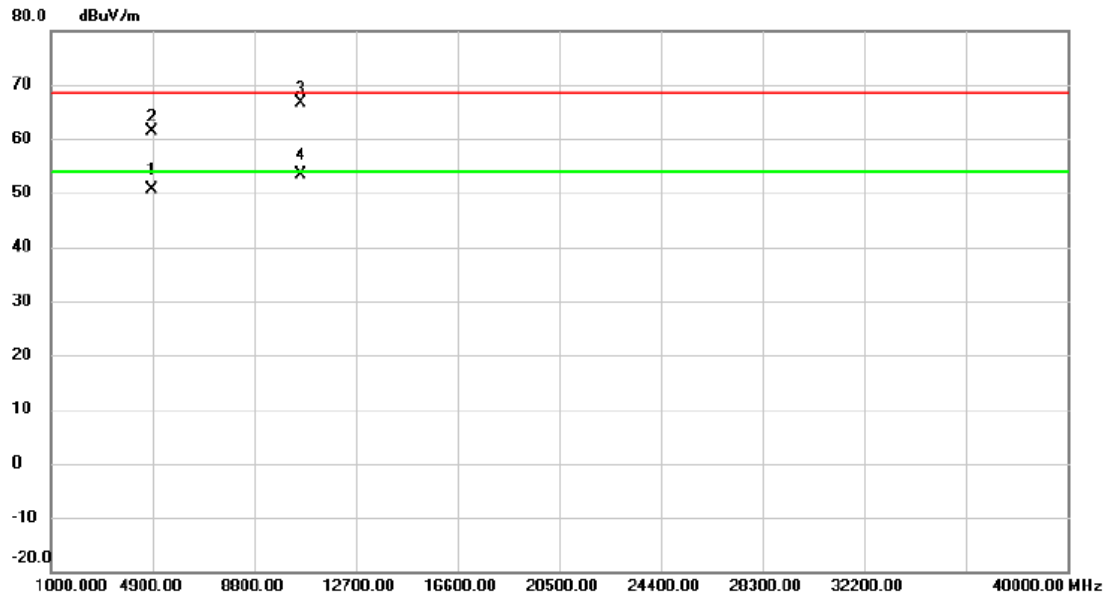

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4874.320     | 45.12                    | 5.46                    | 50.58                      | 54.00           | -3.42        | AVG      |         |
| 2   |     | 4874.886     | 55.93                    | 5.46                    | 61.39                      | 68.30           | -6.91        | peak     |         |
| 3   |     | 10600.015    | 53.00                    | 13.70                   | 66.70                      | 68.30           | -1.60        | peak     |         |
| 4   | *   | 10600.336    | 39.69                    | 13.70                   | 53.39                      | 54.00           | -0.61        | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                                           |
|------------|-----------------------------------------------------------|
| Test Mode: | TX WLAN 2.4G N20 Mode 2412MHz + WLAN 5G AX20 Mode 5300MHz |
|------------|-----------------------------------------------------------|

## Horizontal

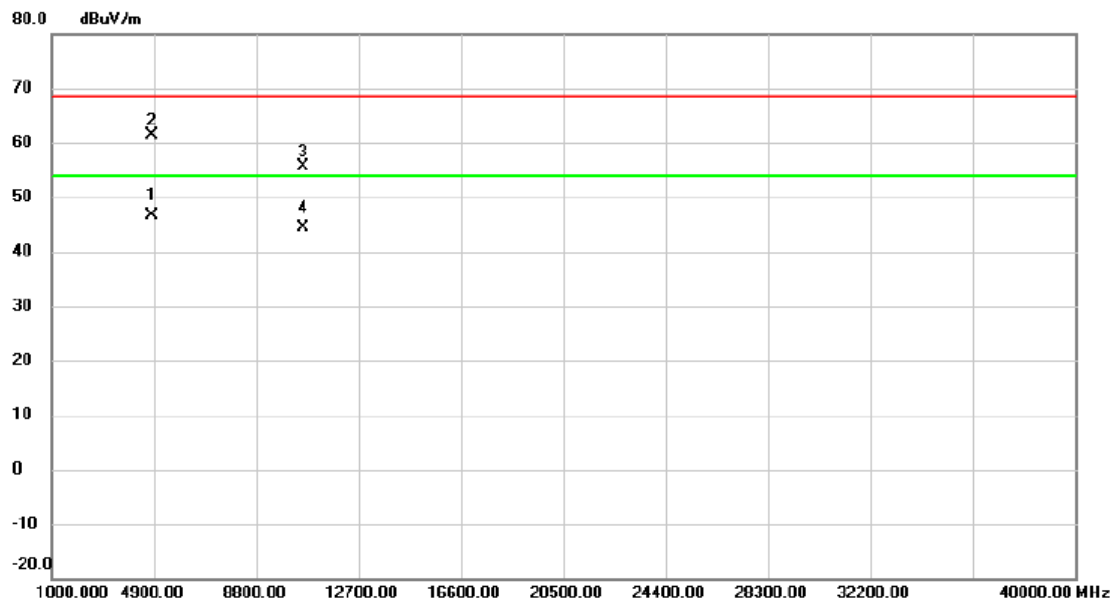

| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 4824.058  | 41.43         | 5.32           | 46.75       | 54.00  | -7.25  | AVG      |         |
| 2   | *   | 4825.625  | 56.05         | 5.33           | 61.38       | 68.30  | -6.92  | peak     |         |
| 3   |     | 10599.635 | 41.88         | 13.70          | 55.58       | 68.30  | -12.72 | peak     |         |
| 4   |     | 10600.085 | 30.63         | 13.70          | 44.33       | 54.00  | -9.67  | AVG      |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E - BANDWIDTH**

|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.45                 | 16.80                         |
| 40      | 5200            | 20.41                 | 16.80                         |
| 48      | 5240            | 20.30                 | 16.90                         |

CH36

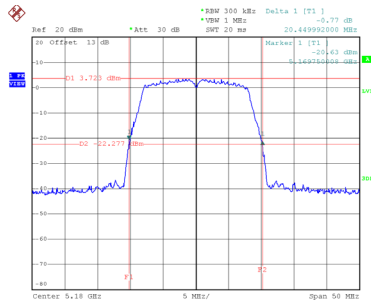


Date: 3.NOV.2020 13:37:21

CH40  
26 dB Bandwidth




Date: 3.NOV.2020 13:39:06

CH48

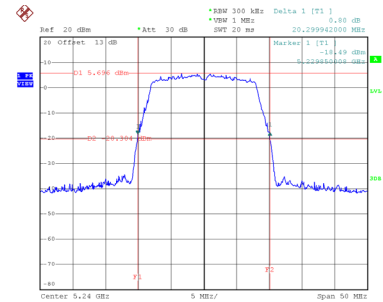


Date: 3.NOV.2020 13:40:36


99 % Emission Bandwidth

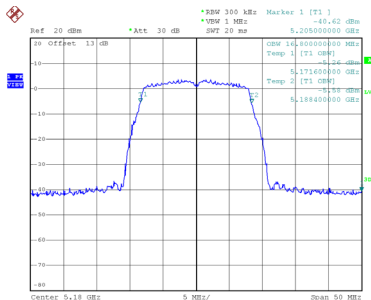

Date: 3.NOV.2020 13:36:35



Date: 3.NOV.2020 13:38:21

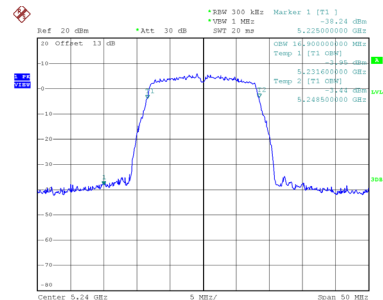


Date: 3.NOV.2020 13:39:52

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 20.49                 | 16.90                         |
| 60      | 5300            | 20.61                 | 16.90                         |
| 64      | 5320            | 20.45                 | 16.90                         |

CH52

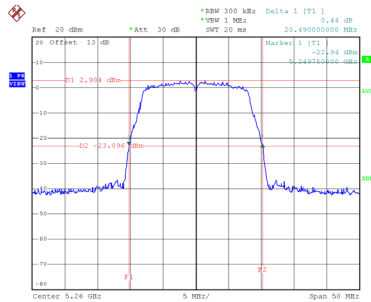


Date: 3.NOV.2020 13:42:10

CH60  
26 dB Bandwidth




Date: 3.NOV.2020 13:43:55

CH64

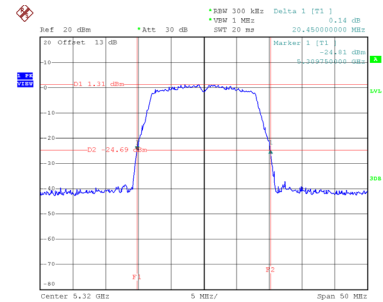


Date: 3.NOV.2020 13:45:25


99 % Emission Bandwidth

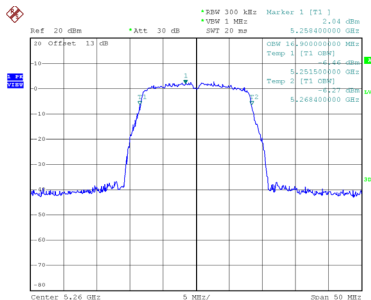

Date: 3.NOV.2020 13:41:26



Date: 3.NOV.2020 13:43:10

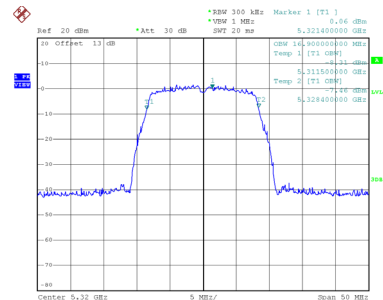


Date: 3.NOV.2020 13:44:41


|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 20.39                 | 16.90                         |
| 116     | 5580            | 20.40                 | 16.90                         |
| 140     | 5700            | 20.35                 | 17.00                         |


CH100

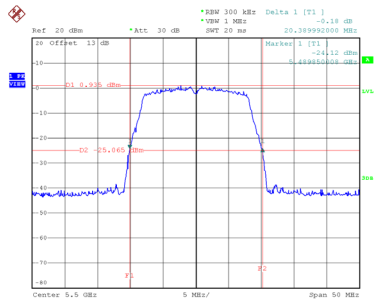




CH116  
26 dB Bandwidth

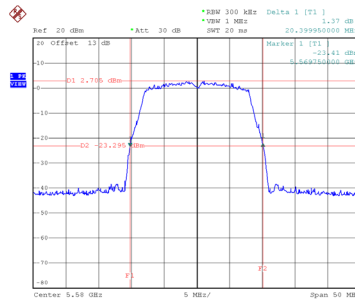

CH140

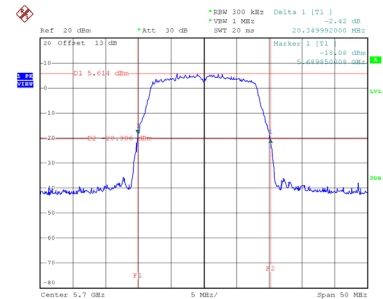


99 % Emission Bandwidth

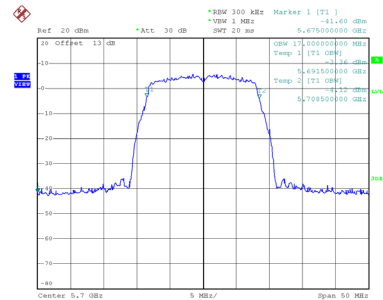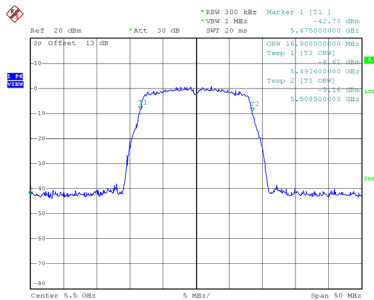

|           |                  |
|-----------|------------------|
| Test Mode | UNII-3_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (kHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 15.80                | 16.80                         | 500                             | Complies |
| 157     | 5785            | 15.89                | 16.90                         | 500                             | Complies |
| 165     | 5825            | 15.89                | 16.90                         | 500                             | Complies |

CH149

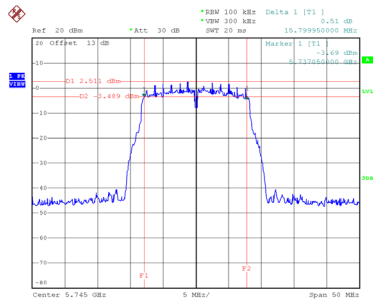


Date: 3.NOV.2020 13:56:35

CH157  
6 dB Bandwidth




Date: 3.NOV.2020 13:58:12

CH165

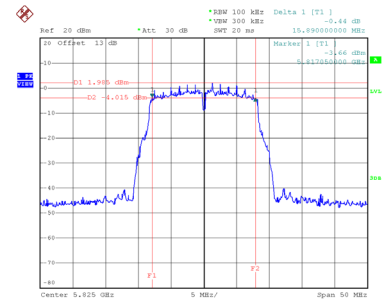


Date: 3.NOV.2020 13:59:46


99 % Emission Bandwidth

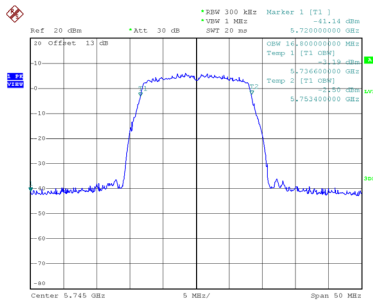

Date: 3.NOV.2020 13:55:44



Date: 3.NOV.2020 13:57:21

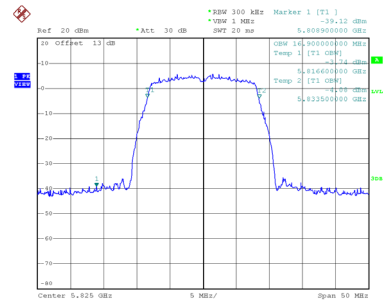


Date: 3.NOV.2020 13:58:55

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-1_TX AC (VHT20) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.75                 | 17.80                         |
| 40      | 5200            | 20.80                 | 17.80                         |
| 48      | 5240            | 20.60                 | 17.80                         |

CH36

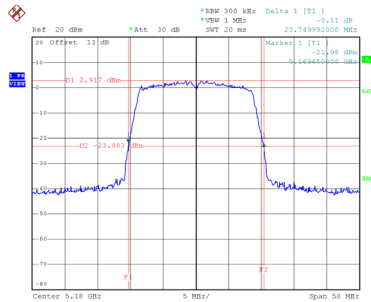


Date: 3.NOV.2020 14:02:50

CH40  
26 dB Bandwidth




Date: 3.NOV.2020 14:04:34

CH48

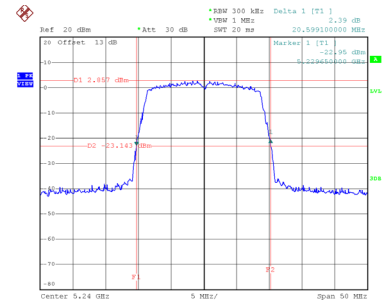


Date: 3.NOV.2020 14:06:01


99 % Emission Bandwidth

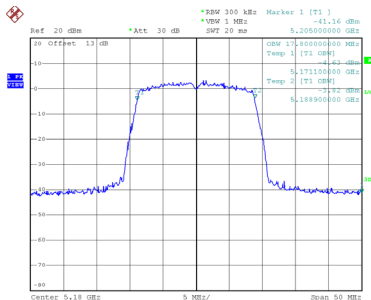

Date: 3.NOV.2020 14:02:05



Date: 3.NOV.2020 14:03:49

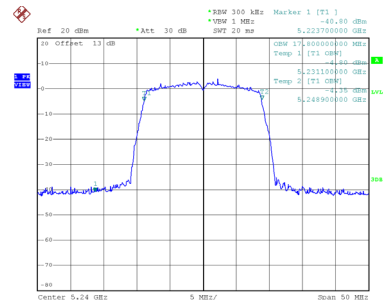

Date: 3.NOV.2020 14:05:17