



## 802.11be-EHT40 Power Spectral Density - Ant 4


## Channel 134 (5670 MHz)

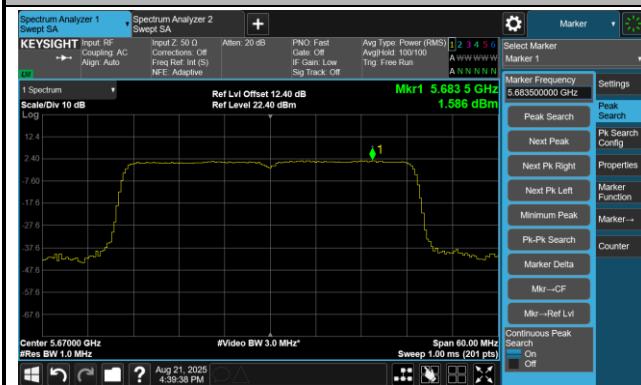


## Channel 142(5710 MHz)

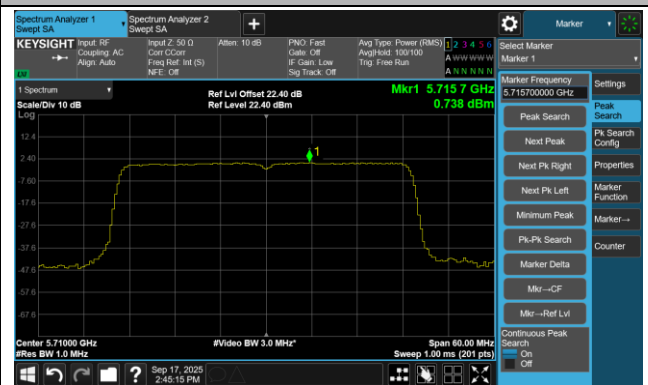

## Channel 151 (5755 MHz)

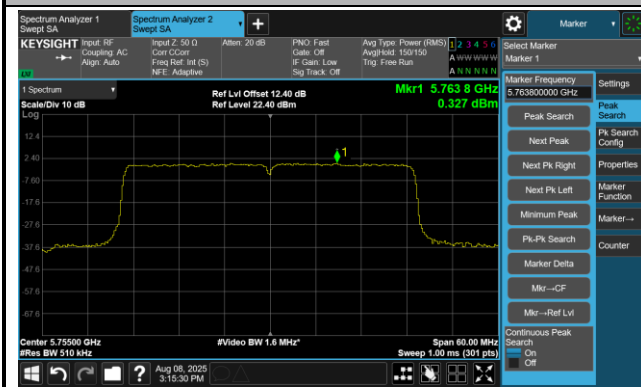


## Channel 159 (5795 MHz)

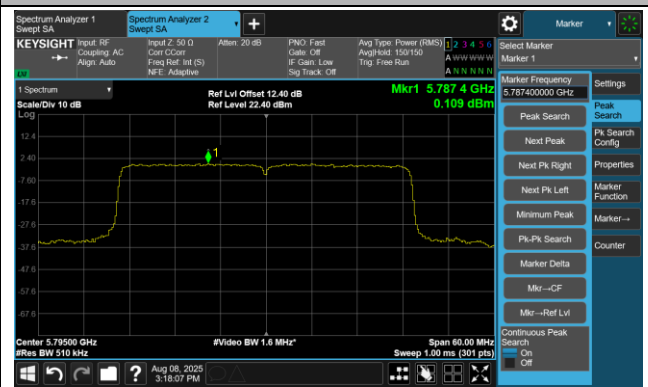


# 802.11be-EHT80 Power Spectral Density - Ant 4


Channel 42 (5210 MHz)

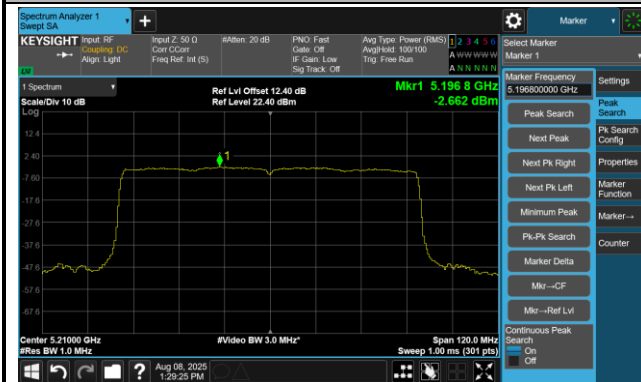


Channel 58 (5290 MHz)

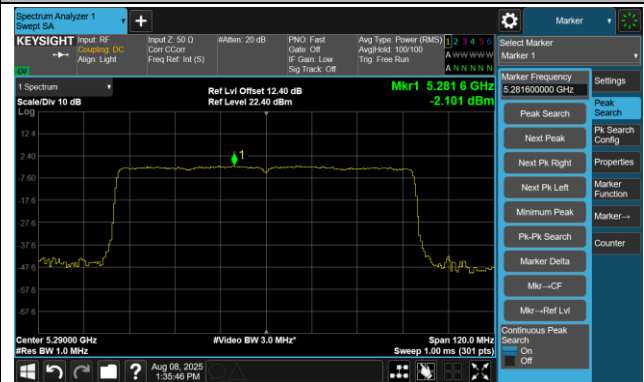


Channel 106 (5530 MHz)

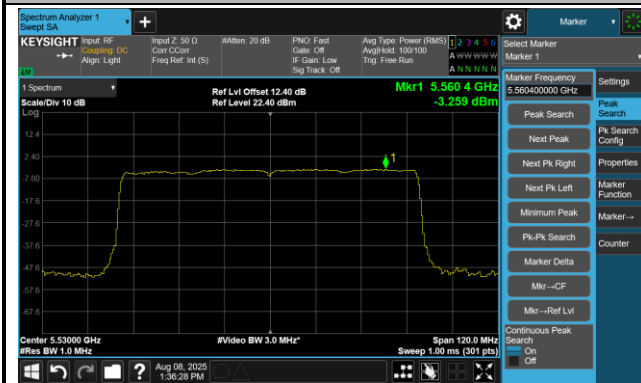


Channel 122 (5610 MHz)

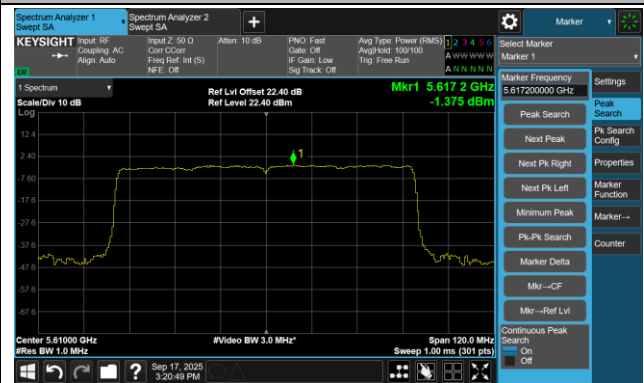

Channel 138 (5690 MHz)

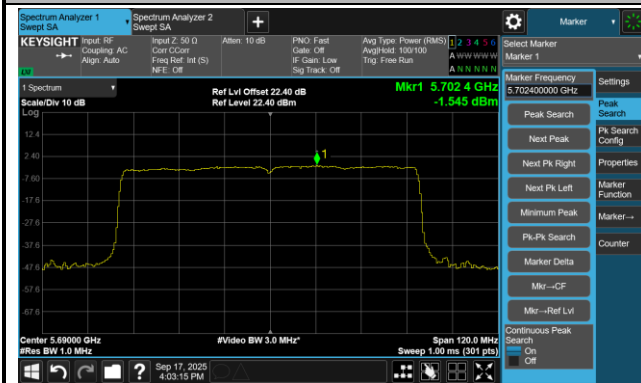

Channel 155 (5775 MHz)

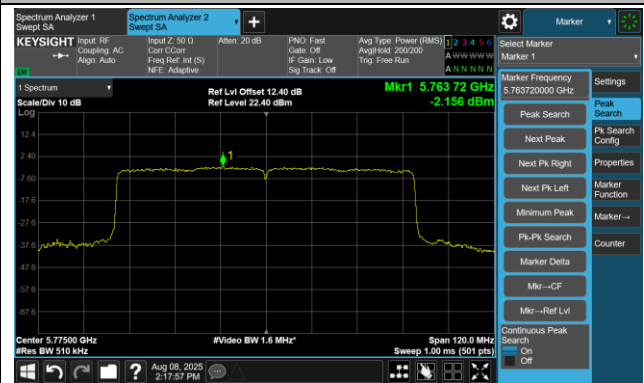

### A.6 Frequency Stability Test Result

|           |            |               |                            |
|-----------|------------|---------------|----------------------------|
| Test Site | WZ-TR3     | Test Engineer | Molly Wu                   |
| Test Date | 2025-08-13 | Test Mode     | 5180 MHz<br>(Carrier Mode) |

| Voltage (%) | Power (VAC) | Temp (°C) | Frequency Tolerance (ppm) |           |           |            |
|-------------|-------------|-----------|---------------------------|-----------|-----------|------------|
|             |             |           | 0 minutes                 | 2 minutes | 5 minutes | 10 minutes |
| 100%        | 120         | -30       | 16.76                     | 16.73     | 16.40     | 16.37      |
|             |             | -20       | 16.75                     | 16.77     | 16.78     | 16.80      |
|             |             | -10       | 14.03                     | 14.19     | 14.56     | 14.63      |
|             |             | 0         | 11.65                     | 11.73     | 11.76     | 11.87      |
|             |             | +10       | 5.77                      | 5.81      | 6.26      | 6.30       |
|             |             | +20       | 1.26                      | 1.33      | 1.36      | 1.84       |
|             |             | +30       | -4.31                     | -3.64     | -3.59     | -3.56      |
|             |             | +40       | -5.83                     | -5.59     | -5.44     | -5.50      |
|             |             | +50       | -6.89                     | -7.83     | -7.75     | -7.75      |
| 115%        | 138         | +20       | -1.18                     | -1.12     | -1.08     | -1.05      |
| 85%         | 102         | +20       | -0.27                     | -0.69     | -0.64     | -0.62      |

Note: Frequency Tolerance (ppm) =  $\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}] / \text{Declared Frequency (Hz)}\} \times 10^6$ .

### A.7 Radiated Spurious Emissions Test Result

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11733.80        | 31.90                | 16.09         | 47.99                  | 74.00          | -26.01      | Peak     | Horizontal   |
| *    | 14152.90        | 30.41                | 19.38         | 49.79                  | 68.20          | -18.41      | Peak     | Horizontal   |
| *    | 15138.90        | 32.12                | 18.04         | 50.16                  | 68.20          | -18.04      | Peak     | Horizontal   |
|      | 17867.40        | 15.14                | 28.26         | 43.40                  | 54.00          | -10.60      | Average  | Horizontal   |
|      | 17867.40        | 29.93                | 28.26         | 58.19                  | 74.00          | -15.81      | Peak     | Horizontal   |
|      | 11735.50        | 30.67                | 16.08         | 46.75                  | 74.00          | -27.25      | Peak     | Vertical     |
| *    | 14018.60        | 30.91                | 18.80         | 49.71                  | 68.20          | -18.49      | Peak     | Vertical     |
| *    | 15142.30        | 31.44                | 18.11         | 49.55                  | 68.20          | -18.65      | Peak     | Vertical     |
|      | 17974.50        | 15.24                | 28.08         | 43.32                  | 54.00          | -10.68      | Average  | Vertical     |
|      | 17974.50        | 31.36                | 28.08         | 59.44                  | 74.00          | -14.56      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11682.80        | 31.78                | 16.35         | 48.13                  | 74.00          | -25.87      | Peak     | Horizontal   |
| *    | 14124.00        | 30.16                | 19.02         | 49.18                  | 68.20          | -19.02      | Peak     | Horizontal   |
| *    | 15098.10        | 31.79                | 18.08         | 49.87                  | 68.20          | -18.33      | Peak     | Horizontal   |
|      | 17841.90        | 15.23                | 28.32         | 43.55                  | 54.00          | -10.45      | Average  | Horizontal   |
|      | 17841.90        | 30.50                | 28.32         | 58.82                  | 74.00          | -15.18      | Peak     | Horizontal   |
|      | 11902.10        | 31.57                | 16.04         | 47.61                  | 74.00          | -26.39      | Peak     | Vertical     |
| *    | 13748.30        | 30.29                | 18.27         | 48.56                  | 68.20          | -19.64      | Peak     | Vertical     |
| *    | 14756.40        | 30.15                | 18.89         | 49.04                  | 68.20          | -19.16      | Peak     | Vertical     |
|      | 17848.70        | 15.11                | 28.54         | 43.65                  | 54.00          | -10.35      | Average  | Vertical     |
|      | 17848.70        | 30.31                | 28.54         | 58.85                  | 74.00          | -15.15      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10950.10        | 31.57                | 15.85         | 47.42                  | 74.00          | -26.58      | Peak     | Horizontal   |
| *    | 13884.30        | 31.03                | 18.80         | 49.83                  | 68.20          | -18.37      | Peak     | Horizontal   |
| *    | 15147.40        | 32.39                | 18.17         | 50.56                  | 68.20          | -17.64      | Peak     | Horizontal   |
|      | 17957.50        | 15.33                | 28.48         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17957.50        | 30.54                | 28.48         | 59.02                  | 74.00          | -14.98      | Peak     | Horizontal   |
|      | 11414.20        | 30.11                | 16.42         | 46.53                  | 74.00          | -27.47      | Peak     | Vertical     |
| *    | 14173.30        | 30.58                | 19.26         | 49.84                  | 68.20          | -18.36      | Peak     | Vertical     |
| *    | 14972.30        | 30.66                | 18.37         | 49.03                  | 68.20          | -19.17      | Peak     | Vertical     |
|      | 17937.10        | 15.36                | 28.52         | 43.88                  | 54.00          | -10.12      | Average  | Vertical     |
|      | 17937.10        | 30.49                | 28.52         | 59.01                  | 74.00          | -14.99      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 52 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10962.00        | 32.64                | 15.67         | 48.31                  | 74.00          | -25.69      | Peak     | Horizontal   |
| *    | 13632.70        | 31.20                | 18.37         | 49.57                  | 68.20          | -18.63      | Peak     | Horizontal   |
| *    | 14929.80        | 30.17                | 18.47         | 48.64                  | 68.20          | -19.56      | Peak     | Horizontal   |
|      | 17954.10        | 15.14                | 28.54         | 43.68                  | 54.00          | -10.32      | Average  | Horizontal   |
|      | 17954.10        | 29.95                | 28.54         | 58.49                  | 74.00          | -15.51      | Peak     | Horizontal   |
|      | 11395.50        | 31.18                | 16.36         | 47.54                  | 74.00          | -26.46      | Peak     | Vertical     |
| *    | 13863.90        | 29.52                | 18.65         | 48.17                  | 68.20          | -20.03      | Peak     | Vertical     |
| *    | 14982.50        | 29.60                | 18.46         | 48.06                  | 68.20          | -20.14      | Peak     | Vertical     |
|      | 17848.70        | 15.30                | 28.54         | 43.84                  | 54.00          | -10.16      | Average  | Vertical     |
|      | 17848.70        | 28.91                | 28.54         | 57.45                  | 74.00          | -16.55      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 60 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 12048.30        | 31.42                | 16.00         | 47.42                  | 74.00          | -26.58      | Peak     | Horizontal   |
| *    | 13794.20        | 29.84                | 18.61         | 48.45                  | 68.20          | -19.75      | Peak     | Horizontal   |
| *    | 14815.90        | 30.07                | 19.12         | 49.19                  | 68.20          | -19.01      | Peak     | Horizontal   |
|      | 17865.70        | 15.30                | 28.35         | 43.65                  | 54.00          | -10.35      | Average  | Horizontal   |
|      | 17865.70        | 28.84                | 28.35         | 57.19                  | 74.00          | -16.81      | Peak     | Horizontal   |
|      | 11291.80        | 30.40                | 16.21         | 46.61                  | 74.00          | -27.39      | Peak     | Vertical     |
| *    | 13920.00        | 29.87                | 18.69         | 48.56                  | 68.20          | -19.64      | Peak     | Vertical     |
| *    | 14894.10        | 29.19                | 18.84         | 48.03                  | 68.20          | -20.17      | Peak     | Vertical     |
|      | 17974.50        | 15.70                | 28.08         | 43.78                  | 54.00          | -10.22      | Average  | Vertical     |
|      | 17974.50        | 28.54                | 28.08         | 56.62                  | 74.00          | -17.38      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen   |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 64 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11497.50        | 30.73                | 16.42         | 47.15                  | 74.00          | -26.85      | Peak     | Horizontal   |
| *    | 13631.00        | 29.78                | 18.37         | 48.15                  | 68.20          | -20.05      | Peak     | Horizontal   |
| *    | 14810.80        | 30.58                | 19.14         | 49.72                  | 68.20          | -18.48      | Peak     | Horizontal   |
|      | 17845.30        | 15.26                | 28.52         | 43.78                  | 54.00          | -10.22      | Average  | Horizontal   |
|      | 17845.30        | 28.60                | 28.52         | 57.12                  | 74.00          | -16.88      | Peak     | Horizontal   |
|      | 11312.20        | 31.20                | 16.33         | 47.53                  | 74.00          | -26.47      | Peak     | Vertical     |
| *    | 13639.50        | 30.75                | 18.30         | 49.05                  | 68.20          | -19.15      | Peak     | Vertical     |
| *    | 14780.20        | 28.76                | 19.05         | 47.81                  | 68.20          | -20.39      | Peak     | Vertical     |
|      | 17969.40        | 15.40                | 28.21         | 43.61                  | 54.00          | -10.39      | Average  | Vertical     |
|      | 17969.40        | 28.74                | 28.21         | 56.95                  | 74.00          | -17.05      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 100 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11009.60        | 31.24                | 15.79         | 47.03                  | 74.00          | -26.97      | Peak     | Horizontal   |
| *    | 14005.00        | 30.42                | 18.87         | 49.29                  | 68.20          | -18.91      | Peak     | Horizontal   |
| *    | 14921.30        | 30.14                | 18.61         | 48.75                  | 68.20          | -19.45      | Peak     | Horizontal   |
|      | 17838.50        | 15.46                | 28.11         | 43.57                  | 54.00          | -10.43      | Average  | Horizontal   |
|      | 17838.50        | 29.42                | 28.11         | 57.53                  | 74.00          | -16.47      | Peak     | Horizontal   |
|      | 10832.80        | 32.08                | 15.49         | 47.57                  | 74.00          | -26.43      | Peak     | Vertical     |
| *    | 13865.60        | 30.43                | 18.67         | 49.10                  | 68.20          | -19.10      | Peak     | Vertical     |
| *    | 14802.30        | 29.89                | 19.17         | 49.06                  | 68.20          | -19.14      | Peak     | Vertical     |
|      | 17836.80        | 15.36                | 28.00         | 43.36                  | 54.00          | -10.64      | Average  | Vertical     |
|      | 17836.80        | 29.54                | 28.00         | 57.54                  | 74.00          | -16.46      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 116 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11922.50        | 31.07                | 15.97         | 47.04                  | 74.00          | -26.96      | Peak     | Horizontal   |
| *    | 13806.10        | 28.95                | 18.76         | 47.71                  | 68.20          | -20.49      | Peak     | Horizontal   |
| *    | 14795.50        | 28.91                | 19.15         | 48.06                  | 68.20          | -20.14      | Peak     | Horizontal   |
|      | 17869.10        | 15.30                | 28.17         | 43.47                  | 54.00          | -10.53      | Average  | Horizontal   |
|      | 17869.10        | 28.59                | 28.17         | 56.76                  | 74.00          | -17.24      | Peak     | Horizontal   |
|      | 11502.60        | 31.23                | 16.41         | 47.64                  | 74.00          | -26.36      | Peak     | Vertical     |
| *    | 13702.40        | 29.46                | 18.43         | 47.89                  | 68.20          | -20.31      | Peak     | Vertical     |
| *    | 14897.50        | 30.13                | 18.85         | 48.98                  | 68.20          | -19.22      | Peak     | Vertical     |
|      | 17857.20        | 15.36                | 28.61         | 43.97                  | 54.00          | -10.03      | Average  | Vertical     |
|      | 17857.20        | 28.80                | 28.61         | 57.41                  | 74.00          | -16.59      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 140 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11574.00        | 30.99                | 16.35         | 47.34                  | 74.00          | -26.66      | Peak     | Horizontal   |
| *    | 13986.30        | 29.33                | 19.06         | 48.39                  | 68.20          | -19.81      | Peak     | Horizontal   |
| *    | 14698.60        | 30.23                | 19.28         | 49.51                  | 68.20          | -18.69      | Peak     | Horizontal   |
|      | 17962.60        | 15.70                | 28.38         | 44.08                  | 54.00          | -9.92       | Average  | Horizontal   |
|      | 17962.60        | 29.00                | 28.38         | 57.38                  | 74.00          | -16.62      | Peak     | Horizontal   |
|      | 11483.90        | 30.36                | 16.37         | 46.73                  | 74.00          | -27.27      | Peak     | Vertical     |
| *    | 13637.80        | 31.56                | 18.32         | 49.88                  | 68.20          | -18.32      | Peak     | Vertical     |
| *    | 14790.40        | 29.21                | 19.13         | 48.34                  | 68.20          | -19.86      | Peak     | Vertical     |
|      | 17855.50        | 15.40                | 28.62         | 44.02                  | 54.00          | -9.98       | Average  | Vertical     |
|      | 17855.50        | 28.35                | 28.62         | 56.97                  | 74.00          | -17.03      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 144 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11482.20        | 30.33                | 16.37         | 46.70                  | 74.00          | -27.30      | Peak     | Horizontal   |
| *    | 14158.00        | 30.03                | 19.38         | 49.41                  | 68.20          | -18.79      | Peak     | Horizontal   |
| *    | 14795.50        | 29.92                | 19.15         | 49.07                  | 68.20          | -19.13      | Peak     | Horizontal   |
|      | 17894.60        | 15.98                | 27.26         | 43.24                  | 54.00          | -10.76      | Average  | Horizontal   |
|      | 17894.60        | 30.41                | 27.26         | 57.67                  | 74.00          | -16.33      | Peak     | Horizontal   |
|      | 11485.60        | 31.37                | 16.38         | 47.75                  | 74.00          | -26.25      | Peak     | Vertical     |
| *    | 13807.80        | 29.74                | 18.76         | 48.50                  | 68.20          | -19.70      | Peak     | Vertical     |
| *    | 14719.00        | 30.69                | 19.25         | 49.94                  | 68.20          | -18.26      | Peak     | Vertical     |
|      | 17950.70        | 15.40                | 28.61         | 44.01                  | 54.00          | -9.99       | Average  | Vertical     |
|      | 17950.70        | 29.54                | 28.61         | 58.15                  | 74.00          | -15.85      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11332.60        | 30.98                | 16.22         | 47.20                  | 74.00          | -26.80      | Peak     | Horizontal   |
| *    | 13988.00        | 29.82                | 19.06         | 48.88                  | 68.20          | -19.32      | Peak     | Horizontal   |
| *    | 14982.50        | 30.82                | 18.46         | 49.28                  | 68.20          | -18.92      | Peak     | Horizontal   |
|      | 17942.20        | 15.45                | 28.57         | 44.02                  | 54.00          | -9.98       | Average  | Horizontal   |
|      | 17942.20        | 30.35                | 28.57         | 58.92                  | 74.00          | -15.08      | Peak     | Horizontal   |
|      | 11419.30        | 30.50                | 16.40         | 46.90                  | 74.00          | -27.10      | Peak     | Vertical     |
| *    | 13886.00        | 29.60                | 18.81         | 48.41                  | 68.20          | -19.79      | Peak     | Vertical     |
| *    | 14872.00        | 30.51                | 18.66         | 49.17                  | 68.20          | -19.03      | Peak     | Vertical     |
|      | 17938.80        | 15.00                | 28.53         | 43.53                  | 54.00          | -10.47      | Average  | Vertical     |
|      | 17938.80        | 31.23                | 28.53         | 59.76                  | 74.00          | -14.24      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11594.40        | 30.34                | 16.39         | 46.73                  | 74.00          | -27.27      | Peak     | Horizontal   |
| *    | 13736.40        | 30.50                | 18.37         | 48.87                  | 68.20          | -19.33      | Peak     | Horizontal   |
| *    | 14812.50        | 30.20                | 19.13         | 49.33                  | 68.20          | -18.87      | Peak     | Horizontal   |
|      | 17942.20        | 15.36                | 28.57         | 43.93                  | 54.00          | -10.07      | Average  | Horizontal   |
|      | 17942.20        | 30.50                | 28.57         | 59.07                  | 74.00          | -14.93      | Peak     | Horizontal   |
|      | 11618.20        | 31.72                | 16.30         | 48.02                  | 74.00          | -25.98      | Peak     | Vertical     |
| *    | 13736.40        | 30.44                | 18.37         | 48.81                  | 68.20          | -19.39      | Peak     | Vertical     |
| *    | 14904.30        | 30.24                | 18.86         | 49.10                  | 68.20          | -19.10      | Peak     | Vertical     |
|      | 17991.50        | 15.36                | 27.89         | 43.25                  | 54.00          | -10.75      | Average  | Vertical     |
|      | 17991.50        | 31.20                | 27.89         | 59.09                  | 74.00          | -14.91      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen    |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11a - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11558.70        | 30.10                | 16.31         | 46.41                  | 74.00          | -27.59      | Peak     | Horizontal   |
| *    | 13724.50        | 30.93                | 18.41         | 49.34                  | 68.20          | -18.86      | Peak     | Horizontal   |
| *    | 15130.40        | 31.26                | 17.87         | 49.13                  | 68.20          | -19.07      | Peak     | Horizontal   |
|      | 17981.30        | 15.36                | 27.91         | 43.27                  | 54.00          | -10.73      | Average  | Horizontal   |
|      | 17981.30        | 30.71                | 27.90         | 58.61                  | 74.00          | -15.39      | Peak     | Horizontal   |
|      | 11337.70        | 30.76                | 16.16         | 46.92                  | 74.00          | -27.08      | Peak     | Vertical     |
| *    | 13911.50        | 28.98                | 18.76         | 47.74                  | 68.20          | -20.46      | Peak     | Vertical     |
| *    | 15004.60        | 29.34                | 18.34         | 47.68                  | 68.20          | -20.52      | Peak     | Vertical     |
|      | 17858.90        | 15.14                | 28.58         | 43.72                  | 54.00          | -10.28      | Average  | Vertical     |
|      | 17858.90        | 29.82                | 28.58         | 58.40                  | 74.00          | -15.60      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11599.50        | 31.16                | 16.39         | 47.55                  | 74.00          | -26.45      | Peak     | Horizontal   |
| *    | 13797.60        | 30.49                | 18.67         | 49.16                  | 68.20          | -19.04      | Peak     | Horizontal   |
| *    | 15150.80        | 31.62                | 18.21         | 49.83                  | 68.20          | -18.37      | Peak     | Horizontal   |
|      | 17945.60        | 15.63                | 28.60         | 44.23                  | 54.00          | -9.77       | Average  | Horizontal   |
|      | 17945.60        | 30.21                | 28.60         | 58.81                  | 74.00          | -15.19      | Peak     | Horizontal   |
|      | 11295.20        | 30.84                | 16.23         | 47.07                  | 74.00          | -26.93      | Peak     | Vertical     |
| *    | 13787.40        | 29.69                | 18.52         | 48.21                  | 68.20          | -19.99      | Peak     | Vertical     |
| *    | 14804.00        | 30.62                | 19.17         | 49.79                  | 68.20          | -18.41      | Peak     | Vertical     |
|      | 17872.50        | 15.45                | 27.99         | 43.44                  | 54.00          | -10.56      | Average  | Vertical     |
|      | 17872.50        | 31.18                | 27.99         | 59.17                  | 74.00          | -14.83      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11512.80        | 30.82                | 16.38         | 47.20                  | 74.00          | -26.80      | Peak     | Horizontal   |
| *    | 14139.30        | 29.93                | 19.30         | 49.23                  | 68.20          | -18.97      | Peak     | Horizontal   |
| *    | 15200.10        | 31.65                | 17.99         | 49.64                  | 68.20          | -18.56      | Peak     | Horizontal   |
|      | 17947.30        | 15.85                | 28.63         | 44.48                  | 54.00          | -9.52       | Average  | Horizontal   |
|      | 17947.30        | 30.76                | 28.63         | 59.39                  | 74.00          | -14.61      | Peak     | Horizontal   |
|      | 11222.10        | 30.83                | 16.21         | 47.04                  | 74.00          | -26.96      | Peak     | Vertical     |
| *    | 13852.00        | 30.72                | 18.53         | 49.25                  | 68.20          | -18.95      | Peak     | Vertical     |
| *    | 14985.90        | 31.01                | 18.47         | 49.48                  | 68.20          | -18.72      | Peak     | Vertical     |
|      | 17847.00        | 15.25                | 28.53         | 43.78                  | 54.00          | -10.22      | Average  | Vertical     |
|      | 17847.00        | 29.99                | 28.53         | 58.52                  | 74.00          | -15.48      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11346.20        | 31.36                | 16.10         | 47.46                  | 74.00          | -26.54      | Peak     | Horizontal   |
| *    | 13869.00        | 29.94                | 18.70         | 48.64                  | 68.20          | -19.56      | Peak     | Horizontal   |
| *    | 15016.50        | 30.95                | 18.16         | 49.11                  | 68.20          | -19.09      | Peak     | Horizontal   |
|      | 17962.60        | 15.39                | 28.38         | 43.77                  | 54.00          | -10.23      | Average  | Horizontal   |
|      | 17962.60        | 30.38                | 28.38         | 58.76                  | 74.00          | -15.24      | Peak     | Horizontal   |
|      | 11740.60        | 31.24                | 16.07         | 47.31                  | 74.00          | -26.69      | Peak     | Vertical     |
| *    | 13906.40        | 30.21                | 18.81         | 49.02                  | 68.20          | -19.18      | Peak     | Vertical     |
| *    | 15145.70        | 31.18                | 18.14         | 49.32                  | 68.20          | -18.88      | Peak     | Vertical     |
|      | 17937.10        | 15.36                | 28.52         | 43.88                  | 54.00          | -10.12      | Average  | Vertical     |
|      | 17937.10        | 29.72                | 28.52         | 58.24                  | 74.00          | -15.76      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 52 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11475.40        | 31.01                | 16.33         | 47.34                  | 74.00          | -26.66      | Peak     | Horizontal   |
| *    | 13889.40        | 28.89                | 18.84         | 47.73                  | 68.20          | -20.47      | Peak     | Horizontal   |
| *    | 14848.20        | 29.96                | 18.62         | 48.58                  | 68.20          | -19.62      | Peak     | Horizontal   |
|      | 17860.60        | 15.47                | 28.55         | 44.02                  | 54.00          | -9.98       | Average  | Horizontal   |
|      | 17860.60        | 28.94                | 28.55         | 57.49                  | 74.00          | -16.51      | Peak     | Horizontal   |
|      | 11111.60        | 31.97                | 16.05         | 48.02                  | 74.00          | -25.98      | Peak     | Vertical     |
| *    | 14015.20        | 30.27                | 18.80         | 49.07                  | 68.20          | -19.13      | Peak     | Vertical     |
| *    | 14883.90        | 29.37                | 18.80         | 48.17                  | 68.20          | -20.03      | Peak     | Vertical     |
|      | 17843.60        | 15.33                | 28.42         | 43.75                  | 54.00          | -10.25      | Average  | Vertical     |
|      | 17843.60        | 29.42                | 28.42         | 57.84                  | 74.00          | -16.16      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 60 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11625.00        | 30.76                | 16.28         | 47.04                  | 74.00          | -26.96      | Peak     | Horizontal   |
| *    | 13882.60        | 29.87                | 18.79         | 48.66                  | 68.20          | -19.54      | Peak     | Horizontal   |
| *    | 15101.50        | 30.54                | 18.03         | 48.57                  | 68.20          | -19.63      | Peak     | Horizontal   |
|      | 17869.10        | 15.70                | 28.17         | 43.87                  | 54.00          | -10.13      | Average  | Horizontal   |
|      | 17869.10        | 29.79                | 28.17         | 57.96                  | 74.00          | -16.04      | Peak     | Horizontal   |
|      | 11121.80        | 30.99                | 16.16         | 47.15                  | 74.00          | -26.85      | Peak     | Vertical     |
| *    | 13908.10        | 28.00                | 18.79         | 46.79                  | 68.20          | -21.41      | Peak     | Vertical     |
| *    | 14985.90        | 27.44                | 18.47         | 45.91                  | 68.20          | -22.29      | Peak     | Vertical     |
|      | 17833.40        | 15.11                | 27.78         | 42.89                  | 54.00          | -11.11      | Average  | Vertical     |
|      | 17833.40        | 29.34                | 27.78         | 57.12                  | 74.00          | -16.88      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 64 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11121.80        | 31.27                | 16.16         | 47.43                  | 74.00          | -26.57      | Peak     | Horizontal   |
| *    | 13794.20        | 30.96                | 18.61         | 49.57                  | 68.20          | -18.63      | Peak     | Horizontal   |
| *    | 14906.00        | 30.05                | 18.84         | 48.89                  | 68.20          | -19.31      | Peak     | Horizontal   |
|      | 17954.10        | 15.47                | 28.54         | 44.01                  | 54.00          | -9.99       | Average  | Horizontal   |
|      | 17954.10        | 29.53                | 28.54         | 58.07                  | 74.00          | -15.93      | Peak     | Horizontal   |
|      | 11101.40        | 30.84                | 15.90         | 46.74                  | 74.00          | -27.26      | Peak     | Vertical     |
| *    | 13811.20        | 30.02                | 18.76         | 48.78                  | 68.20          | -19.42      | Peak     | Vertical     |
| *    | 14902.60        | 29.78                | 18.86         | 48.64                  | 68.20          | -19.56      | Peak     | Vertical     |
|      | 17947.30        | 15.45                | 28.63         | 44.08                  | 54.00          | -9.92       | Average  | Vertical     |
|      | 17947.30        | 28.24                | 28.63         | 56.87                  | 74.00          | -17.13      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 100 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11934.40        | 31.59                | 15.94         | 47.53                  | 74.00          | -26.47      | Peak     | Horizontal   |
| *    | 13882.60        | 29.44                | 18.79         | 48.23                  | 68.20          | -19.97      | Peak     | Horizontal   |
| *    | 14960.40        | 29.49                | 18.23         | 47.72                  | 68.20          | -20.48      | Peak     | Horizontal   |
|      | 17957.50        | 15.36                | 28.48         | 43.84                  | 54.00          | -10.16      | Average  | Horizontal   |
|      | 17957.50        | 29.52                | 28.48         | 58.00                  | 74.00          | -16.00      | Peak     | Horizontal   |
|      | 11582.50        | 30.94                | 16.39         | 47.33                  | 74.00          | -26.67      | Peak     | Vertical     |
| *    | 13988.00        | 29.05                | 19.06         | 48.11                  | 68.20          | -20.09      | Peak     | Vertical     |
| *    | 15087.90        | 30.07                | 18.19         | 48.26                  | 68.20          | -19.94      | Peak     | Vertical     |
|      | 17964.30        | 14.59                | 28.35         | 42.94                  | 54.00          | -11.06      | Average  | Vertical     |
|      | 17964.30        | 28.84                | 28.35         | 57.19                  | 74.00          | -16.81      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 116 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11572.30        | 30.59                | 16.34         | 46.93                  | 74.00          | -27.07      | Peak     | Horizontal   |
| *    | 13870.70        | 30.62                | 18.70         | 49.32                  | 68.20          | -18.88      | Peak     | Horizontal   |
| *    | 14899.20        | 29.49                | 18.85         | 48.34                  | 68.20          | -19.86      | Peak     | Horizontal   |
|      | 17949.00        | 15.45                | 28.64         | 44.09                  | 54.00          | -9.91       | Average  | Horizontal   |
|      | 17949.00        | 30.96                | 28.64         | 59.60                  | 74.00          | -14.40      | Peak     | Horizontal   |
|      | 11706.60        | 30.89                | 16.21         | 47.10                  | 74.00          | -26.90      | Peak     | Vertical     |
| *    | 13782.30        | 30.59                | 18.43         | 49.02                  | 68.20          | -19.18      | Peak     | Vertical     |
| *    | 14730.90        | 30.38                | 19.09         | 49.47                  | 68.20          | -18.73      | Peak     | Vertical     |
|      | 17928.60        | 15.36                | 28.34         | 43.70                  | 54.00          | -10.30      | Average  | Vertical     |
|      | 17928.60        | 29.48                | 28.34         | 57.82                  | 74.00          | -16.18      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 140 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11572.30        | 31.74                | 16.34         | 48.08                  | 74.00          | -25.92      | Peak     | Horizontal   |
| *    | 13731.30        | 30.09                | 18.39         | 48.48                  | 68.20          | -19.72      | Peak     | Horizontal   |
| *    | 14654.40        | 29.87                | 18.92         | 48.79                  | 68.20          | -19.41      | Peak     | Horizontal   |
|      | 17838.50        | 15.78                | 28.11         | 43.89                  | 54.00          | -10.11      | Average  | Horizontal   |
|      | 17838.50        | 30.20                | 28.11         | 58.31                  | 74.00          | -15.69      | Peak     | Horizontal   |
|      | 11606.30        | 30.91                | 16.36         | 47.27                  | 74.00          | -26.73      | Peak     | Vertical     |
| *    | 13778.90        | 30.02                | 18.38         | 48.40                  | 68.20          | -19.80      | Peak     | Vertical     |
| *    | 14785.30        | 29.66                | 19.10         | 48.76                  | 68.20          | -19.44      | Peak     | Vertical     |
|      | 17755.20        | 15.96                | 27.62         | 43.58                  | 54.00          | -10.42      | Average  | Vertical     |
|      | 17755.20        | 29.46                | 27.62         | 57.08                  | 74.00          | -16.92      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 144 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11990.50        | 31.65                | 16.01         | 47.66                  | 74.00          | -26.34      | Peak     | Horizontal   |
| *    | 13979.50        | 29.59                | 19.08         | 48.67                  | 68.20          | -19.53      | Peak     | Horizontal   |
| *    | 14928.10        | 29.60                | 18.50         | 48.10                  | 68.20          | -20.10      | Peak     | Horizontal   |
|      | 17964.30        | 15.36                | 28.35         | 43.71                  | 54.00          | -10.29      | Average  | Horizontal   |
|      | 17964.30        | 30.64                | 28.35         | 58.99                  | 74.00          | -15.01      | Peak     | Horizontal   |
|      | 11529.80        | 31.23                | 16.33         | 47.56                  | 74.00          | -26.44      | Peak     | Vertical     |
| *    | 13729.60        | 29.86                | 18.40         | 48.26                  | 68.20          | -19.94      | Peak     | Vertical     |
| *    | 14883.90        | 29.16                | 18.80         | 47.96                  | 68.20          | -20.24      | Peak     | Vertical     |
|      | 17928.60        | 15.78                | 28.34         | 44.12                  | 54.00          | -9.88       | Average  | Vertical     |
|      | 17928.60        | 28.84                | 28.34         | 57.18                  | 74.00          | -16.82      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11424.40        | 30.43                | 16.38         | 46.81                  | 74.00          | -27.19      | Peak     | Horizontal   |
| *    | 13744.90        | 30.55                | 18.31         | 48.86                  | 68.20          | -19.34      | Peak     | Horizontal   |
| *    | 15086.20        | 31.06                | 18.20         | 49.26                  | 68.20          | -18.94      | Peak     | Horizontal   |
|      | 17938.80        | 15.22                | 28.53         | 43.75                  | 54.00          | -10.25      | Average  | Horizontal   |
|      | 17938.80        | 30.71                | 28.53         | 59.24                  | 74.00          | -14.76      | Peak     | Horizontal   |
|      | 11599.50        | 31.47                | 16.39         | 47.86                  | 74.00          | -26.14      | Peak     | Vertical     |
| *    | 13964.20        | 29.81                | 18.95         | 48.76                  | 68.20          | -19.44      | Peak     | Vertical     |
| *    | 14734.30        | 30.43                | 19.05         | 49.48                  | 68.20          | -18.72      | Peak     | Vertical     |
|      | 17950.70        | 15.23                | 28.61         | 43.84                  | 54.00          | -10.16      | Average  | Vertical     |
|      | 17950.70        | 29.94                | 28.61         | 58.55                  | 74.00          | -15.45      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11693.00        | 30.95                | 16.28         | 47.23                  | 74.00          | -26.77      | Peak     | Horizontal   |
| *    | 13721.10        | 29.64                | 18.43         | 48.07                  | 68.20          | -20.13      | Peak     | Horizontal   |
| *    | 14985.90        | 31.33                | 18.47         | 49.80                  | 68.20          | -18.40      | Peak     | Horizontal   |
|      | 17933.70        | 15.32                | 28.49         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17933.70        | 29.83                | 28.49         | 58.32                  | 74.00          | -15.68      | Peak     | Horizontal   |
|      | 10951.80        | 31.55                | 15.82         | 47.37                  | 74.00          | -26.63      | Peak     | Vertical     |
| *    | 13758.50        | 31.68                | 18.27         | 49.95                  | 68.20          | -18.25      | Peak     | Vertical     |
| *    | 14880.50        | 30.56                | 18.76         | 49.32                  | 68.20          | -18.88      | Peak     | Vertical     |
|      | 17974.50        | 15.33                | 28.08         | 43.41                  | 54.00          | -10.59      | Average  | Vertical     |
|      | 17974.50        | 30.71                | 28.08         | 58.79                  | 74.00          | -15.21      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT20 - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11353.00        | 31.14                | 16.09         | 47.23                  | 74.00          | -26.77      | Peak     | Horizontal   |
| *    | 13794.20        | 30.69                | 18.61         | 49.30                  | 68.20          | -18.90      | Peak     | Horizontal   |
| *    | 14780.20        | 29.78                | 19.05         | 48.83                  | 68.20          | -19.37      | Peak     | Horizontal   |
|      | 17962.60        | 15.22                | 28.38         | 43.60                  | 54.00          | -10.40      | Average  | Horizontal   |
|      | 17962.60        | 30.17                | 28.38         | 58.55                  | 74.00          | -15.45      | Peak     | Horizontal   |
|      | 10938.20        | 31.34                | 15.91         | 47.25                  | 74.00          | -26.75      | Peak     | Vertical     |
| *    | 13702.40        | 29.66                | 18.43         | 48.09                  | 68.20          | -20.11      | Peak     | Vertical     |
| *    | 14997.80        | 30.85                | 18.40         | 49.25                  | 68.20          | -18.95      | Peak     | Vertical     |
|      | 17926.90        | 15.33                | 28.28         | 43.61                  | 54.00          | -10.39      | Average  | Vertical     |
|      | 17926.90        | 30.33                | 28.28         | 58.61                  | 74.00          | -15.39      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 38 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11784.80        | 31.05                | 16.13         | 47.18                  | 74.00          | -26.82      | Peak     | Horizontal   |
| *    | 13716.00        | 30.50                | 18.46         | 48.96                  | 68.20          | -19.24      | Peak     | Horizontal   |
| *    | 14878.80        | 30.81                | 18.74         | 49.55                  | 68.20          | -18.65      | Peak     | Horizontal   |
|      | 17862.30        | 15.44                | 28.52         | 43.96                  | 54.00          | -10.04      | Average  | Horizontal   |
|      | 17862.30        | 29.62                | 28.52         | 58.14                  | 74.00          | -15.86      | Peak     | Horizontal   |
|      | 11332.60        | 31.30                | 16.22         | 47.52                  | 74.00          | -26.48      | Peak     | Vertical     |
| *    | 13790.80        | 28.43                | 18.57         | 47.00                  | 68.20          | -21.20      | Peak     | Vertical     |
| *    | 15069.20        | 29.16                | 18.23         | 47.39                  | 68.20          | -20.81      | Peak     | Vertical     |
|      | 17943.90        | 15.99                | 28.58         | 44.57                  | 54.00          | -9.43       | Average  | Vertical     |
|      | 17943.90        | 30.28                | 28.58         | 58.86                  | 74.00          | -15.14      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 46 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11371.70        | 30.93                | 16.17         | 47.10                  | 74.00          | -26.90      | Peak     | Horizontal   |
| *    | 13746.60        | 29.99                | 18.29         | 48.28                  | 68.20          | -19.92      | Peak     | Horizontal   |
| *    | 14815.90        | 29.56                | 19.12         | 48.68                  | 68.20          | -19.52      | Peak     | Horizontal   |
|      | 17977.90        | 14.69                | 27.99         | 42.68                  | 54.00          | -11.32      | Average  | Horizontal   |
|      | 17977.90        | 30.42                | 27.99         | 58.41                  | 74.00          | -15.59      | Peak     | Horizontal   |
|      | 11458.40        | 31.16                | 16.25         | 47.41                  | 74.00          | -26.59      | Peak     | Vertical     |
| *    | 13850.30        | 27.07                | 18.53         | 45.60                  | 68.20          | -22.60      | Peak     | Vertical     |
| *    | 15166.10        | 29.42                | 18.34         | 47.76                  | 68.20          | -20.44      | Peak     | Vertical     |
|      | 17942.20        | 16.89                | 28.57         | 45.46                  | 54.00          | -8.54       | Average  | Vertical     |
|      | 17942.20        | 30.24                | 28.57         | 58.81                  | 74.00          | -15.19      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 54 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11618.20        | 31.54                | 16.30         | 47.84                  | 74.00          | -26.16      | Peak     | Horizontal   |
| *    | 13729.60        | 29.94                | 18.40         | 48.34                  | 68.20          | -19.86      | Peak     | Horizontal   |
| *    | 14909.40        | 28.81                | 18.78         | 47.59                  | 68.20          | -20.61      | Peak     | Horizontal   |
|      | 17949.00        | 15.32                | 28.64         | 43.96                  | 54.00          | -10.04      | Average  | Horizontal   |
|      | 17949.00        | 29.78                | 28.64         | 58.42                  | 74.00          | -15.58      | Peak     | Horizontal   |
|      | 11752.50        | 32.18                | 16.06         | 48.24                  | 74.00          | -25.76      | Peak     | Vertical     |
| *    | 13996.50        | 27.42                | 18.99         | 46.41                  | 68.20          | -21.79      | Peak     | Vertical     |
| *    | 14858.40        | 29.12                | 18.59         | 47.71                  | 68.20          | -20.49      | Peak     | Vertical     |
|      | 17972.80        | 15.78                | 28.12         | 43.90                  | 54.00          | -10.10      | Average  | Vertical     |
|      | 17972.80        | 29.63                | 28.12         | 57.75                  | 74.00          | -16.25      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 62 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11225.50        | 31.68                | 16.18         | 47.86                  | 74.00          | -26.14      | Peak     | Horizontal   |
| *    | 13758.50        | 29.96                | 18.27         | 48.23                  | 68.20          | -19.97      | Peak     | Horizontal   |
| *    | 14793.80        | 30.28                | 19.14         | 49.42                  | 68.20          | -18.78      | Peak     | Horizontal   |
|      | 17841.90        | 15.89                | 28.32         | 44.21                  | 54.00          | -9.79       | Average  | Horizontal   |
|      | 17841.90        | 29.19                | 28.32         | 57.51                  | 74.00          | -16.49      | Peak     | Horizontal   |
|      | 11206.80        | 30.40                | 16.24         | 46.64                  | 74.00          | -27.36      | Peak     | Vertical     |
| *    | 13880.90        | 29.63                | 18.77         | 48.40                  | 68.20          | -19.80      | Peak     | Vertical     |
| *    | 14866.90        | 29.96                | 18.62         | 48.58                  | 68.20          | -19.62      | Peak     | Vertical     |
|      | 17845.30        | 15.79                | 28.52         | 44.31                  | 54.00          | -9.69       | Average  | Vertical     |
|      | 17845.30        | 29.74                | 28.52         | 58.26                  | 74.00          | -15.74      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 102 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11742.30        | 30.63                | 16.07         | 46.70                  | 74.00          | -27.30      | Peak     | Horizontal   |
| *    | 13848.60        | 27.64                | 18.53         | 46.17                  | 68.20          | -22.03      | Peak     | Horizontal   |
| *    | 14826.10        | 28.17                | 18.96         | 47.13                  | 68.20          | -21.07      | Peak     | Horizontal   |
|      | 17853.80        | 15.14                | 28.60         | 43.74                  | 54.00          | -10.26      | Average  | Horizontal   |
|      | 17853.80        | 29.68                | 28.60         | 58.28                  | 74.00          | -15.72      | Peak     | Horizontal   |
|      | 11429.50        | 31.90                | 16.36         | 48.26                  | 74.00          | -25.74      | Peak     | Vertical     |
| *    | 13729.60        | 29.96                | 18.40         | 48.36                  | 68.20          | -19.84      | Peak     | Vertical     |
| *    | 14968.90        | 30.78                | 18.32         | 49.10                  | 68.20          | -19.10      | Peak     | Vertical     |
|      | 17942.20        | 15.79                | 28.57         | 44.36                  | 54.00          | -9.64       | Average  | Vertical     |
|      | 17942.20        | 28.91                | 28.57         | 57.48                  | 74.00          | -16.52      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 110 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11742.30        | 30.98                | 16.07         | 47.05                  | 74.00          | -26.95      | Peak     | Horizontal   |
| *    | 13789.10        | 27.69                | 18.54         | 46.23                  | 68.20          | -21.97      | Peak     | Horizontal   |
| *    | 14921.30        | 27.56                | 18.61         | 46.17                  | 68.20          | -22.03      | Peak     | Horizontal   |
|      | 17960.90        | 15.47                | 28.42         | 43.89                  | 54.00          | -10.11      | Average  | Horizontal   |
|      | 17960.90        | 29.81                | 28.42         | 58.23                  | 74.00          | -15.77      | Peak     | Horizontal   |
|      | 11393.80        | 30.75                | 16.34         | 47.09                  | 74.00          | -26.91      | Peak     | Vertical     |
| *    | 13789.10        | 27.31                | 18.54         | 45.85                  | 68.20          | -22.35      | Peak     | Vertical     |
| *    | 14985.90        | 27.22                | 18.47         | 45.69                  | 68.20          | -22.51      | Peak     | Vertical     |
|      | 17940.50        | 15.47                | 28.55         | 44.02                  | 54.00          | -9.98       | Average  | Vertical     |
|      | 17940.50        | 28.38                | 28.55         | 56.93                  | 74.00          | -17.07      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 134 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11866.40        | 31.93                | 16.07         | 48.00                  | 74.00          | -26.00      | Peak     | Horizontal   |
| *    | 13967.60        | 28.87                | 18.99         | 47.86                  | 68.20          | -20.34      | Peak     | Horizontal   |
| *    | 14921.30        | 27.28                | 18.61         | 45.89                  | 68.20          | -22.31      | Peak     | Horizontal   |
|      | 17925.20        | 15.11                | 28.23         | 43.34                  | 54.00          | -10.66      | Average  | Horizontal   |
|      | 17925.20        | 30.00                | 28.23         | 58.23                  | 74.00          | -15.77      | Peak     | Horizontal   |
|      | 11448.20        | 31.75                | 16.27         | 48.02                  | 74.00          | -25.98      | Peak     | Vertical     |
| *    | 13870.70        | 29.39                | 18.70         | 48.09                  | 68.20          | -20.11      | Peak     | Vertical     |
| *    | 14746.20        | 29.00                | 18.91         | 47.91                  | 68.20          | -20.29      | Peak     | Vertical     |
|      | 17921.80        | 15.96                | 28.13         | 44.09                  | 54.00          | -9.91       | Average  | Vertical     |
|      | 17921.80        | 28.83                | 28.13         | 56.96                  | 74.00          | -17.04      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 142 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 12114.60        | 31.05                | 16.08         | 47.13                  | 74.00          | -26.87      | Peak     | Horizontal   |
| *    | 14134.20        | 30.87                | 19.21         | 50.08                  | 68.20          | -18.12      | Peak     | Horizontal   |
| *    | 14781.90        | 28.88                | 19.07         | 47.95                  | 68.20          | -20.25      | Peak     | Horizontal   |
|      | 17845.30        | 15.30                | 28.52         | 43.82                  | 54.00          | -10.18      | Average  | Horizontal   |
|      | 17845.30        | 28.81                | 28.52         | 57.33                  | 74.00          | -16.67      | Peak     | Horizontal   |
|      | 11427.80        | 32.70                | 16.36         | 49.06                  | 74.00          | -24.94      | Peak     | Vertical     |
| *    | 13887.70        | 29.00                | 18.83         | 47.83                  | 68.20          | -20.37      | Peak     | Vertical     |
| *    | 14890.70        | 29.32                | 18.83         | 48.15                  | 68.20          | -20.05      | Peak     | Vertical     |
|      | 17923.50        | 15.46                | 28.18         | 43.64                  | 54.00          | -10.36      | Average  | Vertical     |
|      | 17923.50        | 29.37                | 28.18         | 57.55                  | 74.00          | -16.45      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 151 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9908.00         | 32.96                | 12.99         | 45.95                  | 68.20          | -22.25      | Peak     | Horizontal   |
|      | 11482.20        | 32.64                | 16.37         | 49.01                  | 74.00          | -24.99      | Peak     | Horizontal   |
| *    | 17238.40        | 31.88                | 22.14         | 54.02                  | 68.20          | -14.18      | Peak     | Horizontal   |
|      | 17962.60        | 15.85                | 28.38         | 44.23                  | 54.00          | -9.77       | Average  | Horizontal   |
|      | 17962.60        | 31.76                | 28.38         | 60.14                  | 74.00          | -13.86      | Peak     | Horizontal   |
| *    | 10327.90        | 31.00                | 14.17         | 45.17                  | 68.20          | -23.03      | Peak     | Vertical     |
|      | 11460.10        | 31.22                | 16.25         | 47.47                  | 74.00          | -26.53      | Peak     | Vertical     |
| *    | 16855.90        | 31.94                | 20.62         | 52.56                  | 68.20          | -15.64      | Peak     | Vertical     |
|      | 17926.90        | 15.99                | 28.28         | 44.27                  | 54.00          | -9.73       | Average  | Vertical     |
|      | 17926.90        | 30.76                | 28.28         | 59.04                  | 74.00          | -14.96      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT40 - Channel 159 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9923.30         | 32.56                | 13.02         | 45.58                  | 68.20          | -22.62      | Peak     | Horizontal   |
|      | 11625.00        | 31.24                | 16.28         | 47.52                  | 74.00          | -26.48      | Peak     | Horizontal   |
| *    | 16859.30        | 33.16                | 20.63         | 53.79                  | 68.20          | -14.41      | Peak     | Horizontal   |
|      | 17949.00        | 15.87                | 28.64         | 44.51                  | 54.00          | -9.49       | Average  | Horizontal   |
|      | 17949.00        | 31.17                | 28.64         | 59.81                  | 74.00          | -14.19      | Peak     | Horizontal   |
|      | 11290.10        | 31.20                | 16.19         | 47.39                  | 74.00          | -26.61      | Peak     | Vertical     |
| *    | 14166.50        | 30.28                | 19.34         | 49.62                  | 68.20          | -18.58      | Peak     | Vertical     |
| *    | 17041.20        | 32.55                | 20.95         | 53.50                  | 68.20          | -14.70      | Peak     | Vertical     |
|      | 17952.40        | 16.06                | 28.58         | 44.64                  | 54.00          | -9.36       | Average  | Vertical     |
|      | 17952.40        | 31.35                | 28.58         | 59.93                  | 74.00          | -14.07      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 42 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9838.30         | 32.30                | 13.07         | 45.37                  | 68.20          | -22.83      | Peak     | Horizontal   |
|      | 11742.30        | 31.03                | 16.07         | 47.10                  | 74.00          | -26.90      | Peak     | Horizontal   |
| *    | 14868.60        | 31.29                | 18.63         | 49.92                  | 68.20          | -18.28      | Peak     | Horizontal   |
|      | 17964.30        | 16.17                | 28.35         | 44.52                  | 54.00          | -9.48       | Average  | Horizontal   |
|      | 17964.30        | 31.22                | 28.35         | 59.57                  | 74.00          | -14.43      | Peak     | Horizontal   |
| *    | 10010.00        | 32.86                | 13.09         | 45.95                  | 68.20          | -22.25      | Peak     | Vertical     |
|      | 11404.00        | 31.35                | 16.39         | 47.74                  | 74.00          | -26.26      | Peak     | Vertical     |
| *    | 16922.20        | 32.43                | 20.50         | 52.93                  | 68.20          | -15.27      | Peak     | Vertical     |
|      | 17950.70        | 16.21                | 28.61         | 44.82                  | 54.00          | -9.18       | Average  | Vertical     |
|      | 17950.70        | 31.48                | 28.61         | 60.09                  | 74.00          | -13.91      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 58 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9989.60         | 32.45                | 13.00         | 45.45                  | 68.20          | -22.75      | Peak     | Horizontal   |
|      | 11099.70        | 31.45                | 15.87         | 47.32                  | 74.00          | -26.68      | Peak     | Horizontal   |
| *    | 17308.10        | 32.18                | 22.90         | 55.08                  | 68.20          | -13.12      | Peak     | Horizontal   |
|      | 17945.60        | 15.75                | 28.60         | 44.35                  | 54.00          | -9.65       | Average  | Horizontal   |
|      | 17945.60        | 30.84                | 28.60         | 59.44                  | 74.00          | -14.56      | Peak     | Horizontal   |
| *    | 10338.10        | 31.23                | 14.16         | 45.39                  | 68.20          | -22.81      | Peak     | Vertical     |
|      | 11703.20        | 31.30                | 16.23         | 47.53                  | 74.00          | -26.47      | Peak     | Vertical     |
| *    | 17037.80        | 31.74                | 20.97         | 52.71                  | 68.20          | -15.49      | Peak     | Vertical     |
|      | 17853.80        | 15.83                | 28.60         | 44.43                  | 54.00          | -9.57       | Average  | Vertical     |
|      | 17853.80        | 31.40                | 28.60         | 60.00                  | 74.00          | -14.00      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 106 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9836.60         | 32.73                | 13.08         | 45.81                  | 68.20          | -22.39      | Peak     | Horizontal   |
|      | 11687.90        | 31.07                | 16.32         | 47.39                  | 74.00          | -26.61      | Peak     | Horizontal   |
| *    | 17066.70        | 32.66                | 20.82         | 53.48                  | 68.20          | -14.72      | Peak     | Horizontal   |
|      | 17932.00        | 15.68                | 28.47         | 44.15                  | 54.00          | -9.85       | Average  | Horizontal   |
|      | 17932.00        | 30.69                | 28.47         | 59.16                  | 74.00          | -14.84      | Peak     | Horizontal   |
| *    | 9986.20         | 33.08                | 12.99         | 46.07                  | 68.20          | -22.13      | Peak     | Vertical     |
|      | 11708.30        | 31.11                | 16.20         | 47.31                  | 74.00          | -26.69      | Peak     | Vertical     |
| *    | 17095.60        | 32.20                | 21.12         | 53.32                  | 68.20          | -14.88      | Peak     | Vertical     |
|      | 17942.20        | 16.04                | 28.57         | 44.61                  | 54.00          | -9.39       | Average  | Vertical     |
|      | 17942.20        | 31.30                | 28.57         | 59.87                  | 74.00          | -14.13      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 122 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9982.80         | 32.68                | 12.98         | 45.66                  | 68.20          | -22.54      | Peak     | Horizontal   |
|      | 11439.70        | 30.68                | 16.31         | 46.99                  | 74.00          | -27.01      | Peak     | Horizontal   |
| *    | 16862.70        | 33.27                | 20.64         | 53.91                  | 68.20          | -14.29      | Peak     | Horizontal   |
|      | 17966.00        | 15.79                | 28.30         | 44.09                  | 54.00          | -9.91       | Average  | Horizontal   |
|      | 17966.00        | 30.90                | 28.30         | 59.20                  | 74.00          | -14.80      | Peak     | Horizontal   |
| *    | 10380.60        | 31.72                | 14.38         | 46.10                  | 68.20          | -22.10      | Peak     | Vertical     |
|      | 12121.40        | 31.25                | 16.08         | 47.33                  | 74.00          | -26.67      | Peak     | Vertical     |
| *    | 16859.30        | 32.52                | 20.63         | 53.15                  | 68.20          | -15.05      | Peak     | Vertical     |
|      | 17960.90        | 15.91                | 28.42         | 44.33                  | 54.00          | -9.67       | Average  | Vertical     |
|      | 17960.90        | 31.20                | 28.42         | 59.62                  | 74.00          | -14.38      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 138 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9840.00         | 33.46                | 13.07         | 46.53                  | 68.20          | -21.67      | Peak     | Horizontal   |
|      | 11560.40        | 30.72                | 16.31         | 47.03                  | 74.00          | -26.97      | Peak     | Horizontal   |
| *    | 16857.60        | 32.53                | 20.62         | 53.15                  | 68.20          | -15.05      | Peak     | Horizontal   |
|      | 17977.90        | 15.78                | 27.99         | 43.77                  | 54.00          | -10.23      | Average  | Horizontal   |
|      | 17977.90        | 31.16                | 27.99         | 59.15                  | 74.00          | -14.85      | Peak     | Horizontal   |
| *    | 9800.90         | 32.73                | 13.03         | 45.76                  | 68.20          | -22.44      | Peak     | Vertical     |
|      | 11626.70        | 30.81                | 16.28         | 47.09                  | 74.00          | -26.91      | Peak     | Vertical     |
| *    | 16940.90        | 33.30                | 20.57         | 53.87                  | 68.20          | -14.33      | Peak     | Vertical     |
|      | 17950.70        | 15.94                | 28.61         | 44.55                  | 54.00          | -9.45       | Average  | Vertical     |
|      | 17950.70        | 30.26                | 28.61         | 58.87                  | 74.00          | -15.13      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ac-VHT80 - Channel 155 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9942.00         | 32.77                | 13.03         | 45.80                  | 68.20          | -22.40      | Peak     | Horizontal   |
|      | 11774.60        | 31.24                | 16.11         | 47.35                  | 74.00          | -26.65      | Peak     | Horizontal   |
| *    | 16971.50        | 33.35                | 20.58         | 53.93                  | 68.20          | -14.27      | Peak     | Horizontal   |
|      | 17971.10        | 15.38                | 28.17         | 43.55                  | 54.00          | -10.45      | Average  | Horizontal   |
|      | 17971.10        | 31.18                | 28.17         | 59.35                  | 74.00          | -14.65      | Peak     | Horizontal   |
| *    | 10253.10        | 31.97                | 13.70         | 45.67                  | 68.20          | -22.53      | Peak     | Vertical     |
|      | 11565.50        | 30.34                | 16.32         | 46.66                  | 74.00          | -27.34      | Peak     | Vertical     |
| *    | 17025.90        | 32.14                | 20.94         | 53.08                  | 68.20          | -15.12      | Peak     | Vertical     |
|      | 17937.10        | 15.88                | 28.52         | 44.40                  | 54.00          | -9.60       | Average  | Vertical     |
|      | 17937.10        | 30.75                | 28.52         | 59.27                  | 74.00          | -14.73      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10358.50        | 31.83                | 14.24         | 46.07                  | 68.20          | -22.13      | Peak     | Horizontal   |
|      | 12050.00        | 32.02                | 16.01         | 48.03                  | 74.00          | -25.97      | Peak     | Horizontal   |
| *    | 17406.70        | 30.98                | 23.25         | 54.23                  | 68.20          | -13.97      | Peak     | Horizontal   |
|      | 17940.50        | 15.94                | 28.55         | 44.49                  | 54.00          | -9.51       | Average  | Horizontal   |
|      | 17940.50        | 30.99                | 28.55         | 59.54                  | 74.00          | -14.46      | Peak     | Horizontal   |
| *    | 10472.40        | 32.44                | 14.54         | 46.98                  | 68.20          | -21.22      | Peak     | Vertical     |
|      | 11475.40        | 30.85                | 16.33         | 47.18                  | 74.00          | -26.82      | Peak     | Vertical     |
| *    | 16407.10        | 32.97                | 17.84         | 50.81                  | 68.20          | -17.39      | Peak     | Vertical     |
|      | 17979.60        | 15.82                | 27.95         | 43.77                  | 54.00          | -10.23      | Average  | Vertical     |
|      | 17979.60        | 31.61                | 27.95         | 59.56                  | 74.00          | -14.44      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10103.50        | 31.92                | 13.19         | 45.11                  | 68.20          | -23.09      | Peak     | Horizontal   |
|      | 11579.10        | 30.55                | 16.37         | 46.92                  | 74.00          | -27.08      | Peak     | Horizontal   |
| *    | 16750.50        | 33.83                | 20.02         | 53.85                  | 68.20          | -14.35      | Peak     | Horizontal   |
|      | 17857.20        | 15.79                | 28.61         | 44.40                  | 54.00          | -9.60       | Average  | Horizontal   |
|      | 17857.20        | 30.94                | 28.61         | 59.55                  | 74.00          | -14.45      | Peak     | Horizontal   |
| *    | 10016.80        | 32.96                | 13.12         | 46.08                  | 68.20          | -22.12      | Peak     | Vertical     |
|      | 11404.00        | 29.98                | 16.39         | 46.37                  | 74.00          | -27.63      | Peak     | Vertical     |
| *    | 17076.90        | 31.50                | 20.88         | 52.38                  | 68.20          | -15.82      | Peak     | Vertical     |
|      | 18000.00        | 15.84                | 27.93         | 43.77                  | 54.00          | -10.23      | Average  | Vertical     |
|      | 18000.00        | 30.07                | 27.93         | 58.00                  | 74.00          | -16.00      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9826.40         | 32.97                | 13.11         | 46.08                  | 68.20          | -22.12      | Peak     | Horizontal   |
|      | 11492.40        | 31.14                | 16.40         | 47.54                  | 74.00          | -26.46      | Peak     | Horizontal   |
| *    | 17059.90        | 32.63                | 20.84         | 53.47                  | 68.20          | -14.73      | Peak     | Horizontal   |
|      | 17981.30        | 15.89                | 27.91         | 43.80                  | 54.00          | -10.20      | Average  | Horizontal   |
|      | 17981.30        | 31.50                | 27.90         | 59.40                  | 74.00          | -14.60      | Peak     | Horizontal   |
| *    | 9994.70         | 32.19                | 13.02         | 45.21                  | 68.20          | -22.99      | Peak     | Vertical     |
|      | 11269.70        | 29.77                | 15.99         | 45.76                  | 74.00          | -28.24      | Peak     | Vertical     |
| *    | 16896.70        | 32.09                | 20.43         | 52.52                  | 68.20          | -15.68      | Peak     | Vertical     |
|      | 18000.00        | 15.59                | 27.93         | 43.52                  | 54.00          | -10.48      | Average  | Vertical     |
|      | 18000.00        | 29.38                | 27.93         | 57.31                  | 74.00          | -16.69      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 52 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11555.30        | 30.51                | 16.30         | 46.81                  | 74.00          | -27.19      | Peak     | Horizontal   |
| *    | 13642.90        | 28.44                | 18.27         | 46.71                  | 68.20          | -21.49      | Peak     | Horizontal   |
| *    | 14890.70        | 27.21                | 18.83         | 46.04                  | 68.20          | -22.16      | Peak     | Horizontal   |
|      | 17988.10        | 15.22                | 27.88         | 43.10                  | 54.00          | -10.90      | Average  | Horizontal   |
|      | 17988.10        | 29.70                | 27.88         | 57.58                  | 74.00          | -16.42      | Peak     | Horizontal   |
|      | 10943.30        | 30.93                | 15.89         | 46.82                  | 74.00          | -27.18      | Peak     | Vertical     |
| *    | 14134.20        | 31.41                | 19.21         | 50.62                  | 68.20          | -17.58      | Peak     | Vertical     |
| *    | 15043.70        | 30.08                | 18.09         | 48.17                  | 68.20          | -20.03      | Peak     | Vertical     |
|      | 17855.50        | 15.36                | 28.62         | 43.98                  | 54.00          | -10.02      | Average  | Vertical     |
|      | 17855.50        | 28.49                | 28.62         | 57.11                  | 74.00          | -16.89      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 60 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11506.00        | 31.00                | 16.40         | 47.40                  | 74.00          | -26.60      | Peak     | Horizontal   |
| *    | 13840.10        | 30.45                | 18.56         | 49.01                  | 68.20          | -19.19      | Peak     | Horizontal   |
| *    | 14883.90        | 31.35                | 18.80         | 50.15                  | 68.20          | -18.05      | Peak     | Horizontal   |
|      | 17855.50        | 15.78                | 28.62         | 44.40                  | 54.00          | -9.60       | Average  | Horizontal   |
|      | 17855.50        | 28.66                | 28.62         | 57.28                  | 74.00          | -16.72      | Peak     | Horizontal   |
|      | 11477.10        | 31.07                | 16.34         | 47.41                  | 74.00          | -26.59      | Peak     | Vertical     |
| *    | 13814.60        | 30.04                | 18.75         | 48.79                  | 68.20          | -19.41      | Peak     | Vertical     |
| *    | 14887.30        | 29.33                | 18.83         | 48.16                  | 68.20          | -20.04      | Peak     | Vertical     |
|      | 17858.90        | 15.63                | 28.58         | 44.21                  | 54.00          | -9.79       | Average  | Vertical     |
|      | 17858.90        | 28.08                | 28.58         | 56.66                  | 74.00          | -17.34      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 64 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11397.20        | 30.86                | 16.36         | 47.22                  | 74.00          | -26.78      | Peak     | Horizontal   |
| *    | 14064.50        | 29.66                | 19.12         | 48.78                  | 68.20          | -19.42      | Peak     | Horizontal   |
| *    | 14858.40        | 30.53                | 18.59         | 49.12                  | 68.20          | -19.08      | Peak     | Horizontal   |
|      | 17955.80        | 15.47                | 28.51         | 43.98                  | 54.00          | -10.02      | Average  | Horizontal   |
|      | 17955.80        | 28.79                | 28.51         | 57.30                  | 74.00          | -16.70      | Peak     | Horizontal   |
|      | 10885.50        | 31.38                | 15.30         | 46.68                  | 74.00          | -27.32      | Peak     | Vertical     |
| *    | 13622.50        | 30.49                | 18.32         | 48.81                  | 68.20          | -19.39      | Peak     | Vertical     |
| *    | 14809.10        | 29.16                | 19.15         | 48.31                  | 68.20          | -19.89      | Peak     | Vertical     |
|      | 17848.70        | 15.33                | 28.54         | 43.87                  | 54.00          | -10.13      | Average  | Vertical     |
|      | 17848.70        | 28.86                | 28.54         | 57.40                  | 74.00          | -16.60      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 100 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11354.70        | 31.40                | 16.09         | 47.49                  | 74.00          | -26.51      | Peak     | Horizontal   |
| *    | 13896.20        | 29.87                | 18.82         | 48.69                  | 68.20          | -19.51      | Peak     | Horizontal   |
| *    | 14635.70        | 30.12                | 19.05         | 49.17                  | 68.20          | -19.03      | Peak     | Horizontal   |
|      | 17858.90        | 15.22                | 28.58         | 43.80                  | 54.00          | -10.20      | Average  | Horizontal   |
|      | 17858.90        | 29.50                | 28.58         | 58.08                  | 74.00          | -15.92      | Peak     | Horizontal   |
|      | 11480.50        | 30.75                | 16.36         | 47.11                  | 74.00          | -26.89      | Peak     | Vertical     |
| *    | 13795.90        | 30.62                | 18.64         | 49.26                  | 68.20          | -18.94      | Peak     | Vertical     |
| *    | 14984.20        | 30.84                | 18.47         | 49.31                  | 68.20          | -18.89      | Peak     | Vertical     |
|      | 17852.10        | 15.32                | 28.58         | 43.90                  | 54.00          | -10.10      | Average  | Vertical     |
|      | 17852.10        | 28.99                | 28.58         | 57.57                  | 74.00          | -16.43      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 116 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11511.10        | 30.41                | 16.39         | 46.80                  | 74.00          | -27.20      | Peak     | Horizontal   |
| *    | 13726.20        | 30.61                | 18.40         | 49.01                  | 68.20          | -19.19      | Peak     | Horizontal   |
| *    | 14770.00        | 28.82                | 18.94         | 47.76                  | 68.20          | -20.44      | Peak     | Horizontal   |
|      | 17848.70        | 15.36                | 28.54         | 43.90                  | 54.00          | -10.10      | Average  | Horizontal   |
|      | 17848.70        | 29.46                | 28.54         | 58.00                  | 74.00          | -16.00      | Peak     | Horizontal   |
|      | 11472.00        | 31.00                | 16.31         | 47.31                  | 74.00          | -26.69      | Peak     | Vertical     |
| *    | 13862.20        | 29.33                | 18.62         | 47.95                  | 68.20          | -20.25      | Peak     | Vertical     |
| *    | 14900.90        | 28.23                | 18.86         | 47.09                  | 68.20          | -21.11      | Peak     | Vertical     |
|      | 17947.30        | 15.23                | 28.63         | 43.86                  | 54.00          | -10.14      | Average  | Vertical     |
|      | 17947.30        | 29.43                | 28.63         | 58.06                  | 74.00          | -15.94      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 140 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11222.10        | 31.22                | 16.21         | 47.43                  | 74.00          | -26.57      | Peak     | Horizontal   |
| *    | 13733.00        | 29.65                | 18.39         | 48.04                  | 68.20          | -20.16      | Peak     | Horizontal   |
| *    | 14940.00        | 29.09                | 18.33         | 47.42                  | 68.20          | -20.78      | Peak     | Horizontal   |
|      | 17954.10        | 15.23                | 28.54         | 43.77                  | 54.00          | -10.23      | Average  | Horizontal   |
|      | 17954.10        | 29.05                | 28.54         | 57.59                  | 74.00          | -16.41      | Peak     | Horizontal   |
|      | 11472.00        | 30.96                | 16.31         | 47.27                  | 74.00          | -26.73      | Peak     | Vertical     |
| *    | 13986.30        | 29.63                | 19.06         | 48.69                  | 68.20          | -19.51      | Peak     | Vertical     |
| *    | 14873.70        | 29.95                | 18.68         | 48.63                  | 68.20          | -19.57      | Peak     | Vertical     |
|      | 17938.80        | 15.20                | 28.53         | 43.73                  | 54.00          | -10.27      | Average  | Vertical     |
|      | 17938.80        | 28.77                | 28.53         | 57.30                  | 74.00          | -16.70      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 144 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11448.20        | 31.30                | 16.27         | 47.57                  | 74.00          | -26.43      | Peak     | Horizontal   |
| *    | 13644.60        | 30.62                | 18.25         | 48.87                  | 68.20          | -19.33      | Peak     | Horizontal   |
| *    | 14766.60        | 30.75                | 18.90         | 49.65                  | 68.20          | -18.55      | Peak     | Horizontal   |
|      | 17938.80        | 15.23                | 28.53         | 43.76                  | 54.00          | -10.24      | Average  | Horizontal   |
|      | 17938.80        | 29.74                | 28.53         | 58.27                  | 74.00          | -15.73      | Peak     | Horizontal   |
|      | 11470.30        | 30.86                | 16.30         | 47.16                  | 74.00          | -26.84      | Peak     | Vertical     |
| *    | 13794.20        | 29.58                | 18.61         | 48.19                  | 68.20          | -20.01      | Peak     | Vertical     |
| *    | 14688.40        | 29.52                | 19.15         | 48.67                  | 68.20          | -19.53      | Peak     | Vertical     |
|      | 17938.80        | 15.20                | 28.53         | 43.73                  | 54.00          | -10.27      | Average  | Vertical     |
|      | 17938.80        | 29.47                | 28.53         | 58.00                  | 74.00          | -16.00      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10100.10        | 33.67                | 13.17         | 46.84                  | 68.20          | -21.36      | Peak     | Horizontal   |
|      | 11506.00        | 30.43                | 16.40         | 46.83                  | 74.00          | -27.17      | Peak     | Horizontal   |
| *    | 17032.70        | 32.27                | 20.97         | 53.24                  | 68.20          | -14.96      | Peak     | Horizontal   |
|      | 17949.00        | 15.73                | 28.64         | 44.37                  | 54.00          | -9.63       | Average  | Horizontal   |
|      | 17949.00        | 30.66                | 28.64         | 59.30                  | 74.00          | -14.70      | Peak     | Horizontal   |
| *    | 10011.70        | 33.24                | 13.09         | 46.33                  | 68.20          | -21.87      | Peak     | Vertical     |
|      | 11349.60        | 31.99                | 16.09         | 48.08                  | 74.00          | -25.92      | Peak     | Vertical     |
| *    | 16895.00        | 33.32                | 20.43         | 53.75                  | 68.20          | -14.45      | Peak     | Vertical     |
|      | 17935.40        | 15.71                | 28.50         | 44.21                  | 54.00          | -9.79       | Average  | Vertical     |
|      | 17935.40        | 30.43                | 28.50         | 58.93                  | 74.00          | -15.07      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10202.10        | 32.70                | 13.64         | 46.34                  | 68.20          | -21.86      | Peak     | Horizontal   |
|      | 11426.10        | 31.04                | 16.37         | 47.41                  | 74.00          | -26.59      | Peak     | Horizontal   |
| *    | 17046.30        | 33.00                | 20.92         | 53.92                  | 68.20          | -14.28      | Peak     | Horizontal   |
|      | 17957.50        | 15.82                | 28.48         | 44.30                  | 54.00          | -9.70       | Average  | Horizontal   |
|      | 17957.50        | 31.66                | 28.48         | 60.14                  | 74.00          | -13.86      | Peak     | Horizontal   |
| *    | 9960.70         | 32.66                | 12.98         | 45.64                  | 68.20          | -22.56      | Peak     | Vertical     |
|      | 11176.20        | 30.70                | 15.87         | 46.57                  | 74.00          | -27.43      | Peak     | Vertical     |
| *    | 16821.90        | 32.13                | 20.23         | 52.36                  | 68.20          | -15.84      | Peak     | Vertical     |
|      | 17847.00        | 15.75                | 28.53         | 44.28                  | 54.00          | -9.72       | Average  | Vertical     |
|      | 17847.00        | 31.73                | 28.53         | 60.26                  | 74.00          | -13.74      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE20 - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9999.80         | 33.01                | 13.04         | 46.05                  | 68.20          | -22.15      | Peak     | Horizontal   |
|      | 11427.80        | 30.65                | 16.36         | 47.01                  | 74.00          | -26.99      | Peak     | Horizontal   |
| *    | 17012.30        | 33.50                | 20.77         | 54.27                  | 68.20          | -13.93      | Peak     | Horizontal   |
|      | 17988.10        | 15.93                | 27.88         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17988.10        | 31.66                | 27.88         | 59.54                  | 74.00          | -14.46      | Peak     | Horizontal   |
| *    | 9908.00         | 33.45                | 12.99         | 46.44                  | 68.20          | -21.76      | Peak     | Vertical     |
|      | 10897.40        | 31.94                | 15.33         | 47.27                  | 74.00          | -26.73      | Peak     | Vertical     |
| *    | 17008.90        | 32.28                | 20.73         | 53.01                  | 68.20          | -15.19      | Peak     | Vertical     |
|      | 17937.10        | 15.85                | 28.52         | 44.37                  | 54.00          | -9.63       | Average  | Vertical     |
|      | 17937.10        | 30.17                | 28.52         | 58.69                  | 74.00          | -15.31      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 38 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10013.40        | 32.88                | 13.10         | 45.98                  | 68.20          | -22.22      | Peak     | Horizontal   |
|      | 11716.80        | 31.46                | 16.16         | 47.62                  | 74.00          | -26.38      | Peak     | Horizontal   |
| *    | 17025.90        | 33.23                | 20.94         | 54.17                  | 68.20          | -14.03      | Peak     | Horizontal   |
|      | 17836.80        | 15.81                | 28.00         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17836.80        | 31.43                | 28.00         | 59.43                  | 74.00          | -14.57      | Peak     | Horizontal   |
| *    | 10101.80        | 32.28                | 13.18         | 45.46                  | 68.20          | -22.74      | Peak     | Vertical     |
|      | 11099.70        | 32.15                | 15.87         | 48.02                  | 74.00          | -25.98      | Peak     | Vertical     |
| *    | 16874.60        | 32.59                | 20.57         | 53.16                  | 68.20          | -15.04      | Peak     | Vertical     |
|      | 17886.10        | 15.86                | 27.46         | 43.32                  | 54.00          | -10.68      | Average  | Vertical     |
|      | 17886.10        | 31.73                | 27.46         | 59.19                  | 74.00          | -14.81      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 46 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10195.30        | 31.60                | 13.61         | 45.21                  | 68.20          | -22.99      | Peak     | Horizontal   |
|      | 11334.30        | 30.52                | 16.20         | 46.72                  | 74.00          | -27.28      | Peak     | Horizontal   |
| *    | 16866.10        | 31.93                | 20.64         | 52.57                  | 68.20          | -15.63      | Peak     | Horizontal   |
|      | 17921.80        | 15.83                | 28.13         | 43.96                  | 54.00          | -10.04      | Average  | Horizontal   |
|      | 17921.80        | 30.31                | 28.13         | 58.44                  | 74.00          | -15.56      | Peak     | Horizontal   |
| *    | 10174.90        | 31.82                | 13.38         | 45.20                  | 68.20          | -23.00      | Peak     | Vertical     |
|      | 11715.10        | 30.37                | 16.17         | 46.54                  | 74.00          | -27.46      | Peak     | Vertical     |
| *    | 16850.80        | 32.45                | 20.61         | 53.06                  | 68.20          | -15.14      | Peak     | Vertical     |
|      | 17976.20        | 15.76                | 28.04         | 43.80                  | 54.00          | -10.20      | Average  | Vertical     |
|      | 17976.20        | 30.19                | 28.04         | 58.23                  | 74.00          | -15.77      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 54 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11613.10        | 30.45                | 16.33         | 46.78                  | 74.00          | -27.22      | Peak     | Horizontal   |
| *    | 13816.30        | 30.61                | 18.75         | 49.36                  | 68.20          | -18.84      | Peak     | Horizontal   |
| *    | 14754.70        | 29.26                | 18.88         | 48.14                  | 68.20          | -20.06      | Peak     | Horizontal   |
|      | 17850.40        | 15.96                | 28.56         | 44.52                  | 54.00          | -9.48       | Average  | Horizontal   |
|      | 17850.40        | 28.86                | 28.56         | 57.42                  | 74.00          | -16.58      | Peak     | Horizontal   |
|      | 11453.30        | 30.73                | 16.26         | 46.99                  | 74.00          | -27.01      | Peak     | Vertical     |
| *    | 13705.80        | 30.88                | 18.43         | 49.31                  | 68.20          | -18.89      | Peak     | Vertical     |
| *    | 14878.80        | 29.75                | 18.74         | 48.49                  | 68.20          | -19.71      | Peak     | Vertical     |
|      | 17845.30        | 15.60                | 28.52         | 44.12                  | 54.00          | -9.88       | Average  | Vertical     |
|      | 17845.30        | 29.35                | 28.52         | 57.87                  | 74.00          | -16.13      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 62 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11064.00        | 31.62                | 15.66         | 47.28                  | 74.00          | -26.72      | Peak     | Horizontal   |
| *    | 13909.80        | 29.64                | 18.78         | 48.42                  | 68.20          | -19.78      | Peak     | Horizontal   |
| *    | 14951.90        | 30.03                | 18.24         | 48.27                  | 68.20          | -19.93      | Peak     | Horizontal   |
|      | 17937.10        | 15.47                | 28.52         | 43.99                  | 54.00          | -10.01      | Average  | Horizontal   |
|      | 17937.10        | 28.42                | 28.52         | 56.94                  | 74.00          | -17.06      | Peak     | Horizontal   |
|      | 11614.80        | 30.77                | 16.32         | 47.09                  | 74.00          | -26.91      | Peak     | Vertical     |
| *    | 13860.50        | 29.75                | 18.60         | 48.35                  | 68.20          | -19.85      | Peak     | Vertical     |
| *    | 14890.70        | 29.22                | 18.83         | 48.05                  | 68.20          | -20.15      | Peak     | Vertical     |
|      | 17940.50        | 15.26                | 28.55         | 43.81                  | 54.00          | -10.19      | Average  | Vertical     |
|      | 17940.50        | 28.75                | 28.55         | 57.30                  | 74.00          | -16.70      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 102 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11115.00        | 30.95                | 16.10         | 47.05                  | 74.00          | -26.95      | Peak     | Horizontal   |
| *    | 13848.60        | 28.74                | 18.53         | 47.27                  | 68.20          | -20.93      | Peak     | Horizontal   |
| *    | 14890.70        | 27.86                | 18.83         | 46.69                  | 68.20          | -21.51      | Peak     | Horizontal   |
|      | 17933.70        | 15.32                | 28.49         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17933.70        | 29.08                | 28.49         | 57.57                  | 74.00          | -16.43      | Peak     | Horizontal   |
|      | 11208.50        | 31.07                | 16.24         | 47.31                  | 74.00          | -26.69      | Peak     | Vertical     |
| *    | 13848.60        | 27.59                | 18.53         | 46.12                  | 68.20          | -22.08      | Peak     | Vertical     |
| *    | 14953.60        | 26.50                | 18.22         | 44.72                  | 68.20          | -23.48      | Peak     | Vertical     |
|      | 17962.60        | 15.24                | 28.38         | 43.62                  | 54.00          | -10.38      | Average  | Vertical     |
|      | 17962.60        | 30.48                | 28.38         | 58.86                  | 74.00          | -15.14      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 134 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11019.80        | 32.21                | 15.91         | 48.12                  | 74.00          | -25.88      | Peak     | Horizontal   |
| *    | 13909.80        | 30.56                | 18.78         | 49.34                  | 68.20          | -18.86      | Peak     | Horizontal   |
| *    | 14860.10        | 30.63                | 18.60         | 49.23                  | 68.20          | -18.97      | Peak     | Horizontal   |
|      | 17952.40        | 15.40                | 28.58         | 43.98                  | 54.00          | -10.02      | Average  | Horizontal   |
|      | 17952.40        | 28.70                | 28.58         | 57.28                  | 74.00          | -16.72      | Peak     | Horizontal   |
|      | 11521.30        | 30.79                | 16.36         | 47.15                  | 74.00          | -26.85      | Peak     | Vertical     |
| *    | 13710.90        | 30.62                | 18.44         | 49.06                  | 68.20          | -19.14      | Peak     | Vertical     |
| *    | 14693.50        | 29.48                | 19.21         | 48.69                  | 68.20          | -19.51      | Peak     | Vertical     |
|      | 17945.60        | 15.60                | 28.60         | 44.20                  | 54.00          | -9.80       | Average  | Vertical     |
|      | 17945.60        | 28.19                | 28.60         | 56.79                  | 74.00          | -17.21      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 142 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11026.60        | 31.26                | 15.94         | 47.20                  | 74.00          | -26.80      | Peak     | Horizontal   |
| *    | 13746.60        | 30.64                | 18.29         | 48.93                  | 68.20          | -19.27      | Peak     | Horizontal   |
| *    | 14923.00        | 29.39                | 18.59         | 47.98                  | 68.20          | -20.22      | Peak     | Horizontal   |
|      | 17954.10        | 15.69                | 28.54         | 44.23                  | 54.00          | -9.77       | Average  | Horizontal   |
|      | 17954.10        | 28.89                | 28.54         | 57.43                  | 74.00          | -16.57      | Peak     | Horizontal   |
|      | 11609.70        | 31.27                | 16.34         | 47.61                  | 74.00          | -26.39      | Peak     | Vertical     |
| *    | 13746.60        | 30.04                | 18.29         | 48.33                  | 68.20          | -19.87      | Peak     | Vertical     |
| *    | 14810.80        | 30.24                | 19.14         | 49.38                  | 68.20          | -18.82      | Peak     | Vertical     |
|      | 17855.50        | 15.90                | 28.62         | 44.52                  | 54.00          | -9.48       | Average  | Vertical     |
|      | 17855.50        | 28.30                | 28.62         | 56.92                  | 74.00          | -17.08      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 151 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11495.80        | 30.70                | 16.41         | 47.11                  | 74.00          | -26.89      | Peak     | Horizontal   |
| *    | 13726.20        | 30.00                | 18.40         | 48.40                  | 68.20          | -19.80      | Peak     | Horizontal   |
| *    | 14992.70        | 31.18                | 18.45         | 49.63                  | 68.20          | -18.57      | Peak     | Horizontal   |
|      | 17920.10        | 15.47                | 28.08         | 43.55                  | 54.00          | -10.45      | Average  | Horizontal   |
|      | 17920.10        | 31.97                | 28.08         | 60.05                  | 74.00          | -13.95      | Peak     | Horizontal   |
|      | 11392.10        | 31.21                | 16.32         | 47.53                  | 74.00          | -26.47      | Peak     | Vertical     |
| *    | 13818.00        | 29.54                | 18.74         | 48.28                  | 68.20          | -19.92      | Peak     | Vertical     |
| *    | 14924.70        | 31.22                | 18.56         | 49.78                  | 68.20          | -18.42      | Peak     | Vertical     |
|      | 17923.50        | 15.14                | 28.18         | 43.32                  | 54.00          | -10.68      | Average  | Vertical     |
|      | 17923.50        | 30.76                | 28.18         | 58.94                  | 74.00          | -15.06      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE40 - Channel 159 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11252.70        | 32.00                | 15.97         | 47.97                  | 74.00          | -26.03      | Peak     | Horizontal   |
| *    | 13726.20        | 30.17                | 18.40         | 48.57                  | 68.20          | -19.63      | Peak     | Horizontal   |
| *    | 15023.30        | 31.26                | 18.04         | 49.30                  | 68.20          | -18.90      | Peak     | Horizontal   |
|      | 17950.70        | 15.42                | 28.61         | 44.03                  | 54.00          | -9.97       | Average  | Horizontal   |
|      | 17950.70        | 31.69                | 28.61         | 60.30                  | 74.00          | -13.70      | Peak     | Horizontal   |
|      | 11324.10        | 30.75                | 16.28         | 47.03                  | 74.00          | -26.97      | Peak     | Vertical     |
| *    | 13767.00        | 28.05                | 18.27         | 46.32                  | 68.20          | -21.88      | Peak     | Vertical     |
| *    | 14917.90        | 29.42                | 18.66         | 48.08                  | 68.20          | -20.12      | Peak     | Vertical     |
|      | 17848.70        | 15.47                | 28.54         | 44.01                  | 54.00          | -9.99       | Average  | Vertical     |
|      | 17848.70        | 30.99                | 28.54         | 59.53                  | 74.00          | -14.47      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE80 - Channel 42 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11402.30        | 30.84                | 16.39         | 47.23                  | 74.00          | -26.77      | Peak     | Horizontal   |
| *    | 13833.30        | 27.60                | 18.61         | 46.21                  | 68.20          | -21.99      | Peak     | Horizontal   |
| *    | 15132.10        | 29.50                | 17.90         | 47.40                  | 68.20          | -20.80      | Peak     | Horizontal   |
|      | 17928.60        | 15.32                | 28.34         | 43.66                  | 54.00          | -10.34      | Average  | Horizontal   |
|      | 17928.60        | 30.25                | 28.34         | 58.59                  | 74.00          | -15.41      | Peak     | Horizontal   |
|      | 11422.70        | 31.21                | 16.39         | 47.60                  | 74.00          | -26.40      | Peak     | Vertical     |
| *    | 13797.60        | 29.88                | 18.67         | 48.55                  | 68.20          | -19.65      | Peak     | Vertical     |
| *    | 14878.80        | 31.26                | 18.74         | 50.00                  | 68.20          | -18.20      | Peak     | Vertical     |
|      | 17847.00        | 15.25                | 28.53         | 43.78                  | 54.00          | -10.22      | Average  | Vertical     |
|      | 17847.00        | 30.72                | 28.53         | 59.25                  | 74.00          | -14.75      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                               |               |                            |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                        | Test Engineer | Ajin Fan/Dick Shen         |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                       | Test Mode     | 802.11ax-HE80 - Channel 58 |
| Remark    | Average measurement was not performed if peak level lower than average limit.<br>Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11084.40        | 31.61                | 15.64         | 47.25                  | 74.00          | -26.75      | Peak     | Horizontal   |
| *    | 13716.00        | 31.13                | 18.46         | 49.59                  | 68.20          | -18.61      | Peak     | Horizontal   |
| *    | 14802.30        | 30.44                | 19.17         | 49.61                  | 68.20          | -18.59      | Peak     | Horizontal   |
|      | 17860.60        | 15.24                | 28.55         | 43.79                  | 54.00          | -10.21      | Average  | Horizontal   |
|      | 17860.60        | 30.16                | 28.55         | 58.71                  | 74.00          | -15.29      | Peak     | Horizontal   |
|      | 11492.40        | 30.28                | 16.40         | 46.68                  | 74.00          | -27.32      | Peak     | Vertical     |
| *    | 13714.30        | 30.48                | 18.45         | 48.93                  | 68.20          | -19.27      | Peak     | Vertical     |
| *    | 14759.80        | 30.99                | 18.89         | 49.88                  | 68.20          | -18.32      | Peak     | Vertical     |
|      | 17940.50        | 15.24                | 28.55         | 43.79                  | 54.00          | -10.21      | Average  | Vertical     |
|      | 17940.50        | 30.21                | 28.55         | 58.76                  | 74.00          | -15.24      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                               |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                        | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                       | Test Mode     | 802.11ax-HE80 - Channel 106 |
| Remark    | Average measurement was not performed if peak level lower than average limit.<br>Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11616.50        | 30.71                | 16.31         | 47.02                  | 74.00          | -26.98      | Peak     | Horizontal   |
| *    | 14018.60        | 29.74                | 18.80         | 48.54                  | 68.20          | -19.66      | Peak     | Horizontal   |
| *    | 14992.70        | 30.50                | 18.45         | 48.95                  | 68.20          | -19.25      | Peak     | Horizontal   |
|      | 17945.60        | 15.42                | 28.60         | 44.02                  | 54.00          | -9.98       | Average  | Horizontal   |
|      | 17945.60        | 30.86                | 28.60         | 59.46                  | 74.00          | -14.54      | Peak     | Horizontal   |
|      | 11689.60        | 31.01                | 16.31         | 47.32                  | 74.00          | -26.68      | Peak     | Vertical     |
| *    | 13891.10        | 30.52                | 18.84         | 49.36                  | 68.20          | -18.84      | Peak     | Vertical     |
| *    | 14792.10        | 30.29                | 19.14         | 49.43                  | 68.20          | -18.77      | Peak     | Vertical     |
|      | 17947.30        | 15.36                | 28.63         | 43.99                  | 54.00          | -10.01      | Average  | Vertical     |
|      | 17947.30        | 30.99                | 28.63         | 59.62                  | 74.00          | -14.38      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE80 - Channel 122 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11353.00        | 32.12                | 16.09         | 48.21                  | 74.00          | -25.79      | Peak     | Horizontal   |
| *    | 13950.60        | 30.37                | 18.77         | 49.14                  | 68.20          | -19.06      | Peak     | Horizontal   |
| *    | 14906.00        | 31.11                | 18.84         | 49.95                  | 68.20          | -18.25      | Peak     | Horizontal   |
|      | 17989.80        | 15.64                | 27.88         | 43.52                  | 54.00          | -10.48      | Average  | Horizontal   |
|      | 17989.80        | 31.10                | 27.88         | 58.98                  | 74.00          | -15.02      | Peak     | Horizontal   |
|      | 11346.20        | 31.12                | 16.10         | 47.22                  | 74.00          | -26.78      | Peak     | Vertical     |
| *    | 13964.20        | 29.24                | 18.95         | 48.19                  | 68.20          | -20.01      | Peak     | Vertical     |
| *    | 15043.70        | 31.03                | 18.09         | 49.12                  | 68.20          | -19.08      | Peak     | Vertical     |
|      | 17955.80        | 15.45                | 28.51         | 43.96                  | 54.00          | -10.04      | Average  | Vertical     |
|      | 17955.80        | 30.29                | 28.51         | 58.80                  | 74.00          | -15.20      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE80 - Channel 138 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11608.00        | 30.50                | 16.35         | 46.85                  | 74.00          | -27.15      | Peak     | Horizontal   |
| *    | 13845.20        | 30.57                | 18.54         | 49.11                  | 68.20          | -19.09      | Peak     | Horizontal   |
| *    | 14802.30        | 29.97                | 19.17         | 49.14                  | 68.20          | -19.06      | Peak     | Horizontal   |
|      | 17949.00        | 15.42                | 28.64         | 44.06                  | 54.00          | -9.94       | Average  | Horizontal   |
|      | 17949.00        | 30.49                | 28.64         | 59.13                  | 74.00          | -14.87      | Peak     | Horizontal   |
|      | 11528.10        | 31.00                | 16.34         | 47.34                  | 74.00          | -26.66      | Peak     | Vertical     |
| *    | 13816.30        | 29.61                | 18.75         | 48.36                  | 68.20          | -19.84      | Peak     | Vertical     |
| *    | 14860.10        | 29.78                | 18.60         | 48.38                  | 68.20          | -19.82      | Peak     | Vertical     |
|      | 17933.70        | 15.24                | 28.49         | 43.73                  | 54.00          | -10.27      | Average  | Vertical     |
|      | 17933.70        | 30.59                | 28.49         | 59.08                  | 74.00          | -14.92      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11ax-HE80 - Channel 155 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10531.90        | 32.96                | 14.46         | 47.42                  | 68.20          | -20.78      | Peak     | Horizontal   |
|      | 11628.40        | 30.57                | 16.28         | 46.85                  | 74.00          | -27.15      | Peak     | Horizontal   |
| *    | 13714.30        | 31.03                | 18.45         | 49.48                  | 68.20          | -18.72      | Peak     | Horizontal   |
|      | 17940.50        | 15.45                | 28.55         | 44.00                  | 54.00          | -10.00      | Average  | Horizontal   |
|      | 17940.50        | 31.07                | 28.55         | 59.62                  | 74.00          | -14.38      | Peak     | Horizontal   |
|      | 11053.80        | 31.92                | 15.78         | 47.70                  | 74.00          | -26.30      | Peak     | Vertical     |
| *    | 13644.60        | 31.46                | 18.25         | 49.71                  | 68.20          | -18.49      | Peak     | Vertical     |
| *    | 14895.80        | 31.12                | 18.84         | 49.96                  | 68.20          | -18.24      | Peak     | Vertical     |
|      | 17857.20        | 15.42                | 28.61         | 44.03                  | 54.00          | -9.97       | Average  | Vertical     |
|      | 17857.20        | 30.54                | 28.61         | 59.15                  | 74.00          | -14.85      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11699.80        | 31.82                | 16.25         | 48.07                  | 74.00          | -25.93      | Peak     | Horizontal   |
| *    | 13804.40        | 30.97                | 18.76         | 49.73                  | 68.20          | -18.47      | Peak     | Horizontal   |
| *    | 14980.80        | 31.39                | 18.45         | 49.84                  | 68.20          | -18.36      | Peak     | Horizontal   |
|      | 17969.40        | 15.42                | 28.21         | 43.63                  | 54.00          | -10.37      | Average  | Horizontal   |
|      | 17969.40        | 31.24                | 28.21         | 59.45                  | 74.00          | -14.55      | Peak     | Horizontal   |
|      | 11052.10        | 31.70                | 15.80         | 47.50                  | 74.00          | -26.50      | Peak     | Vertical     |
| *    | 13588.50        | 30.78                | 17.84         | 48.62                  | 68.20          | -19.58      | Peak     | Vertical     |
| *    | 14984.20        | 31.51                | 18.47         | 49.98                  | 68.20          | -18.22      | Peak     | Vertical     |
|      | 17994.90        | 15.44                | 27.91         | 43.35                  | 54.00          | -10.65      | Average  | Vertical     |
|      | 17994.90        | 31.63                | 27.91         | 59.54                  | 74.00          | -14.46      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11531.50        | 30.73                | 16.33         | 47.06                  | 74.00          | -26.94      | Peak     | Horizontal   |
| *    | 13790.80        | 30.85                | 18.57         | 49.42                  | 68.20          | -18.78      | Peak     | Horizontal   |
| *    | 15057.30        | 31.23                | 18.14         | 49.37                  | 68.20          | -18.83      | Peak     | Horizontal   |
|      | 17853.80        | 15.23                | 28.60         | 43.83                  | 54.00          | -10.17      | Average  | Horizontal   |
|      | 17853.80        | 30.39                | 28.60         | 58.99                  | 74.00          | -15.01      | Peak     | Horizontal   |
|      | 11288.40        | 30.85                | 16.17         | 47.02                  | 74.00          | -26.98      | Peak     | Vertical     |
| *    | 13748.30        | 29.80                | 18.27         | 48.07                  | 68.20          | -20.13      | Peak     | Vertical     |
| *    | 14979.10        | 30.86                | 18.44         | 49.30                  | 68.20          | -18.90      | Peak     | Vertical     |
|      | 17947.30        | 15.46                | 28.63         | 44.09                  | 54.00          | -9.91       | Average  | Vertical     |
|      | 17947.30        | 31.27                | 28.63         | 59.90                  | 74.00          | -14.10      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11614.80        | 31.05                | 16.32         | 47.37                  | 74.00          | -26.63      | Peak     | Horizontal   |
| *    | 13882.60        | 29.80                | 18.79         | 48.59                  | 68.20          | -19.61      | Peak     | Horizontal   |
| *    | 15008.00        | 31.91                | 18.31         | 50.22                  | 68.20          | -17.98      | Peak     | Horizontal   |
|      | 17845.30        | 15.49                | 28.52         | 44.01                  | 54.00          | -9.99       | Average  | Horizontal   |
|      | 17845.30        | 30.77                | 28.52         | 59.29                  | 74.00          | -14.71      | Peak     | Horizontal   |
|      | 11242.50        | 31.56                | 16.06         | 47.62                  | 74.00          | -26.38      | Peak     | Vertical     |
| *    | 13748.30        | 30.18                | 18.27         | 48.45                  | 68.20          | -19.75      | Peak     | Vertical     |
| *    | 14989.30        | 31.28                | 18.48         | 49.76                  | 68.20          | -18.44      | Peak     | Vertical     |
|      | 17950.70        | 15.36                | 28.61         | 43.97                  | 54.00          | -10.03      | Average  | Vertical     |
|      | 17950.70        | 30.24                | 28.61         | 58.85                  | 74.00          | -15.15      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 52 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11575.70        | 30.68                | 16.36         | 47.04                  | 74.00          | -26.96      | Peak     | Horizontal   |
| *    | 13787.40        | 30.24                | 18.52         | 48.76                  | 68.20          | -19.44      | Peak     | Horizontal   |
| *    | 14892.40        | 29.20                | 18.83         | 48.03                  | 68.20          | -20.17      | Peak     | Horizontal   |
|      | 17949.00        | 15.69                | 28.64         | 44.33                  | 54.00          | -9.67       | Average  | Horizontal   |
|      | 17949.00        | 29.72                | 28.64         | 58.36                  | 74.00          | -15.64      | Peak     | Horizontal   |
|      | 11602.90        | 31.00                | 16.38         | 47.38                  | 74.00          | -26.62      | Peak     | Vertical     |
| *    | 13700.70        | 27.94                | 18.43         | 46.37                  | 68.20          | -21.83      | Peak     | Vertical     |
| *    | 14795.50        | 27.30                | 19.15         | 46.45                  | 68.20          | -21.75      | Peak     | Vertical     |
|      | 17836.80        | 15.98                | 28.00         | 43.98                  | 54.00          | -10.02      | Average  | Vertical     |
|      | 17836.80        | 28.59                | 28.00         | 56.59                  | 74.00          | -17.41      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 60 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11567.20        | 30.74                | 16.32         | 47.06                  | 74.00          | -26.94      | Peak     | Horizontal   |
| *    | 13865.60        | 29.82                | 18.67         | 48.49                  | 68.20          | -19.71      | Peak     | Horizontal   |
| *    | 14904.30        | 30.28                | 18.86         | 49.14                  | 68.20          | -19.06      | Peak     | Horizontal   |
|      | 17918.40        | 15.36                | 28.03         | 43.39                  | 54.00          | -10.61      | Average  | Horizontal   |
|      | 17918.40        | 29.52                | 28.03         | 57.55                  | 74.00          | -16.45      | Peak     | Horizontal   |
|      | 11517.90        | 30.26                | 16.37         | 46.63                  | 74.00          | -27.37      | Peak     | Vertical     |
| *    | 14107.00        | 29.36                | 18.90         | 48.26                  | 68.20          | -19.94      | Peak     | Vertical     |
| *    | 15074.30        | 30.25                | 18.26         | 48.51                  | 68.20          | -19.69      | Peak     | Vertical     |
|      | 17908.20        | 15.33                | 27.73         | 43.06                  | 54.00          | -10.94      | Average  | Vertical     |
|      | 17908.20        | 29.66                | 27.73         | 57.39                  | 74.00          | -16.61      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 64 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11514.50        | 30.96                | 16.38         | 47.34                  | 74.00          | -26.66      | Peak     | Horizontal   |
| *    | 13884.30        | 29.33                | 18.80         | 48.13                  | 68.20          | -20.07      | Peak     | Horizontal   |
| *    | 14819.30        | 30.41                | 19.09         | 49.50                  | 68.20          | -18.70      | Peak     | Horizontal   |
|      | 17930.30        | 15.45                | 28.42         | 43.87                  | 54.00          | -10.13      | Average  | Horizontal   |
|      | 17930.30        | 28.84                | 28.42         | 57.26                  | 74.00          | -16.74      | Peak     | Horizontal   |
|      | 11572.30        | 31.25                | 16.34         | 47.59                  | 74.00          | -26.41      | Peak     | Vertical     |
| *    | 13818.00        | 29.30                | 18.74         | 48.04                  | 68.20          | -20.16      | Peak     | Vertical     |
| *    | 14763.20        | 28.14                | 18.90         | 47.04                  | 68.20          | -21.16      | Peak     | Vertical     |
|      | 17840.20        | 15.33                | 28.21         | 43.54                  | 54.00          | -10.46      | Average  | Vertical     |
|      | 17840.20        | 30.00                | 28.21         | 58.21                  | 74.00          | -15.79      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 100 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11235.70        | 31.04                | 16.11         | 47.15                  | 74.00          | -26.85      | Peak     | Horizontal   |
| *    | 13700.70        | 27.72                | 18.43         | 46.15                  | 68.20          | -22.05      | Peak     | Horizontal   |
| *    | 14826.10        | 27.37                | 18.96         | 46.33                  | 68.20          | -21.87      | Peak     | Horizontal   |
|      | 17928.60        | 15.11                | 28.34         | 43.45                  | 54.00          | -10.55      | Average  | Horizontal   |
|      | 17928.60        | 28.96                | 28.34         | 57.30                  | 74.00          | -16.70      | Peak     | Horizontal   |
|      | 11597.80        | 30.63                | 16.39         | 47.02                  | 74.00          | -26.98      | Peak     | Vertical     |
| *    | 13760.20        | 30.59                | 18.27         | 48.86                  | 68.20          | -19.34      | Peak     | Vertical     |
| *    | 15018.20        | 28.93                | 18.13         | 47.06                  | 68.20          | -21.14      | Peak     | Vertical     |
|      | 17874.20        | 15.96                | 27.90         | 43.86                  | 54.00          | -10.14      | Average  | Vertical     |
|      | 17874.20        | 29.50                | 27.90         | 57.40                  | 74.00          | -16.60      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 116 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11572.30        | 31.08                | 16.34         | 47.42                  | 74.00          | -26.58      | Peak     | Horizontal   |
| *    | 13901.30        | 29.26                | 18.81         | 48.07                  | 68.20          | -20.13      | Peak     | Horizontal   |
| *    | 14724.10        | 29.39                | 19.18         | 48.57                  | 68.20          | -19.63      | Peak     | Horizontal   |
|      | 17857.20        | 13.68                | 28.61         | 42.29                  | 54.00          | -11.71      | Average  | Horizontal   |
|      | 17857.20        | 28.82                | 28.61         | 57.43                  | 74.00          | -16.57      | Peak     | Horizontal   |
|      | 11796.70        | 30.73                | 16.14         | 46.87                  | 74.00          | -27.13      | Peak     | Vertical     |
| *    | 13930.20        | 28.82                | 18.66         | 47.48                  | 68.20          | -20.72      | Peak     | Vertical     |
| *    | 15106.60        | 29.77                | 17.95         | 47.72                  | 68.20          | -20.48      | Peak     | Vertical     |
|      | 17862.30        | 15.60                | 28.52         | 44.12                  | 54.00          | -9.88       | Average  | Vertical     |
|      | 17862.30        | 29.05                | 28.52         | 57.57                  | 74.00          | -16.43      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 140 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11033.40        | 31.16                | 15.98         | 47.14                  | 74.00          | -26.86      | Peak     | Horizontal   |
| *    | 13858.80        | 31.21                | 18.58         | 49.79                  | 68.20          | -18.41      | Peak     | Horizontal   |
| *    | 14753.00        | 30.68                | 18.88         | 49.56                  | 68.20          | -18.64      | Peak     | Horizontal   |
|      | 17964.30        | 15.36                | 28.35         | 43.71                  | 54.00          | -10.29      | Average  | Horizontal   |
|      | 17964.30        | 29.80                | 28.35         | 58.15                  | 74.00          | -15.85      | Peak     | Horizontal   |
|      | 11613.10        | 31.01                | 16.33         | 47.34                  | 74.00          | -26.66      | Peak     | Vertical     |
| *    | 13855.40        | 30.18                | 18.54         | 48.72                  | 68.20          | -19.48      | Peak     | Vertical     |
| *    | 14732.60        | 30.02                | 19.07         | 49.09                  | 68.20          | -19.11      | Peak     | Vertical     |
|      | 17952.40        | 15.36                | 28.58         | 43.94                  | 54.00          | -10.06      | Average  | Vertical     |
|      | 17952.40        | 29.38                | 28.58         | 57.96                  | 74.00          | -16.04      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 144 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10951.80        | 31.04                | 15.82         | 46.86                  | 74.00          | -27.14      | Peak     | Horizontal   |
| *    | 13909.80        | 29.34                | 18.78         | 48.12                  | 68.20          | -20.08      | Peak     | Horizontal   |
| *    | 14926.40        | 29.40                | 18.53         | 47.93                  | 68.20          | -20.27      | Peak     | Horizontal   |
|      | 17942.20        | 15.63                | 28.57         | 44.20                  | 54.00          | -9.80       | Average  | Horizontal   |
|      | 17942.20        | 29.03                | 28.57         | 57.60                  | 74.00          | -16.40      | Peak     | Horizontal   |
|      | 11327.50        | 31.02                | 16.26         | 47.28                  | 74.00          | -26.72      | Peak     | Vertical     |
| *    | 13763.60        | 30.18                | 18.27         | 48.45                  | 68.20          | -19.75      | Peak     | Vertical     |
| *    | 14904.30        | 29.07                | 18.86         | 47.93                  | 68.20          | -20.27      | Peak     | Vertical     |
|      | 17862.30        | 15.44                | 28.52         | 43.96                  | 54.00          | -10.04      | Average  | Vertical     |
|      | 17862.30        | 29.95                | 28.52         | 58.47                  | 74.00          | -15.53      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11482.20        | 24.69                | 16.37         | 41.06                  | 54.00          | -12.94      | Average  | Horizontal   |
|      | 11482.20        | 35.10                | 16.37         | 51.47                  | 74.00          | -22.53      | Peak     | Horizontal   |
| *    | 13818.00        | 30.13                | 18.74         | 48.87                  | 68.20          | -19.33      | Peak     | Horizontal   |
| *    | 15001.20        | 30.85                | 18.36         | 49.21                  | 68.20          | -18.99      | Peak     | Horizontal   |
|      | 17857.20        | 15.93                | 28.61         | 44.54                  | 54.00          | -9.46       | Average  | Horizontal   |
|      | 17857.20        | 30.23                | 28.61         | 58.84                  | 74.00          | -15.16      | Peak     | Vertical     |
|      | 11227.20        | 31.60                | 16.17         | 47.77                  | 74.00          | -26.23      | Peak     | Vertical     |
| *    | 13780.60        | 30.93                | 18.41         | 49.34                  | 68.20          | -18.86      | Peak     | Vertical     |
| *    | 14722.40        | 30.94                | 19.20         | 50.14                  | 68.20          | -18.06      | Peak     | Vertical     |
|      | 17993.20        | 15.32                | 27.90         | 43.22                  | 54.00          | -10.78      | Average  | Vertical     |
|      | 17993.20        | 31.40                | 27.90         | 59.30                  | 74.00          | -14.70      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11567.20        | 30.54                | 16.32         | 46.86                  | 74.00          | -27.14      | Peak     | Horizontal   |
| *    | 13707.50        | 29.55                | 18.44         | 47.99                  | 68.20          | -20.21      | Peak     | Horizontal   |
| *    | 14906.00        | 30.31                | 18.84         | 49.15                  | 68.20          | -19.05      | Peak     | Horizontal   |
|      | 17847.00        | 15.36                | 28.53         | 43.89                  | 54.00          | -10.11      | Average  | Horizontal   |
|      | 17847.00        | 30.95                | 28.53         | 59.48                  | 74.00          | -14.52      | Peak     | Horizontal   |
|      | 11427.80        | 30.29                | 16.36         | 46.65                  | 74.00          | -27.35      | Peak     | Vertical     |
| *    | 13792.50        | 29.96                | 18.59         | 48.55                  | 68.20          | -19.65      | Peak     | Vertical     |
| *    | 14919.60        | 29.87                | 18.64         | 48.51                  | 68.20          | -19.69      | Peak     | Vertical     |
|      | 17838.50        | 15.36                | 28.11         | 43.47                  | 54.00          | -10.53      | Average  | Vertical     |
|      | 17838.50        | 30.99                | 28.11         | 59.10                  | 74.00          | -14.90      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT20 - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11336.00        | 30.56                | 16.18         | 46.74                  | 74.00          | -27.26      | Peak     | Horizontal   |
| *    | 13809.50        | 29.28                | 18.76         | 48.04                  | 68.20          | -20.16      | Peak     | Horizontal   |
| *    | 14787.00        | 30.33                | 19.11         | 49.44                  | 68.20          | -18.76      | Peak     | Horizontal   |
|      | 17926.90        | 15.24                | 28.28         | 43.52                  | 54.00          | -10.48      | Average  | Horizontal   |
|      | 17926.90        | 31.05                | 28.28         | 59.33                  | 74.00          | -14.67      | Peak     | Horizontal   |
|      | 11602.90        | 31.10                | 16.38         | 47.48                  | 74.00          | -26.52      | Peak     | Vertical     |
| *    | 13897.90        | 27.89                | 18.82         | 46.71                  | 68.20          | -21.49      | Peak     | Vertical     |
| *    | 14917.90        | 28.91                | 18.66         | 47.57                  | 68.20          | -20.63      | Peak     | Vertical     |
|      | 17940.50        | 15.36                | 28.55         | 43.91                  | 54.00          | -10.09      | Average  | Vertical     |
|      | 17940.50        | 30.40                | 28.55         | 58.95                  | 74.00          | -15.05      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 38 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11693.00        | 30.31                | 16.28         | 46.59                  | 74.00          | -27.41      | Peak     | Horizontal   |
| *    | 13736.40        | 30.20                | 18.37         | 48.57                  | 68.20          | -19.63      | Peak     | Horizontal   |
| *    | 14797.20        | 29.31                | 19.16         | 48.47                  | 68.20          | -19.73      | Peak     | Horizontal   |
|      | 17937.10        | 15.32                | 28.52         | 43.84                  | 54.00          | -10.16      | Average  | Horizontal   |
|      | 17937.10        | 29.91                | 28.52         | 58.43                  | 74.00          | -15.57      | Peak     | Horizontal   |
|      | 11269.70        | 30.92                | 15.99         | 46.91                  | 74.00          | -27.09      | Peak     | Vertical     |
| *    | 13620.80        | 30.97                | 18.31         | 49.28                  | 68.20          | -18.92      | Peak     | Vertical     |
| *    | 14904.30        | 30.84                | 18.86         | 49.70                  | 68.20          | -18.50      | Peak     | Vertical     |
|      | 17930.30        | 15.25                | 28.42         | 43.67                  | 54.00          | -10.33      | Average  | Vertical     |
|      | 17930.30        | 31.32                | 28.42         | 59.74                  | 74.00          | -14.26      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 46 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11701.50        | 31.03                | 16.24         | 47.27                  | 74.00          | -26.73      | Peak     | Horizontal   |
| *    | 13925.10        | 30.39                | 18.66         | 49.05                  | 68.20          | -19.15      | Peak     | Horizontal   |
| *    | 14846.50        | 30.03                | 18.64         | 48.67                  | 68.20          | -19.53      | Peak     | Horizontal   |
|      | 17916.70        | 15.32                | 27.98         | 43.30                  | 54.00          | -10.70      | Average  | Horizontal   |
|      | 17916.70        | 30.55                | 27.98         | 58.53                  | 74.00          | -15.47      | Peak     | Horizontal   |
|      | 11619.90        | 30.57                | 16.30         | 46.87                  | 74.00          | -27.13      | Peak     | Vertical     |
| *    | 13748.30        | 30.23                | 18.27         | 48.50                  | 68.20          | -19.70      | Peak     | Vertical     |
| *    | 14768.30        | 30.40                | 18.92         | 49.32                  | 68.20          | -18.88      | Peak     | Vertical     |
|      | 17998.30        | 15.96                | 27.92         | 43.88                  | 54.00          | -10.12      | Average  | Vertical     |
|      | 17998.30        | 30.68                | 27.92         | 58.60                  | 74.00          | -15.40      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 54 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11978.60        | 30.94                | 16.00         | 46.94                  | 74.00          | -27.06      | Peak     | Horizontal   |
| *    | 13721.10        | 29.43                | 18.43         | 47.86                  | 68.20          | -20.34      | Peak     | Horizontal   |
| *    | 14904.30        | 29.72                | 18.86         | 48.58                  | 68.20          | -19.62      | Peak     | Horizontal   |
|      | 17942.20        | 15.36                | 28.57         | 43.93                  | 54.00          | -10.07      | Average  | Horizontal   |
|      | 17942.20        | 30.39                | 28.57         | 58.96                  | 74.00          | -15.04      | Peak     | Horizontal   |
|      | 11104.80        | 31.78                | 15.96         | 47.74                  | 74.00          | -26.26      | Peak     | Vertical     |
| *    | 13734.70        | 30.60                | 18.38         | 48.98                  | 68.20          | -19.22      | Peak     | Vertical     |
| *    | 14759.80        | 30.74                | 18.89         | 49.63                  | 68.20          | -18.57      | Peak     | Vertical     |
|      | 17889.50        | 15.36                | 27.37         | 42.73                  | 54.00          | -11.27      | Average  | Vertical     |
|      | 17889.50        | 30.43                | 27.37         | 57.80                  | 74.00          | -16.20      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 62 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11623.30        | 30.65                | 16.29         | 46.94                  | 74.00          | -27.06      | Peak     | Horizontal   |
| *    | 13792.50        | 30.40                | 18.59         | 48.99                  | 68.20          | -19.21      | Peak     | Horizontal   |
| *    | 14917.90        | 30.49                | 18.66         | 49.15                  | 68.20          | -19.05      | Peak     | Horizontal   |
|      | 17933.70        | 15.95                | 28.49         | 44.44                  | 54.00          | -9.56       | Average  | Horizontal   |
|      | 17933.70        | 29.79                | 28.49         | 58.28                  | 74.00          | -15.72      | Peak     | Horizontal   |
|      | 11133.70        | 31.47                | 16.16         | 47.63                  | 74.00          | -26.37      | Peak     | Vertical     |
| *    | 13717.70        | 29.59                | 18.46         | 48.05                  | 68.20          | -20.15      | Peak     | Vertical     |
| *    | 14829.50        | 30.03                | 18.90         | 48.93                  | 68.20          | -19.27      | Peak     | Vertical     |
|      | 17960.90        | 15.25                | 28.42         | 43.67                  | 54.00          | -10.33      | Average  | Vertical     |
|      | 17960.90        | 31.22                | 28.42         | 59.64                  | 74.00          | -14.36      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 102 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11336.00        | 31.35                | 16.18         | 47.53                  | 74.00          | -26.47      | Peak     | Horizontal   |
| *    | 13784.00        | 30.01                | 18.46         | 48.47                  | 68.20          | -19.73      | Peak     | Horizontal   |
| *    | 14980.80        | 30.49                | 18.45         | 48.94                  | 68.20          | -19.26      | Peak     | Horizontal   |
|      | 17940.50        | 15.45                | 28.55         | 44.00                  | 54.00          | -10.00      | Average  | Horizontal   |
|      | 17940.50        | 30.56                | 28.55         | 59.11                  | 74.00          | -14.89      | Peak     | Horizontal   |
|      | 11619.90        | 30.36                | 16.30         | 46.66                  | 74.00          | -27.34      | Peak     | Vertical     |
| *    | 13780.60        | 30.19                | 18.41         | 48.60                  | 68.20          | -19.60      | Peak     | Vertical     |
| *    | 14929.80        | 31.08                | 18.47         | 49.55                  | 68.20          | -18.65      | Peak     | Vertical     |
|      | 17949.00        | 15.49                | 28.64         | 44.13                  | 54.00          | -9.87       | Average  | Vertical     |
|      | 17949.00        | 31.96                | 28.64         | 60.60                  | 74.00          | -13.40      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 110 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11014.70        | 31.54                | 15.86         | 47.40                  | 74.00          | -26.60      | Peak     | Horizontal   |
| *    | 13802.70        | 29.93                | 18.75         | 48.68                  | 68.20          | -19.52      | Peak     | Horizontal   |
| *    | 14722.40        | 29.42                | 19.20         | 48.62                  | 68.20          | -19.58      | Peak     | Horizontal   |
|      | 17915.00        | 15.88                | 27.93         | 43.81                  | 54.00          | -10.19      | Average  | Horizontal   |
|      | 17915.00        | 30.56                | 27.93         | 58.49                  | 74.00          | -15.51      | Peak     | Horizontal   |
|      | 11120.10        | 30.89                | 16.16         | 47.05                  | 74.00          | -26.95      | Peak     | Vertical     |
| *    | 13790.80        | 30.69                | 18.57         | 49.26                  | 68.20          | -18.94      | Peak     | Vertical     |
| *    | 14924.70        | 29.58                | 18.56         | 48.14                  | 68.20          | -20.06      | Peak     | Vertical     |
|      | 17991.50        | 15.36                | 27.89         | 43.25                  | 54.00          | -10.75      | Average  | Vertical     |
|      | 17991.50        | 29.74                | 27.89         | 57.63                  | 74.00          | -16.37      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 134 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11390.40        | 31.38                | 16.30         | 47.68                  | 74.00          | -26.32      | Peak     | Horizontal   |
| *    | 13865.60        | 29.74                | 18.67         | 48.41                  | 68.20          | -19.79      | Peak     | Horizontal   |
| *    | 14719.00        | 29.70                | 19.25         | 48.95                  | 68.20          | -19.25      | Peak     | Horizontal   |
|      | 17955.80        | 15.78                | 28.51         | 44.29                  | 54.00          | -9.71       | Average  | Horizontal   |
|      | 17955.80        | 28.94                | 28.51         | 57.45                  | 74.00          | -16.55      | Peak     | Horizontal   |
|      | 11625.00        | 31.00                | 16.28         | 47.28                  | 74.00          | -26.72      | Peak     | Vertical     |
| *    | 13727.90        | 29.29                | 18.40         | 47.69                  | 68.20          | -20.51      | Peak     | Vertical     |
| *    | 15001.20        | 30.03                | 18.36         | 48.39                  | 68.20          | -19.81      | Peak     | Vertical     |
|      | 17938.80        | 15.45                | 28.53         | 43.98                  | 54.00          | -10.02      | Average  | Vertical     |
|      | 17938.80        | 28.58                | 28.53         | 57.11                  | 74.00          | -16.89      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 142 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11135.40        | 31.92                | 16.16         | 48.08                  | 74.00          | -25.92      | Peak     | Horizontal   |
| *    | 13631.00        | 31.27                | 18.37         | 49.64                  | 68.20          | -18.56      | Peak     | Horizontal   |
| *    | 14787.00        | 29.54                | 19.11         | 48.65                  | 68.20          | -19.55      | Peak     | Horizontal   |
|      | 17955.80        | 15.36                | 28.51         | 43.87                  | 54.00          | -10.13      | Average  | Horizontal   |
|      | 17955.80        | 28.64                | 28.51         | 57.15                  | 74.00          | -16.85      | Peak     | Horizontal   |
|      | 11121.80        | 31.53                | 16.16         | 47.69                  | 74.00          | -26.31      | Peak     | Vertical     |
| *    | 13855.40        | 30.70                | 18.54         | 49.24                  | 68.20          | -18.96      | Peak     | Vertical     |
| *    | 14812.50        | 30.89                | 19.13         | 50.02                  | 68.20          | -18.18      | Peak     | Vertical     |
|      | 17923.50        | 15.47                | 28.18         | 43.65                  | 54.00          | -10.35      | Average  | Vertical     |
|      | 17923.50        | 28.97                | 28.18         | 57.15                  | 74.00          | -16.85      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 151 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11516.20        | 32.96                | 16.38         | 49.34                  | 74.00          | -24.66      | Peak     | Horizontal   |
| *    | 13896.20        | 30.52                | 18.82         | 49.34                  | 68.20          | -18.86      | Peak     | Horizontal   |
| *    | 14824.40        | 30.31                | 19.00         | 49.31                  | 68.20          | -18.89      | Peak     | Horizontal   |
|      | 17950.70        | 15.49                | 28.61         | 44.10                  | 54.00          | -9.90       | Average  | Horizontal   |
|      | 17950.70        | 30.92                | 28.61         | 59.53                  | 74.00          | -14.47      | Peak     | Horizontal   |
|      | 11516.20        | 31.69                | 16.38         | 48.07                  | 74.00          | -25.93      | Peak     | Vertical     |
| *    | 13904.70        | 30.30                | 18.80         | 49.10                  | 68.20          | -19.10      | Peak     | Vertical     |
| *    | 15152.50        | 32.53                | 18.23         | 50.76                  | 68.20          | -17.44      | Peak     | Vertical     |
|      | 17930.30        | 15.46                | 28.42         | 43.88                  | 54.00          | -10.12      | Average  | Vertical     |
|      | 17930.30        | 31.05                | 28.42         | 59.47                  | 74.00          | -14.53      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT40 - Channel 159 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11696.40        | 30.51                | 16.26         | 46.77                  | 74.00          | -27.23      | Peak     | Horizontal   |
| *    | 14037.30        | 29.60                | 18.91         | 48.51                  | 68.20          | -19.69      | Peak     | Horizontal   |
| *    | 15018.20        | 31.29                | 18.13         | 49.42                  | 68.20          | -18.78      | Peak     | Horizontal   |
|      | 17960.90        | 15.46                | 28.42         | 43.88                  | 54.00          | -10.12      | Average  | Horizontal   |
|      | 17960.90        | 30.17                | 28.42         | 58.59                  | 74.00          | -15.41      | Peak     | Horizontal   |
|      | 12112.90        | 32.12                | 16.09         | 48.21                  | 74.00          | -25.79      | Peak     | Vertical     |
| *    | 13642.90        | 30.20                | 18.27         | 48.47                  | 68.20          | -19.73      | Peak     | Vertical     |
| *    | 14997.80        | 30.77                | 18.40         | 49.17                  | 68.20          | -19.03      | Peak     | Vertical     |
|      | 17952.40        | 15.46                | 28.58         | 44.04                  | 54.00          | -9.96       | Average  | Vertical     |
|      | 17952.40        | 30.90                | 28.58         | 59.48                  | 74.00          | -14.52      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT80 - Channel 42 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 10955.20        | 32.44                | 15.77         | 48.21                  | 74.00          | -25.79      | Peak     | Horizontal   |
| *    | 13869.00        | 29.69                | 18.70         | 48.39                  | 68.20          | -19.81      | Peak     | Horizontal   |
| *    | 14853.30        | 30.04                | 18.56         | 48.60                  | 68.20          | -19.60      | Peak     | Horizontal   |
|      | 17949.00        | 15.46                | 28.64         | 44.10                  | 54.00          | -9.90       | Average  | Horizontal   |
|      | 17949.00        | 30.54                | 28.64         | 59.18                  | 74.00          | -14.82      | Peak     | Horizontal   |
|      | 11475.40        | 30.60                | 16.33         | 46.93                  | 74.00          | -27.07      | Peak     | Vertical     |
| *    | 13801.00        | 30.43                | 18.72         | 49.15                  | 68.20          | -19.05      | Peak     | Vertical     |
| *    | 14785.30        | 30.90                | 19.10         | 50.00                  | 68.20          | -18.20      | Peak     | Vertical     |
|      | 17949.00        | 15.36                | 28.64         | 44.00                  | 54.00          | -10.00      | Average  | Vertical     |
|      | 17949.00        | 30.43                | 28.64         | 59.07                  | 74.00          | -14.93      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                               |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                        | Test Engineer | Ajin Fan/Dick Shen          |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                       | Test Mode     | 802.11be-EHT80 - Channel 58 |
| Remark    | Average measurement was not performed if peak level lower than average limit.<br>Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11956.50        | 31.27                | 15.95         | 47.22                  | 74.00          | -26.78      | Peak     | Horizontal   |
| *    | 13806.10        | 30.76                | 18.76         | 49.52                  | 68.20          | -18.68      | Peak     | Horizontal   |
| *    | 14868.60        | 30.87                | 18.63         | 49.50                  | 68.20          | -18.70      | Peak     | Horizontal   |
|      | 17962.60        | 15.33                | 28.38         | 43.71                  | 54.00          | -10.29      | Average  | Horizontal   |
|      | 17962.60        | 31.75                | 28.38         | 60.13                  | 74.00          | -13.87      | Peak     | Horizontal   |
|      | 11426.10        | 30.93                | 16.37         | 47.30                  | 74.00          | -26.70      | Peak     | Vertical     |
| *    | 13833.30        | 28.14                | 18.61         | 46.75                  | 68.20          | -21.45      | Peak     | Vertical     |
| *    | 14673.10        | 28.55                | 18.99         | 47.54                  | 68.20          | -20.66      | Peak     | Vertical     |
|      | 17996.60        | 15.46                | 27.91         | 43.37                  | 54.00          | -10.63      | Average  | Vertical     |
|      | 17996.60        | 31.42                | 27.91         | 59.33                  | 74.00          | -14.67      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                               |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                        | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                       | Test Mode     | 802.11be-EHT80 - Channel 106 |
| Remark    | Average measurement was not performed if peak level lower than average limit.<br>Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11674.30        | 31.16                | 16.38         | 47.54                  | 74.00          | -26.46      | Peak     | Horizontal   |
| *    | 13619.10        | 30.91                | 18.30         | 49.21                  | 68.20          | -18.99      | Peak     | Horizontal   |
| *    | 14997.80        | 30.72                | 18.40         | 49.12                  | 68.20          | -19.08      | Peak     | Horizontal   |
|      | 17926.90        | 15.46                | 28.28         | 43.74                  | 54.00          | -10.26      | Average  | Horizontal   |
|      | 17926.90        | 31.81                | 28.28         | 60.09                  | 74.00          | -13.91      | Peak     | Horizontal   |
|      | 11664.10        | 31.23                | 16.37         | 47.60                  | 74.00          | -26.40      | Peak     | Vertical     |
| *    | 13644.60        | 29.70                | 18.25         | 47.95                  | 68.20          | -20.25      | Peak     | Vertical     |
| *    | 14997.80        | 31.00                | 18.40         | 49.40                  | 68.20          | -18.80      | Peak     | Vertical     |
|      | 17892.90        | 15.36                | 27.29         | 42.65                  | 54.00          | -11.35      | Average  | Vertical     |
|      | 17892.90        | 31.54                | 27.29         | 58.83                  | 74.00          | -15.17      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT80 - Channel 122 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 12048.30        | 31.30                | 16.00         | 47.30                  | 74.00          | -26.70      | Peak     | Horizontal   |
| *    | 13887.70        | 30.21                | 18.83         | 49.04                  | 68.20          | -19.16      | Peak     | Horizontal   |
| *    | 14815.90        | 29.94                | 19.12         | 49.06                  | 68.20          | -19.14      | Peak     | Horizontal   |
|      | 17966.00        | 15.34                | 28.30         | 43.64                  | 54.00          | -10.36      | Average  | Horizontal   |
|      | 17966.00        | 30.71                | 28.30         | 59.01                  | 74.00          | -14.99      | Peak     | Horizontal   |
|      | 11517.90        | 31.14                | 16.37         | 47.51                  | 74.00          | -26.49      | Peak     | Vertical     |
| *    | 13707.50        | 30.78                | 18.44         | 49.22                  | 68.20          | -18.98      | Peak     | Vertical     |
| *    | 14882.20        | 30.29                | 18.78         | 49.07                  | 68.20          | -19.13      | Peak     | Vertical     |
|      | 17955.80        | 15.46                | 28.51         | 43.97                  | 54.00          | -10.03      | Average  | Vertical     |
|      | 17955.80        | 31.03                | 28.51         | 59.54                  | 74.00          | -14.46      | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT80 - Channel 138 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11404.00        | 30.74                | 16.39         | 47.13                  | 74.00          | -26.87      | Peak     | Horizontal   |
| *    | 13654.80        | 30.30                | 18.17         | 48.47                  | 68.20          | -19.73      | Peak     | Horizontal   |
| *    | 14985.90        | 30.78                | 18.47         | 49.25                  | 68.20          | -18.95      | Peak     | Horizontal   |
|      | 17974.50        | 15.46                | 28.08         | 43.54                  | 54.00          | -10.46      | Average  | Horizontal   |
|      | 17974.50        | 31.14                | 28.08         | 59.22                  | 74.00          | -14.78      | Peak     | Horizontal   |
|      | 11613.10        | 30.95                | 16.33         | 47.28                  | 74.00          | -26.72      | Peak     | Vertical     |
| *    | 13806.10        | 31.12                | 18.76         | 49.88                  | 68.20          | -18.32      | Peak     | Vertical     |
| *    | 14817.60        | 30.70                | 19.11         | 49.81                  | 68.20          | -18.39      | Peak     | Vertical     |
|      | 17996.60        | 15.26                | 27.91         | 43.17                  | 54.00          | -10.83      | Average  | Vertical     |
|      | 17996.60        | 31.09                | 27.91         | 59.00                  | 74.00          | -15.00      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Ajin Fan/Dick Shen           |
| Test Date | 2025-08-05 ~ 2025-08-22                                                                                                                                                             | Test Mode     | 802.11be-EHT80 - Channel 155 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11108.20        | 31.99                | 16.00         | 47.99                  | 74.00          | -26.01      | Peak     | Horizontal   |
| *    | 13872.40        | 30.88                | 18.71         | 49.59                  | 68.20          | -18.61      | Peak     | Horizontal   |
| *    | 14997.80        | 31.05                | 18.40         | 49.45                  | 68.20          | -18.75      | Peak     | Horizontal   |
|      | 17964.30        | 15.63                | 28.35         | 43.98                  | 54.00          | -10.02      | Average  | Horizontal   |
|      | 17964.30        | 30.77                | 28.35         | 59.12                  | 74.00          | -14.88      | Peak     | Horizontal   |
|      | 11339.40        | 31.05                | 16.15         | 47.20                  | 74.00          | -26.80      | Peak     | Vertical     |
| *    | 13639.50        | 29.82                | 18.30         | 48.12                  | 68.20          | -20.08      | Peak     | Vertical     |
| *    | 14897.50        | 30.08                | 18.85         | 48.93                  | 68.20          | -19.27      | Peak     | Vertical     |
|      | 17938.80        | 15.46                | 28.53         | 43.99                  | 54.00          | -10.01      | Average  | Vertical     |
|      | 17938.80        | 30.87                | 28.53         | 59.40                  | 74.00          | -14.60      | Peak     | Vertical     |


Note 1: “\*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 30 MHz:

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-08-06 |
| Temperature  | 24.7 °C                                | Humidity      | 54.2%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Lucas Wang |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5240 MHz |               |            |

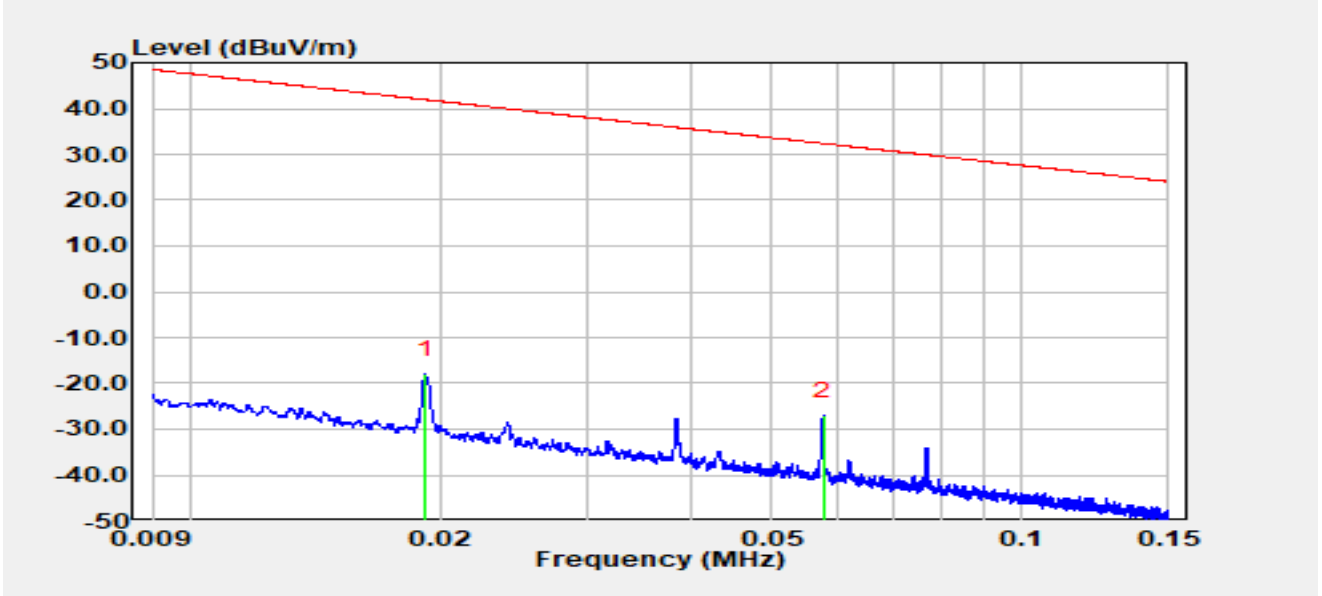


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.02            | 42.58          | -60.65     | -18.07               | -60.02      | 41.94          | Peak     |
| 2  | *    | 0.06            | 33.92          | -61.04     | -27.12               | -59.50      | 32.38          | Peak     |

Notes:

1. " \* " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-08-06 |
| Temperature  | 24.7 °C                                | Humidity      | 54.2%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Lucas Wang |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5240 MHz |               |            |

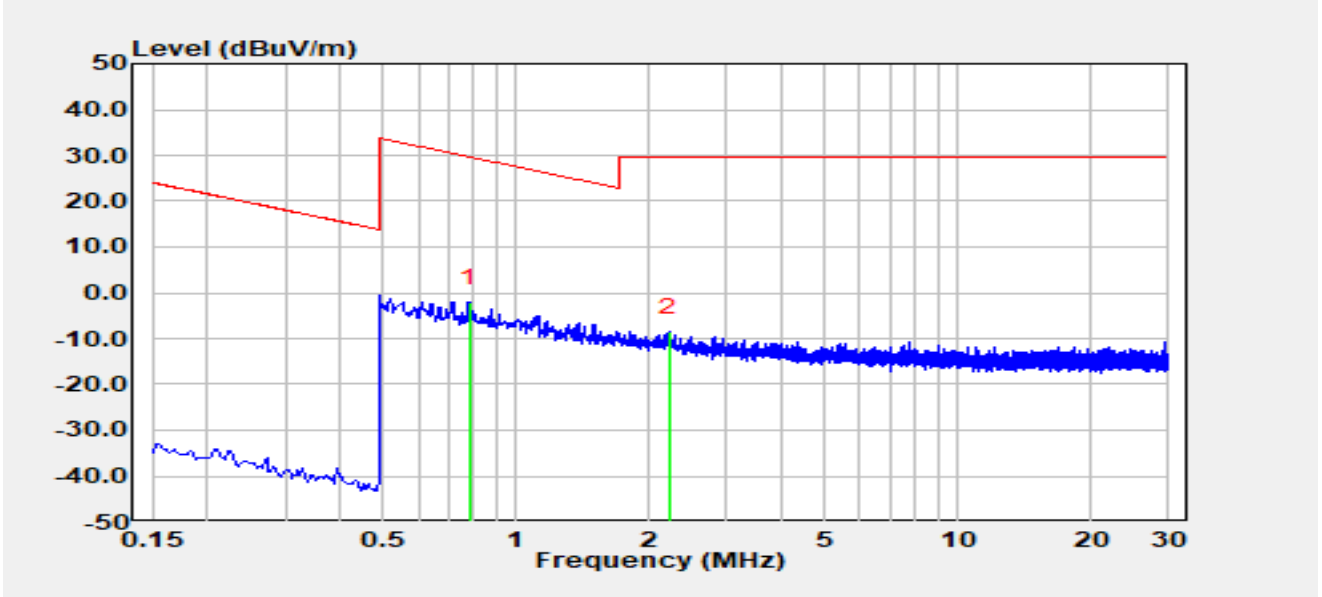


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 0.78            | 18.87          | -20.95     | -2.08                | -31.83      | 29.74          | Peak     |
| 2  |      | 2.21            | 12.13          | -20.78     | -8.65                | -38.15      | 29.50          | Peak     |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-08-06 |
| Temperature  | 24.7 °C                                | Humidity      | 54.2%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Lucas Wang |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5240 MHz |               |            |

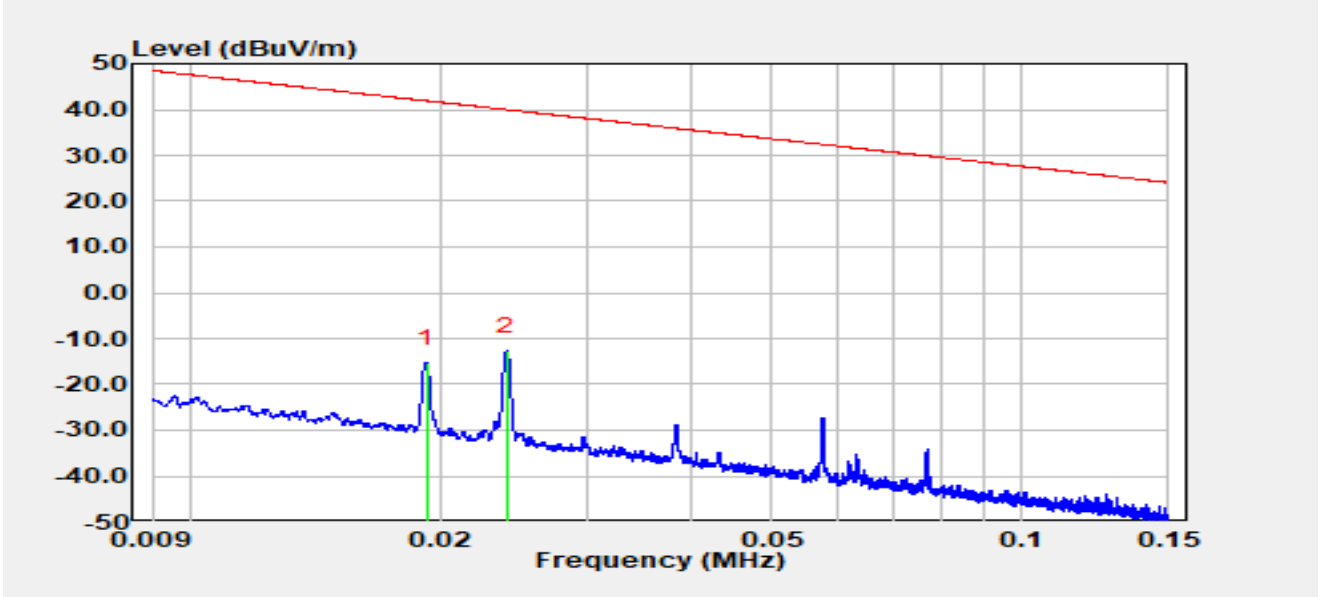


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.02            | 45.31          | -60.66     | -15.35               | -57.27      | 41.91          | Peak     |
| 2  | *    | 0.02            | 48.06          | -60.80     | -12.75               | -52.73      | 39.98          | Peak     |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-08-06 |
| Temperature  | 24.7 °C                                | Humidity      | 54.2%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Lucas Wang |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5240 MHz |               |            |

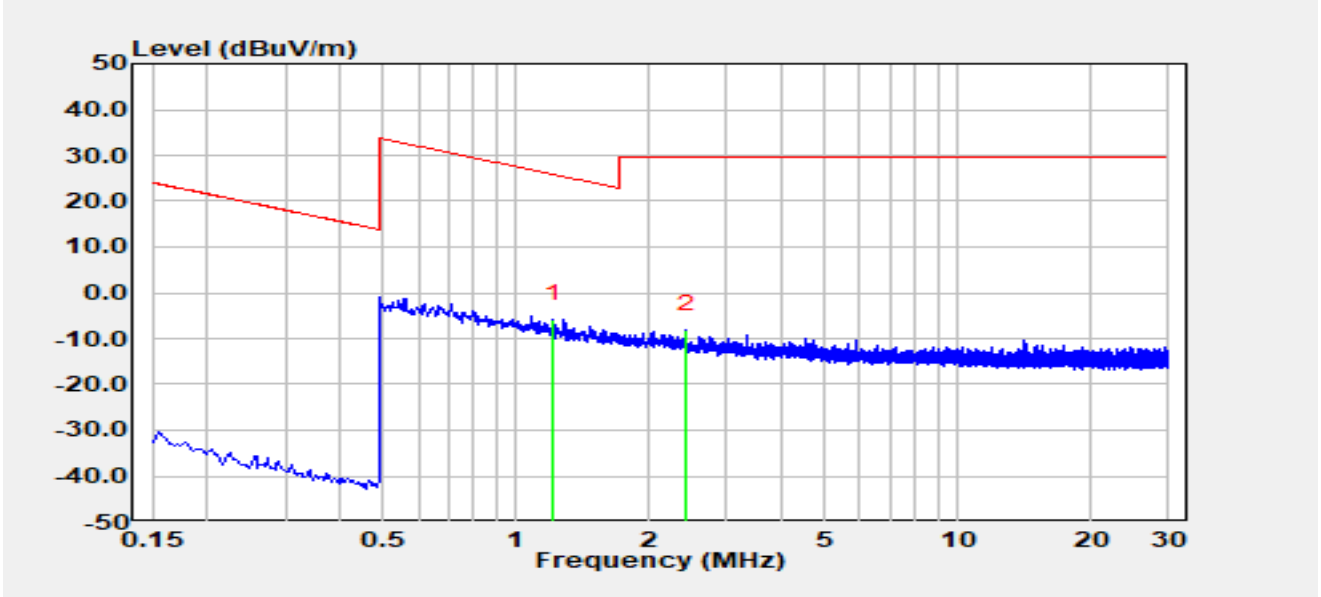


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 1.21            | 15.18          | -20.89     | -5.71                | -31.66      | 25.95          | Peak     |
| 2  |      | 2.43            | 12.74          | -20.75     | -8.01                | -37.51      | 29.50          | Peak     |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission below 1 GHz:

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | SIP-AC2                                | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                                | Humidity      | 65.3%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Fusco Pan  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5240 MHz |               |            |

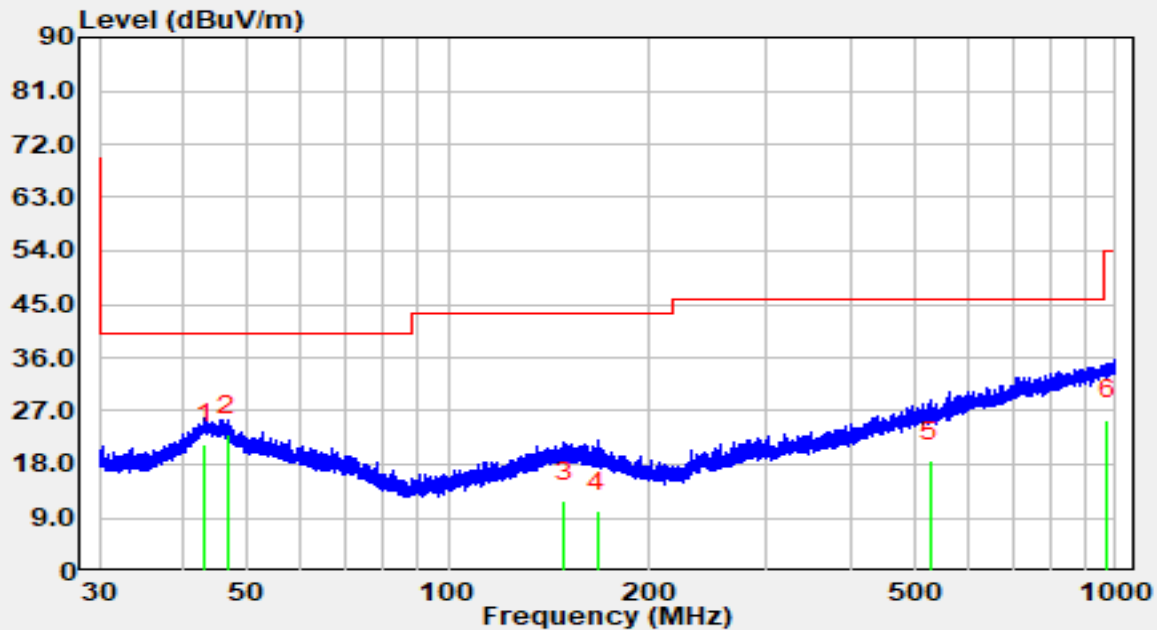


Trace:

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 43.202          | 1.30           | 20.18      | 21.48                | -18.52      | 40.00          | QP       |
| 2  | *    | 46.617          | 2.50           | 20.48      | 22.98                | -17.02      | 40.00          | QP       |
| 3  |      | 149.119         | -8.30          | 20.18      | 11.88                | -31.62      | 43.50          | QP       |
| 4  |      | 167.472         | -9.50          | 19.67      | 10.17                | -33.33      | 43.50          | QP       |
| 5  |      | 527.876         | -7.60          | 26.11      | 18.51                | -27.49      | 46.00          | QP       |
| 6  |      | 971.315         | -6.90          | 32.45      | 25.55                | -28.45      | 54.00          | QP       |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                    |               |            |
|--------------|------------------------------------|---------------|------------|
| Site         | SIP-AC2                            | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                            | Humidity      | 65.3%      |
| Limit        | FCC_Part 15.209_RSE (3 m)          | Test Engineer | Fusco Pan  |
| Test Voltage | By PoE                             | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be20 at 5240 MHz |               |            |

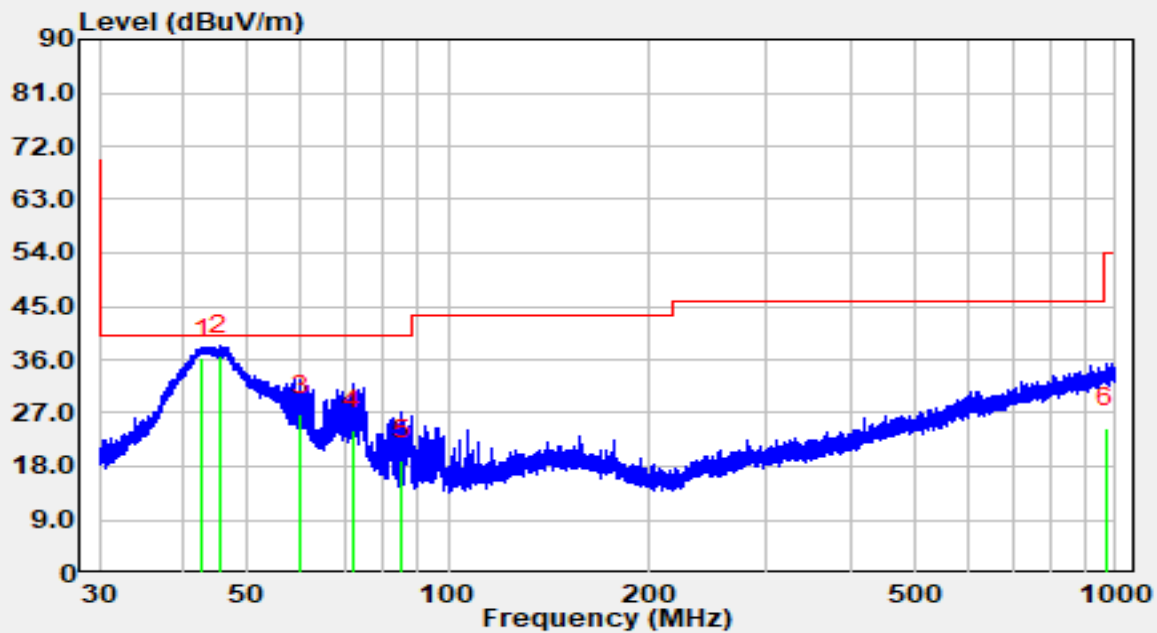

Trace:


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 42.765          | 16.10          | 20.12      | 36.22                | -3.78       | 40.00          | QP       |
| 2  | *    | 45.407          | 16.30          | 20.43      | 36.73                | -3.27       | 40.00          | QP       |
| 3  |      | 60.069          | 7.10           | 19.63      | 26.73                | -13.27      | 40.00          | QP       |
| 4  |      | 71.731          | 6.40           | 17.72      | 24.12                | -15.88      | 40.00          | QP       |
| 5  |      | 85.029          | 4.60           | 14.47      | 19.07                | -20.93      | 40.00          | QP       |
| 6  |      | 969.274         | -7.90          | 32.44      | 24.54                | -29.46      | 54.00          | QP       |

## Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission above 18 GHz:

|              |                                    |               |            |
|--------------|------------------------------------|---------------|------------|
| Site         | WZ-AC2                             | Test Date     | 2025-08-06 |
| Temperature  | 25.6 °C                            | Humidity      | 43.5%      |
| Limit        | FCC_Part 15.209_RSE (3 m)          | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                             | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be20 at 5240 MHz |               |            |

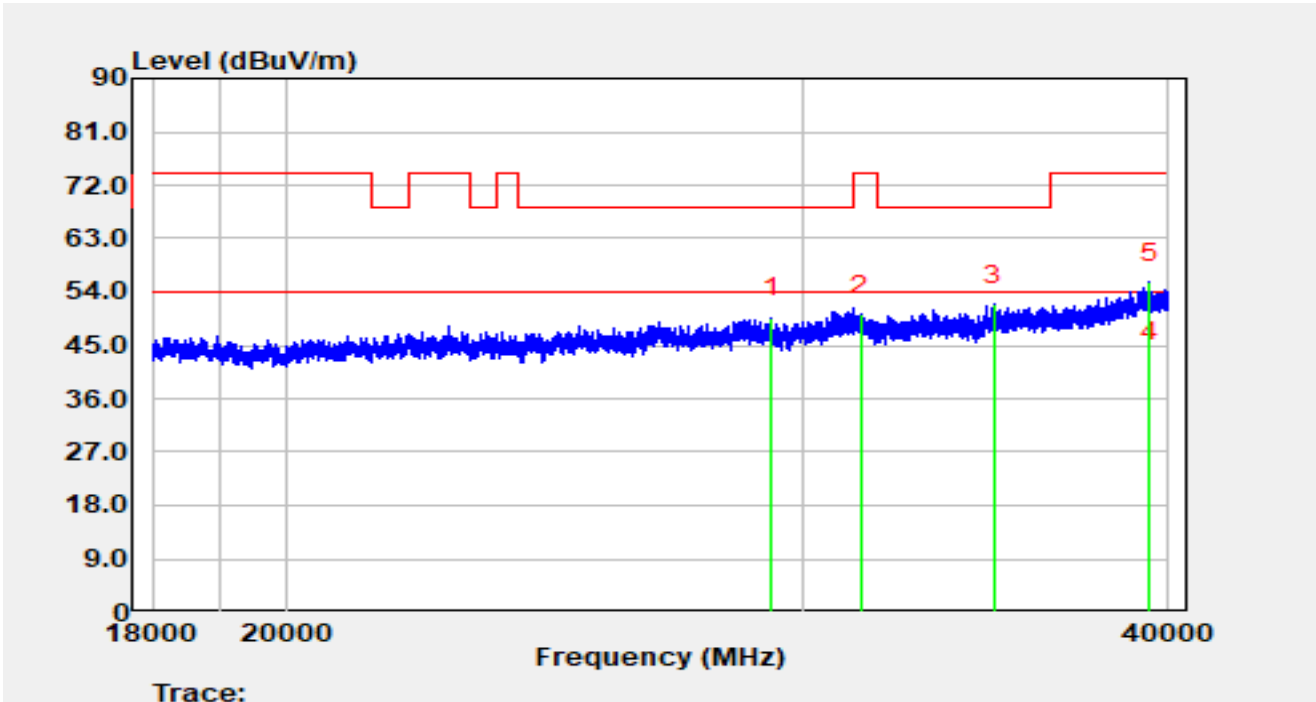


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 29292.60        | 55.17          | -5.58      | 49.59                | -18.61      | 68.20          | Peak     |
| 2  |      | 31400.20        | 54.00          | -3.84      | 50.15                | -23.85      | 74.00          | Peak     |
| 3  |      | 34869.60        | 57.04          | -5.20      | 51.84                | -16.36      | 68.20          | Peak     |
| 4  | *    | 39417.00        | 42.16          | 0.12       | 42.28                | -11.72      | 54.00          | Average  |
| 5  |      | 39417.00        | 55.53          | 0.12       | 55.65                | -18.35      | 74.00          | Peak     |

#### Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                    |               |            |
|--------------|------------------------------------|---------------|------------|
| Site         | WZ-AC2                             | Test Date     | 2025-08-06 |
| Temperature  | 25.6 °C                            | Humidity      | 43.5%      |
| Limit        | FCC_Part 15.209_RSE (3 m)          | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                             | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be20 at 5240 MHz |               |            |

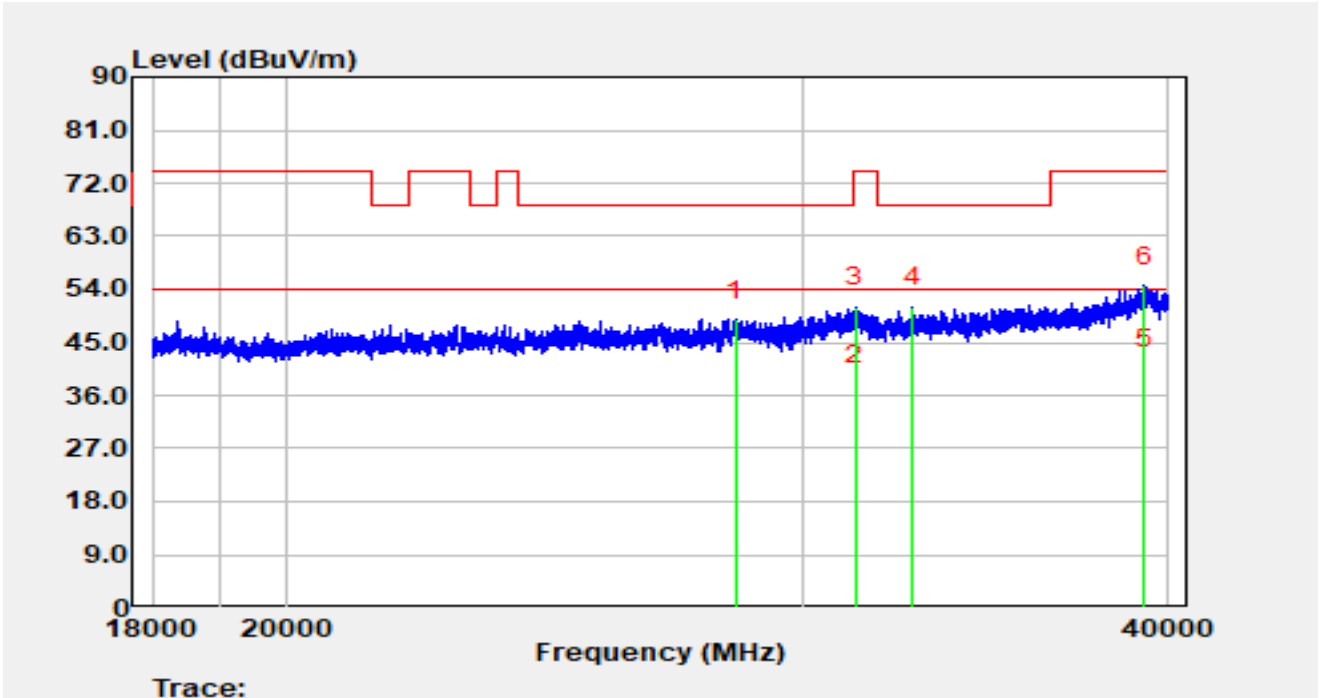


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 28474.20        | 54.68          | -5.84      | 48.84                | -19.36      | 68.20          | Peak     |
| 2  |      | 31274.80        | 41.24          | -3.52      | 37.72                | -16.28      | 54.00          | Average  |
| 3  |      | 31274.80        | 54.59          | -3.52      | 51.07                | -22.93      | 74.00          | Peak     |
| 4  |      | 32724.60        | 55.48          | -4.54      | 50.95                | -17.25      | 68.20          | Peak     |
| 5  | *    | 39232.20        | 40.25          | 0.29       | 40.54                | -13.46      | 54.00          | Average  |
| 6  |      | 39232.20        | 54.27          | 0.29       | 54.57                | -19.43      | 74.00          | Peak     |

Notes:

- " \* " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.8 Radiated Restricted Band Edge Test Result

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

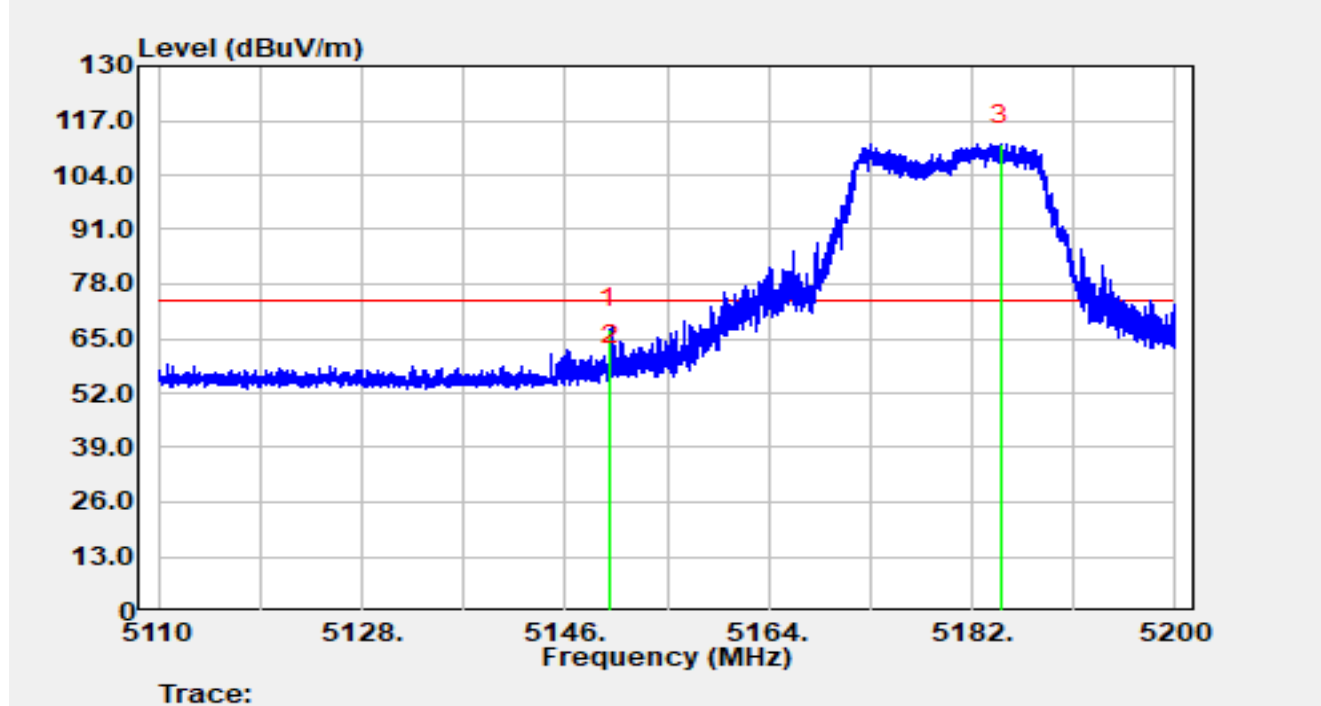


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.87         | 48.86          | 18.52      | 67.38                | -6.62       | 74.00          | Peak     |
| 2  |      | 5150.00         | 40.17          | 18.52      | 58.69                | -15.31      | 74.00          | Peak     |
| 3  |      | 5184.54         | 92.50          | 18.82      | 111.32               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

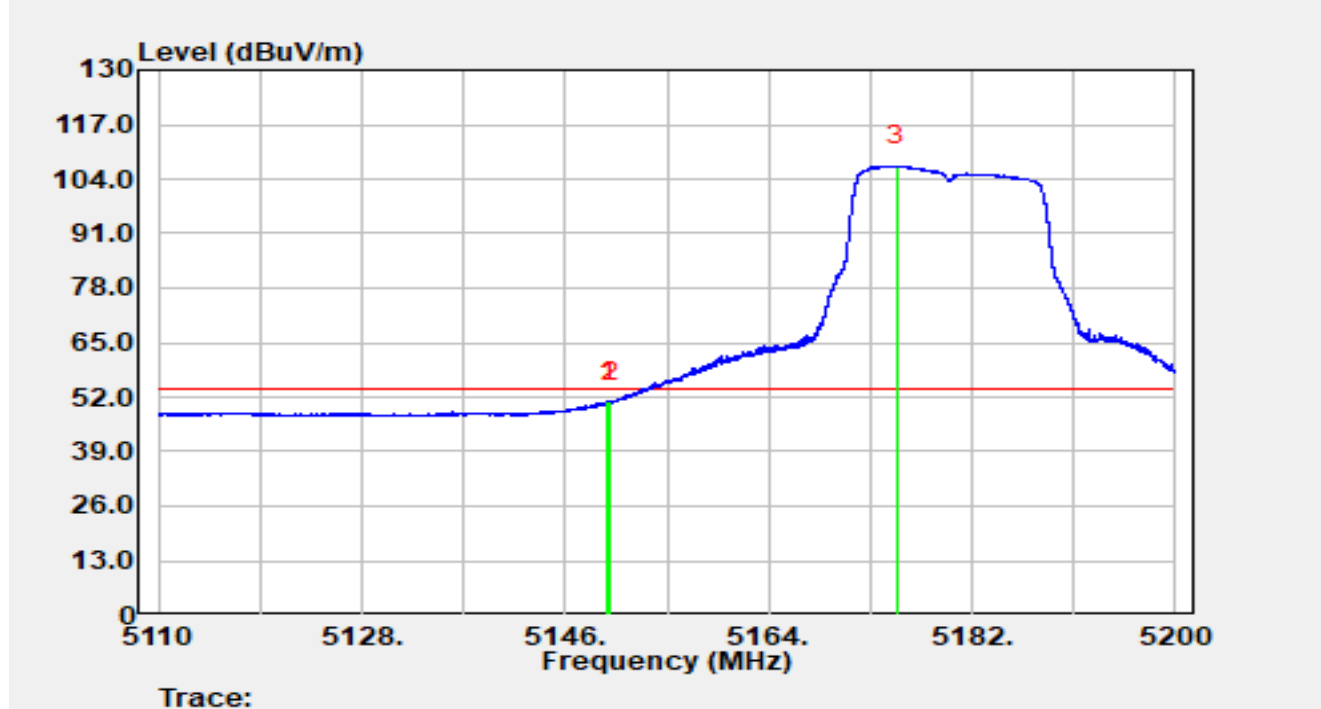


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.70         | 32.37          | 18.52      | 50.89                | -3.11       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.25          | 18.52      | 50.77                | -3.23       | 54.00          | Average  |
| 3  |      | 5175.36         | 88.34          | 18.80      | 107.14               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

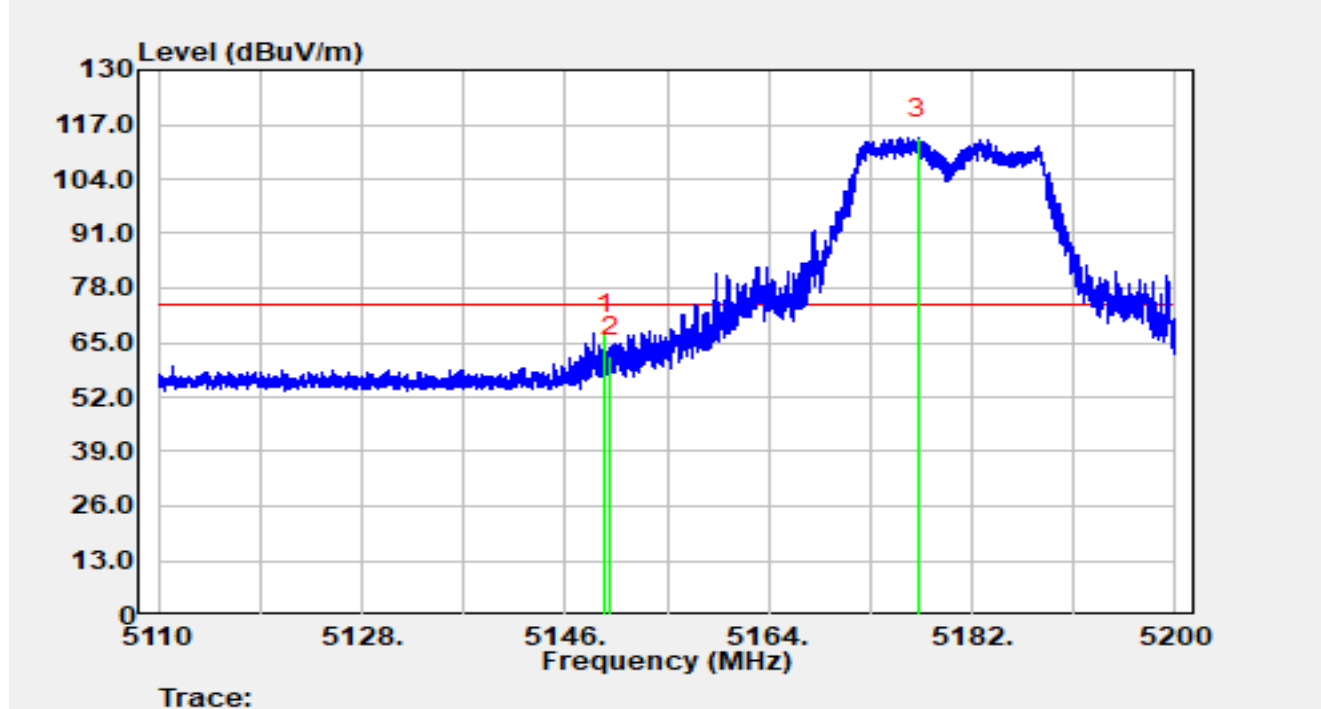


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.50         | 48.63          | 18.52      | 67.15                | -6.85       | 74.00          | Peak     |
| 2  |      | 5150.00         | 43.20          | 18.52      | 61.72                | -12.28      | 74.00          | Peak     |
| 3  |      | 5177.20         | 94.93          | 18.81      | 113.73               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

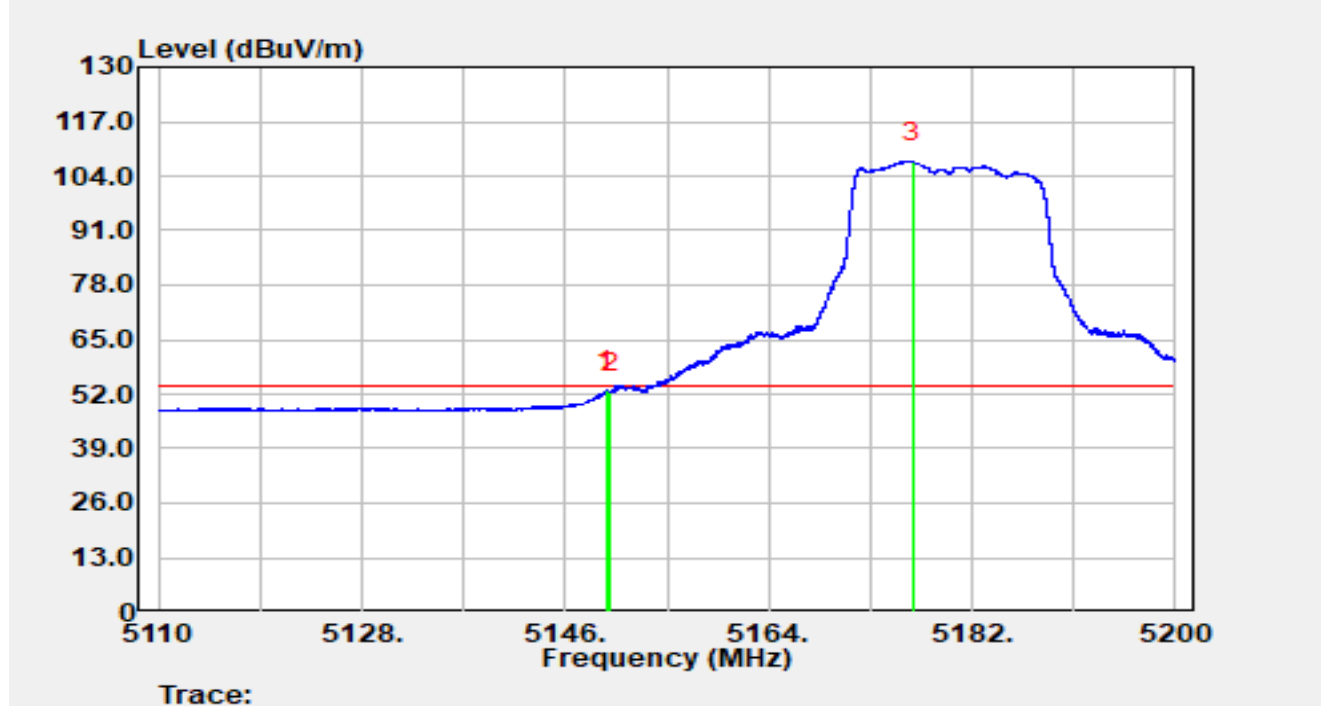


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.64         | 34.34          | 18.52      | 52.86                | -1.14       | 54.00          | Average  |
| 2  |      | 5150.00         | 33.91          | 18.52      | 52.43                | -1.57       | 54.00          | Average  |
| 3  |      | 5176.73         | 88.55          | 18.80      | 107.35               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5320 MHz |               |            |

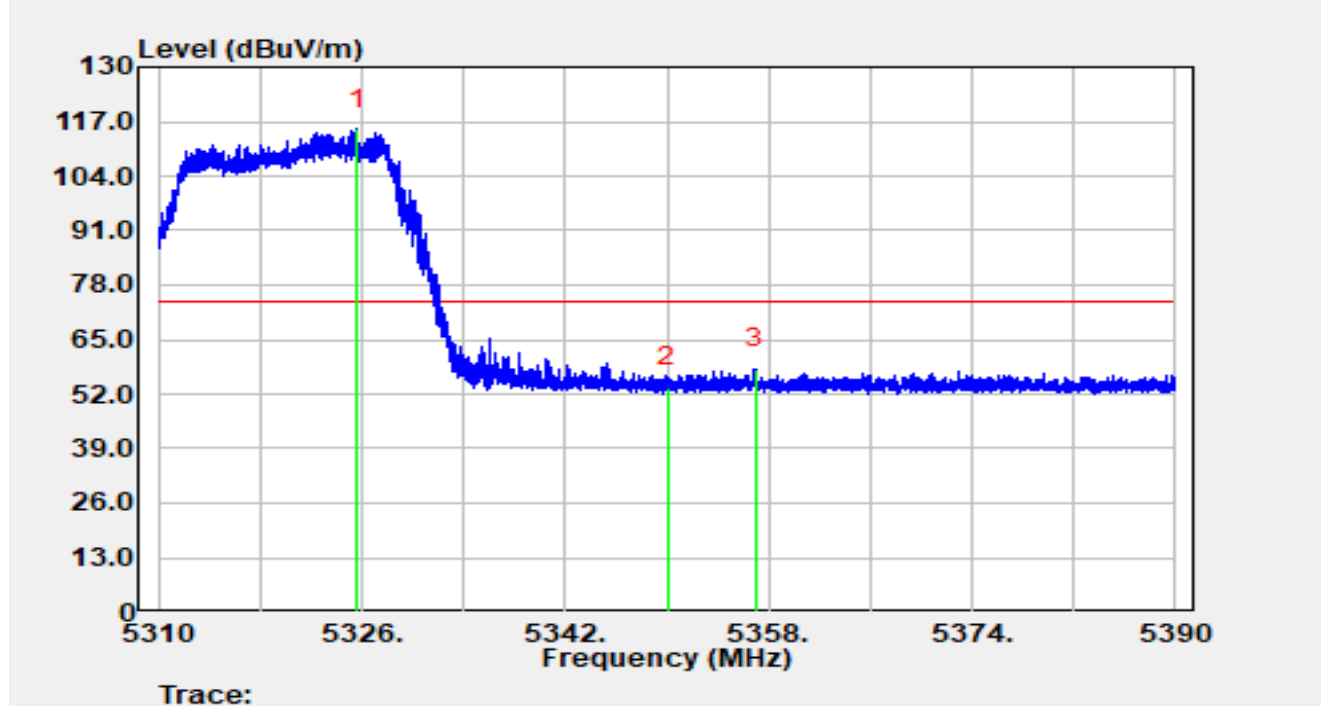


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5325.67         | 96.49          | 18.60      | 115.09               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 34.65          | 18.82      | 53.47                | -20.53      | 74.00          | Peak     |
| 3  | *    | 5356.92         | 39.19          | 18.92      | 58.11                | -15.89      | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5320 MHz |               |            |

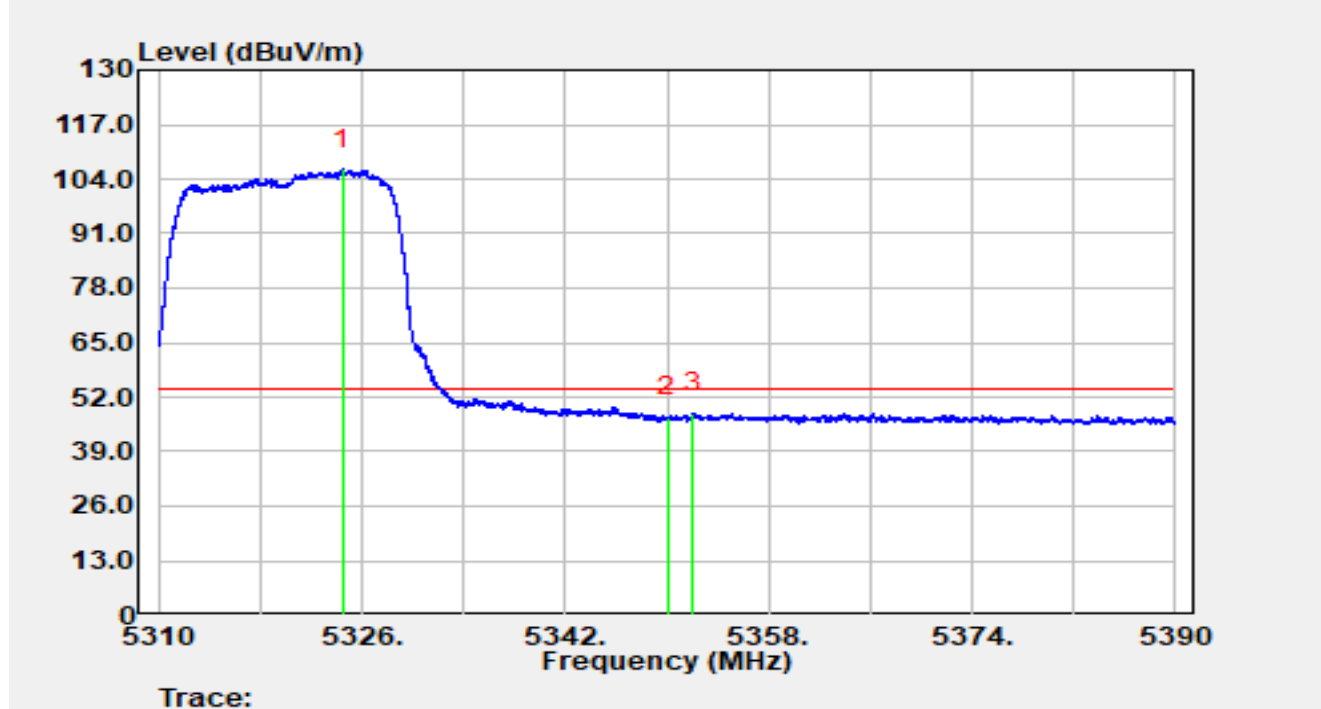


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5324.50         | 87.69          | 18.58      | 106.27               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 28.38          | 18.82      | 47.20                | -6.80       | 54.00          | Average  |
| 3  | *    | 5352.06         | 29.41          | 18.85      | 48.26                | -5.74       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5320 MHz |               |            |

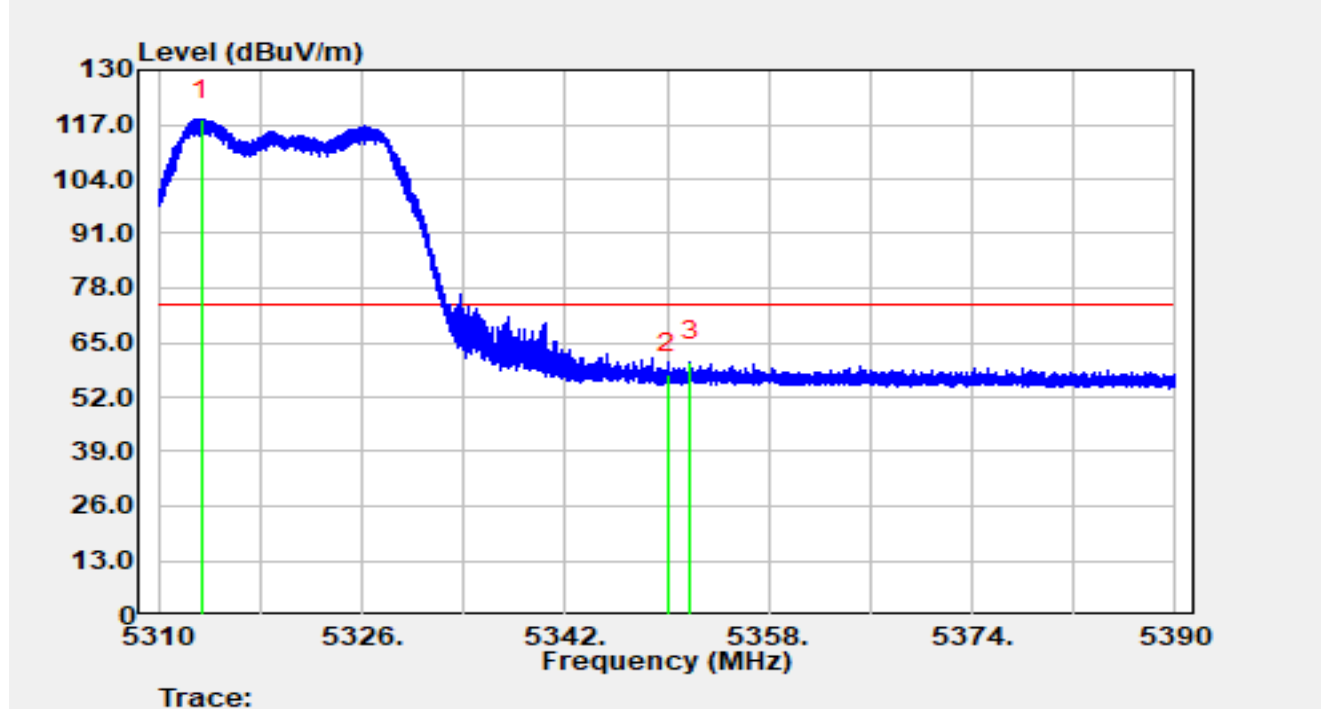


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5313.33         | 99.54          | 18.61      | 118.15               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 38.65          | 18.82      | 57.47                | -16.53      | 74.00          | Peak     |
| 3  | *    | 5351.81         | 41.73          | 18.85      | 60.58                | -13.42      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5320 MHz |               |            |

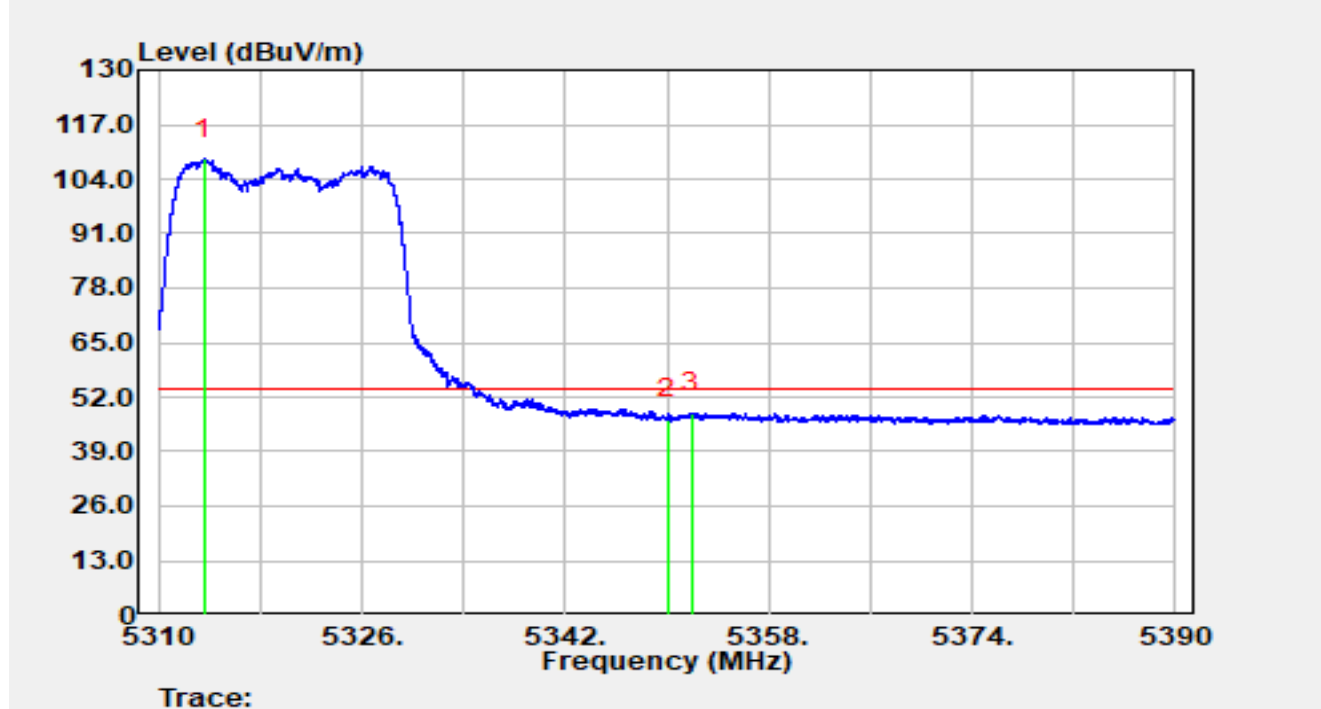


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5313.60         | 90.23          | 18.61      | 108.84               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 27.88          | 18.82      | 46.70                | -7.30       | 54.00          | Average  |
| 3  | *    | 5351.98         | 29.45          | 18.85      | 48.30                | -5.70       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5500 MHz |               |            |

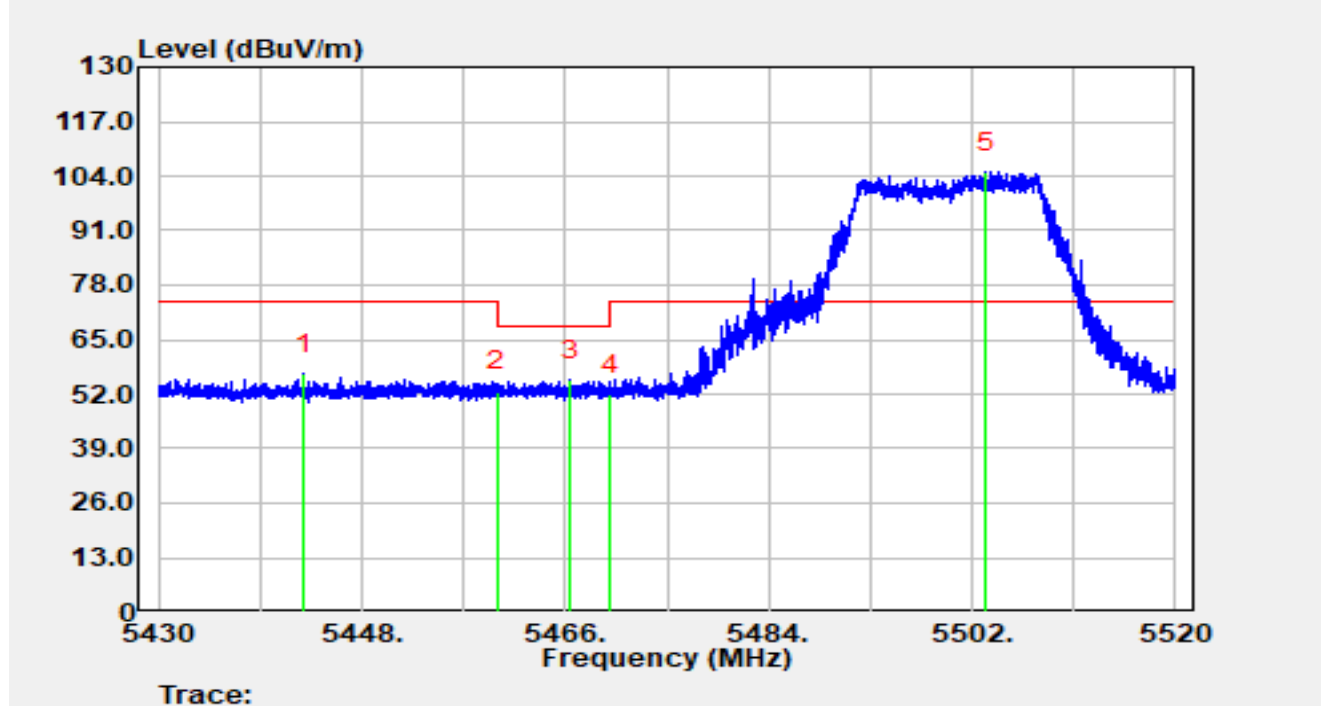


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5442.88         | 37.57          | 19.13      | 56.70                | -17.30      | 74.00          | Peak     |
| 2  |      | 5460.00         | 33.60          | 19.12      | 52.72                | -15.48      | 68.20          | Peak     |
| 3  | *    | 5466.43         | 36.24          | 19.06      | 55.30                | -12.90      | 68.20          | Peak     |
| 4  |      | 5470.00         | 32.95          | 19.02      | 51.97                | -16.23      | 68.20          | Peak     |
| 5  |      | 5503.18         | 85.98          | 18.91      | 104.89               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5500 MHz |               |            |

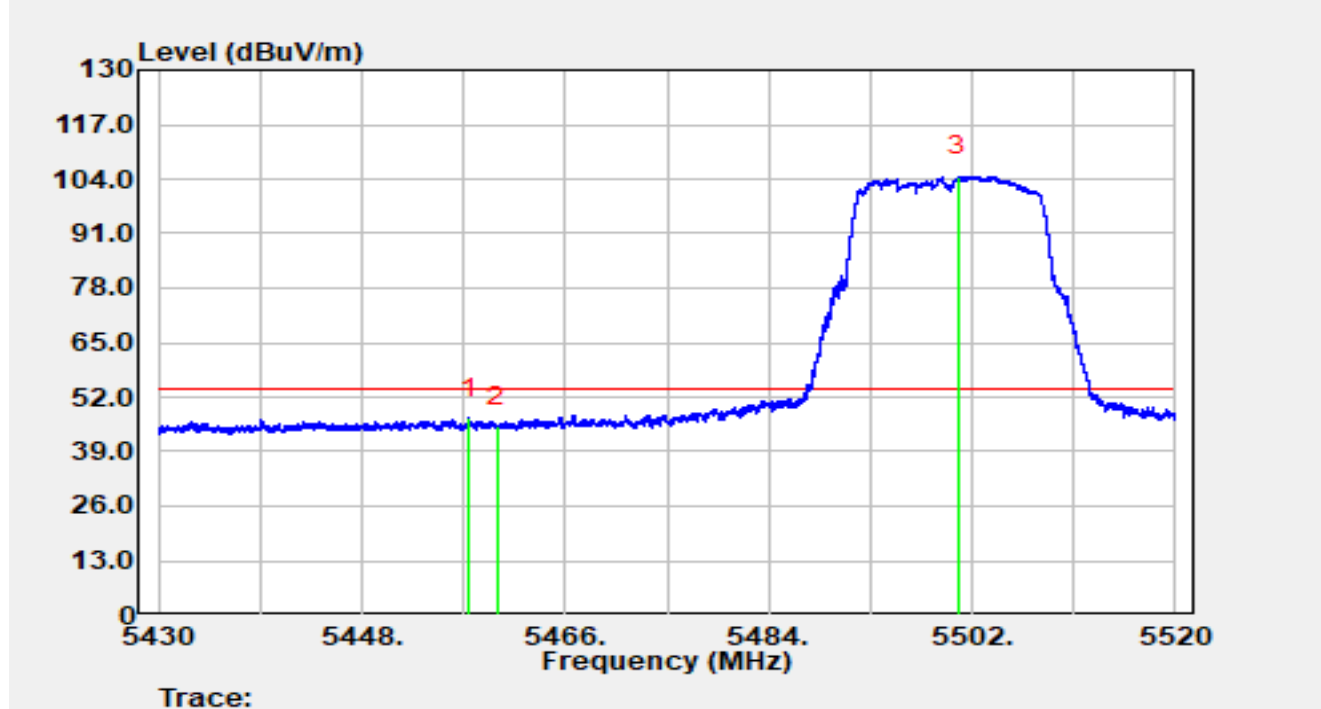


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.49         | 27.94          | 19.11      | 47.05                | -6.95       | 54.00          | Average  |
| 2  |      | 5460.00         | 25.79          | 19.12      | 44.91                | -9.09       | 54.00          | Average  |
| 3  |      | 5500.76         | 85.80          | 18.89      | 104.69               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5500 MHz |               |            |

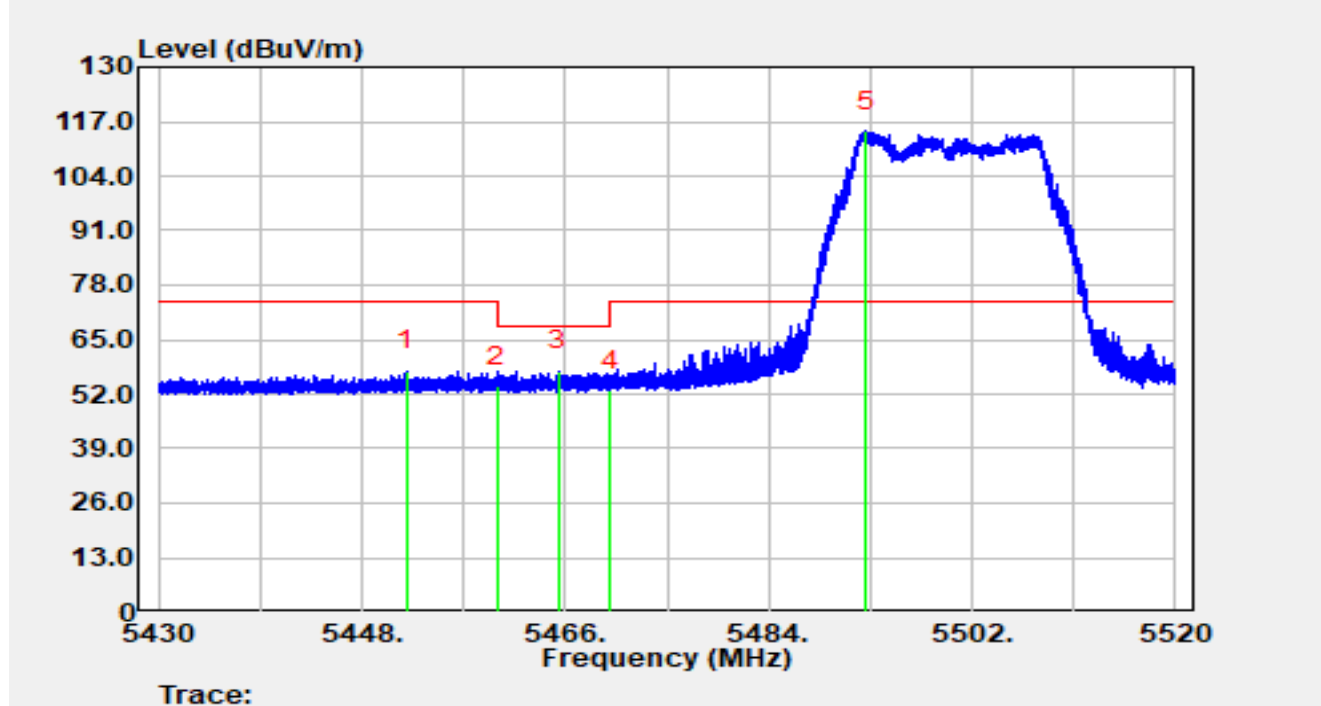


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5451.92         | 38.34          | 19.12      | 57.46                | -16.54      | 74.00          | Peak     |
| 2  |      | 5460.00         | 34.67          | 19.12      | 53.79                | -14.41      | 68.20          | Peak     |
| 3  | *    | 5465.39         | 38.41          | 19.08      | 57.49                | -10.71      | 68.20          | Peak     |
| 4  |      | 5470.00         | 33.94          | 19.02      | 52.97                | -15.23      | 68.20          | Peak     |
| 5  |      | 5492.65         | 95.77          | 18.89      | 114.66               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5500 MHz |               |            |

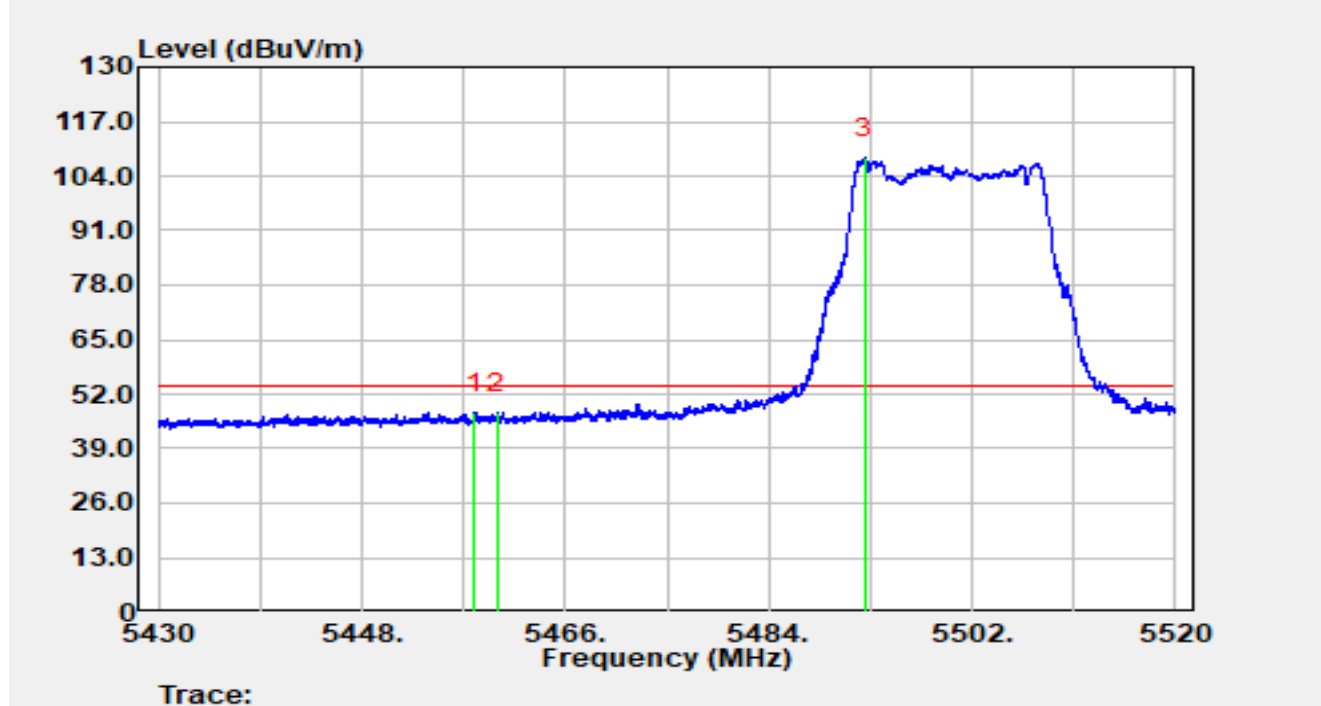


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5458.02         | 28.30          | 19.11      | 47.41                | -6.59       | 54.00          | Average  |
| 2  | *    | 5460.00         | 28.39          | 19.12      | 47.51                | -6.49       | 54.00          | Average  |
| 3  |      | 5492.55         | 89.51          | 18.89      | 108.40               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5700 MHz |               |            |

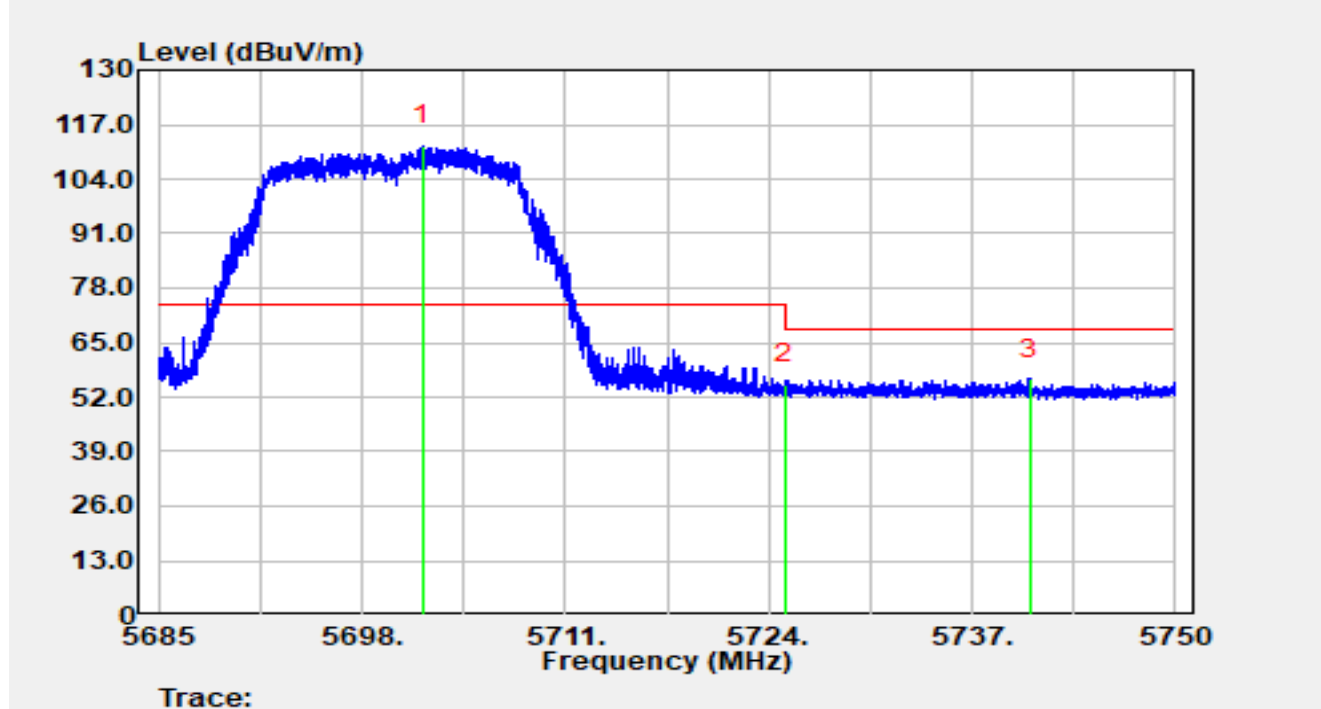


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5701.87         | 91.76          | 20.20      | 111.96               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 34.74          | 20.33      | 55.06                | -13.14      | 68.20          | Peak     |
| 3  | *    | 5740.66         | 36.12          | 20.15      | 56.28                | -11.92      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5700 MHz |               |            |

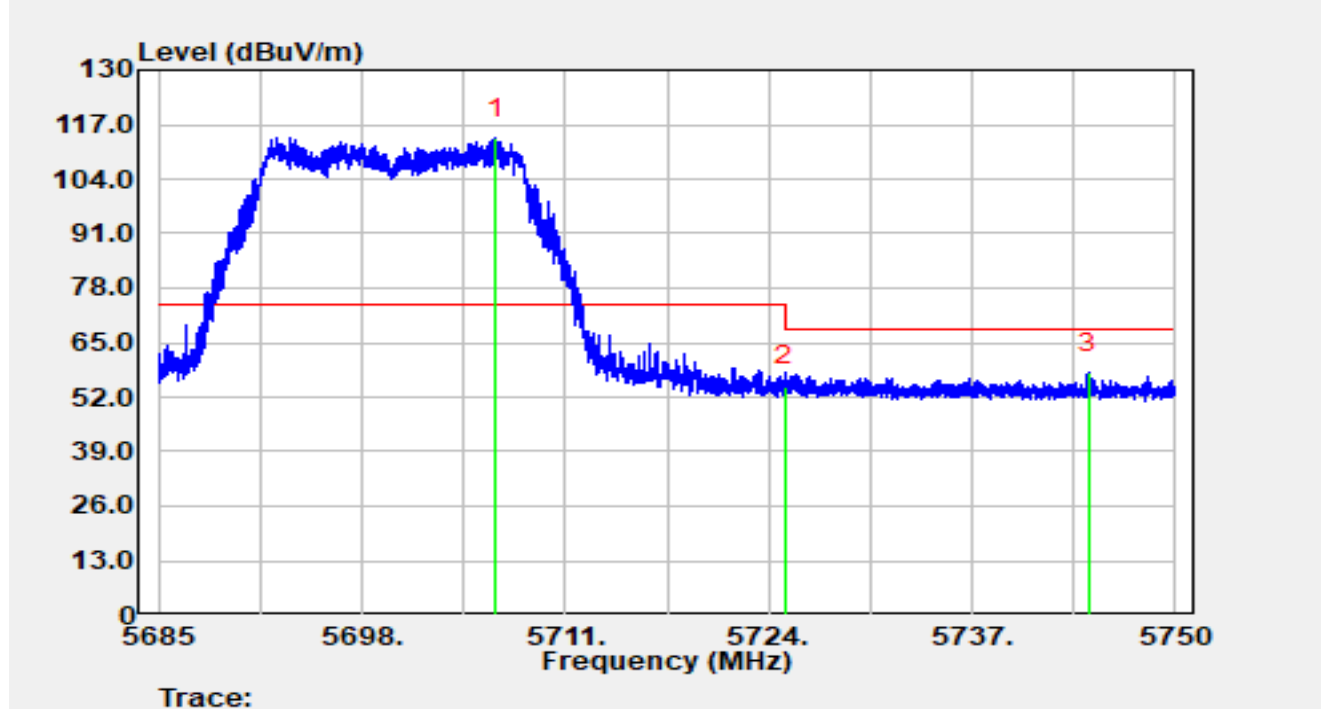


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5706.56         | 93.44          | 20.27      | 113.71               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 34.26          | 20.33      | 54.58                | -13.62      | 68.20          | Peak     |
| 3  | *    | 5744.42         | 37.58          | 20.10      | 57.68                | -10.52      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5745 MHz |               |            |

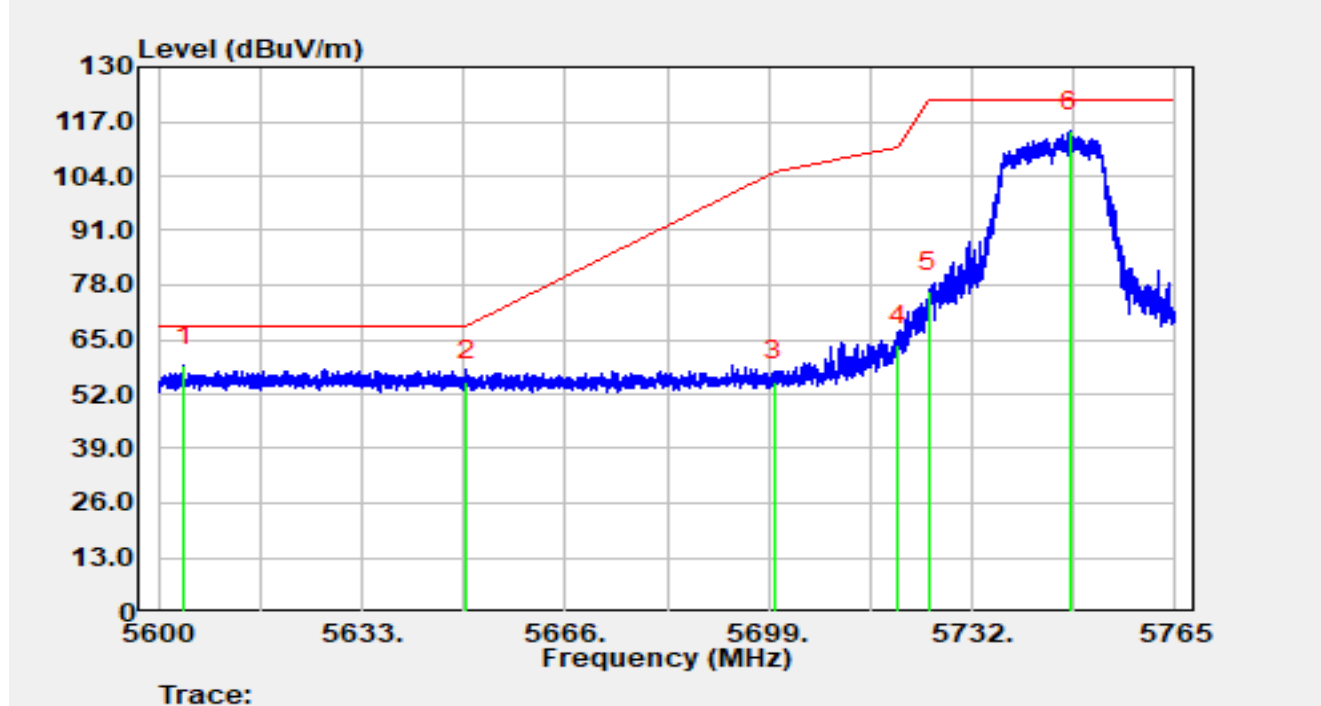


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5604.11         | 39.26          | 19.57      | 58.82                | -9.38       | 68.20          | Peak     |
| 2  |      | 5650.00         | 35.33          | 19.62      | 54.95                | -13.25      | 68.20          | Peak     |
| 3  |      | 5700.00         | 34.83          | 20.14      | 54.97                | -50.23      | 105.20         | Peak     |
| 4  |      | 5720.00         | 43.23          | 20.38      | 63.61                | -47.19      | 110.80         | Peak     |
| 5  |      | 5725.00         | 56.11          | 20.33      | 76.44                | -45.76      | 122.20         | Peak     |
| 6  |      | 5747.84         | 94.49          | 20.07      | 114.56               | N/A         | N/A            | Peak     |

Notes:

1. " \*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5745 MHz |               |            |

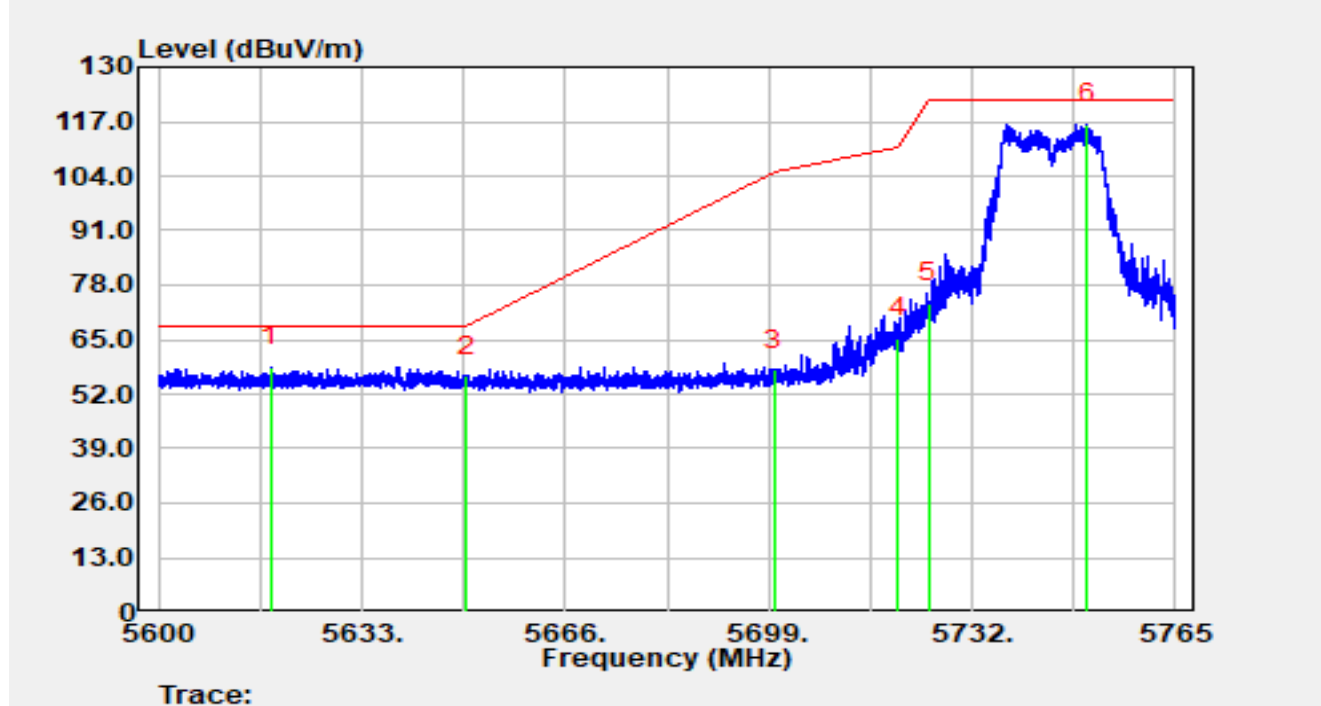


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5618.23         | 38.60          | 19.83      | 58.42                | -9.78       | 68.20          | Peak     |
| 2  |      | 5650.00         | 36.66          | 19.62      | 56.28                | -11.92      | 68.20          | Peak     |
| 3  |      | 5700.00         | 37.58          | 20.14      | 57.72                | -47.48      | 105.20         | Peak     |
| 4  |      | 5720.00         | 45.00          | 20.38      | 65.38                | -45.42      | 110.80         | Peak     |
| 5  |      | 5725.00         | 53.28          | 20.33      | 73.61                | -48.59      | 122.20         | Peak     |
| 6  |      | 5750.60         | 96.23          | 20.05      | 116.28               | N/A         | N/A            | Peak     |

Notes:

1. " \* " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5825 MHz |               |            |

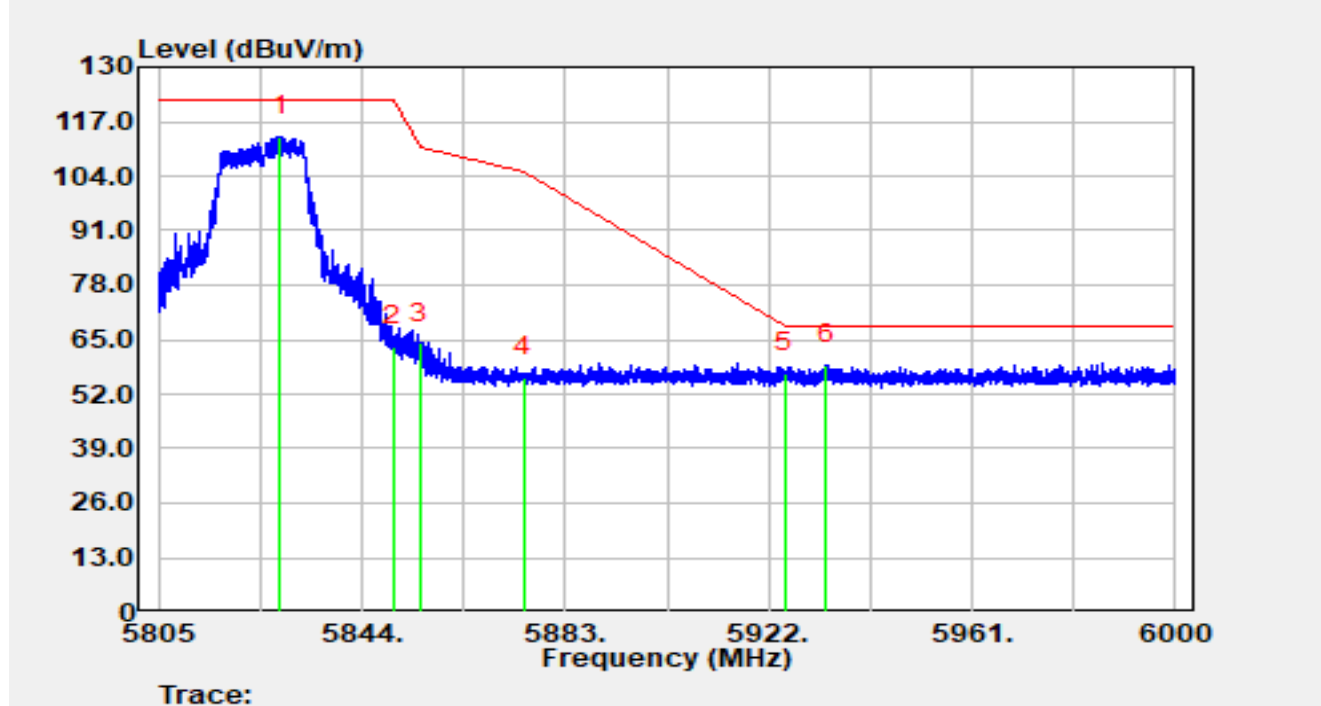


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5828.34         | 92.84          | 20.51      | 113.34               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 43.08          | 20.30      | 63.38                | -58.82      | 122.20         | Peak     |
| 3  |      | 5855.00         | 43.85          | 20.30      | 64.15                | -46.65      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.43          | 20.63      | 56.06                | -49.14      | 105.20         | Peak     |
| 5  |      | 5925.00         | 36.38          | 20.59      | 56.97                | -11.23      | 68.20          | Peak     |
| 6  | *    | 5933.13         | 38.46          | 20.62      | 59.08                | -9.12       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                         | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                          | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5825 MHz |               |            |

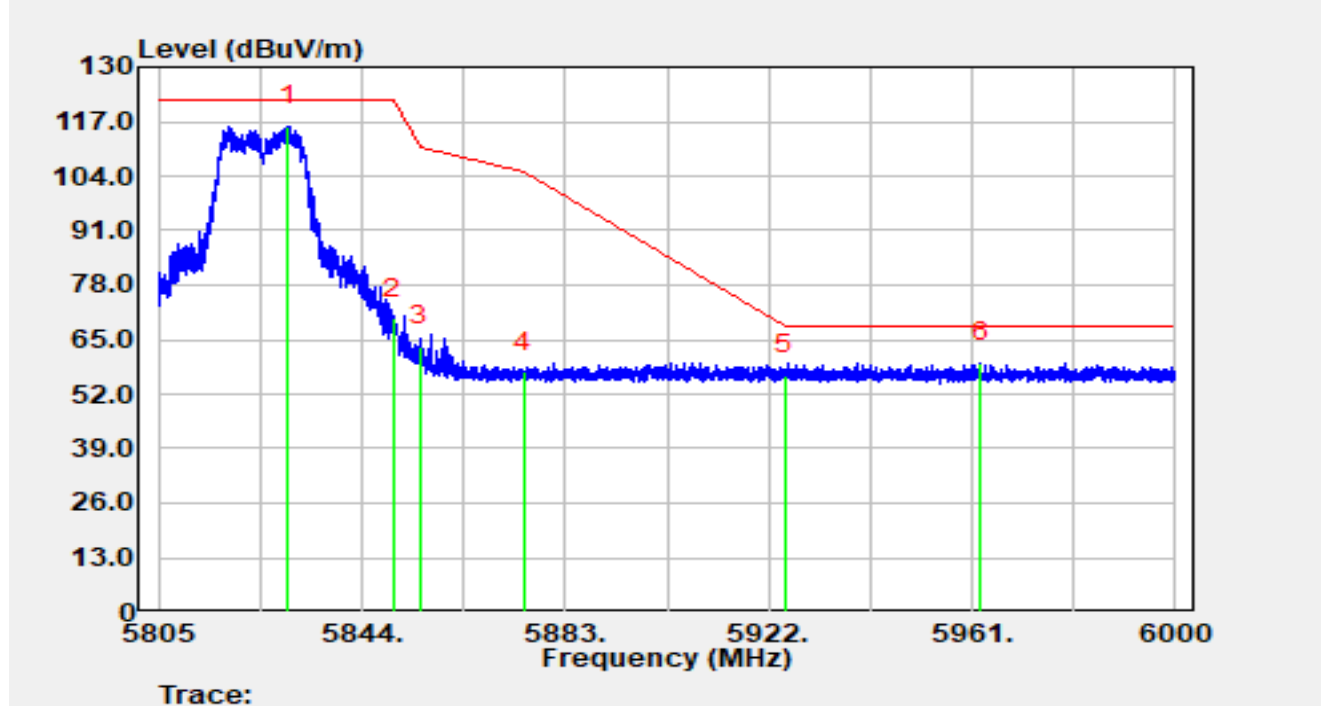


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5829.96         | 95.35          | 20.49      | 115.83               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 49.69          | 20.30      | 69.99                | -52.21      | 122.20         | Peak     |
| 3  |      | 5855.00         | 43.12          | 20.30      | 63.42                | -47.38      | 110.80         | Peak     |
| 4  |      | 5875.00         | 36.68          | 20.63      | 57.31                | -47.89      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.99          | 20.59      | 56.58                | -11.62      | 68.20          | Peak     |
| 6  | *    | 5962.70         | 38.81          | 20.75      | 59.56                | -8.64       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

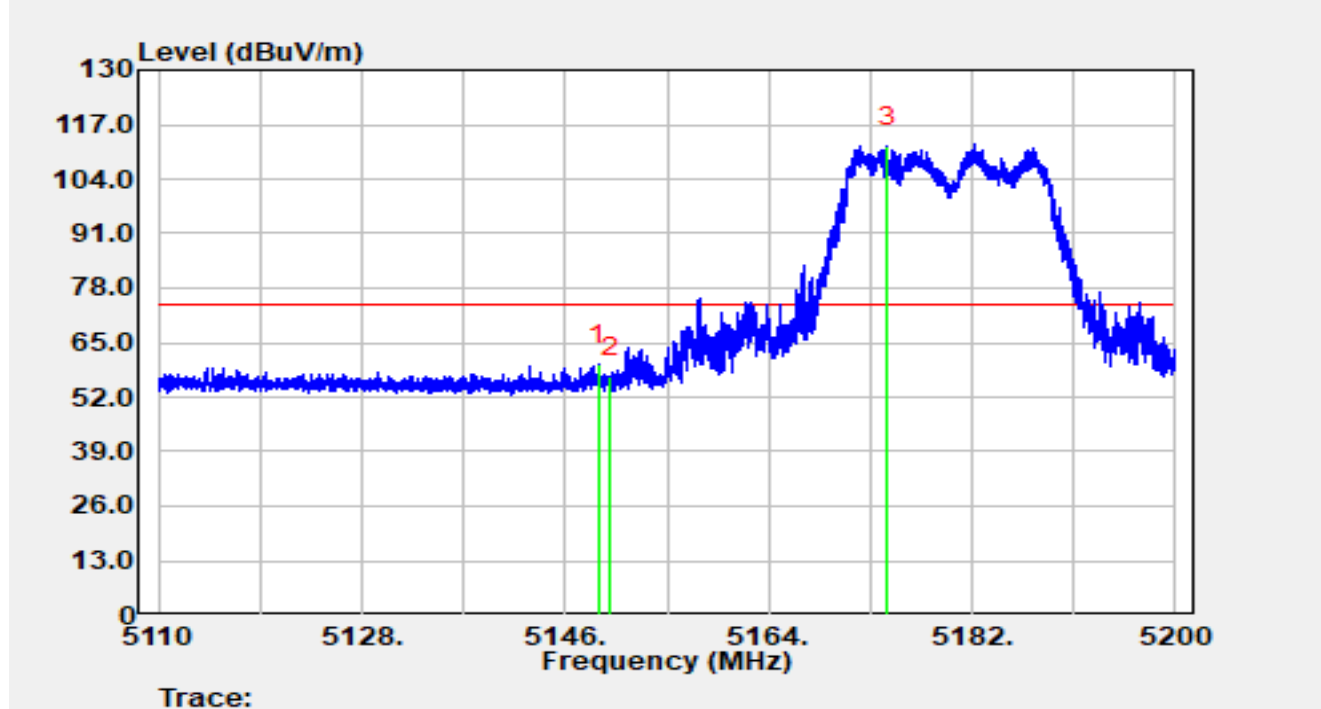


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.96         | 41.22          | 18.52      | 59.74                | -14.26      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.37          | 18.52      | 56.89                | -17.11      | 74.00          | Peak     |
| 3  |      | 5174.49         | 93.03          | 18.80      | 111.83               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

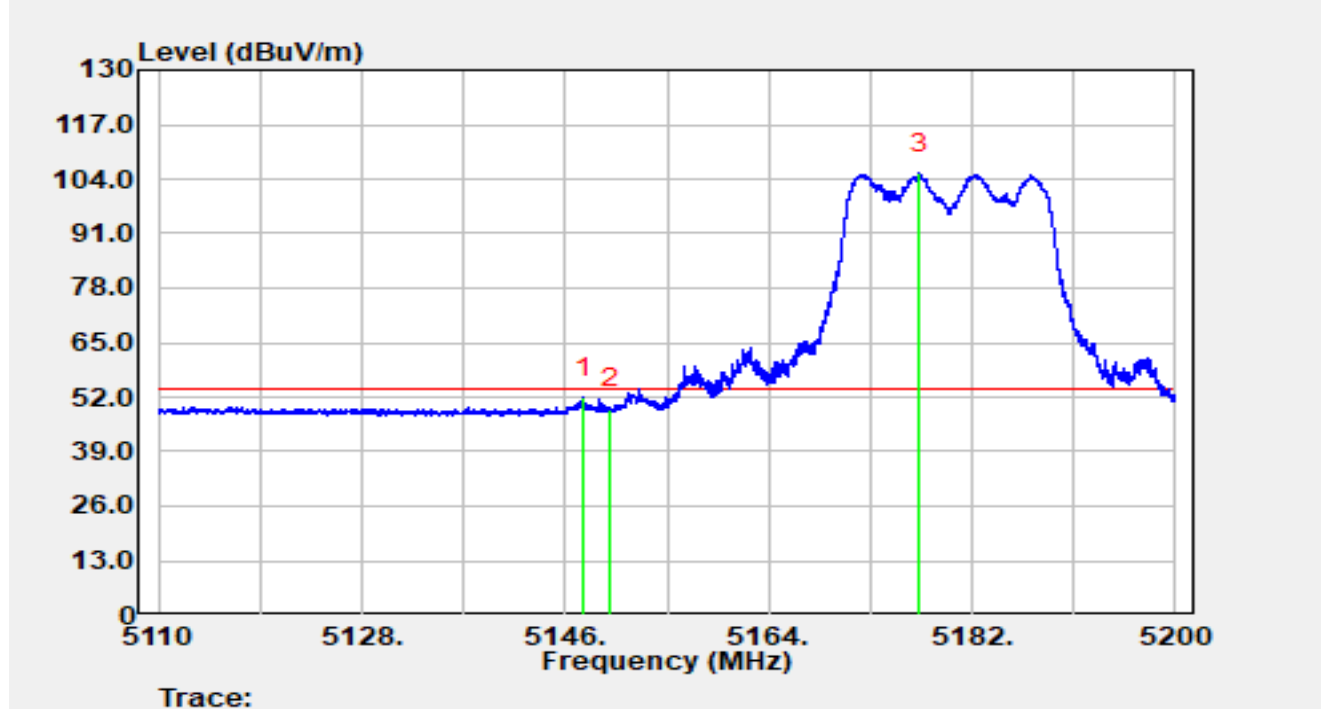


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.60         | 33.28          | 18.53      | 51.81                | -2.19       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.77          | 18.52      | 49.29                | -4.71       | 54.00          | Average  |
| 3  |      | 5177.35         | 86.44          | 18.81      | 105.25               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

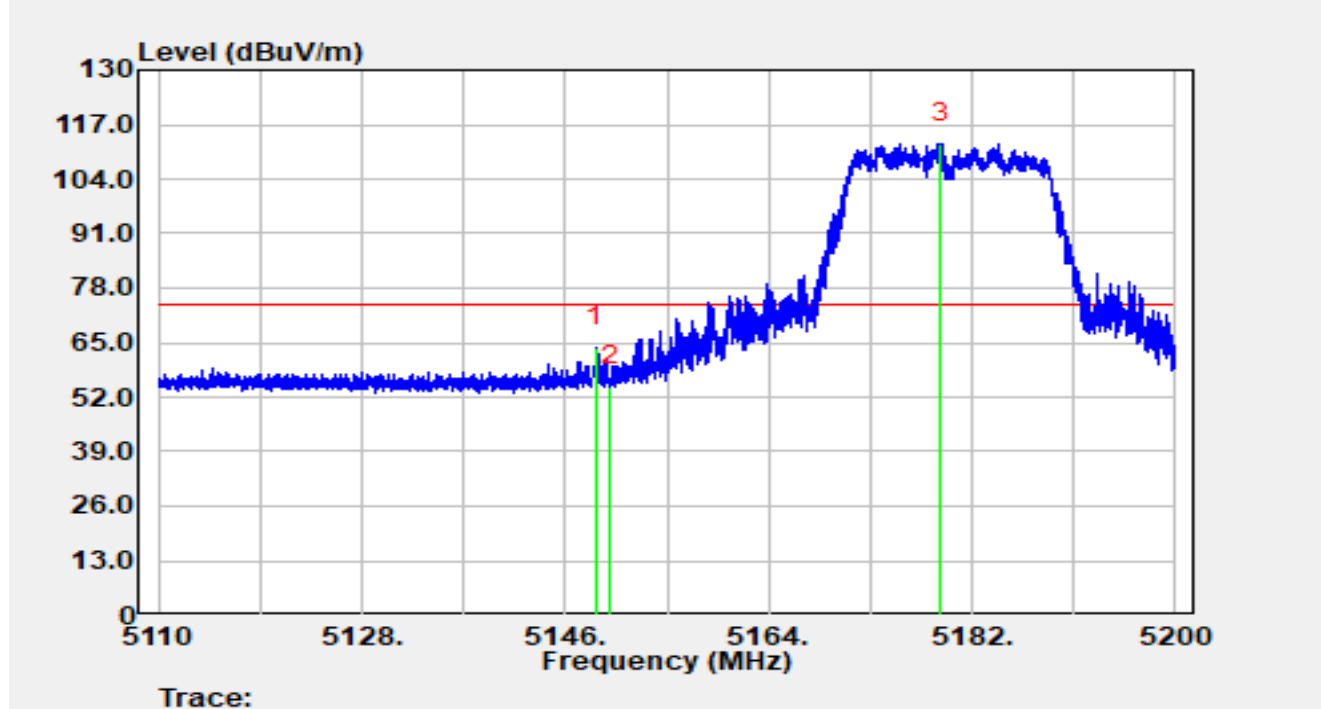


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.68         | 45.44          | 18.52      | 63.96                | -10.04      | 74.00          | Peak     |
| 2  |      | 5150.00         | 36.09          | 18.52      | 54.61                | -19.39      | 74.00          | Peak     |
| 3  |      | 5179.27         | 93.71          | 18.81      | 112.52               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

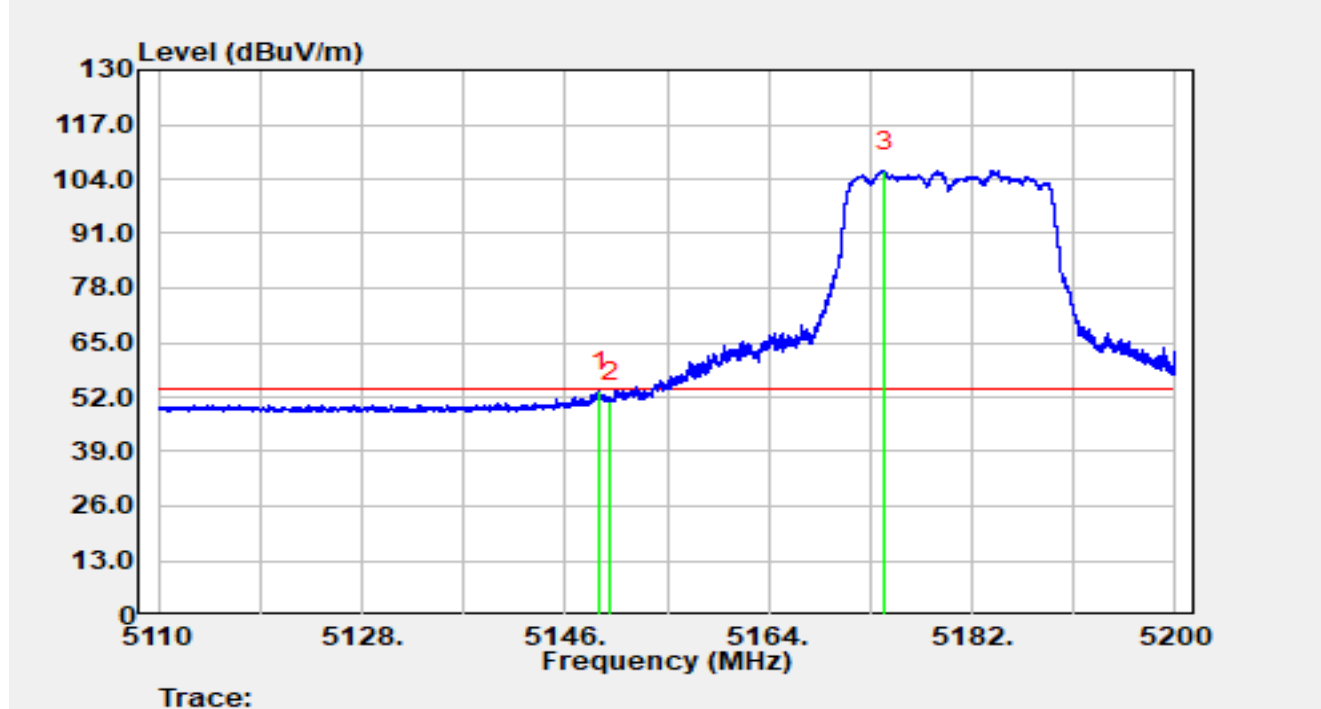


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.01         | 34.77          | 18.52      | 53.30                | -0.70       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.26          | 18.52      | 50.78                | -3.22       | 54.00          | Average  |
| 3  |      | 5174.22         | 87.11          | 18.80      | 105.91               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5320 MHz |               |            |

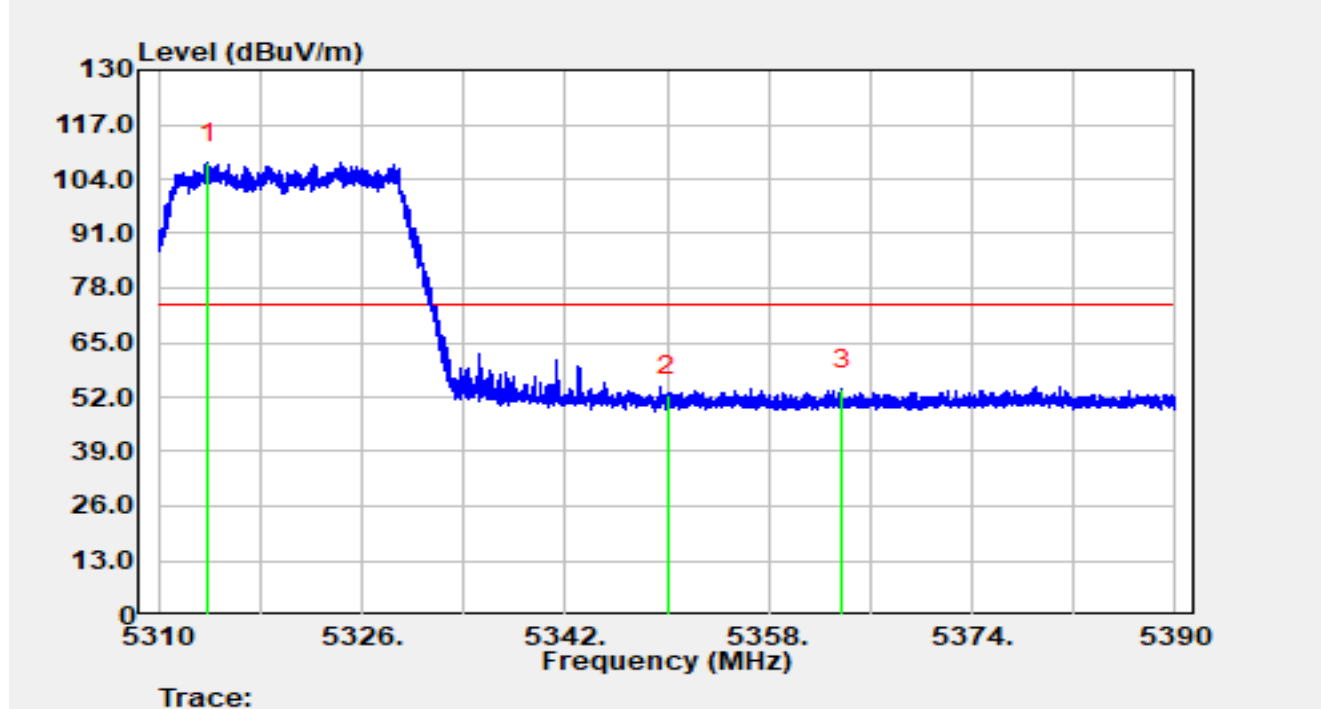


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5313.88         | 89.29          | 18.61      | 107.90               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 33.59          | 18.82      | 52.41                | -21.59      | 74.00          | Peak     |
| 3  | *    | 5363.76         | 34.85          | 18.94      | 53.79                | -20.21      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5320 MHz |               |            |

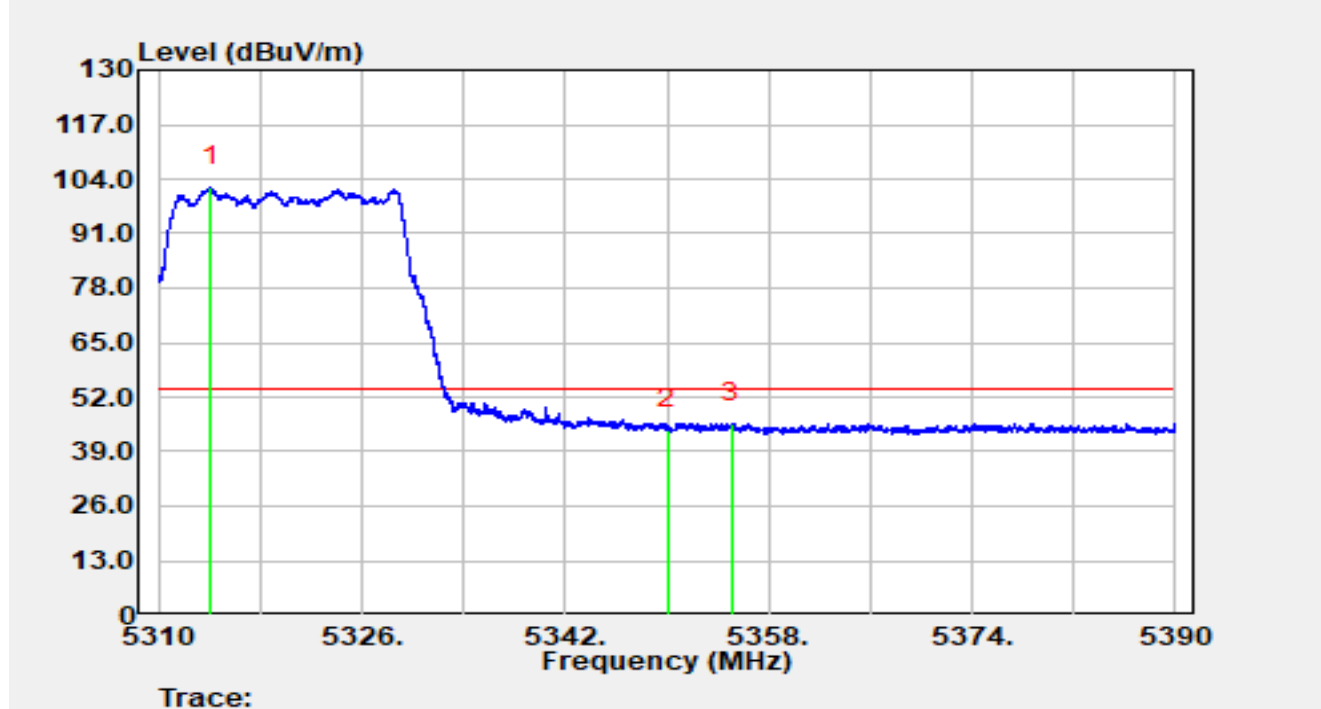


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5314.06         | 83.46          | 18.61      | 102.07               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 25.37          | 18.82      | 44.19                | -9.81       | 54.00          | Average  |
| 3  | *    | 5355.10         | 26.95          | 18.89      | 45.85                | -8.15       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5320 MHz |               |            |

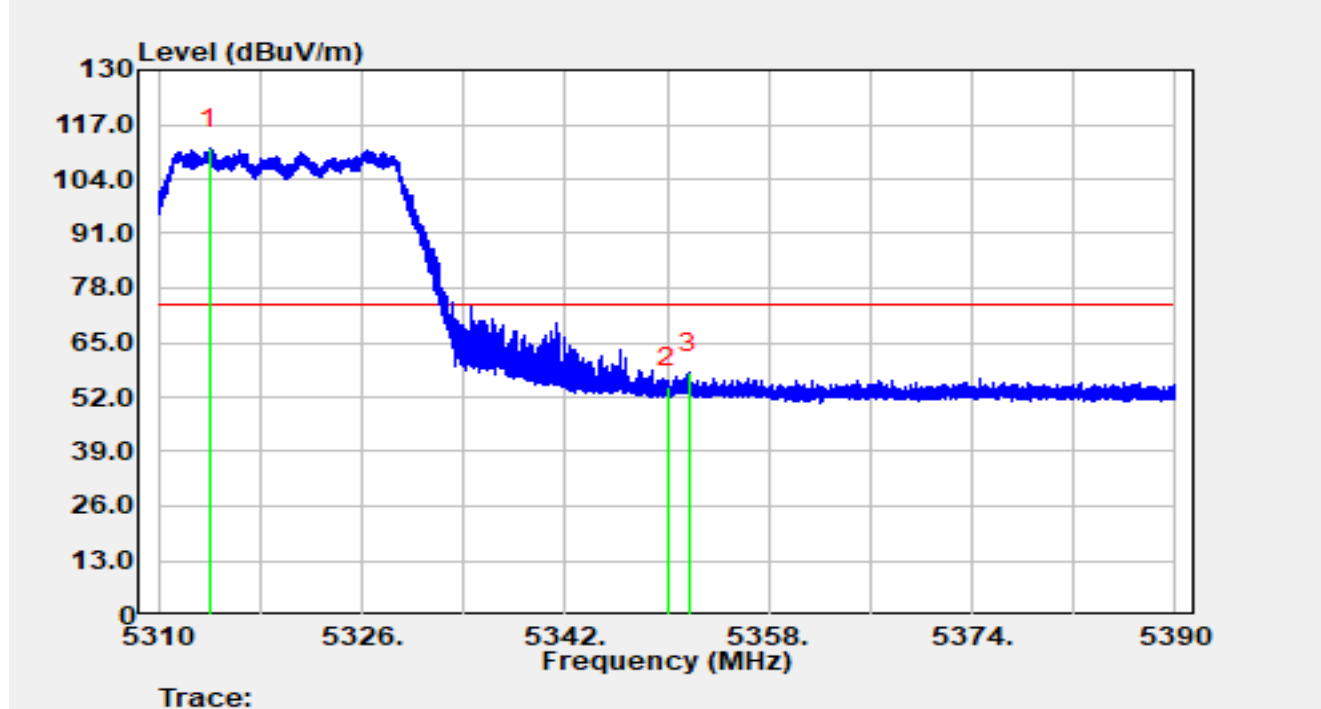


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5314.03         | 92.66          | 18.61      | 111.26               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 35.53          | 18.82      | 54.35                | -19.65      | 74.00          | Peak     |
| 3  | *    | 5351.73         | 38.84          | 18.85      | 57.68                | -16.32      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-30 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5320 MHz |               |            |

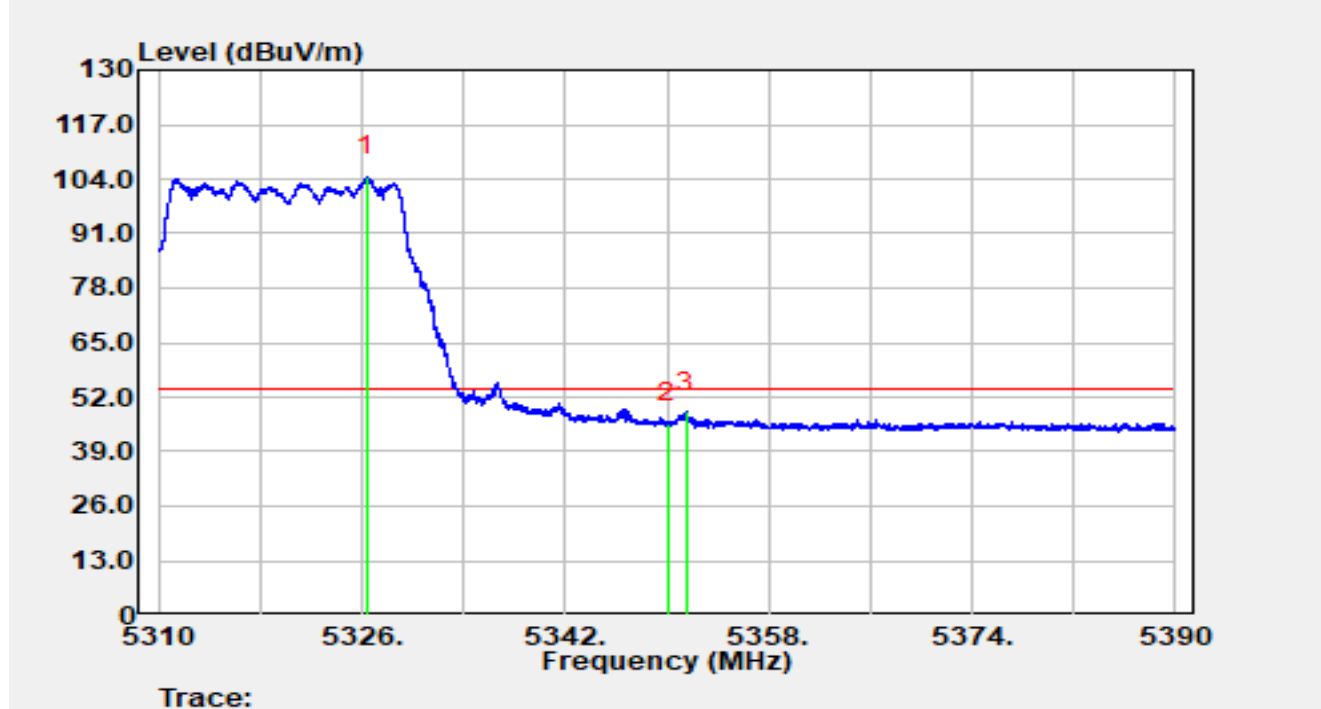


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5326.42         | 85.95          | 18.61      | 104.57               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 26.86          | 18.82      | 45.68                | -8.32       | 54.00          | Average  |
| 3  | *    | 5351.52         | 29.65          | 18.84      | 48.49                | -5.51       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5500 MHz |               |            |

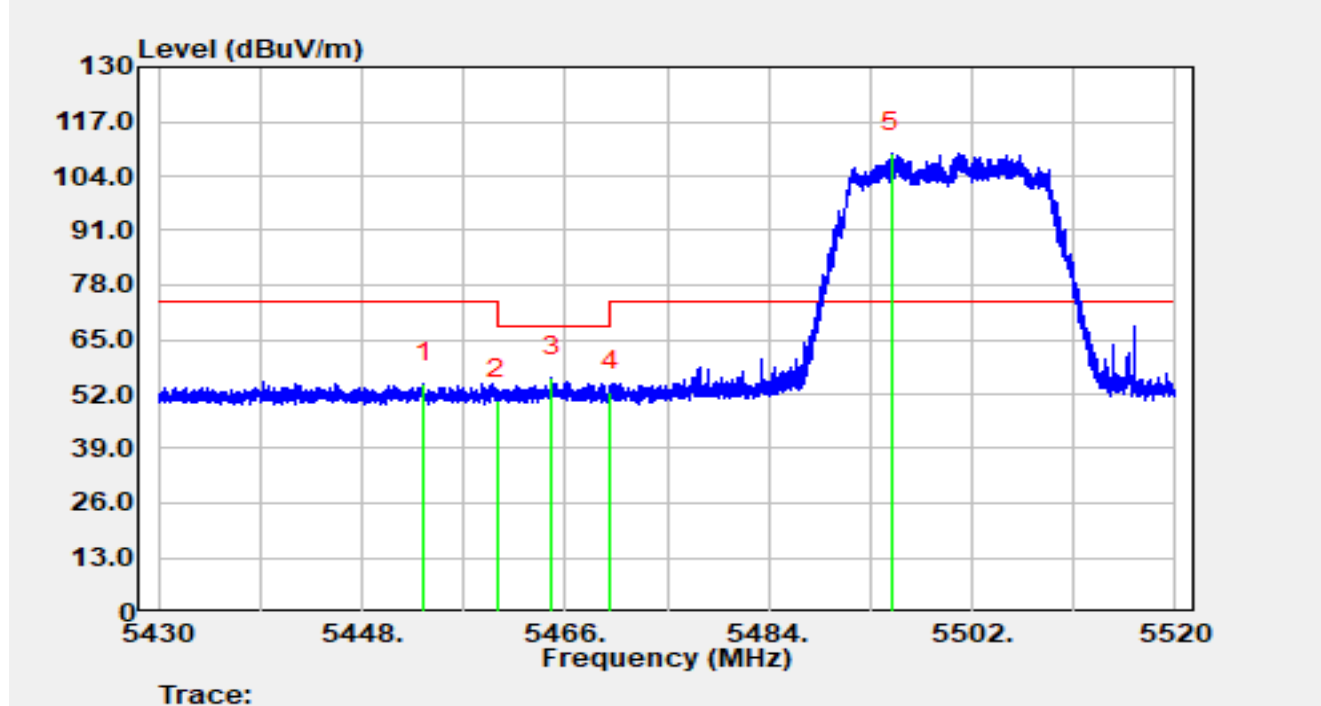


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5453.45         | 35.35          | 19.12      | 54.47                | -19.53      | 74.00          | Peak     |
| 2  |      | 5460.00         | 31.64          | 19.12      | 50.76                | -17.44      | 68.20          | Peak     |
| 3  | *    | 5464.84         | 36.97          | 19.08      | 56.05                | -12.15      | 68.20          | Peak     |
| 4  |      | 5470.00         | 33.65          | 19.02      | 52.67                | -15.53      | 68.20          | Peak     |
| 5  |      | 5494.89         | 90.64          | 18.86      | 109.50               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5500 MHz |               |            |

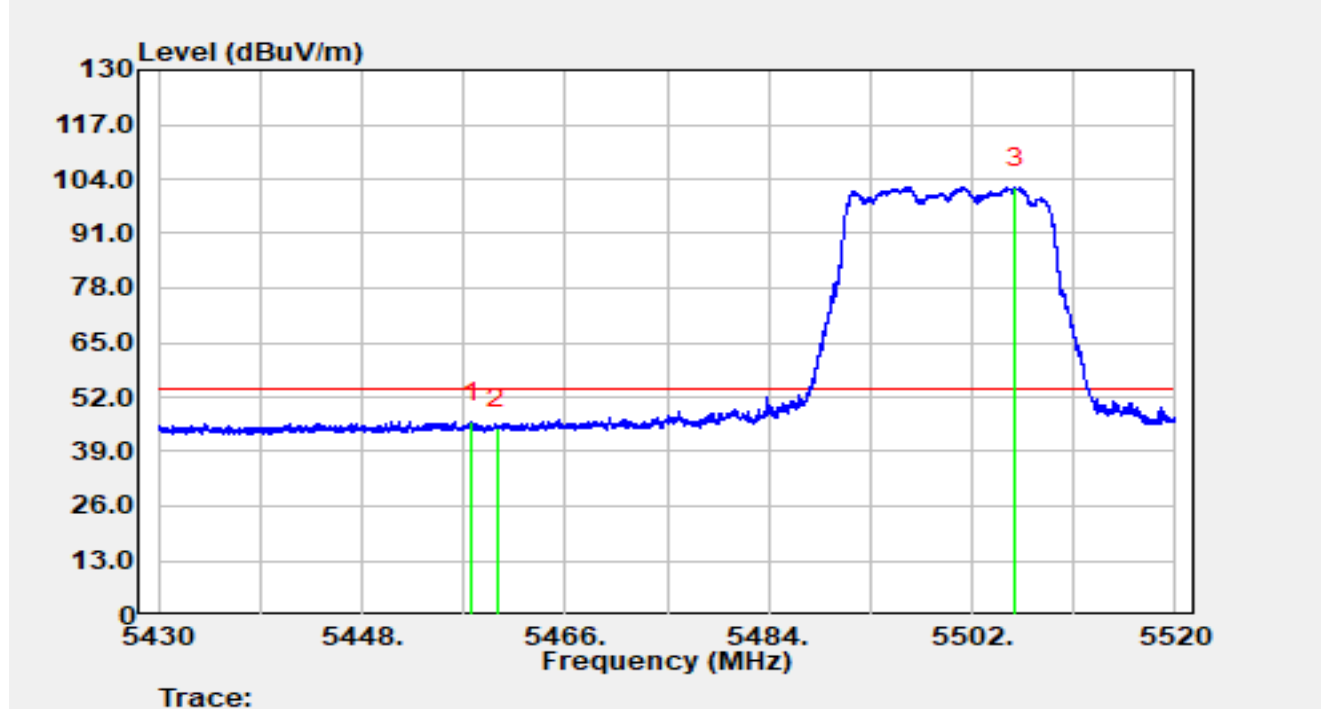


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.72         | 26.88          | 19.11      | 45.99                | -8.01       | 54.00          | Average  |
| 2  |      | 5460.00         | 25.45          | 19.12      | 44.57                | -9.43       | 54.00          | Average  |
| 3  |      | 5505.82         | 83.07          | 18.93      | 102.00               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5500 MHz |               |            |

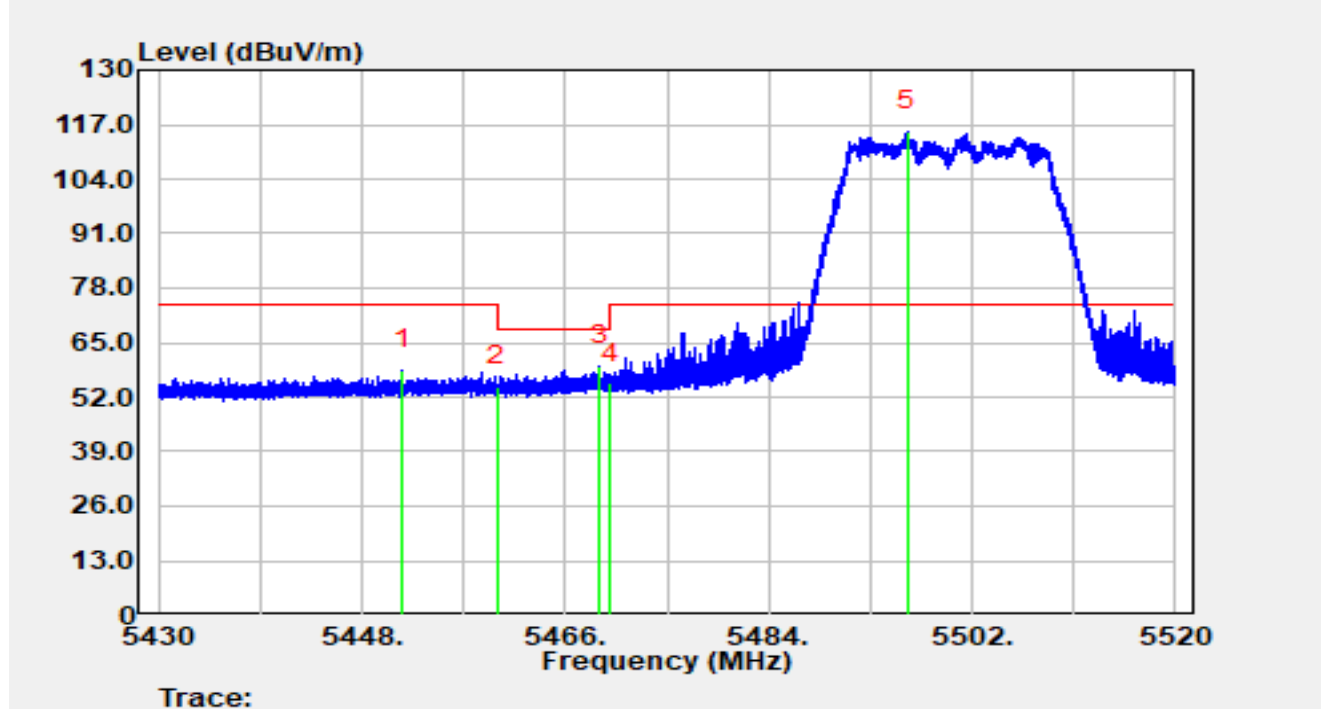


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5451.63         | 39.29          | 19.12      | 58.41                | -15.59      | 74.00          | Peak     |
| 2  |      | 5460.00         | 35.37          | 19.12      | 54.49                | -13.71      | 68.20          | Peak     |
| 3  | *    | 5469.06         | 40.43          | 19.03      | 59.46                | -8.74       | 68.20          | Peak     |
| 4  |      | 5470.00         | 36.34          | 19.02      | 55.37                | -12.83      | 68.20          | Peak     |
| 5  |      | 5496.31         | 96.50          | 18.86      | 115.36               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5500 MHz |               |            |

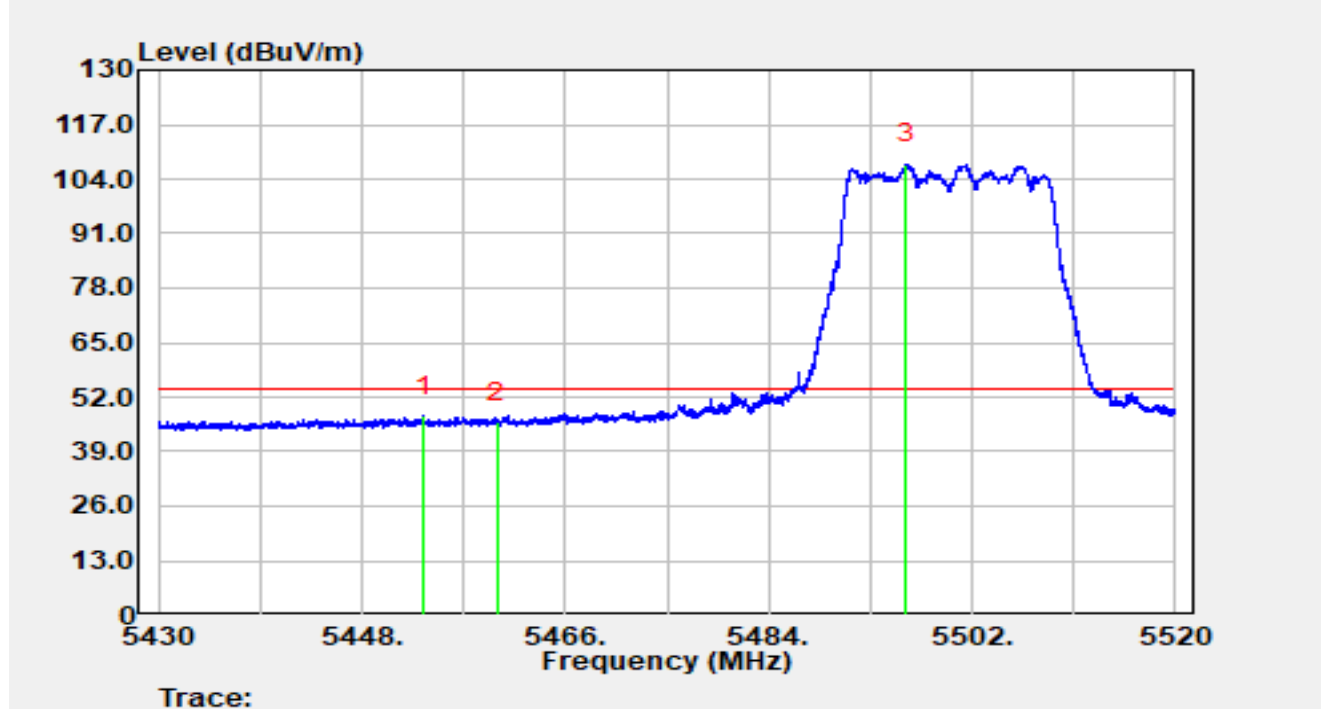


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5453.49         | 28.24          | 19.12      | 47.36                | -6.64       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.76          | 19.12      | 45.88                | -8.12       | 54.00          | Average  |
| 3  |      | 5496.19         | 88.60          | 18.86      | 107.46               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5700 MHz |               |            |

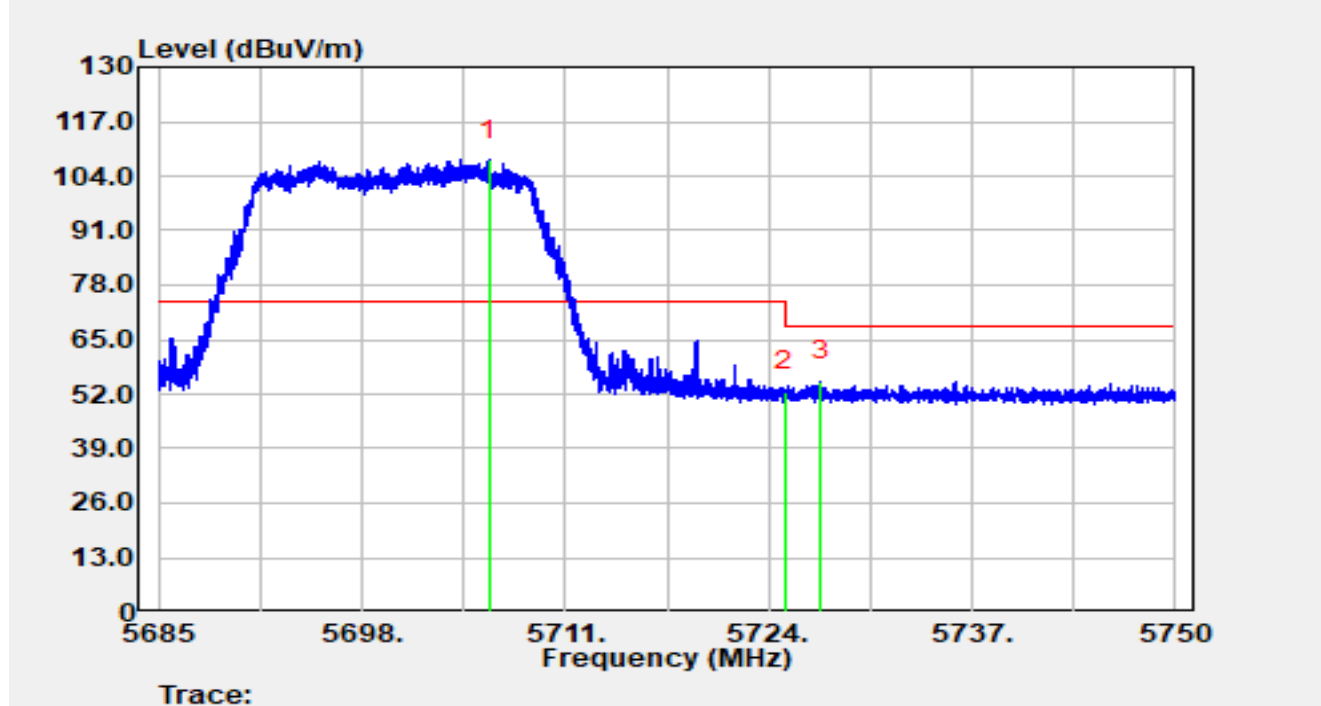


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5706.09         | 87.49          | 20.26      | 107.75               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 32.19          | 20.33      | 52.52                | -15.68      | 68.20          | Peak     |
| 3  | *    | 5727.35         | 34.76          | 20.30      | 55.06                | -13.14      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 25.5 °C                                | Humidity      | 40.1%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5700 MHz |               |            |

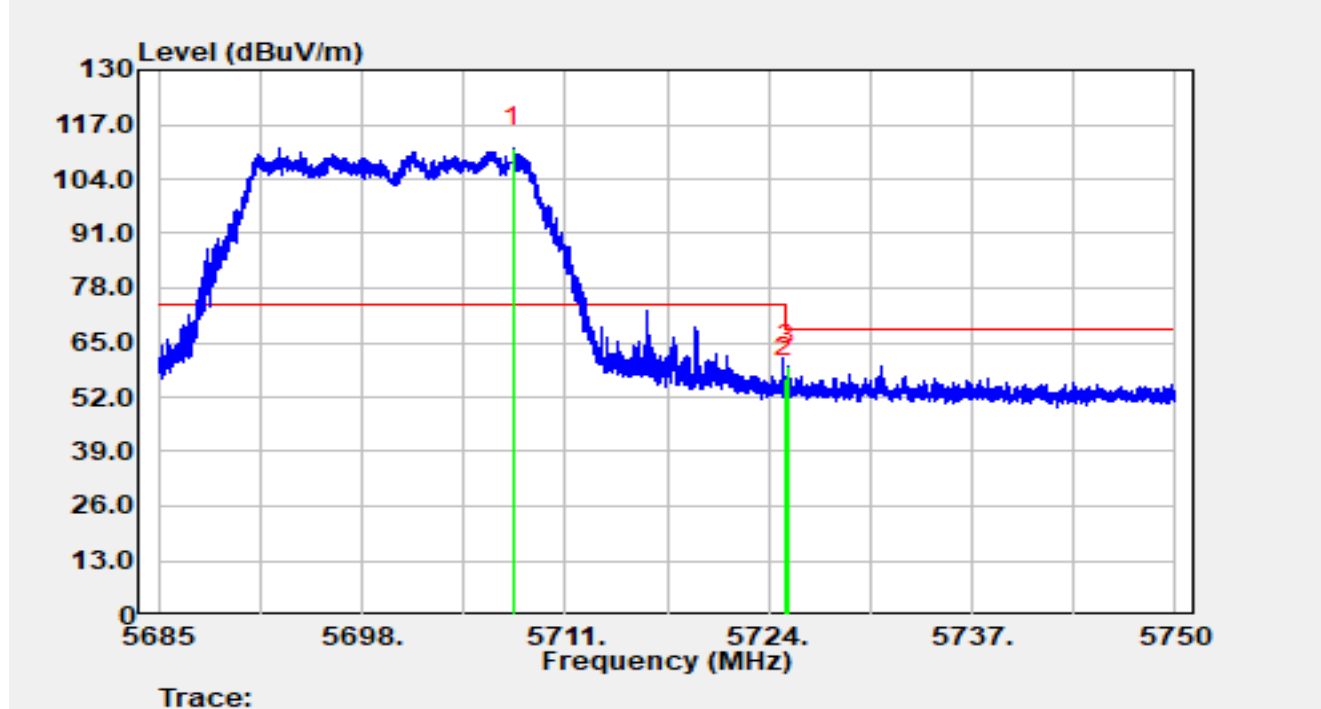


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5707.70         | 91.09          | 20.29      | 111.37               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 36.27          | 20.33      | 56.60                | -11.60      | 68.20          | Peak     |
| 3  | *    | 5725.23         | 39.15          | 20.32      | 59.48                | -8.72       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5745 MHz |               |            |

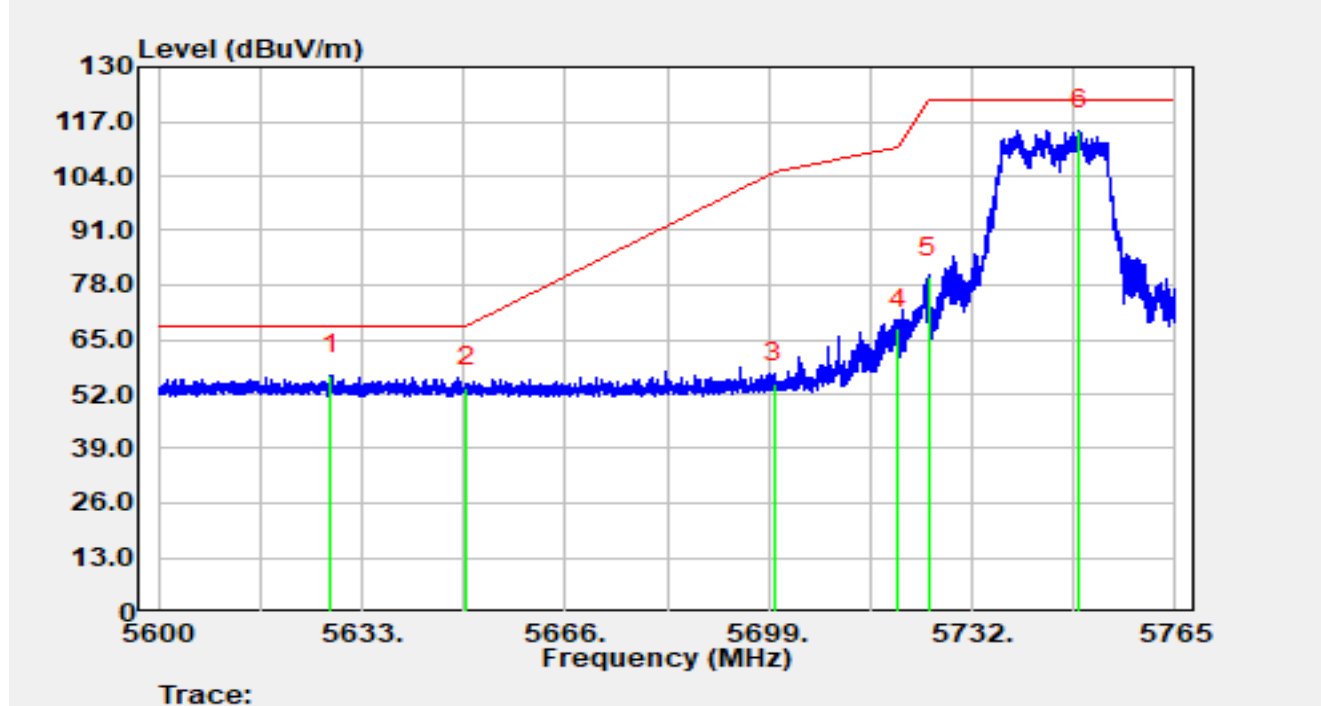


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5628.03         | 36.56          | 19.87      | 56.43                | -11.77      | 68.20          | Peak     |
| 2  |      | 5650.00         | 34.01          | 19.62      | 53.63                | -14.57      | 68.20          | Peak     |
| 3  |      | 5700.00         | 34.35          | 20.14      | 54.49                | -50.71      | 105.20         | Peak     |
| 4  |      | 5720.00         | 47.13          | 20.38      | 67.51                | -43.29      | 110.80         | Peak     |
| 5  |      | 5725.00         | 59.42          | 20.33      | 79.74                | -42.46      | 122.20         | Peak     |
| 6  |      | 5749.41         | 94.83          | 20.06      | 114.89               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5745 MHz |               |            |

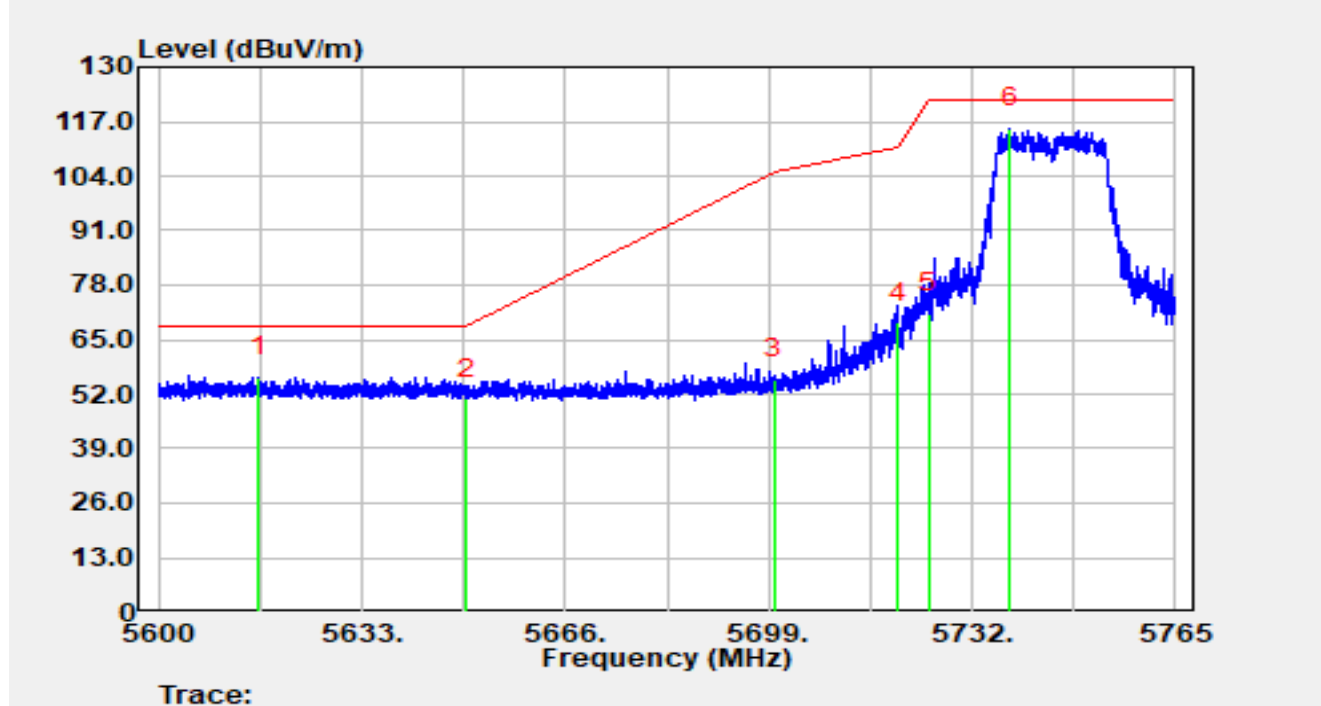


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5616.32         | 36.34          | 19.82      | 56.16                | -12.04      | 68.20          | Peak     |
| 2  |      | 5650.00         | 31.33          | 19.62      | 50.95                | -17.25      | 68.20          | Peak     |
| 3  |      | 5700.00         | 35.48          | 20.14      | 55.62                | -49.58      | 105.20         | Peak     |
| 4  |      | 5720.00         | 48.78          | 20.38      | 69.16                | -41.64      | 110.80         | Peak     |
| 5  |      | 5725.00         | 50.88          | 20.33      | 71.21                | -50.99      | 122.20         | Peak     |
| 6  |      | 5738.12         | 95.12          | 20.19      | 115.31               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

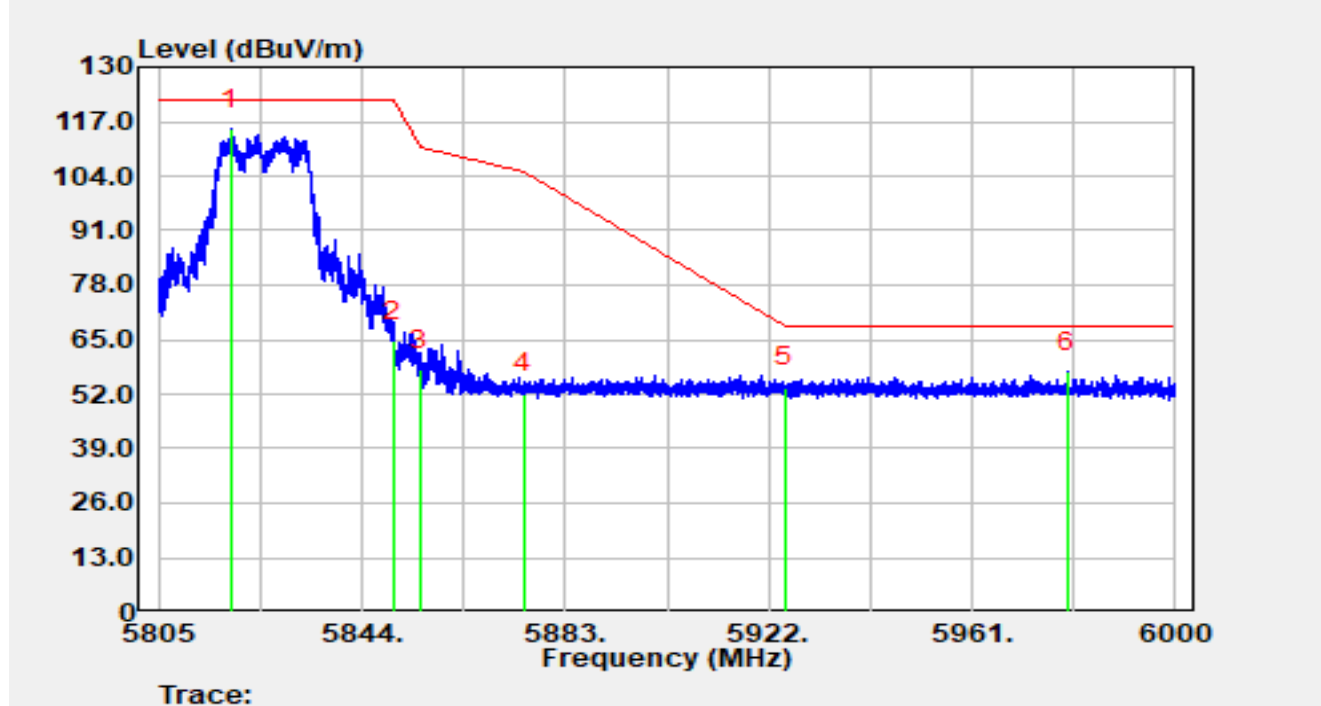


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5818.86         | 94.57          | 20.60      | 115.16               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 44.24          | 20.30      | 64.54                | -57.66      | 122.20         | Peak     |
| 3  |      | 5855.00         | 37.37          | 20.30      | 57.68                | -53.12      | 110.80         | Peak     |
| 4  |      | 5875.00         | 31.50          | 20.63      | 52.13                | -53.07      | 105.20         | Peak     |
| 5  |      | 5925.00         | 33.09          | 20.59      | 53.67                | -14.53      | 68.20          | Peak     |
| 6  | *    | 5979.29         | 36.29          | 20.96      | 57.25                | -10.95      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

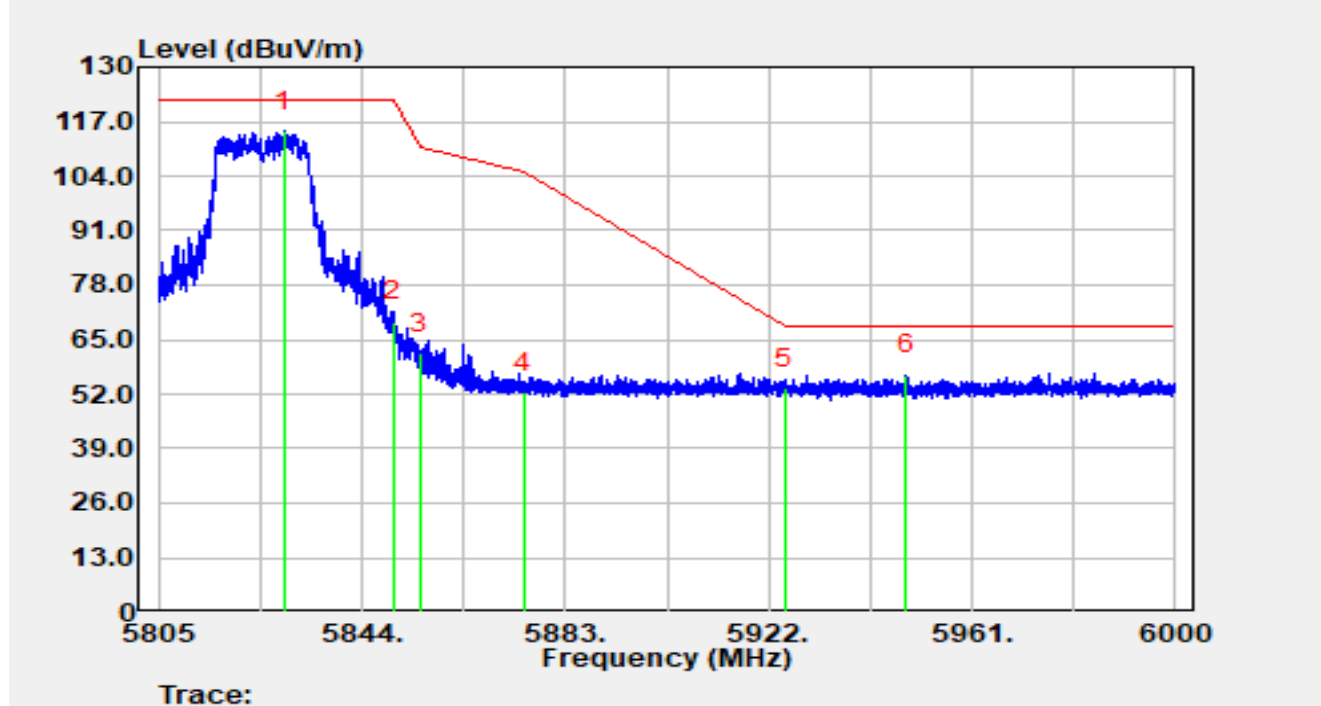


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5829.04         | 94.06          | 20.50      | 114.56               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 49.03          | 20.30      | 69.33                | -52.87      | 122.20         | Peak     |
| 3  |      | 5855.00         | 41.36          | 20.30      | 61.67                | -49.13      | 110.80         | Peak     |
| 4  |      | 5875.00         | 31.73          | 20.63      | 52.36                | -52.84      | 105.20         | Peak     |
| 5  |      | 5925.00         | 32.76          | 20.59      | 53.35                | -14.85      | 68.20          | Peak     |
| 6  | *    | 5948.44         | 35.78          | 20.66      | 56.44                | -11.76      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

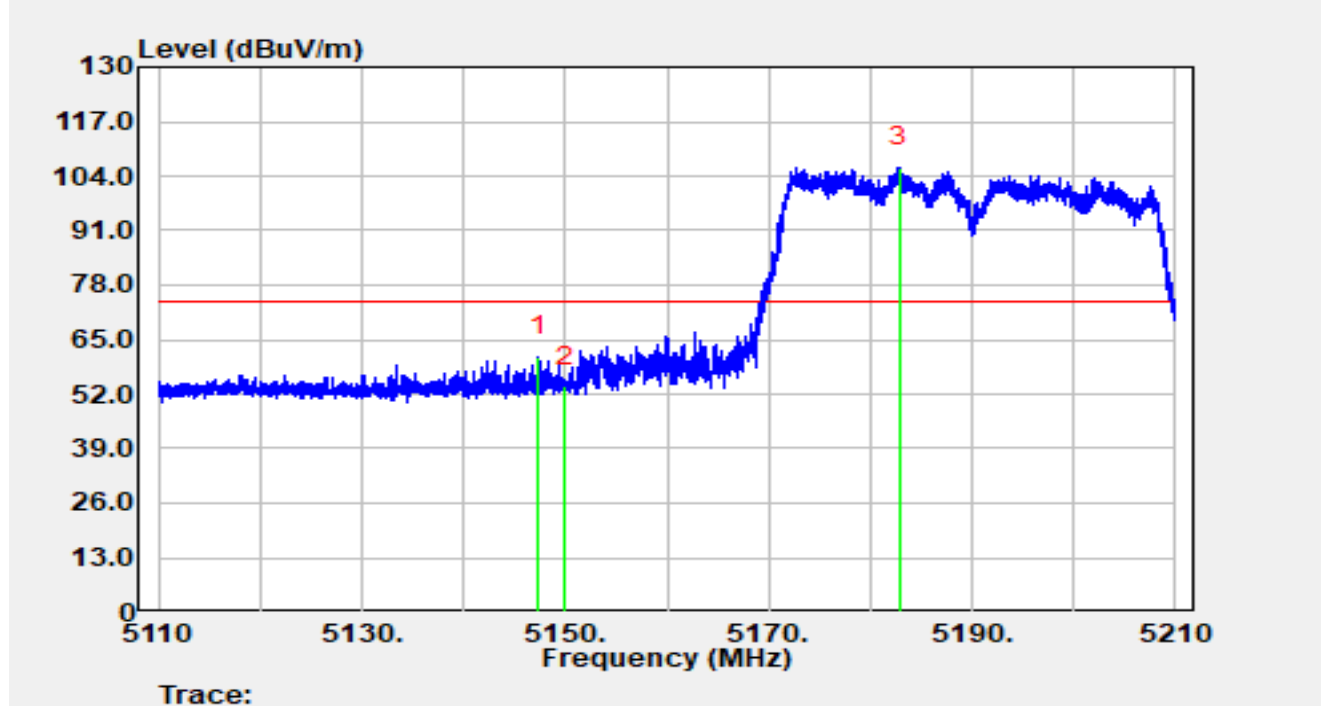


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.37         | 42.32          | 18.53      | 60.84                | -13.16      | 74.00          | Peak     |
| 2  |      | 5150.00         | 35.42          | 18.52      | 53.94                | -20.06      | 74.00          | Peak     |
| 3  |      | 5182.80         | 87.27          | 18.82      | 106.09               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

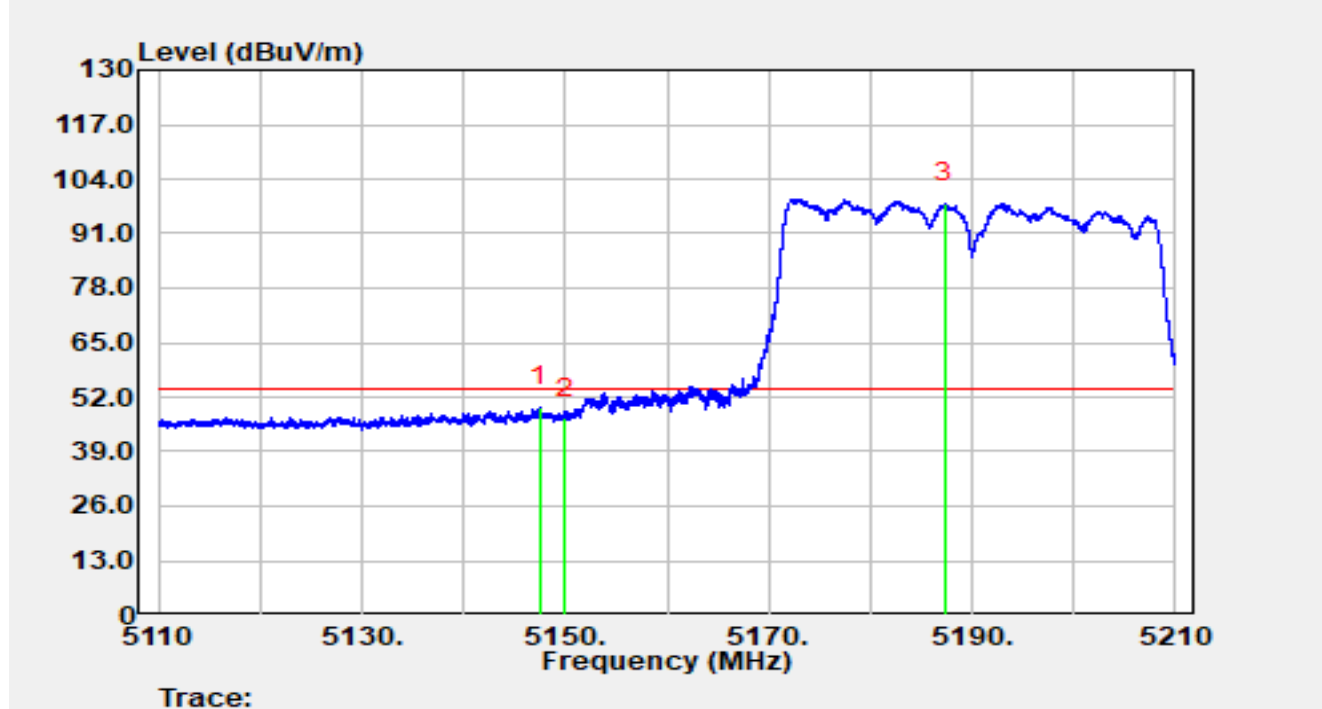


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.54         | 31.07          | 18.53      | 49.60                | -4.40       | 54.00          | Average  |
| 2  |      | 5150.00         | 28.50          | 18.52      | 47.02                | -6.98       | 54.00          | Average  |
| 3  |      | 5187.26         | 79.31          | 18.81      | 98.12                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

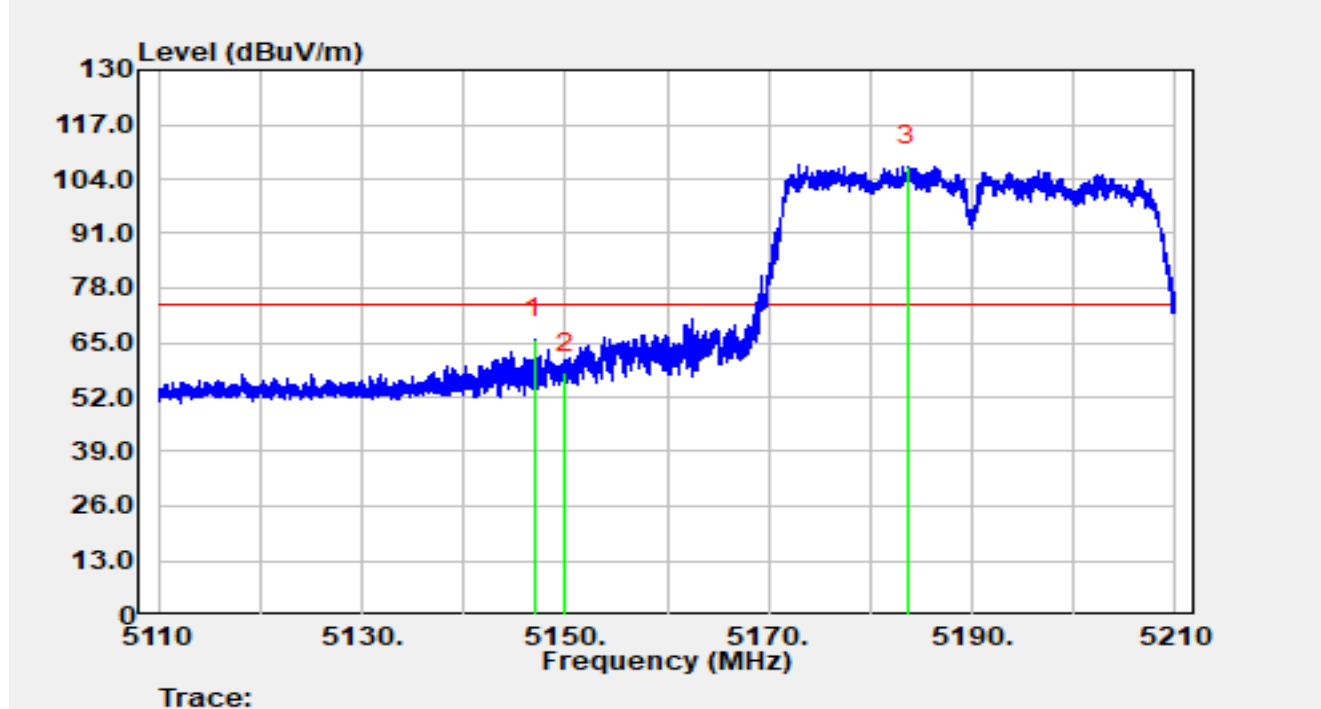


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.96         | 47.35          | 18.53      | 65.88                | -8.12       | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.30          | 18.52      | 57.82                | -16.18      | 74.00          | Peak     |
| 3  |      | 5183.65         | 88.30          | 18.82      | 107.12               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

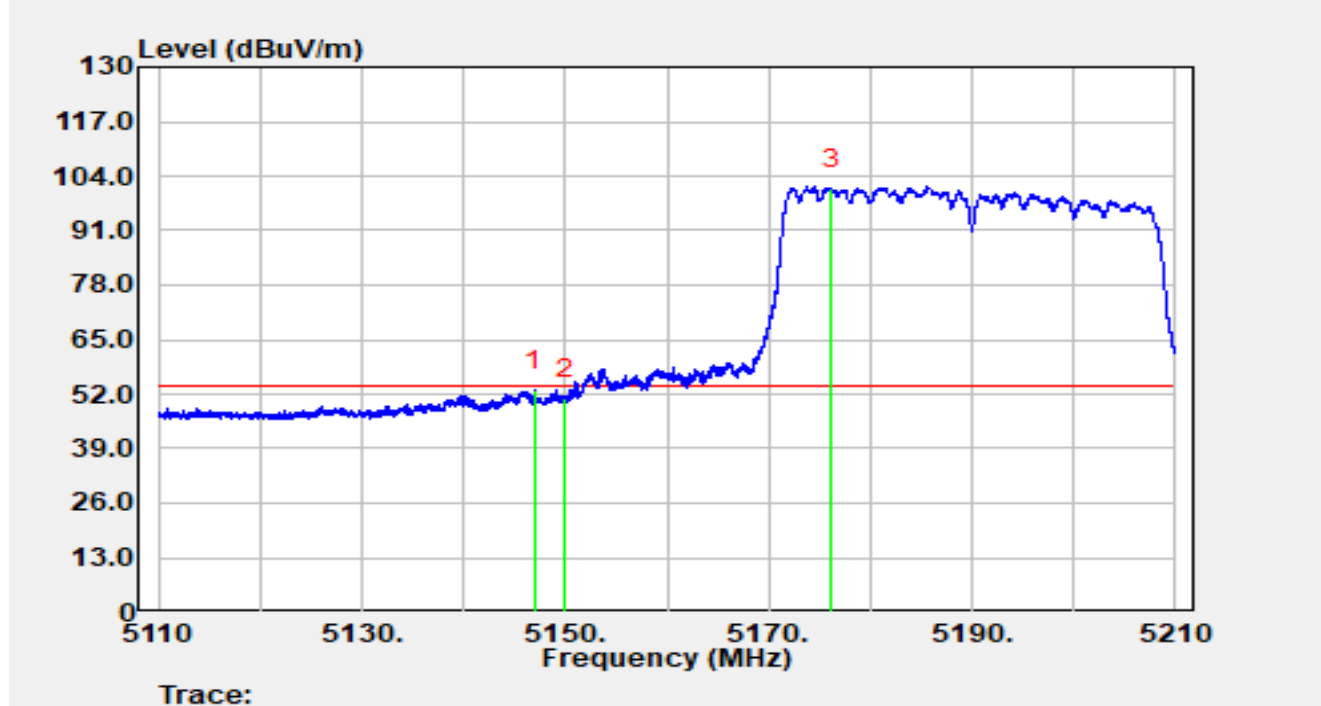


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.96         | 34.36          | 18.53      | 52.88                | -1.12       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.26          | 18.52      | 50.78                | -3.22       | 54.00          | Average  |
| 3  |      | 5176.19         | 82.02          | 18.80      | 100.82               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3°C                                 | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5310 MHz |               |            |

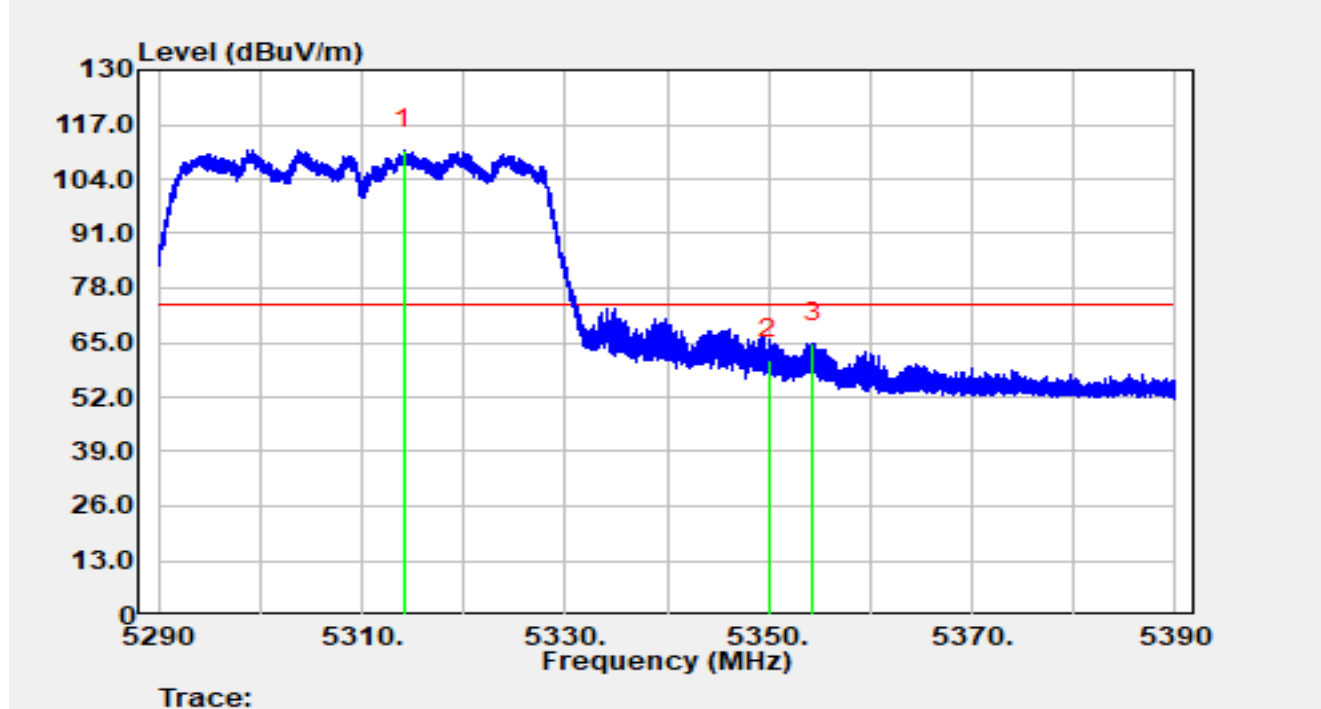


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5314.16         | 92.36          | 18.61      | 110.97               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 42.06          | 18.82      | 60.88                | -13.12      | 74.00          | Peak     |
| 3  | *    | 5354.30         | 46.01          | 18.88      | 64.89                | -9.11       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5310 MHz |               |            |

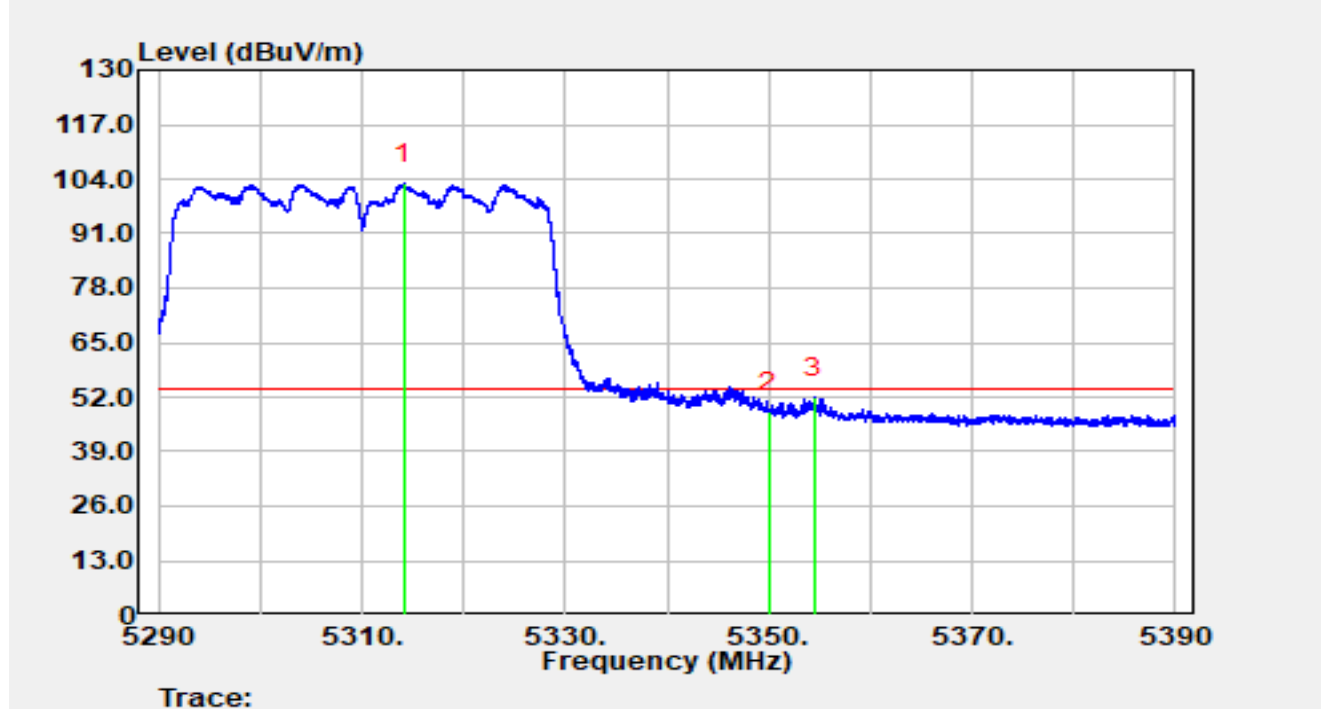


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5314.09         | 84.19          | 18.61      | 102.80               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 29.62          | 18.82      | 48.44                | -5.56       | 54.00          | Average  |
| 3  | *    | 5354.48         | 33.09          | 18.88      | 51.98                | -2.02       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5310 MHz |               |            |

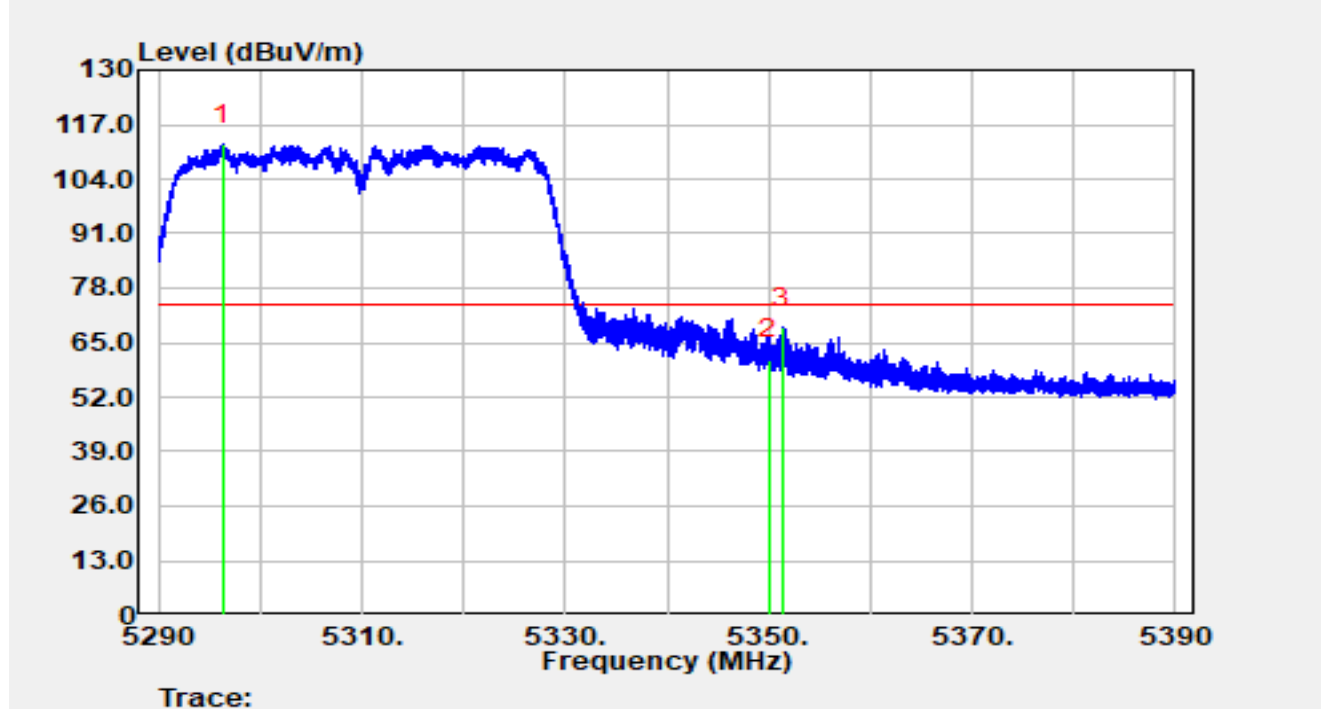


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5296.34         | 93.44          | 18.72      | 112.17               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 42.12          | 18.82      | 60.94                | -13.06      | 74.00          | Peak     |
| 3  | *    | 5351.39         | 49.69          | 18.84      | 68.53                | -5.47       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5310 MHz |               |            |

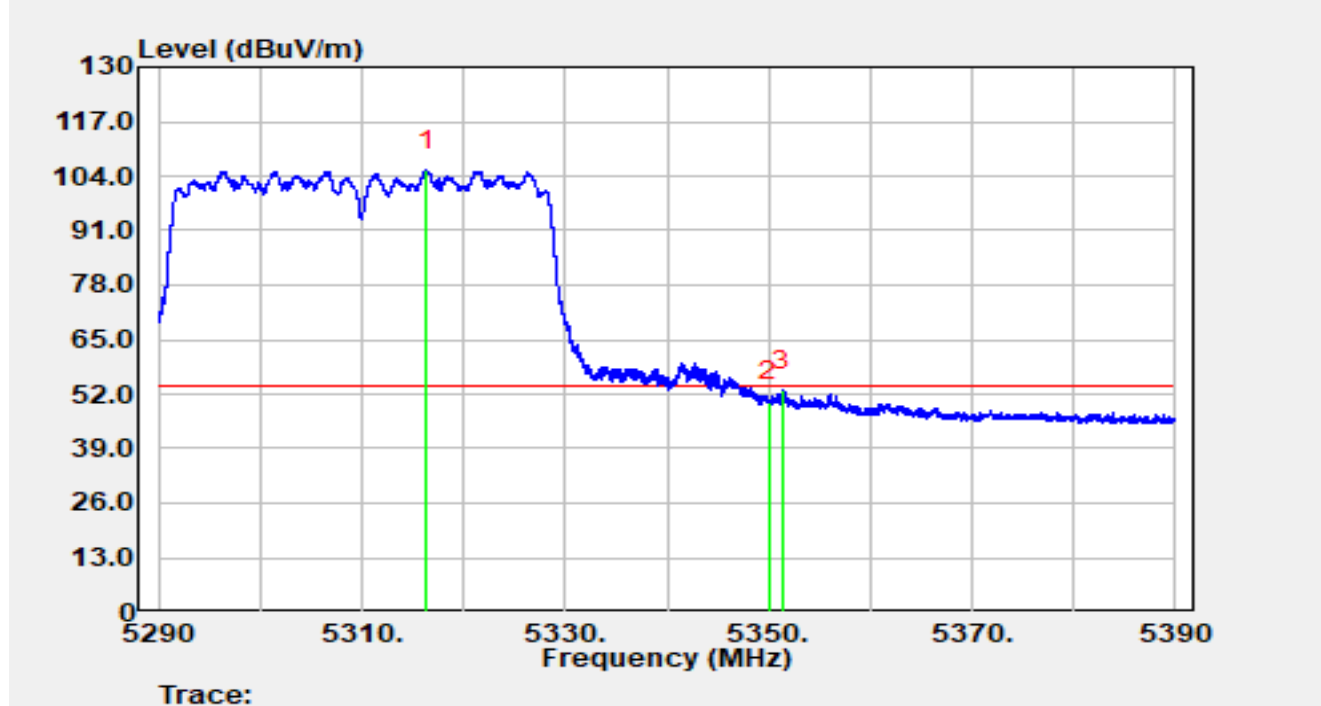


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5316.41         | 86.64          | 18.60      | 105.24               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 31.35          | 18.82      | 50.17                | -3.83       | 54.00          | Average  |
| 3  | *    | 5351.28         | 34.11          | 18.84      | 52.95                | -1.05       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5510 MHz |               |            |

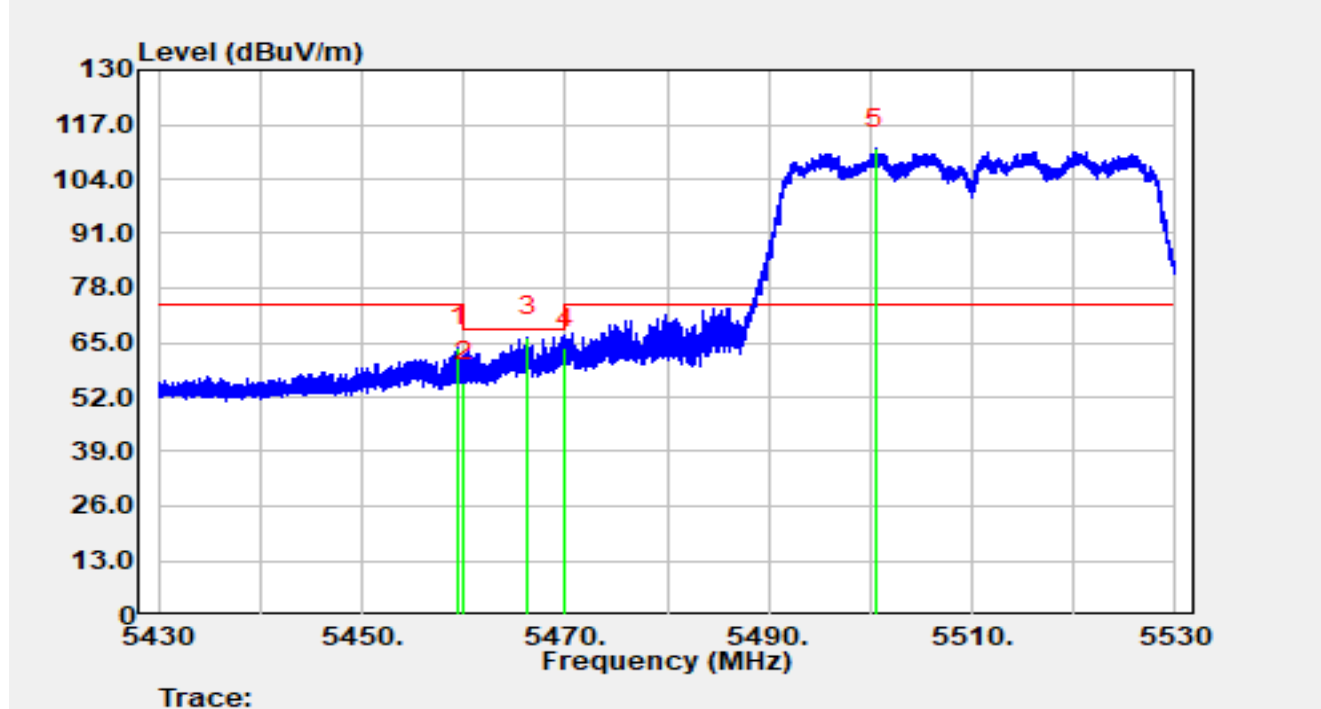


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5459.49         | 44.70          | 19.12      | 63.82                | -10.18      | 74.00          | Peak     |
| 2  |      | 5460.00         | 36.50          | 19.12      | 55.61                | -12.59      | 68.20          | Peak     |
| 3  | *    | 5466.37         | 47.35          | 19.06      | 66.41                | -1.79       | 68.20          | Peak     |
| 4  |      | 5470.00         | 44.73          | 19.02      | 63.76                | -4.44       | 68.20          | Peak     |
| 5  |      | 5500.45         | 92.40          | 18.89      | 111.29               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5510 MHz |               |            |

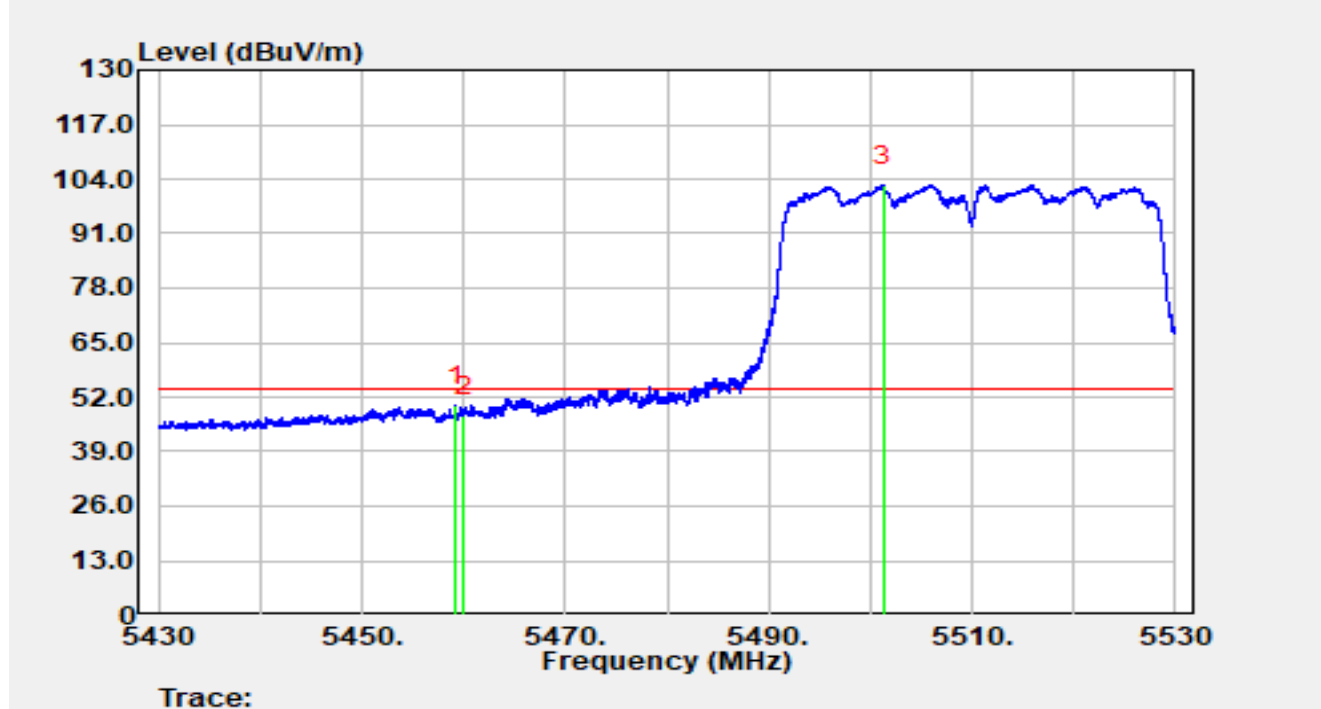


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.18         | 30.80          | 19.12      | 49.92                | -4.08       | 54.00          | Average  |
| 2  |      | 5460.00         | 28.35          | 19.12      | 47.47                | -6.53       | 54.00          | Average  |
| 3  |      | 5501.27         | 83.54          | 18.90      | 102.43               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5510 MHz |               |            |

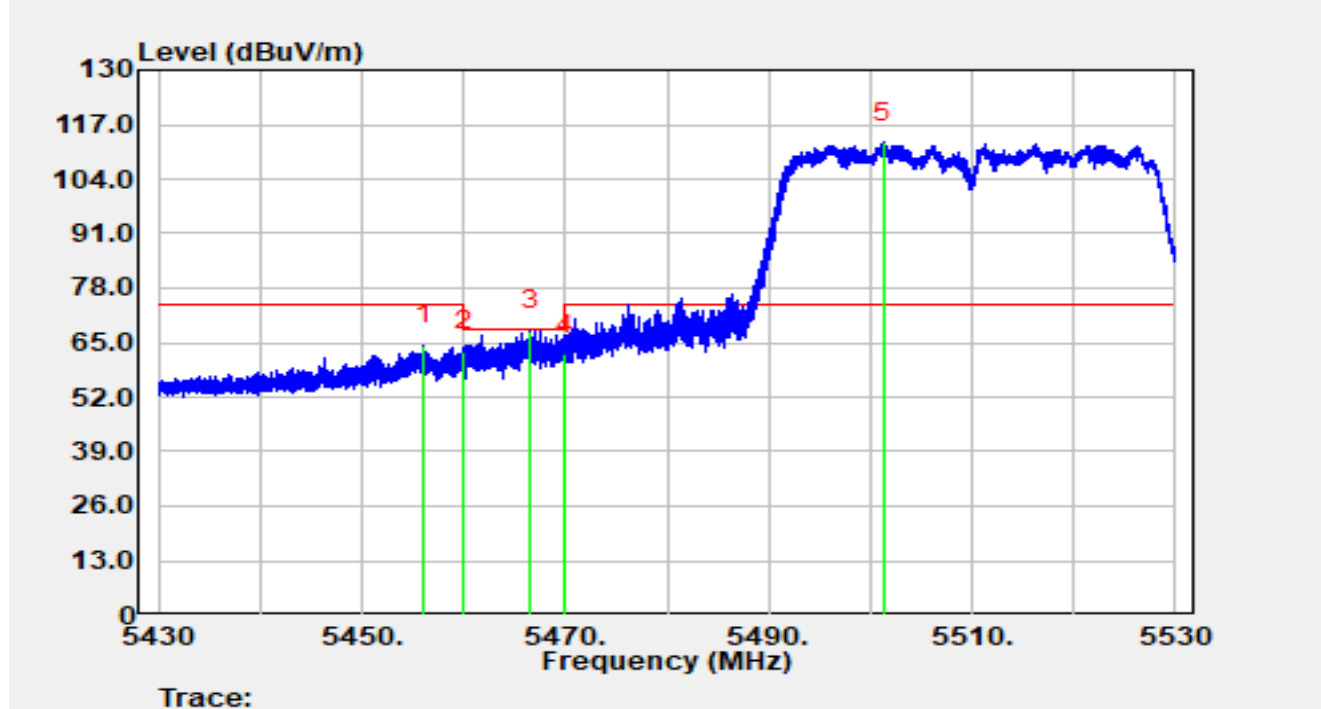


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5456.07         | 45.24          | 19.11      | 64.35                | -9.65       | 74.00          | Peak     |
| 2  |      | 5460.00         | 43.91          | 19.12      | 63.03                | -5.17       | 68.20          | Peak     |
| 3  | *    | 5466.51         | 48.75          | 19.06      | 67.81                | -0.39       | 68.20          | Peak     |
| 4  |      | 5470.00         | 43.03          | 19.02      | 62.06                | -6.14       | 68.20          | Peak     |
| 5  |      | 5501.22         | 93.88          | 18.90      | 112.77               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5510 MHz |               |            |

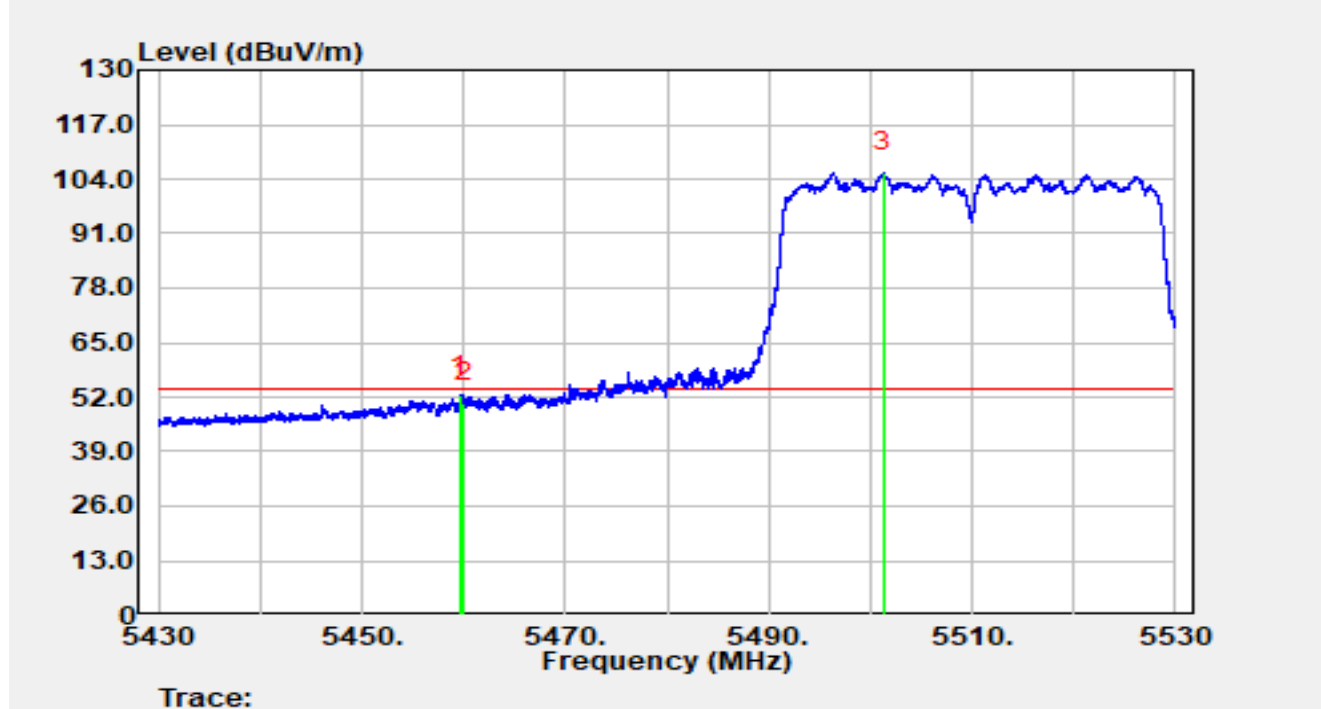


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.69         | 33.19          | 19.12      | 52.31                | -1.69       | 54.00          | Average  |
| 2  |      | 5460.00         | 31.60          | 19.12      | 50.72                | -3.28       | 54.00          | Average  |
| 3  |      | 5501.34         | 86.61          | 18.90      | 105.51               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5670 MHz |               |            |

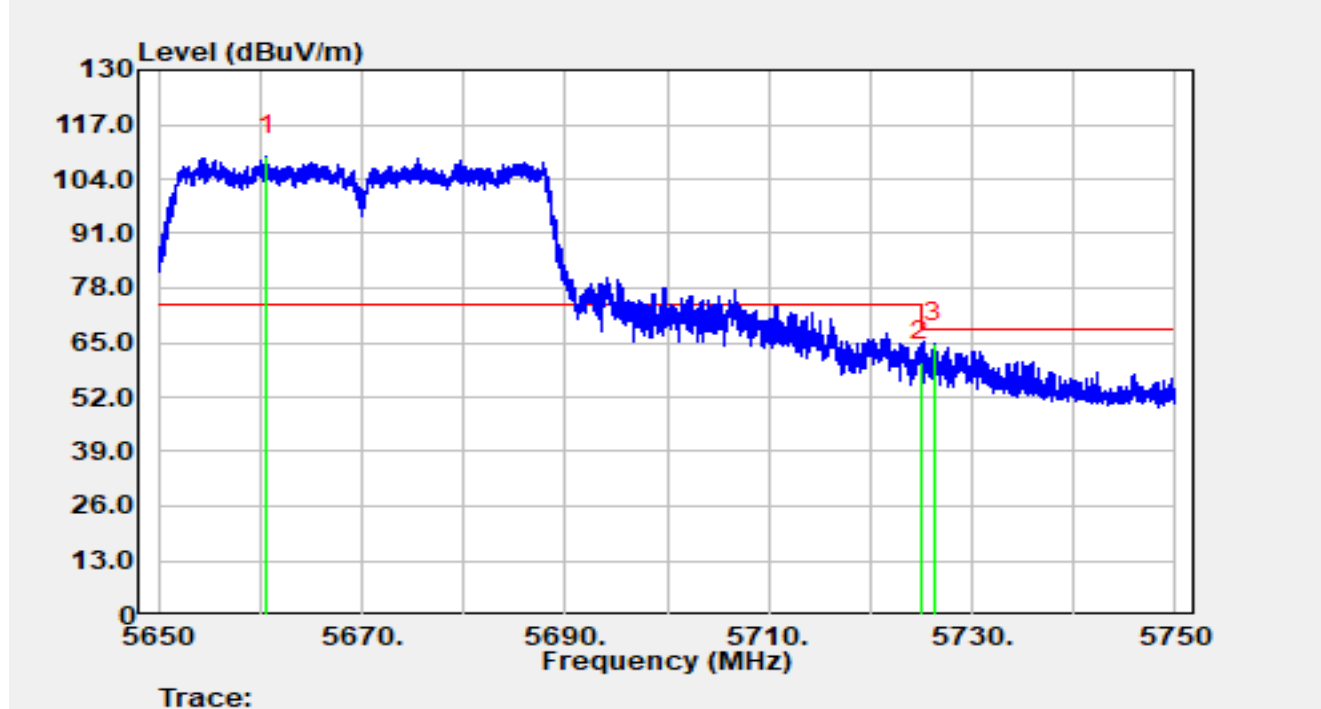


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5660.59         | 89.93          | 19.54      | 109.47               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 40.19          | 20.33      | 60.52                | -7.68       | 68.20          | Peak     |
| 3  | *    | 5726.26         | 44.45          | 20.31      | 64.76                | -3.44       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5670 MHz |               |            |

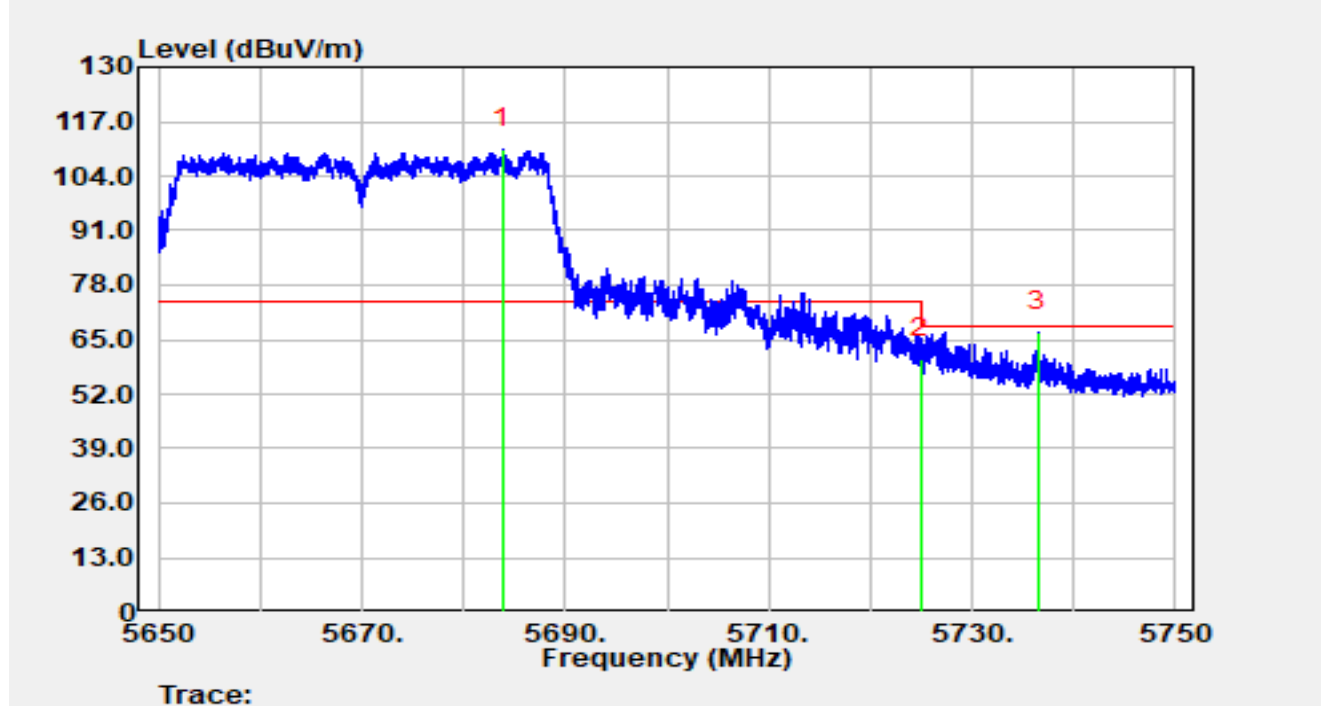


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5683.84         | 90.77          | 19.73      | 110.51               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 40.18          | 20.33      | 60.51                | -7.69       | 68.20          | Peak     |
| 3  | *    | 5736.46         | 46.54          | 20.21      | 66.75                | -1.45       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5755 MHz |               |            |

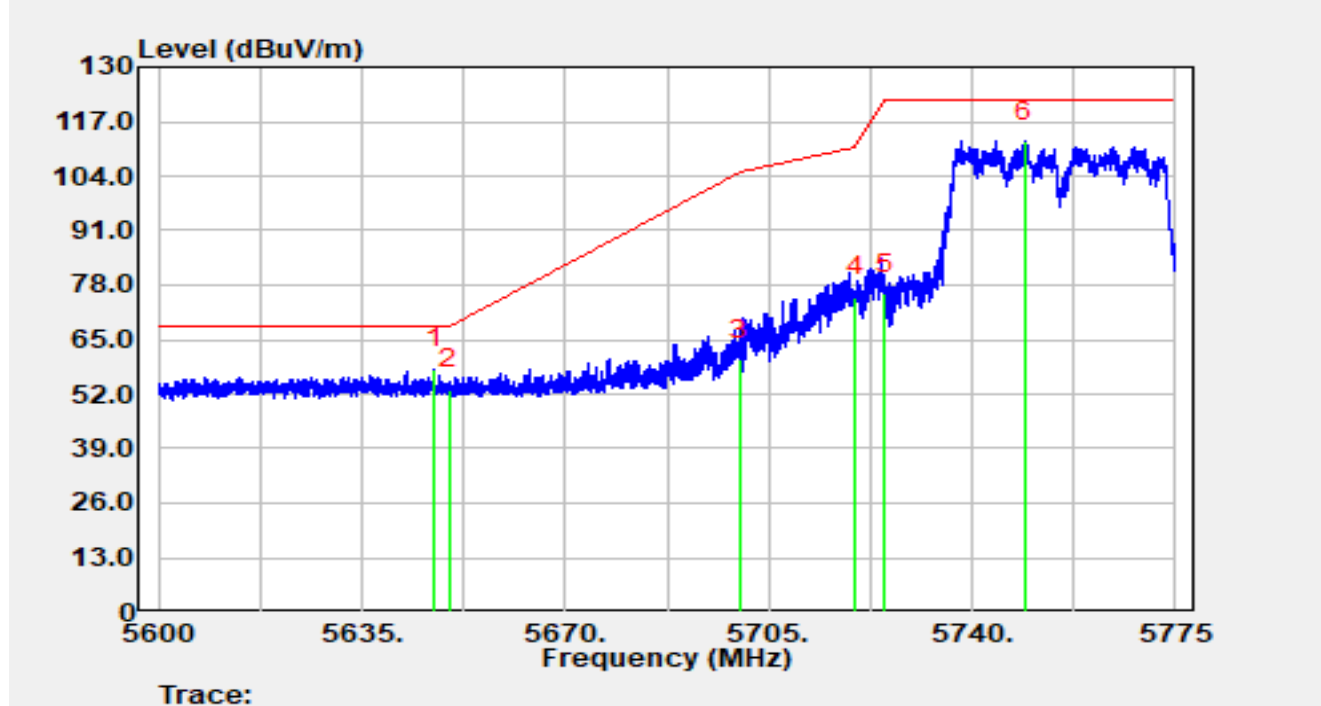


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5647.44         | 38.23          | 19.67      | 57.89                | -10.31      | 68.20          | Peak     |
| 2  |      | 5650.00         | 33.53          | 19.62      | 53.15                | -15.05      | 68.20          | Peak     |
| 3  |      | 5700.00         | 39.98          | 20.14      | 60.12                | -45.08      | 105.20         | Peak     |
| 4  |      | 5720.00         | 54.75          | 20.38      | 75.13                | -35.67      | 110.80         | Peak     |
| 5  |      | 5725.00         | 55.50          | 20.33      | 75.83                | -46.37      | 122.20         | Peak     |
| 6  |      | 5749.05         | 92.07          | 20.06      | 112.13               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5755 MHz |               |            |

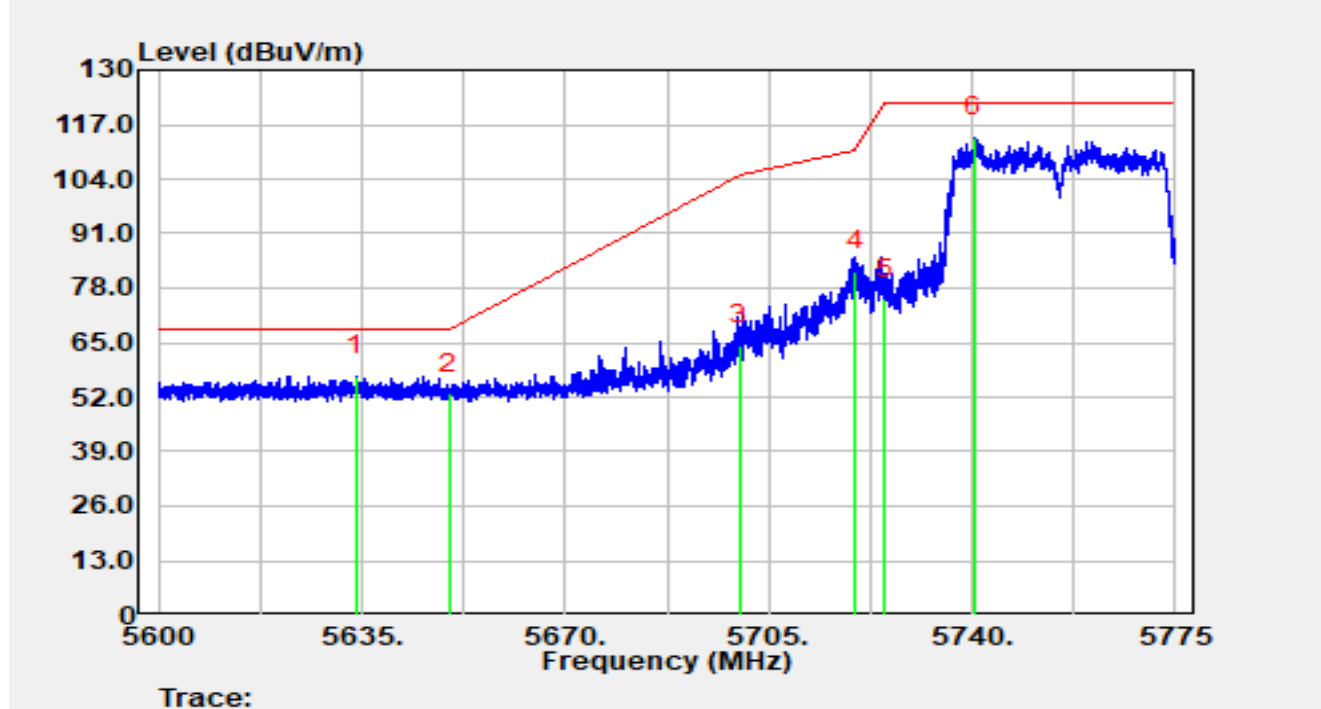


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5634.04         | 37.16          | 19.89      | 57.05                | -11.15      | 68.20          | Peak     |
| 2  |      | 5650.00         | 33.26          | 19.62      | 52.89                | -15.31      | 68.20          | Peak     |
| 3  |      | 5700.00         | 44.12          | 20.14      | 64.27                | -40.93      | 105.20         | Peak     |
| 4  |      | 5720.00         | 61.61          | 20.38      | 81.99                | -28.81      | 110.80         | Peak     |
| 5  |      | 5725.00         | 55.03          | 20.33      | 75.35                | -46.85      | 122.20         | Peak     |
| 6  |      | 5740.39         | 93.69          | 20.15      | 113.84               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5795 MHz |               |            |

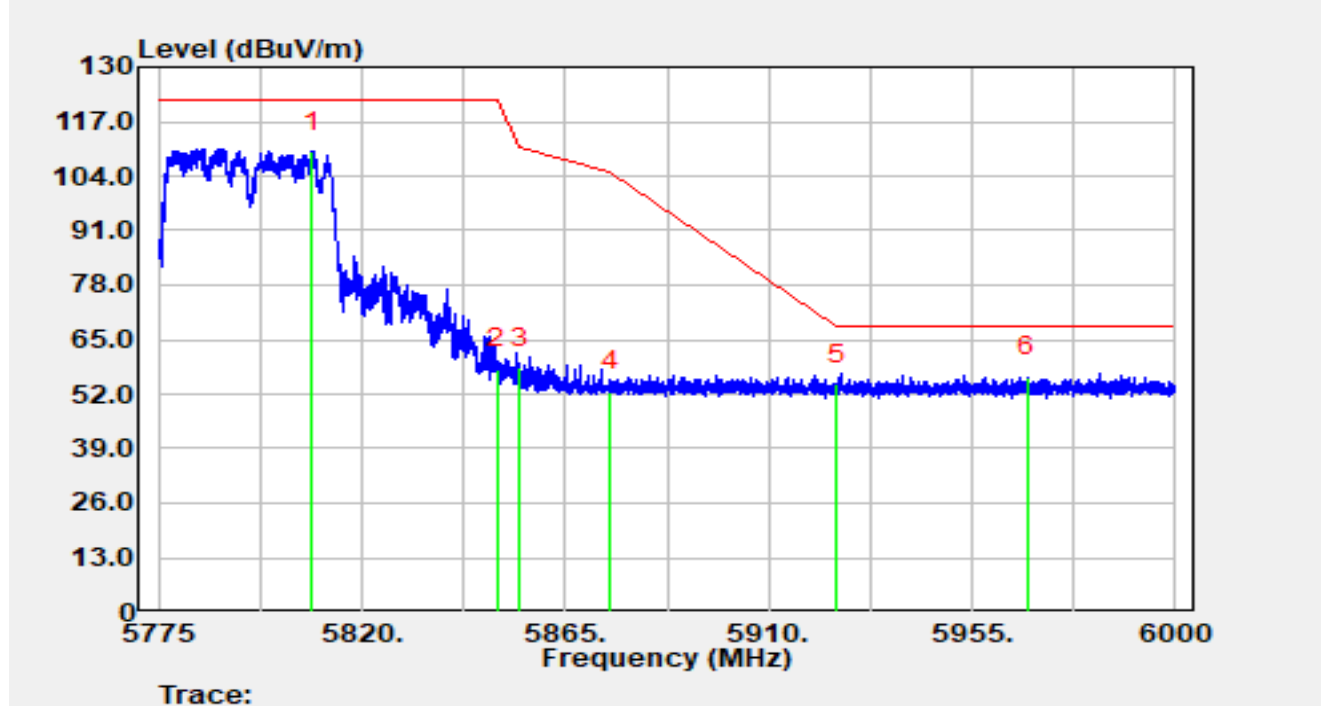


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5809.09         | 89.19          | 20.64      | 109.84               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 37.65          | 20.30      | 57.95                | -64.25      | 122.20         | Peak     |
| 3  |      | 5855.00         | 37.92          | 20.30      | 58.23                | -52.57      | 110.80         | Peak     |
| 4  |      | 5875.00         | 32.04          | 20.63      | 52.67                | -52.53      | 105.20         | Peak     |
| 5  |      | 5925.00         | 33.66          | 20.59      | 54.24                | -13.96      | 68.20          | Peak     |
| 6  | *    | 5967.26         | 35.23          | 20.81      | 56.04                | -12.16      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-07-31 |
| Temperature  | 23.1 °C                                | Humidity      | 48.2%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5795 MHz |               |            |

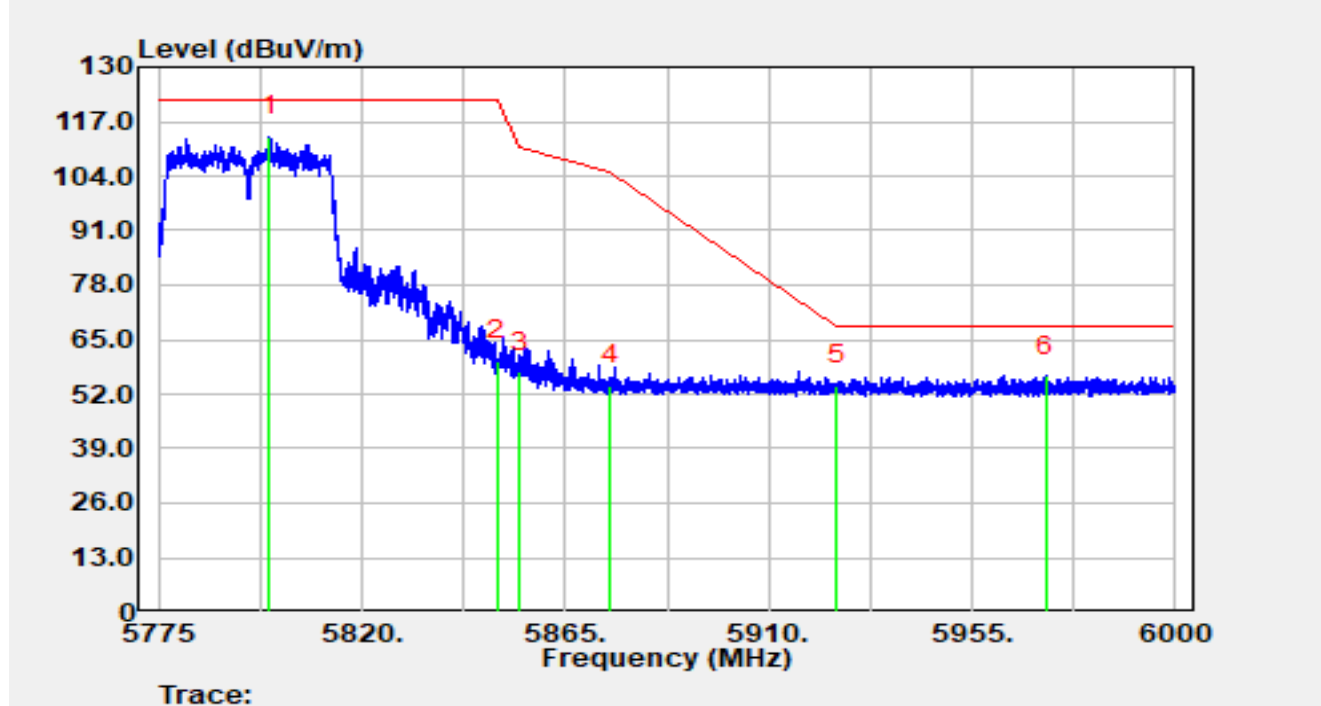


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5799.66         | 92.81          | 20.61      | 113.42               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 39.56          | 20.30      | 59.86                | -62.34      | 122.20         | Peak     |
| 3  |      | 5855.00         | 36.87          | 20.30      | 57.17                | -53.63      | 110.80         | Peak     |
| 4  |      | 5875.00         | 33.36          | 20.63      | 53.99                | -51.21      | 105.20         | Peak     |
| 5  |      | 5925.00         | 33.54          | 20.59      | 54.12                | -14.08      | 68.20          | Peak     |
| 6  | *    | 5971.29         | 35.38          | 20.87      | 56.25                | -11.95      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

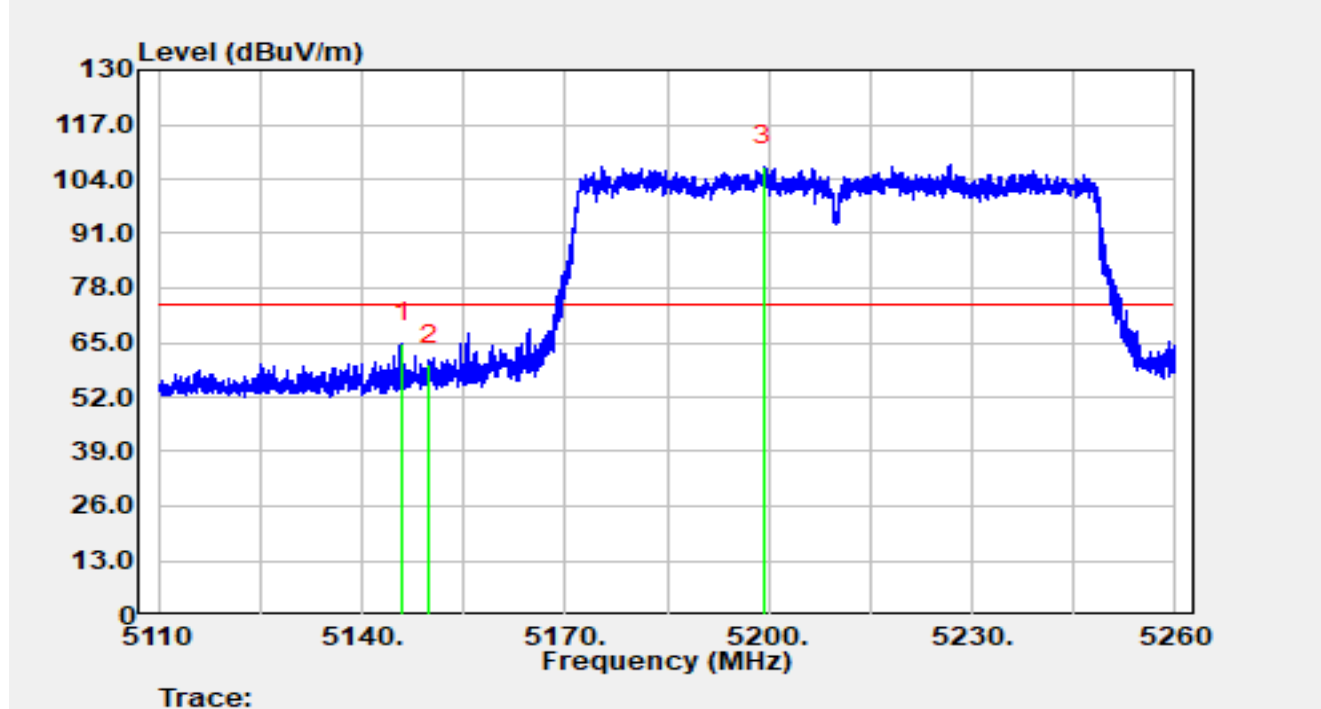


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5145.96         | 46.31          | 18.53      | 64.84                | -9.16       | 74.00          | Peak     |
| 2  |      | 5150.00         | 41.19          | 18.52      | 59.71                | -14.29      | 74.00          | Peak     |
| 3  |      | 5199.24         | 88.46          | 18.69      | 107.15               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

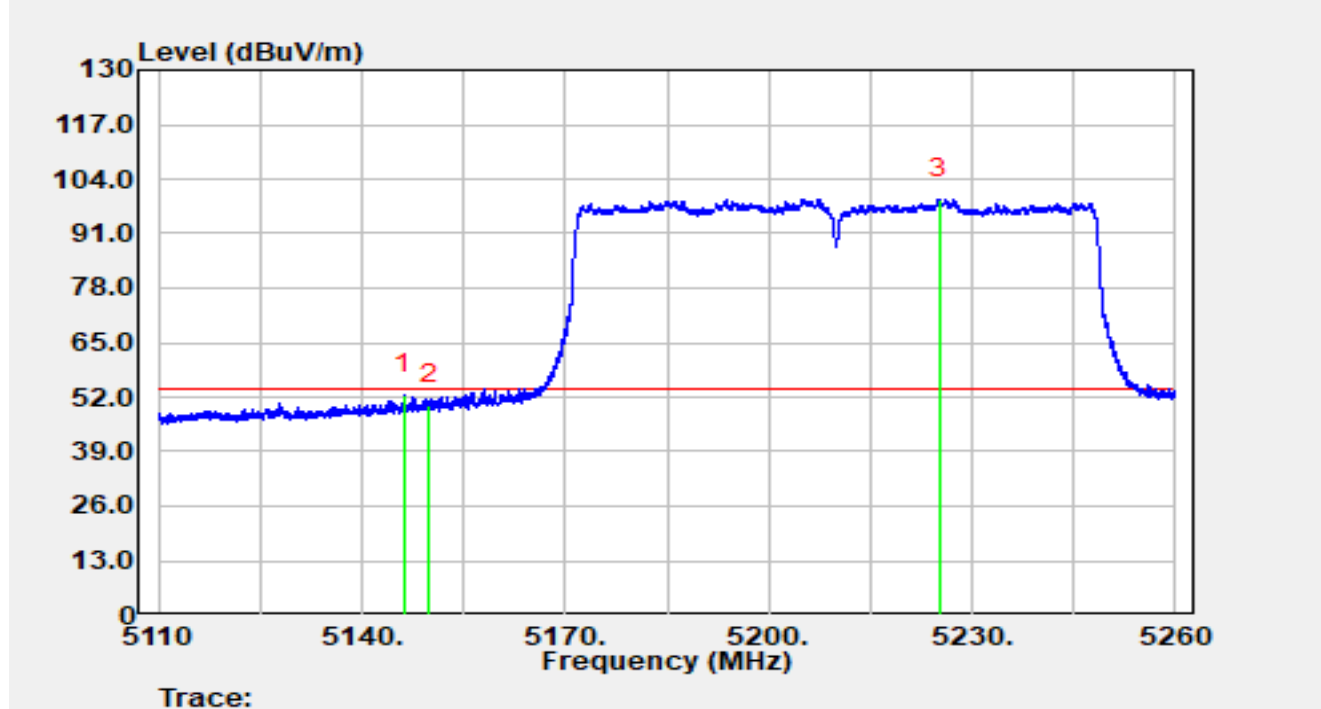


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.23         | 33.99          | 18.53      | 52.52                | -1.48       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.64          | 18.52      | 50.16                | -3.84       | 54.00          | Average  |
| 3  |      | 5225.10         | 81.05          | 18.22      | 99.27                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

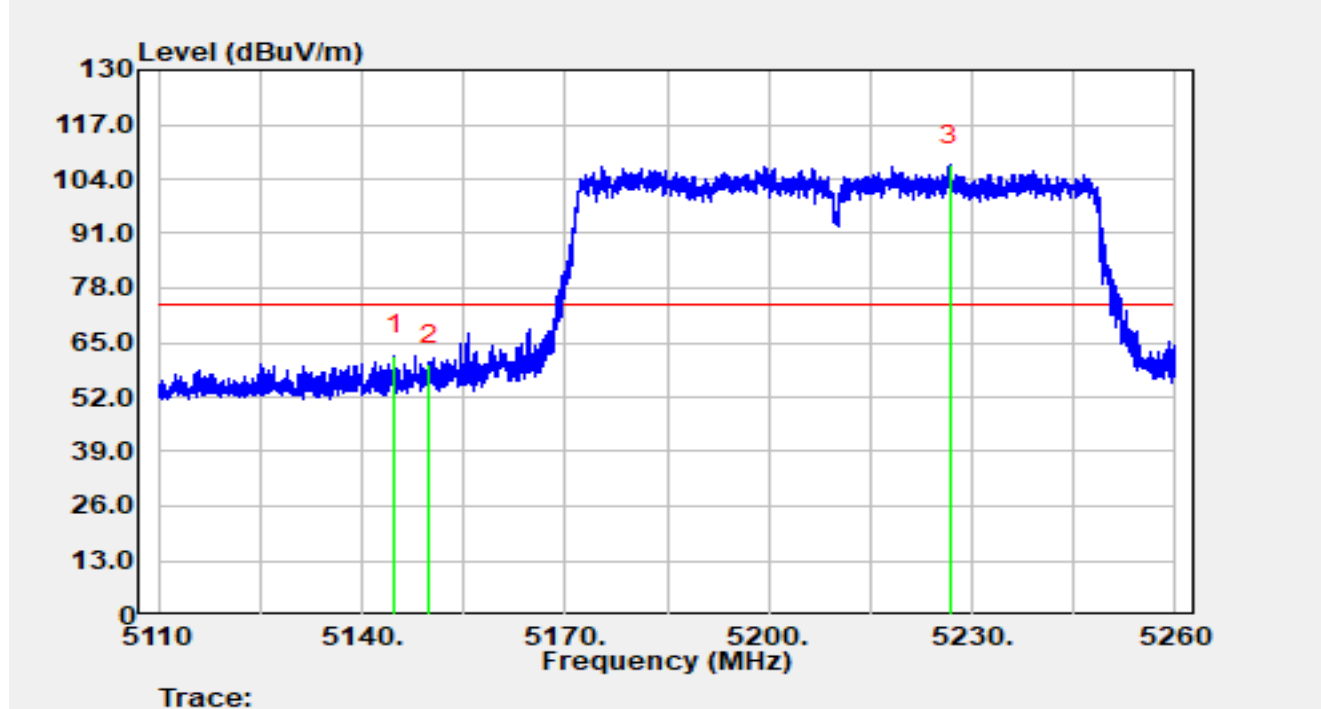


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5144.85         | 43.49          | 18.53      | 62.02                | -11.98      | 74.00          | Peak     |
| 2  |      | 5150.00         | 41.19          | 18.52      | 59.71                | -14.29      | 74.00          | Peak     |
| 3  |      | 5226.67         | 89.16          | 18.21      | 107.38               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

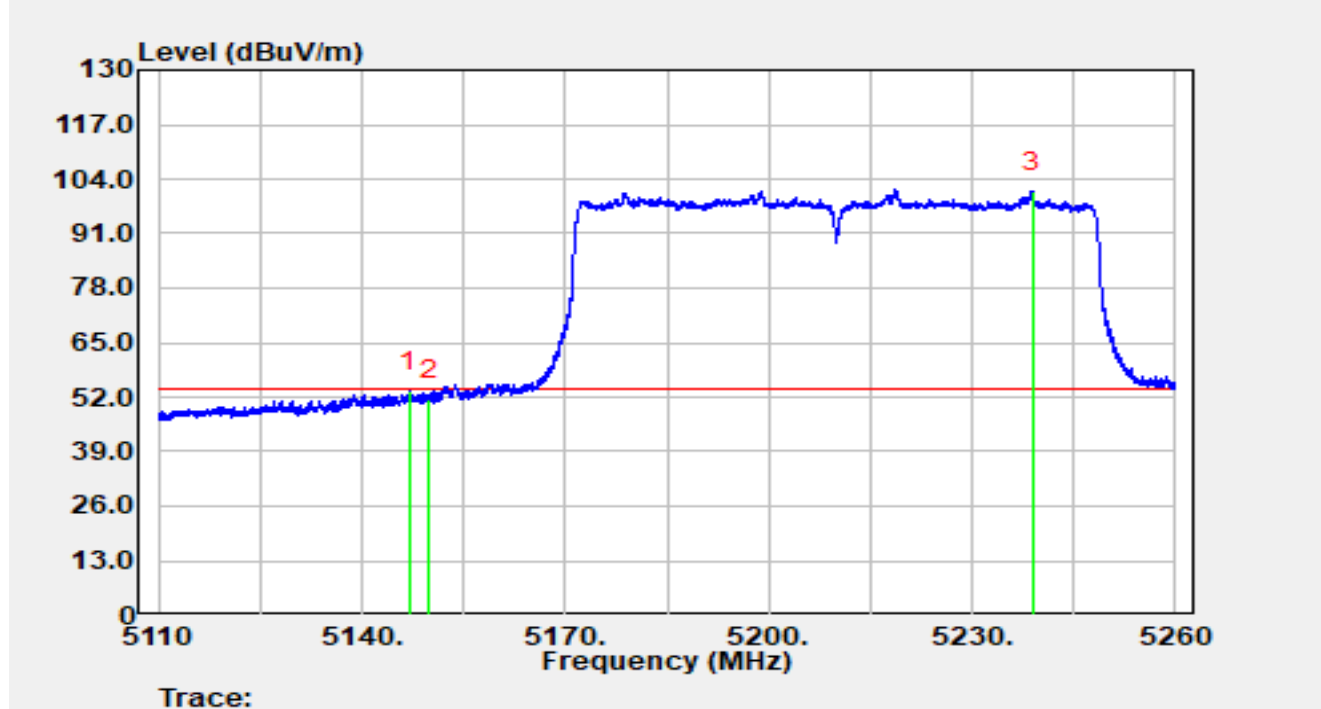


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.96         | 34.77          | 18.53      | 53.30                | -0.70       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.85          | 18.52      | 51.36                | -2.64       | 54.00          | Average  |
| 3  |      | 5238.85         | 82.81          | 18.21      | 101.02               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5290 MHz |               |            |

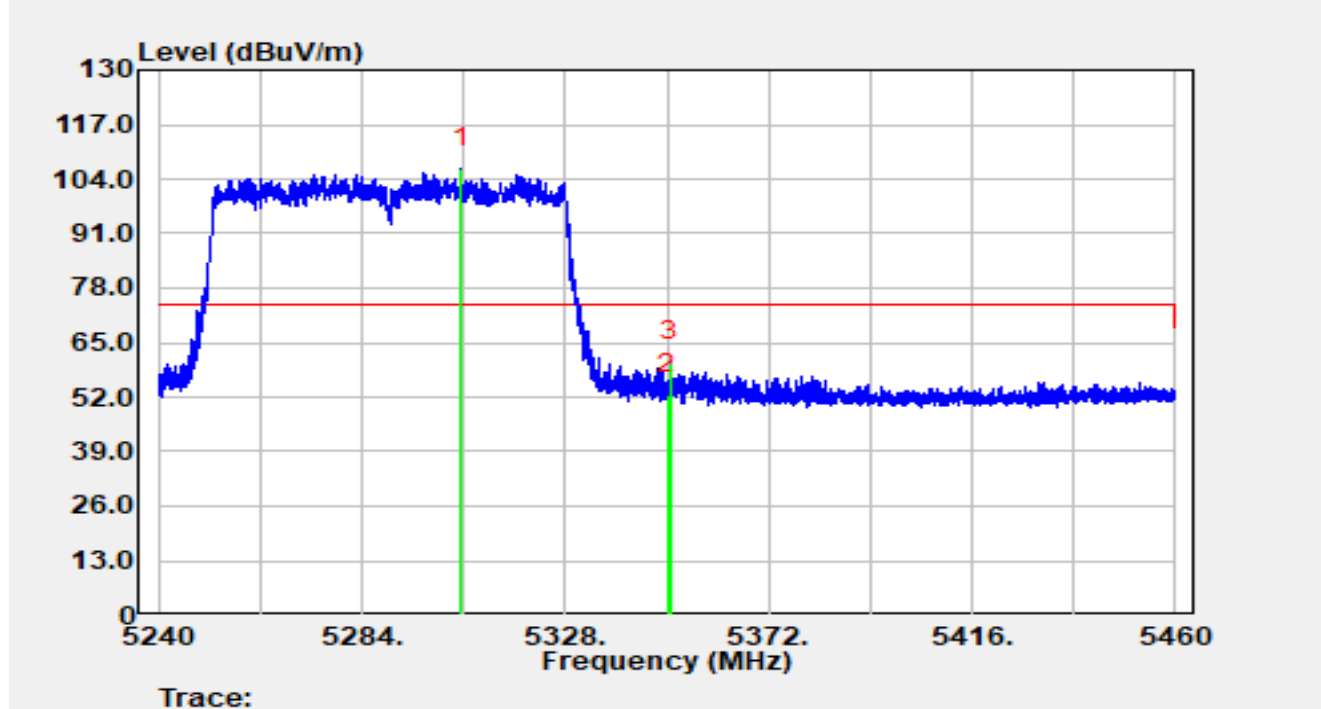


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5305.52         | 87.85          | 18.62      | 106.47               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 33.70          | 18.82      | 52.52                | -21.48      | 74.00          | Peak     |
| 3  | *    | 5350.79         | 41.67          | 18.83      | 60.50                | -13.50      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5290 MHz |               |            |

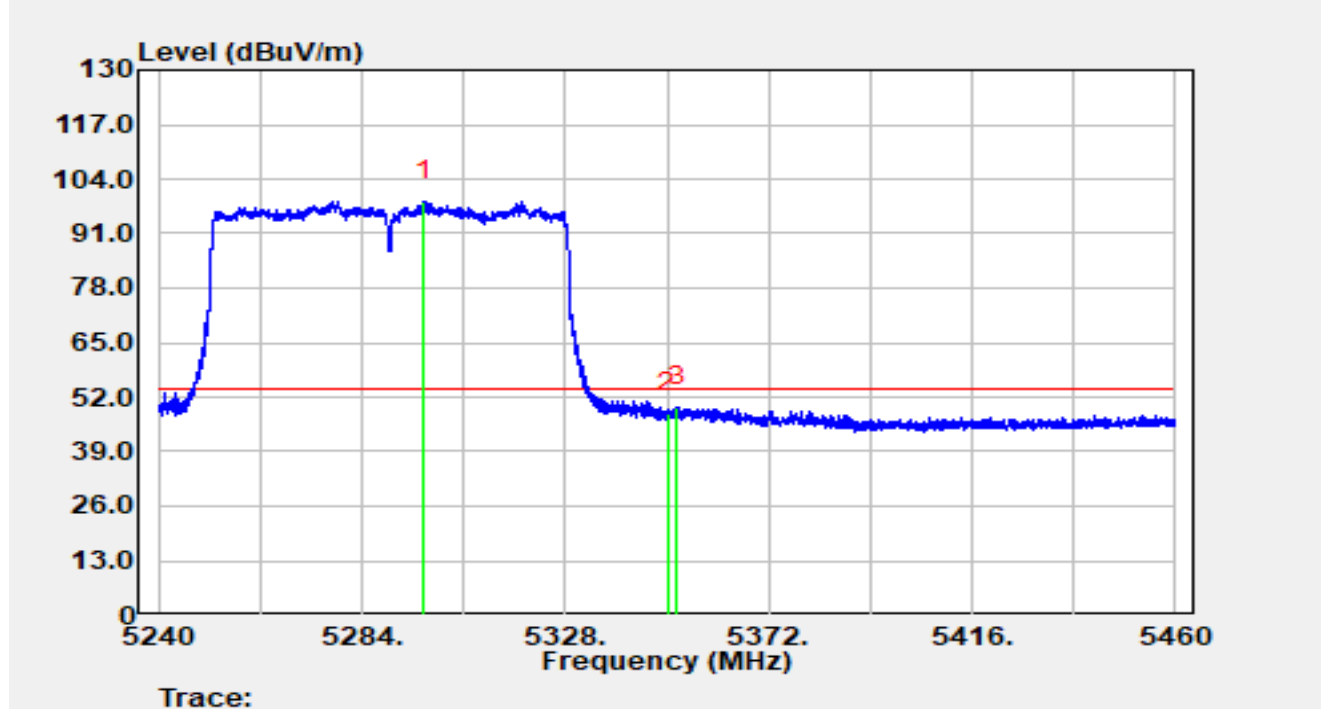


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5297.51         | 80.01          | 18.71      | 98.72                | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 29.27          | 18.82      | 48.09                | -5.91       | 54.00          | Average  |
| 3  | *    | 5352.29         | 30.85          | 18.85      | 49.70                | -4.30       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5290 MHz |               |            |

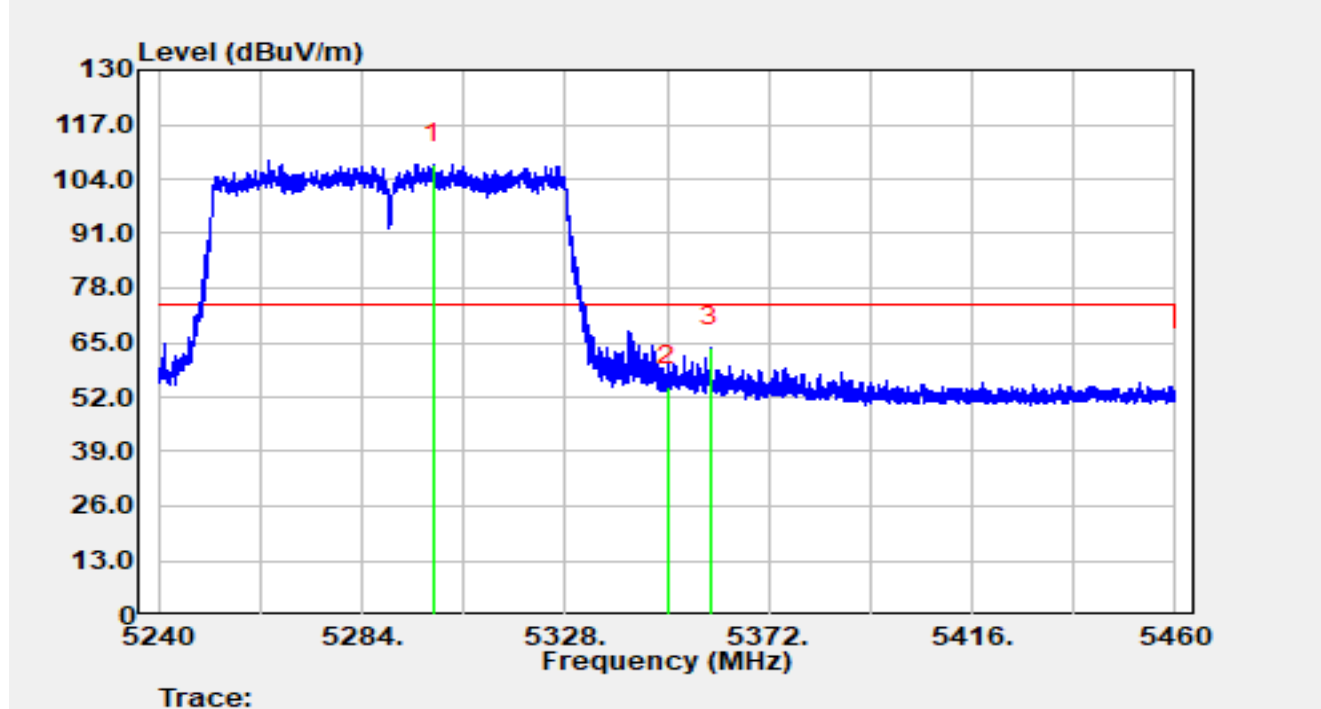


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5299.44         | 88.87          | 18.68      | 107.55               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 35.74          | 18.82      | 54.56                | -19.44      | 74.00          | Peak     |
| 3  | *    | 5359.46         | 45.00          | 18.93      | 63.94                | -10.06      | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5290 MHz |               |            |

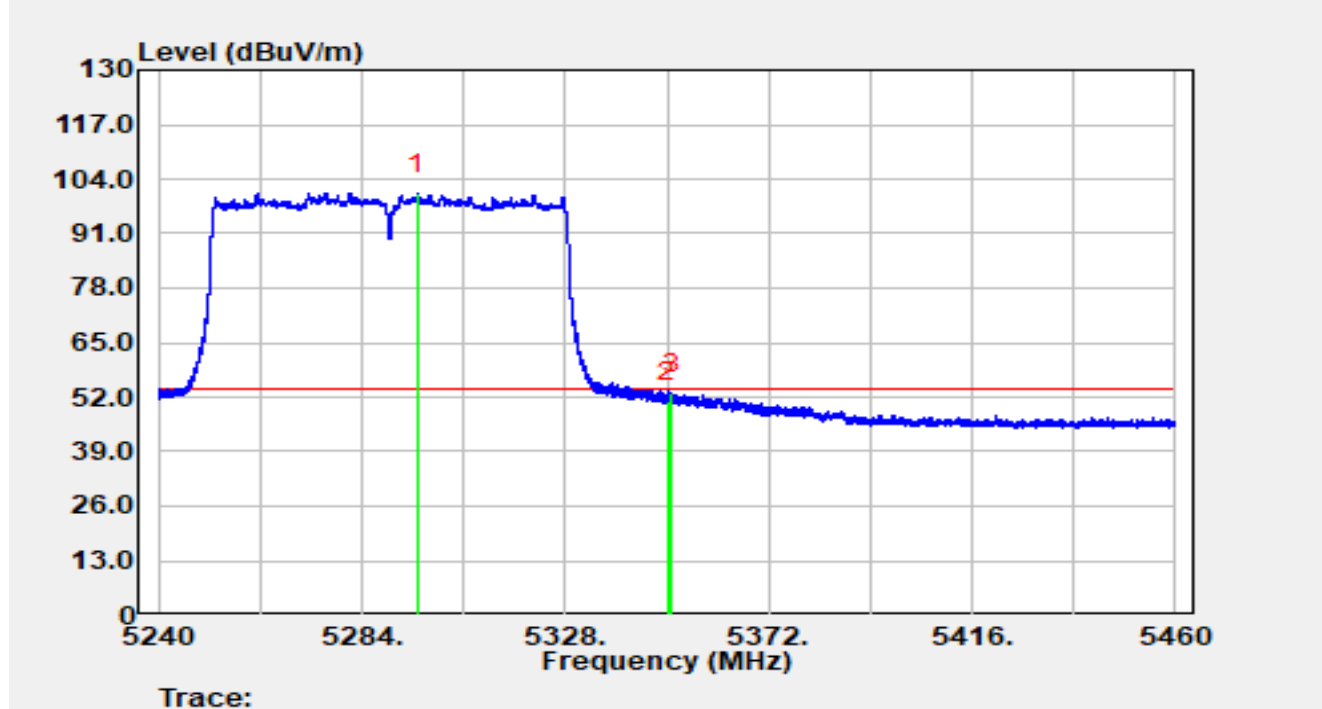


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5296.06         | 81.75          | 18.73      | 100.48               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 32.03          | 18.82      | 50.85                | -3.15       | 54.00          | Average  |
| 3  | *    | 5351.10         | 34.02          | 18.84      | 52.85                | -1.15       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5530 MHz |               |            |

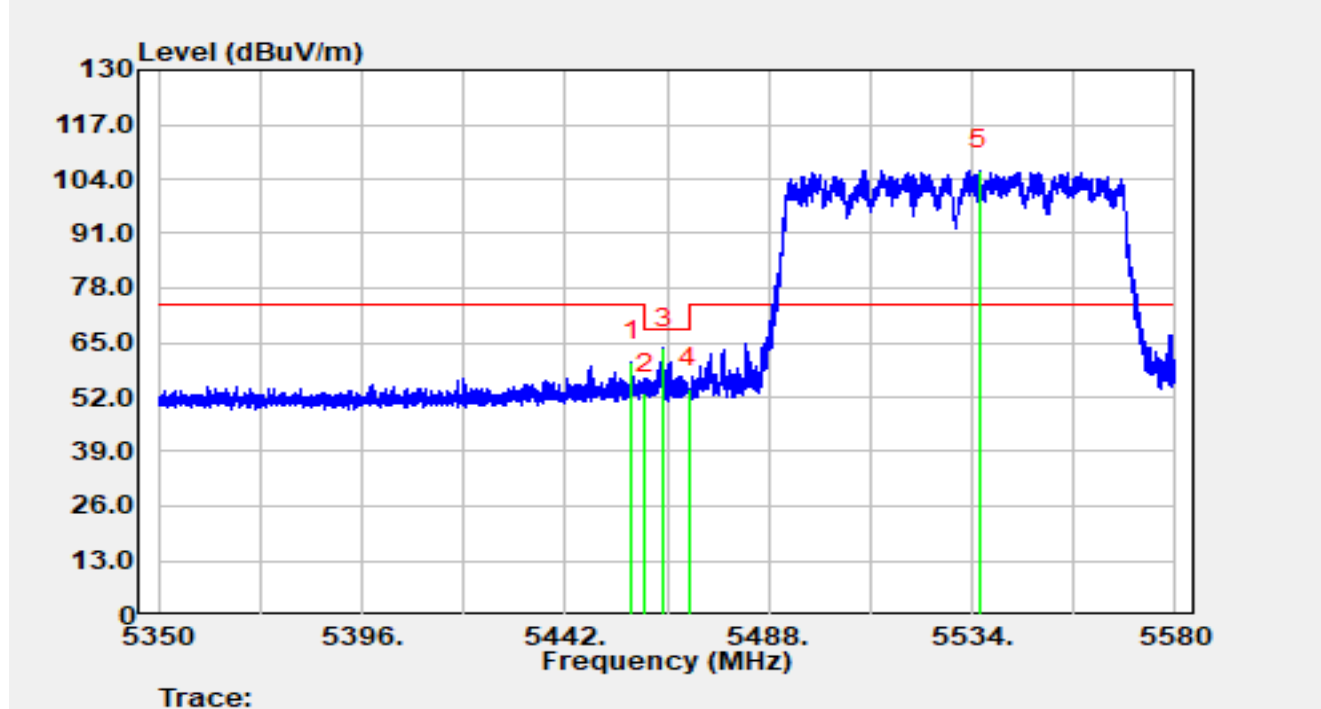


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5456.97         | 41.39          | 19.11      | 60.50                | -13.50      | 74.00          | Peak     |
| 2  |      | 5460.00         | 33.85          | 19.12      | 52.97                | -15.23      | 68.20          | Peak     |
| 3  | *    | 5464.24         | 44.55          | 19.09      | 63.64                | -4.56       | 68.20          | Peak     |
| 4  |      | 5470.00         | 35.00          | 19.02      | 54.02                | -14.18      | 68.20          | Peak     |
| 5  |      | 5535.56         | 86.89          | 19.21      | 106.10               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5530 MHz |               |            |

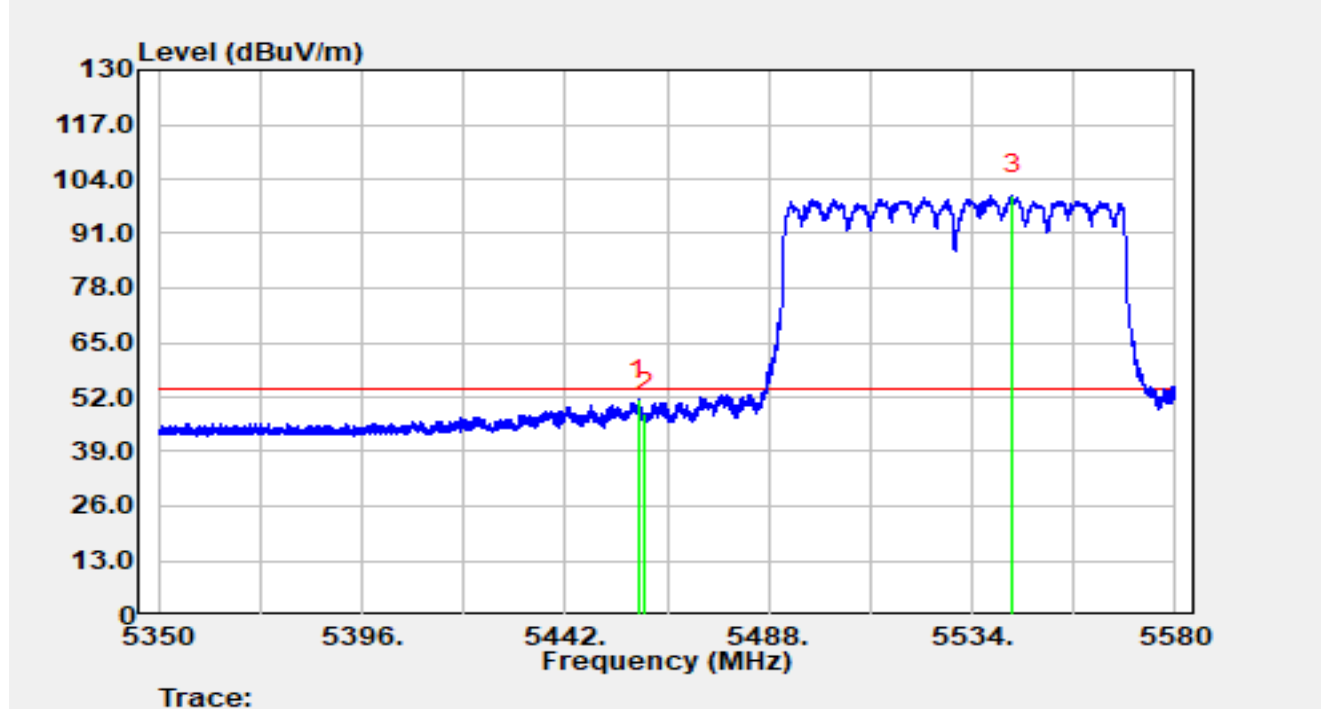


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5458.51         | 32.34          | 19.11      | 51.45                | -2.55       | 54.00          | Average  |
| 2  |      | 5460.00         | 29.05          | 19.12      | 48.17                | -5.83       | 54.00          | Average  |
| 3  |      | 5543.06         | 80.96          | 19.22      | 100.18               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5530 MHz |               |            |

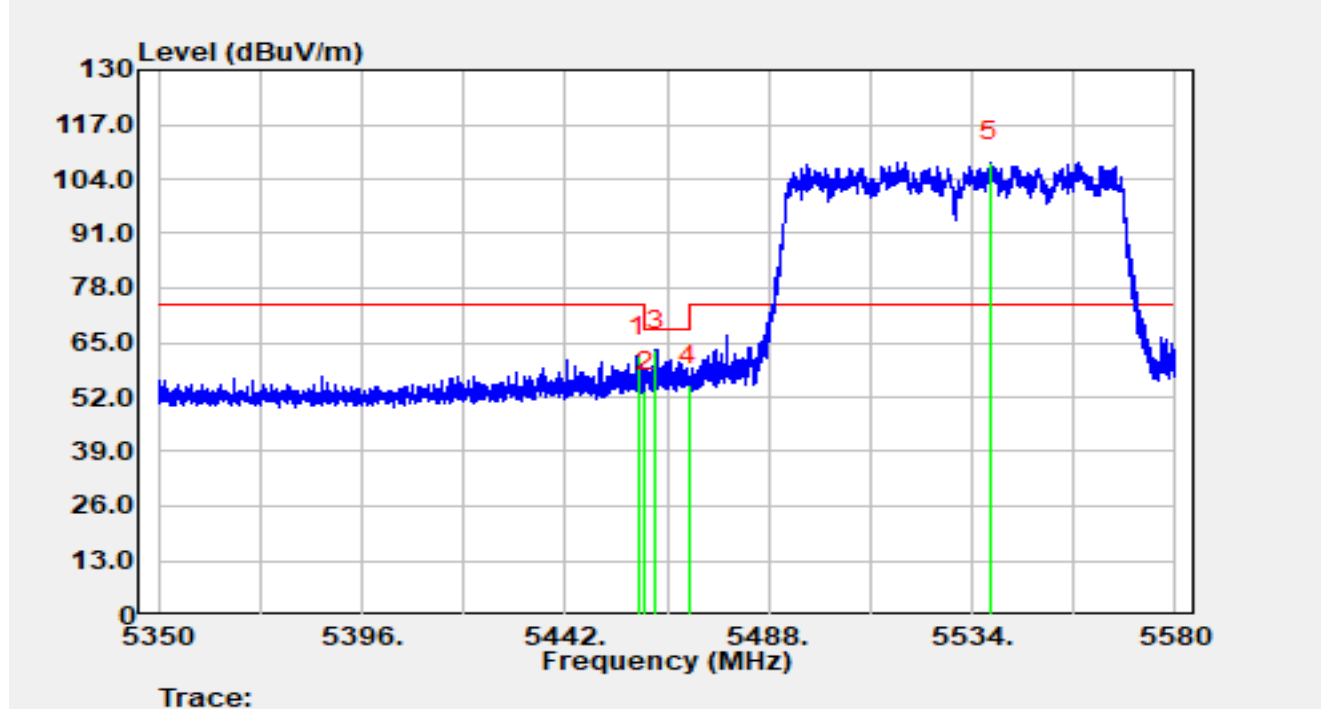


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5458.38         | 42.52          | 19.11      | 61.63                | -12.37      | 74.00          | Peak     |
| 2  |      | 5460.00         | 34.27          | 19.12      | 53.39                | -14.81      | 68.20          | Peak     |
| 3  | *    | 5462.59         | 44.06          | 19.11      | 63.17                | -5.03       | 68.20          | Peak     |
| 4  |      | 5470.00         | 35.92          | 19.02      | 54.94                | -13.26      | 68.20          | Peak     |
| 5  |      | 5538.19         | 88.79          | 19.21      | 108.00               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5530 MHz |               |            |

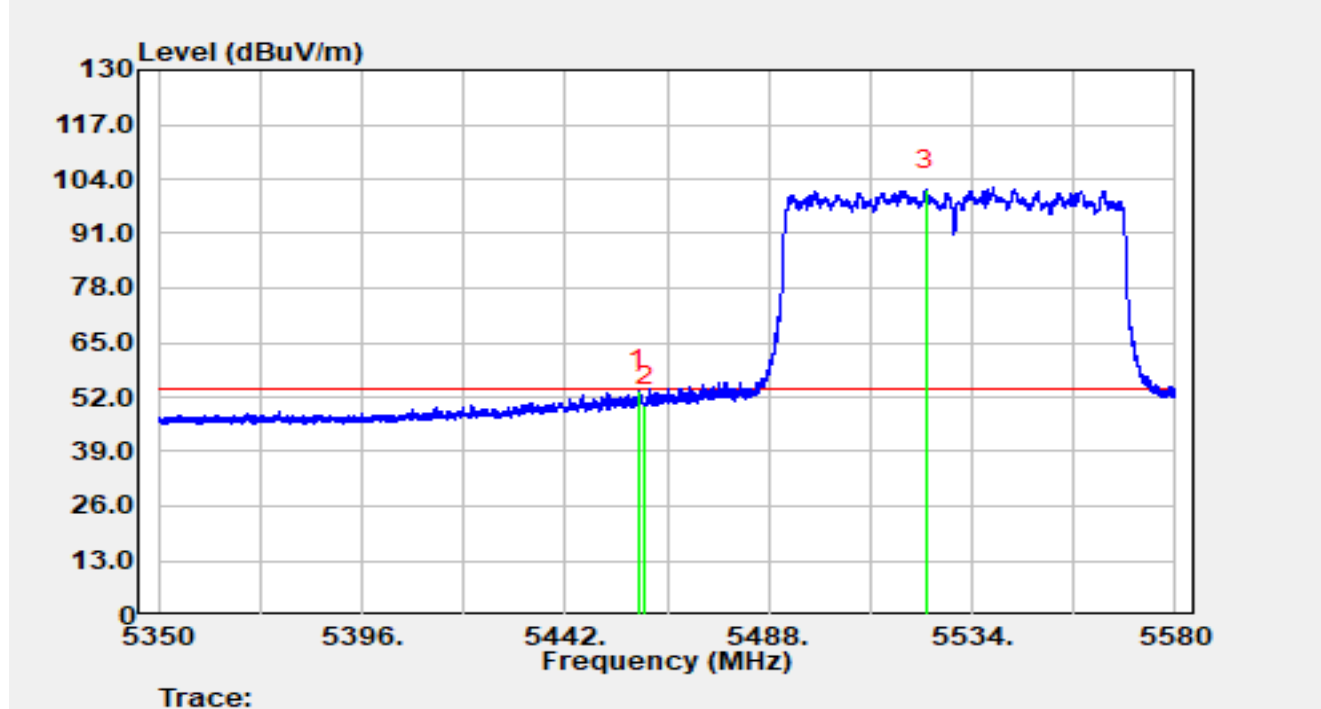


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5458.65         | 34.40          | 19.11      | 53.52                | -0.48       | 54.00          | Average  |
| 2  |      | 5460.00         | 30.68          | 19.12      | 49.80                | -4.20       | 54.00          | Average  |
| 3  |      | 5523.63         | 82.21          | 19.12      | 101.33               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5610 MHz |               |            |

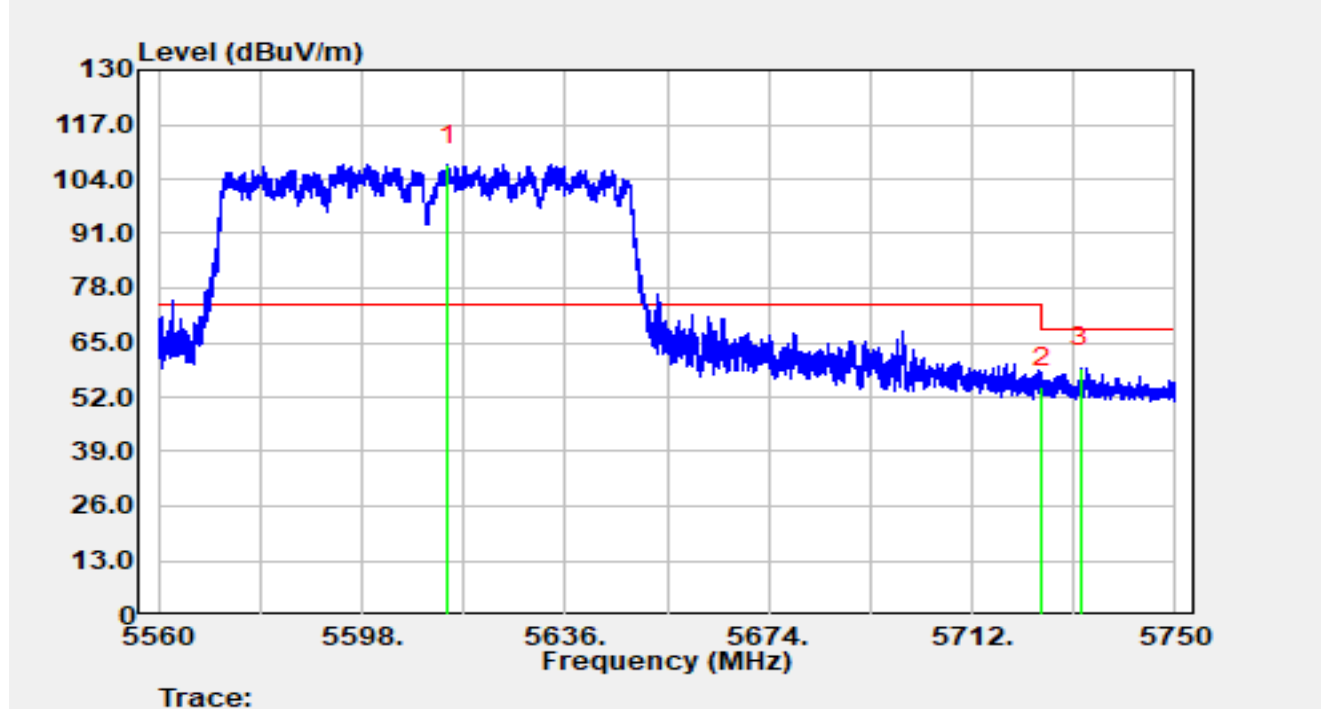


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5614.15         | 87.49          | 19.78      | 107.27               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 33.99          | 20.33      | 54.32                | -13.88      | 68.20          | Peak     |
| 3  | *    | 5732.25         | 38.66          | 20.25      | 58.91                | -9.29       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5610 MHz |               |            |

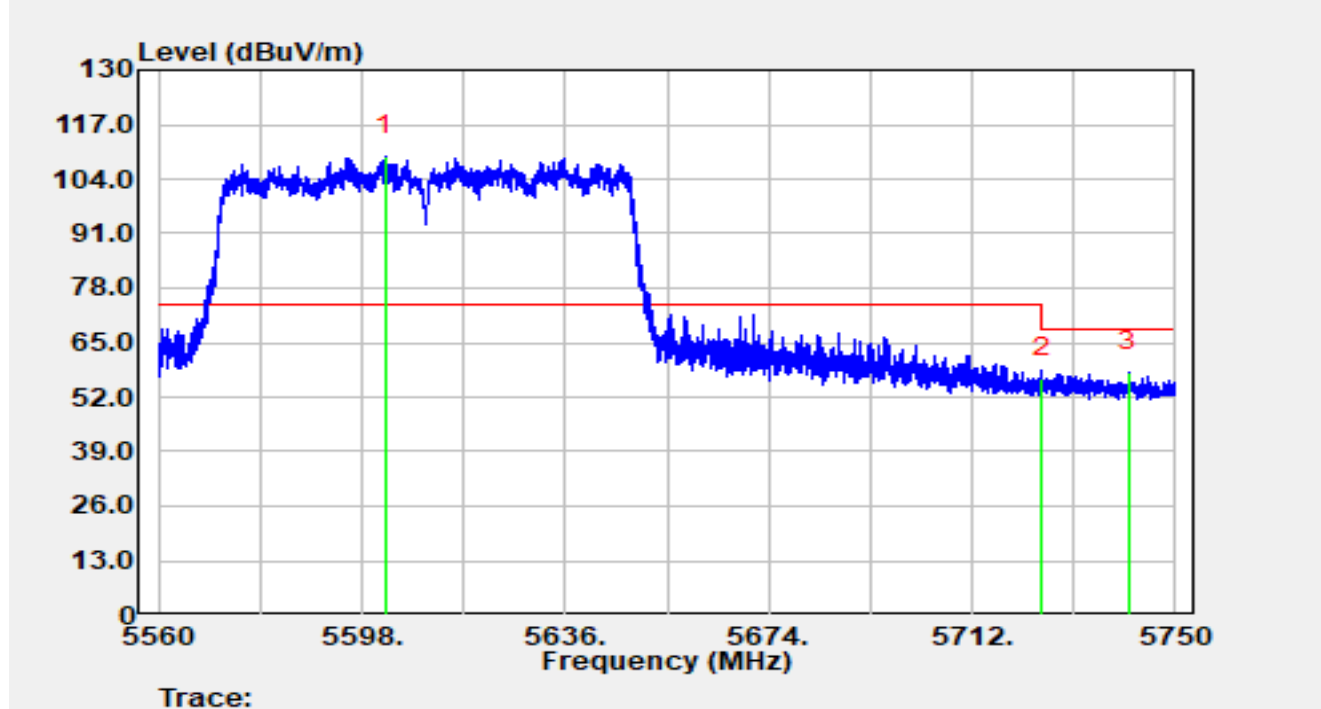


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5602.47         | 89.97          | 19.53      | 109.50               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 36.18          | 20.33      | 56.51                | -11.69      | 68.20          | Peak     |
| 3  | *    | 5741.20         | 37.82          | 20.14      | 57.97                | -10.23      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5775 MHz |               |            |

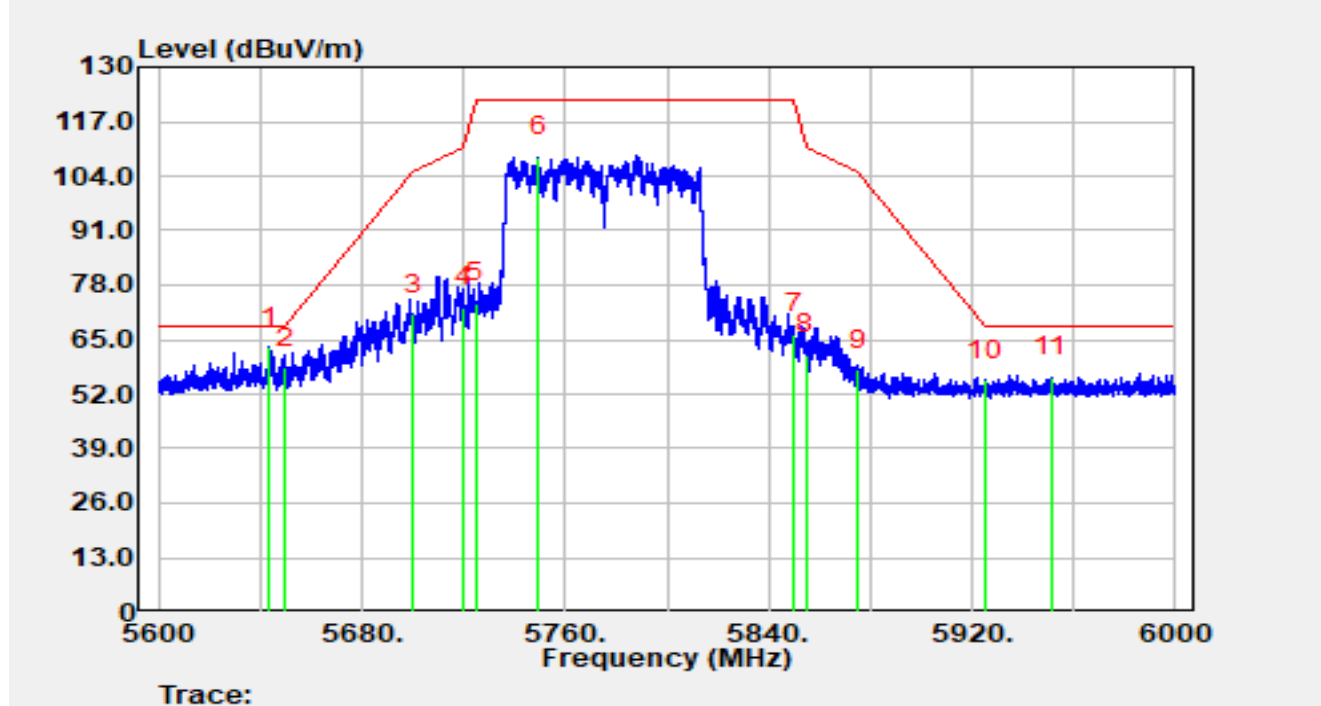


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5643.72         | 43.33          | 19.73      | 63.06                | -5.14       | 68.20          | Peak     |
| 2  |      | 5650.00         | 38.75          | 19.62      | 58.37                | -9.83       | 68.20          | Peak     |
| 3  |      | 5700.00         | 50.76          | 20.14      | 70.90                | -34.30      | 105.20         | Peak     |
| 4  |      | 5720.00         | 52.40          | 20.38      | 72.78                | -38.02      | 110.80         | Peak     |
| 5  |      | 5725.00         | 53.45          | 20.33      | 73.77                | -48.43      | 122.20         | Peak     |
| 6  |      | 5749.40         | 88.52          | 20.06      | 108.57               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 45.98          | 20.30      | 66.28                | -55.92      | 122.20         | Peak     |
| 8  |      | 5855.00         | 41.25          | 20.30      | 61.55                | -49.25      | 110.80         | Peak     |
| 9  |      | 5875.00         | 37.13          | 20.63      | 57.76                | -47.44      | 105.20         | Peak     |
| 10 |      | 5925.00         | 34.65          | 20.59      | 55.24                | -12.96      | 68.20          | Peak     |
| 11 |      | 5951.36         | 35.41          | 20.67      | 56.08                | -12.12      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5775 MHz |               |            |

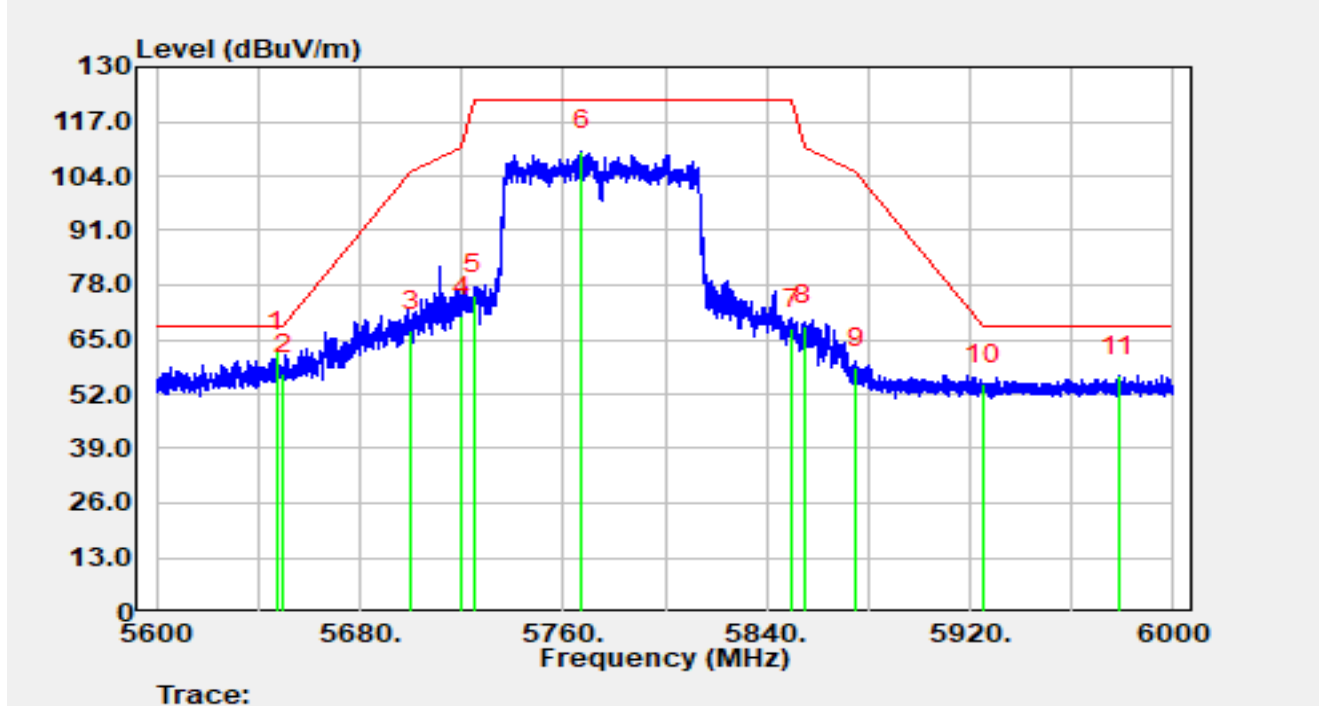


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5647.32         | 42.44          | 19.67      | 62.11                | -6.09       | 68.20          | Peak     |
| 2  |      | 5650.00         | 37.21          | 19.62      | 56.83                | -11.37      | 68.20          | Peak     |
| 3  |      | 5700.00         | 46.83          | 20.14      | 66.97                | -38.23      | 105.20         | Peak     |
| 4  |      | 5720.00         | 50.02          | 20.38      | 70.40                | -40.40      | 110.80         | Peak     |
| 5  |      | 5725.00         | 55.46          | 20.33      | 75.79                | -46.41      | 122.20         | Peak     |
| 6  |      | 5767.28         | 89.77          | 20.15      | 109.93               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 47.16          | 20.30      | 67.45                | -54.75      | 122.20         | Peak     |
| 8  |      | 5855.00         | 48.04          | 20.30      | 68.34                | -42.46      | 110.80         | Peak     |
| 9  |      | 5875.00         | 37.58          | 20.63      | 58.21                | -46.99      | 105.20         | Peak     |
| 10 |      | 5925.00         | 33.70          | 20.59      | 54.28                | -13.92      | 68.20          | Peak     |
| 11 |      | 5978.64         | 35.32          | 20.96      | 56.28                | -11.92      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5180 MHz |               |            |

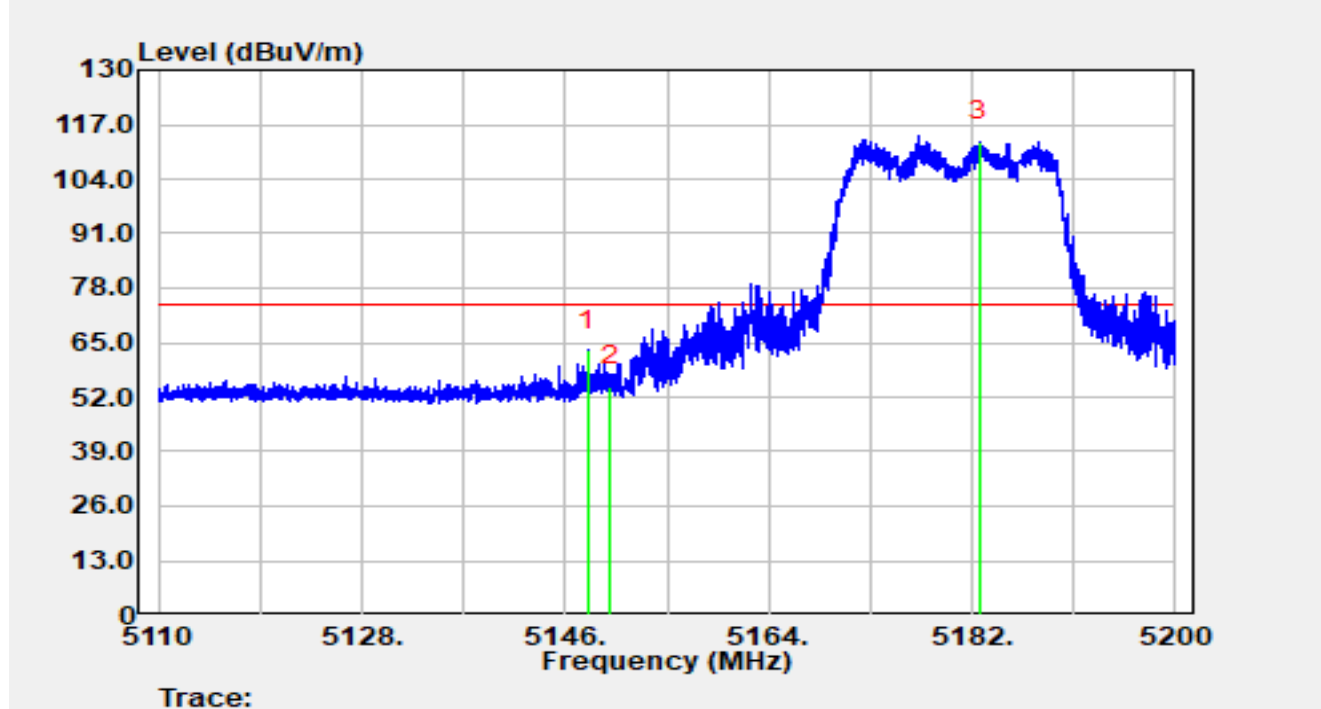


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.01         | 44.67          | 18.52      | 63.19                | -10.81      | 74.00          | Peak     |
| 2  |      | 5150.00         | 36.13          | 18.52      | 54.65                | -19.35      | 74.00          | Peak     |
| 3  |      | 5182.62         | 94.19          | 18.82      | 113.01               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5180 MHz |               |            |

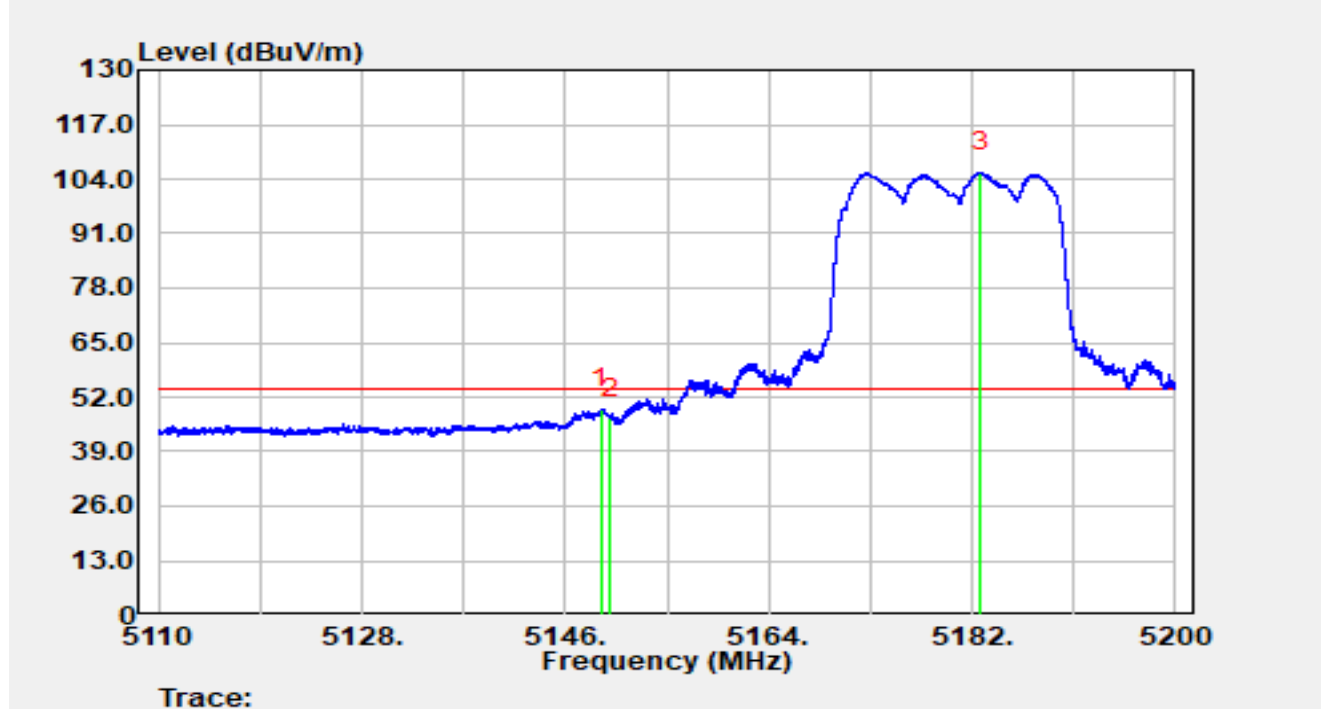


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.21         | 30.63          | 18.52      | 49.15                | -4.85       | 54.00          | Average  |
| 2  |      | 5150.00         | 28.41          | 18.52      | 46.93                | -7.07       | 54.00          | Average  |
| 3  |      | 5182.72         | 86.75          | 18.82      | 105.57               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5180 MHz |               |            |

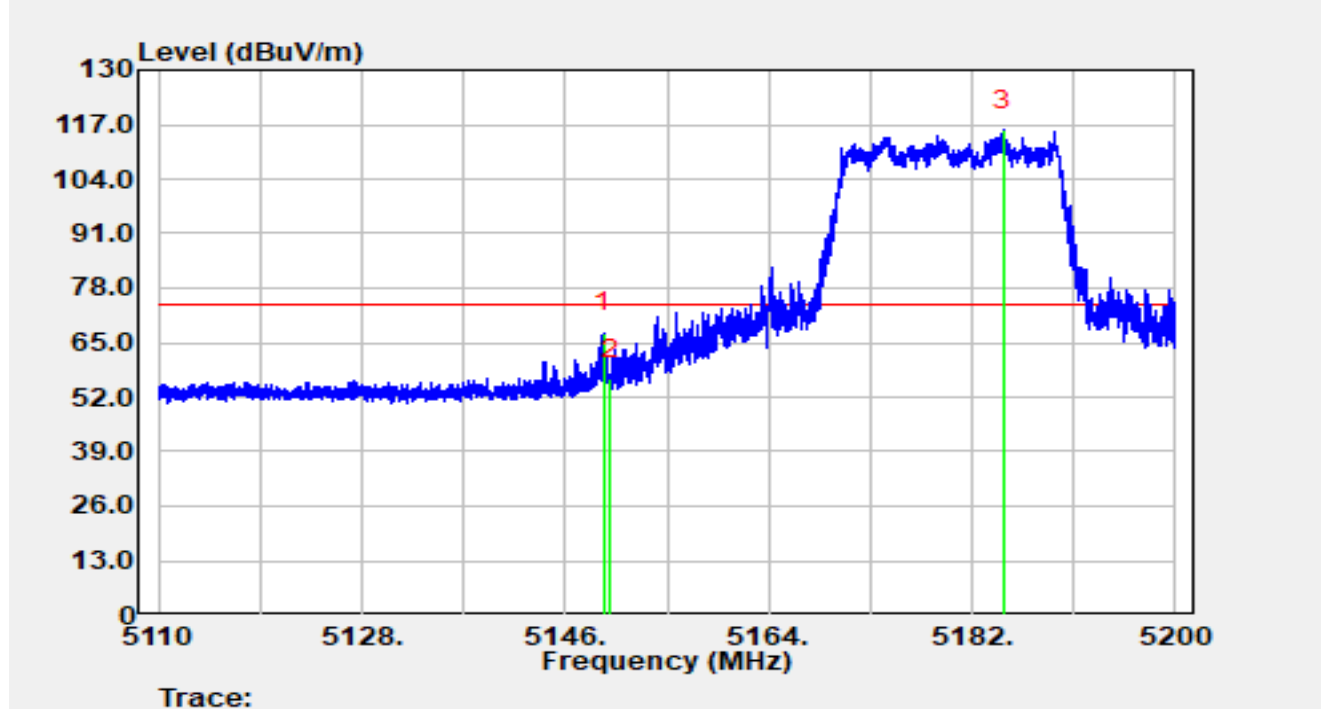


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.36         | 48.70          | 18.52      | 67.22                | -6.78       | 74.00          | Peak     |
| 2  |      | 5150.00         | 37.78          | 18.52      | 56.30                | -17.70      | 74.00          | Peak     |
| 3  |      | 5184.80         | 96.74          | 18.82      | 115.57               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-01 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5180 MHz |               |            |

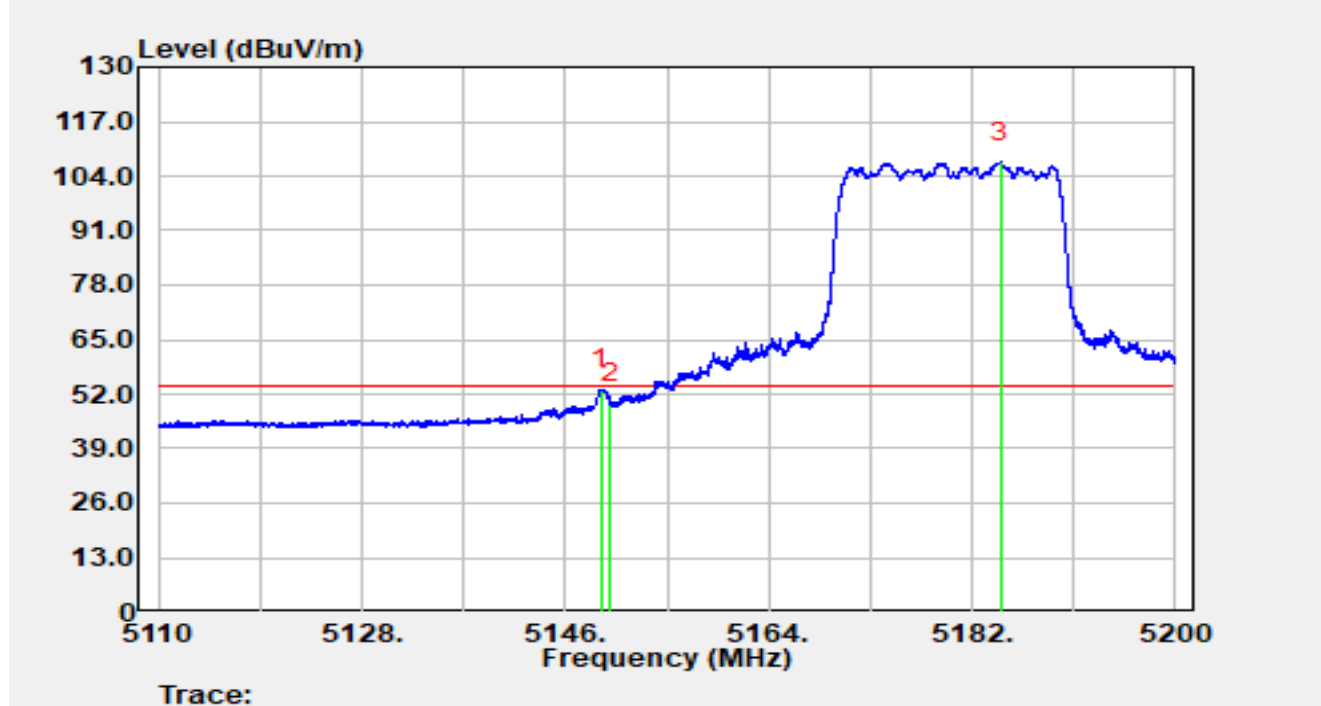


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.20         | 34.57          | 18.52      | 53.09                | -0.91       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.06          | 18.52      | 49.58                | -4.42       | 54.00          | Average  |
| 3  |      | 5184.48         | 88.38          | 18.82      | 107.20               | N/A         | N/A            | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5320 MHz |               |            |

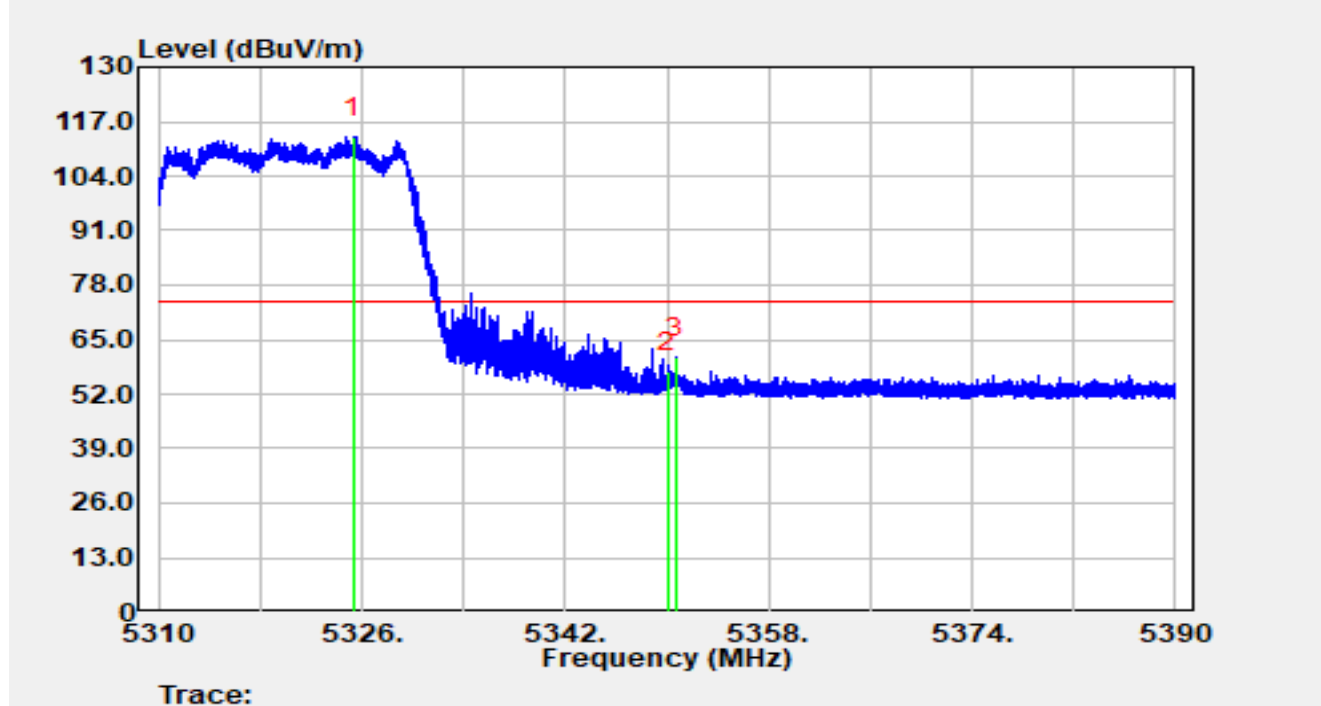


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5325.28         | 94.64          | 18.60      | 113.24               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 38.38          | 18.82      | 57.20                | -16.80      | 74.00          | Peak     |
| 3  | *    | 5350.67         | 41.97          | 18.83      | 60.80                | -13.20      | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5320 MHz |               |            |

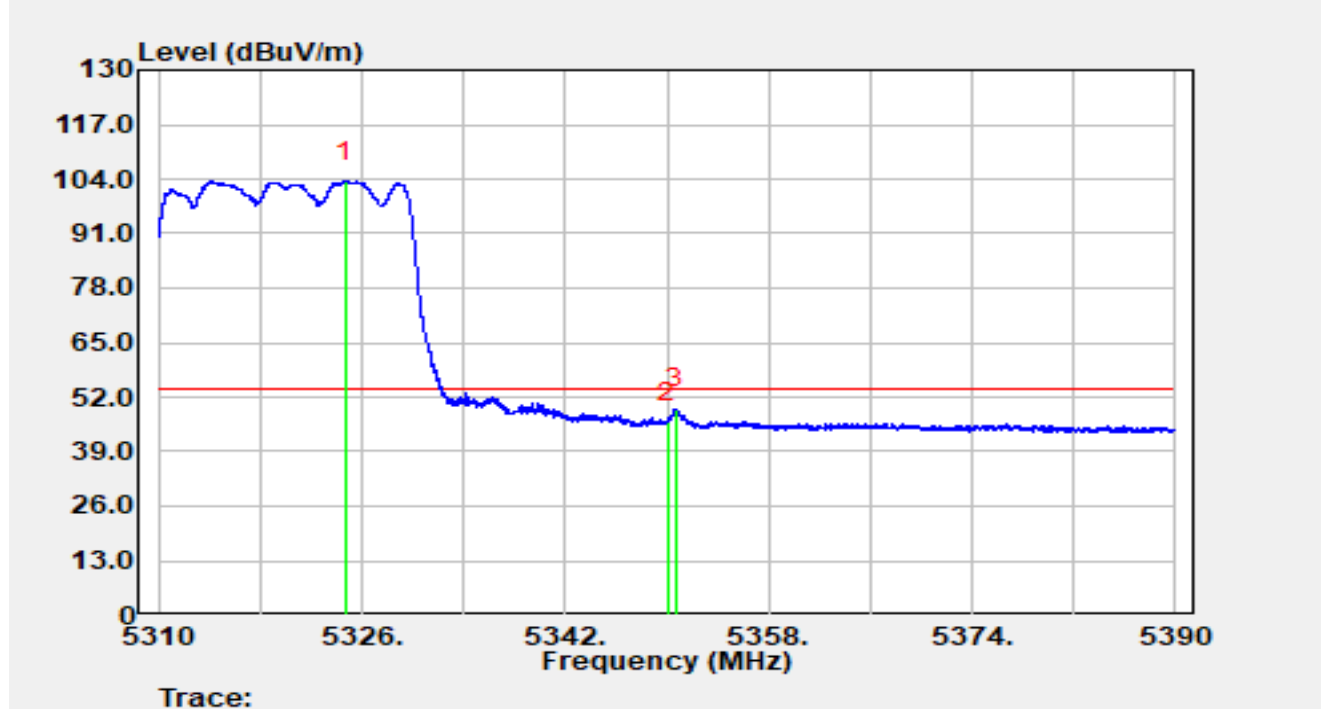


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5324.69         | 84.74          | 18.59      | 103.33               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 27.13          | 18.82      | 45.95                | -8.05       | 54.00          | Average  |
| 3  | *    | 5350.64         | 30.30          | 18.83      | 49.13                | -4.87       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5320 MHz |               |            |

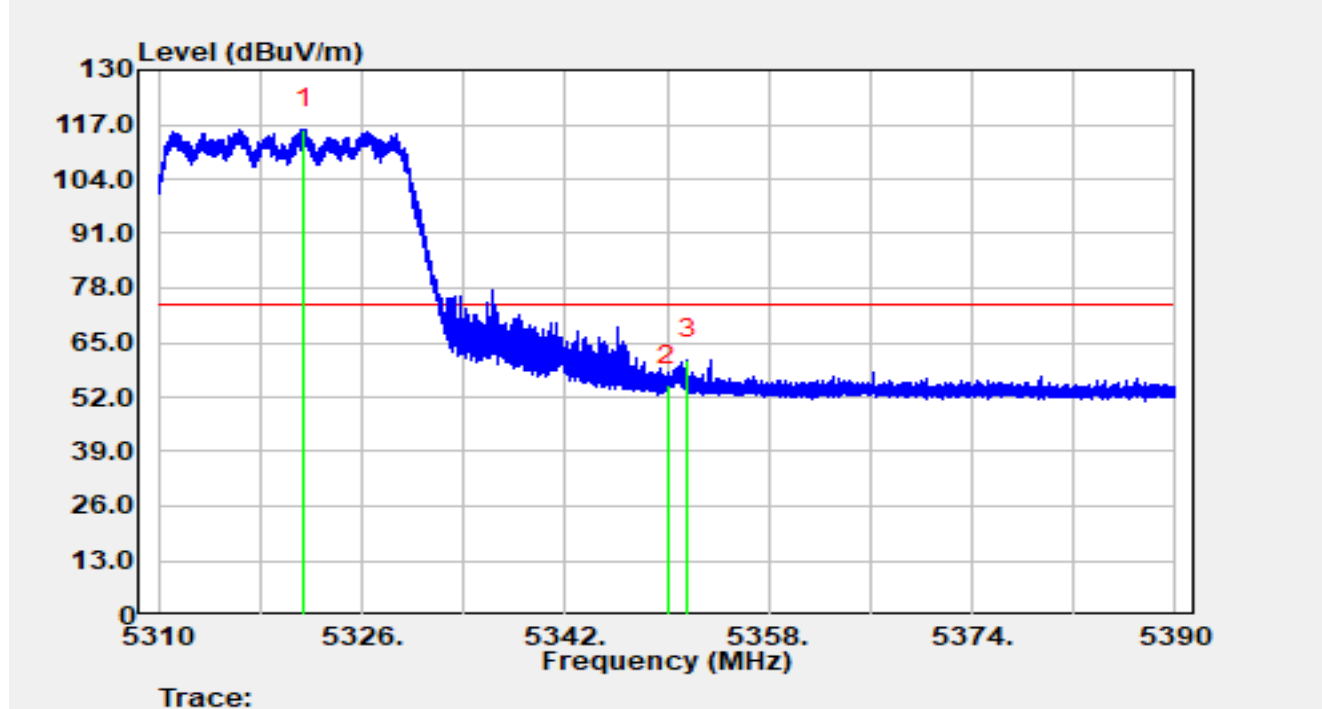


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5321.44         | 97.37          | 18.58      | 115.94               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 36.06          | 18.82      | 54.88                | -19.12      | 74.00          | Peak     |
| 3  | *    | 5351.66         | 42.14          | 18.84      | 60.98                | -13.02      | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5320 MHz |               |            |

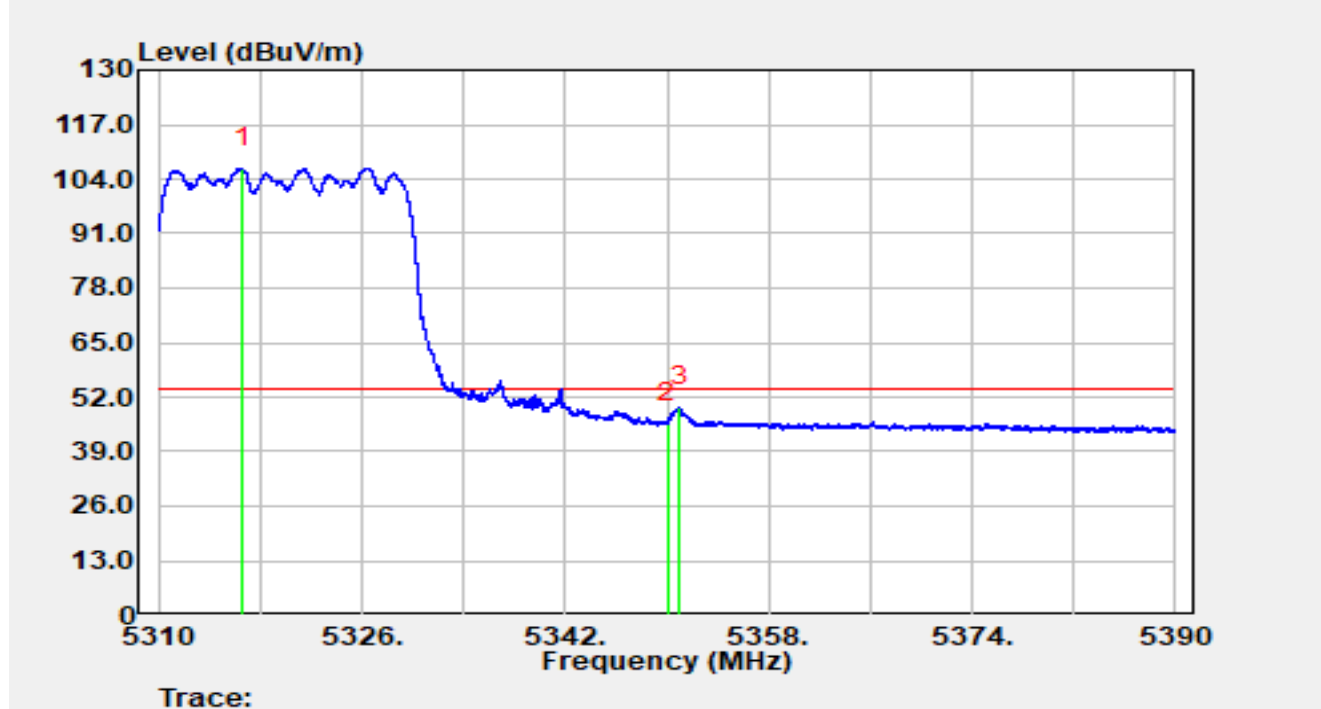


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5316.60         | 88.07          | 18.60      | 106.66               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 26.90          | 18.82      | 45.72                | -8.28       | 54.00          | Average  |
| 3  | *    | 5350.95         | 30.83          | 18.83      | 49.66                | -4.34       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5500 MHz |               |            |

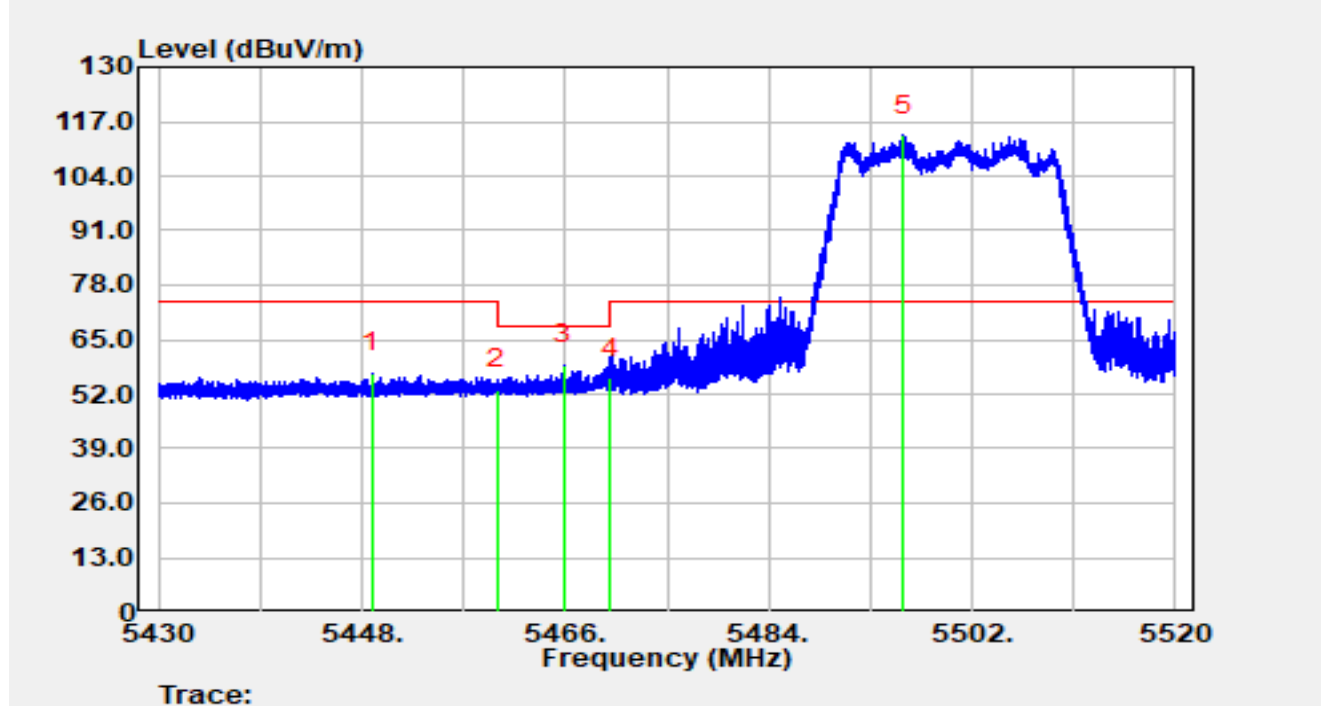


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5448.87         | 37.86          | 19.13      | 56.99                | -17.01      | 74.00          | Peak     |
| 2  |      | 5460.00         | 34.08          | 19.12      | 53.20                | -15.00      | 68.20          | Peak     |
| 3  | *    | 5465.92         | 39.90          | 19.07      | 58.97                | -9.23       | 68.20          | Peak     |
| 4  |      | 5470.00         | 36.69          | 19.02      | 55.71                | -12.49      | 68.20          | Peak     |
| 5  |      | 5495.87         | 94.74          | 18.86      | 113.60               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5500 MHz |               |            |

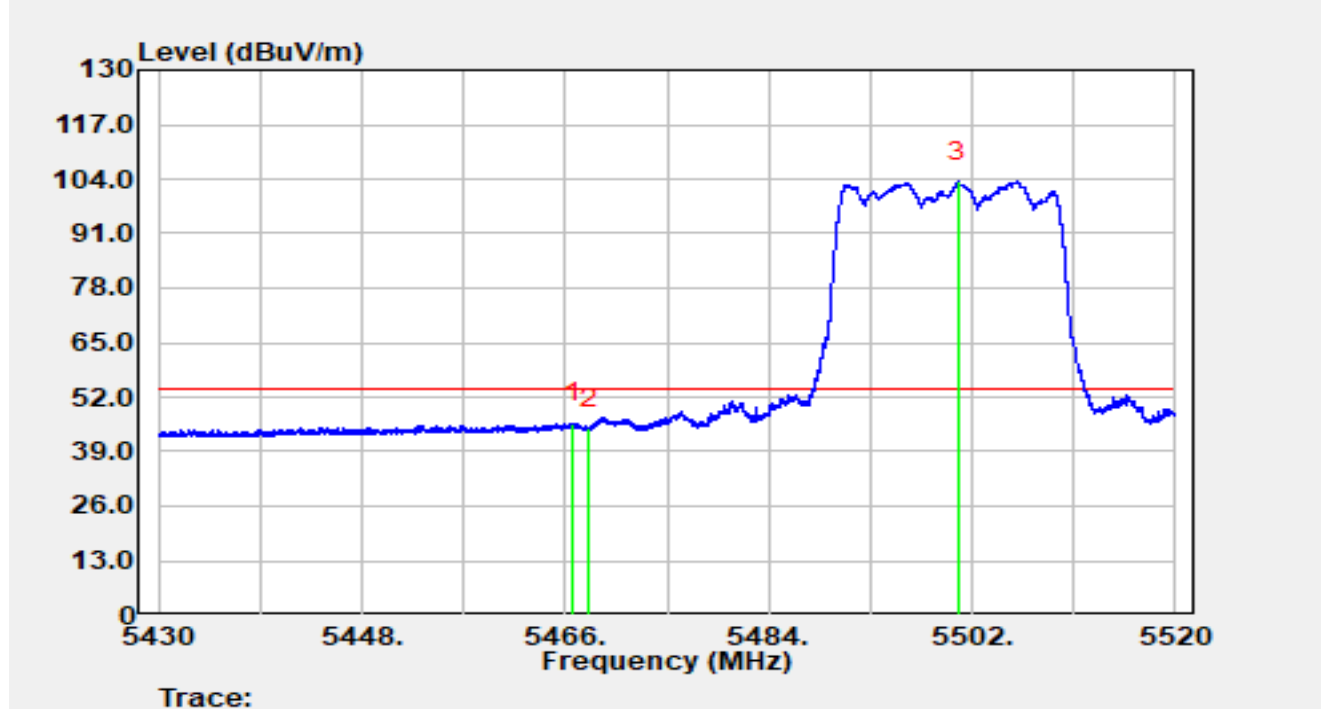


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5466.68         | 26.77          | 19.06      | 45.83                | -8.17       | 54.00          | Average  |
| 2  |      | 5468.08         | 25.50          | 19.05      | 44.54                | -9.46       | 54.00          | Average  |
| 3  |      | 5500.80         | 84.41          | 18.89      | 103.30               | N/A         | N/A            | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5500 MHz |               |            |

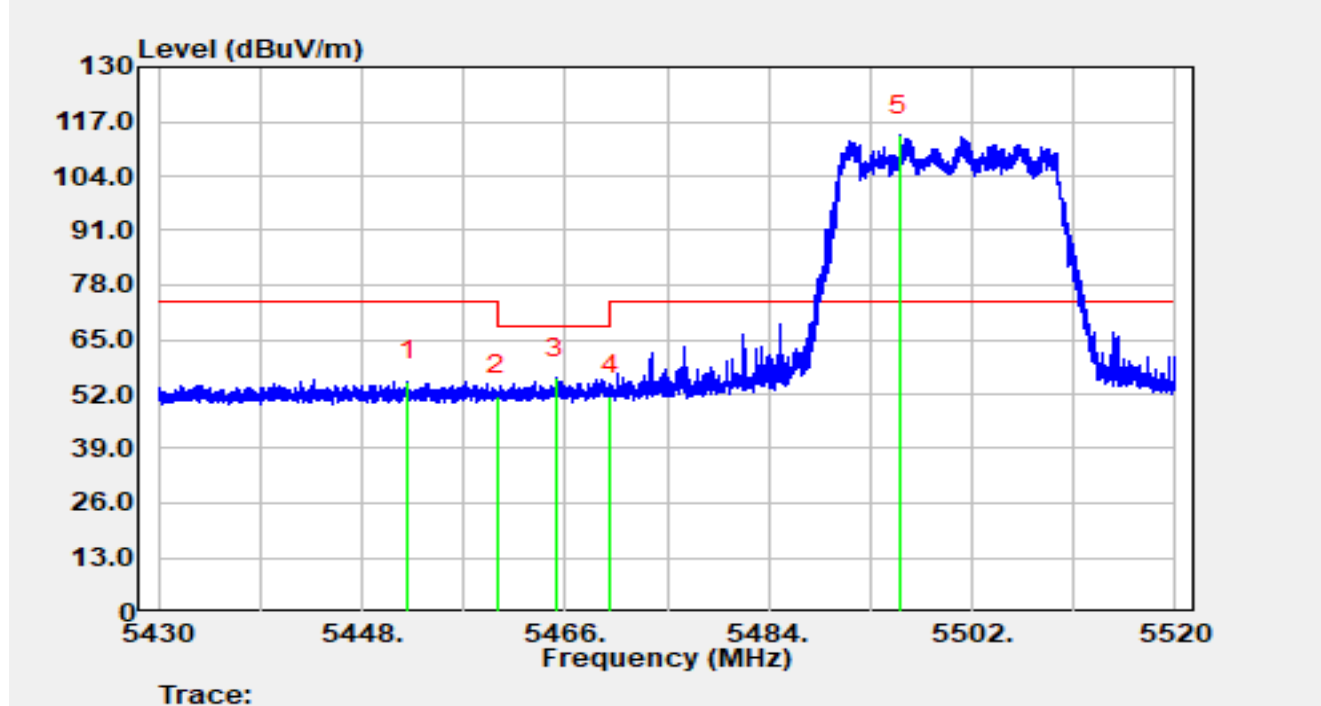


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5452.02         | 35.84          | 19.12      | 54.96                | -19.04      | 74.00          | Peak     |
| 2  |      | 5460.00         | 32.57          | 19.12      | 51.69                | -16.51      | 68.20          | Peak     |
| 3  | *    | 5465.21         | 36.72          | 19.08      | 55.80                | -12.40      | 68.20          | Peak     |
| 4  |      | 5470.00         | 32.57          | 19.02      | 51.59                | -16.61      | 68.20          | Peak     |
| 5  |      | 5495.59         | 94.73          | 18.85      | 113.59               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5500 MHz |               |            |

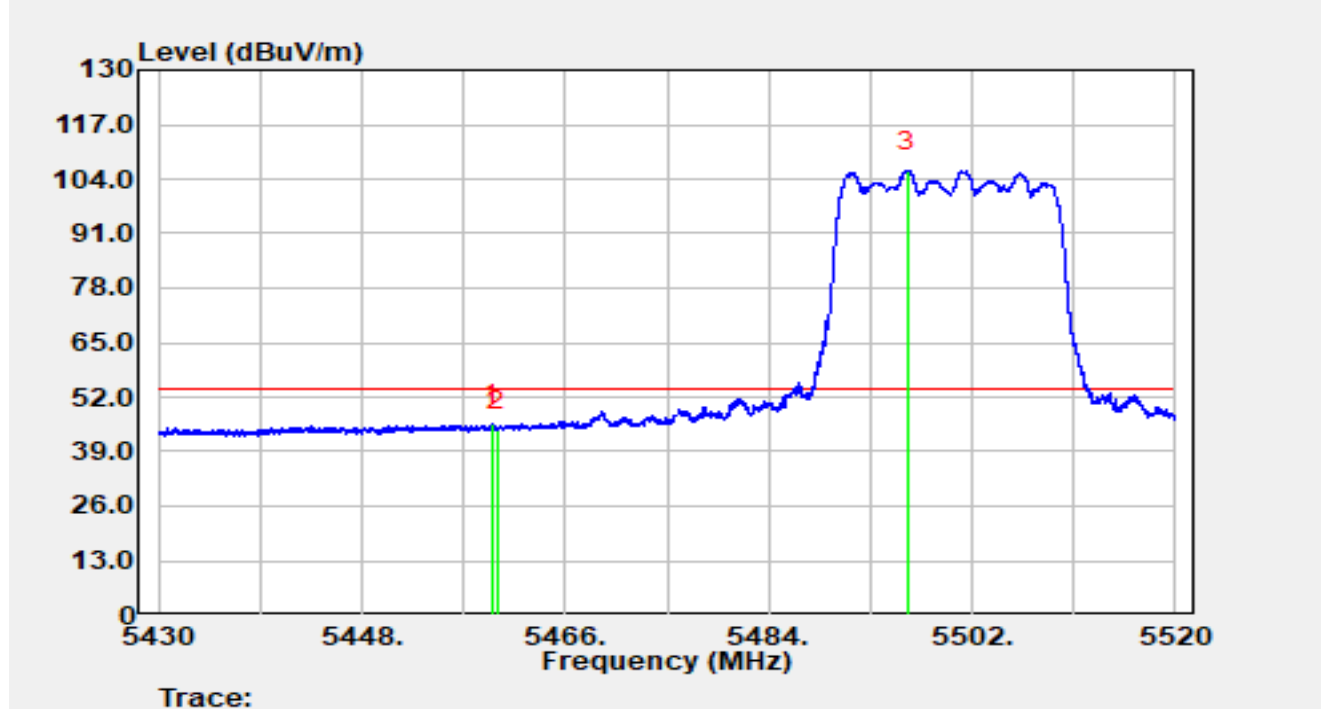


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.53         | 26.41          | 19.12      | 45.53                | -8.47       | 54.00          | Average  |
| 2  |      | 5460.00         | 25.03          | 19.12      | 44.15                | -9.85       | 54.00          | Average  |
| 3  |      | 5496.26         | 87.05          | 18.86      | 105.91               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5700 MHz |               |            |

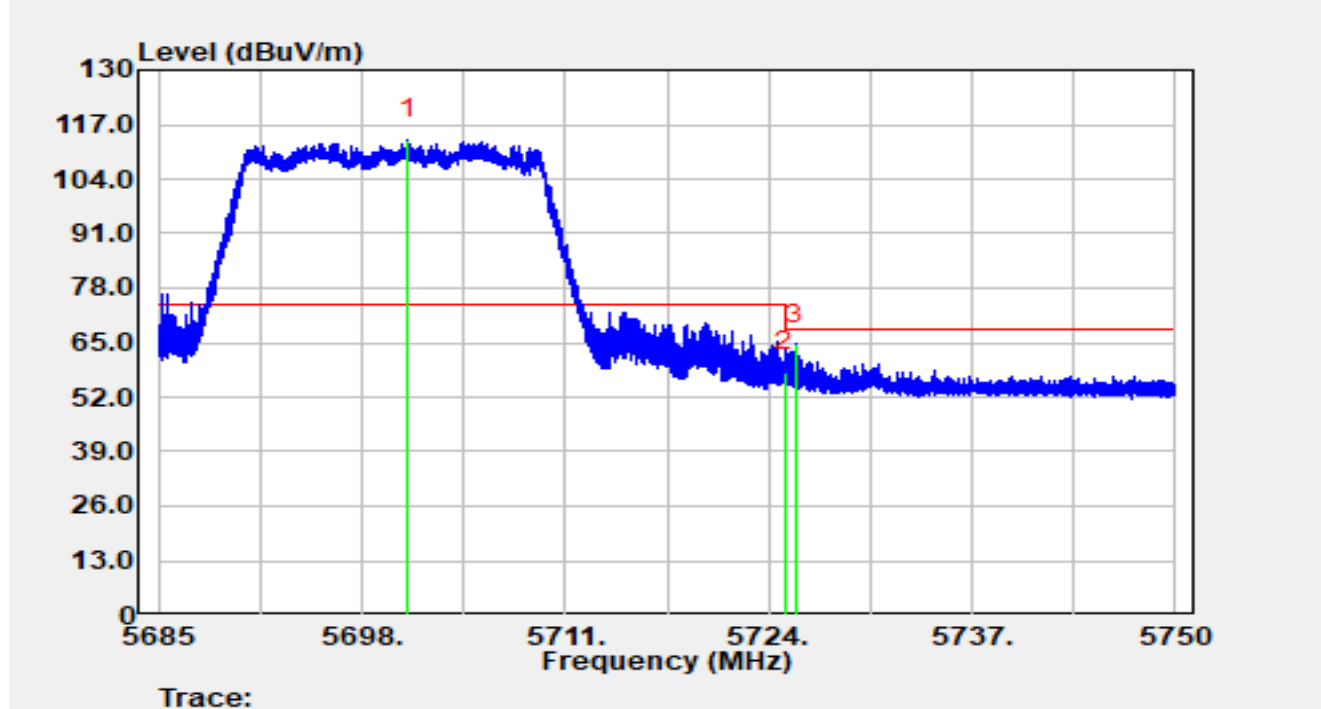


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5700.91         | 93.26          | 20.17      | 113.43               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 37.78          | 20.33      | 58.11                | -10.09      | 68.20          | Peak     |
| 3  | *    | 5725.74         | 44.21          | 20.32      | 64.53                | -3.67       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5700 MHz |               |            |

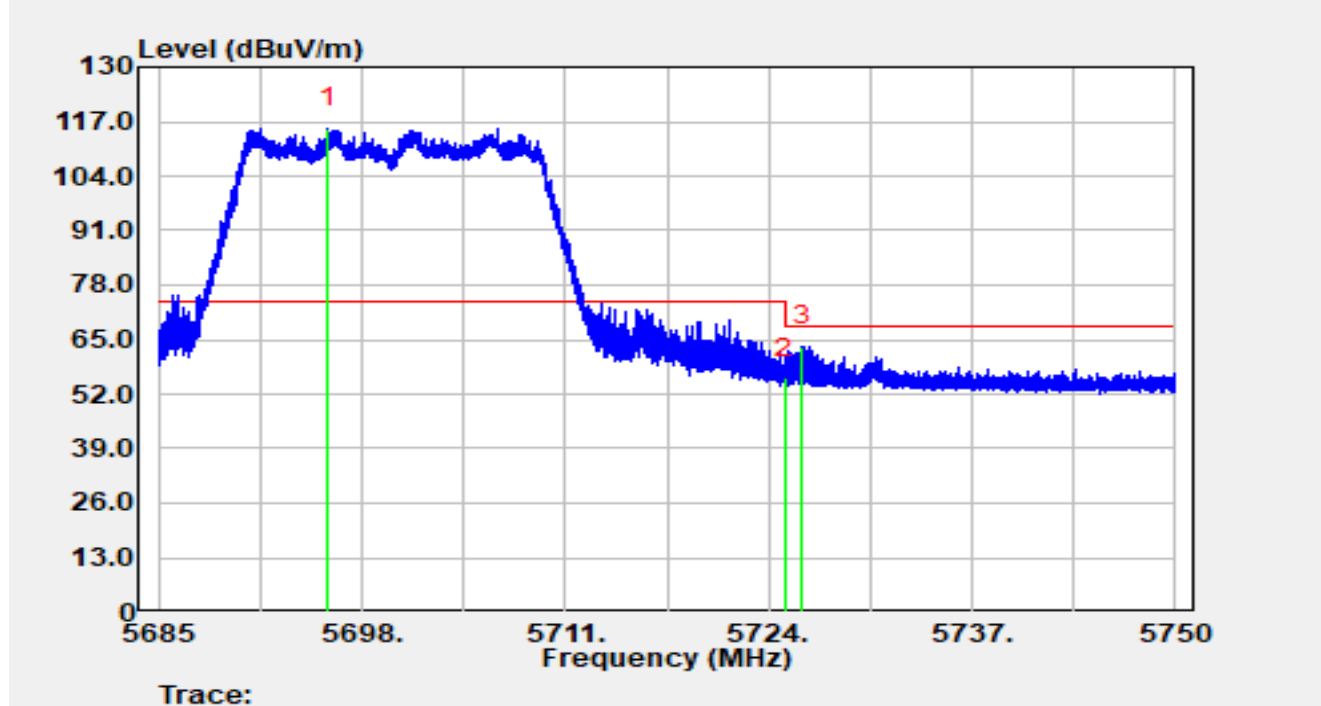


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5695.84         | 95.48          | 20.02      | 115.51               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 35.37          | 20.33      | 55.70                | -12.50      | 68.20          | Peak     |
| 3  | *    | 5726.17         | 43.08          | 20.31      | 63.39                | -4.81       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-02 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5745 MHz |               |            |

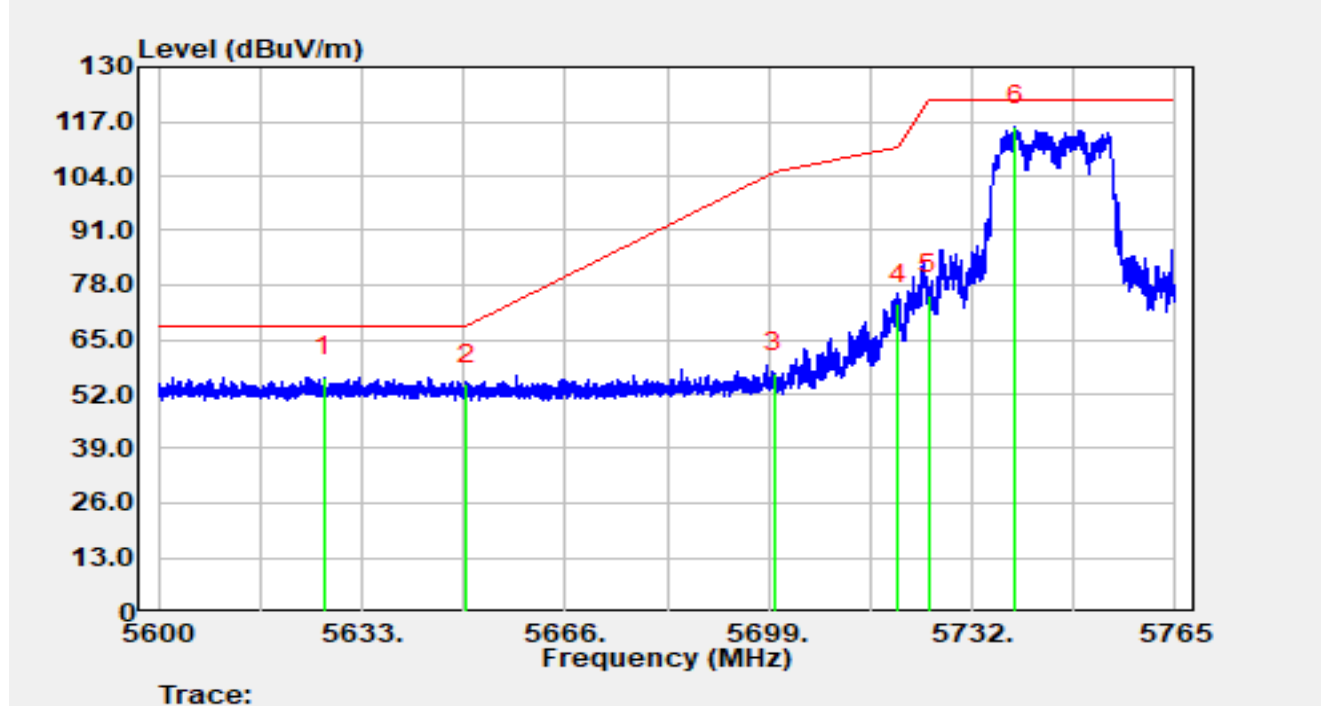


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5626.94         | 36.27          | 19.87      | 56.14                | -12.06      | 68.20          | Peak     |
| 2  |      | 5650.00         | 34.69          | 19.62      | 54.32                | -13.88      | 68.20          | Peak     |
| 3  |      | 5700.00         | 36.85          | 20.14      | 57.00                | -48.20      | 105.20         | Peak     |
| 4  |      | 5720.00         | 53.03          | 20.38      | 73.41                | -37.39      | 110.80         | Peak     |
| 5  |      | 5725.00         | 55.36          | 20.33      | 75.69                | -46.51      | 122.20         | Peak     |
| 6  |      | 5739.01         | 95.65          | 20.17      | 115.82               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-02 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5745 MHz |               |            |

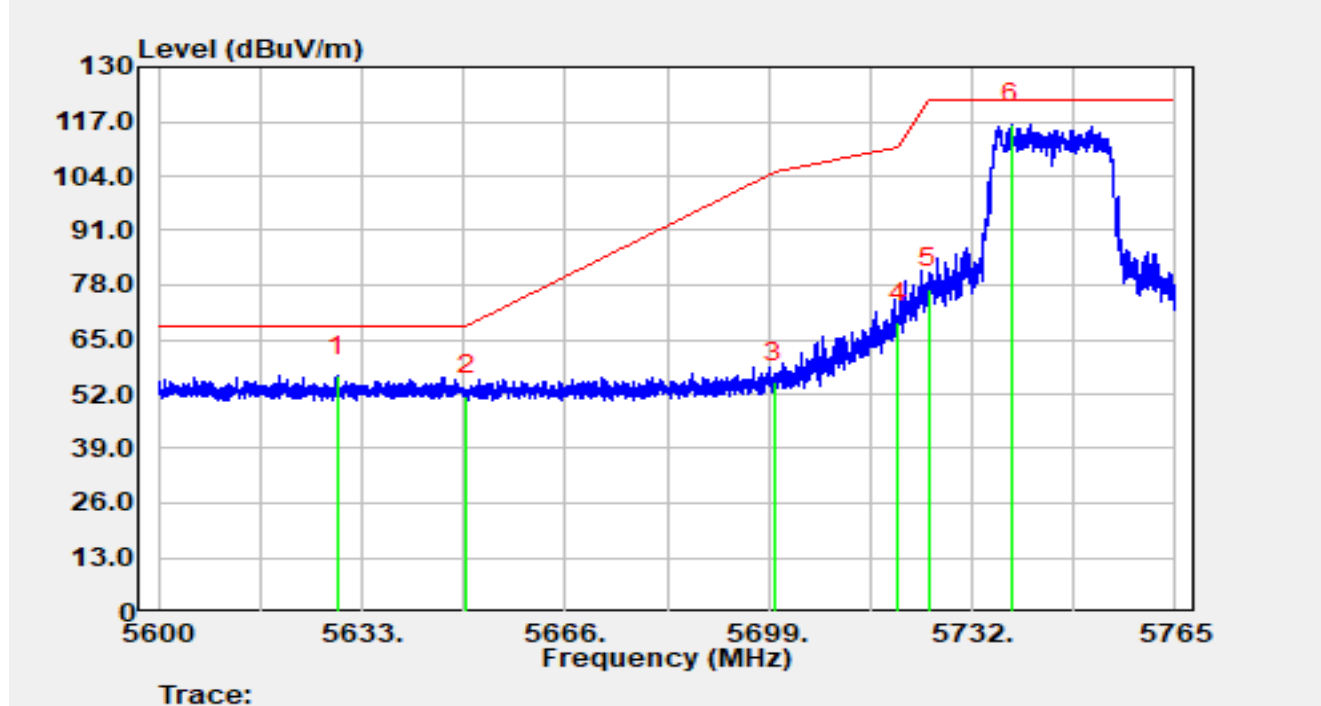


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5628.91         | 36.45          | 19.88      | 56.33                | -11.87      | 68.20          | Peak     |
| 2  |      | 5650.00         | 32.01          | 19.62      | 51.63                | -16.57      | 68.20          | Peak     |
| 3  |      | 5700.00         | 34.73          | 20.14      | 54.87                | -50.33      | 105.20         | Peak     |
| 4  |      | 5720.00         | 48.78          | 20.38      | 69.16                | -41.64      | 110.80         | Peak     |
| 5  |      | 5725.00         | 56.74          | 20.33      | 77.07                | -45.13      | 122.20         | Peak     |
| 6  |      | 5738.45         | 96.22          | 20.18      | 116.40               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-02 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE20 at 5825 MHz |               |            |

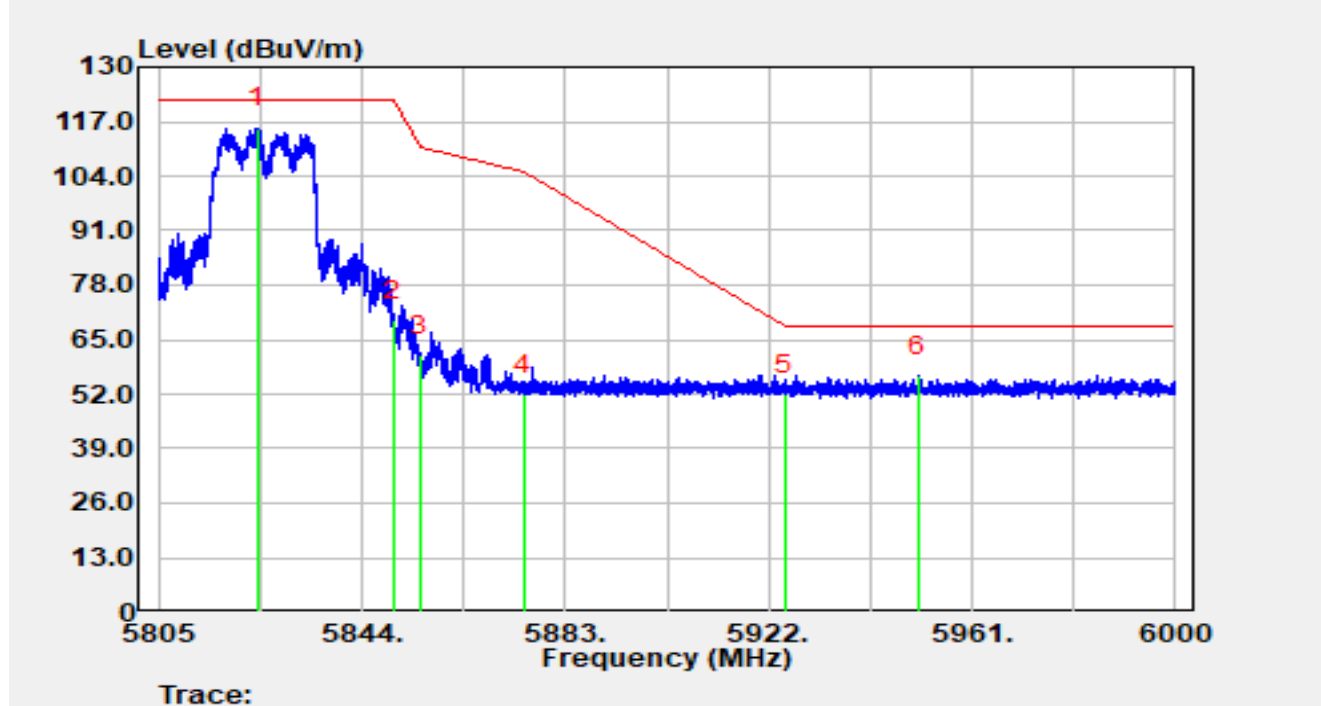


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5823.86         | 94.84          | 20.56      | 115.40               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 49.23          | 20.30      | 69.53                | -52.67      | 122.20         | Peak     |
| 3  |      | 5855.00         | 40.93          | 20.30      | 61.24                | -49.56      | 110.80         | Peak     |
| 4  |      | 5875.00         | 31.25          | 20.63      | 51.88                | -53.32      | 105.20         | Peak     |
| 5  |      | 5925.00         | 31.39          | 20.59      | 51.98                | -16.22      | 68.20          | Peak     |
| 6  | *    | 5950.69         | 35.59          | 20.67      | 56.26                | -11.94      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-02 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE20 at 5825 MHz |               |            |

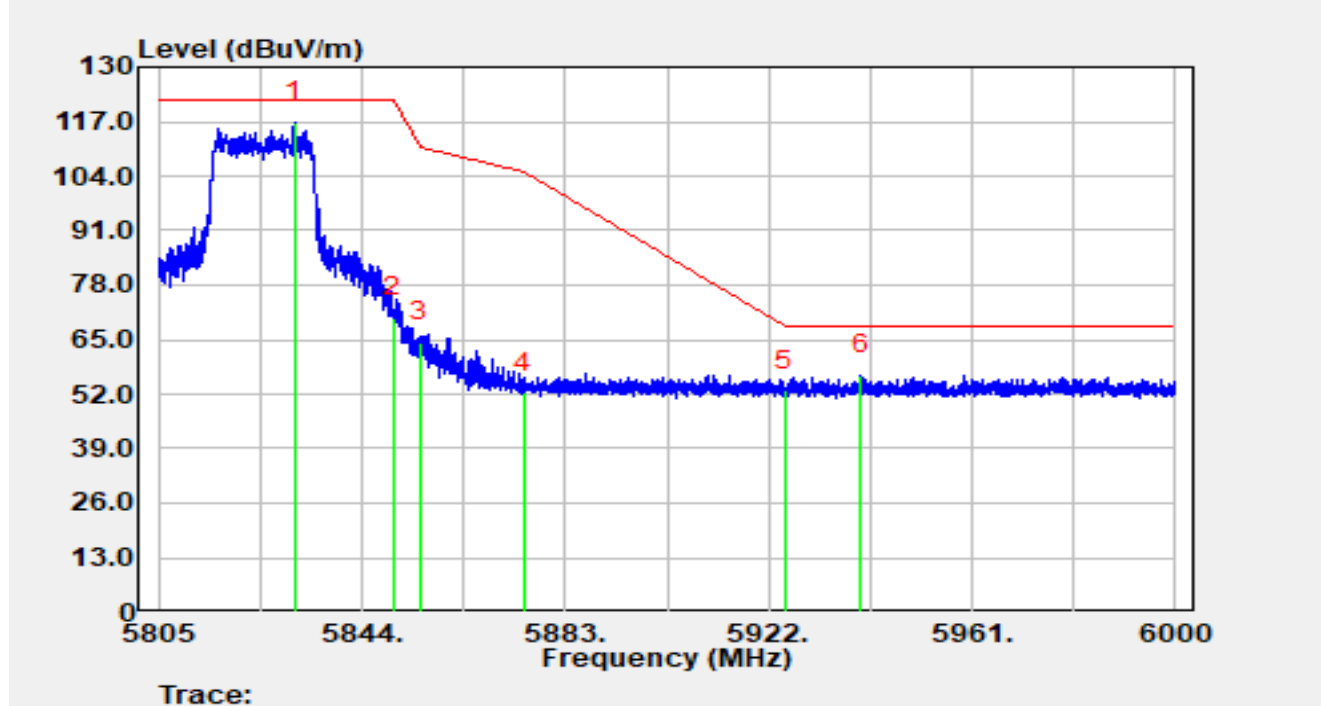


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5831.03         | 96.39          | 20.47      | 116.86               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 50.06          | 20.30      | 70.36                | -51.84      | 122.20         | Peak     |
| 3  |      | 5855.00         | 44.17          | 20.30      | 64.48                | -46.32      | 110.80         | Peak     |
| 4  |      | 5875.00         | 31.77          | 20.63      | 52.40                | -52.80      | 105.20         | Peak     |
| 5  |      | 5925.00         | 32.33          | 20.59      | 52.92                | -15.28      | 68.20          | Peak     |
| 6  | *    | 5939.73         | 35.97          | 20.64      | 56.62                | -11.58      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5190 MHz |               |            |

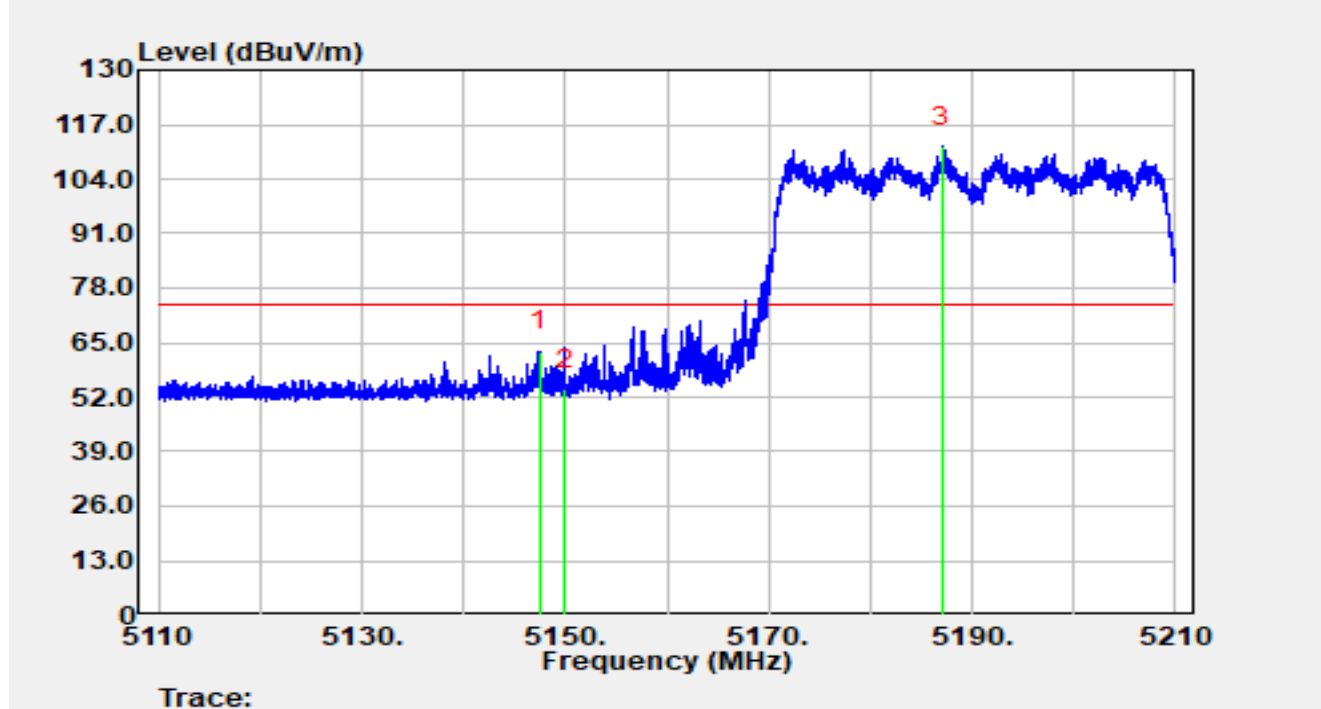


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.43         | 44.39          | 18.53      | 62.91                | -11.09      | 74.00          | Peak     |
| 2  |      | 5150.00         | 35.37          | 18.52      | 53.89                | -20.11      | 74.00          | Peak     |
| 3  |      | 5187.10         | 92.88          | 18.81      | 111.70               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5190 MHz |               |            |

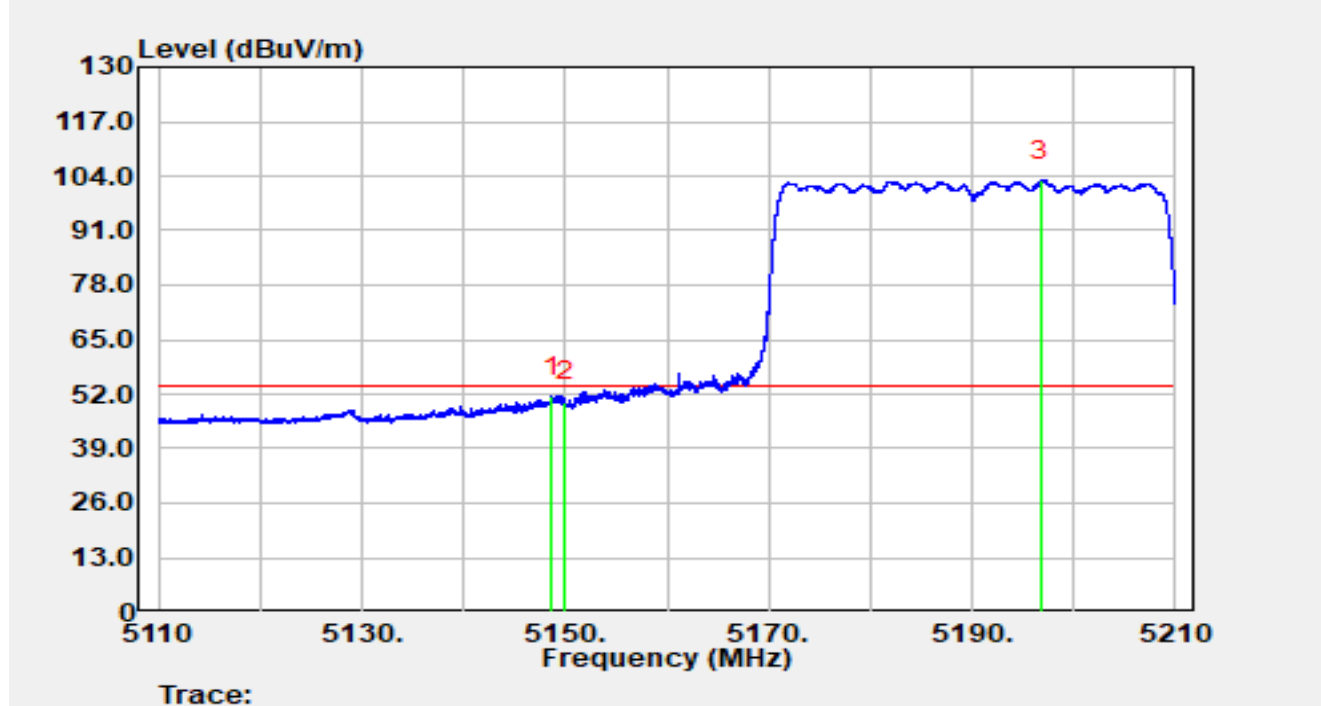


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.71         | 32.86          | 18.52      | 51.38                | -2.62       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.52          | 18.52      | 50.04                | -3.96       | 54.00          | Average  |
| 3  |      | 5196.74         | 84.22          | 18.71      | 102.93               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5190 MHz |               |            |

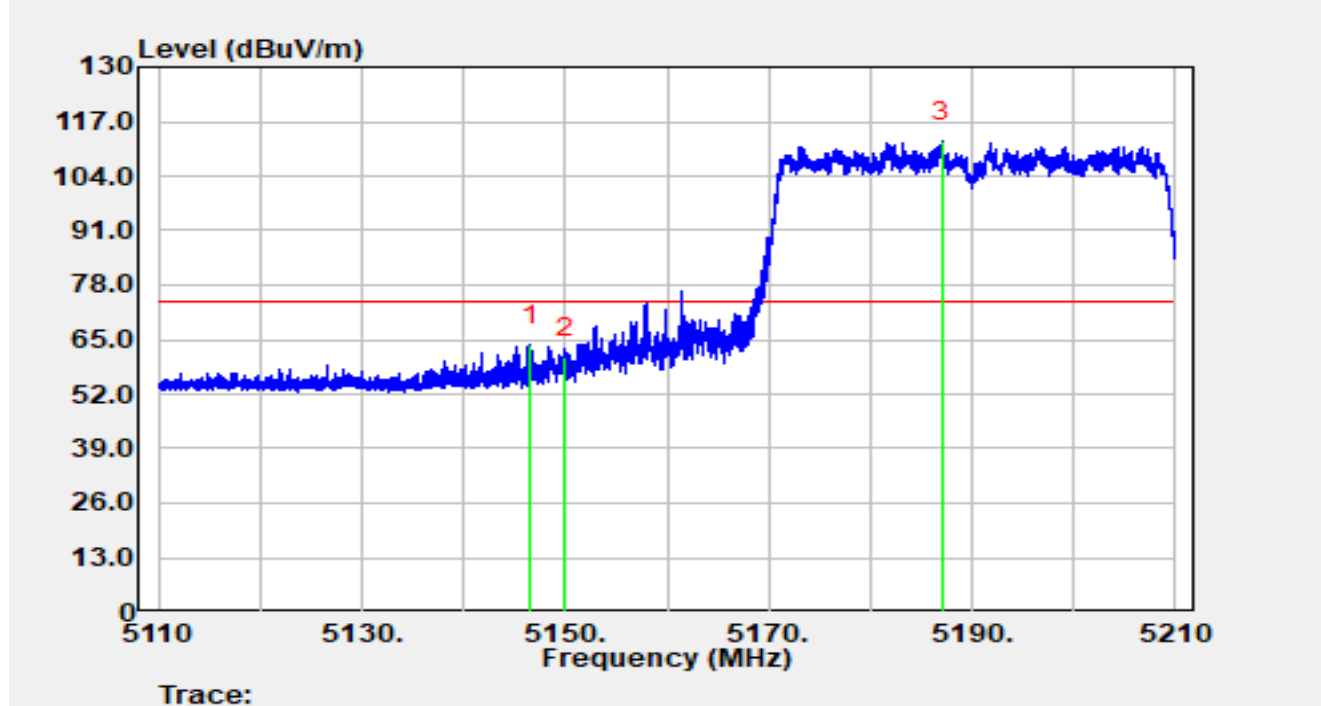


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.55         | 45.01          | 18.53      | 63.54                | -10.46      | 74.00          | Peak     |
| 2  |      | 5150.00         | 42.20          | 18.52      | 60.72                | -13.28      | 74.00          | Peak     |
| 3  |      | 5187.02         | 93.51          | 18.81      | 112.32               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5190 MHz |               |            |

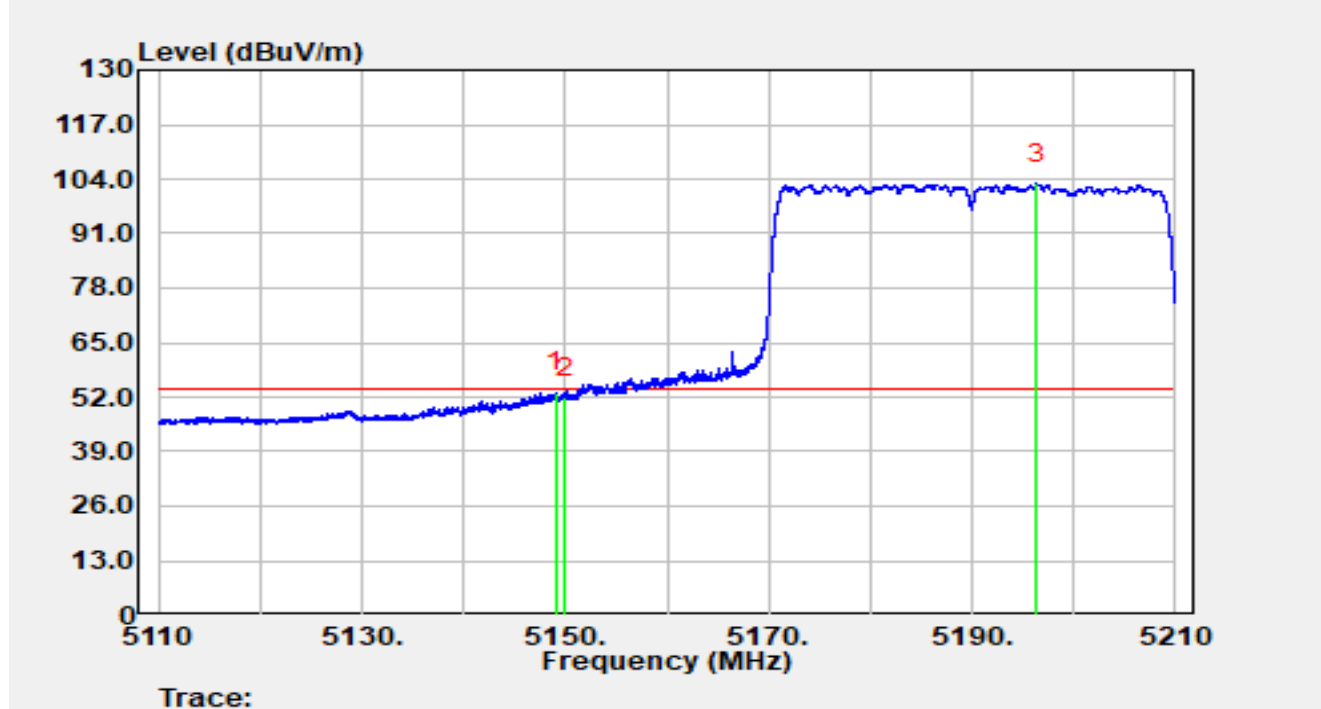


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.02         | 34.53          | 18.52      | 53.05                | -0.95       | 54.00          | Average  |
| 2  |      | 5150.00         | 33.44          | 18.52      | 51.96                | -2.04       | 54.00          | Average  |
| 3  |      | 5196.40         | 84.06          | 18.72      | 102.78               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5310 MHz |               |            |

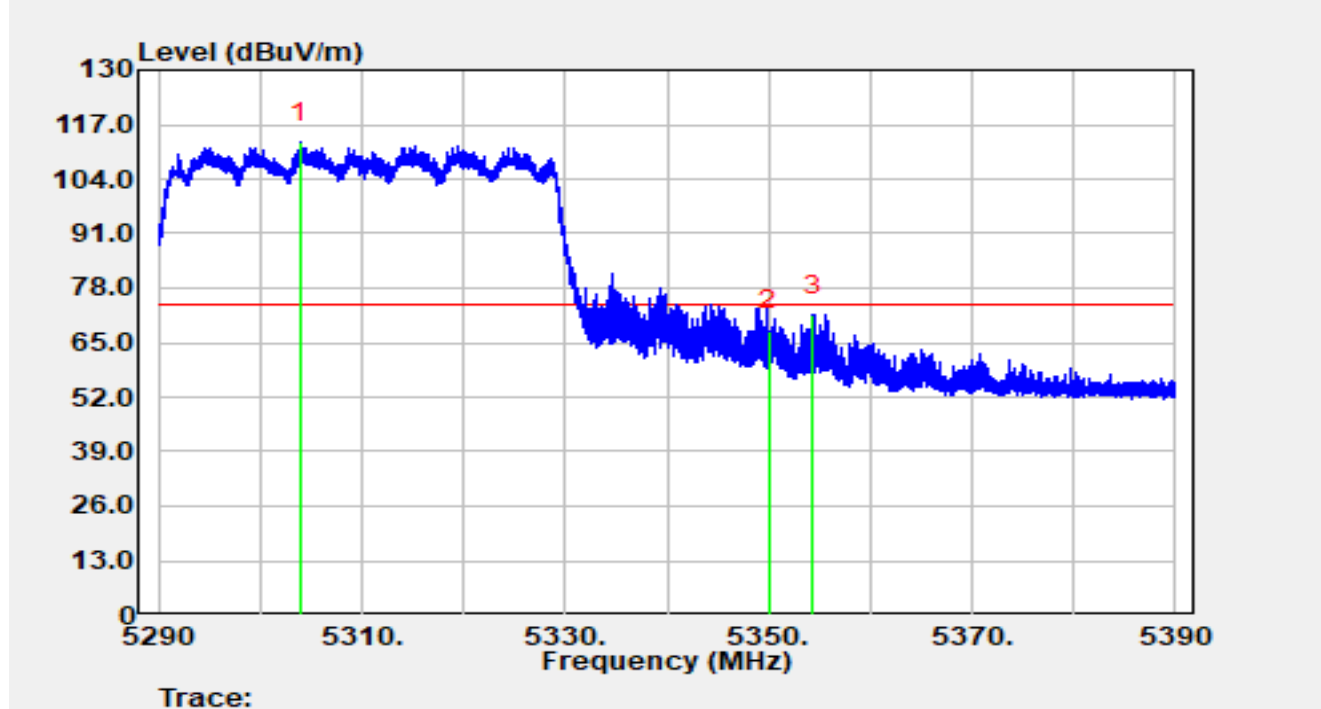


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5303.86         | 94.01          | 18.64      | 112.65               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 49.07          | 18.82      | 67.89                | -6.11       | 74.00          | Peak     |
| 3  | *    | 5354.40         | 52.73          | 18.88      | 71.62                | -2.38       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5310 MHz |               |            |

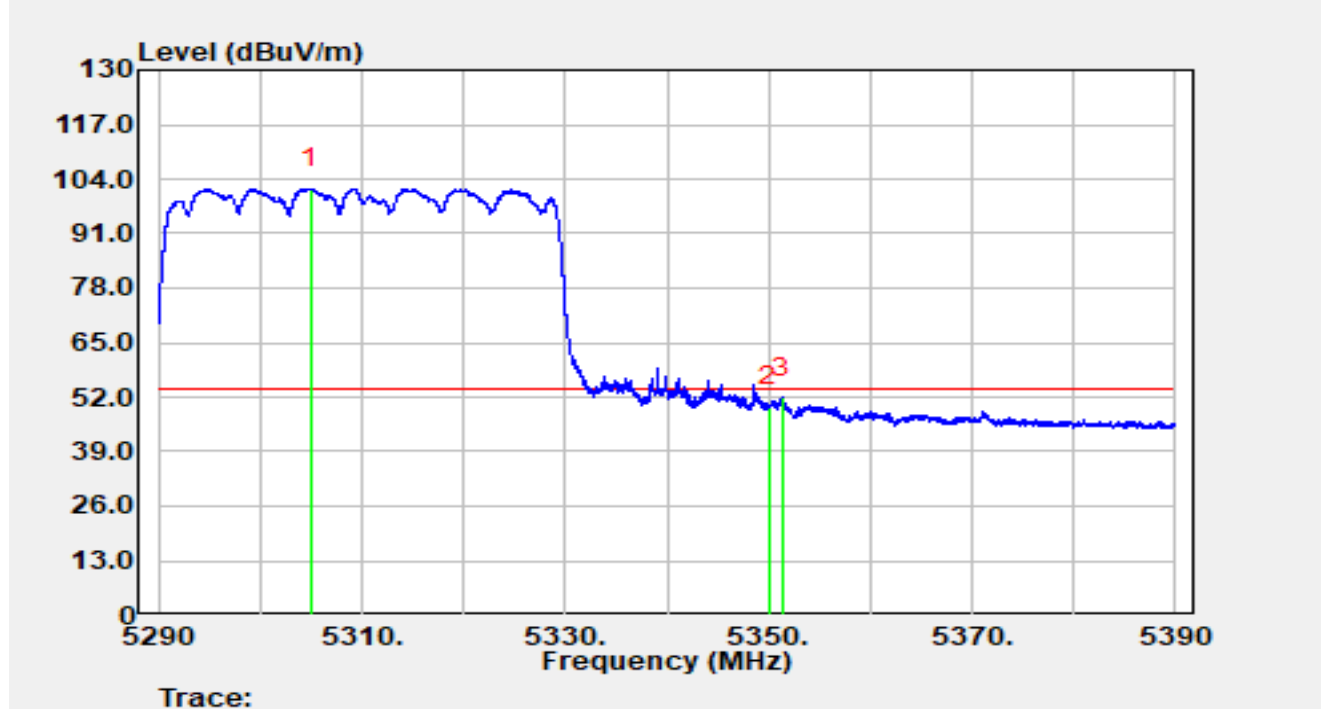


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5304.98         | 83.11          | 18.62      | 101.73               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 30.90          | 18.82      | 49.72                | -4.28       | 54.00          | Average  |
| 3  | *    | 5351.34         | 33.14          | 18.84      | 51.98                | -2.02       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5310 MHz |               |            |

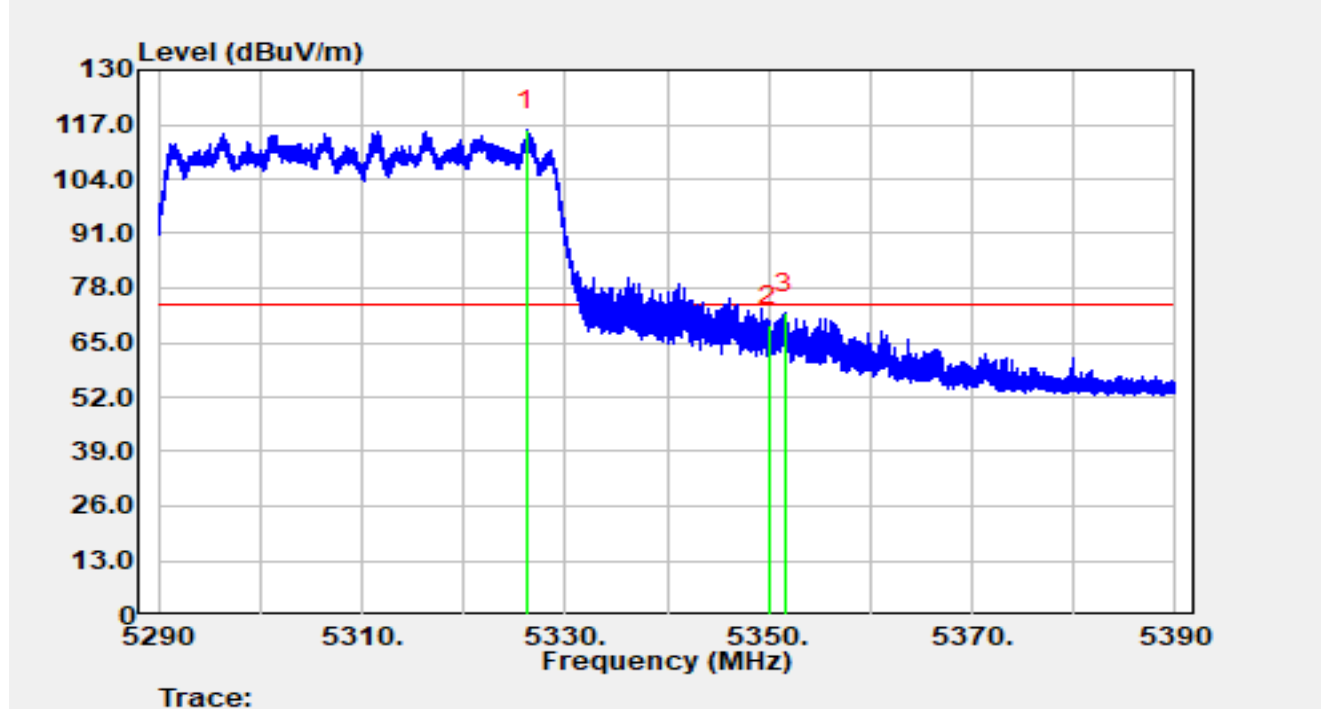


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5326.23         | 97.04          | 18.61      | 115.65               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 50.33          | 18.82      | 69.15                | -4.85       | 74.00          | Peak     |
| 3  | *    | 5351.62         | 53.25          | 18.84      | 72.10                | -1.90       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5310 MHz |               |            |

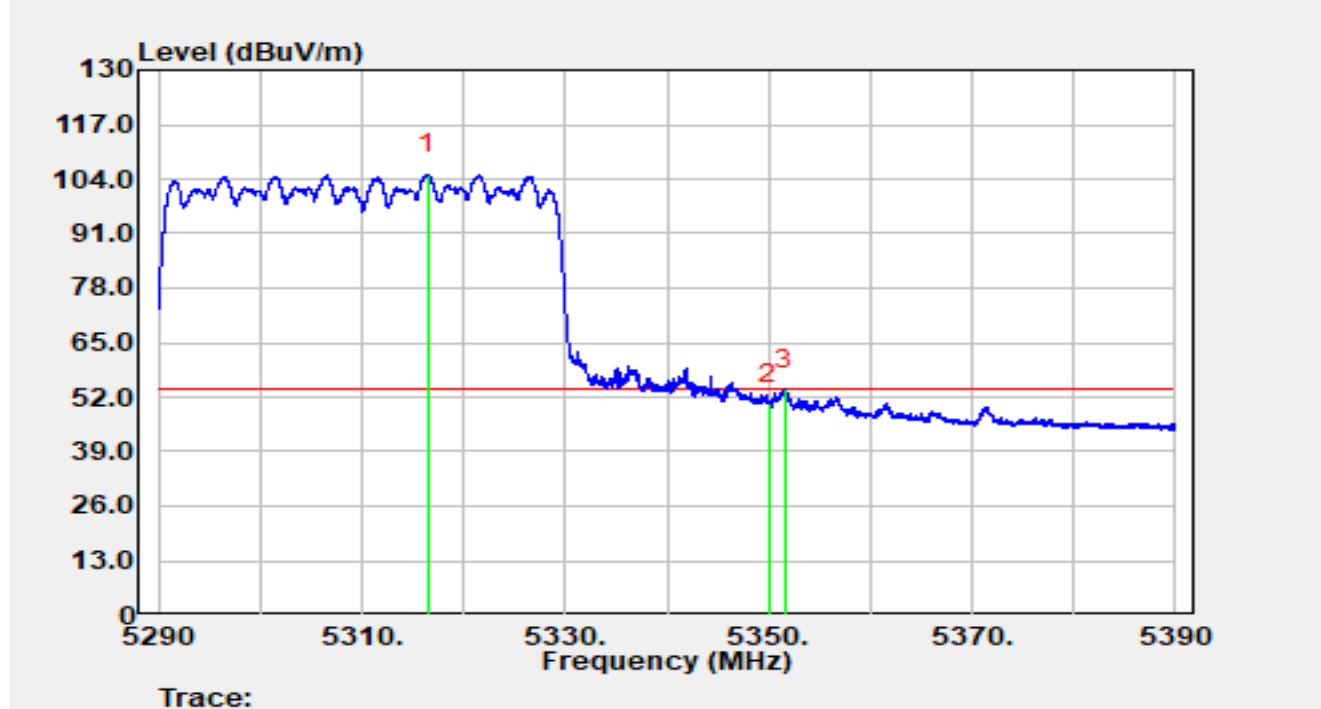


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5316.53         | 86.60          | 18.60      | 105.20               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 31.68          | 18.82      | 50.50                | -3.50       | 54.00          | Average  |
| 3  | *    | 5351.55         | 34.92          | 18.84      | 53.76                | -0.24       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5510 MHz |               |            |

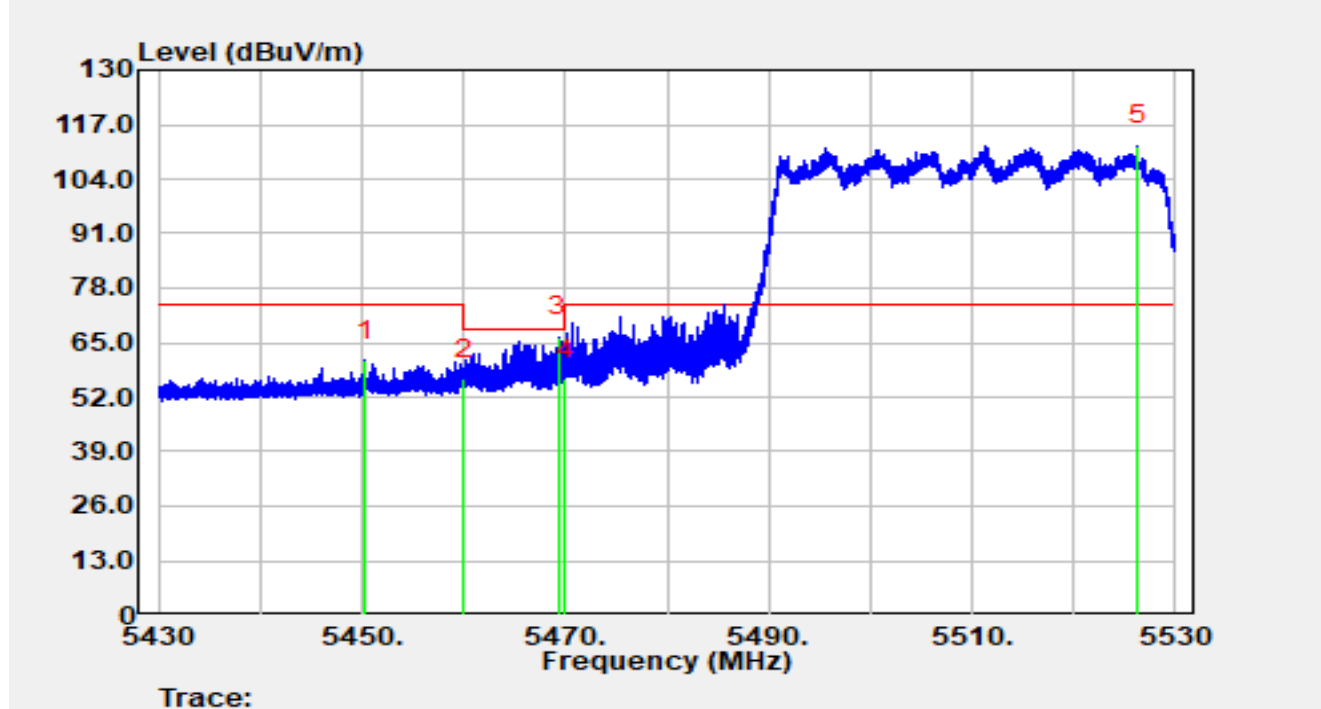


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5450.36         | 41.53          | 19.13      | 60.66                | -13.34      | 74.00          | Peak     |
| 2  |      | 5460.00         | 37.06          | 19.12      | 56.18                | -12.02      | 68.20          | Peak     |
| 3  | *    | 5469.31         | 47.33          | 19.03      | 66.36                | -1.84       | 68.20          | Peak     |
| 4  |      | 5470.00         | 37.25          | 19.02      | 56.27                | -11.93      | 68.20          | Peak     |
| 5  |      | 5526.32         | 92.72          | 19.16      | 111.88               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5510 MHz |               |            |

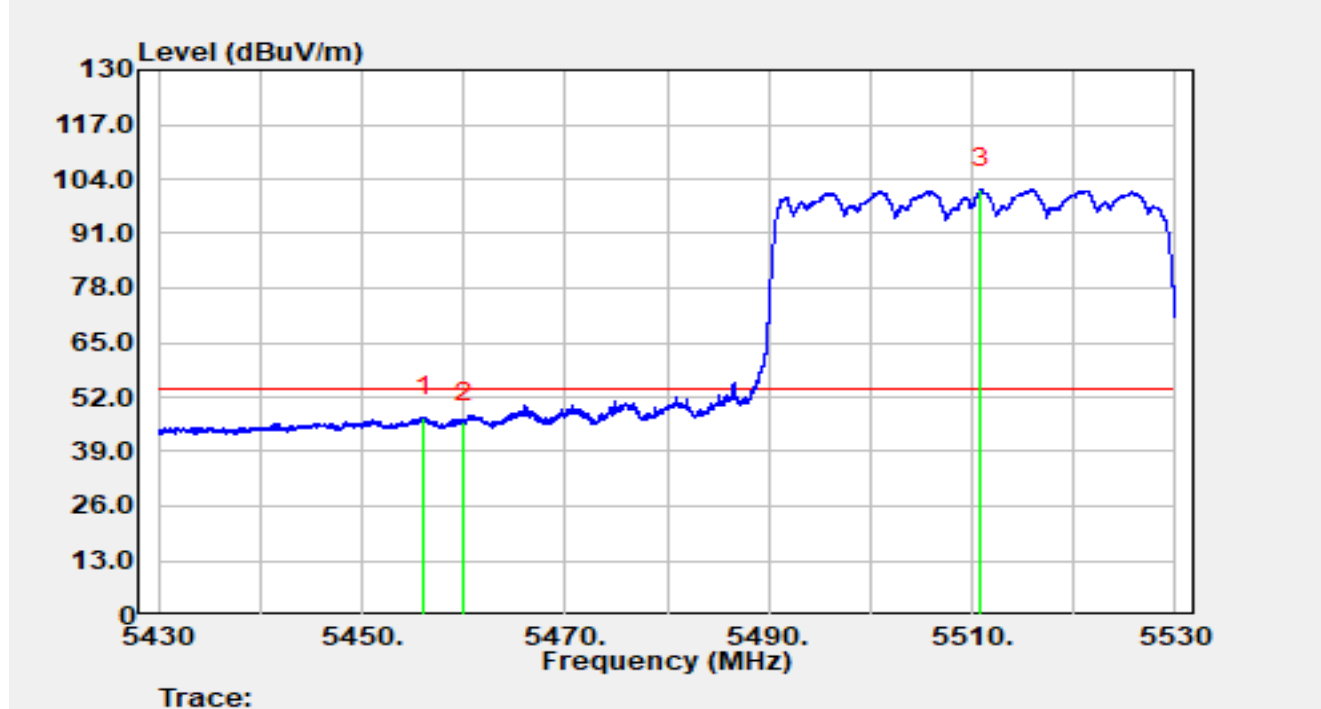


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5456.06         | 28.05          | 19.11      | 47.16                | -6.84       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.84          | 19.12      | 45.96                | -8.04       | 54.00          | Average  |
| 3  |      | 5510.88         | 82.73          | 18.96      | 101.70               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5510 MHz |               |            |

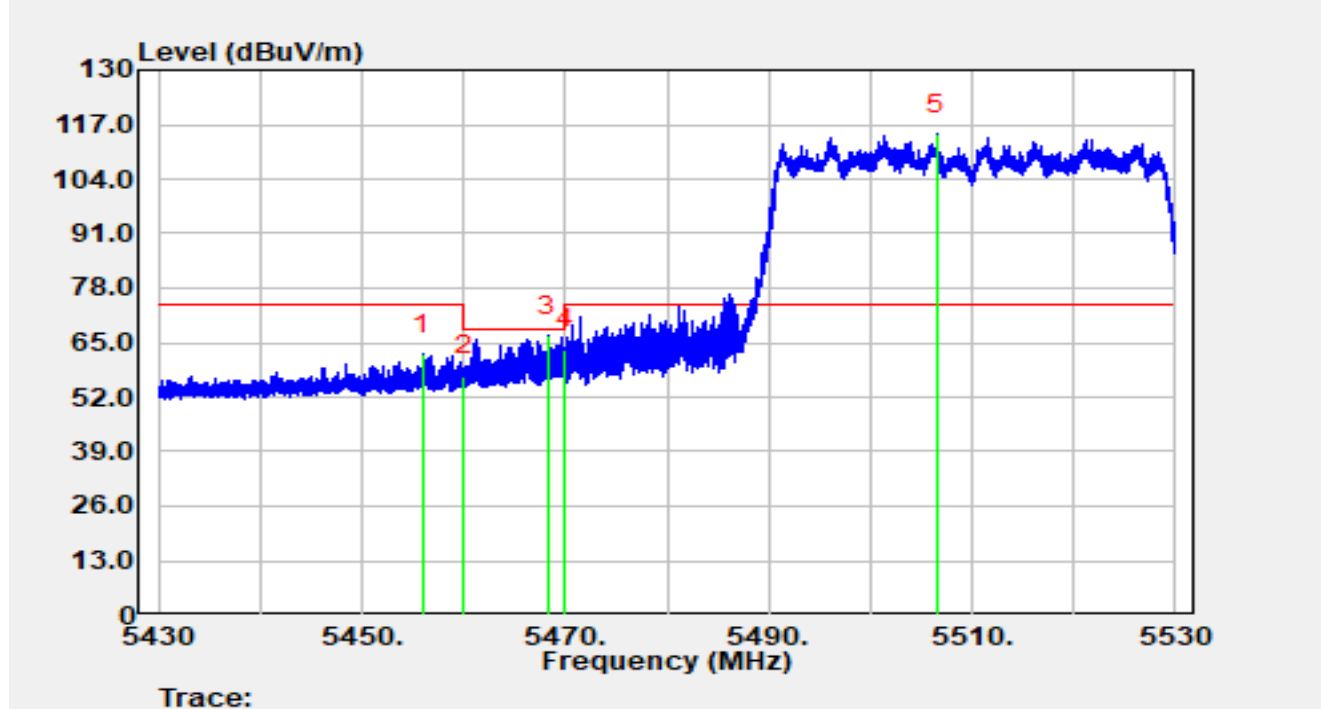


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5456.00         | 43.05          | 19.11      | 62.16                | -11.84      | 74.00          | Peak     |
| 2  |      | 5460.00         | 37.89          | 19.12      | 57.01                | -11.19      | 68.20          | Peak     |
| 3  | *    | 5468.30         | 47.61          | 19.04      | 66.66                | -1.54       | 68.20          | Peak     |
| 4  |      | 5470.00         | 44.38          | 19.02      | 63.41                | -4.79       | 68.20          | Peak     |
| 5  |      | 5506.49         | 95.70          | 18.93      | 114.63               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5510 MHz |               |            |

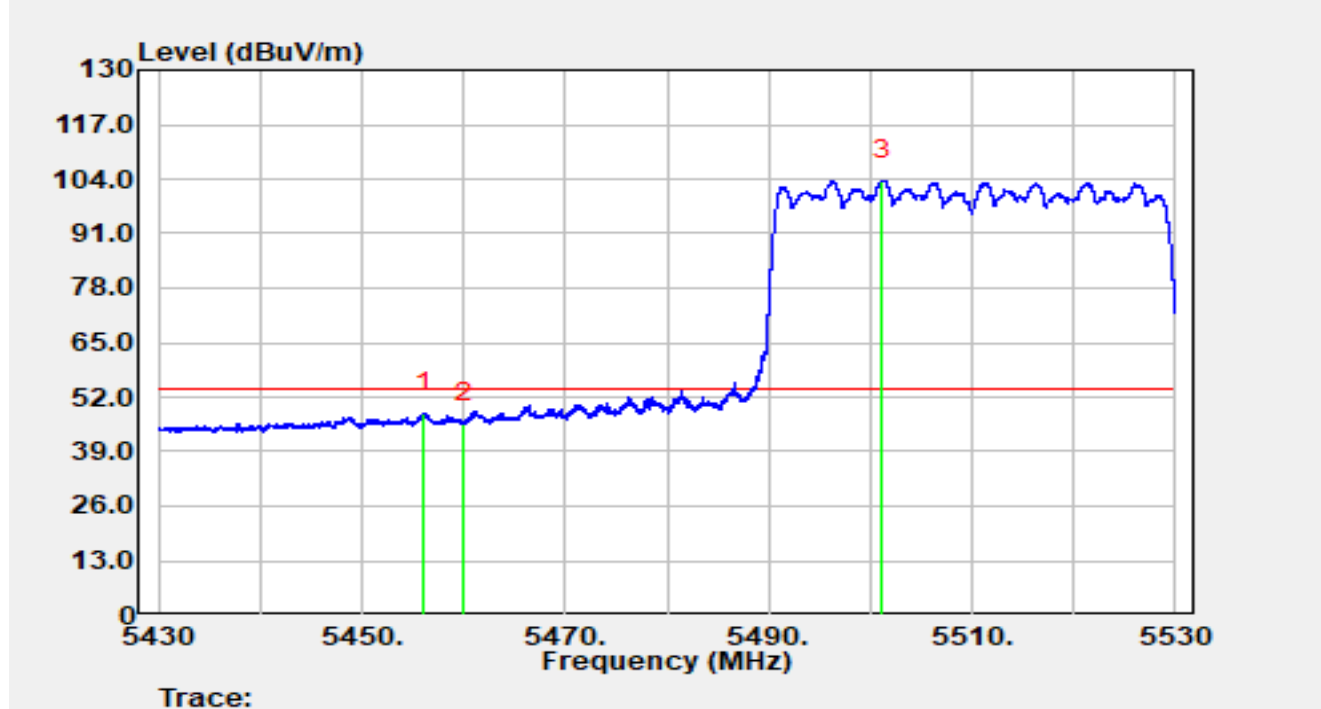


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5456.08         | 28.97          | 19.11      | 48.08                | -5.92       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.65          | 19.12      | 45.77                | -8.23       | 54.00          | Average  |
| 3  |      | 5501.11         | 84.85          | 18.89      | 103.74               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5670 MHz |               |            |

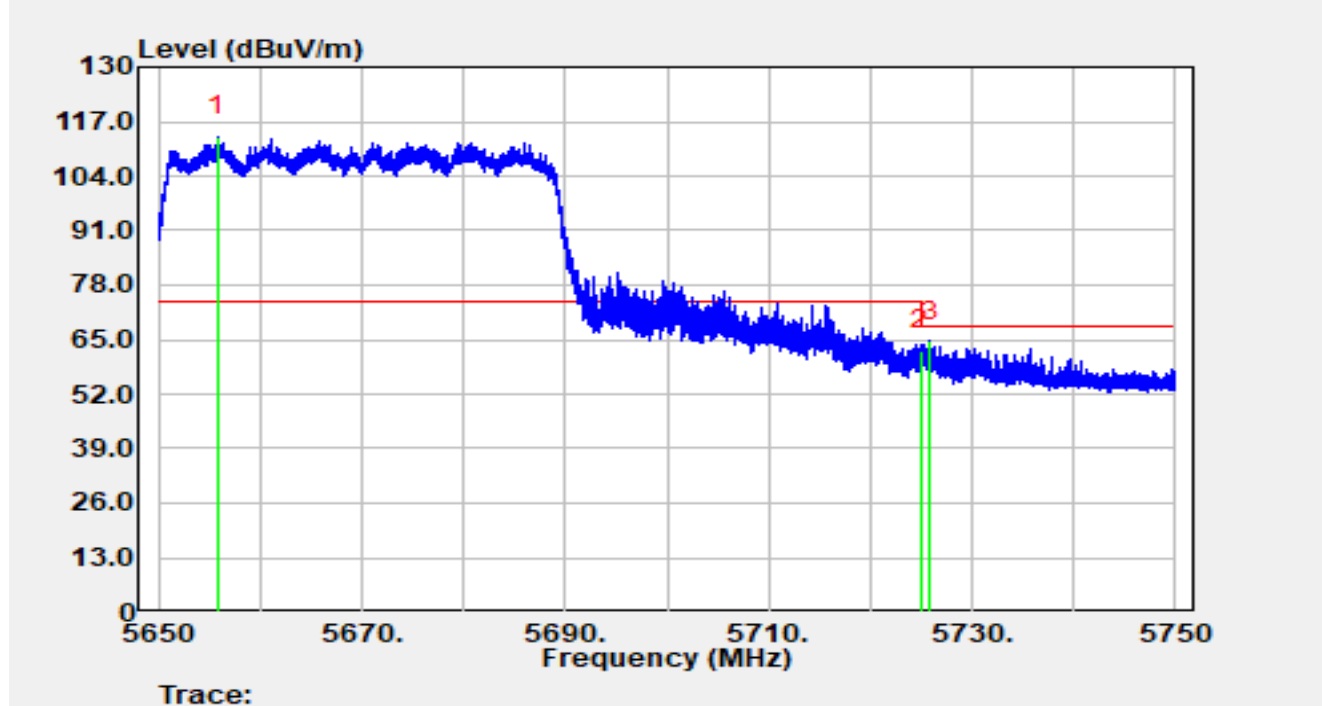


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5655.76         | 93.93          | 19.55      | 113.48               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 42.14          | 20.33      | 62.46                | -5.74       | 68.20          | Peak     |
| 3  | *    | 5725.93         | 44.19          | 20.32      | 64.51                | -3.69       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                               | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5670 MHz |               |            |

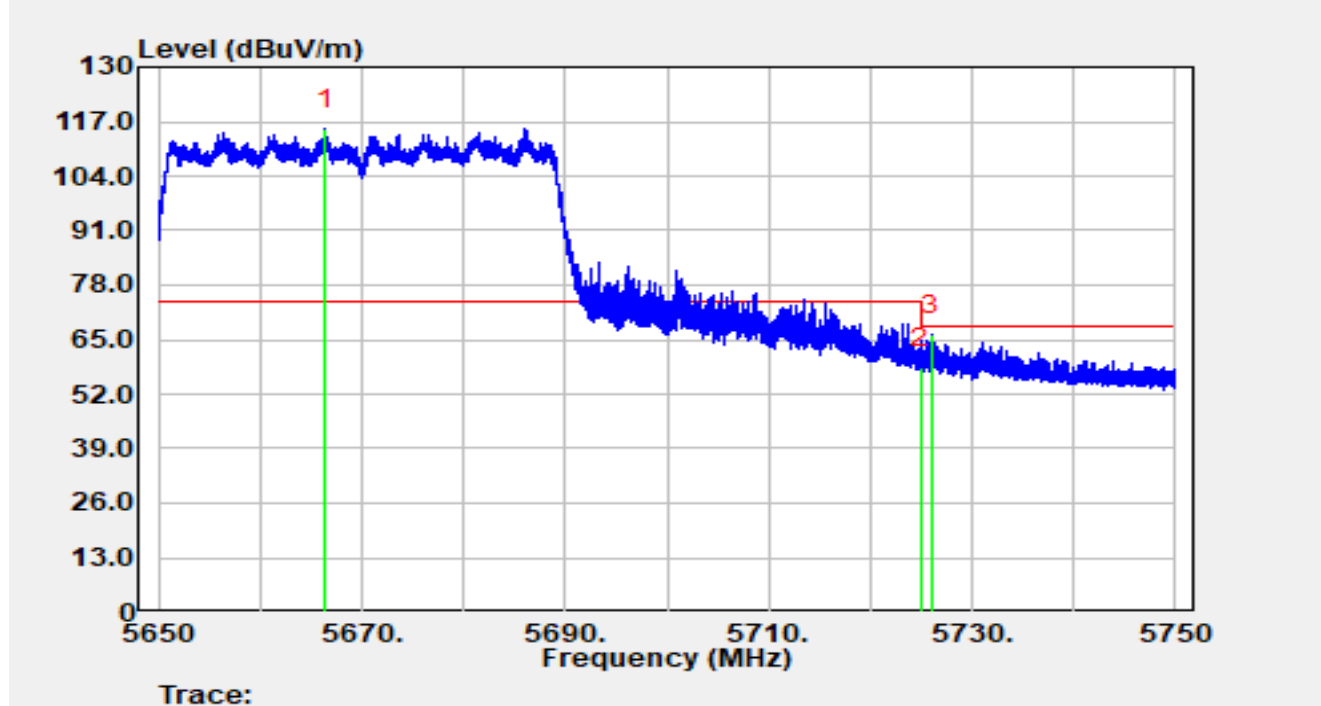


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5666.37         | 95.69          | 19.51      | 115.20               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 37.92          | 20.33      | 58.25                | -9.95       | 68.20          | Peak     |
| 3  | *    | 5726.06         | 45.75          | 20.32      | 66.07                | -2.13       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5755 MHz |               |            |

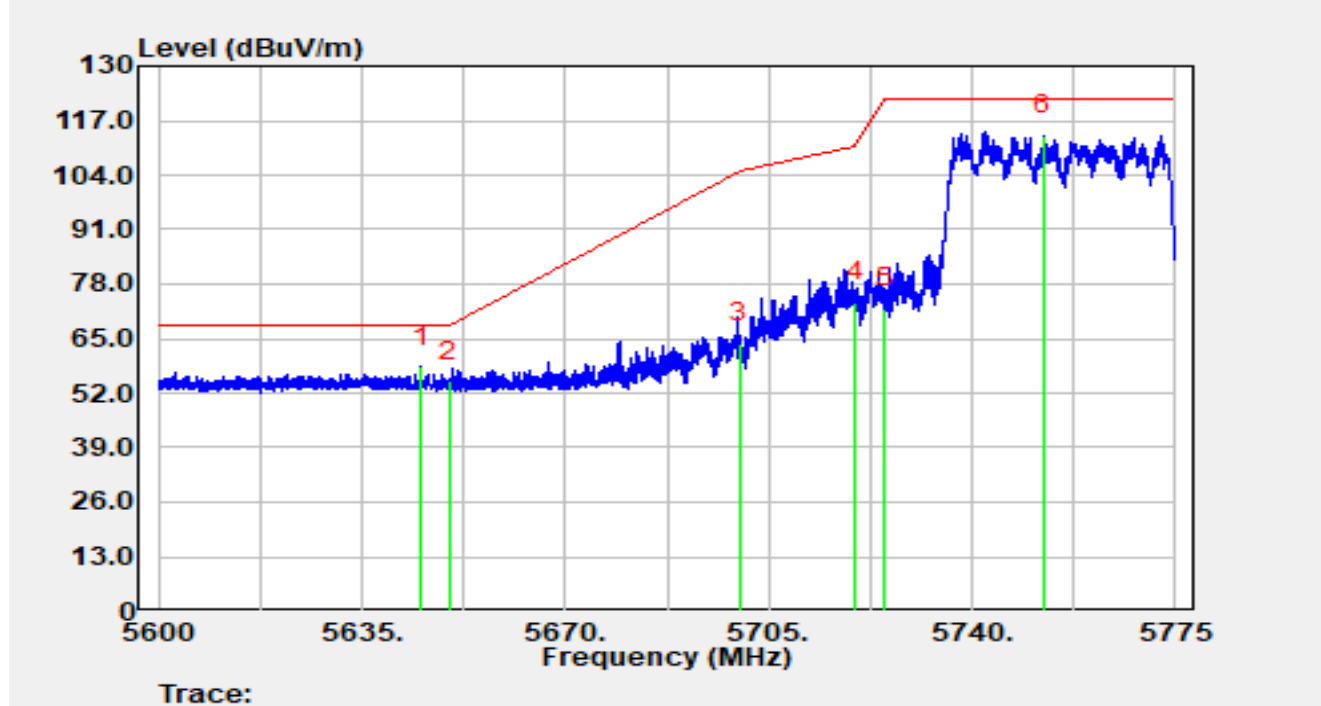


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5645.15         | 38.50          | 19.70      | 58.21                | -9.99       | 68.20          | Peak     |
| 2  |      | 5650.00         | 35.20          | 19.62      | 54.82                | -13.38      | 68.20          | Peak     |
| 3  |      | 5700.00         | 43.69          | 20.14      | 63.83                | -41.37      | 105.20         | Peak     |
| 4  |      | 5720.00         | 53.36          | 20.38      | 73.74                | -37.06      | 110.80         | Peak     |
| 5  |      | 5725.00         | 51.90          | 20.33      | 72.22                | -49.98      | 122.20         | Peak     |
| 6  |      | 5752.25         | 93.40          | 20.03      | 113.43               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5755 MHz |               |            |

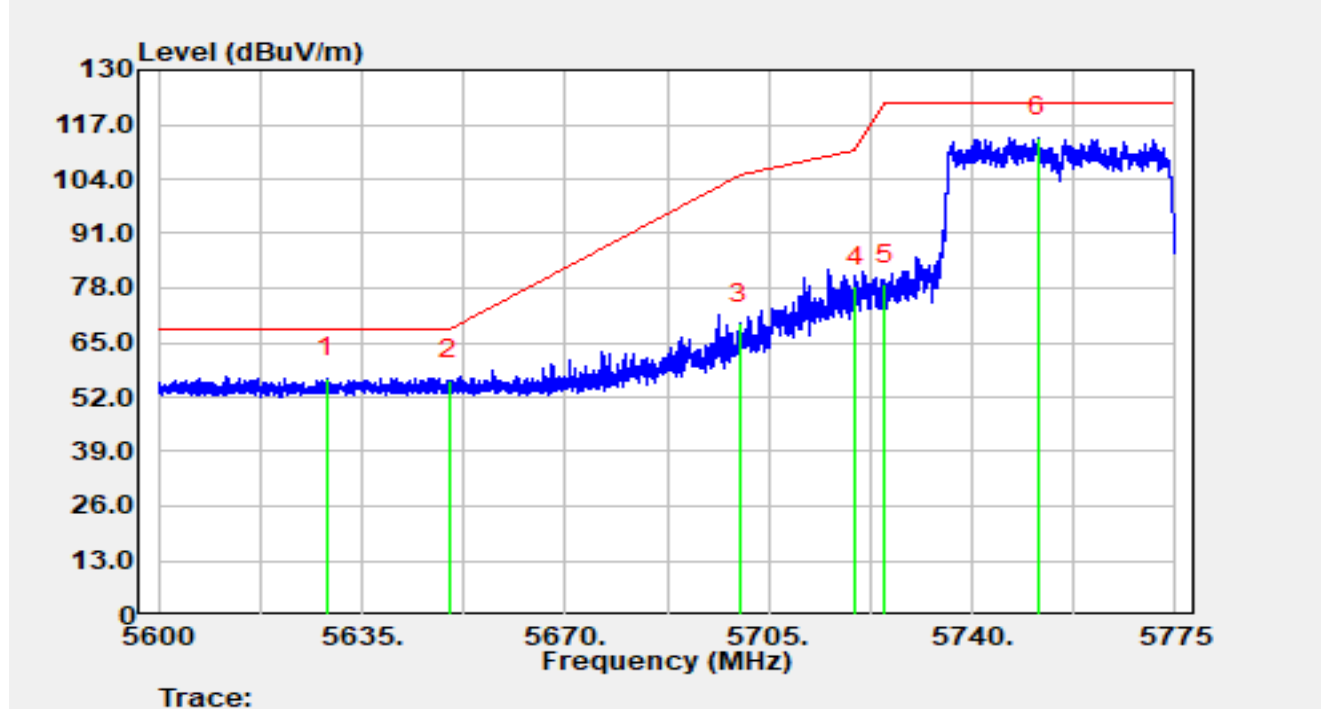


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5628.89         | 36.61          | 19.88      | 56.49                | -11.71      | 68.20          | Peak     |
| 2  |      | 5650.00         | 36.34          | 19.62      | 55.96                | -12.24      | 68.20          | Peak     |
| 3  |      | 5700.00         | 49.28          | 20.14      | 69.42                | -35.78      | 105.20         | Peak     |
| 4  |      | 5720.00         | 57.90          | 20.38      | 78.28                | -32.52      | 110.80         | Peak     |
| 5  |      | 5725.00         | 58.51          | 20.33      | 78.84                | -43.36      | 122.20         | Peak     |
| 6  |      | 5751.39         | 93.94          | 20.04      | 113.99               | N/A         | N/A            | Peak     |

Notes:

1. " \* " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE40 at 5795 MHz |               |            |

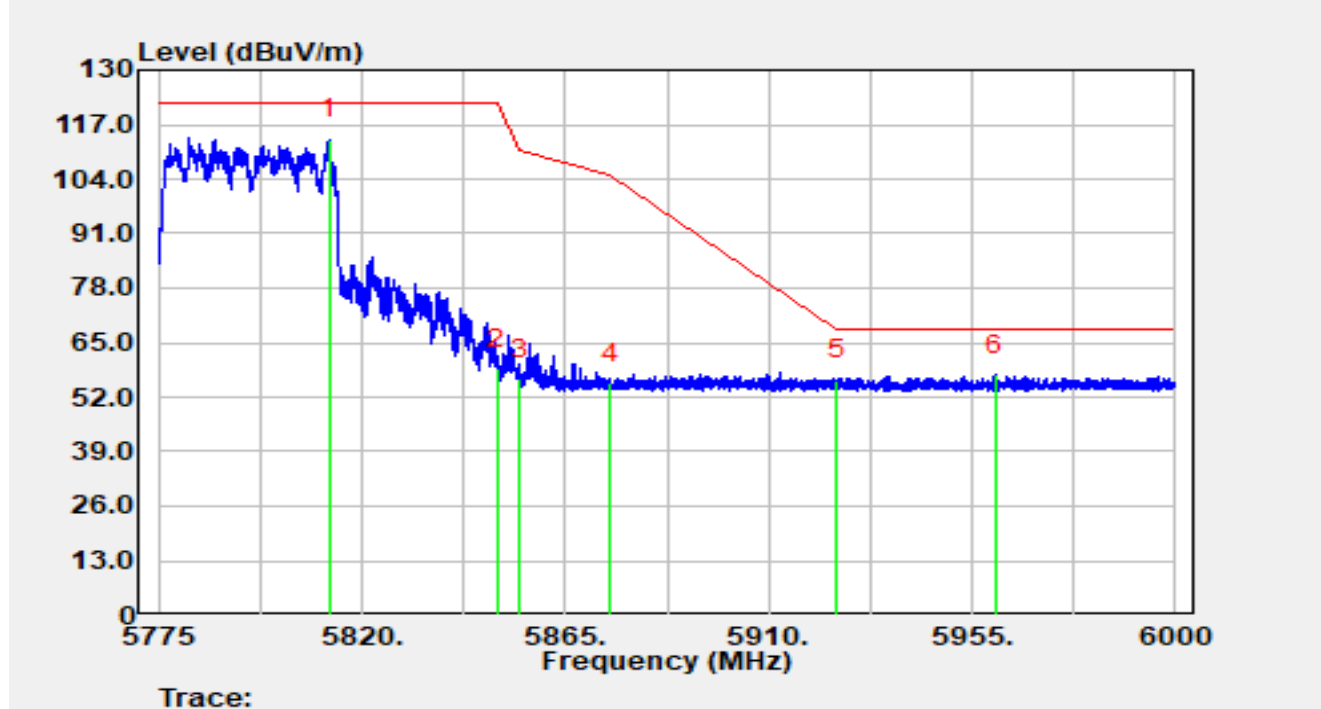


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5812.67         | 92.70          | 20.63      | 113.32               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 38.48          | 20.30      | 58.77                | -63.43      | 122.20         | Peak     |
| 3  |      | 5855.00         | 36.08          | 20.30      | 56.38                | -54.42      | 110.80         | Peak     |
| 4  |      | 5875.00         | 34.65          | 20.63      | 55.28                | -49.92      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.53          | 20.59      | 56.12                | -12.08      | 68.20          | Peak     |
| 6  | *    | 5960.04         | 36.49          | 20.71      | 57.20                | -11.00      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE40 at 5795 MHz |               |            |

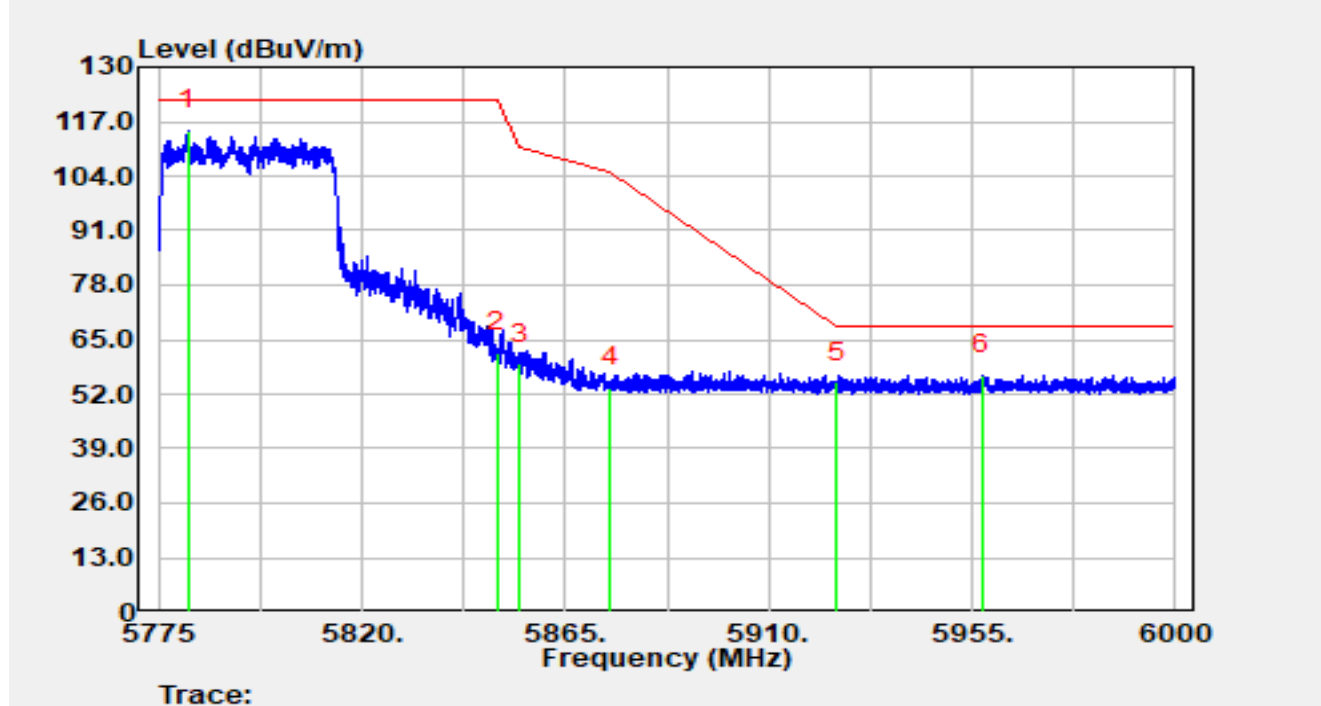


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5781.50         | 94.52          | 20.39      | 114.92               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 41.74          | 20.30      | 62.04                | -60.16      | 122.20         | Peak     |
| 3  |      | 5855.00         | 38.89          | 20.30      | 59.19                | -51.61      | 110.80         | Peak     |
| 4  |      | 5875.00         | 32.90          | 20.63      | 53.53                | -51.67      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.35          | 20.59      | 54.94                | -13.26      | 68.20          | Peak     |
| 6  | *    | 5957.34         | 35.82          | 20.70      | 56.51                | -11.69      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5210 MHz |               |            |

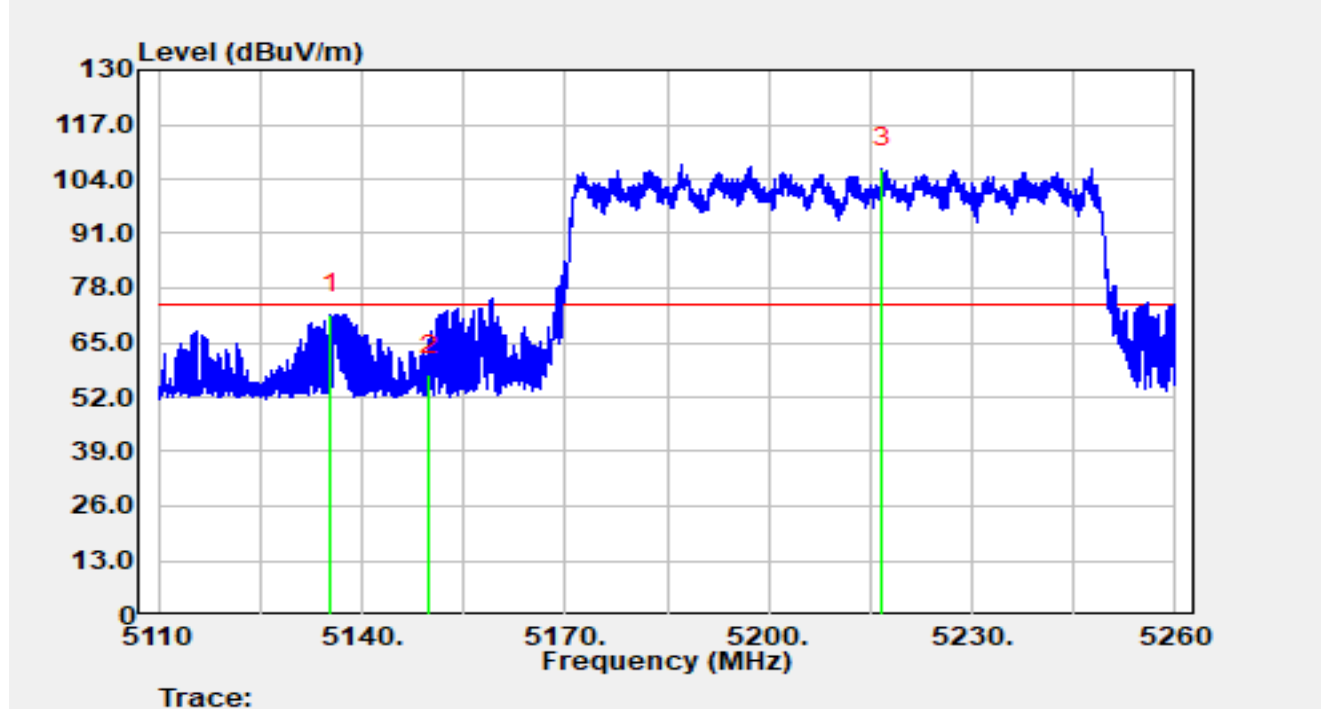


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5135.41         | 53.29          | 18.56      | 71.85                | -2.15       | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.68          | 18.52      | 57.20                | -16.80      | 74.00          | Peak     |
| 3  |      | 5216.74         | 88.34          | 18.33      | 106.67               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5210 MHz |               |            |

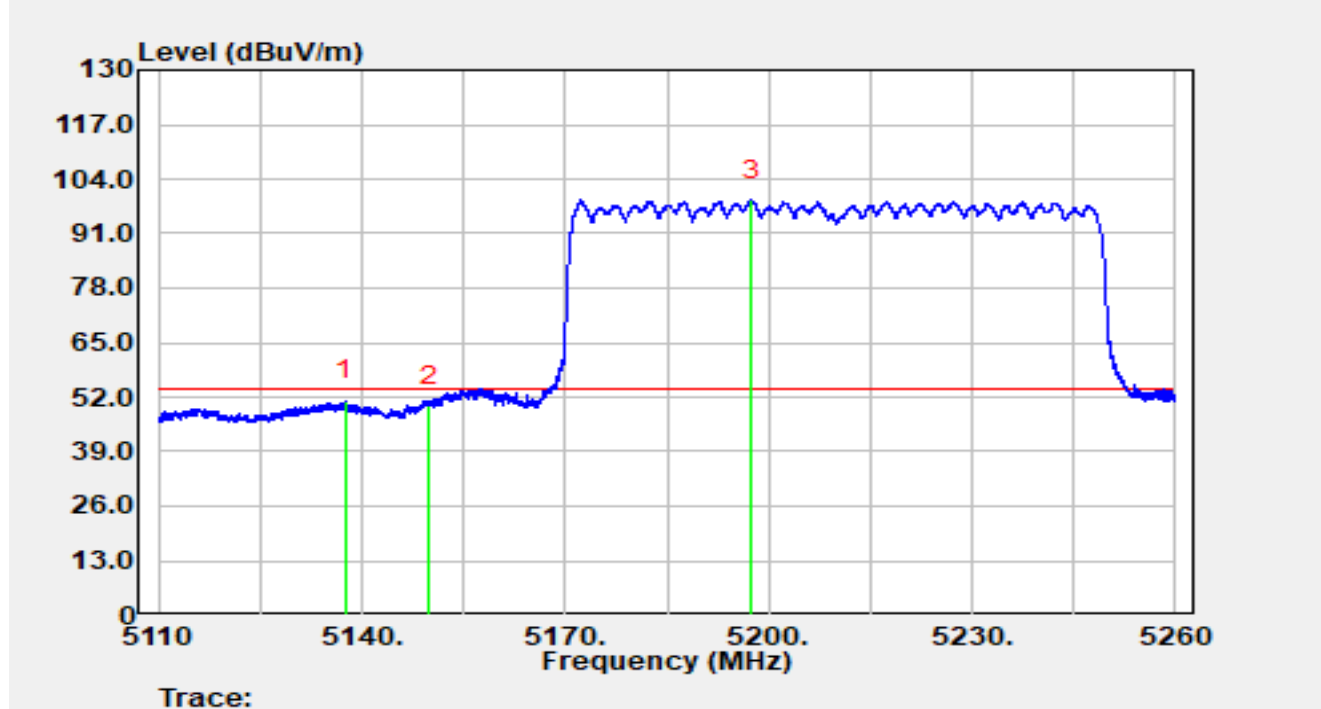


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5137.54         | 32.54          | 18.55      | 51.09                | -2.91       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.37          | 18.52      | 49.89                | -4.11       | 54.00          | Average  |
| 3  |      | 5197.57         | 80.30          | 18.70      | 99.00                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5210 MHz |               |            |

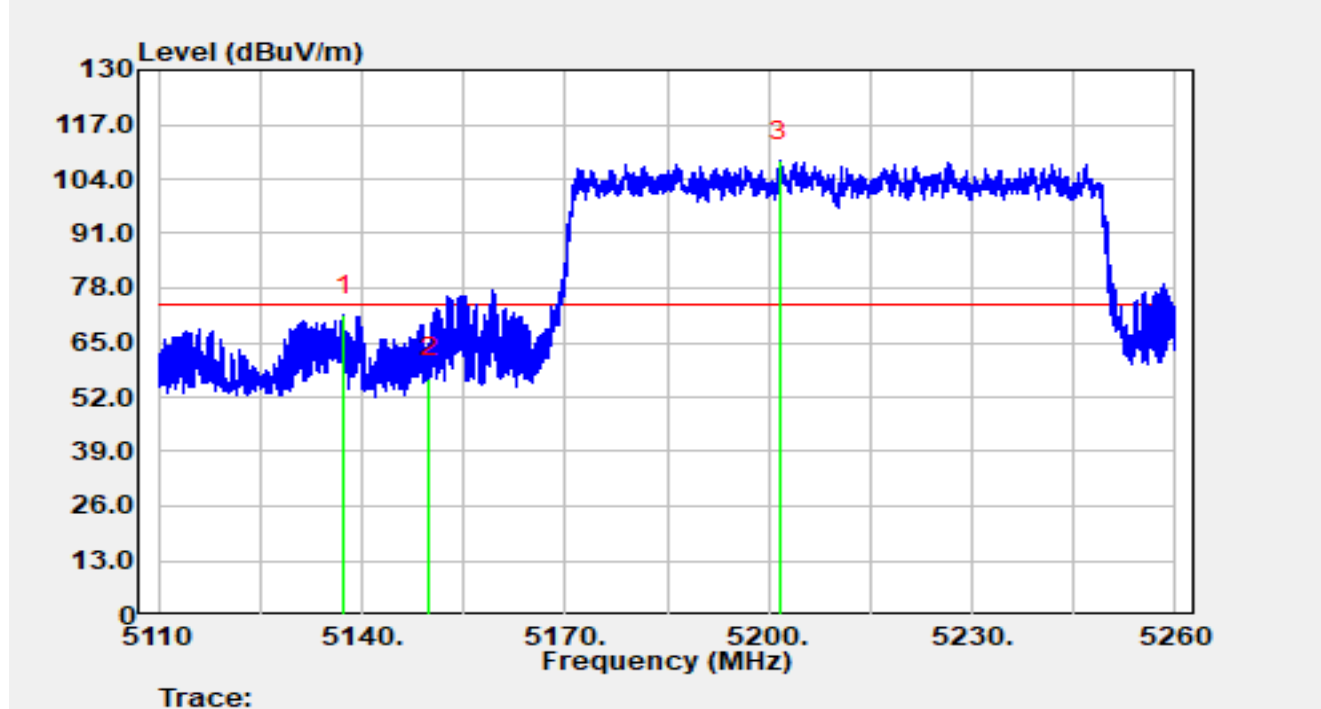


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5137.27         | 52.96          | 18.55      | 71.52                | -2.49       | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.14          | 18.52      | 56.66                | -17.34      | 74.00          | Peak     |
| 3  |      | 5201.68         | 89.71          | 18.66      | 108.37               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5210 MHz |               |            |

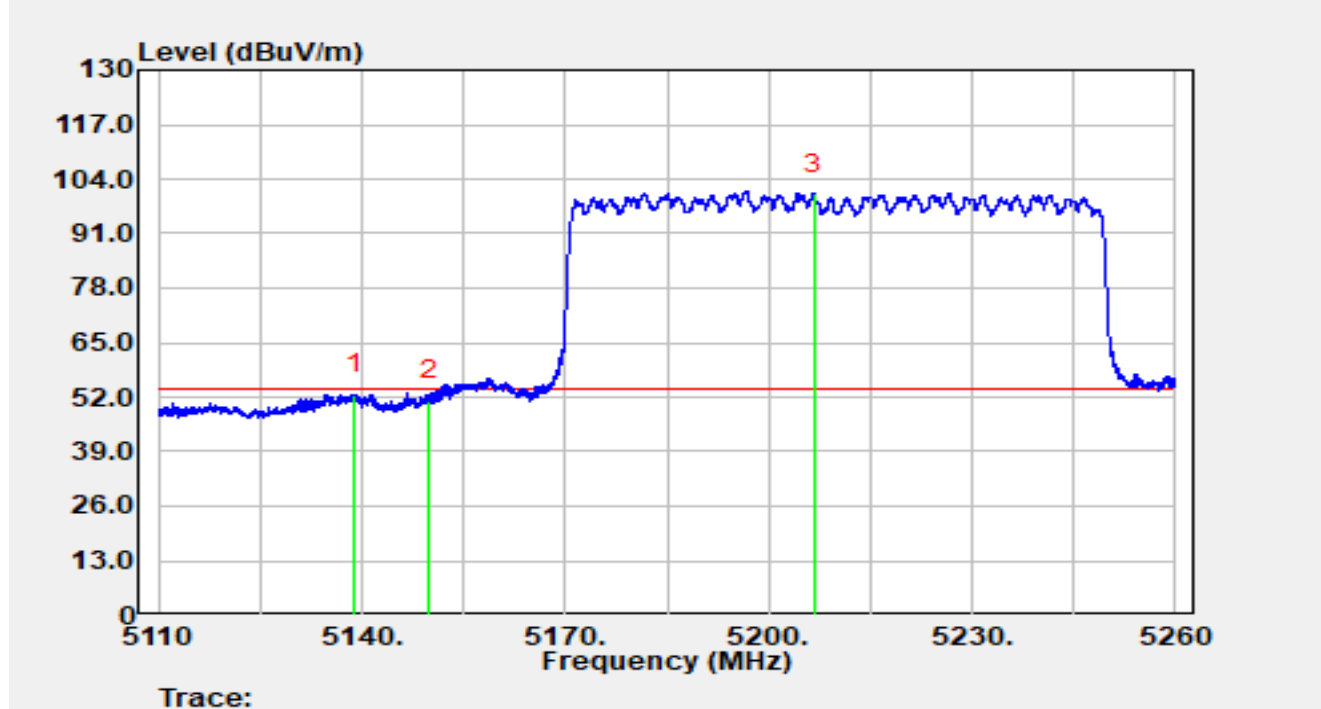


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5138.89         | 34.12          | 18.55      | 52.67                | -1.33       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.66          | 18.52      | 51.18                | -2.82       | 54.00          | Average  |
| 3  |      | 5206.63         | 81.92          | 18.58      | 100.50               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5290 MHz |               |            |

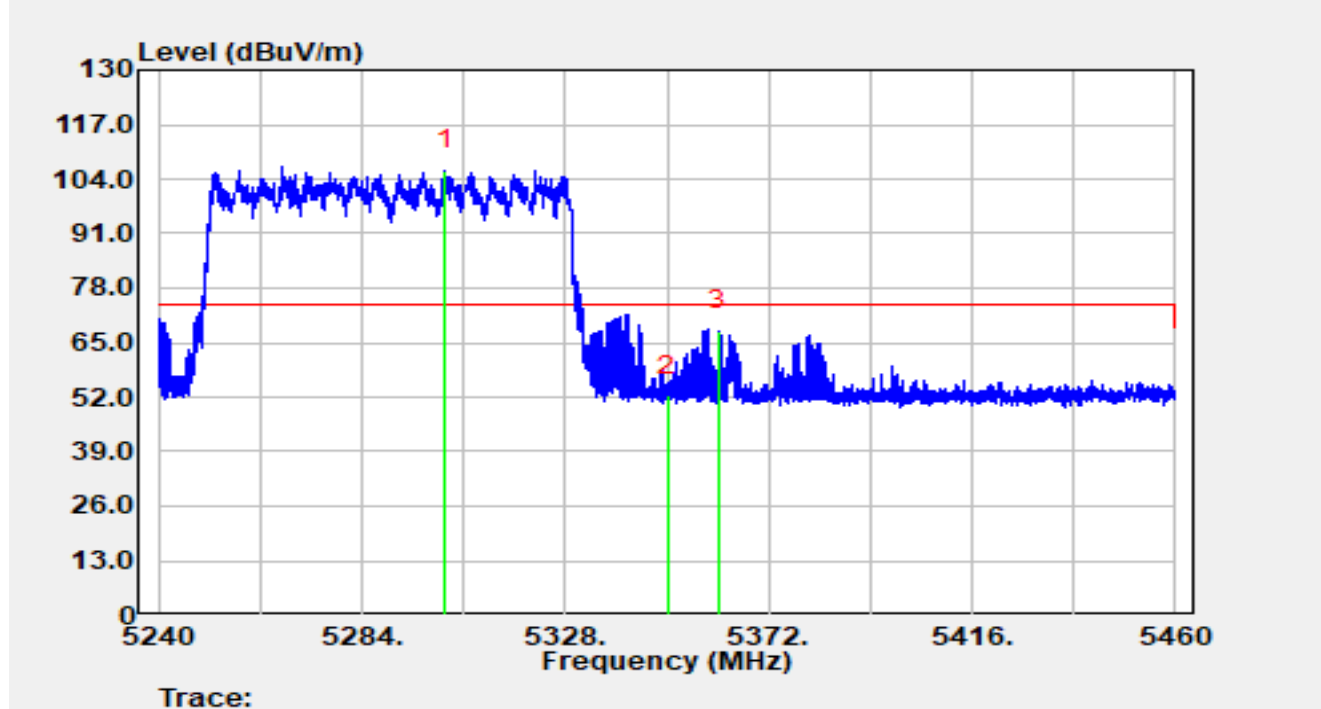


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5301.95         | 87.39          | 18.66      | 106.04               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 33.59          | 18.82      | 52.41                | -21.59      | 74.00          | Peak     |
| 3  | *    | 5361.04         | 49.01          | 18.94      | 67.94                | -6.06       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3°C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5290 MHz |               |            |

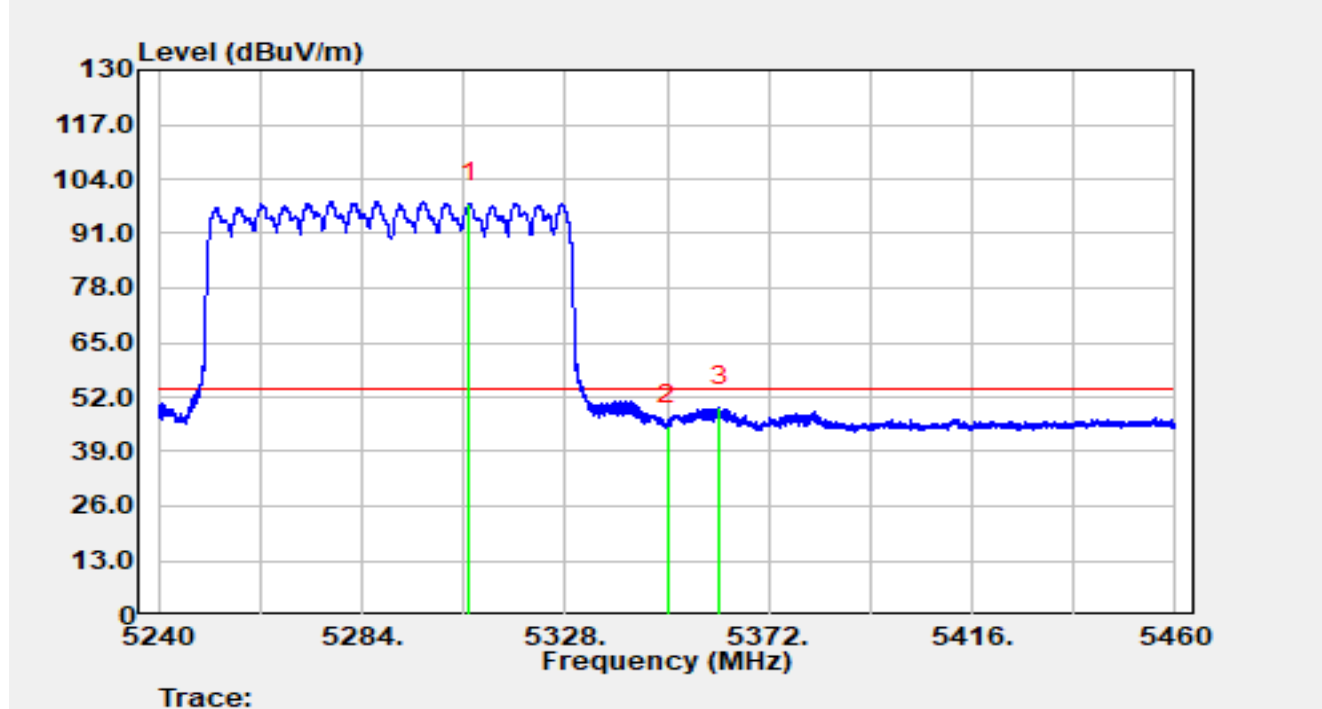


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5307.10         | 79.63          | 18.61      | 98.24                | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 26.45          | 18.82      | 45.27                | -8.73       | 54.00          | Average  |
| 3  | *    | 5361.33         | 30.71          | 18.94      | 49.65                | -4.35       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5290 MHz |               |            |

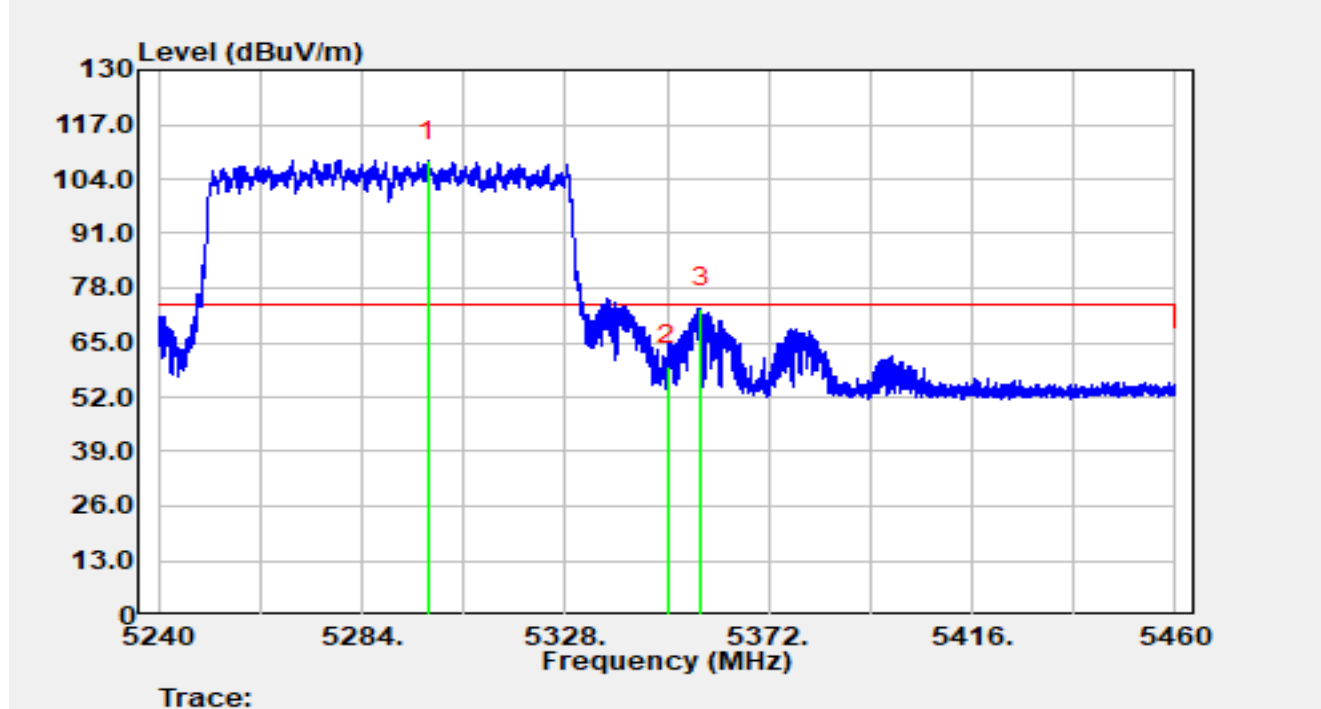


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5298.21         | 89.60          | 18.70      | 108.30               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 40.66          | 18.82      | 59.48                | -14.52      | 74.00          | Peak     |
| 3  | *    | 5357.35         | 54.28          | 18.92      | 73.20                | -0.80       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5290 MHz |               |            |

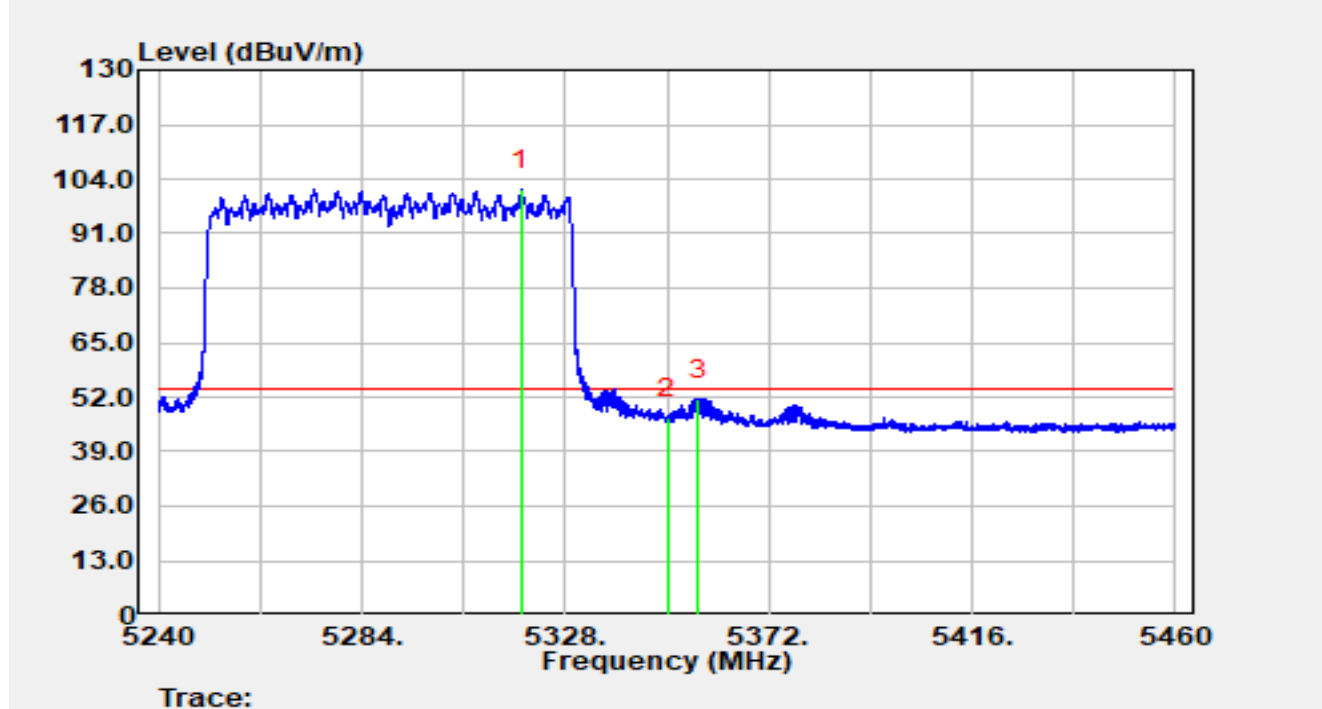


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5318.54         | 82.95          | 18.59      | 101.54               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 28.25          | 18.82      | 47.07                | -6.93       | 54.00          | Average  |
| 3  | *    | 5356.86         | 32.53          | 18.92      | 51.45                | -2.55       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5530 MHz |               |            |

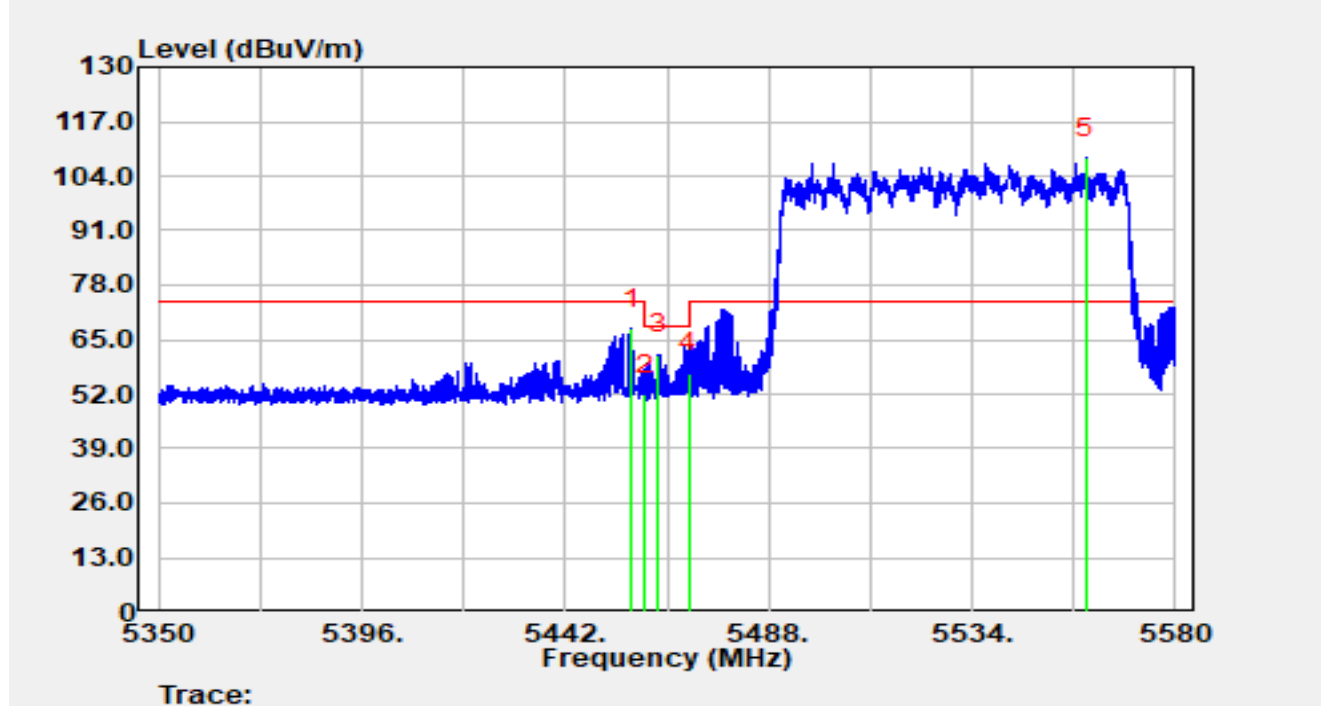


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.02         | 48.49          | 19.11      | 67.60                | -6.40       | 74.00          | Peak     |
| 2  |      | 5460.00         | 32.85          | 19.12      | 51.97                | -16.23      | 68.20          | Peak     |
| 3  |      | 5463.18         | 42.38          | 19.10      | 61.48                | -6.72       | 68.20          | Peak     |
| 4  |      | 5470.00         | 37.95          | 19.02      | 56.97                | -11.23      | 68.20          | Peak     |
| 5  |      | 5559.74         | 89.15          | 19.11      | 108.25               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5530 MHz |               |            |

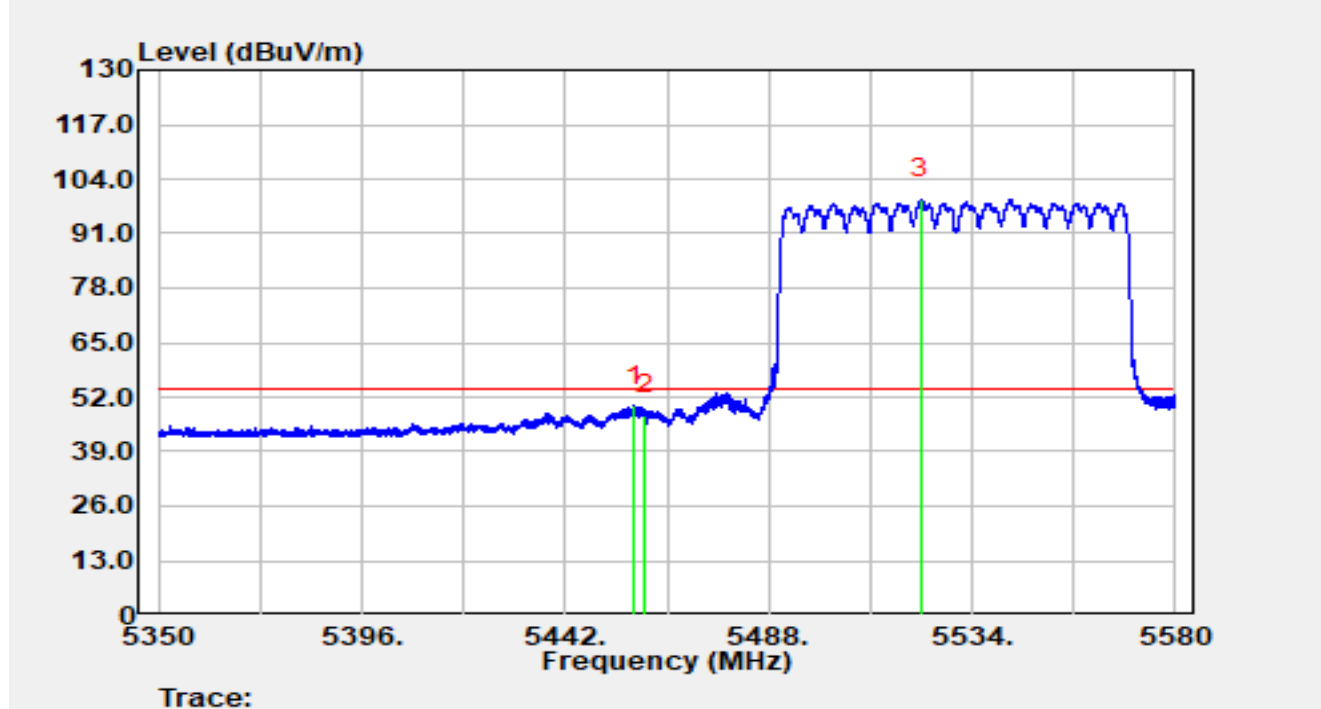


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.73         | 30.82          | 19.11      | 49.93                | -4.07       | 54.00          | Average  |
| 2  |      | 5460.00         | 28.64          | 19.12      | 47.75                | -6.25       | 54.00          | Average  |
| 3  |      | 5522.50         | 80.12          | 19.11      | 99.22                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5530 MHz |               |            |

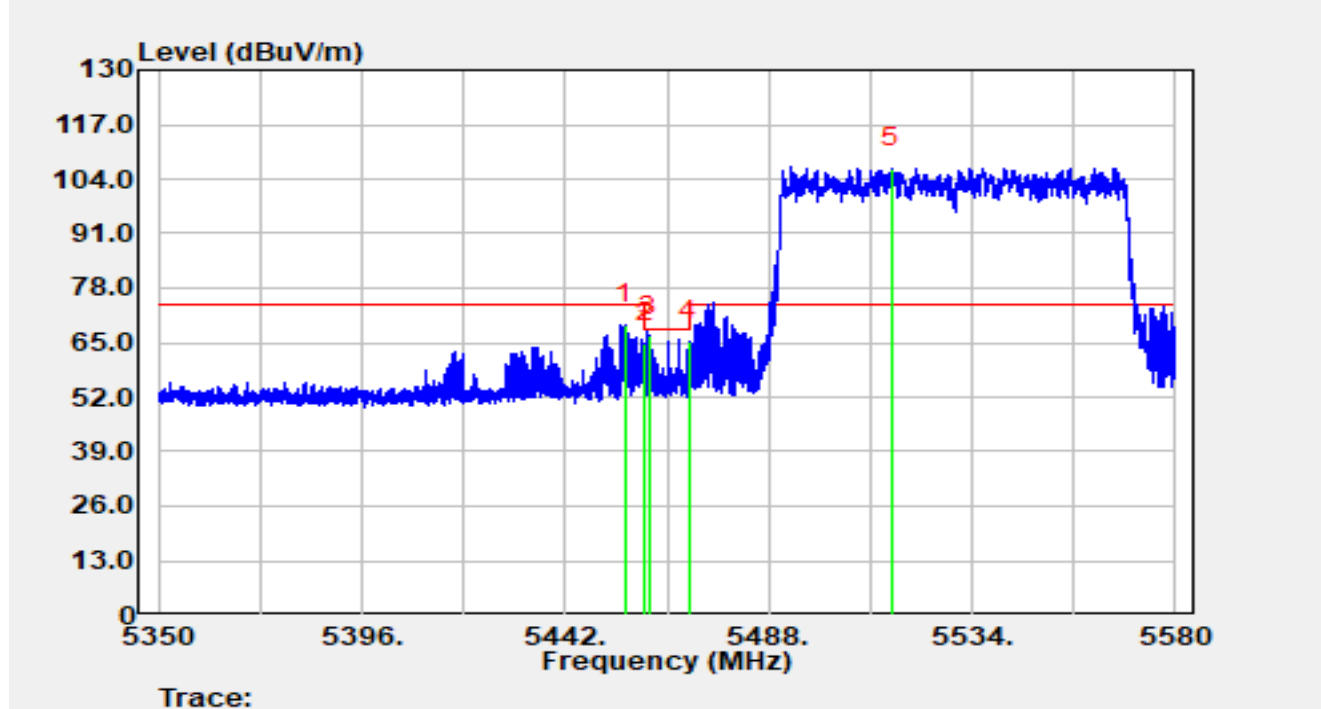


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5455.41         | 50.14          | 19.11      | 69.25                | -4.75       | 74.00          | Peak     |
| 2  |      | 5460.00         | 45.72          | 19.12      | 64.84                | -3.36       | 68.20          | Peak     |
| 3  | *    | 5460.95         | 47.44          | 19.12      | 66.56                | -1.64       | 68.20          | Peak     |
| 4  |      | 5470.00         | 46.44          | 19.02      | 65.47                | -2.73       | 68.20          | Peak     |
| 5  |      | 5515.78         | 87.64          | 19.01      | 106.65               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5530 MHz |               |            |

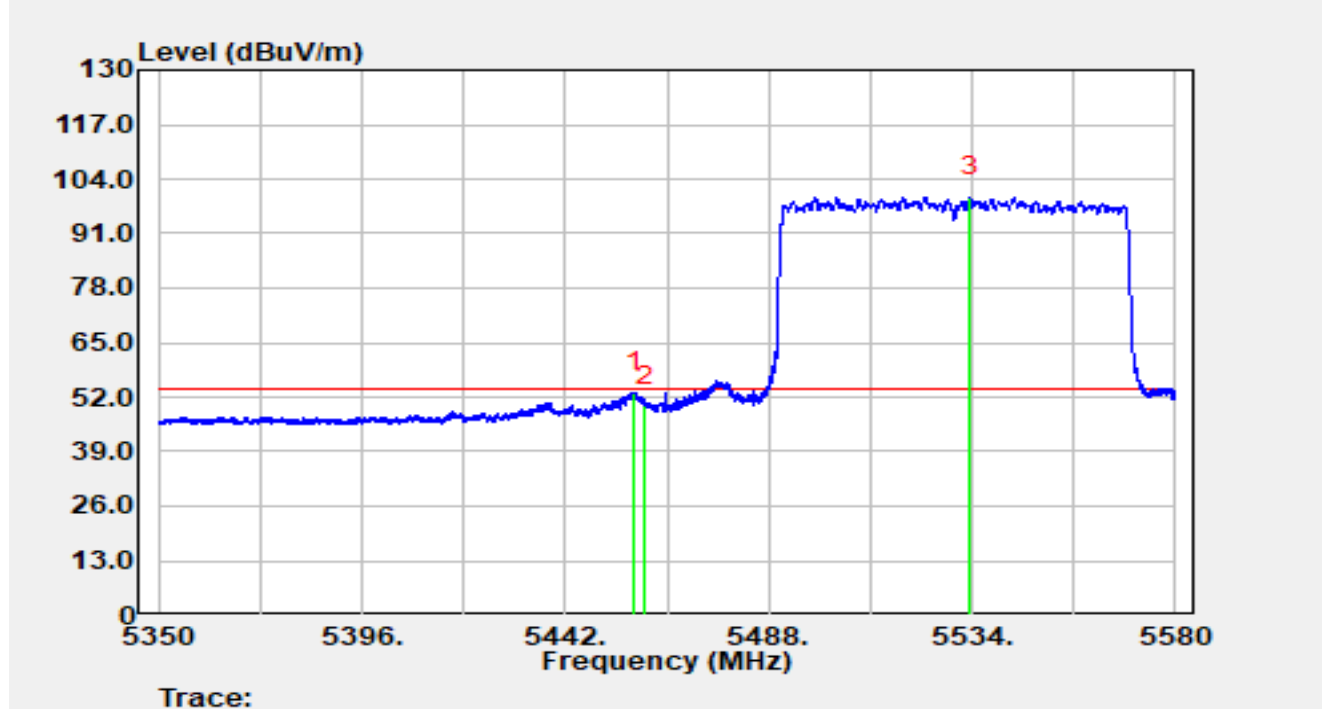


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.55         | 34.04          | 19.11      | 53.15                | -0.85       | 54.00          | Average  |
| 2  |      | 5460.00         | 30.72          | 19.12      | 49.84                | -4.16       | 54.00          | Average  |
| 3  |      | 5533.56         | 80.59          | 19.21      | 99.80                | N/A         | N/A            | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5610 MHz |               |            |

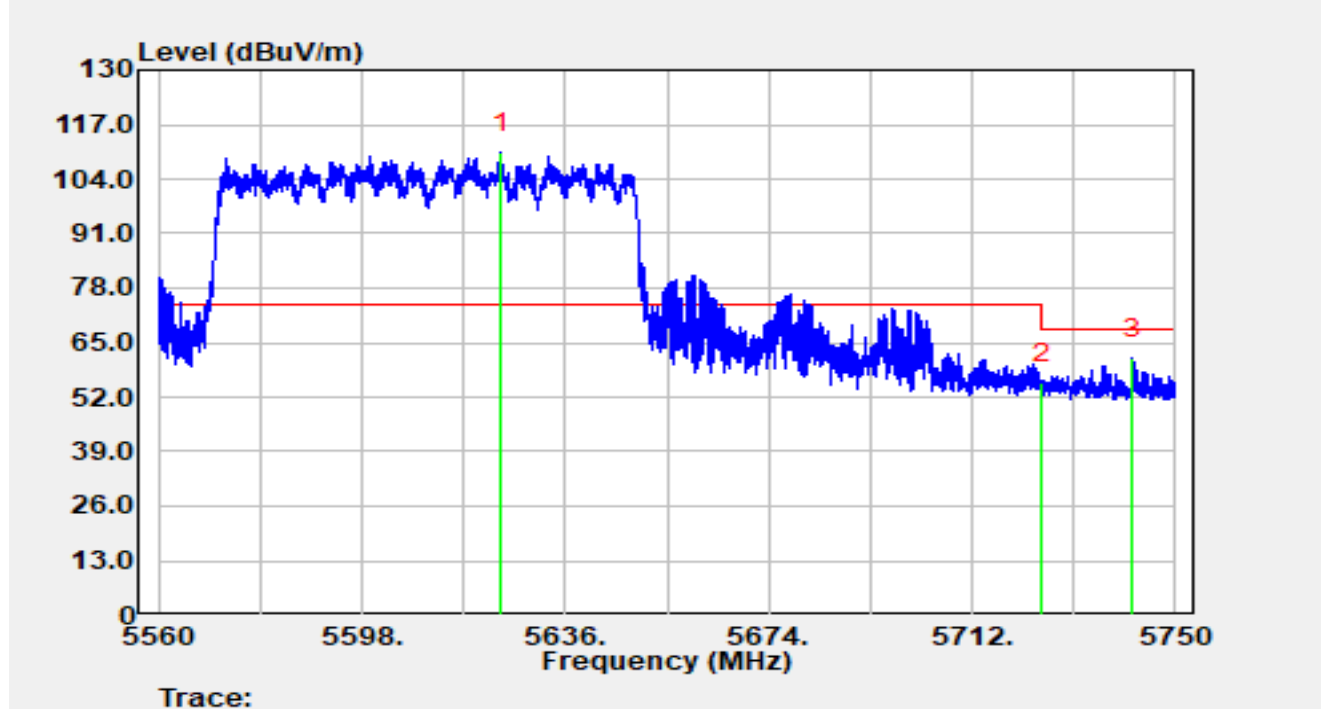


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5623.92         | 90.42          | 19.85      | 110.27               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 34.96          | 20.33      | 55.29                | -12.91      | 68.20          | Peak     |
| 3  | *    | 5741.89         | 41.10          | 20.13      | 61.24                | -6.96       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                       | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5610 MHz |               |            |

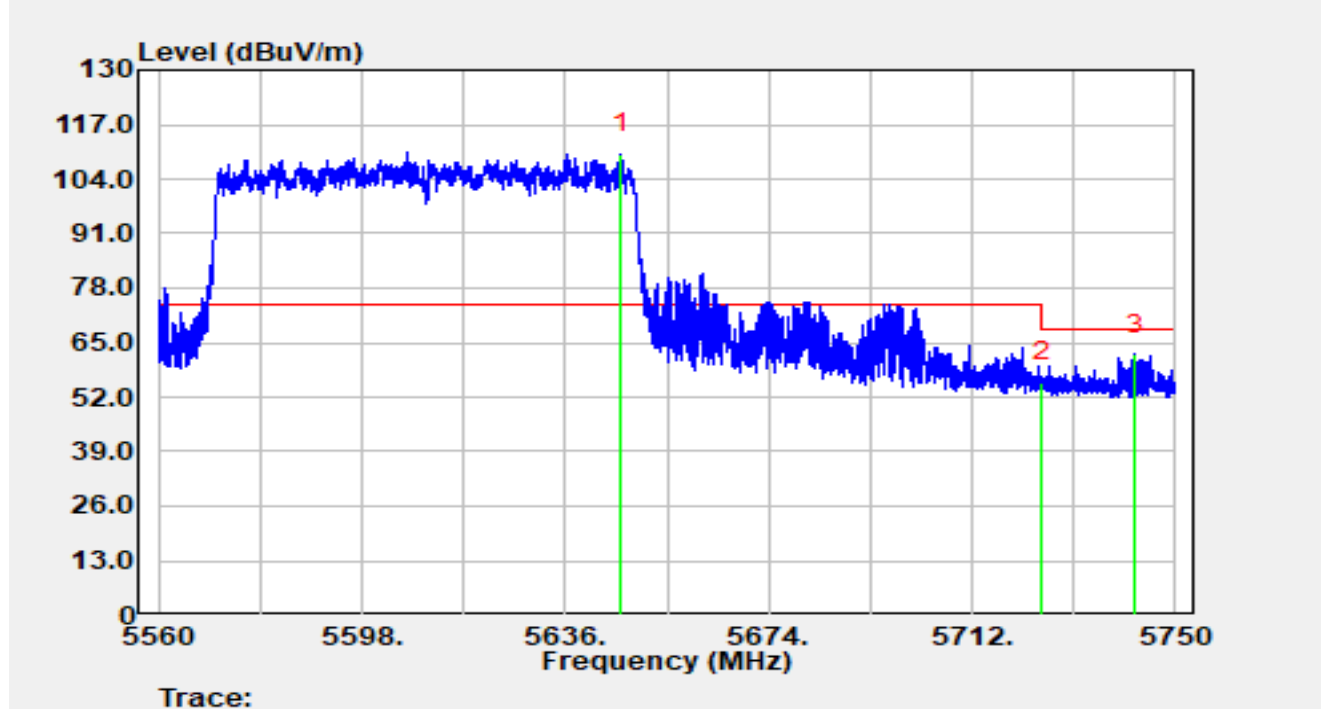


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5646.36         | 90.28          | 19.68      | 109.96               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 35.28          | 20.33      | 55.61                | -12.59      | 68.20          | Peak     |
| 3  | *    | 5742.53         | 42.13          | 20.12      | 62.26                | -5.94       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ax-HE80 at 5775 MHz |               |            |

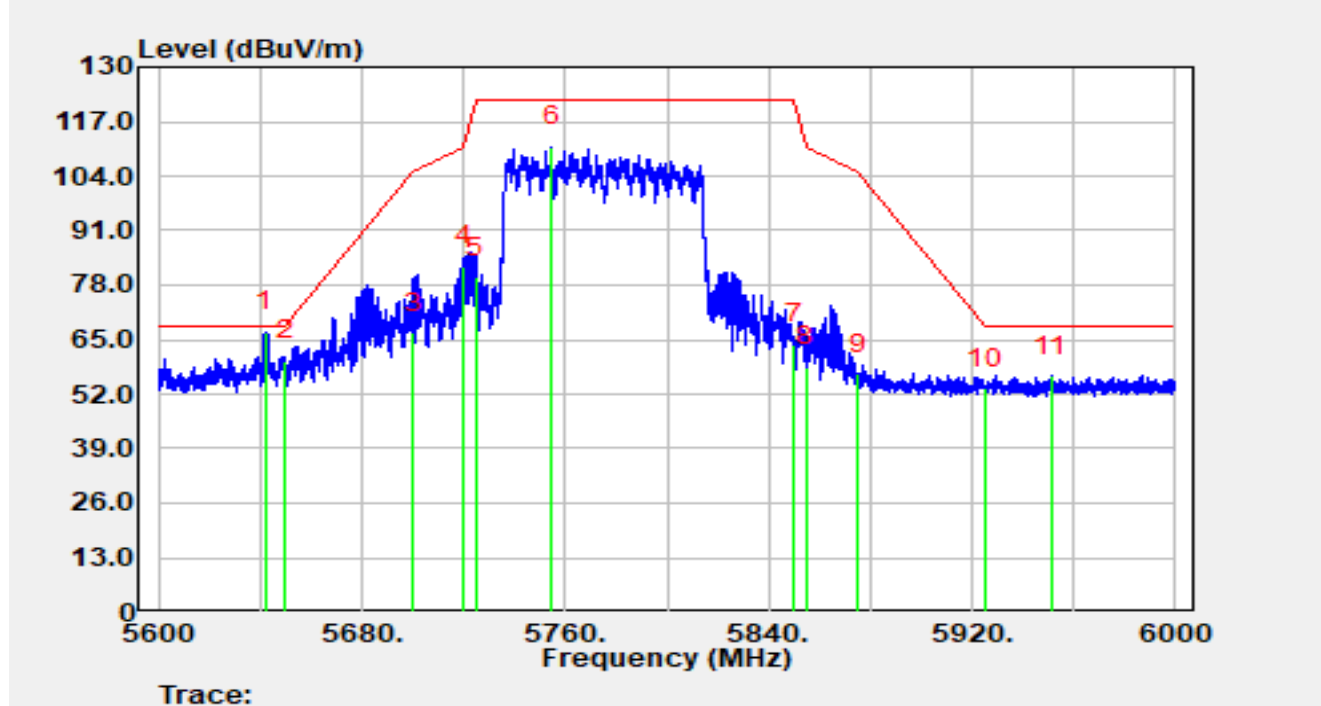


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5642.28         | 47.19          | 19.75      | 66.94                | -1.26       | 68.20          | Peak     |
| 2  |      | 5650.00         | 40.28          | 19.62      | 59.90                | -8.30       | 68.20          | Peak     |
| 3  |      | 5700.00         | 46.43          | 20.14      | 66.57                | -38.63      | 105.20         | Peak     |
| 4  |      | 5720.00         | 62.19          | 20.38      | 82.57                | -28.23      | 110.80         | Peak     |
| 5  |      | 5725.00         | 59.57          | 20.33      | 79.90                | -42.30      | 122.20         | Peak     |
| 6  |      | 5754.44         | 90.89          | 20.03      | 110.92               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 43.60          | 20.30      | 63.90                | -58.30      | 122.20         | Peak     |
| 8  |      | 5855.00         | 38.14          | 20.30      | 58.44                | -52.36      | 110.80         | Peak     |
| 9  |      | 5875.00         | 36.04          | 20.63      | 56.67                | -48.53      | 105.20         | Peak     |
| 10 |      | 5925.00         | 32.65          | 20.59      | 53.23                | -14.97      | 68.20          | Peak     |
| 11 |      | 5950.96         | 35.55          | 20.67      | 56.22                | -11.98      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                       |               |            |
|--------------|---------------------------------------|---------------|------------|
| Site         | WZ-AC2                                | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                               | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                     | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ax-HE80 at 5775 MHz |               |            |

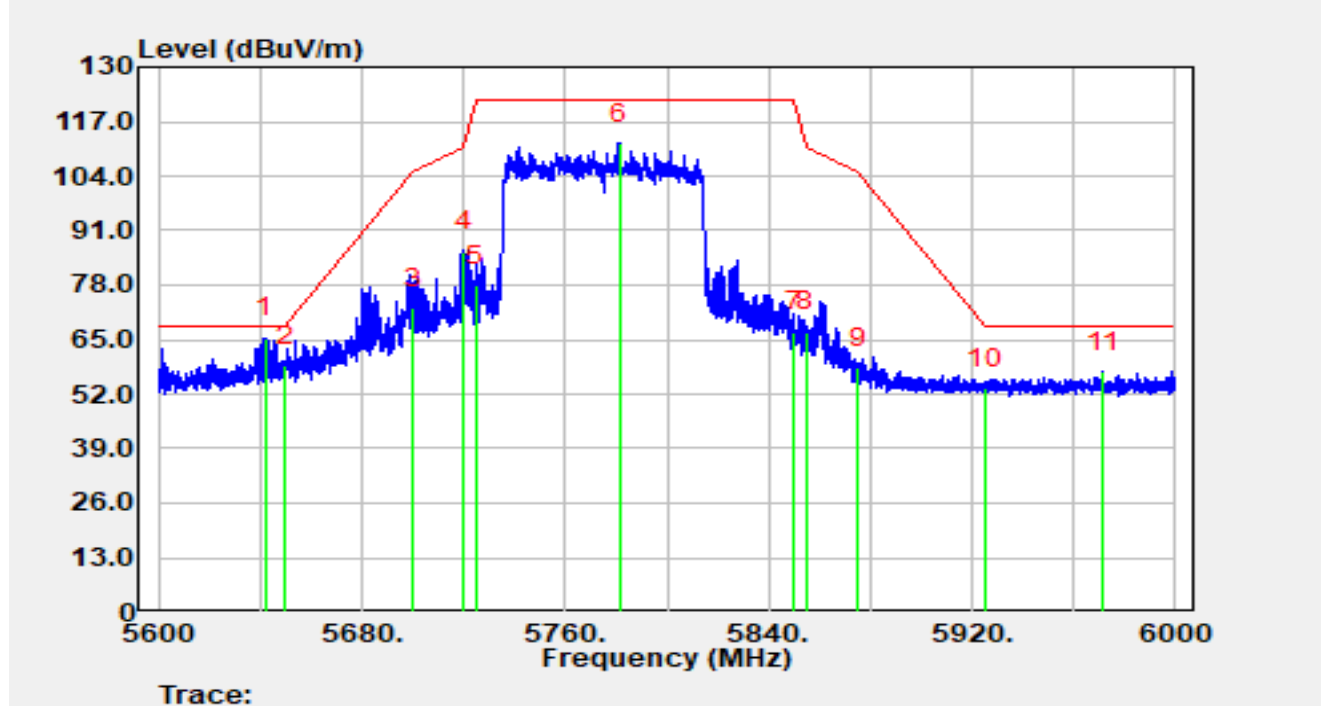


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5641.80         | 45.62          | 19.76      | 65.38                | -2.82       | 68.20          | Peak     |
| 2  |      | 5650.00         | 39.14          | 19.62      | 58.76                | -9.44       | 68.20          | Peak     |
| 3  |      | 5700.00         | 52.40          | 20.14      | 72.54                | -32.66      | 105.20         | Peak     |
| 4  |      | 5720.00         | 65.49          | 20.38      | 85.87                | -24.93      | 110.80         | Peak     |
| 5  |      | 5725.00         | 57.45          | 20.33      | 77.78                | -44.42      | 122.20         | Peak     |
| 6  |      | 5781.16         | 91.27          | 20.38      | 111.65               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 46.54          | 20.30      | 66.84                | -55.36      | 122.20         | Peak     |
| 8  |      | 5855.00         | 46.61          | 20.30      | 66.91                | -43.89      | 110.80         | Peak     |
| 9  |      | 5875.00         | 37.55          | 20.63      | 58.18                | -47.02      | 105.20         | Peak     |
| 10 |      | 5925.00         | 32.71          | 20.59      | 53.30                | -14.90      | 68.20          | Peak     |
| 11 |      | 5971.48         | 36.30          | 20.87      | 57.17                | -11.03      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5180 MHz |               |            |

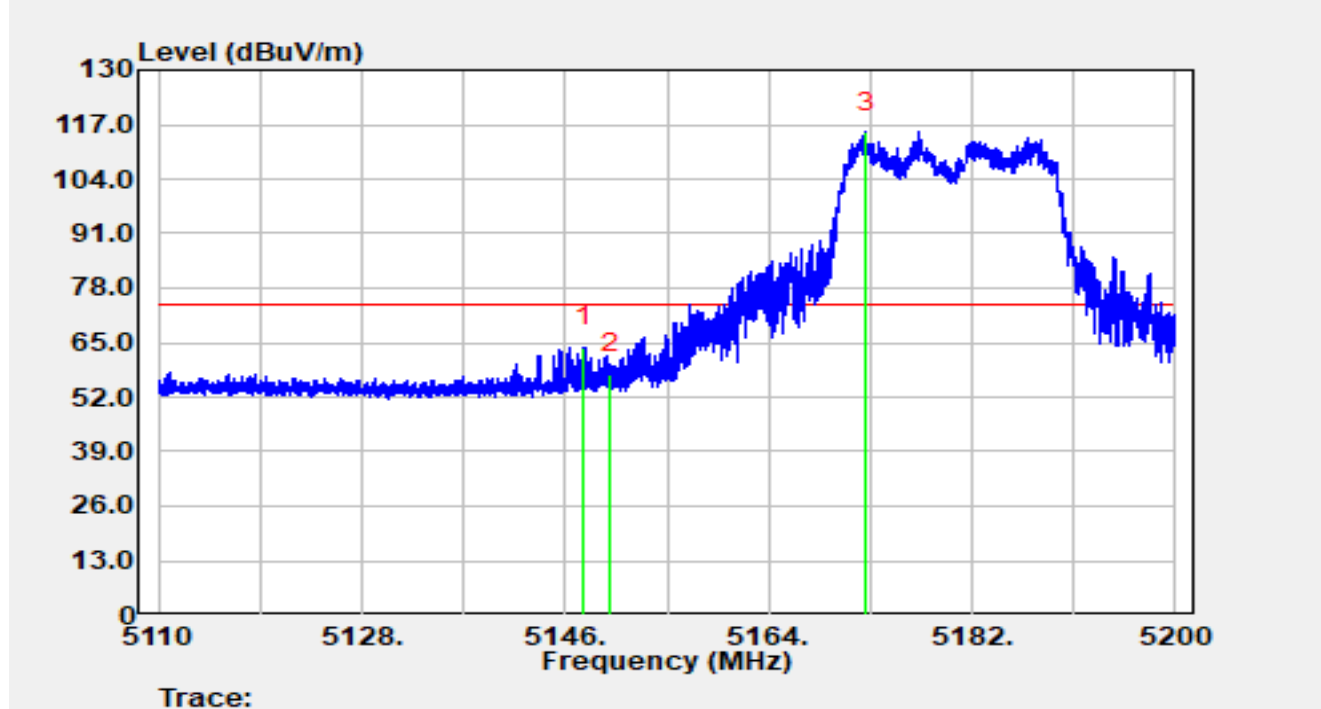


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.68         | 45.40          | 18.53      | 63.92                | -10.08      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.99          | 18.52      | 57.51                | -16.49      | 74.00          | Peak     |
| 3  |      | 5172.59         | 96.39          | 18.79      | 115.19               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5180 MHz |               |            |

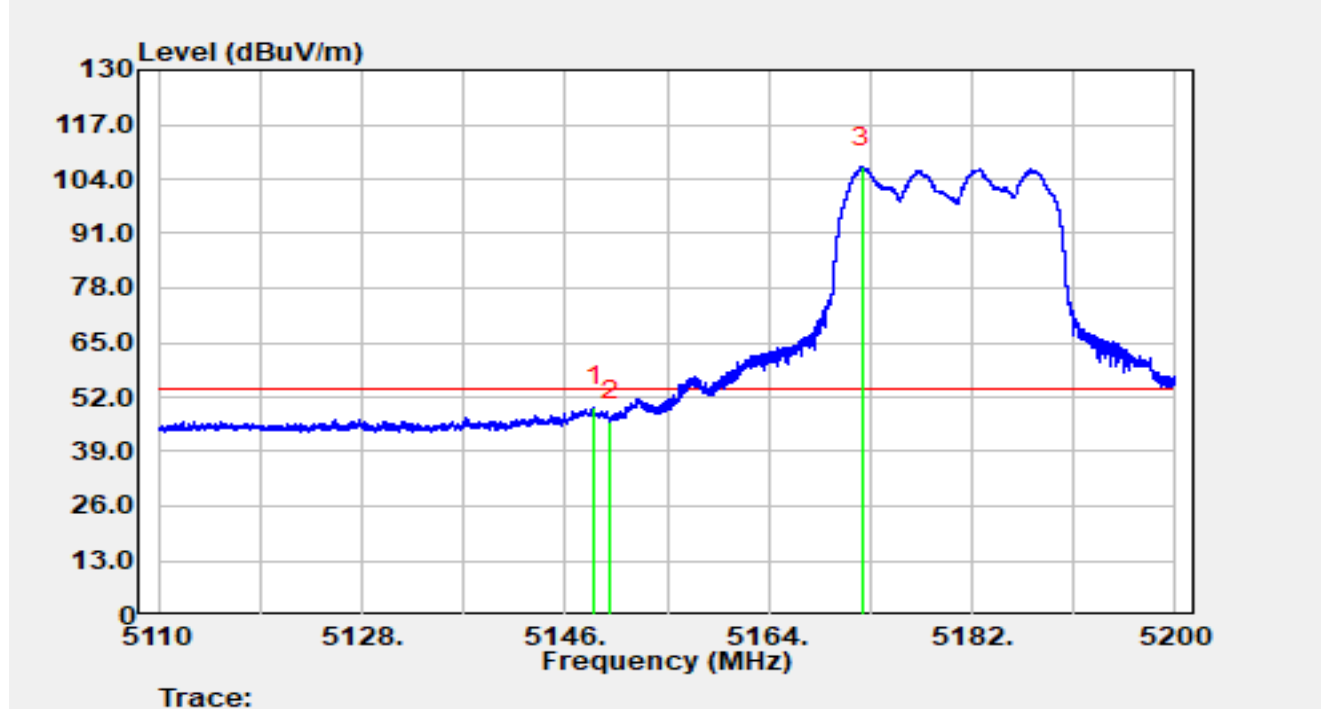


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.55         | 31.08          | 18.52      | 49.60                | -4.40       | 54.00          | Average  |
| 2  |      | 5150.00         | 27.83          | 18.52      | 46.34                | -7.66       | 54.00          | Average  |
| 3  |      | 5172.24         | 88.11          | 18.79      | 106.91               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5180 MHz |               |            |

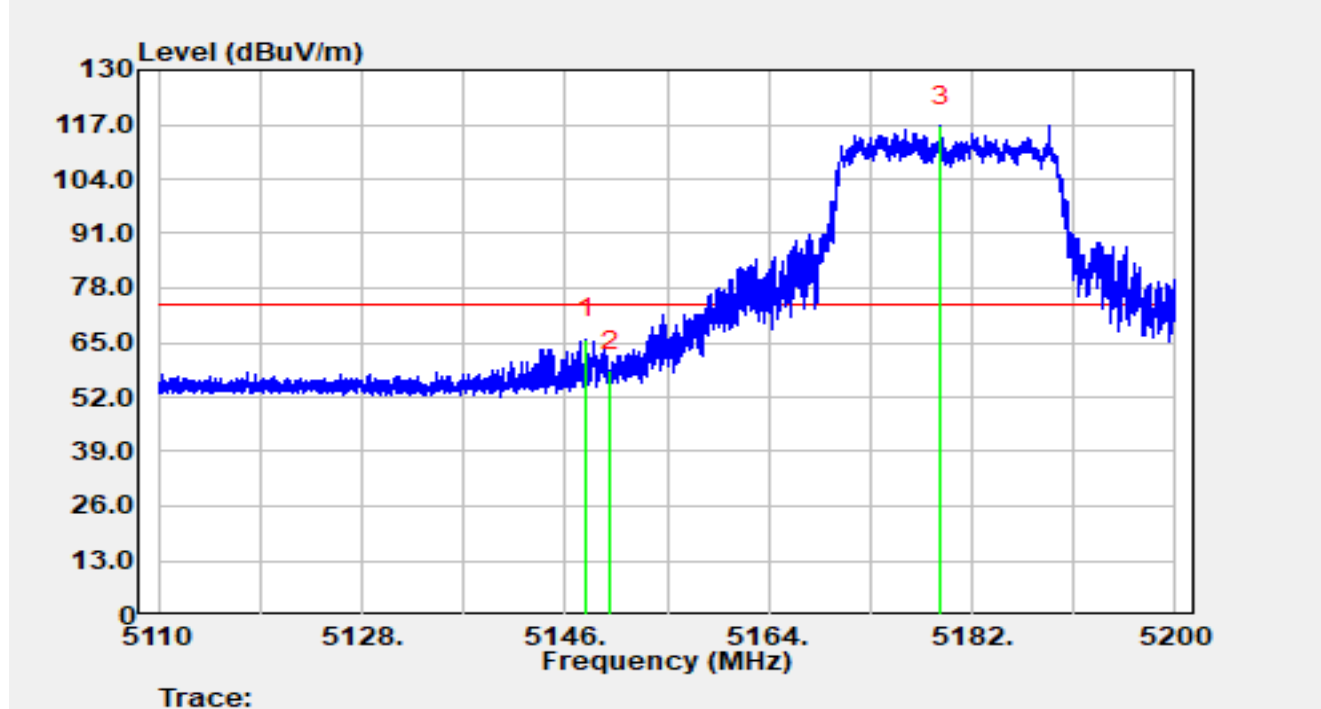


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5147.87         | 47.36          | 18.52      | 65.88                | -8.12       | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.65          | 18.52      | 58.17                | -15.83      | 74.00          | Peak     |
| 3  |      | 5179.26         | 97.93          | 18.81      | 116.74               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5180 MHz |               |            |

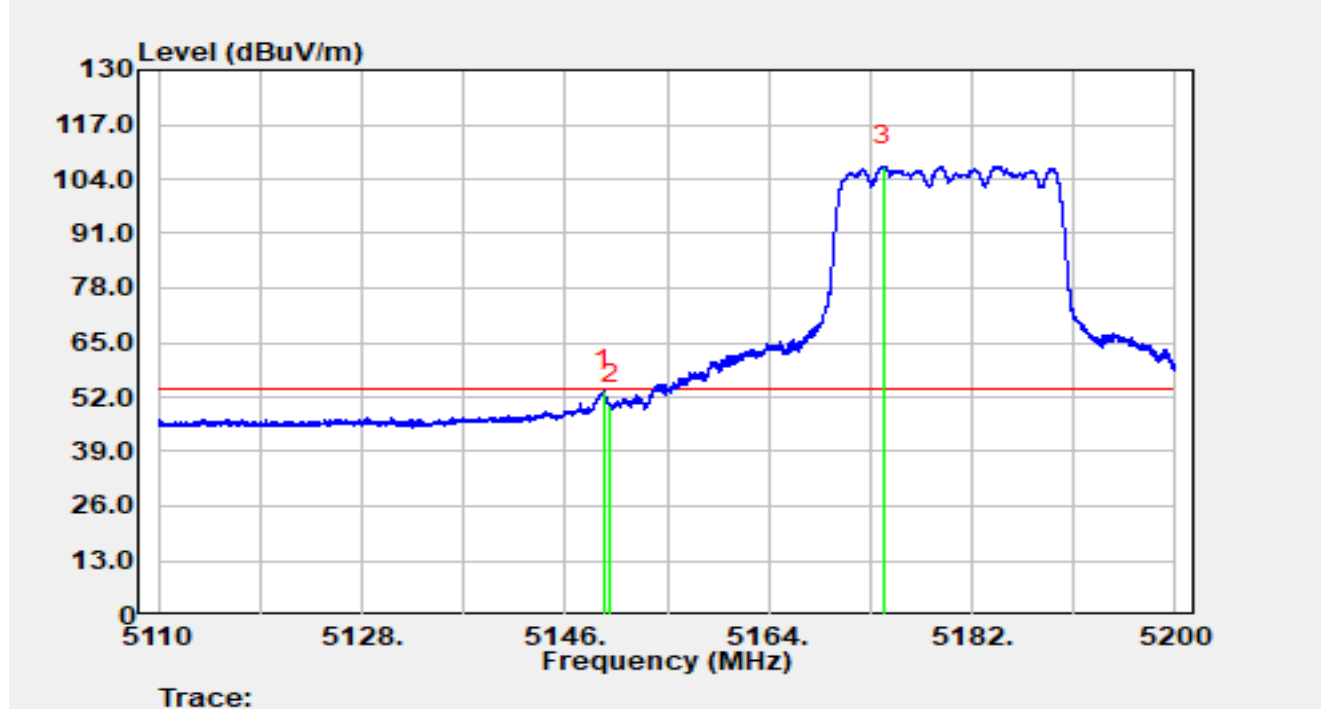


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.41         | 35.04          | 18.52      | 53.56                | -0.44       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.59          | 18.52      | 50.11                | -3.89       | 54.00          | Average  |
| 3  |      | 5174.11         | 88.19          | 18.80      | 106.99               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5320 MHz |               |            |

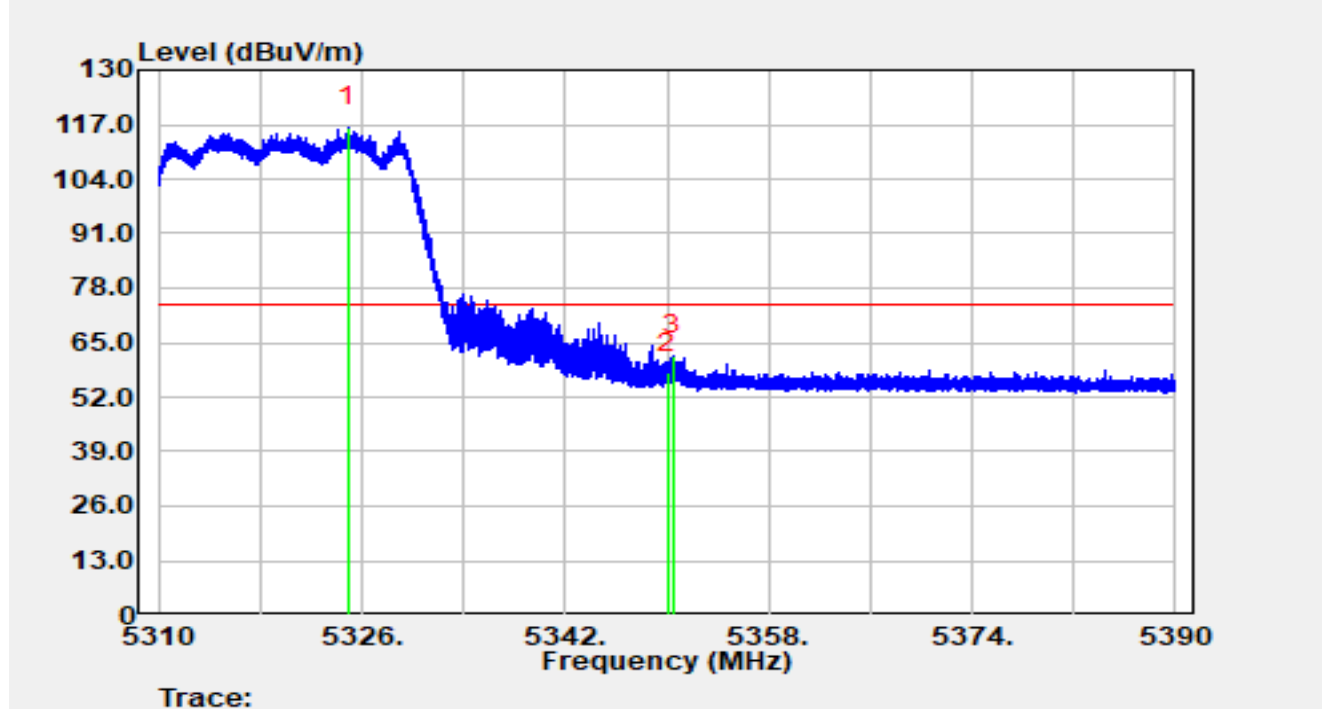


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5324.93         | 97.83          | 18.59      | 116.42               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 39.04          | 18.82      | 57.86                | -16.14      | 74.00          | Peak     |
| 3  | *    | 5350.47         | 43.08          | 18.83      | 61.90                | -12.10      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5320 MHz |               |            |

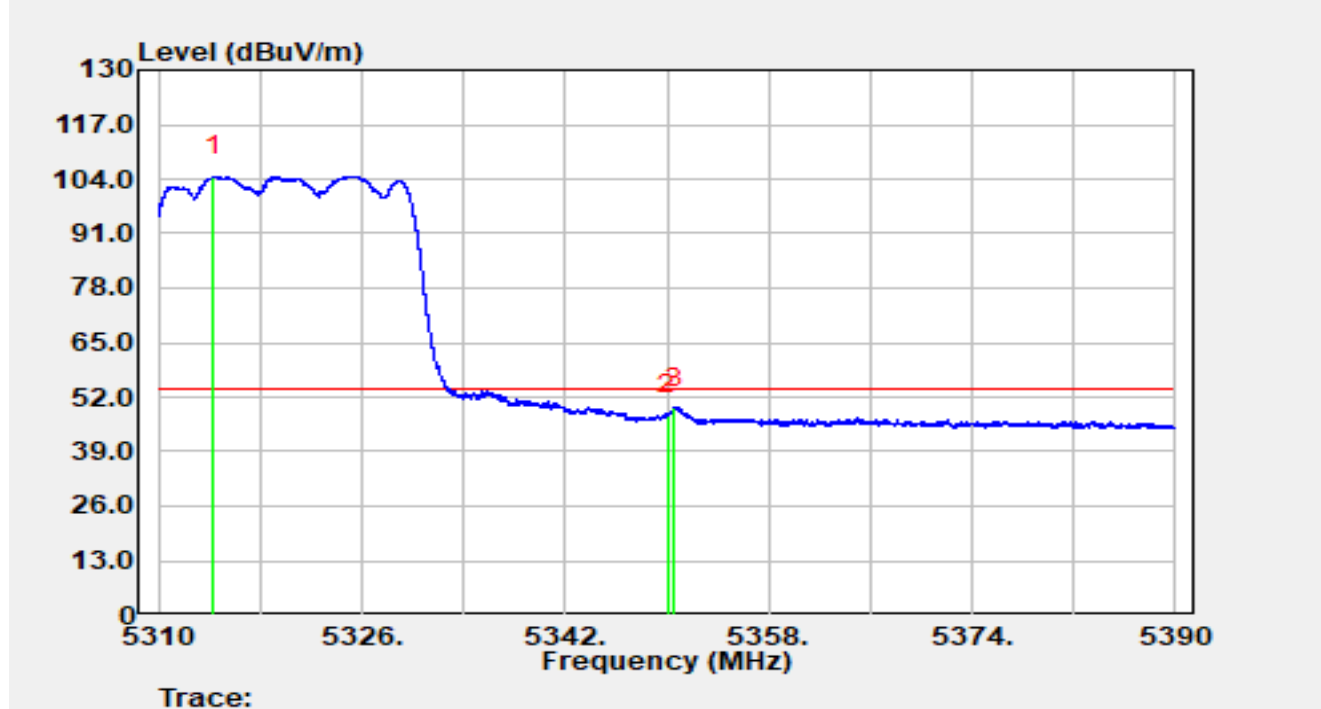


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5314.37         | 86.05          | 18.61      | 104.66               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 28.92          | 18.82      | 47.74                | -6.26       | 54.00          | Average  |
| 3  | *    | 5350.62         | 30.61          | 18.83      | 49.44                | -4.56       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5320 MHz |               |            |

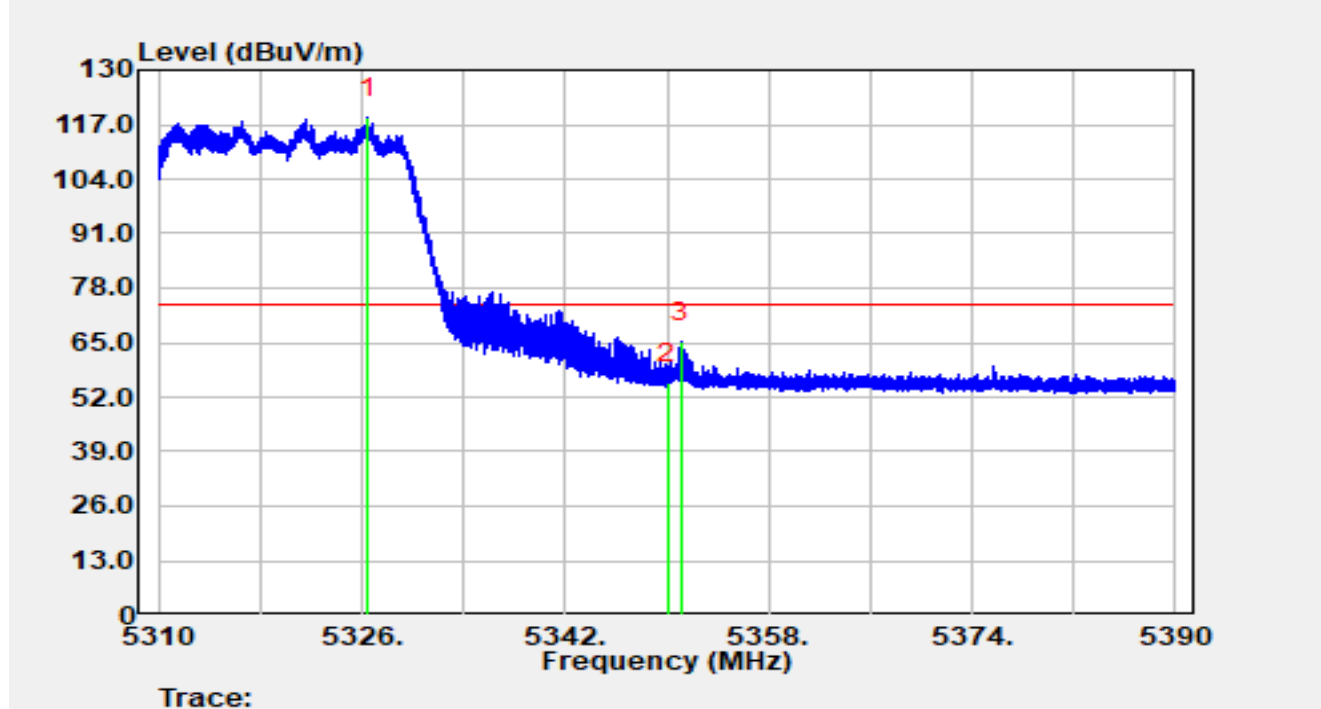


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5326.45         | 99.87          | 18.62      | 118.49               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 36.57          | 18.82      | 55.39                | -18.61      | 74.00          | Peak     |
| 3  | *    | 5351.11         | 46.38          | 18.84      | 65.22                | -8.78       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5320 MHz |               |            |

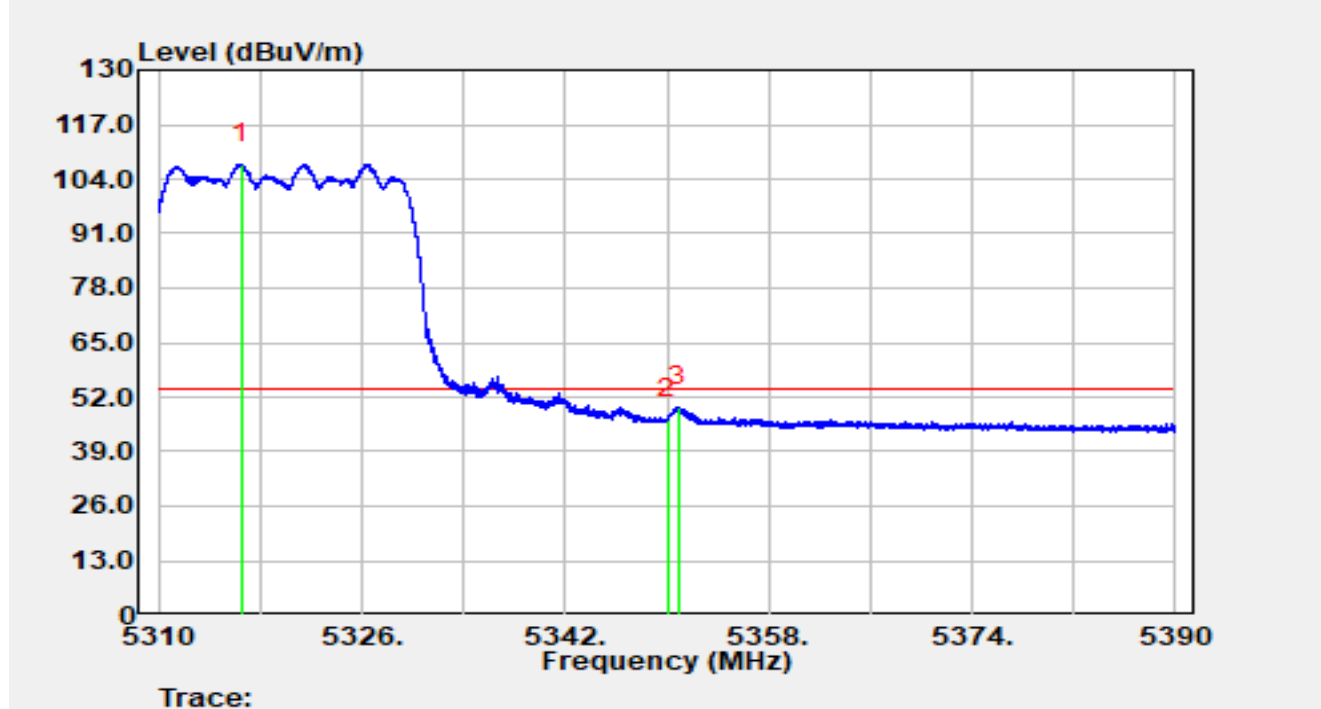


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5316.54         | 88.89          | 18.60      | 107.48               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 27.94          | 18.82      | 46.76                | -7.24       | 54.00          | Average  |
| 3  | *    | 5350.86         | 30.86          | 18.83      | 49.70                | -4.30       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5500 MHz |               |            |

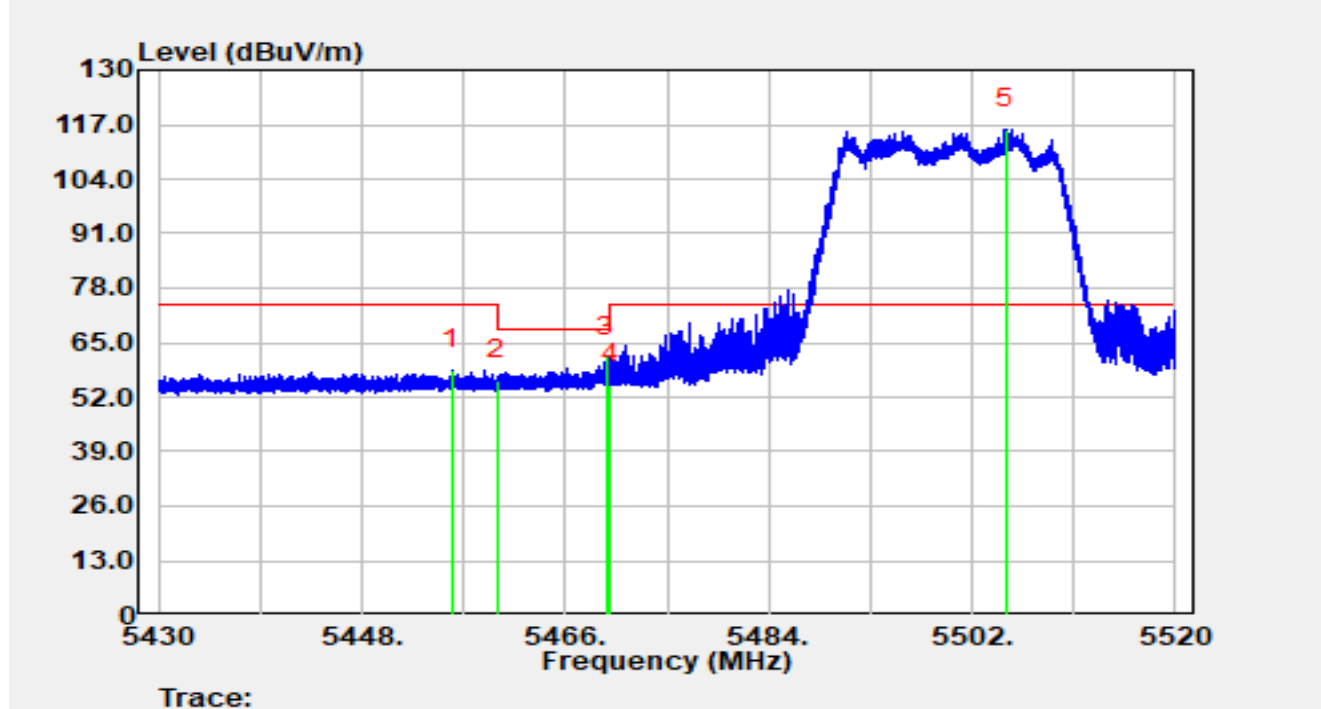


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5455.95         | 39.48          | 19.11      | 58.60                | -15.40      | 74.00          | Peak     |
| 2  |      | 5460.00         | 36.99          | 19.12      | 56.11                | -12.09      | 68.20          | Peak     |
| 3  | *    | 5469.68         | 42.57          | 19.03      | 61.59                | -6.61       | 68.20          | Peak     |
| 4  |      | 5470.00         | 36.14          | 19.02      | 55.16                | -13.04      | 68.20          | Peak     |
| 5  |      | 5504.94         | 96.96          | 18.92      | 115.89               | N/A         | N/A            | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5500 MHz |               |            |

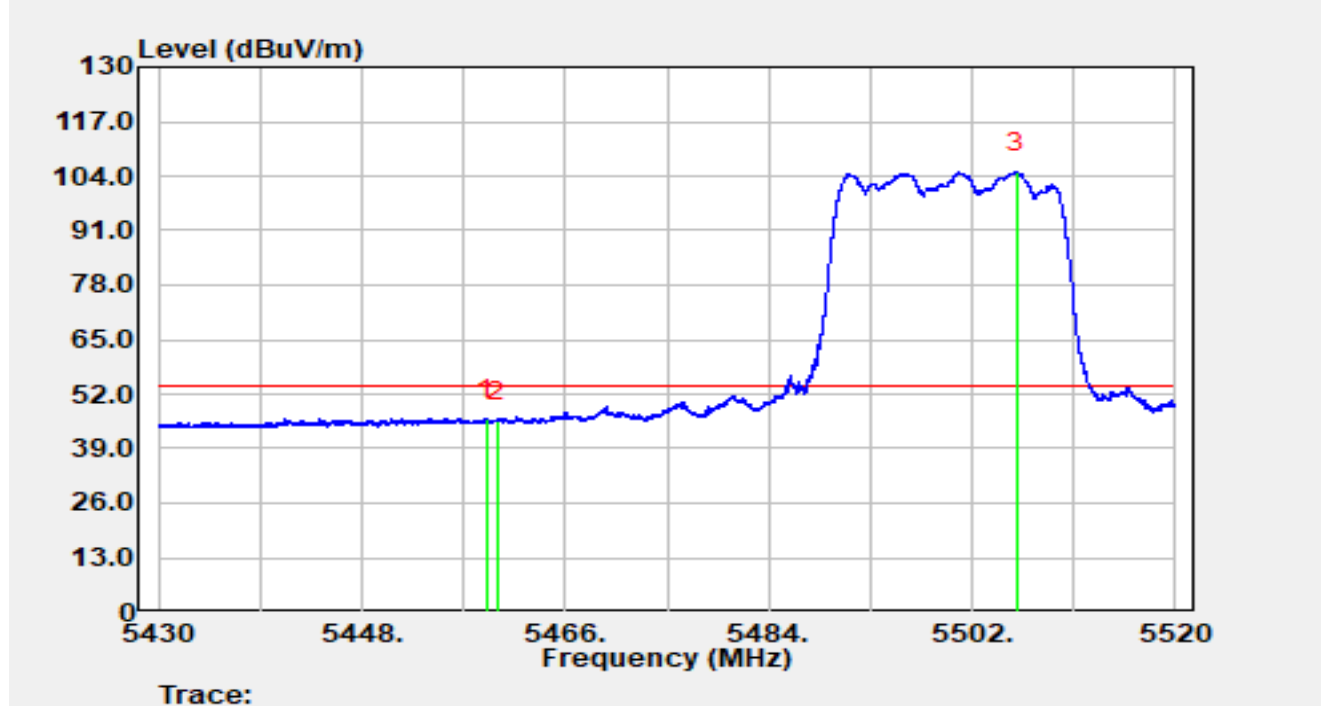


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.00         | 26.90          | 19.12      | 46.02                | -7.98       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.37          | 19.12      | 45.49                | -8.51       | 54.00          | Average  |
| 3  |      | 5506.00         | 85.92          | 18.93      | 104.85               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5500 MHz |               |            |

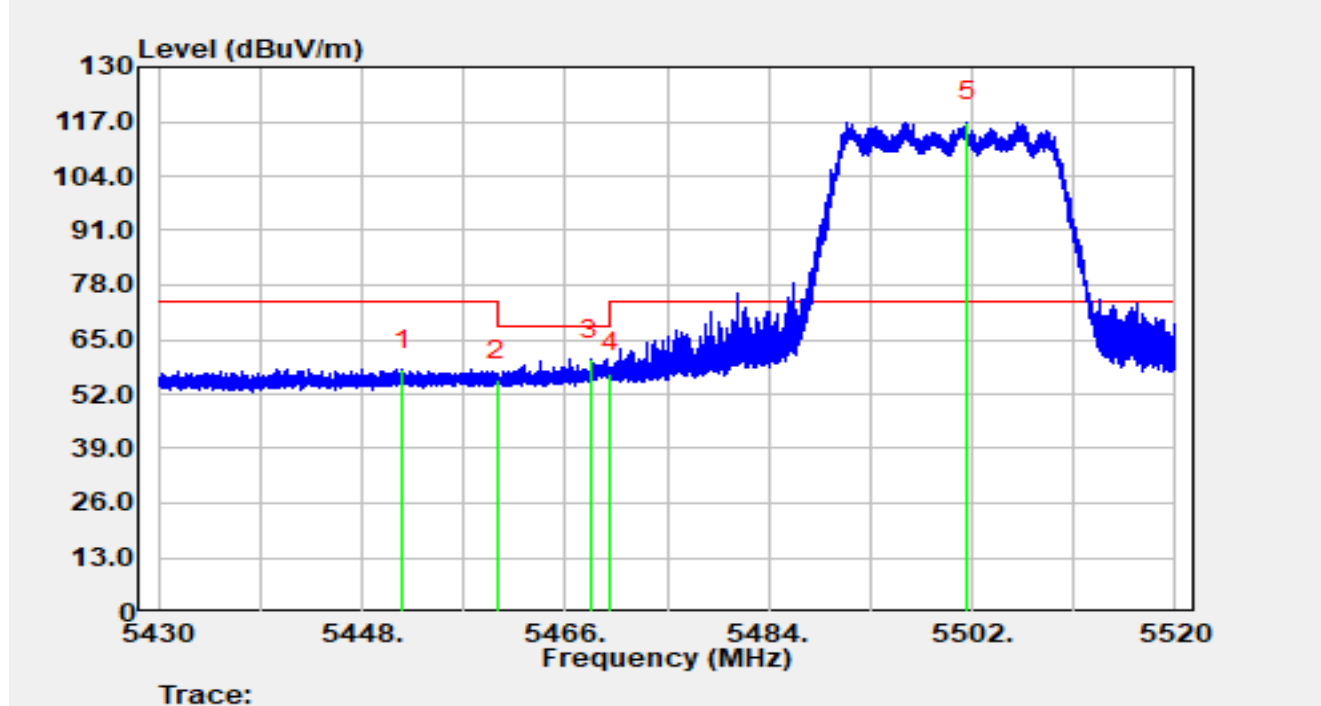


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5451.58         | 38.72          | 19.12      | 57.84                | -16.16      | 74.00          | Peak     |
| 2  |      | 5460.00         | 36.29          | 19.12      | 55.41                | -12.79      | 68.20          | Peak     |
| 3  | *    | 5468.19         | 41.24          | 19.04      | 60.28                | -7.92       | 68.20          | Peak     |
| 4  |      | 5470.00         | 38.03          | 19.02      | 57.05                | -11.15      | 68.20          | Peak     |
| 5  |      | 5501.59         | 98.00          | 18.90      | 116.90               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5500 MHz |               |            |

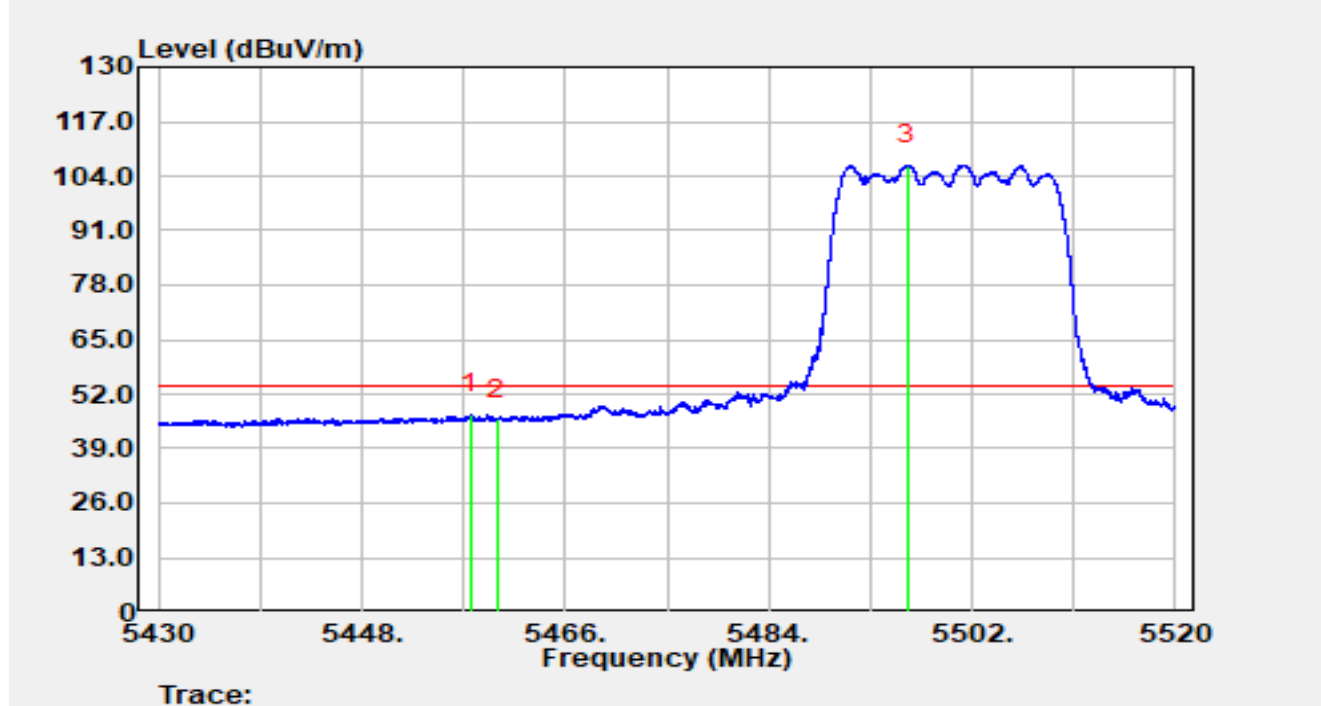


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5457.65         | 27.99          | 19.11      | 47.10                | -6.90       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.81          | 19.12      | 45.93                | -8.07       | 54.00          | Average  |
| 3  |      | 5496.27         | 87.80          | 18.86      | 106.66               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5700 MHz |               |            |

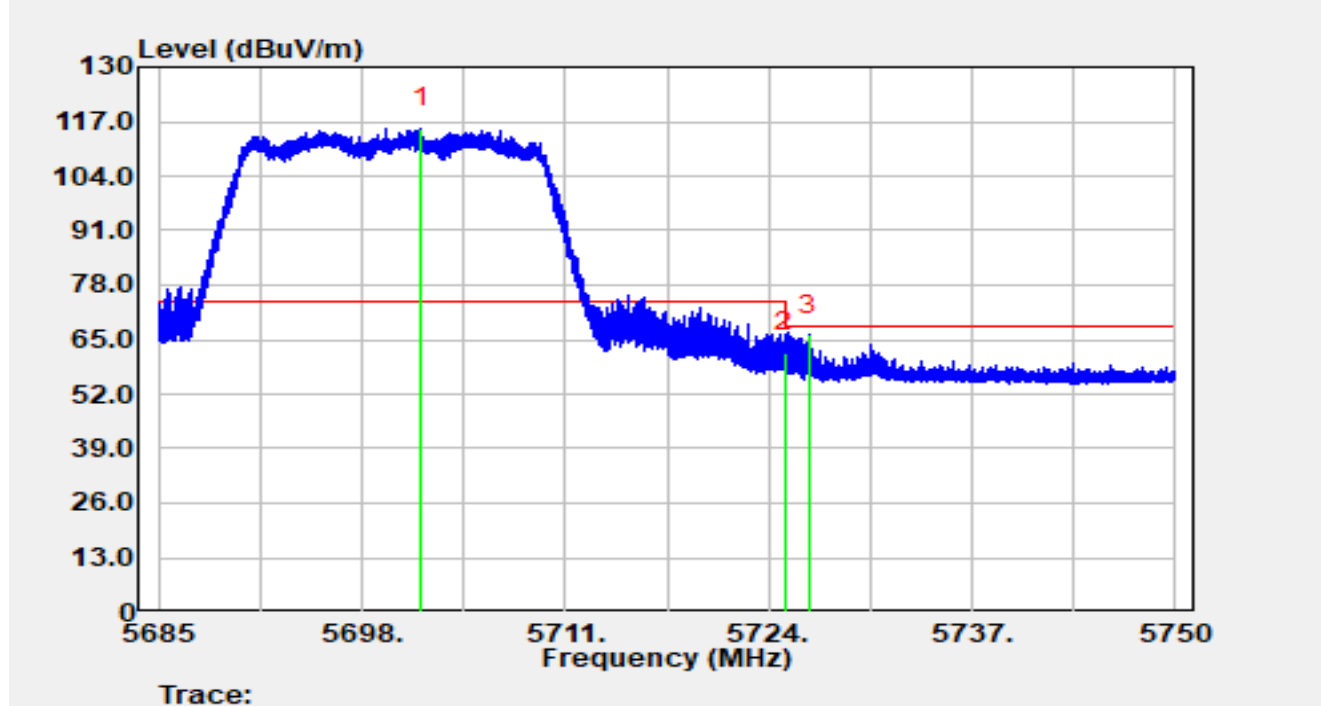


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5701.77         | 95.18          | 20.19      | 115.38               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 41.67          | 20.33      | 62.00                | -6.20       | 68.20          | Peak     |
| 3  | *    | 5726.60         | 45.89          | 20.31      | 66.20                | -2.00       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5700 MHz |               |            |

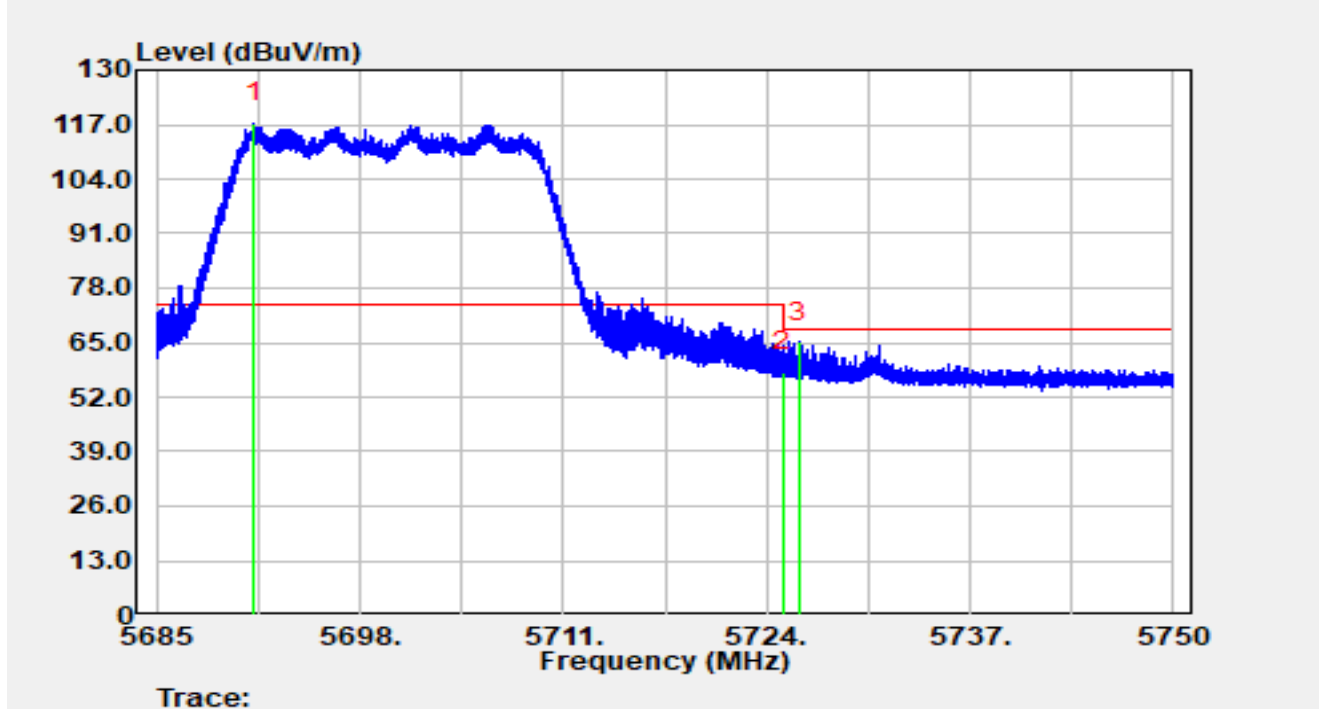


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5691.23         | 97.38          | 19.89      | 117.27               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 37.68          | 20.33      | 58.00                | -10.20      | 68.20          | Peak     |
| 3  | *    | 5726.08         | 44.71          | 20.32      | 65.03                | -3.17       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5745 MHz |               |            |

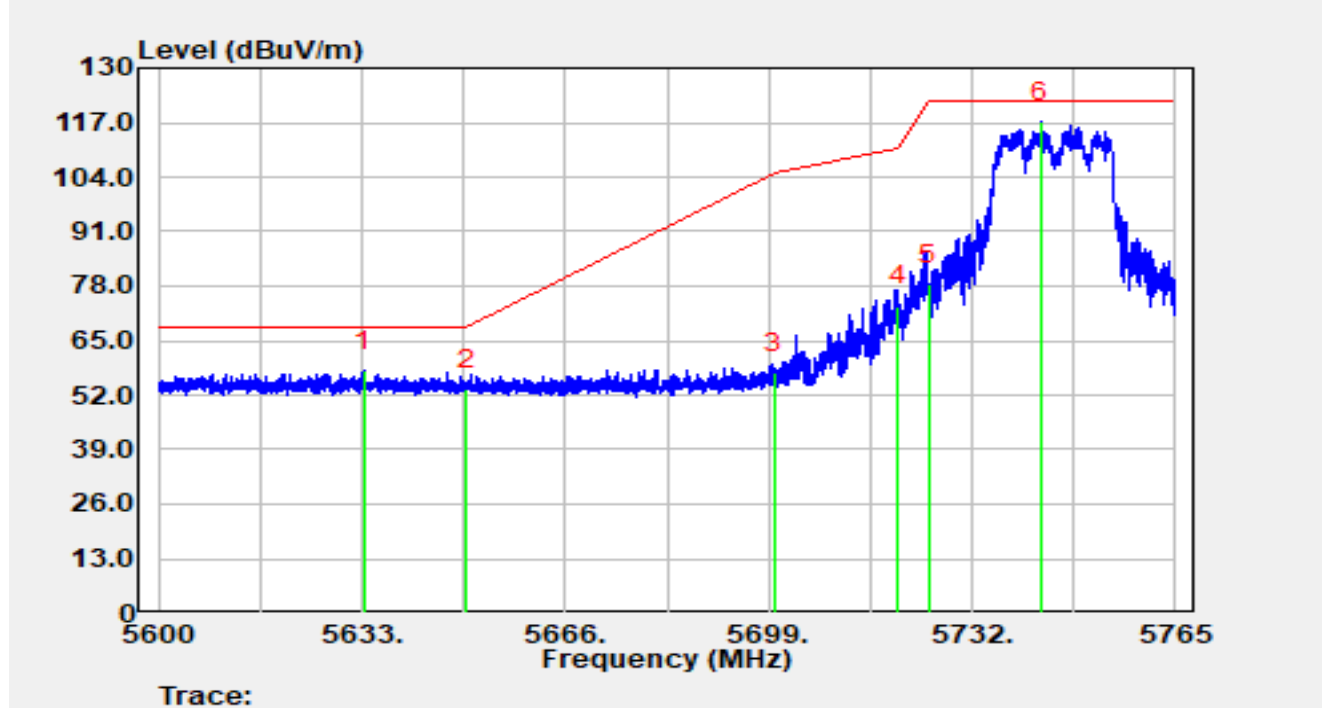


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5633.23         | 37.81          | 19.90      | 57.71                | -10.49      | 68.20          | Peak     |
| 2  |      | 5650.00         | 33.66          | 19.62      | 53.28                | -14.92      | 68.20          | Peak     |
| 3  |      | 5700.00         | 37.07          | 20.14      | 57.21                | -47.99      | 105.20         | Peak     |
| 4  |      | 5720.00         | 52.80          | 20.38      | 73.19                | -37.61      | 110.80         | Peak     |
| 5  |      | 5725.00         | 58.04          | 20.33      | 78.37                | -43.83      | 122.20         | Peak     |
| 6  |      | 5743.22         | 97.10          | 20.12      | 117.22               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5745 MHz |               |            |

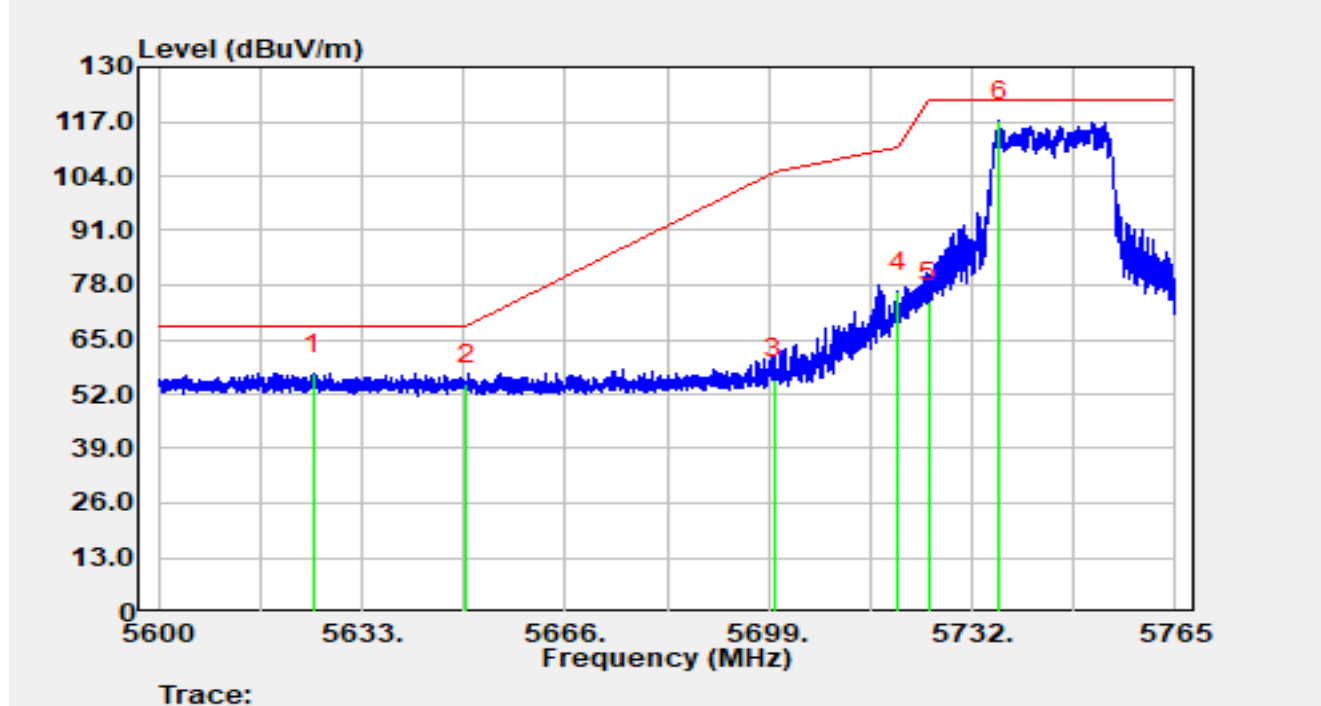


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5625.13         | 36.98          | 19.86      | 56.84                | -11.36      | 68.20          | Peak     |
| 2  |      | 5650.00         | 34.72          | 19.62      | 54.34                | -13.86      | 68.20          | Peak     |
| 3  |      | 5700.00         | 35.33          | 20.14      | 55.47                | -49.73      | 105.20         | Peak     |
| 4  |      | 5720.00         | 55.94          | 20.38      | 76.33                | -34.47      | 110.80         | Peak     |
| 5  |      | 5725.00         | 53.68          | 20.33      | 74.01                | -48.19      | 122.20         | Peak     |
| 6  |      | 5736.47         | 97.00          | 20.21      | 117.21               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT20 at 5825 MHz |               |            |

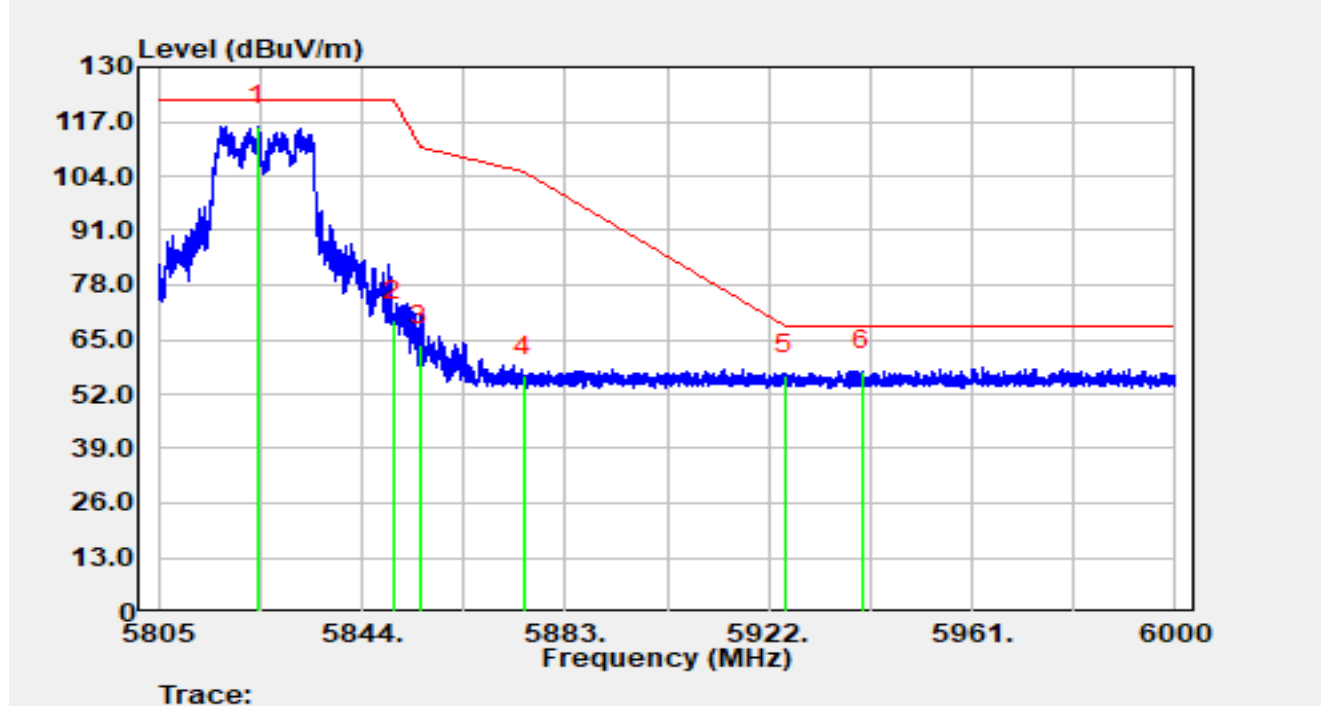


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5823.95         | 95.27          | 20.56      | 115.83               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 49.33          | 20.30      | 69.62                | -52.58      | 122.20         | Peak     |
| 3  |      | 5855.00         | 43.37          | 20.30      | 63.67                | -47.13      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.69          | 20.63      | 56.32                | -48.88      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.91          | 20.59      | 56.49                | -11.71      | 68.20          | Peak     |
| 6  | *    | 5939.92         | 36.98          | 20.64      | 57.62                | -10.58      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-03 |
| Temperature  | 23.3 °C                                | Humidity      | 48.0%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Dick Shen  |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT20 at 5825 MHz |               |            |

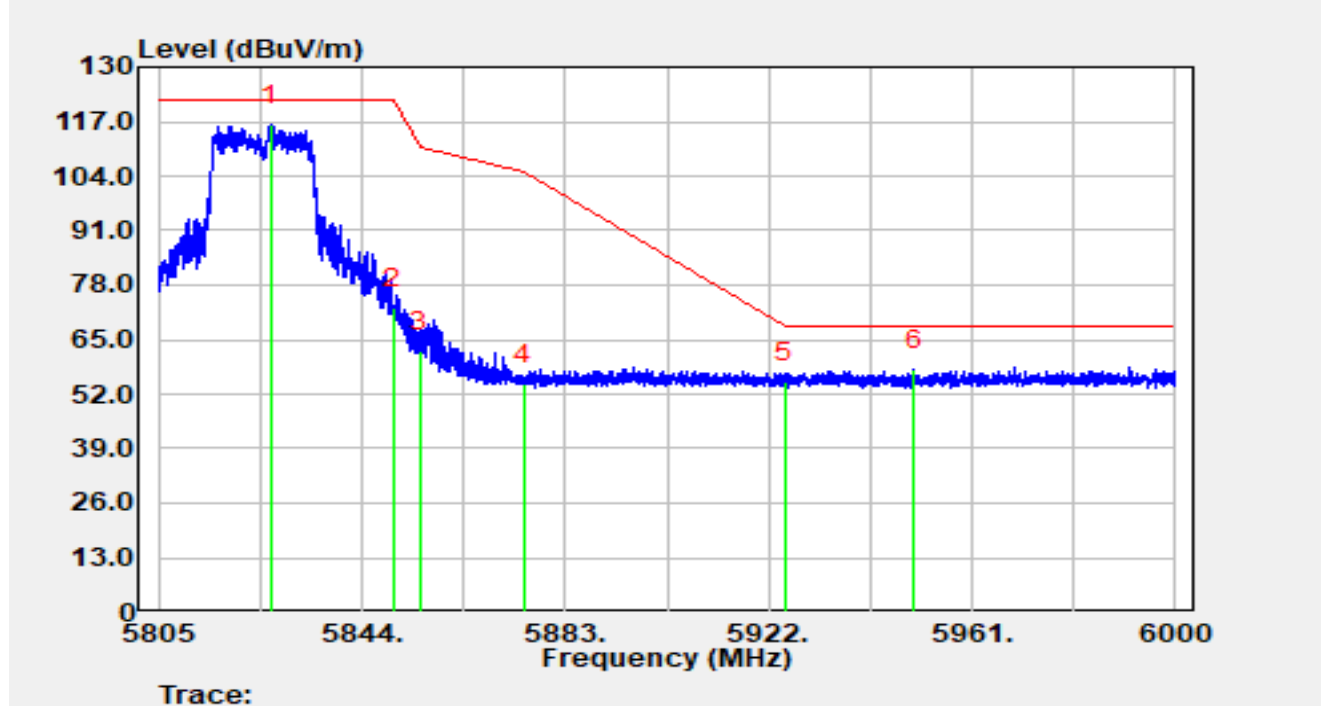


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5826.39         | 95.52          | 20.53      | 116.05               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 52.12          | 20.30      | 72.42                | -49.78      | 122.20         | Peak     |
| 3  |      | 5855.00         | 41.83          | 20.30      | 62.13                | -48.67      | 110.80         | Peak     |
| 4  |      | 5875.00         | 33.67          | 20.63      | 54.30                | -50.90      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.27          | 20.59      | 54.86                | -13.34      | 68.20          | Peak     |
| 6  | *    | 5949.79         | 37.16          | 20.67      | 57.83                | -10.37      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5190 MHz |               |            |

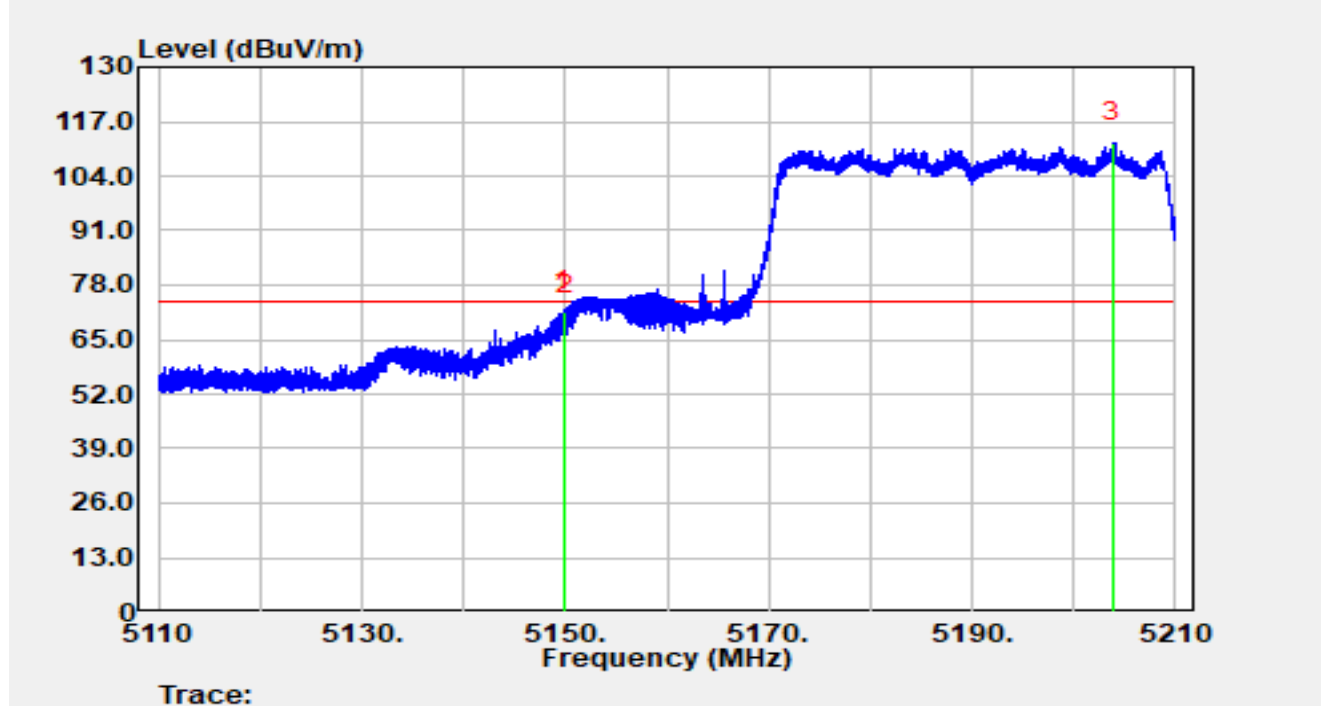


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.80         | 53.31          | 18.52      | 71.83                | -2.17       | 74.00          | Peak     |
| 2  |      | 5150.00         | 52.44          | 18.52      | 70.96                | -3.04       | 74.00          | Peak     |
| 3  |      | 5203.83         | 93.37          | 18.64      | 112.01               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5190 MHz |               |            |

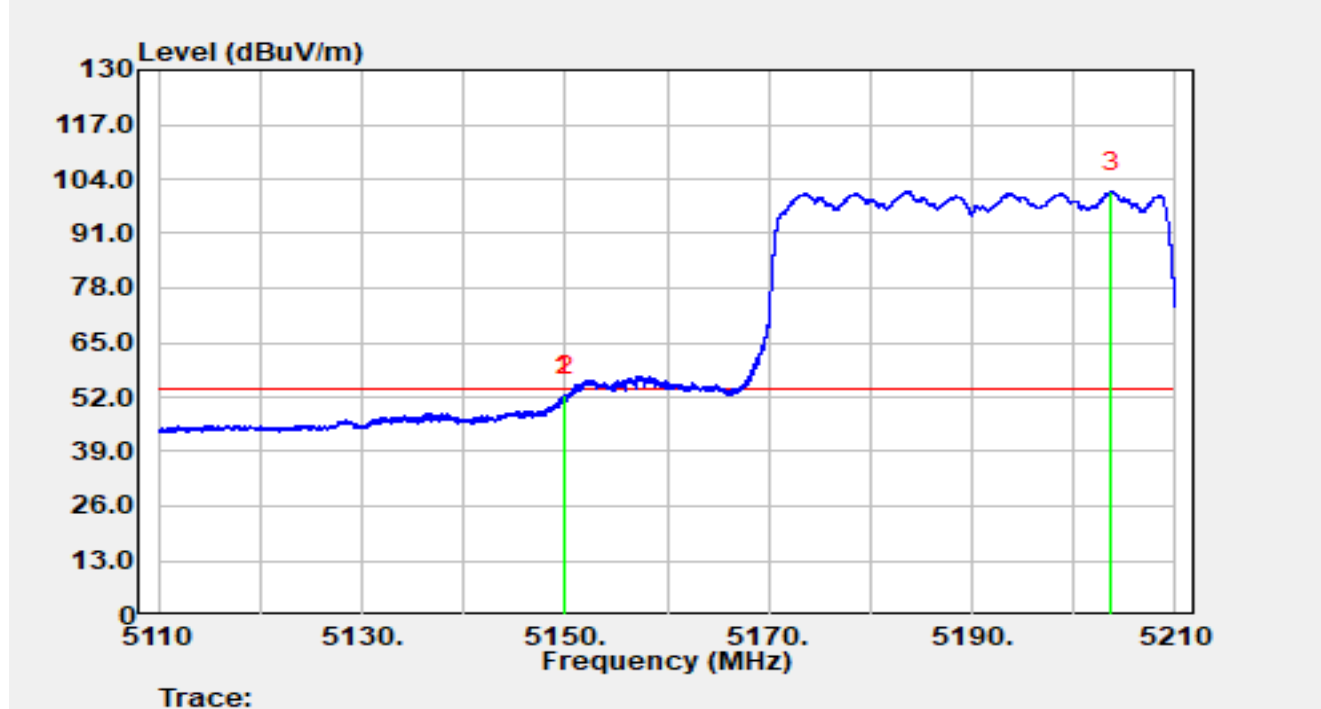


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.79         | 33.82          | 18.52      | 52.33                | -1.67       | 54.00          | Average  |
| 2  |      | 5150.00         | 33.53          | 18.52      | 52.05                | -1.95       | 54.00          | Average  |
| 3  |      | 5203.73         | 82.40          | 18.64      | 101.04               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5190 MHz |               |            |

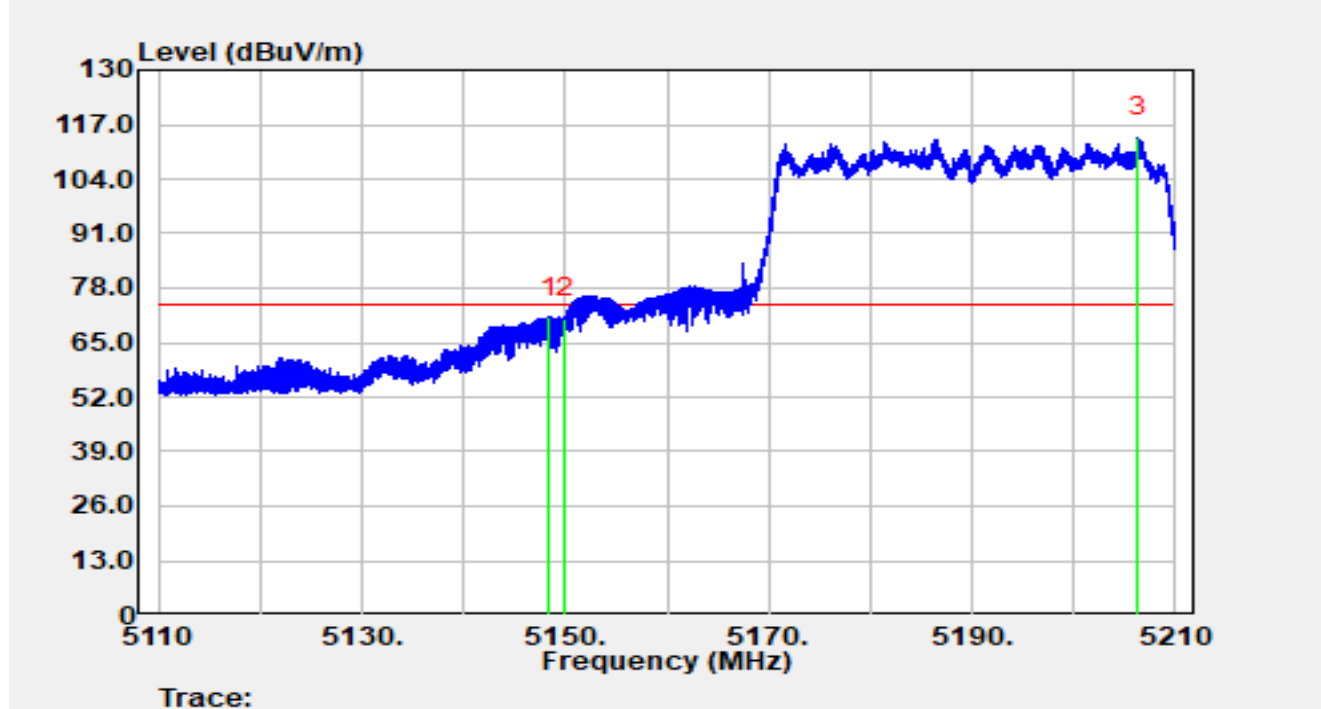


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.47         | 52.52          | 18.52      | 71.04                | -2.96       | 74.00          | Peak     |
| 2  |      | 5150.00         | 52.17          | 18.52      | 70.69                | -3.31       | 74.00          | Peak     |
| 3  |      | 5206.26         | 95.24          | 18.59      | 113.83               | N/A         | N/A            | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5190 MHz |               |            |

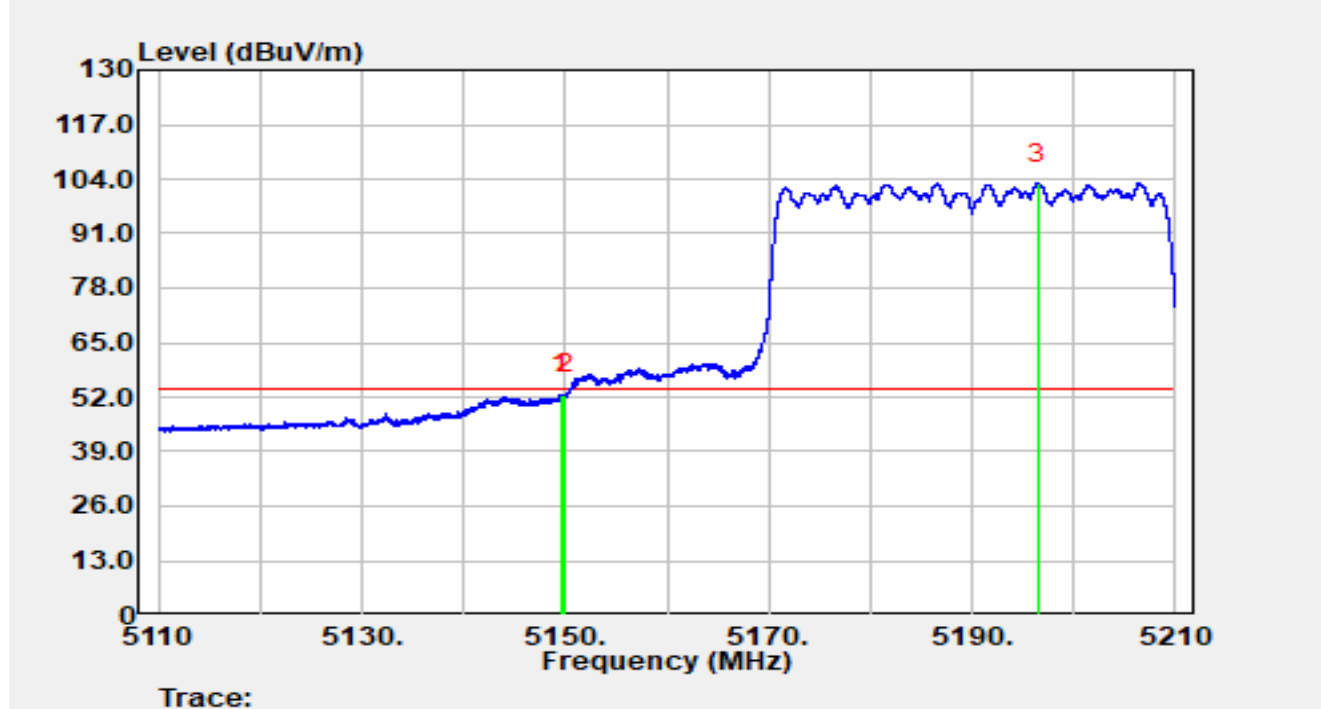


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.63         | 34.12          | 18.52      | 52.64                | -1.36       | 54.00          | Average  |
| 2  |      | 5150.00         | 34.00          | 18.52      | 52.52                | -1.48       | 54.00          | Average  |
| 3  |      | 5196.53         | 84.28          | 18.71      | 102.99               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5310 MHz |               |            |

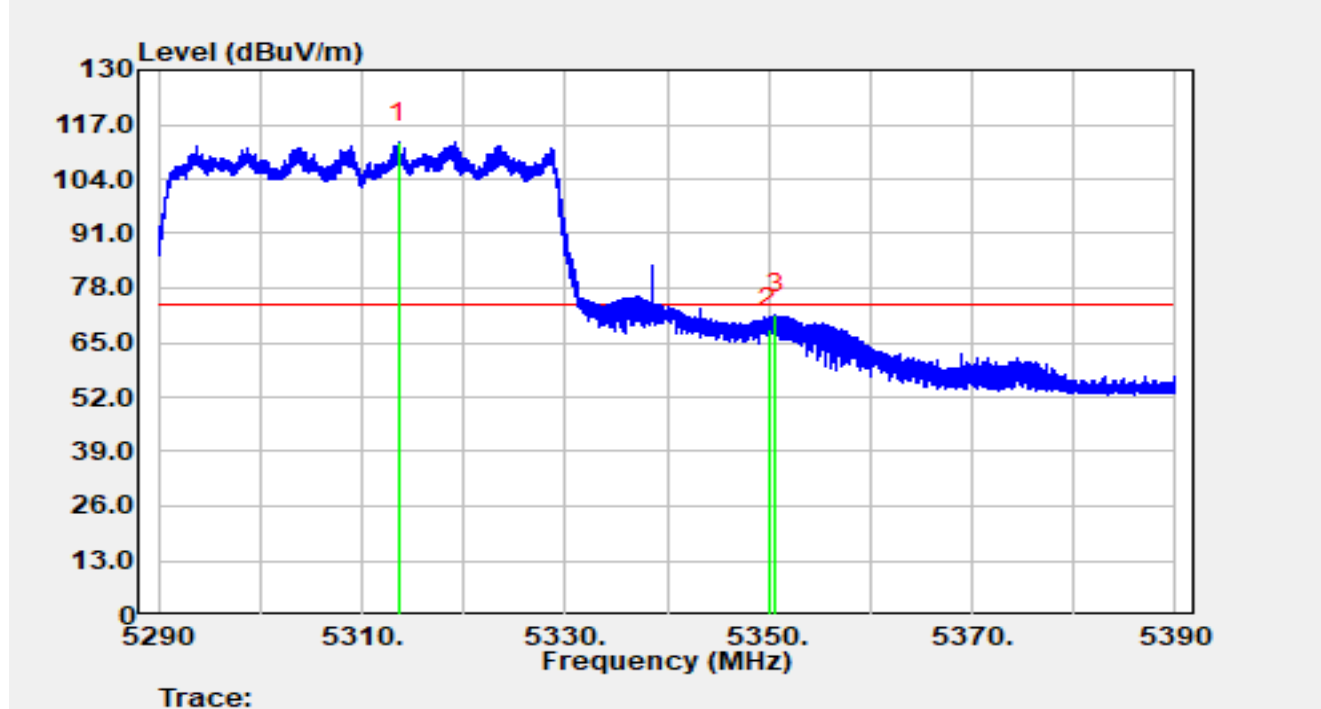


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5313.55         | 94.09          | 18.61      | 112.70               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 49.37          | 18.82      | 68.19                | -5.81       | 74.00          | Peak     |
| 3  | *    | 5350.67         | 52.85          | 18.83      | 71.68                | -2.32       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5310 MHz |               |            |

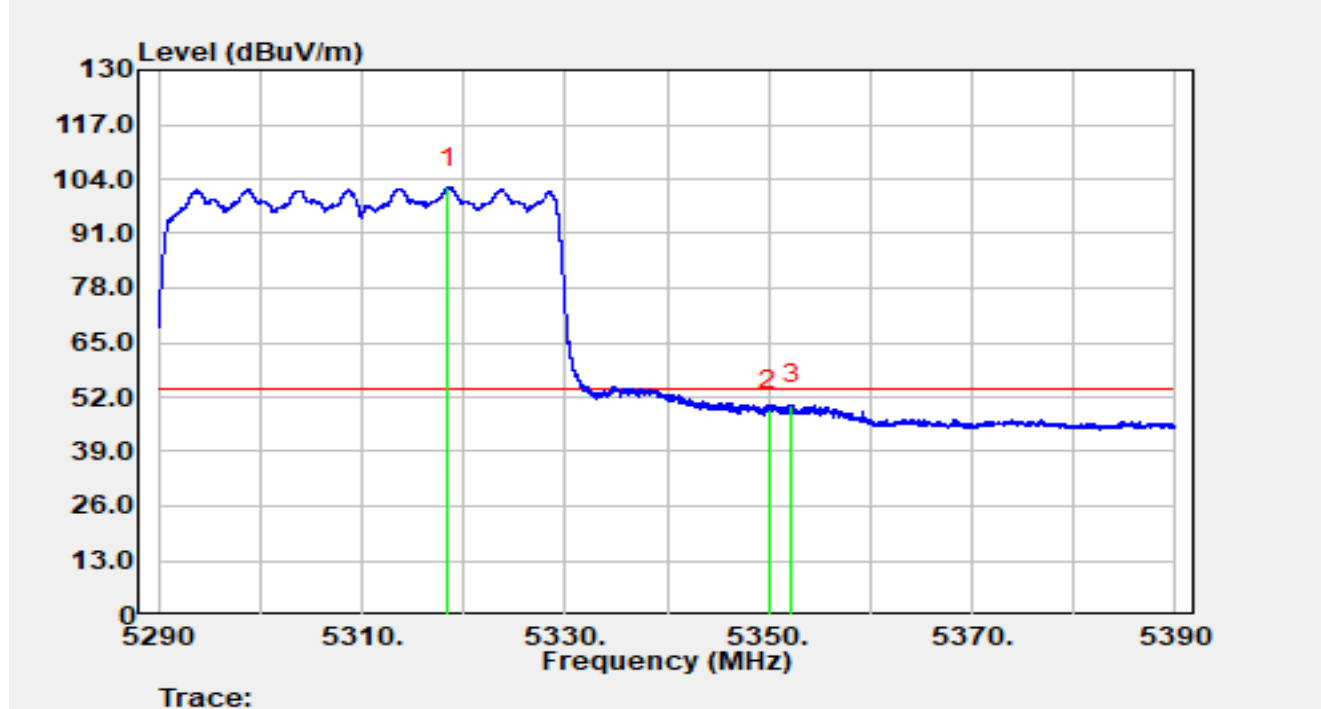


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5318.51         | 83.44          | 18.59      | 102.03               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 30.05          | 18.82      | 48.87                | -5.13       | 54.00          | Average  |
| 3  | *    | 5352.31         | 31.23          | 18.85      | 50.08                | -3.92       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5310 MHz |               |            |

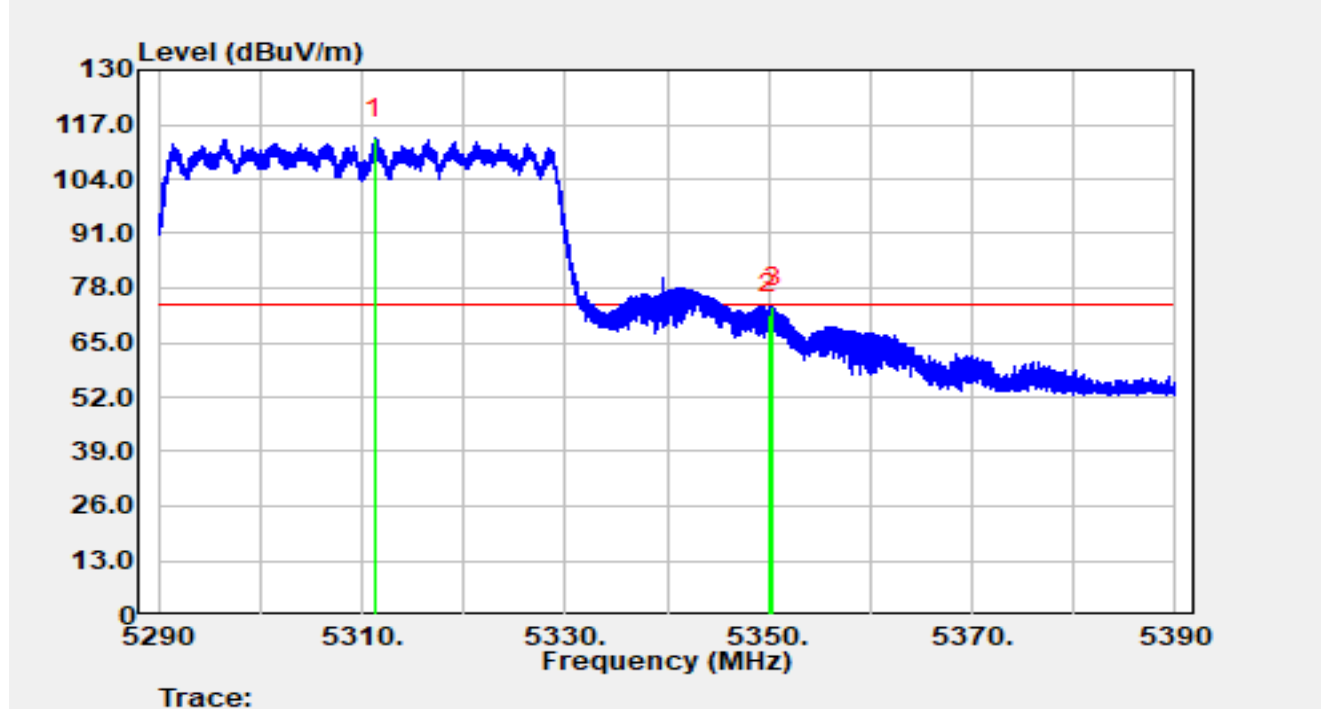


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5311.20         | 94.99          | 18.61      | 113.60               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 52.85          | 18.82      | 71.67                | -2.33       | 74.00          | Peak     |
| 3  | *    | 5350.43         | 54.70          | 18.83      | 73.53                | -0.47       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5310 MHz |               |            |

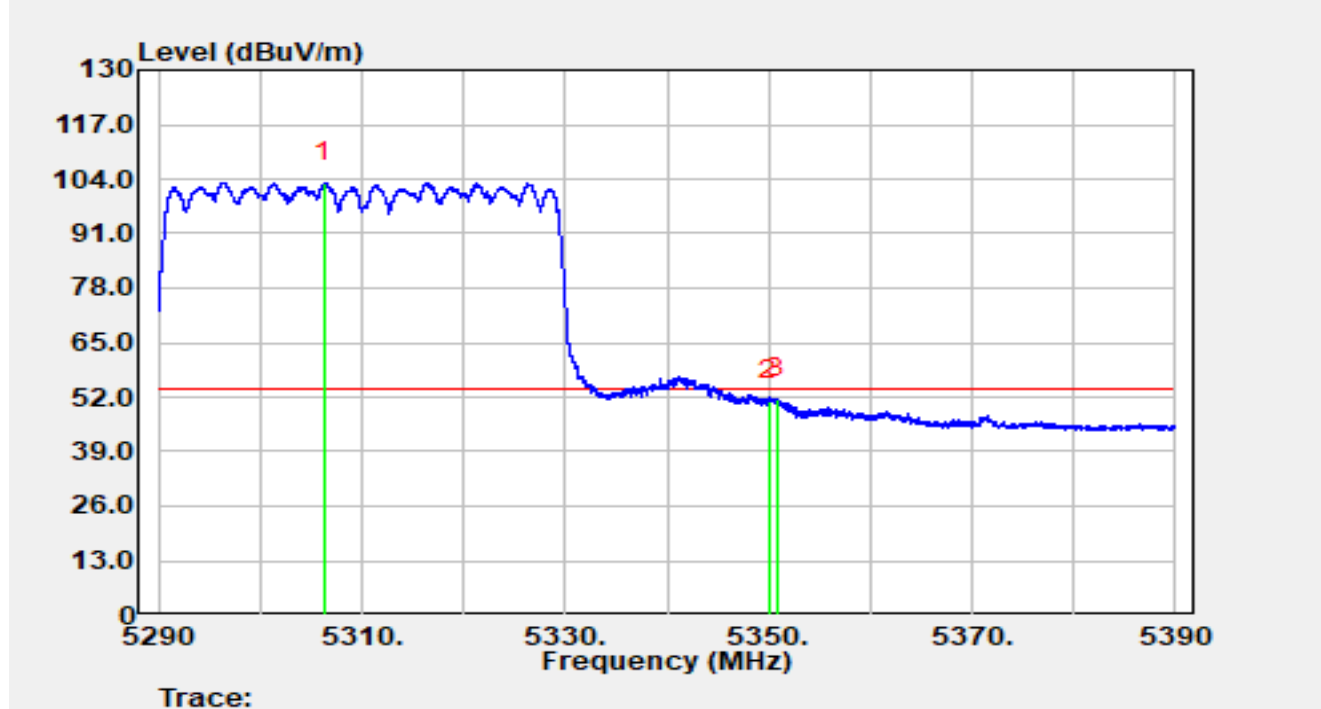


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5306.26         | 84.65          | 18.61      | 103.26               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 32.43          | 18.82      | 51.25                | -2.75       | 54.00          | Average  |
| 3  | *    | 5350.77         | 32.72          | 18.83      | 51.55                | -2.45       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5510 MHz |               |            |

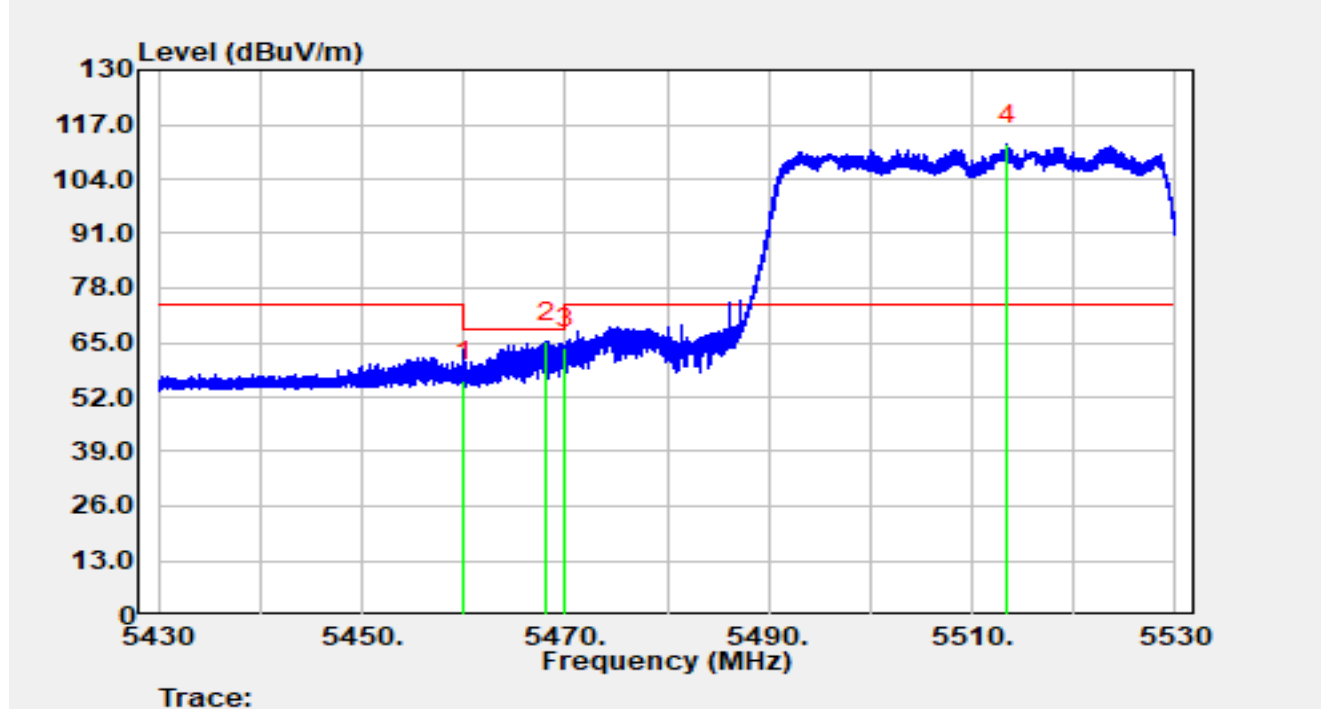


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5460.00         | 36.71          | 19.12      | 55.83                | -12.37      | 68.20          | Peak     |
| 2  | *    | 5468.16         | 46.20          | 19.04      | 65.24                | -2.96       | 68.20          | Peak     |
| 3  |      | 5470.00         | 44.71          | 19.02      | 63.73                | -4.47       | 68.20          | Peak     |
| 4  |      | 5513.45         | 93.11          | 18.98      | 112.10               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5510 MHz |               |            |

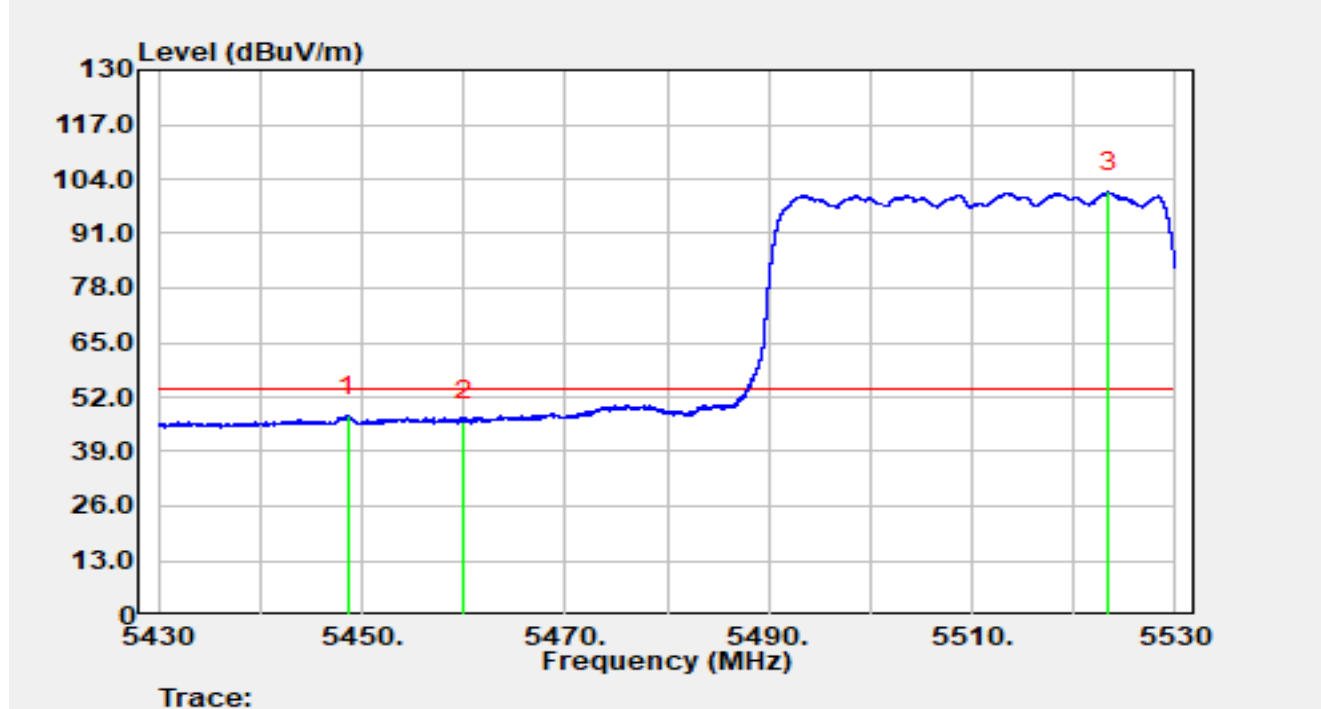


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5448.57         | 28.37          | 19.13      | 47.50                | -6.50       | 54.00          | Average  |
| 2  |      | 5460.00         | 27.04          | 19.12      | 46.15                | -7.85       | 54.00          | Average  |
| 3  |      | 5523.47         | 81.75          | 19.12      | 100.87               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5510 MHz |               |            |

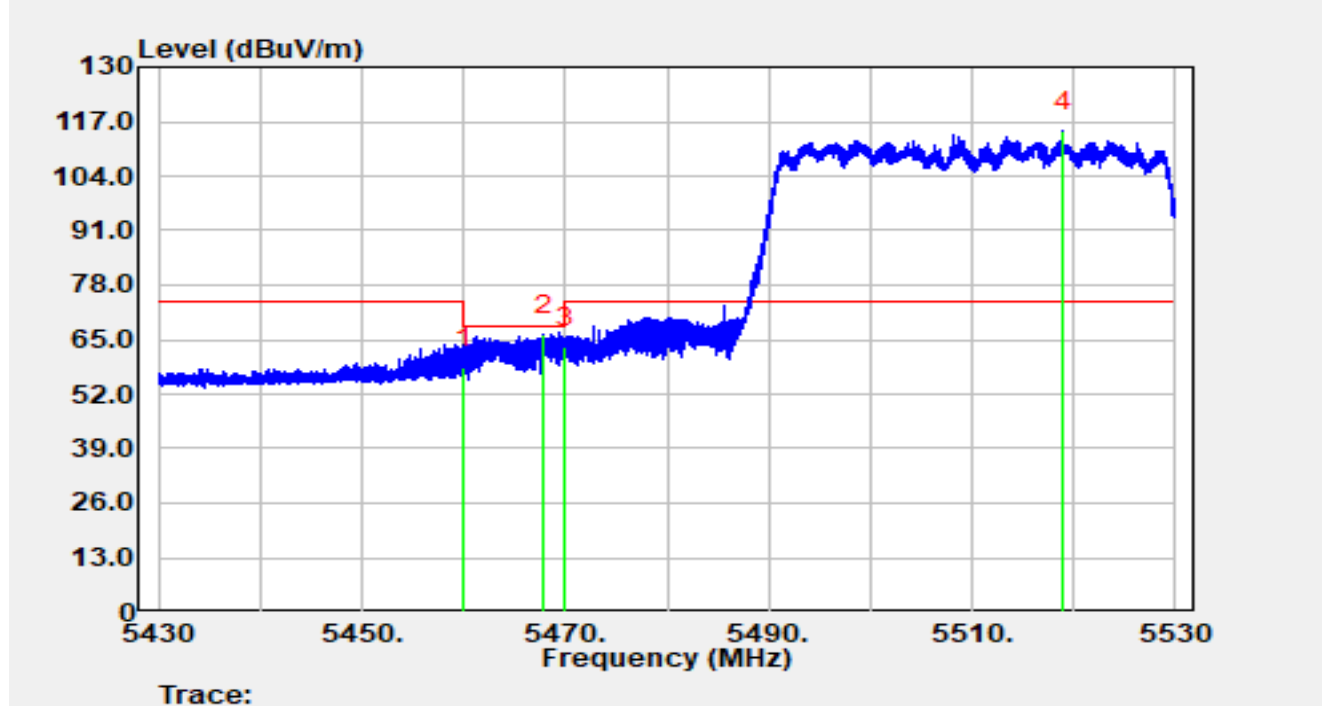


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5460.00         | 39.05          | 19.12      | 58.17                | -10.03      | 68.20          | Peak     |
| 2  | *    | 5467.92         | 47.18          | 19.05      | 66.22                | -1.98       | 68.20          | Peak     |
| 3  |      | 5470.00         | 44.15          | 19.02      | 63.18                | -5.02       | 68.20          | Peak     |
| 4  |      | 5518.95         | 95.49          | 19.06      | 114.55               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5510 MHz |               |            |

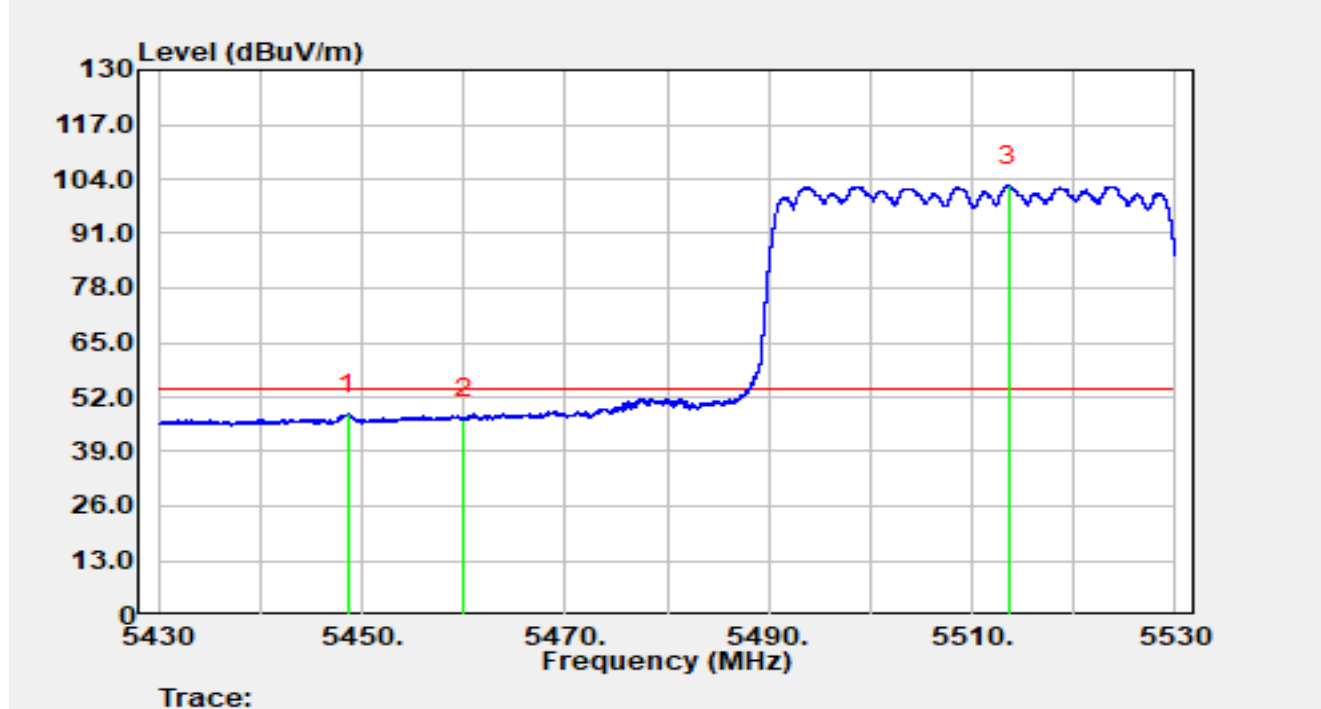


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5448.58         | 28.72          | 19.13      | 47.85                | -6.15       | 54.00          | Average  |
| 2  |      | 5460.00         | 27.70          | 19.12      | 46.82                | -7.18       | 54.00          | Average  |
| 3  |      | 5513.54         | 83.54          | 18.98      | 102.52               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5670 MHz |               |            |

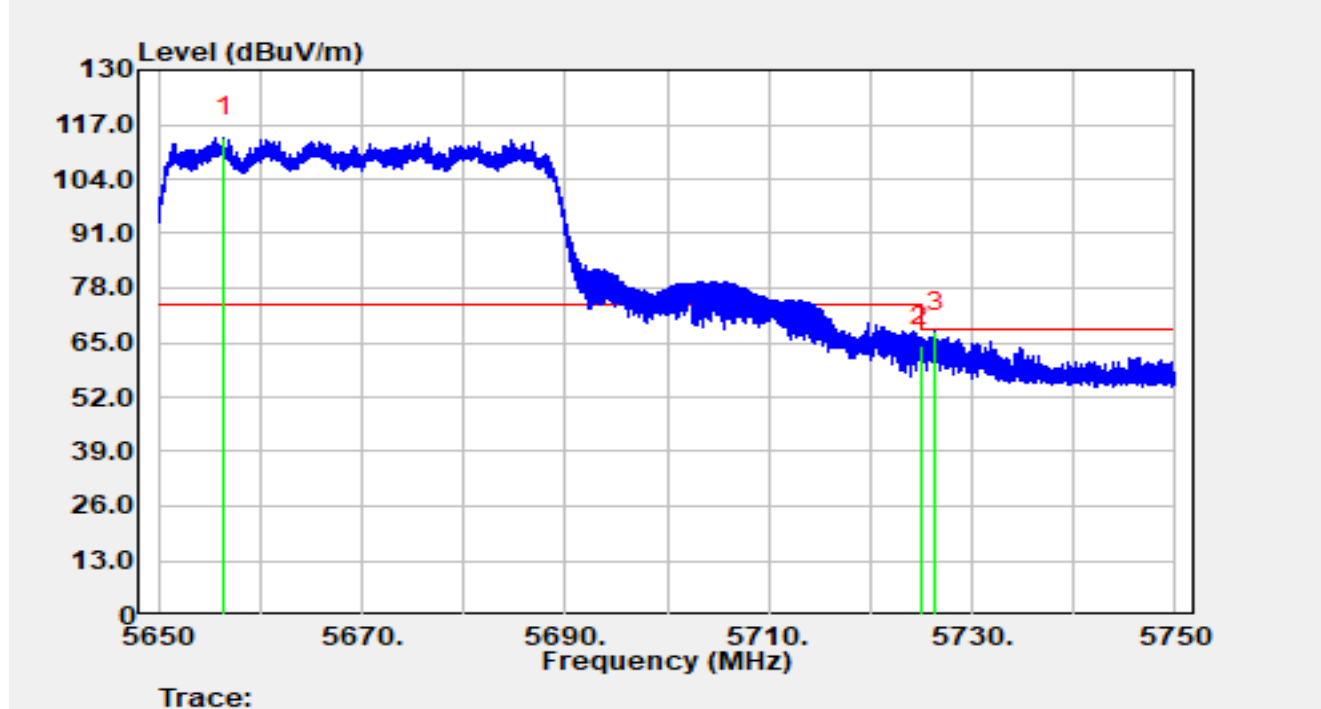


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5656.50         | 94.33          | 19.55      | 113.88               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 43.83          | 20.33      | 64.15                | -4.05       | 68.20          | Peak     |
| 3  | *    | 5726.41         | 47.29          | 20.31      | 67.60                | -0.60       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-20 |
| Temperature  | 23.3 °C                                | Humidity      | 49.0%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5670 MHz |               |            |

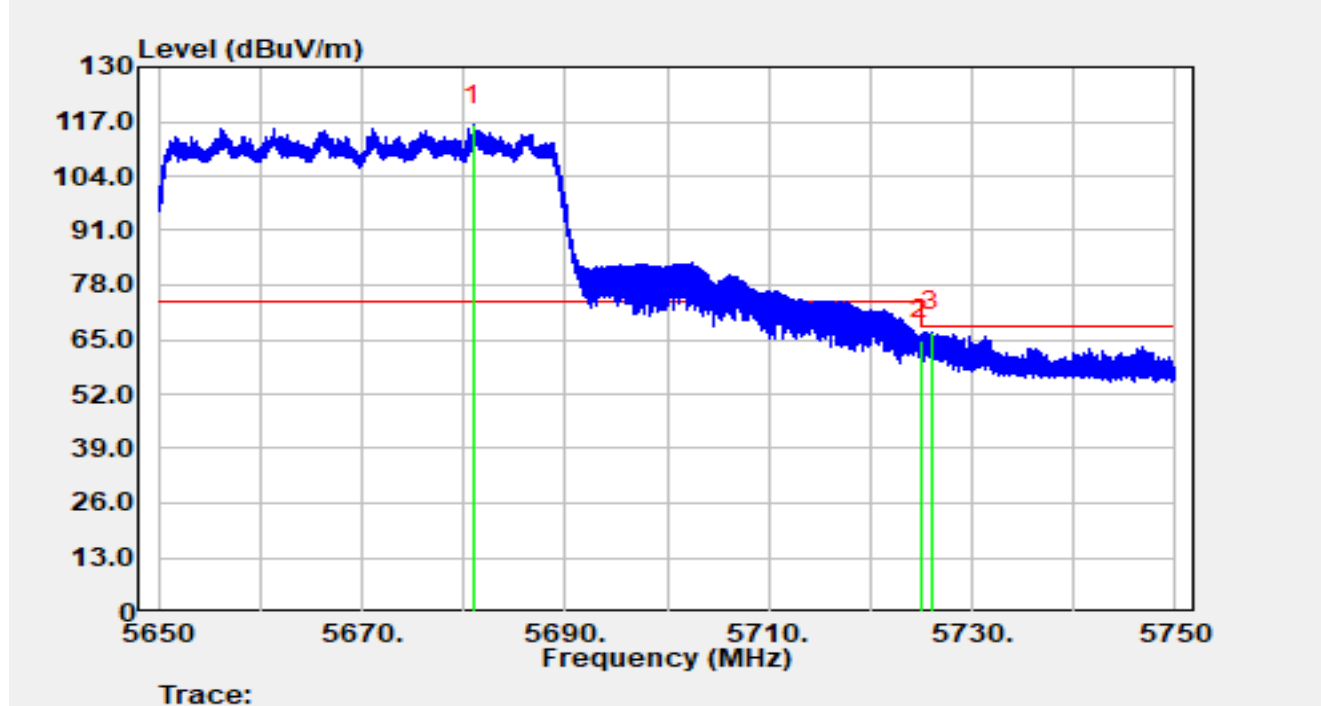


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5680.93         | 96.45          | 19.70      | 116.15               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 44.65          | 20.33      | 64.98                | -3.22       | 68.20          | Peak     |
| 3  | *    | 5726.05         | 46.50          | 20.32      | 66.82                | -1.38       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5755 MHz |               |            |

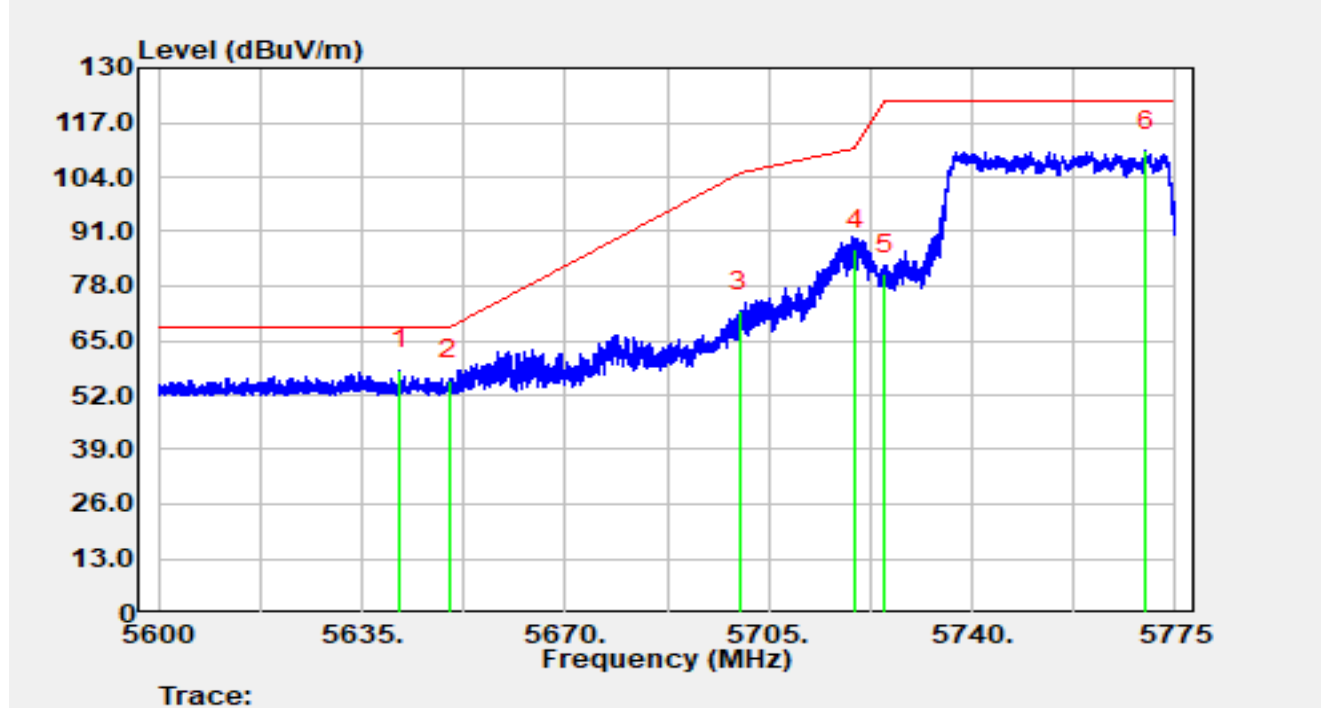


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5641.51         | 38.23          | 19.77      | 58.00                | -10.20      | 68.20          | Peak     |
| 2  |      | 5650.00         | 35.91          | 19.62      | 55.53                | -12.67      | 68.20          | Peak     |
| 3  |      | 5700.00         | 51.83          | 20.14      | 71.97                | -33.23      | 105.20         | Peak     |
| 4  |      | 5720.00         | 66.32          | 20.38      | 86.70                | -24.10      | 110.80         | Peak     |
| 5  |      | 5725.00         | 60.56          | 20.33      | 80.89                | -41.31      | 122.20         | Peak     |
| 6  |      | 5769.87         | 90.01          | 20.17      | 110.19               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5755 MHz |               |            |

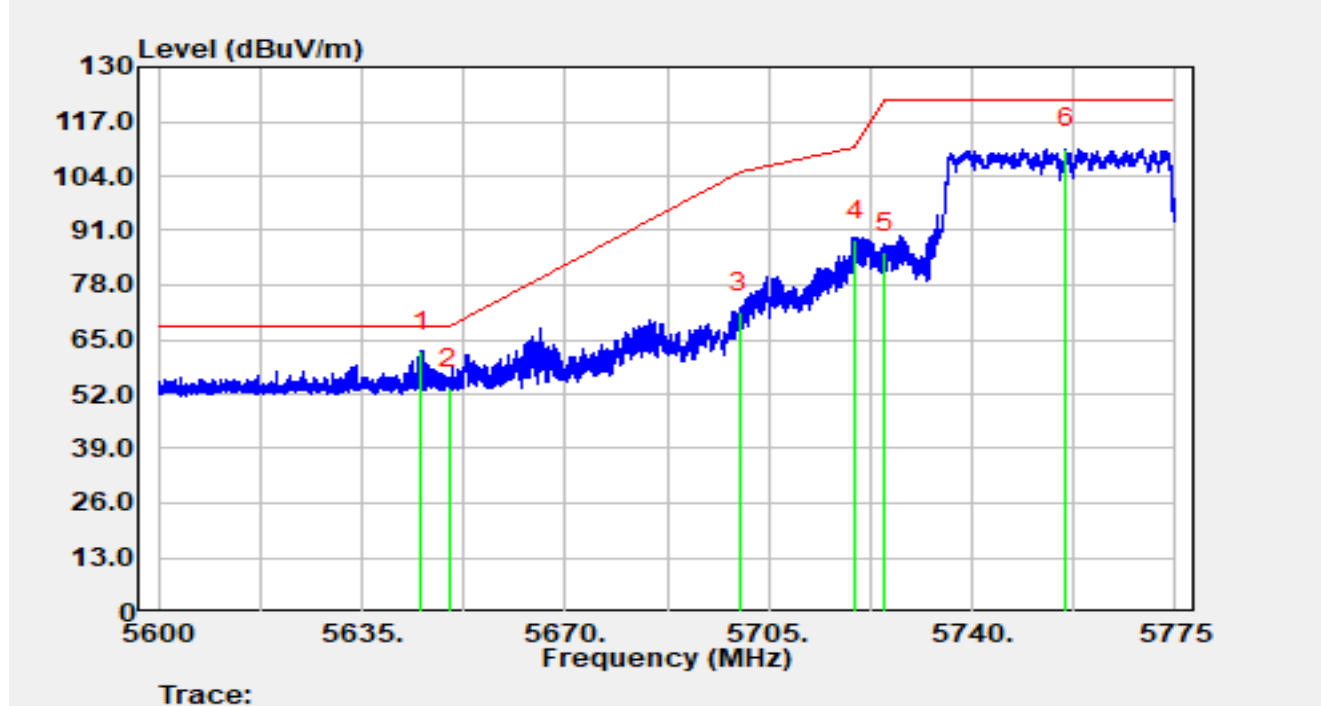


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5645.31         | 42.40          | 19.70      | 62.10                | -6.10       | 68.20          | Peak     |
| 2  |      | 5650.00         | 33.82          | 19.62      | 53.44                | -14.76      | 68.20          | Peak     |
| 3  |      | 5700.00         | 51.37          | 20.14      | 71.52                | -33.68      | 105.20         | Peak     |
| 4  |      | 5720.00         | 68.18          | 20.38      | 88.56                | -22.24      | 110.80         | Peak     |
| 5  |      | 5725.00         | 65.47          | 20.33      | 85.80                | -36.40      | 122.20         | Peak     |
| 6  |      | 5756.21         | 90.52          | 20.05      | 110.57               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT40 at 5795 MHz |               |            |

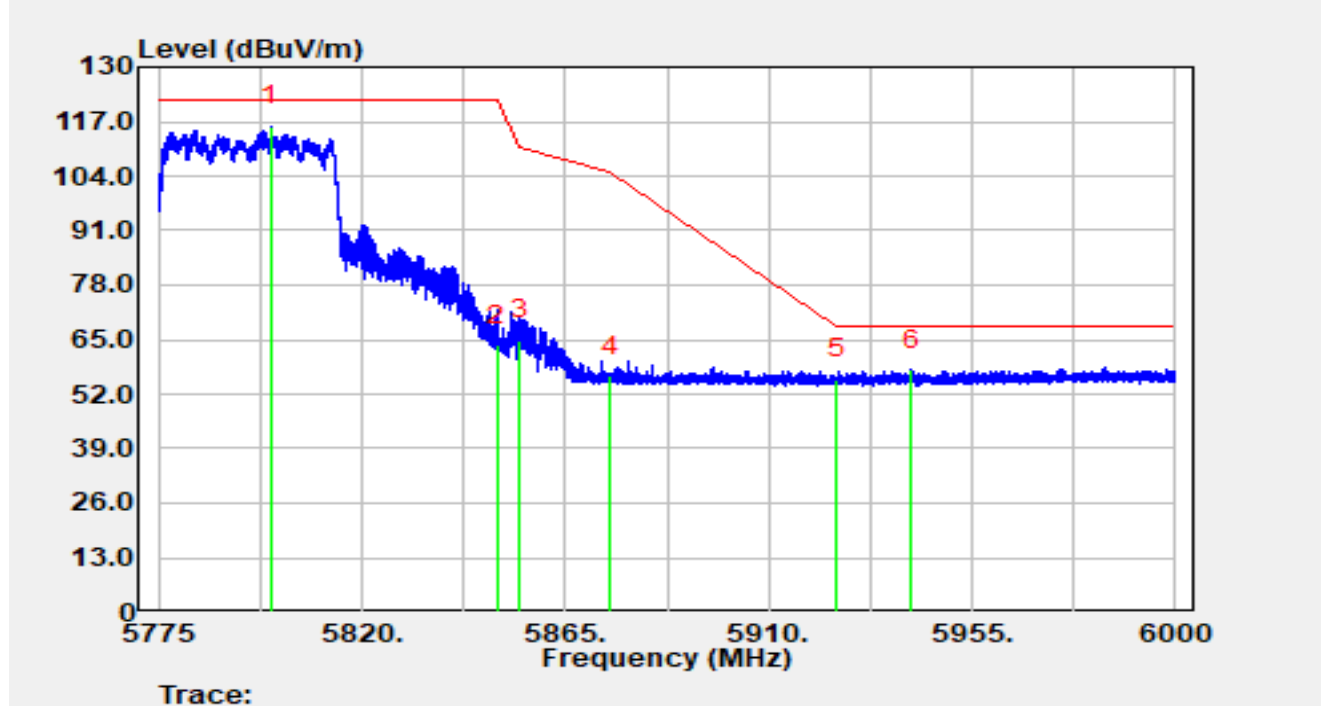


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5799.75         | 95.26          | 20.61      | 115.86               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 43.43          | 20.30      | 63.73                | -58.47      | 122.20         | Peak     |
| 3  |      | 5855.00         | 44.47          | 20.30      | 64.77                | -46.03      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.78          | 20.63      | 56.41                | -48.79      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.88          | 20.59      | 55.47                | -12.73      | 68.20          | Peak     |
| 6  | *    | 5941.46         | 37.09          | 20.65      | 57.74                | -10.46      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT40 at 5795 MHz |               |            |

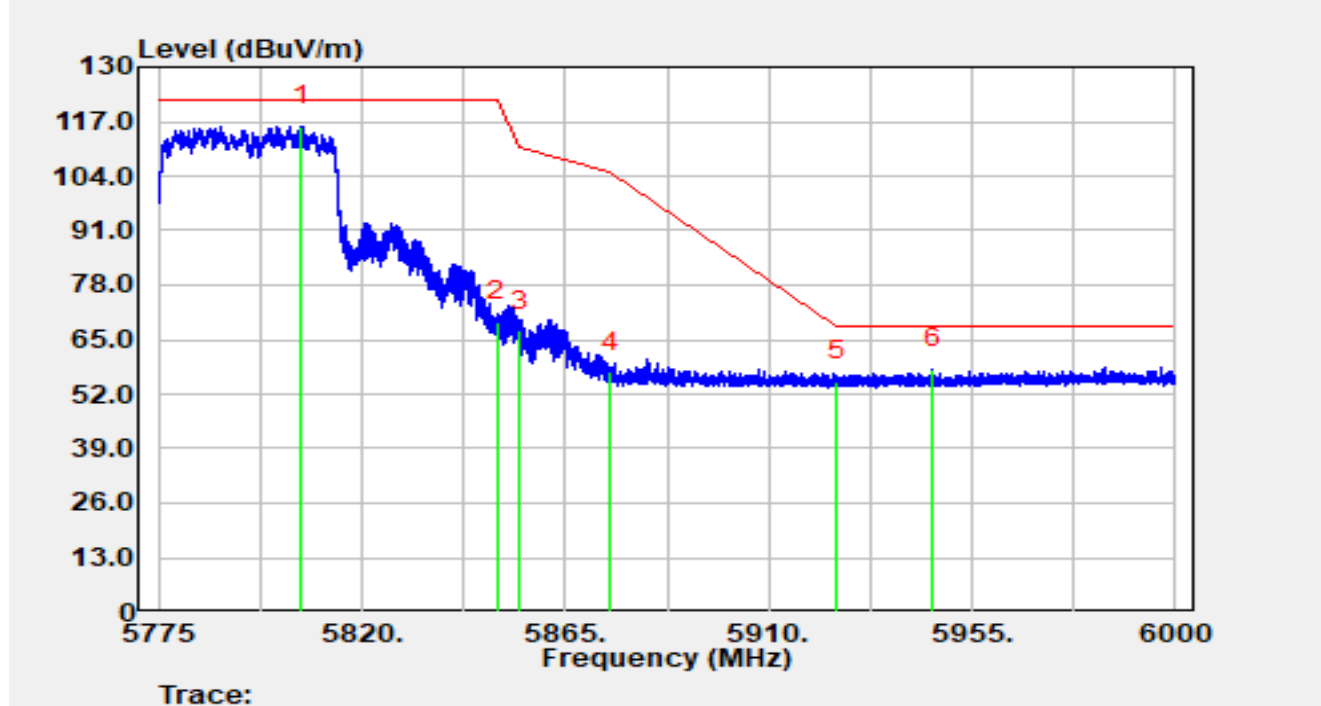


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5806.52         | 95.34          | 20.66      | 116.00               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 49.00          | 20.30      | 69.30                | -52.90      | 122.20         | Peak     |
| 3  |      | 5855.00         | 46.87          | 20.30      | 67.17                | -43.63      | 110.80         | Peak     |
| 4  |      | 5875.00         | 36.61          | 20.63      | 57.24                | -47.96      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.57          | 20.59      | 55.16                | -13.04      | 68.20          | Peak     |
| 6  | *    | 5946.23         | 37.43          | 20.66      | 58.09                | -10.11      | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5210 MHz |               |            |

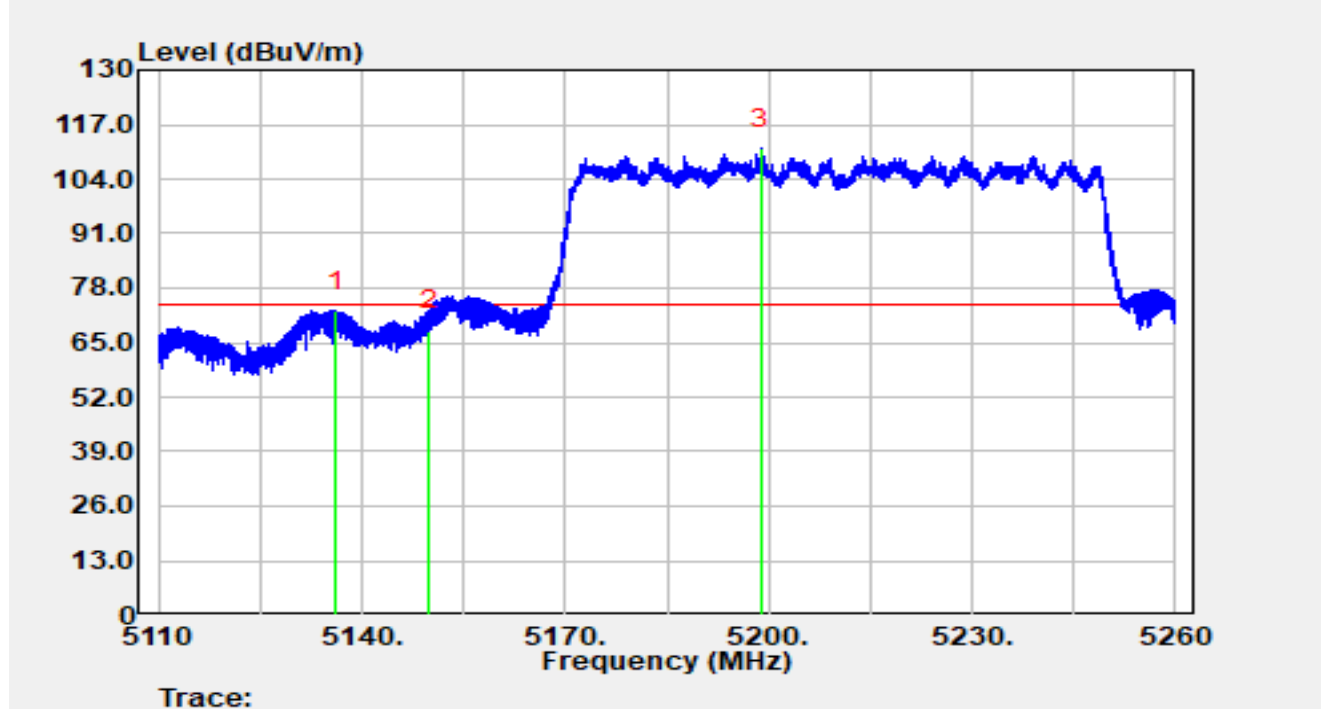


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5136.09         | 54.03          | 18.56      | 72.58                | -1.42       | 74.00          | Peak     |
| 2  |      | 5150.00         | 49.42          | 18.52      | 67.94                | -6.06       | 74.00          | Peak     |
| 3  |      | 5198.77         | 92.56          | 18.69      | 111.25               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5210 MHz |               |            |

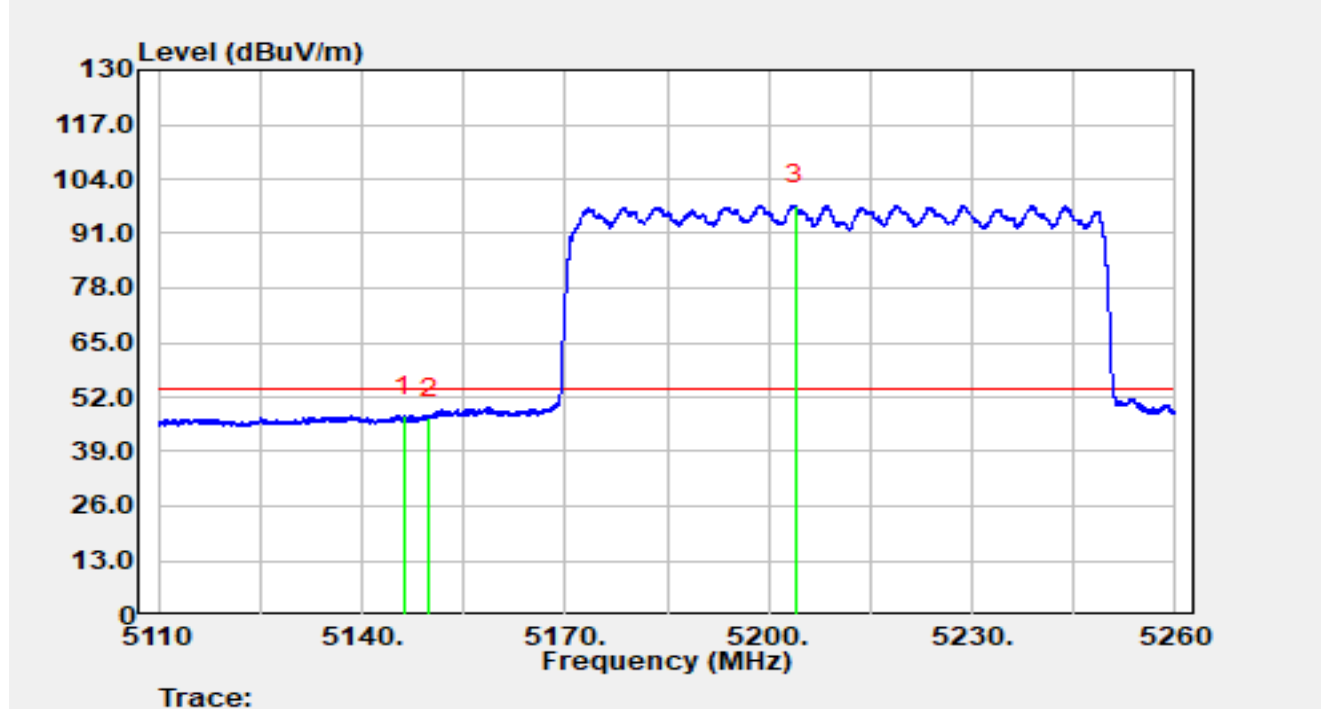


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5146.17         | 28.97          | 18.53      | 47.50                | -6.50       | 54.00          | Average  |
| 2  |      | 5150.00         | 28.56          | 18.52      | 47.07                | -6.93       | 54.00          | Average  |
| 3  |      | 5204.04         | 79.21          | 18.64      | 97.84                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5210 MHz |               |            |

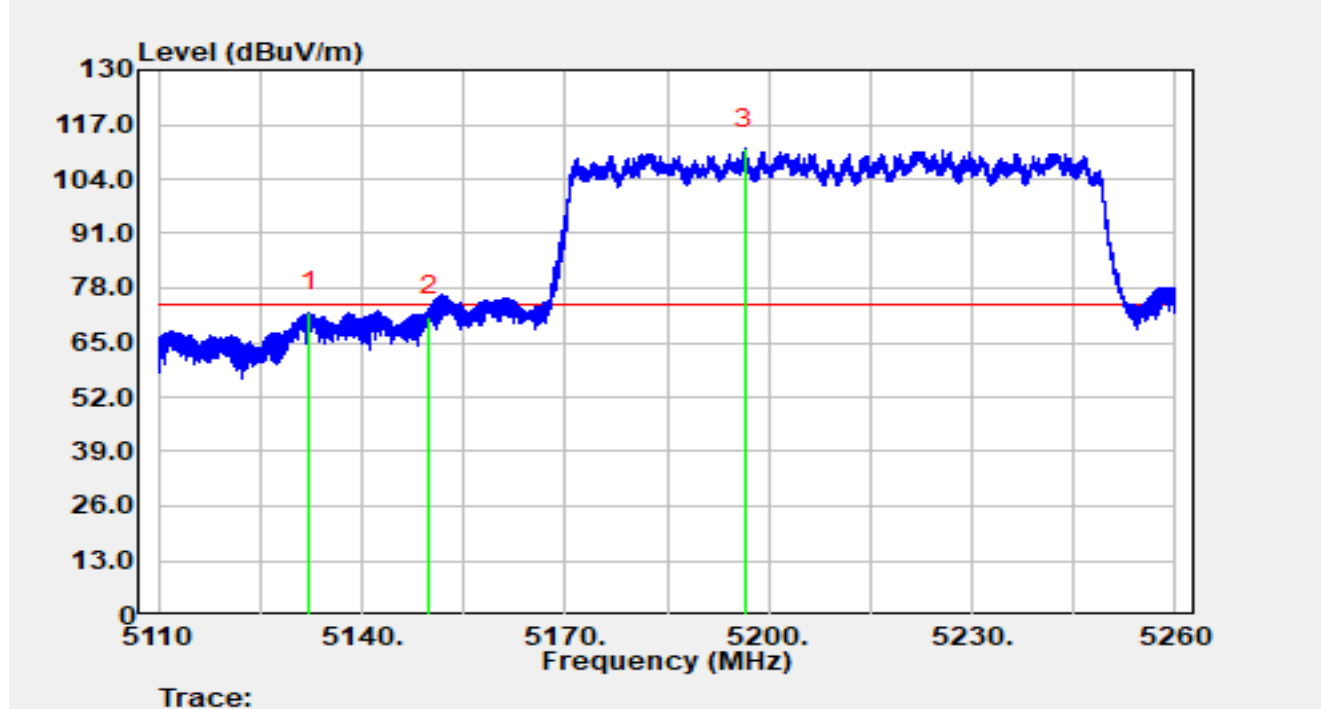


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5132.28         | 53.58          | 18.60      | 72.18                | -1.82       | 74.00          | Peak     |
| 2  |      | 5150.00         | 52.63          | 18.52      | 71.15                | -2.85       | 74.00          | Peak     |
| 3  |      | 5196.48         | 92.58          | 18.71      | 111.30               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5210 MHz |               |            |

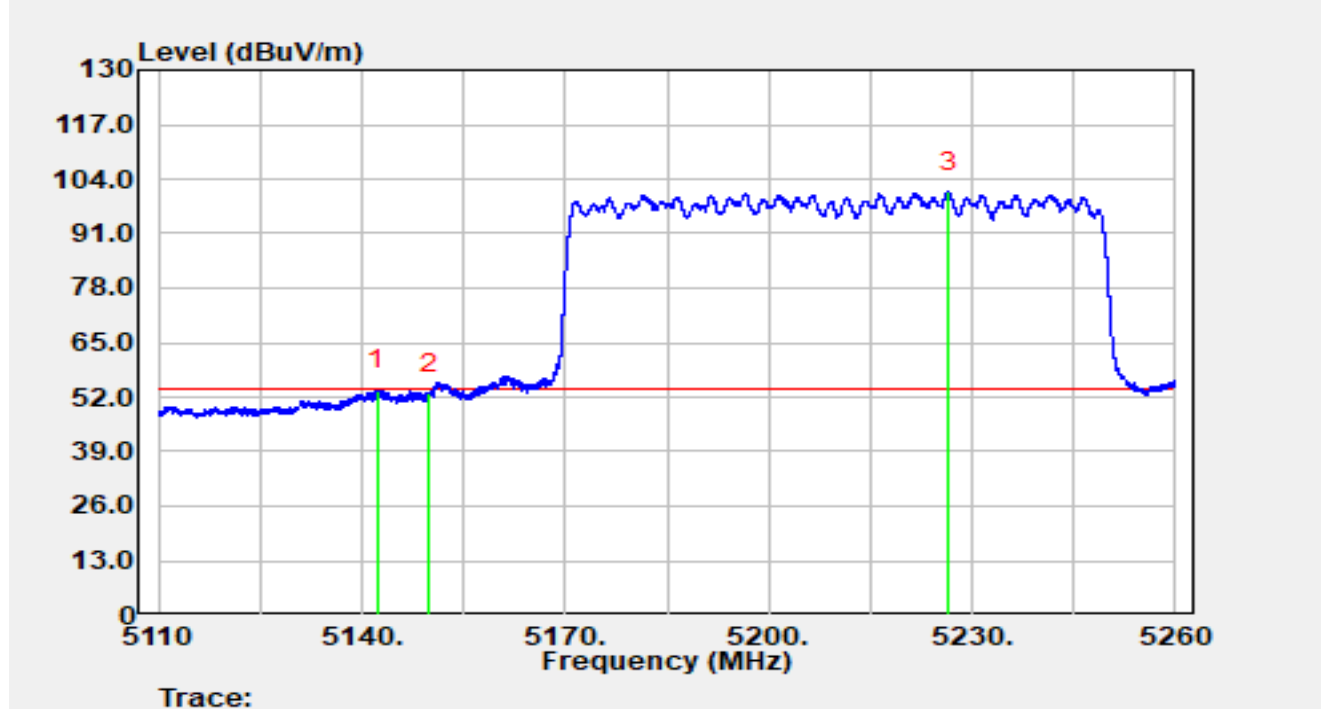


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5142.28         | 35.07          | 18.54      | 53.61                | -0.39       | 54.00          | Average  |
| 2  |      | 5150.00         | 34.39          | 18.52      | 52.91                | -1.09       | 54.00          | Average  |
| 3  |      | 5226.54         | 82.72          | 18.21      | 100.93               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5290 MHz |               |            |

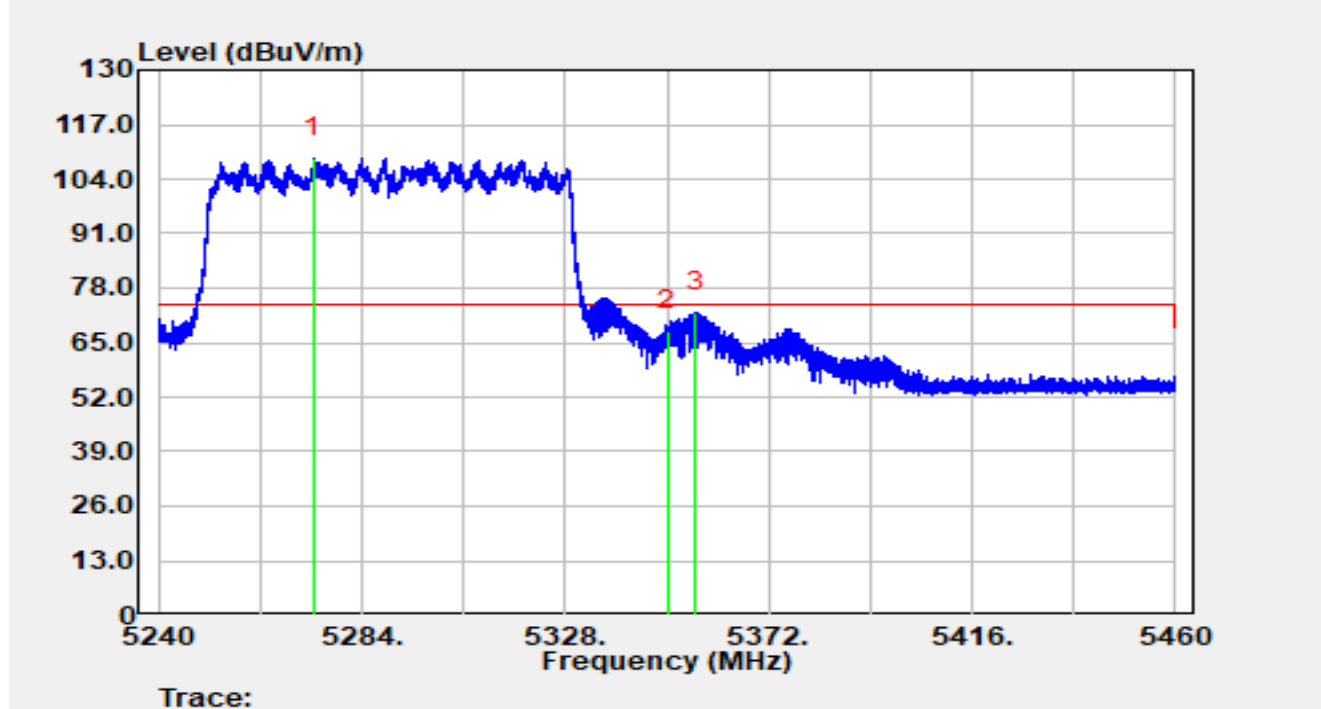


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5273.40         | 90.30          | 18.80      | 109.10               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 48.89          | 18.82      | 67.71                | -6.29       | 74.00          | Peak     |
| 3  | *    | 5356.12         | 53.28          | 18.91      | 72.19                | -1.81       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5290 MHz |               |            |

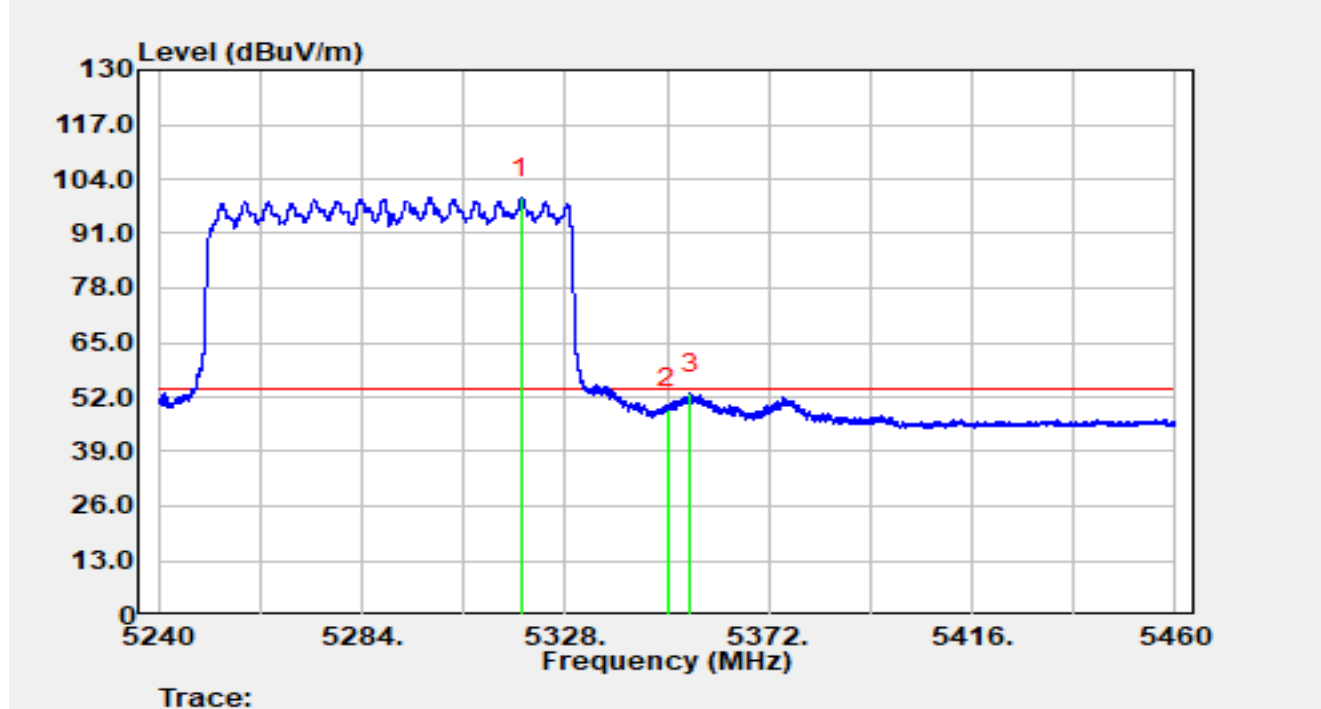


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5318.56         | 80.81          | 18.59      | 99.40                | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 30.25          | 18.82      | 49.07                | -4.93       | 54.00          | Average  |
| 3  | *    | 5355.08         | 34.02          | 18.89      | 52.91                | -1.09       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5290 MHz |               |            |

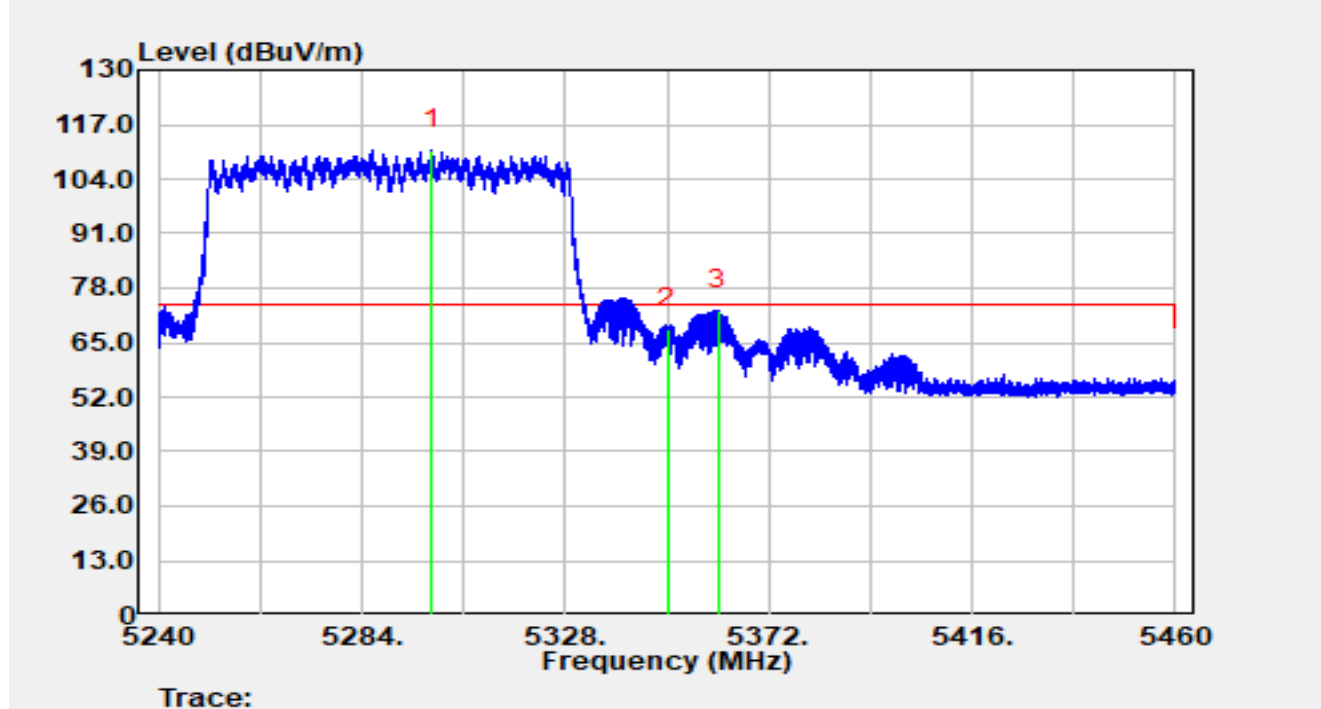


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5299.18         | 92.41          | 18.69      | 111.10               | N/A         | N/A            | Peak     |
| 2  |      | 5350.00         | 49.61          | 18.82      | 68.43                | -5.57       | 74.00          | Peak     |
| 3  | *    | 5361.04         | 53.87          | 18.94      | 72.81                | -1.19       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5290 MHz |               |            |

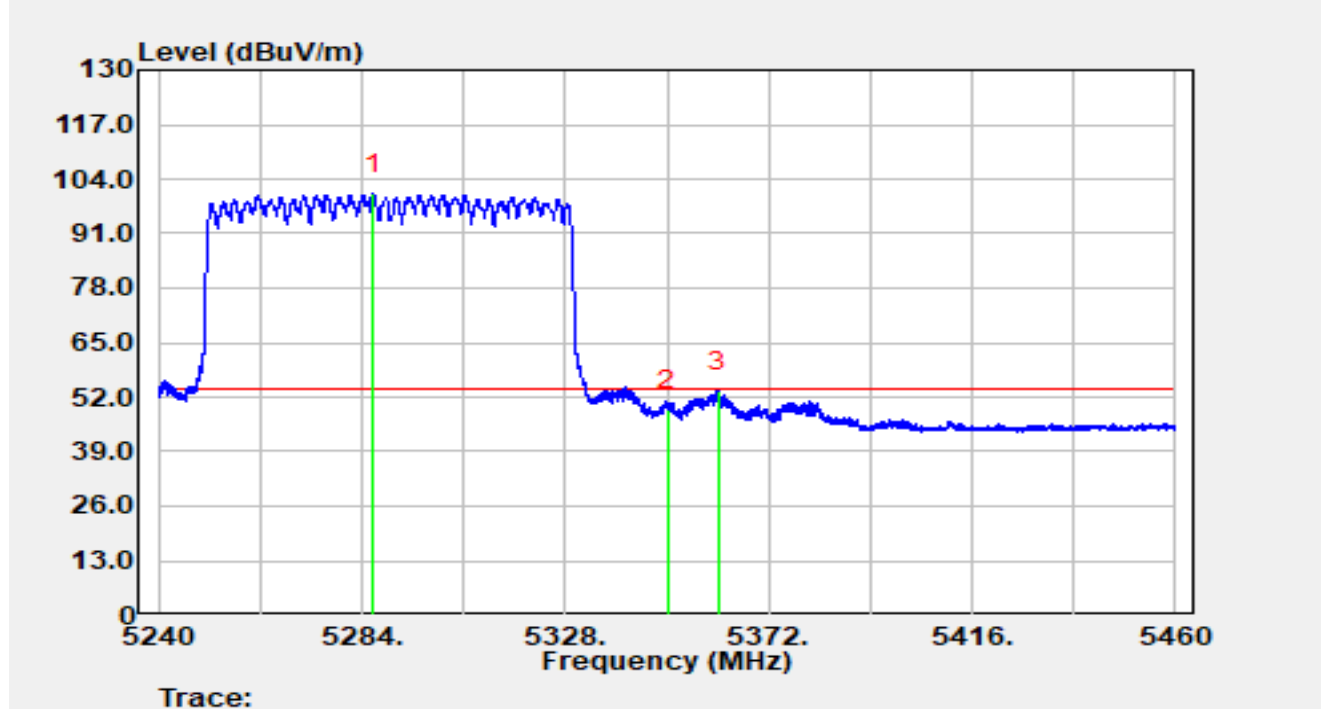


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5286.53         | 81.65          | 18.81      | 100.46               | N/A         | N/A            | Average  |
| 2  |      | 5350.00         | 30.20          | 18.82      | 49.02                | -4.98       | 54.00          | Average  |
| 3  | *    | 5360.98         | 34.43          | 18.94      | 53.37                | -0.63       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5530 MHz |               |            |

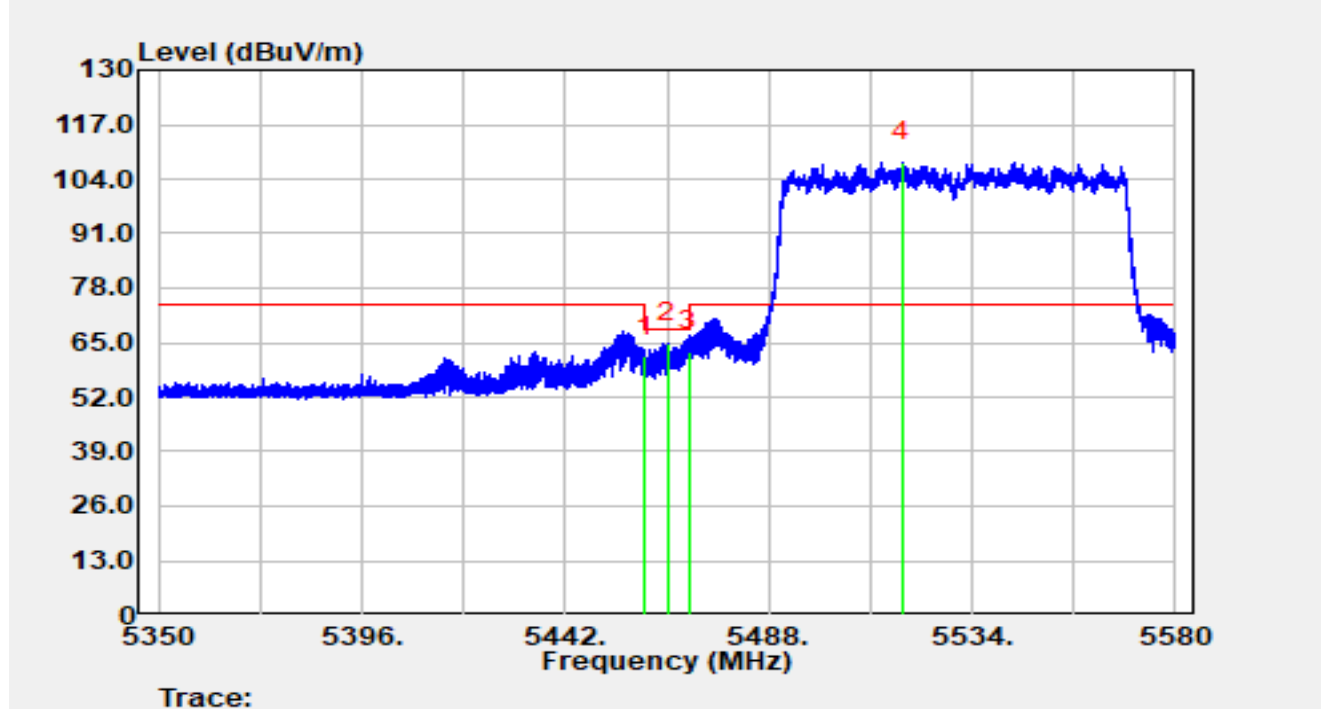


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5460.00         | 42.50          | 19.12      | 61.62                | -6.58       | 68.20          | Peak     |
| 2  | *    | 5465.12         | 45.68          | 19.08      | 64.75                | -3.45       | 68.20          | Peak     |
| 3  |      | 5470.00         | 43.89          | 19.02      | 62.92                | -5.28       | 68.20          | Peak     |
| 4  |      | 5518.04         | 88.96          | 19.04      | 108.01               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5530 MHz |               |            |

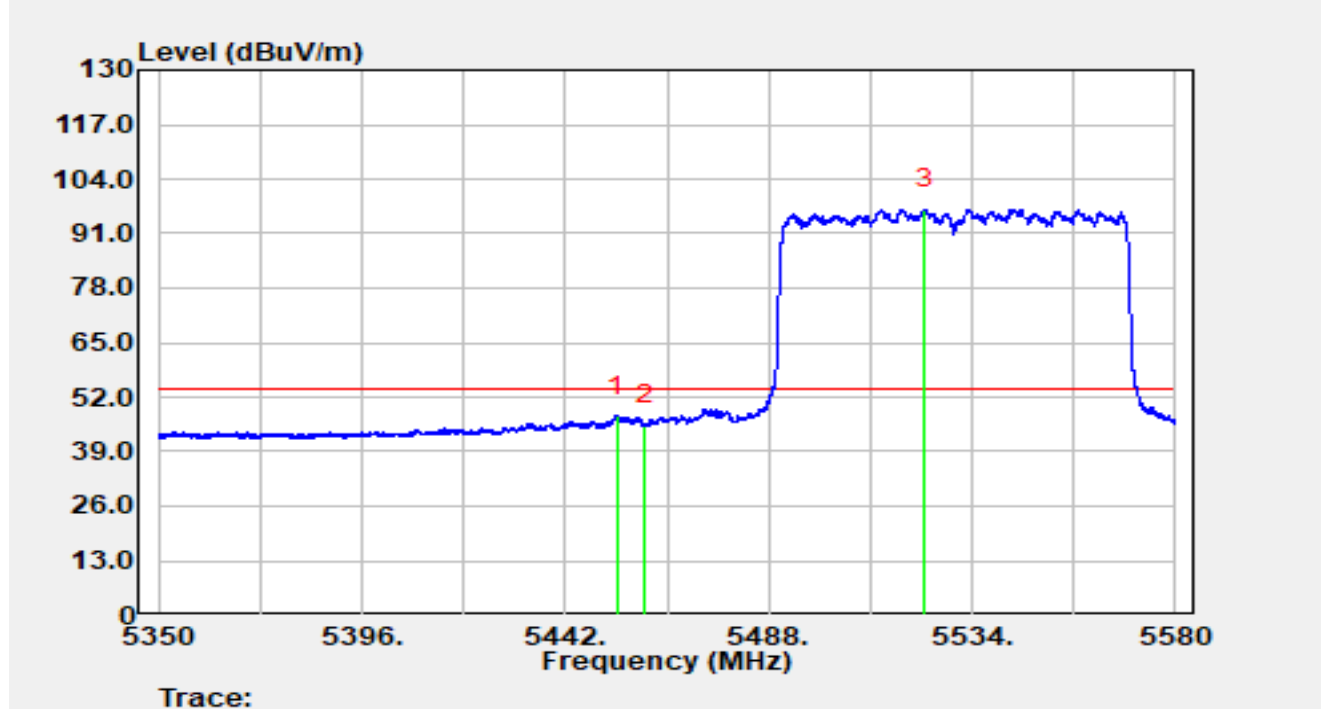


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5453.66         | 28.45          | 19.12      | 47.57                | -6.43       | 54.00          | Average  |
| 2  |      | 5460.00         | 26.22          | 19.12      | 45.34                | -8.66       | 54.00          | Average  |
| 3  |      | 5523.19         | 77.59          | 19.12      | 96.71                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5530 MHz |               |            |

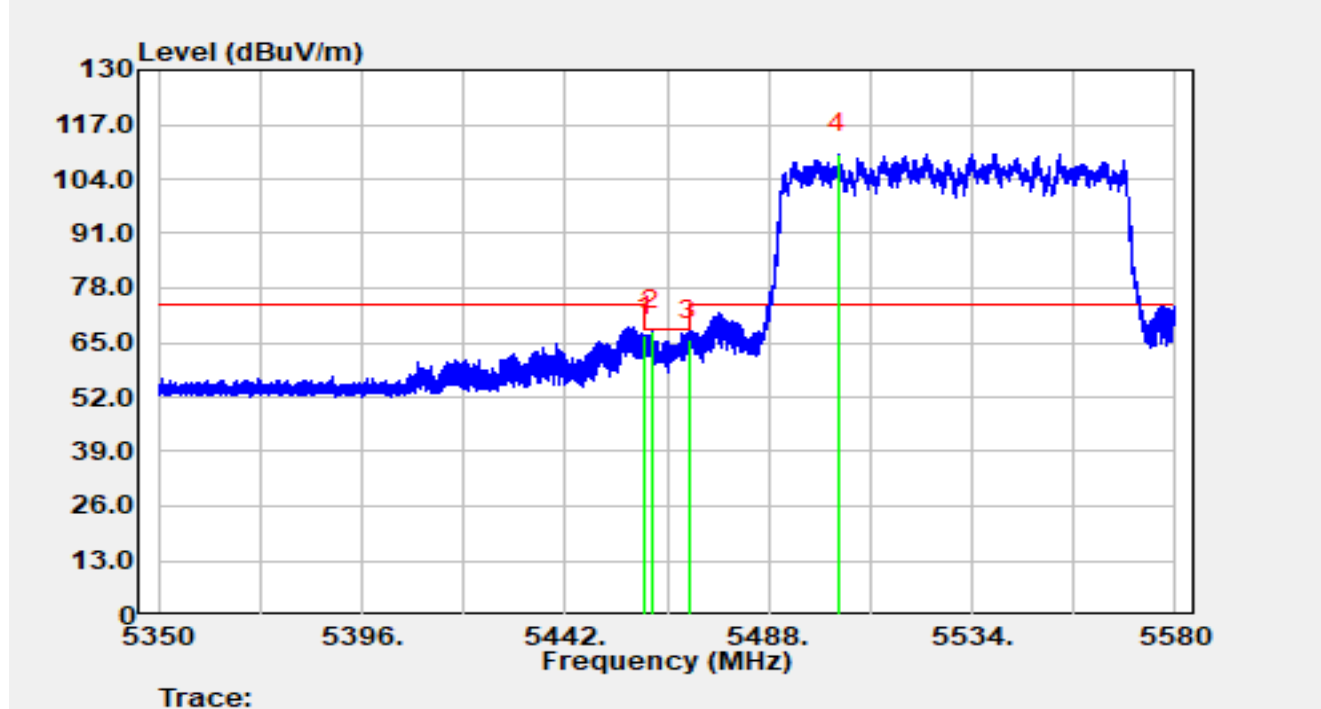


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5460.00         | 47.44          | 19.12      | 66.56                | -1.64       | 68.20          | Peak     |
| 2  | *    | 5461.44         | 48.59          | 19.12      | 67.71                | -0.49       | 68.20          | Peak     |
| 3  |      | 5470.00         | 46.68          | 19.02      | 65.71                | -2.49       | 68.20          | Peak     |
| 4  |      | 5503.78         | 91.01          | 18.91      | 109.93               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5530 MHz |               |            |

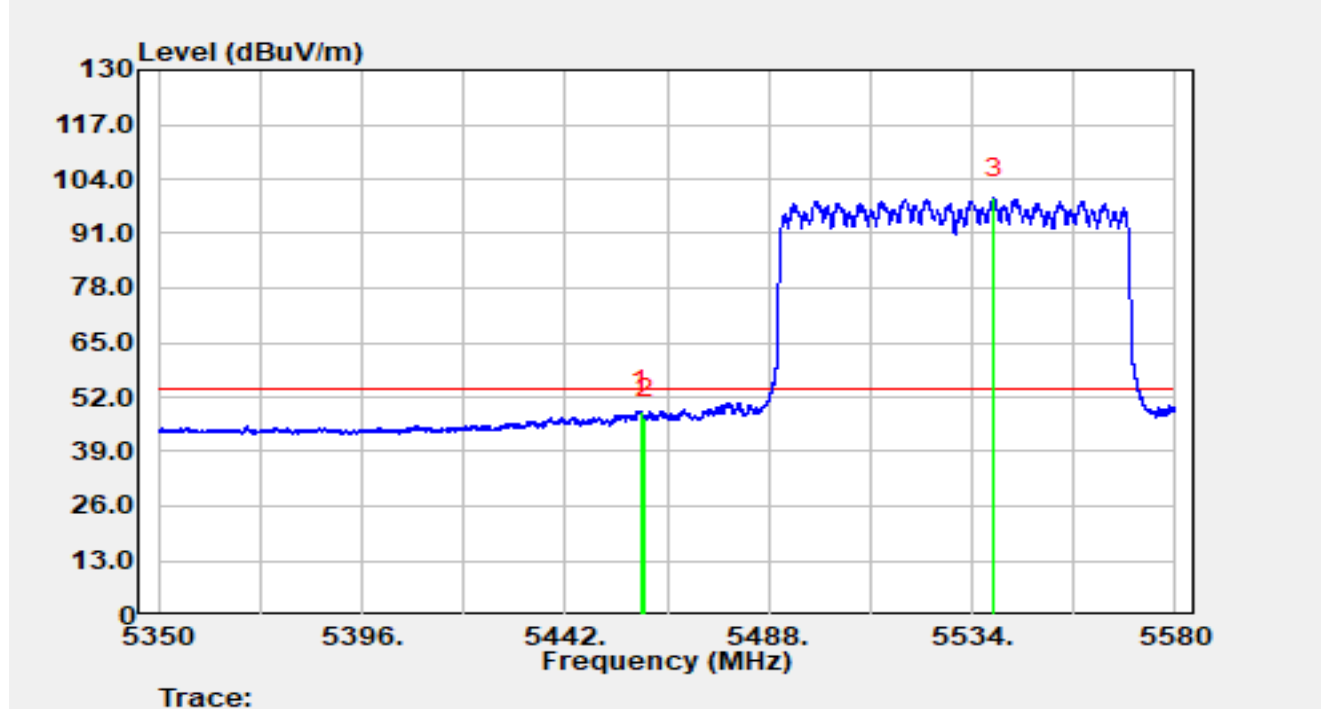


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5459.02         | 29.51          | 19.12      | 48.63                | -5.37       | 54.00          | Average  |
| 2  |      | 5460.00         | 27.80          | 19.12      | 46.92                | -7.08       | 54.00          | Average  |
| 3  |      | 5538.99         | 80.13          | 19.21      | 99.35                | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5610 MHz |               |            |

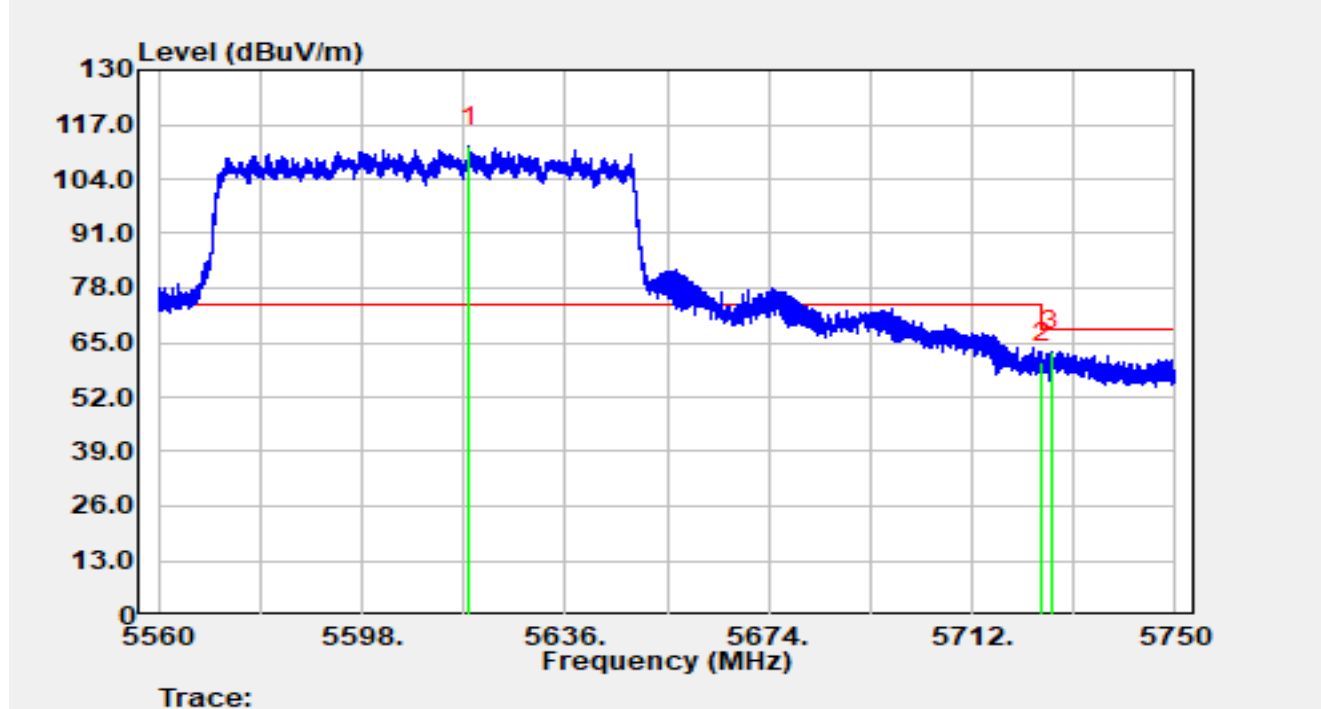


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5618.14         | 91.96          | 19.83      | 111.79               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 39.88          | 20.33      | 60.20                | -8.00       | 68.20          | Peak     |
| 3  | *    | 5726.84         | 42.61          | 20.31      | 62.92                | -5.28       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11be-EHT80 at 5610 MHz |               |            |

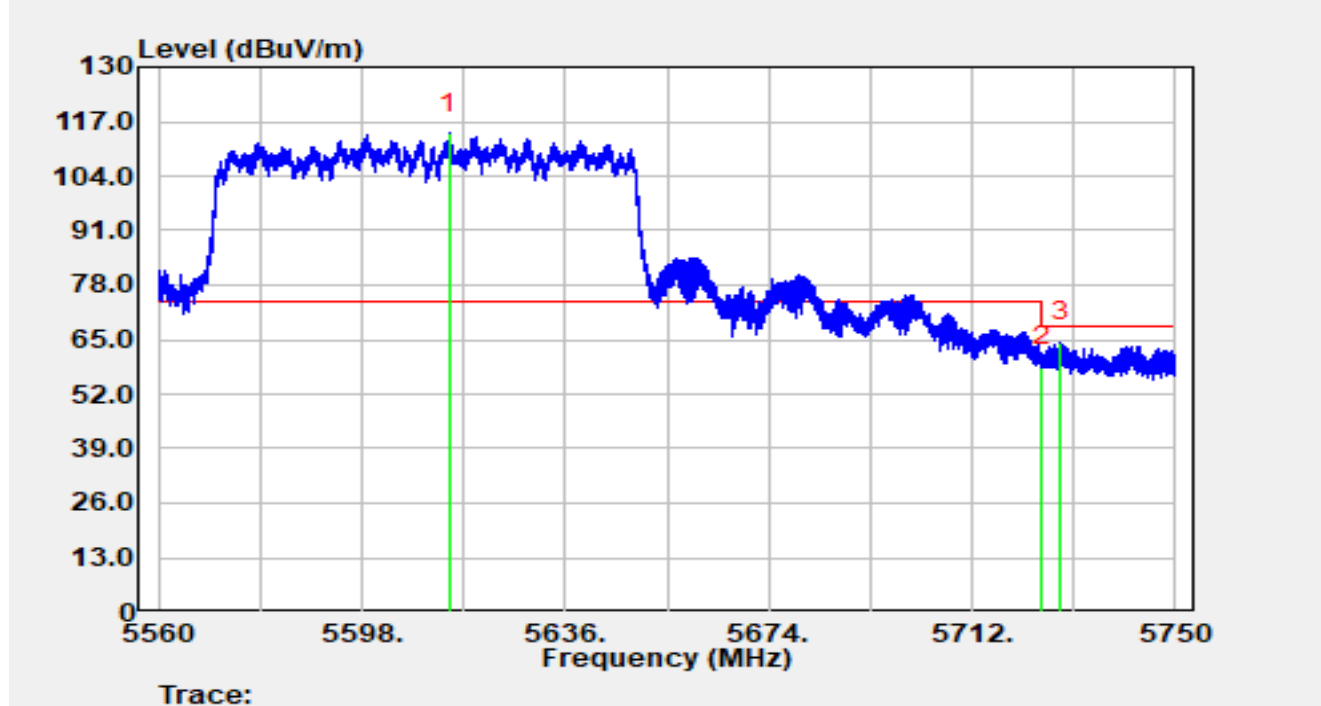


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5614.23         | 94.28          | 19.78      | 114.06               | N/A         | N/A            | Peak     |
| 2  |      | 5725.00         | 38.23          | 20.33      | 58.56                | -9.64       | 68.20          | Peak     |
| 3  | *    | 5728.59         | 44.17          | 20.29      | 64.46                | -3.74       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-08-04 |
| Temperature  | 22.9 °C                                | Humidity      | 40.4%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | By PoE                                 | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11be-EHT80 at 5775 MHz |               |            |

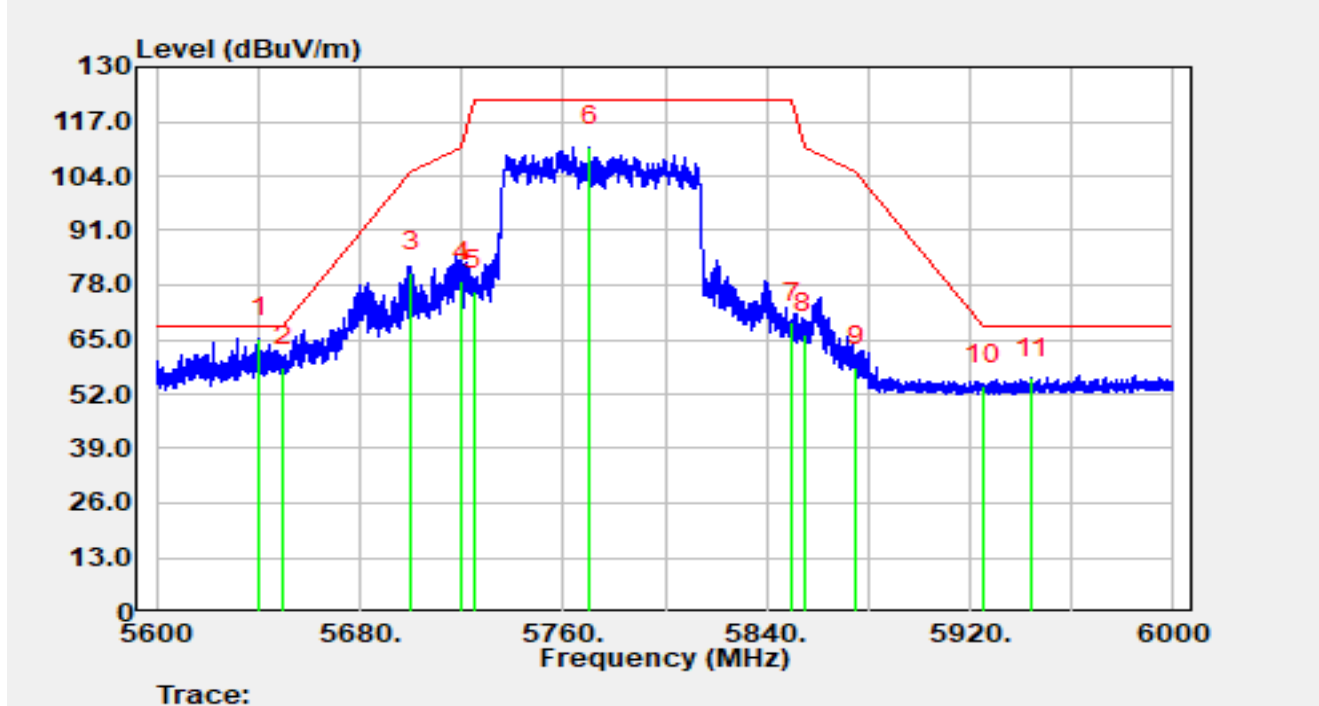

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5640.52         | 45.65          | 19.78      | 65.44                | -2.76       | 68.20          | Peak     |
| 2  |      | 5650.00         | 38.95          | 19.62      | 58.57                | -9.63       | 68.20          | Peak     |
| 3  |      | 5700.00         | 61.05          | 20.14      | 81.19                | -24.01      | 105.20         | Peak     |
| 4  |      | 5720.00         | 58.52          | 20.38      | 78.90                | -31.90      | 110.80         | Peak     |
| 5  |      | 5725.00         | 56.30          | 20.33      | 76.62                | -45.58      | 122.20         | Peak     |
| 6  |      | 5770.16         | 90.86          | 20.18      | 111.04               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 48.72          | 20.30      | 69.01                | -53.19      | 122.20         | Peak     |
| 8  |      | 5855.00         | 45.94          | 20.30      | 66.25                | -44.55      | 110.80         | Peak     |
| 9  |      | 5875.00         | 37.78          | 20.63      | 58.41                | -46.79      | 105.20         | Peak     |
| 10 |      | 5925.00         | 33.45          | 20.59      | 54.04                | -14.16      | 68.20          | Peak     |
| 11 |      | 5944.20         | 35.20          | 20.65      | 55.85                | -12.35      | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).