


Site	WZ-AC2	Test Date	2025-08-04
Temperature	22.9 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

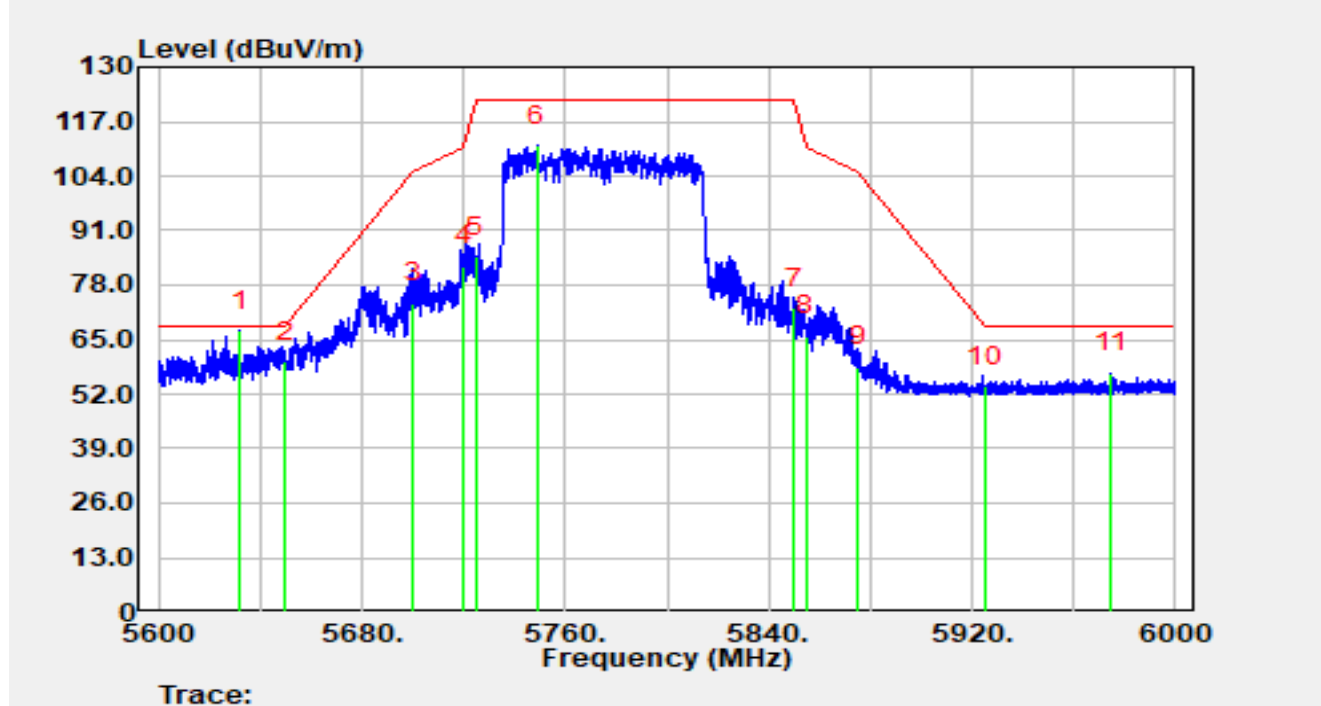


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.88	47.14	19.89	67.03	-1.17	68.20	Peak
2		5650.00	40.16	19.62	59.78	-8.42	68.20	Peak
3		5700.00	53.51	20.14	73.65	-31.55	105.20	Peak
4		5720.00	62.26	20.38	82.64	-28.16	110.80	Peak
5		5725.00	64.42	20.33	84.75	-37.46	122.20	Peak
6		5749.08	91.13	20.06	111.19	N/A	N/A	Peak
7		5850.00	52.09	20.30	72.39	-49.81	122.20	Peak
8		5855.00	45.59	20.30	65.89	-44.91	110.80	Peak
9		5875.00	37.91	20.63	58.54	-46.66	105.20	Peak
10		5925.00	33.14	20.59	53.73	-14.47	68.20	Peak
11		5974.92	36.02	20.92	56.94	-11.26	68.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11be-EHT20 at 5240 MHz		

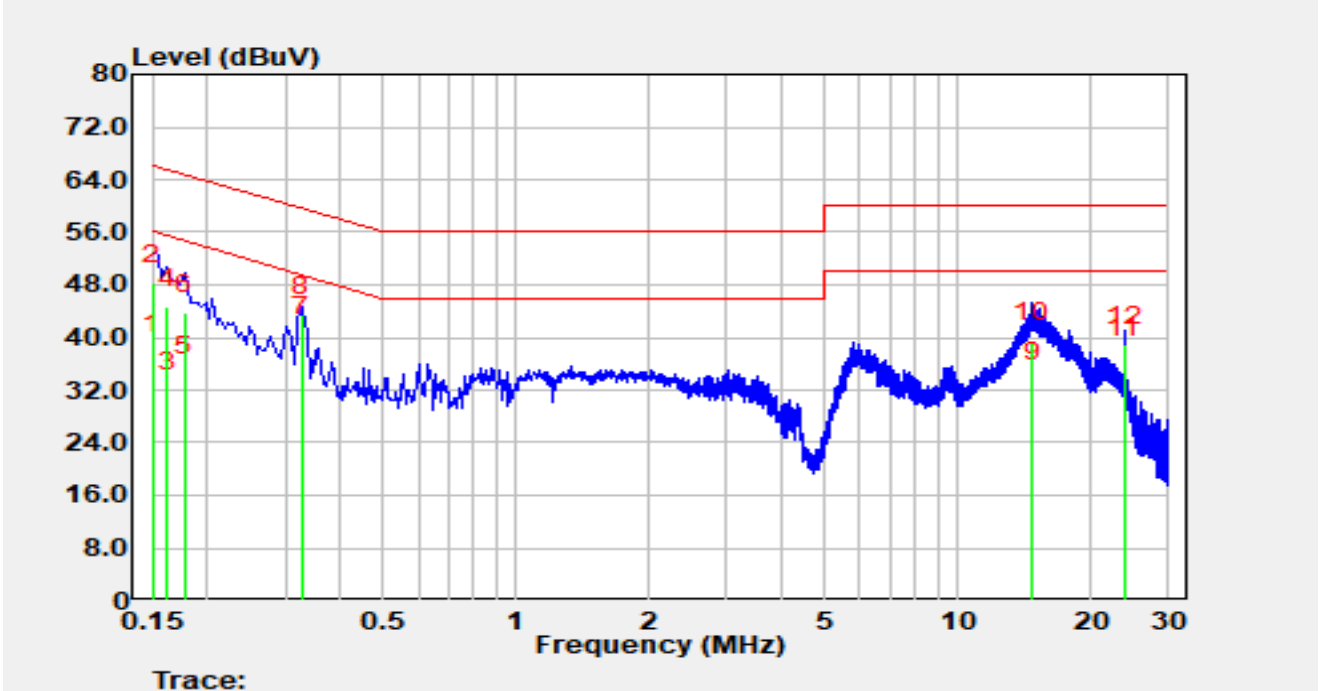


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	28.00	9.67	37.67	-18.33	56.00	Average
2		0.15	38.50	9.67	48.17	-17.83	66.00	QP
3		0.16	22.10	9.67	31.77	-23.59	55.36	Average
4		0.16	35.00	9.67	44.67	-20.69	65.36	QP
5		0.18	24.60	9.68	34.28	-20.30	54.58	Average
6		0.18	34.00	9.68	43.68	-20.90	64.58	QP
7	*	0.33	30.60	9.73	40.33	-9.22	49.55	Average
8		0.33	33.60	9.73	43.33	-16.22	59.55	QP
9		14.73	23.10	10.40	33.50	-16.50	50.00	Average
10		14.73	28.90	10.40	39.30	-20.70	60.00	QP
11		23.90	26.20	10.67	36.87	-13.13	50.00	Average
12		23.90	28.20	10.67	38.87	-21.13	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-08-25
Temperature	28.1 °C	Humidity	58.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11be-EHT20 at 5240 MHz		

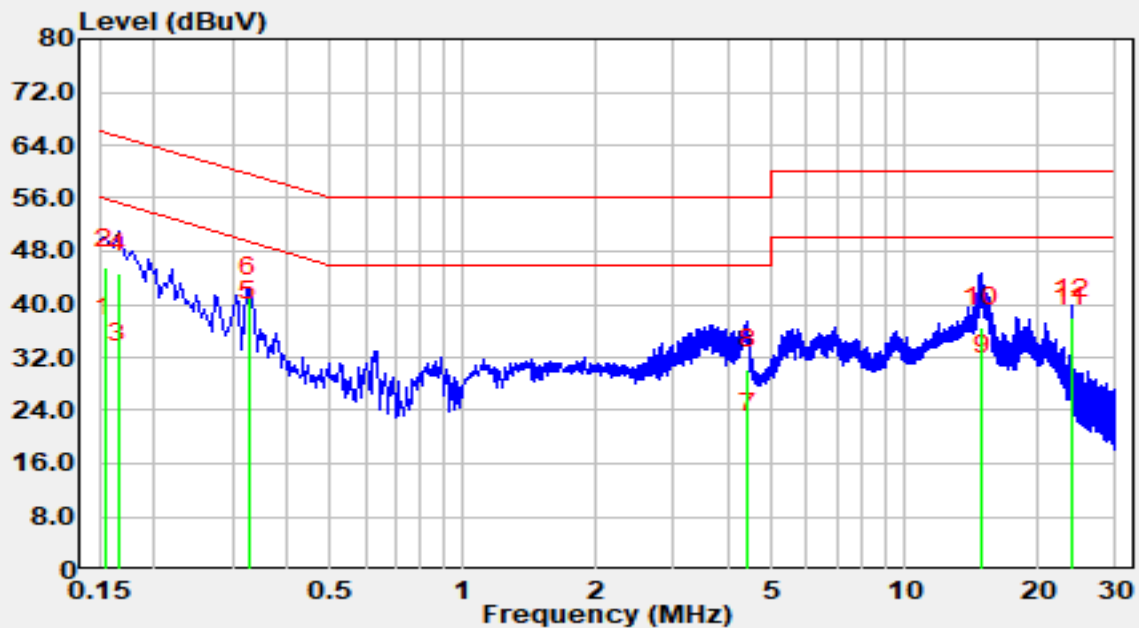

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	25.30	9.79	35.09	-20.69	55.78	Average
2		0.15	35.70	9.79	45.49	-20.29	65.78	QP
3		0.17	21.40	9.79	31.19	-23.96	55.16	Average
4		0.17	35.00	9.79	44.79	-20.36	65.16	QP
5	*	0.33	27.90	9.83	37.73	-11.82	49.55	Average
6		0.33	31.30	9.83	41.13	-18.42	59.55	QP
7		4.40	10.50	10.19	20.69	-25.31	46.00	Average
8		4.40	20.10	10.19	30.29	-25.71	56.00	QP
9		14.95	19.00	10.54	29.54	-20.46	50.00	Average
10		14.95	26.00	10.54	36.54	-23.46	60.00	QP
11		23.90	26.00	10.80	36.80	-13.20	50.00	Average
12		23.90	27.20	10.80	38.00	-22.00	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1034072-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1034072-UE" file.

_____ The End _____