

RRA- EMISS24C182ECH-02Av0

Certification Radio test report

According to the standard:

CFR 47 FCC PART 15

RSS GEN – Issue 5

RSS 247 – Issue 3

Equipment under test:

CRT.0036.915

FCC ID: *2A2B4-36915V3-2*

IC NUMBER: *32334-36915V3*

Company:

E-CHRONOS SA

Distribution: Mr WAELTI Gabriel

(Company: E-CHRONOS SA)

Number of pages: 43 with 2 annexes

Ed.	Date	Modified Page(s)	Technical Verification and Quality Approval	
			Name and Function	Visa
0	18-Jul-24	Creation	J.C. BOGA, Laboratories Manager	

Duplication of this document is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.

Information in italics are declared by the manufacturer/customer and are under his responsibility

DESIGNATION OF PRODUCT: *CRT.0036.915*

Serial number (S/N): *Sample 1: 00372585 / 0033*
Sample 2: 00372566 / 0064

Reference / model (P/N): *CRT.0036.915*

Firmware version: *1.13.5*

MANUFACTURER: *E-CHRONOS SA*

COMPANY SUBMITTING THE PRODUCT:

Company: *E-CHRONOS SA*

Address: *Rue d'Airmont 5,
2900 Porrentruy,
Switzerland*

Responsible: *Mr WAELTI Gabriel*

DATE(S) OF TEST: *From 6-Jun-24 to 8-Jun-24*

TESTING LOCATION: *EMITECH LYON laboratory at CHASSIEU (69) FRANCE*

*FCC Accredited under US-EU MRA Designation Number: FR0013
Test Firm Registration Number: 807590*

*ISED Accredited under CANADA-EU MRA Designation Number: FR0007
Industry Canada Registration Number: 4379D*

TESTED BY: *T. LEDRESSEUR*

VISA:

A handwritten signature in black ink, appearing to be "T. LEDRESSEUR", written over a horizontal line.

WRITTEN BY: *T. LEDRESSEUR*

CONTENTS

TITLE	PAGE
1. INTRODUCTION	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE	5
4. TEST METHODOLOGY	6
5. TEST EQUIPMENT CALIBRATION DATES	7
6. TESTS RESULTS SUMMARY	8
7. MEASUREMENT UNCERTAINTY	10
8. AC CONDUCTED EMISSIONS.....	11
9. OCCUPIED BANDWIDTH	14
10. BAND EDGE	21
11. CONDUCTED OUTPUT POWER	25
12. RADIATED SPURIOUS EMISSIONS	27
13. PEAK CONDUCTED POWER SPECTRAL DENSITY	37
APPENDIX 1: TEST EQUIPMENT LIST	41
APPENDIX 2: RADIATED TEST SETUP	43

REVISIONS HISTORY

Revision	Date	Modified pages	Modifications
0	25-Jun-24	/	Creation

1. INTRODUCTION

This report presents the results of radio test carried out on the following radio equipment: **CRT.0036.915**, in accordance with normative reference.

The equipment under test is a LoRa radio module

2. PRODUCT DESCRIPTION

Category of equipment (ISED): I

Class: B

Utilization: Residential use

Antenna type and gain: Four different antenna can be used:

Type	Gain
$\frac{1}{2} \lambda$ whip antenna	2.15 dBi
Omni-directional antenna	3 dBi
Patch antenna (PCB)	1.9 dBi
Internal ceramic antenna	2.15 dBi

Operating frequency range: From 902 MHz to 928 MHz

Number of channels: 20

Channel spacing: 1.288MHz

Modulation parameters: SF=9, BW=500k, CR=2

Power source: 3.3 Vdc

Test frequencies:

Frequencies tested:

Sample N°= 1 $\Rightarrow$ 902.764 MHz Full tests

Sample N°= 1 $\Rightarrow$ 915.644 MHz Full tests

Sample N°= 1 $\Rightarrow$ 927.236 MHz Full tests

Power level, frequency range and channels characteristics are not user adjustable.
The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below.

They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

CFR 47 FCC Part 15 (2024) Radio Frequency Devices

ANSI C63.10 2013
Procedures for Compliance Testing of Unlicensed Wireless Devices.

558074 D01 15.247 Meas Guidance v05r02
Guidance for compliance measurements on digital transmission system,
frequency hopping spread spectrum system, and hybrid system devices
operating under section 15.247 of the FCC rules.

RSP-100 Issue 12, August 2019
Certification of Radio Apparatus and Broadcasting equipment

RSS-Gen Issue 5, April 2018
General Requirements for Compliance of Radio Apparatus

RSS-247 Issue 3, August 2023
Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs)
and Licence-Exempt Local Area Network (LE-LAN) Devices

4. TEST METHODOLOGY

Radio performance tests procedures given in CFR 47 part 15:

Subpart C – Intentional Radiators

- Paragraph 203: Antenna requirement
- Paragraph 205: Restricted bands of operation
- Paragraph 207: Conducted limits
- Paragraph 209: Radiated emission limits; general requirements
- Paragraph 212: Modular transmitter
- Paragraph 215: Additional provisions to the general radiated emission limitations
- Paragraph 247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Radio performance tests procedures given in RSS-Gen:

- Paragraph 2 - General
- Paragraph 3 - Normative publications and related documents
- Paragraph 4 - Labelling requirements
- Paragraph 6 - General administrative and technical requirements
- Paragraph 8 - Licence-exempt Radio Apparatus

Radio performance tests procedures given in RSS-247:

- Paragraph 3 - Certification requirements
- Paragraph 4 - Measurement method
- Paragraph 5 - Standard specifications for frequency hopping systems and digital transmission systems operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

5. TEST EQUIPMENT CALIBRATION DATES

Emitech Number	Model	Type	Last calibration	Calibration interval (years)	Next calibration due
0	BAT-EMC V3.18.0.26	Software	/	/	/
5609	EMCO 3146A	Log periodic antenna	14/12/2021	3	14/12/2024
6118	Rohde et Schwarz HK116	Biconical antenna	14/12/2021	3	14/12/2024
6217	Rohde & Schwarz ESH3-Z5	LISN	27/07/2023	1	27/07/2024
6290	HAEFELY PHF555	Power source	(1)	(1)	(1)
6970	Schwarzbeck BBHA 9120D	Antenna	16/12/2021	3	16/12/2025
7564	La Crosse Technology WS-9232	Meteo station	09/06/2023	2	09/06/2025
7651	SIDT Cage	Anechoic chamber	/	/	/
8590	AEMC N-6m	Cable	23/02/2023	2	23/02/2025
10262	Agilent Technologies 8449B	Low-noise amplifier	27/02/2024	1	27/02/2025
10952	Agilent 34401A	Multimeter	21/07/2023	2	21/07/2025
11316	Agilent N9010A	Receiver	05/09/2023	1	05/09/2024
11588	Rohde et Schwarz NRP-Z86	Power Sensor	07/03/2024	2	07/03/2026
11855	EMITECH	Outside room	/	/	/
12492	Weinschel 10dB 18GHz 2W	Attenuator	26/02/2024	3	26/02/2027
15775	RFPA INT-BA011000-25	Low-noise amplifier	29/02/2024	1	29/02/2025
15776	Rohde & Schwarz FSV40	Spectrum Analyzer	22/02/2024	1	22/02/2025
15790	Testo 608-H1	Meteo station	20/11/2023	1	20/11/2024
15892	HUBER et SUHNER N 18GHz 3m	Cable	31/05/2023	2	31/05/2025
15893	HUBER et SUHNER SMA 18GHz 3m	Cable	31/05/2023	2	31/05/2025
15916	HUBER et SUHNER SMA 18GHz 3.5m	Cable	31/05/2023	2	31/05/2025
15933	HUBER et SUHNER SMA 18GHz 5m	Cable	31/05/2023	2	31/05/2025
16115	Agilent 6655A	Power source	(1)	(1)	(1)
17207	COM-POWER LIT-930A	Transient limiter	02/09/2021	3	02/09/2024
17829	Emitech	Absorber sheath current	01/06/2023	2	01/06/2025
19038	YUN Micro Electronics MH1000-15000-17CS	High pass filter	28/04/2023	3	28/04/2026
///	Rohde et Schwarz Power Viewer Plus V5.9	Software	/	/	/

(1) The equipment is not verified; instead, the output voltage is checked before each measurement with the calibrated multimeter.

6. TESTS RESULTS SUMMARY

6.1 CFR 47 part 15 requirements

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAP	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS	X				
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				Note 2
FCC Part 15.212	MODULAR TRANSMITTERS	X				Note 3
FCC part 15.215	ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS					
	(a) Alternative to general radiated emission limits	X				
	(b) Unwanted emissions outside of §15.247 frequency bands	X				Note 4
	(c) 20 dB bandwidth and band-edge compliance	X				
FCC Part 15.247	OPERATION WITHIN THE BANDS 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz					
	(a) (1) Hopping systems			X		
	(a) (2) Digital modulation techniques	X				
	(b) Maximum peak output power	X				
	(c) Operation with directional antenna gains > 6 dBi			X		
	(d) Intentional radiator	X				
	(e) Peak power spectral density	X				
	(f) Hybrid system			X		
	(g) Frequency hopping requirements			X		
	(h) Frequency hopping intelligence			X		
	(i) RF exposure compliance	X				

NAP: Not Applicable

NAs: Not Asked

Note 1: Radio module

Note 2: See FCC part 15.247 (d).

Note 3: Single modular transmitter.

Note 4: See FCC part 15.209. Unwanted emissions levels are all below the fundamental emission field strength level.

6.2 RSS-Gen requirements

Test procedure	Description of test	Criteria respected ?				Comment
		Yes	No	NAp	NAs	
Paragraph 8	Licence-exempt radio apparatus					
§ 8.1	Measurement Bandwidths and Detector Functions	X				
§ 8.2	Pulsed operation	X				
§ 8.3	Prohibition of amplifiers	X				
§ 8.4	User manual notice	X				see certification documents
§ 8.5	Measurement of licence-exempt devices on-site (in-situ)			X		
§ 8.6	Operating frequency range of devices in master/slave networks	X				
§ 8.7	Radio frequency identification (RFID) devices			X		
§ 8.8	AC power line conducted emissions limits	X				
§ 8.9	Transmitter emission limits	X				
§ 8.10	Restricted frequency bands	X				
§ 8.11	Frequency stability			X		

NAP: Not Applicable

NAs: Not Asked

6.3 RSS-247 requirements

Test Procedure RSS-247	Description of test	Criteria respected ?				Comment
		Yes	No	NAp	NAs	
Paragraph 5	Standard specifications for frequency hopping system and digital transmission systems operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz					
5.1	Frequency hopping systems (FHSS)			X		
5.2	Digital transmission systems	X				
5.3	Hybrid systems			X		
5.4	Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements	X				
5.5	Unwanted emissions	X				

NAP: Not Applicable

NAs: Not Asked

7. MEASUREMENT UNCERTAINTY

To declare, or not, the compliance with the specifications, it was not explicitly taken into account of uncertainty associated with the result(s)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for normal distribution corresponds to a coverage probability of approximately 95%.

Parameter	Emitech Uncertainty
RF power, conducted	$\pm 0.8\text{dB}$
Radiated emission valid to 26 GHz	
9kHz – 30MHz	$\pm 2.7\text{ dB}$
30MHz – 1GHz	$\pm 5.0\text{ dB}$
1GHz – 18GHz	$\pm 5.3\text{ dB}$
18GHz – 40GHz	$\pm 6.1\text{ dB}$
AC Power Lines conducted emissions	$\pm 3.4\text{ dB}$
Temperature	$\pm 1\text{ }^{\circ}\text{C}$
Humidity	$\pm 5\%$

8. AC CONDUCTED EMISSIONS

Temperature (°C) : 20 to 28

Humidity (%HR): 37 to 45

Date : June 6, 2024 to
June 8, 2024

Technician : T. LEDRESSEUR

Standard: FCC Part 15
RSS-Gen

Test procedure:

For FCC Part 15: Paragraph 15.207


For RSS-Gen: Paragraph 8.8

Method of paragraph 6.2 of ANSI C63.10

Software used: BAT-EMC V3.18.0.26

Test set up:

The EUT is isolated and placed on a wooden table, 0.8 m over an horizontal reference plane and 0.4 m from a vertical reference plane. It is powered by an artificial main network placed on the ground reference plane. The equipment is powered with the AC power operating voltage of 120 V / 60 Hz.

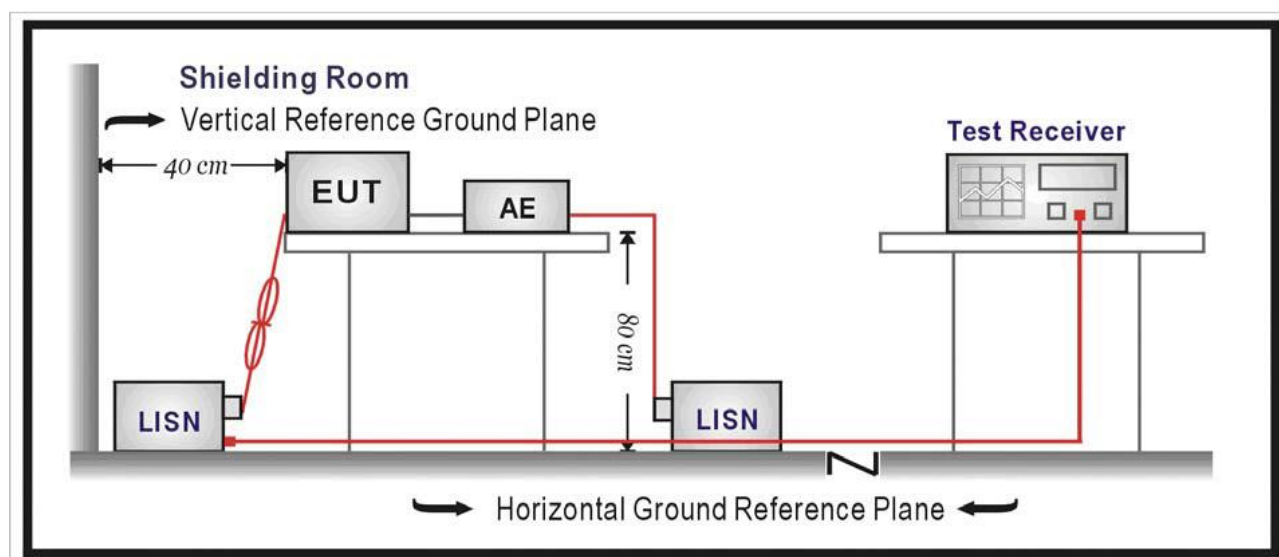

Frequency range: 150 kHz - 30 MHz

Detection mode: Peak / Quasi-peak / Average

Bandwidth: 10 kHz / 9 kHz

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.


Results:

Sample N° 1: Realized only with internal antenna


Measurement on the mains power supply:

The measurement is first realized with peak detector.

Curve N° 1: measurement on the Neutral with peak detector

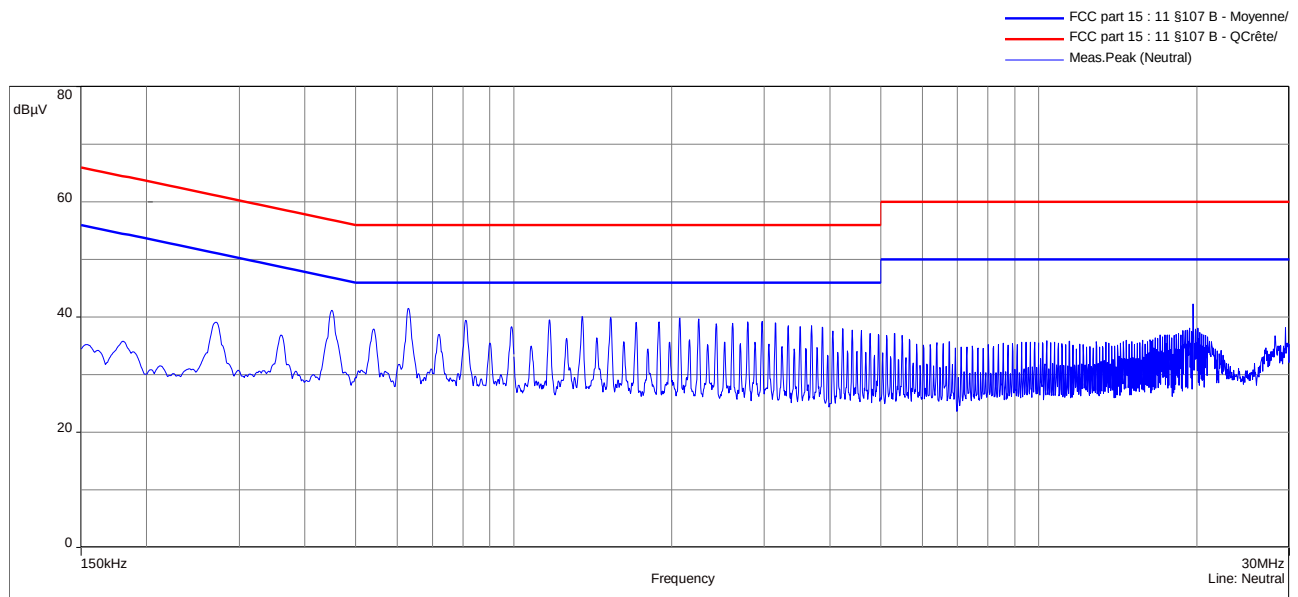

Curve N° 2: measurement on the Line with peak detector

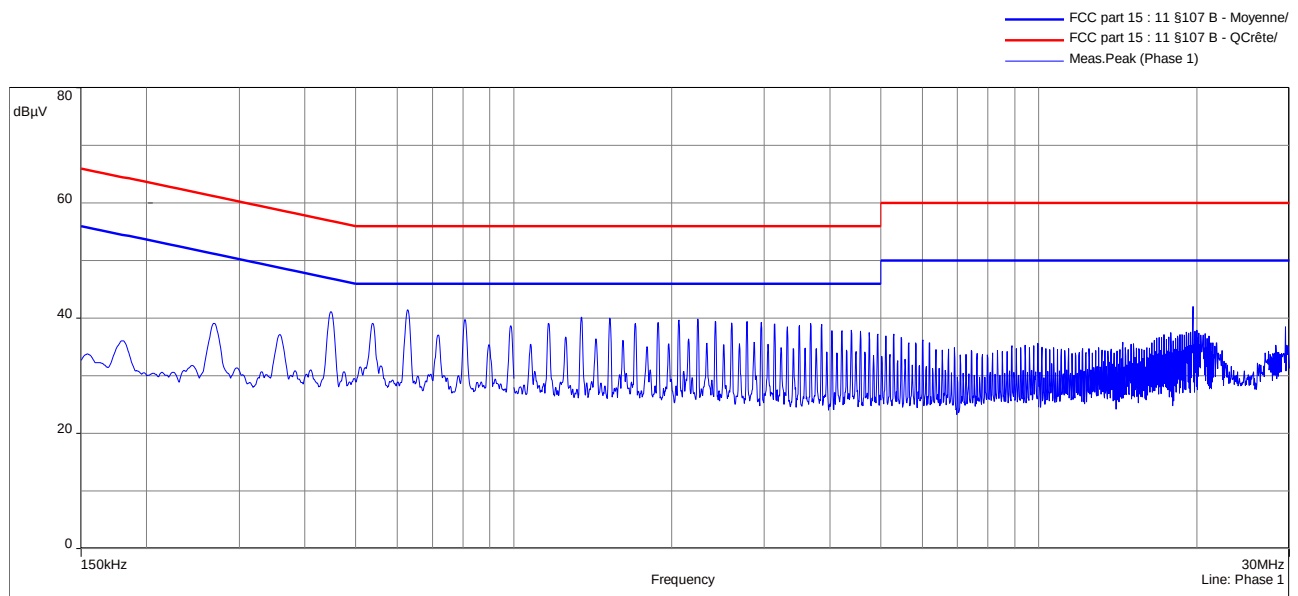

The 6 most critical emissions are indicated below.

Table N° 1: measurement on the Neutral, for the frequency range:

Frequency	Quasi-peak	QP Limit	QP margin	Frequency	Average	Average Limit	Average margin
(MHz)	(dBμV)	(dBμV)	(dB)	(MHz)	(dBμV)	(dBμV)	(dB)
0.450	36.53	56.9	20.34	0.450	36.32	46.9	10.55
0.630	0	56.0	56.00	0.630	34.41	46.0	11.59
1.351	0	56.0	56.00	1.351	32.89	46.0	13.11
1.530	0	56.0	56.00	1.530	32.85	46.0	13.15
2.071	0	56.0	56.00	2.071	29.24	46.0	16.76
2.250	0	56.0	56.00	2.250	28.36	46.0	17.64

Table N° 2: measurement on the Line, for the frequency range:

Frequency	Quasi-peak	QP Limit	QP margin	Frequency	Average	Average Limit	Average margin
(MHz)	(dBμV)	(dBμV)	(dB)	(MHz)	(dBμV)	(dBμV)	(dB)
0.449	39.45	56.9	17.45	0.449	39.28	46.9	7.62
0.628	38.77	56.0	17.23	0.628	38.7	46.0	7.30
0.808	35.99	56.0	20.01	0.808	35.93	46.0	10.07
1.346	34.06	56.0	21.94	1.346	34.14	46.0	11.86
2.242	29.32	56.0	26.68	2.242	28.96	46.0	17.04
3.678	28.56	56.0	27.44	3.678	27.99	46.0	18.01

Test conclusion:

RESPECTED STANDARD

9. OCCUPIED BANDWIDTH

Temperature (°C) : 20 to 28

Humidity (%HR): 37 to 45

Date : June 6, 2024 to
June 8, 2024

Technician : T. LEDRESSEUR

Standard: FCC Part 15
RSS-247


Test procedure:

Method of paragraphs 11.8 of ANSI C63.10 (6dB Measurement)

Method of paragraphs 6.9.3 of ANSI C63.10 (99% Measurement)

Test set up:

Conducted test

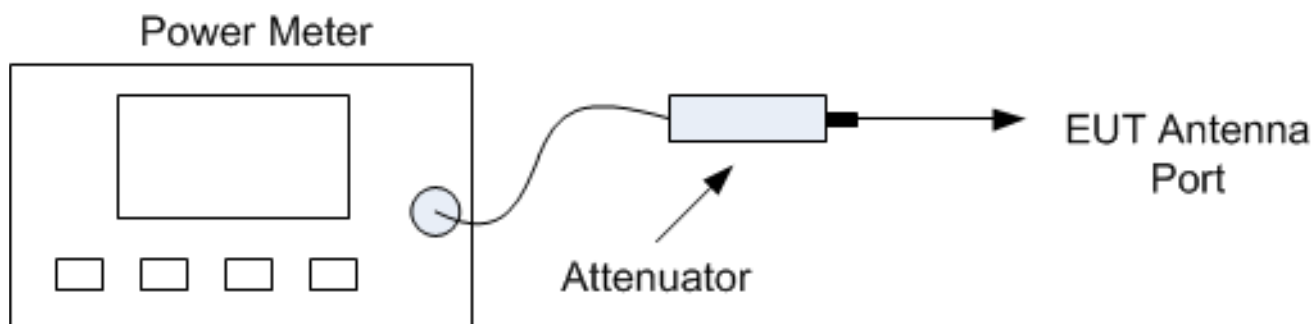

Setting:

Measure	6dB	99%
Center frequency	The centre frequency of the channel under test	
Detector	Peak	
Span	2 to 5 times the OBW	1.5 to 5 times the OBW
RBW	100kHz	1% to 5% of the OBW
VBW	300kHz	3 x RBW
Trace	Max hold	
Sweep	Auto	

Test operating condition of the equipment:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Power source: 3.3 Vdc by an external power supply


Percentage of voltage variation during the test (%):

± 1


Results:

Sample N° 1


6dB bandwidth – Channel 902.764 MHz

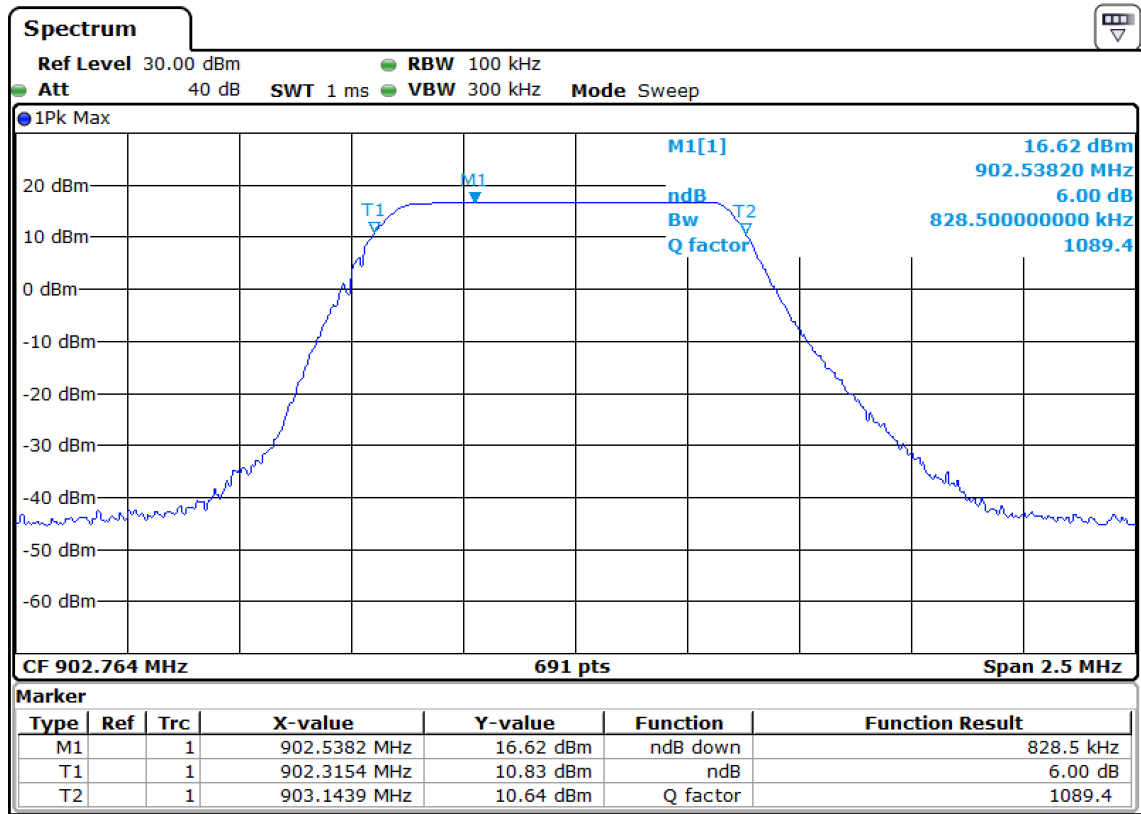

6dB bandwidth – Channel 915.644 MHz

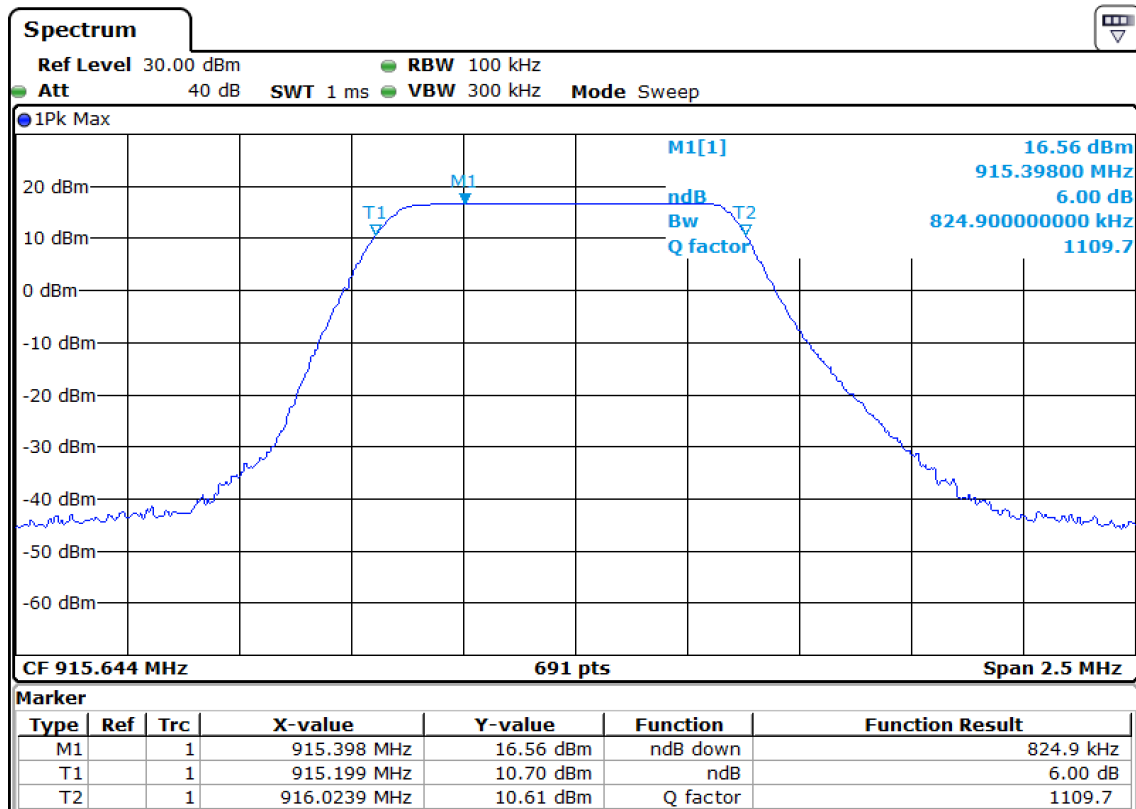


6dB bandwidth – Channel 927.236 MHz

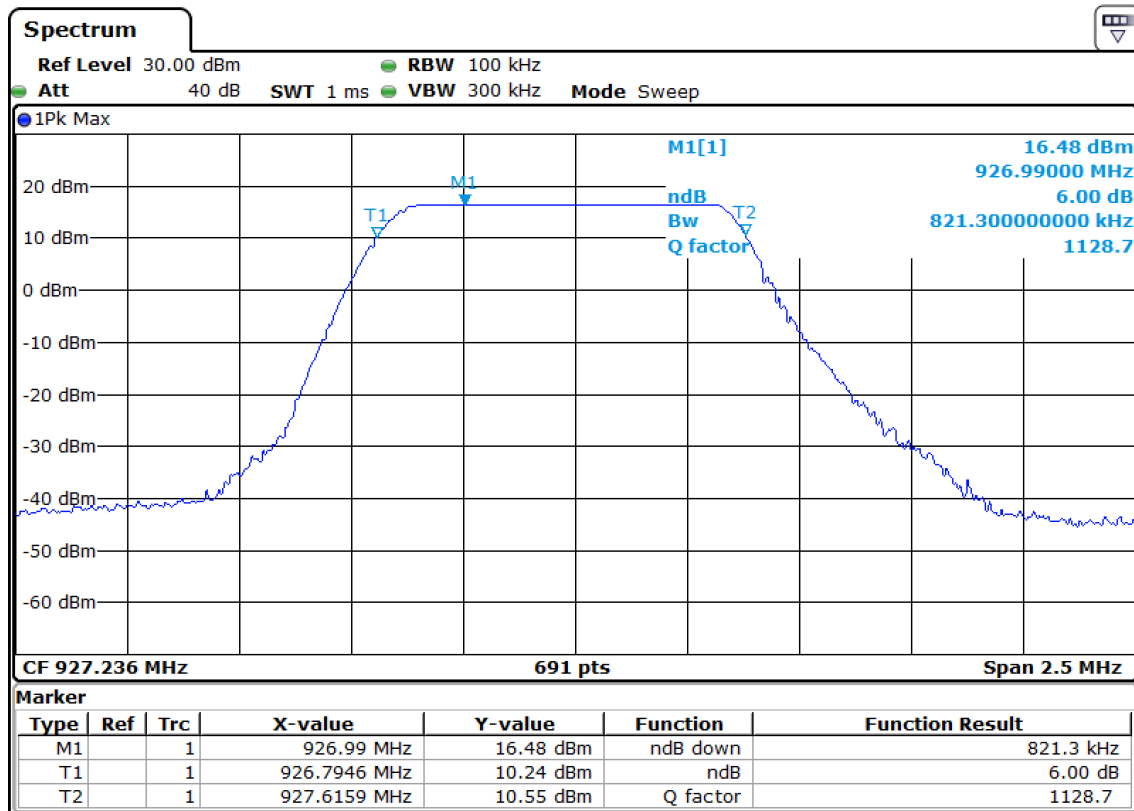


Limit:

Shall be at least 500 kHz


99% bandwidth – Channel 902.764 MHz

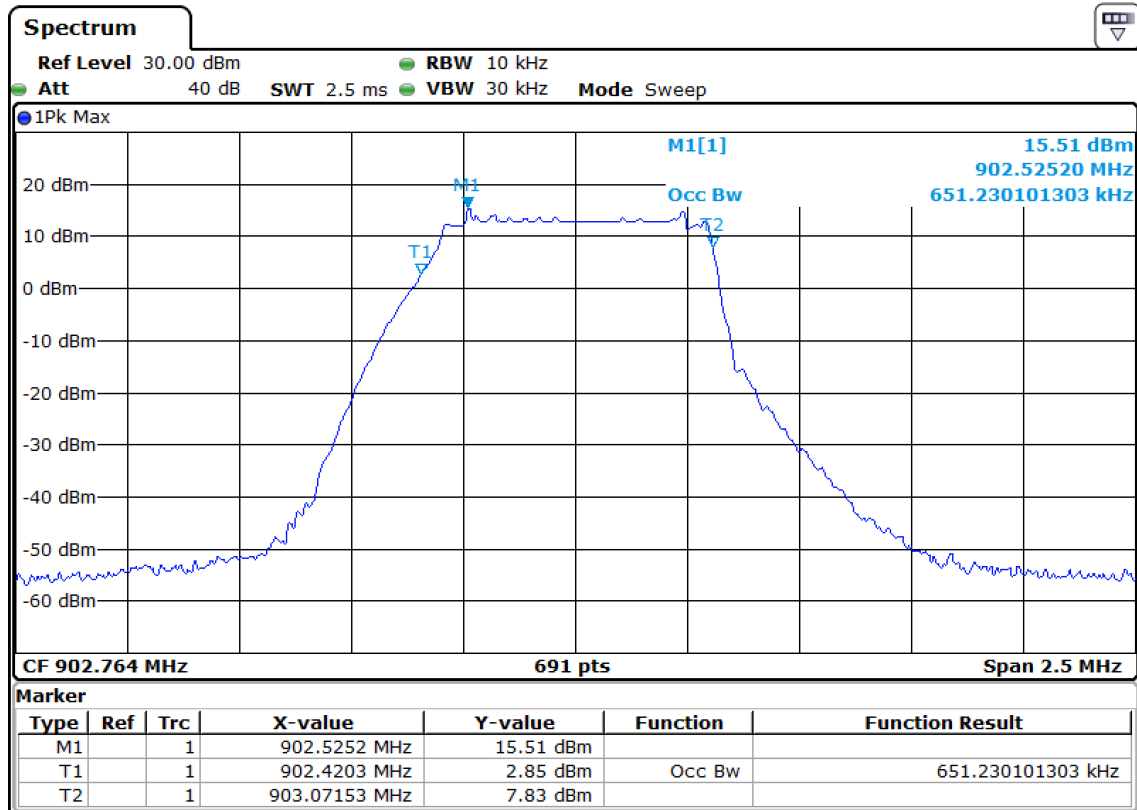

99% bandwidth – Channel 915.644 MHz

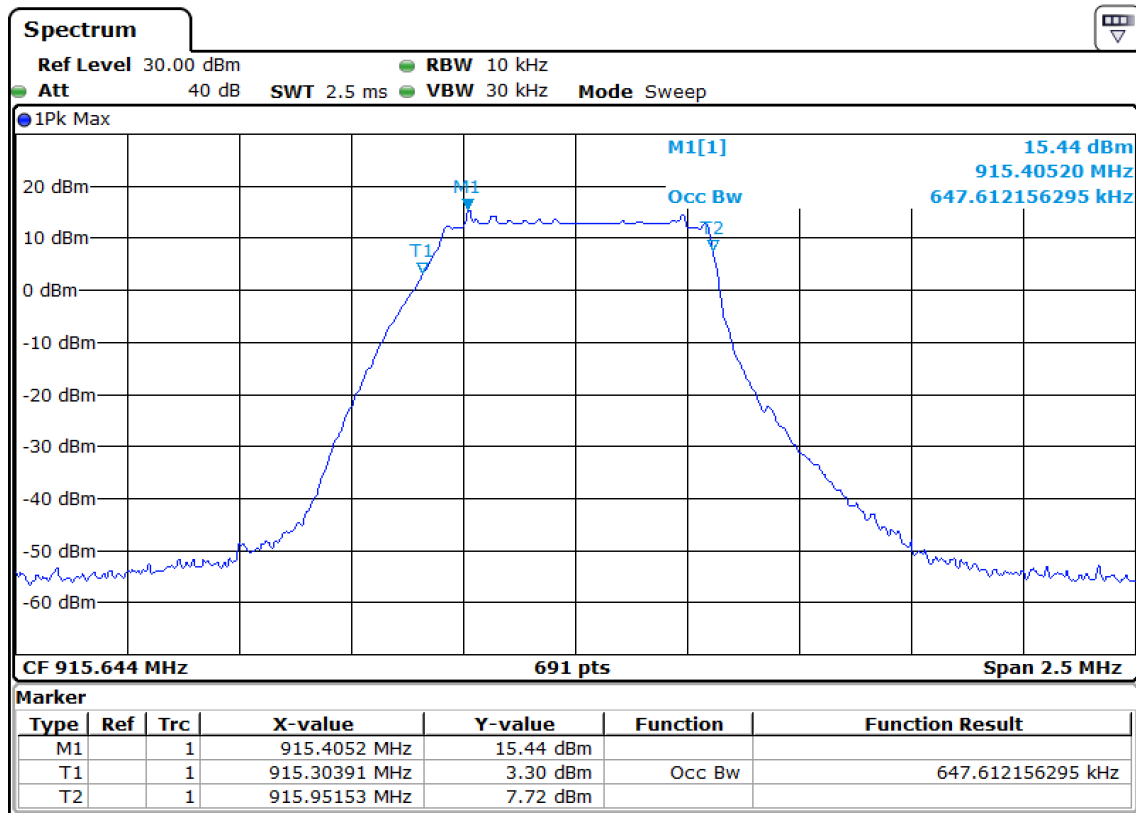

99% bandwidth – Channel 927.236 MHz

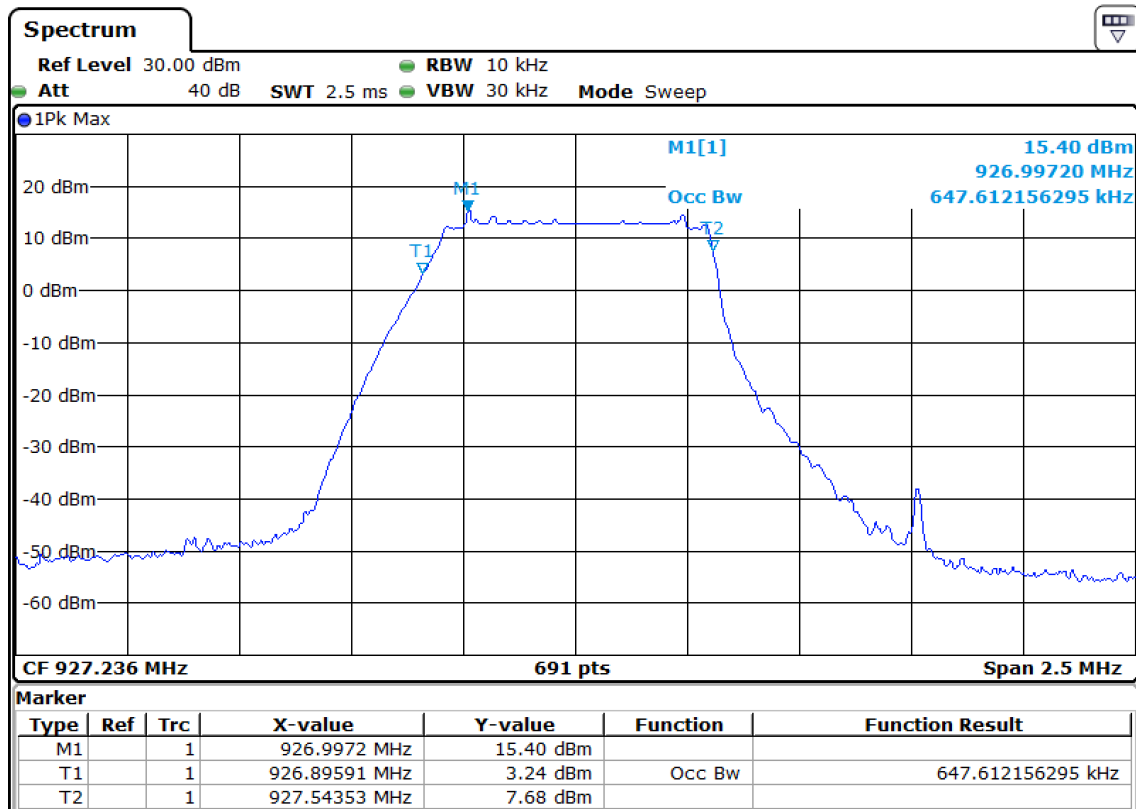

Measure realized for reporting only

Test conclusion:

RESPECTED STANDARD

10. BAND EDGE

Temperature (°C) : 20 to 28

Humidity (%HR): 37 to 45

Date : June 6, 2024 to
June 8, 2024

Technician : T. LEDRESSEUR


Standard: FCC Part 15
RSS-247

Test procedure:

Method of paragraph 11.13.2 of ANSI C63.10

Method of paragraph 11.13.3 of ANSI C63.10

Test set up:

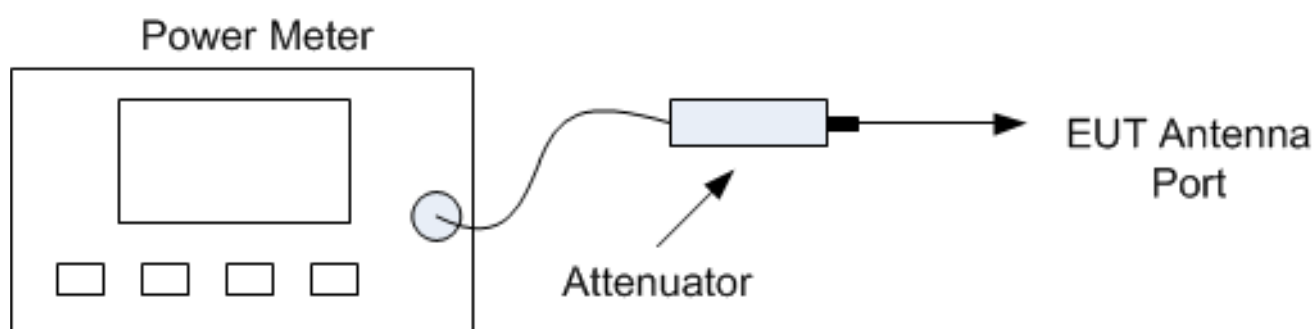

Test operating condition of the equipment:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Power source: 3.3 Vdc by an external power supply

Percentage of voltage variation during the test (%):

± 1

Results:


Lower Band Edge: From 900 MHz to 902 MHz

Upper Band Edge: From 928 MHz to 930 MHz

Sample N° 1 Channel F = 902.764 MHz

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB) (1)	Field Strength Level of fundamental (dBμV)	Limit (dBc)	Margin (dB)
902.764	124.045	Peak	901.975	55.552	68.492	-30	25.552
902.764	124.045	Peak	928.05	83.087	40.953	-30	53.087


(1) Marker-Delta method

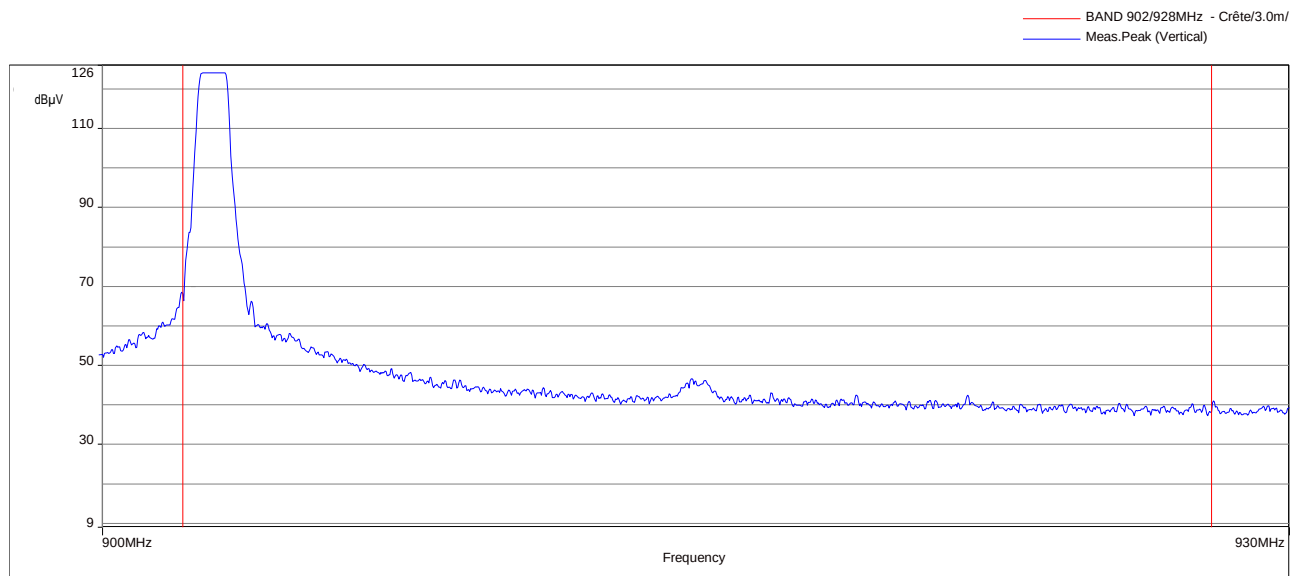

Channel F = 915.644 MHz

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB) (1)	Field Strength Level of fundamental (dBμV)	Limit (dBc)	Margin (dB)
915.644	123.97	Peak	901.725	82.554	41.418	-30	53.554
915.644	123.97	Peak	928.025	78.741	45.23	-30	48.741


(1) Marker-Delta method

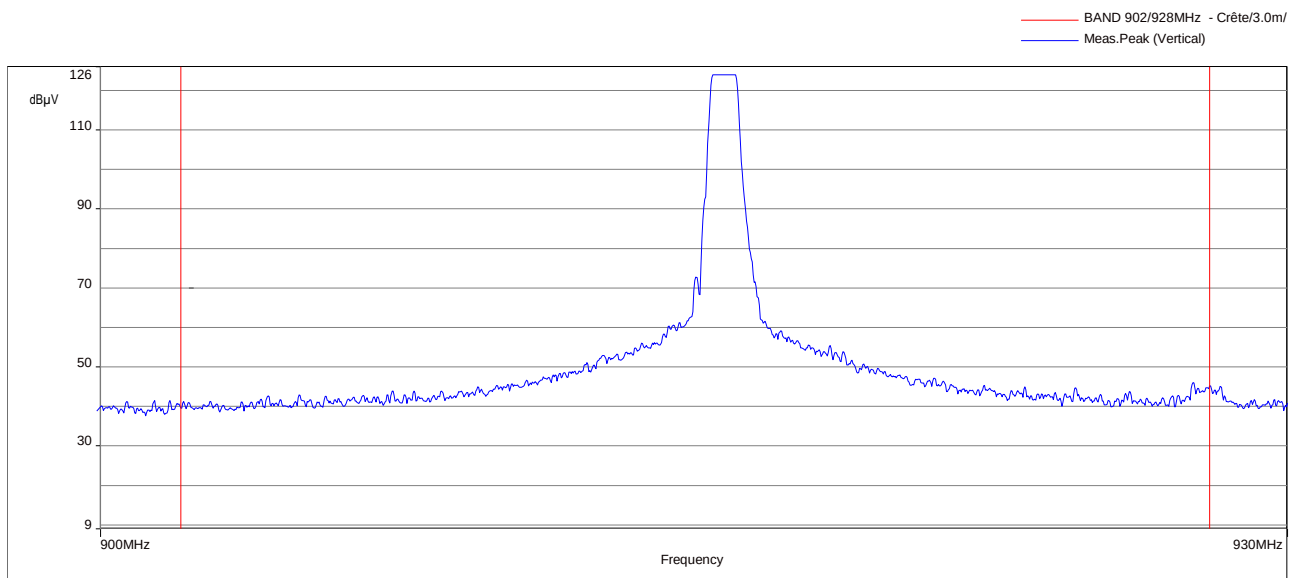

Channel F = 927.236 MHz

Fundamental frequency (MHz)	Field Strength Level of fundamental (dBμV)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB) (1)	Field Strength Level of fundamental (dBμV)	Limit (dBc)	Margin (dB)
927.236	123.908	Peak	901.525	85.632	38.276	-30	55.632
927.236	123.908	Peak	928	53.688	70.220	-30	23.688

(1) Marker-Delta method

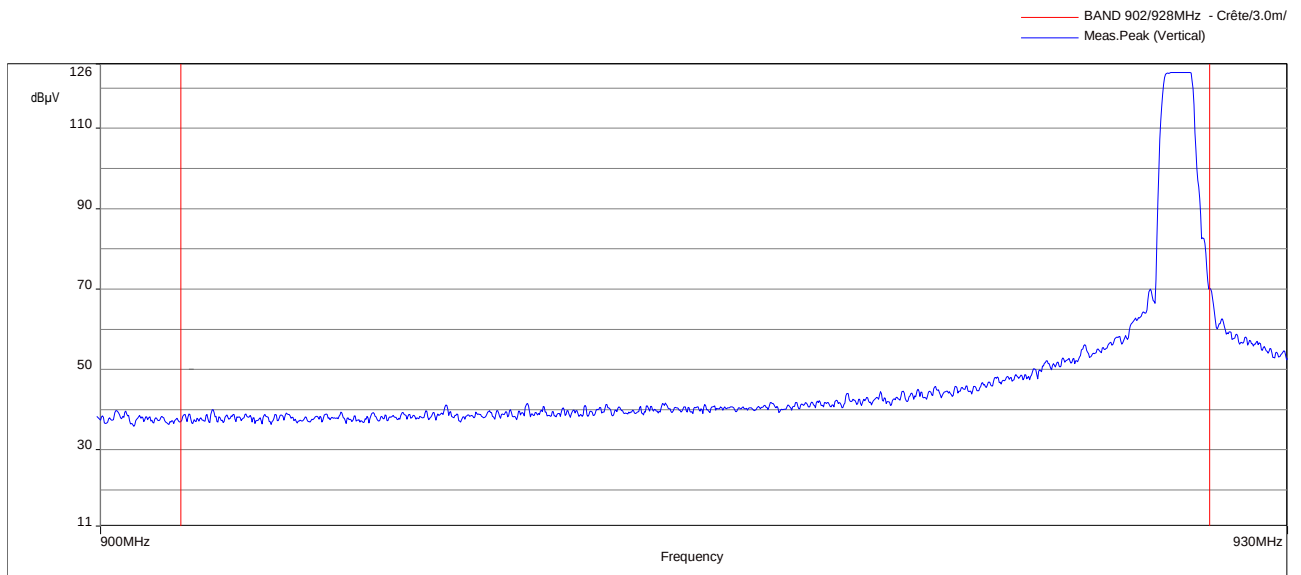

Test conclusion:

RESPECTED STANDARD

11. CONDUCTED OUTPUT POWER

Temperature (°C) : 20 to 28

Humidity (%HR): 37 to 45

Date : June 6, 2024 to
June 8, 2024

Technician : T. LEDRESSEUR

Standard: FCC Part 15
RSS-247

Test procedure:

For FCC Part 15: paragraph 15.247 (b)


For RSS-247: paragraph 5.4

AVGPM-G method (using a gated RF average-reading power meter) of paragraph 11.9.2.3.2 of ANSI C63.10

Test set up:

CONDUIT:

Conducted test

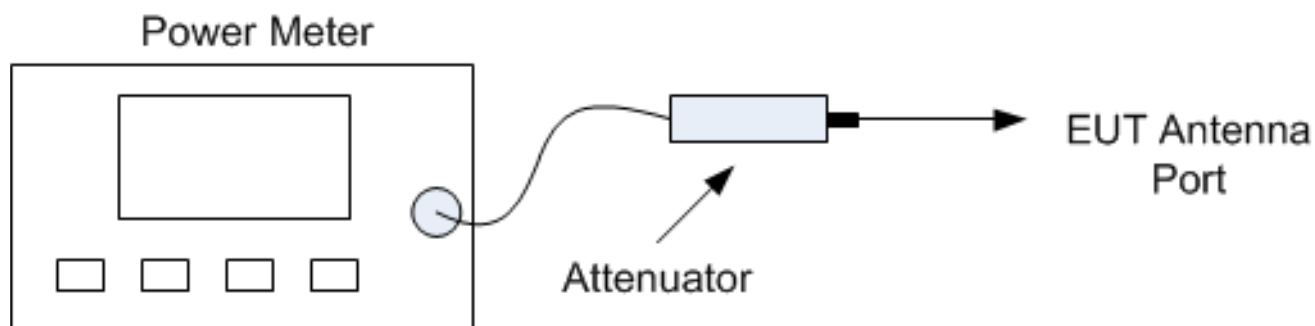

The measure is realized in conducted mode with a calibrated gated RF average reading power meter.

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Power source: 3.3 Vdc by an external power supply

Percentage of voltage variation during the test (%):

± 1

Results:

Sample N° 1 Channel F = 902.764 MHz

	Maximum Peak conducted output power (1)		Limit (W)	Maximum Peak EIRP		Limit (W)
	(dBm)	(W)		(dBm)	(W)	
Nominal supply voltage:	16.84	0.0483	1	19.840	0.0964	4

Declared maximum antenna gain: 3 dBi

Sample N° 1 Channel F = 915.644 MHz

	Maximum Peak conducted output power (1)		Limit (W)	Maximum Peak EIRP		Limit (W)
	(dBm)	(W)		(dBm)	(W)	
Nominal supply voltage:	16.76	0.0474	1	19.760	0.0946	4

Declared maximum antenna gain: 3 dBi

Sample N° 1 Channel F = 927.236 MHz

	Maximum Peak conducted output power (1)		Limit (W)	Maximum Peak EIRP		Limit (W)
	(dBm)	(W)		(dBm)	(W)	
Nominal supply voltage:	16.68	0.0466	1	19.680	0.0929	4

Declared maximum antenna gain: 3 dBi

Test conclusion:

RESPECTED STANDARD

12. RADIATED SPURIOUS EMISSIONS**Temperature (°C) :** 20 to 28**Humidity (%HR):** 37 to 45**Date :** June 6, 2024 to
June 8, 2024**Technician :** T. LEDRESSEUR**Standard:** FCC Part 15
RSS-247**Test procedure:**For FCC Part 15: paragraph 15.205, paragraph 15.209, paragraph 15.247 (d)
For RSS-247: paragraph 5.5

Emissions in non-restricted frequency bands method of paragraph 11.11 of ANSI C63.10

Emissions in restricted frequency bands method of paragraph 11.12 of ANSI C63.10

Test set up:

First an exploratory radiated measurement was performed. During this phase the product is oriented in three orthogonal planes.

Then the final measurement is realized with the product on the most critical orientation.

Below 1 GHz, the EUT is placed on a rotating table, 0.8m from a ground plane.

Above 1 GHz , the EUT is placed on a rotating table, 1.5 m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See test setup in appendix 2

Frequency range: From 9 kHz to 10th harmonic of the highest fundamental frequency**Detection mode:** Quasi-peak ($F < 1$ GHz)Peak / Average ($F > 1$ GHz)**Bandwidth:** 200Hz ($9 \text{ kHz} < F < 150\text{kHz}$)
9 kHz ($150 \text{ kHz} < F < 30\text{MHz}$)
120 kHz ($30 \text{ MHz} < F < 1 \text{ GHz}$)
100 kHz / 1 MHz ($F > 1 \text{ GHz}$)**Distance of antenna:** 3 meters (in anechoic room)**Antenna height:** 1 to 4 meters**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

The measurement are repeated for the four antennas.

Only the worst results are indicated below.

Power source: 3.3 Vdc by an external power supply

Percentage of voltage variation during the test (%): ± 1

Results:

Sample N° 1 Channel F = 902.764 MHz - $\frac{1}{2}$ λ whip antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dB μ V/m)	Limits at 3 m (dB μ V/m)	Margin (dB)
1804.548 (3)	P	100	H	55.3	84.19	28.89
2706.822	P	1000	H	40.67 (1) (2)	74	33.33
3609.096	P	1000	H	41.25 (1) (2)	74	32.75
4511.37	P	1000	H	42.94 (1) (2)	74	31.06
5413.644	P	1000	H	42.3 (1) (2)	74	31.7
6315.918 (3)	P	100	H	43.8 (2)	84.19	40.39

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dB μ V/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 915.644 MHz - $\frac{1}{2}$ λ whip antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dB μ V/m)	Limits at 3 m (dB μ V/m)	Margin (dB)
1831.288 (3)	P	100	H	51.91	84.11	32.2
2746.932	P	1000	H	40.23 (1) (2)	74	33.77
3662.576	P	1000	H	41.70 (1) (2)	74	32.3
4578.22	P	1000	H	42.57 (1) (2)	74	31.43
5493.864 (3)	P	100	H	42.09 (2)	84.11	42.02
6409.508 (3)	P	100	H	43.42 (2)	84.11	40.69

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dB μ V/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 927.236 MHz -1/2 λ whip antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1854.472 (3)	P	100	H	52.7	84.03	31.33
2781.708	P	1000	H	41.13 (1) (2)	74	32.87
3708.944	P	1000	H	41.75 (1) (2)	74	32.25
4636.18	P	1000	H	42.51 (1) (2)	74	31.49
5563.416 (3)	P	100	H	42.33 (2)	84.03	41.7
6490.652 (3)	P	100	H	43.78 (2)	84.03	40.25

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 902.764 MHz - Omni-directional antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1804.548 (3)	P	100	V	58.8	85.04	26.24
2706.822	P	1000	V	40.91 (1) (2)	74	33.09
3609.096	P	1000	V	41.08 (1) (2)	74	32.92
4511.37	P	1000	V	43.40 (1) (2)	74	30.6
5413.644	P	1000	V	42.13 (1) (2)	74	31.87
6315.918 (3)	P	100	V	44.04 (2)	85.04	41

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 915.644 MHz - Omni-directional antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1831.288 (3)	P	100	V	59.54	84.96	25.42
2746.932	P	1000	V	40.43 (1) (2)	74	33.57
3662.576	P	1000	V	40.78 (1) (2)	74	33.22
4578.22	P	1000	V	42.70 (1) (2)	74	31.3
5493.864 (3)	P	100	V	42.59 (2)	84.96	42.37
6409.508 (3)	P	100	V	43.52 (2)	84.96	41.44

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 927.236 MHz - Omni-directional antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dB μ V/m)	Limits at 3 m (dB μ V/m)	Margin (dB)
1854.472 (3)	P	100	V	55.76	84.88	29.12
2781.708	P	1000	V	40.90 (1) (2)	74	33.1
3708.944	P	1000	V	40.77 (1) (2)	74	33.23
4636.18	P	1000	V	43.34 (1) (2)	74	30.66
5563.416 (3)	P	100	V	41.80 (1) (2)	84.88	43.08
6490.652 (3)	P	100	V	44.22 (2)	84.88	40.66

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dB μ V/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 902.764 MHz - Patch antenna (PCB)

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1804.548 (3)	P	100	V	60.96	83.94	22.98
2706.822	P	1000	V	40.36 (1) (2)	74	33.64
3609.096	P	1000	V	41.73 (1) (2)	74	32.27
4511.37	P	1000	V	42.95 (1) (2)	74	31.05
5413.644	P	1000	V	42.74 (1) (2)	74	31.26
6315.918 (3)	P	100	V	43.31 (2)	83.94	40.63

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 915.644 MHz - Patch antenna (PCB)

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1831.288 (3)	P	100	V	57.37	83.86	26.49
2746.932	P	1000	V	40.35 (1) (2)	74	33.65
3662.576	P	1000	V	41.34 (1) (2)	74	32.66
4578.22	P	1000	V	43.40 (1) (2)	74	30.6
5493.864 (3)	P	100	V	42.63 (2)	83.86	41.23
6409.508 (3)	P	100	V	43.68 (2)	83.86	40.18

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 927.236 MHz - Patch antenna (PCB)

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1854.472 (3)	P	100	V	55.17	83.78	28.61
2781.708	P	1000	V	40.74 (1) (2)	74	33.26
3708.944	P	1000	V	41.52 (1) (2)	74	32.48
4636.18	P	1000	V	42.58 (1) (2)	74	31.42
5563.416 (3)	P	100	V	42.35 (2)	83.78	41.43
6490.652 (3)	P	100	V	43.64 (2)	83.78	40.14

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 902.764 MHz- Internal ceramic antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1804.548 (3)	P	100	V	50.59	84.19	33.6
2706.822	P	1000	V	41.15 (1) (2)	74	32.85
3609.096	P	1000	V	41.13 (1) (2)	74	32.87
4511.37	P	1000	V	42.56 (1) (2)	74	31.44
5413.644	P	1000	V	41.88 (1) (2)	74	32.12
6315.918 (3)	P	100	V	43.49 (2)	84.19	40.7

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 915.644 MHz - Internal ceramic antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1831.288 (3)	P	100	V	47.67	84.11	36.44
2746.932	P	1000	V	41.01 (1) (2)	74	32.99
3662.576	P	1000	V	40.92 (1) (2)	74	33.08
4578.22	P	1000	V	42.45 (1) (2)	74	31.55
5493.864 (3)	P	100	V	42.02 (2)	84.11	42.09
6409.508 (3)	P	100	V	44.22 (2)	84.11	39.89

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Sample N° 1 Channel F = 927.236 MHz - Internal ceramic antenna

Frequencies (MHz)	Detector P QP Av	RBW (kHz)	Polarization H: Horizontal V: Vertical	Field strength Measured at 3 m (dBμV/m)	Limits at 3 m (dBμV/m)	Margin (dB)
1854.472 (3)	P	100	V	44.1	84.03	39.93
2781.708	P	1000	V	41.05 (1) (2)	74	32.95
3708.944	P	1000	V	41.26 (1) (2)	74	32.74
4636.18	P	1000	V	42.96 (1) (2)	74	31.04
5563.416 (3)	P	100	V	42.09 (2)	84.03	41.94
6490.652 (3)	P	100	V	44.00 (2)	84.03	40.03

P= Peak, QP=Quasi-peak, Av=Average

(1) The peak level is lower than the average limit (54 dBμV/m)

(2) Noise floor

(3) Restricted bands of operation in 15.205 and Table 6 of RSS-Gen

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

In addition, radiated emissions which fall in the restricted band, as defined in Table 6 of RSS-Gen, must also comply with the radiated emission limits specified in Table 4 and Table 5 of RSS-Gen.

Note: any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.

Test conclusion:

RESPECTED STANDARD

13. PEAK CONDUCTED POWER SPECTRAL DENSITY

Temperature (°C) : 20 to 28

Humidity (%HR): 37 to 45

Date : June 6, 2024 to
June 8, 2024

Technician : T. LEDRESSEUR

Standard: FCC Part 15
RSS-247

Test procedure:


For FCC Part 15: paragraph 15.247 (e), paragraph 15.247 (f)

For RSS-247: paragraph 5.2

AVGPSD-1 of paragraph 11.10.3 of ANSI C63.10

Test set up:

Conducted test

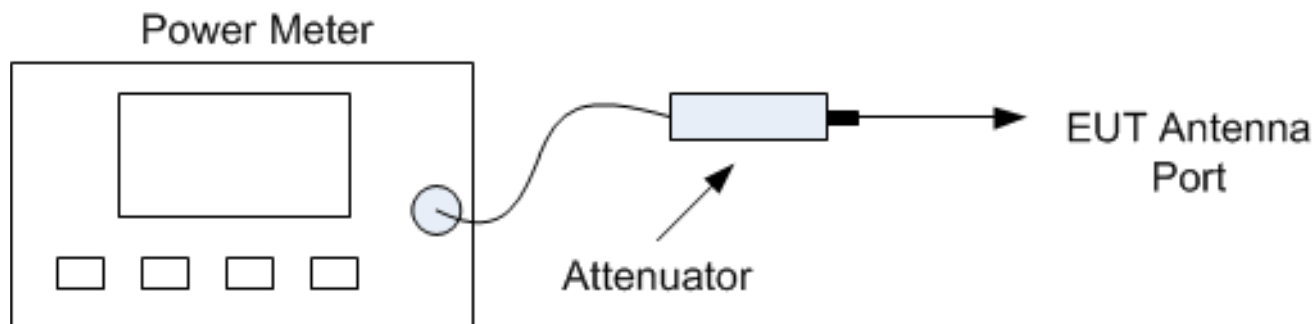

The measure is realized in conducted mode with an analyser.

Span	2 MHz
RBW	3 kHz
VBW	10 kHz
detector	RMS
Points	10000
Trace mode	Avg power
Number of traces	100

Then the peak marker function is used.

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Power source: 3.3 Vdc by an external power supply

Percentage of voltage variation during the test (%):


± 1

Results:

Sample N° 1 Channel F = 902.764 MHz

	Maximum conducted power density (dBm / 3 kHz)	Limit (dBm / 3 kHz)
Nominal supply voltage:	-3.17	8


Declared maximum antenna gain: 3 dBi

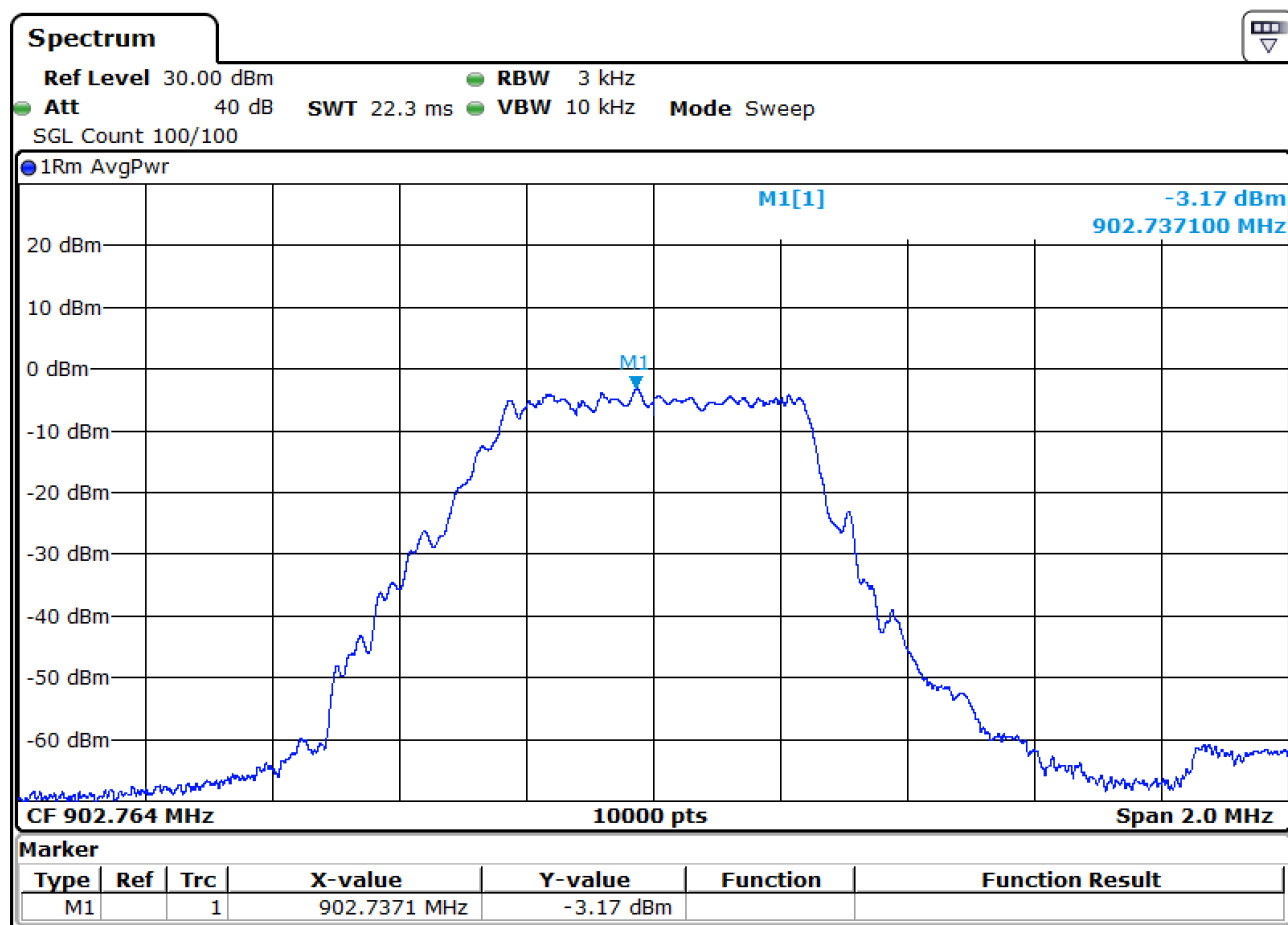

Sample N° 1 Channel F = 915.644 MHz

	Maximum Peak conducted power density (dBm / 3 kHz)	Limit (dBm / 3 kHz)
Nominal supply voltage:	-3.6	8


Declared maximum antenna gain: 3 dBi

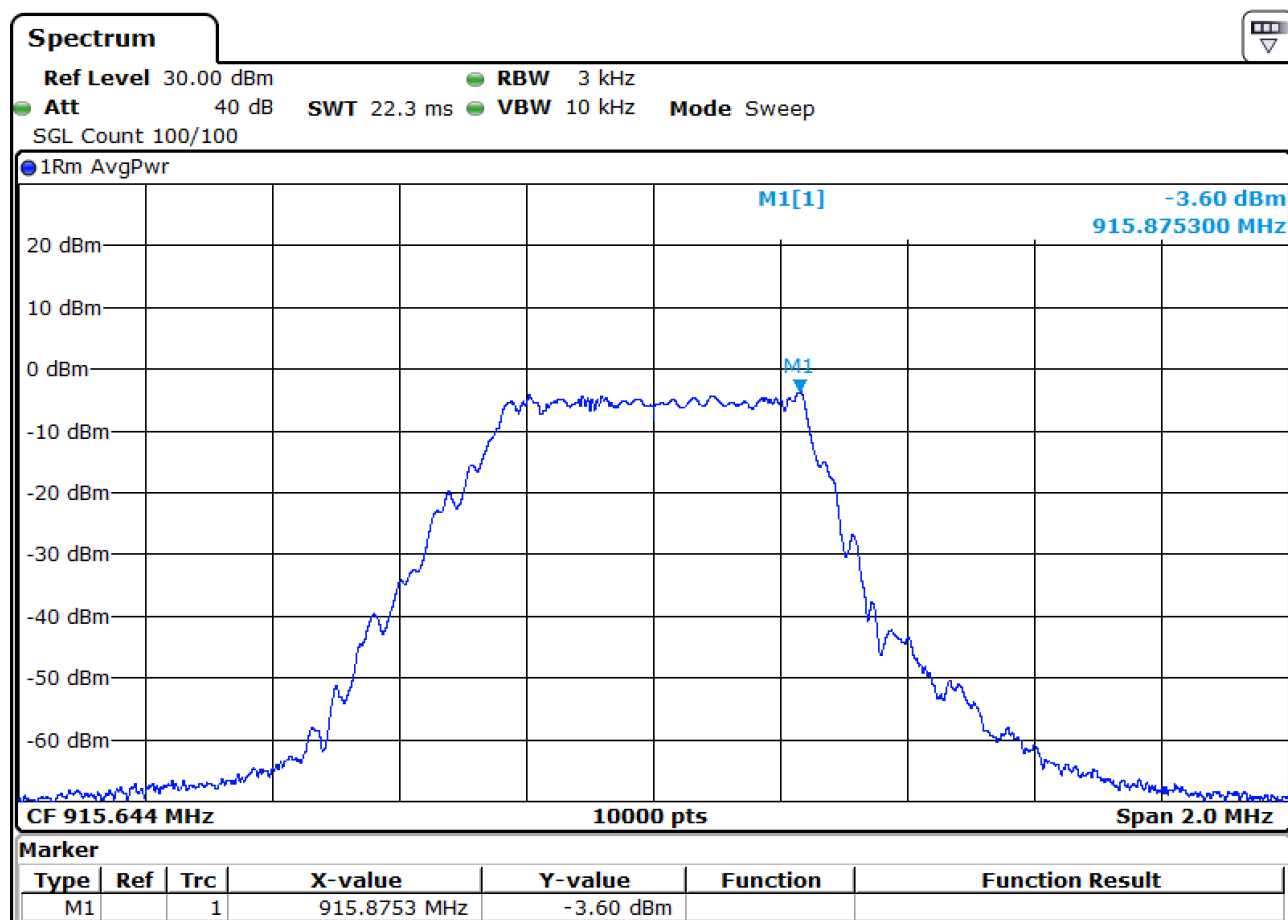

Sample N° 1 Channel F = 927.236 MHz

	Maximum Peak conducted power density (dBm / 3 kHz)	Limit (dBm / 3 kHz)
Nominal supply voltage:	-3.57	8

Declared maximum antenna gain: 3 dBi

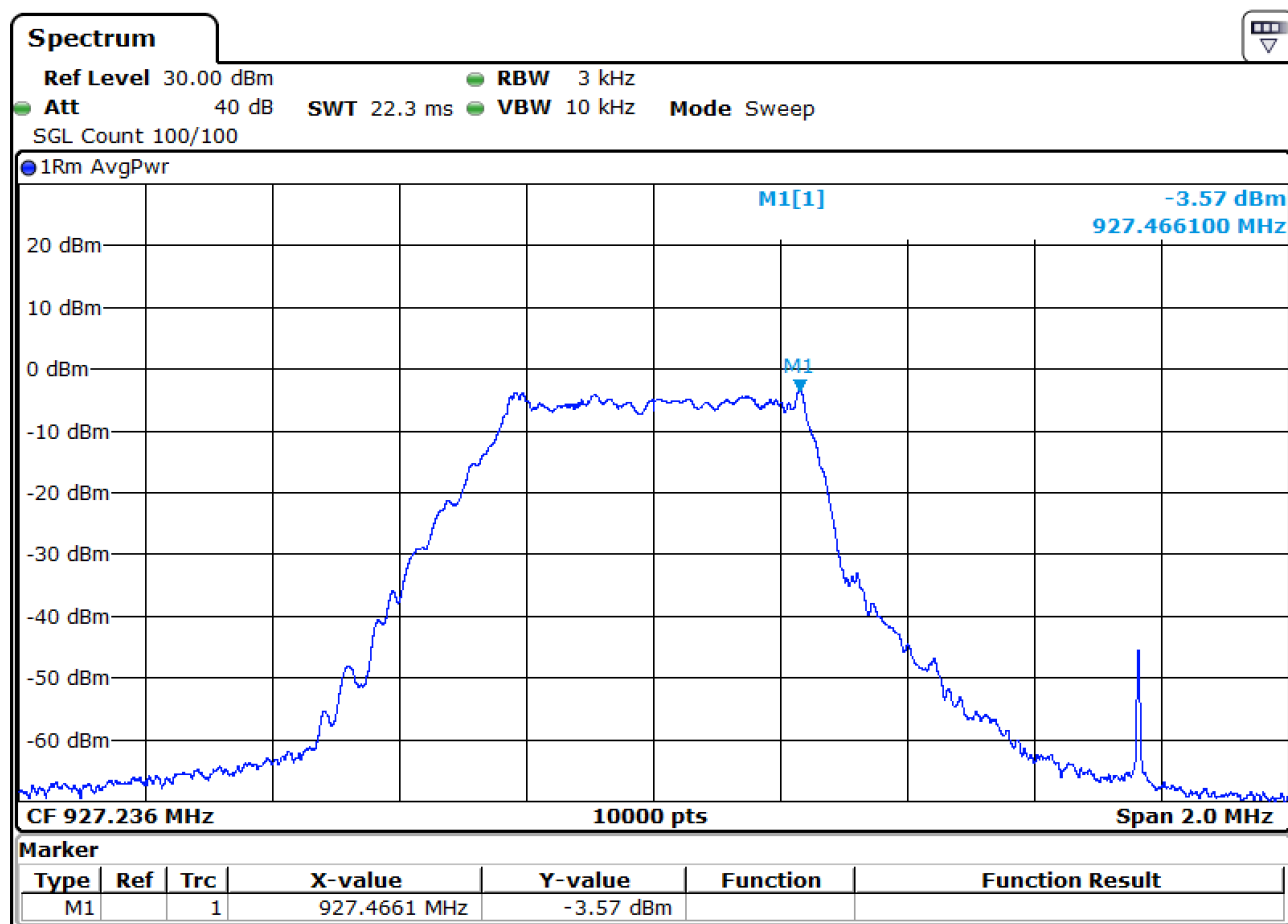

Test conclusion:

RESPECTED STANDARD

□□□ End of report, (2) appendix(es) to be forwarded □□□

APPENDIX 1: Test equipment list

AC Conducted emission

TYPE	MANUFACTURER	EMITECH NUMBER
Outside room	Emitech	11855
Test receiver N9010A	Agilent	11316
Transient limiter LIT-930A	COM-POWER	17207
LISN ESH3-Z5	Rohde & Schwarz	6217
Absorber sheath current	Emitech	17829
Cable N-6m	AEMC	8590
Power source PHF555	HAEFELY	6290
Multimeter 34401A	Agilent	10952
Meteo station 608-H1	Testo	15790
Software	BAT-EMC V3.18.0.26	0000

Occupied bandwidth

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum Analyzer FSV40	Rohde & Schwarz	15776
Attenuator 10dB 18GHz 2W	Weinschel	12492
Multimeter 34401A	Agilent	10952
Power source 6655A	Agilent	16115
Meteo station 608-H1	Testo	15790

Band edge

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum Analyzer FSV40	Rohde & Schwarz	15776
Attenuator 10dB 18GHz 2W	Weinschel	12492
Multimeter 34401A	Agilent	10952
Power source 6655A	Agilent	16115
Meteo station 608-H1	Testo	15790

Conducted output power

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum Analyzer FSV40	Rohde & Schwarz	15776
Power sensor NRP-Z86	Rohde & Schwarz	11588
Attenuator 10dB 18GHz 2W	Weinschel	12492
Multimeter 34401A	Agilent	10952
Power source 6655A	Agilent	16115
Meteo station 608-H1	Testo	15790
Software	R&S Power Viewer Plus V13.1	///

Radiated spurious emissions

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum Analyzer FSV40	Rohde & Schwarz	15776
Anechoic Chamber	EMITECH	7651
Biconical antenna HK116	Rohde & Schwarz	6118
Log periodic antenna 3146A	EMCO	5609
Low-noise amplifier INT-BA011000-25	RFPA	15775
Antenna BBHA 9120B	Schwarzbeck	6970
Low-noise amplifier 8449B	Agilent Technologies	10262
Cable N-3m	Huber + Suhner	15892
Cable SMA-3m	Huber + Suhner	15893
Cable SMA-3m	Huber + Suhner	15916
Cable SMA-4m	Huber + Suhner	15933
High pass filter MH1000-15000-17CS	YUN Micro Electronics	19038
Multimeter 34401A	Agilent	10952
Power source 6655A	Agilent	16115
Meteo station WS-9232	La Crosse Technology	7564
Software	BAT-EMC V3.18.0.26	0000


Conducted power spectral density

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum Analyzer FSV40	Rohde & Schwarz	15776
Attenuator 10dB 18GHz 2W	Weinschel	12492
Multimeter 34401A	Agilent	10952
Power source 6655A	Agilent	16115
Meteo station 608-H1	Testo	15790

APPENDIX 2: Radiated Test Setup


Anechoic chamber setup

Above 1 GHz

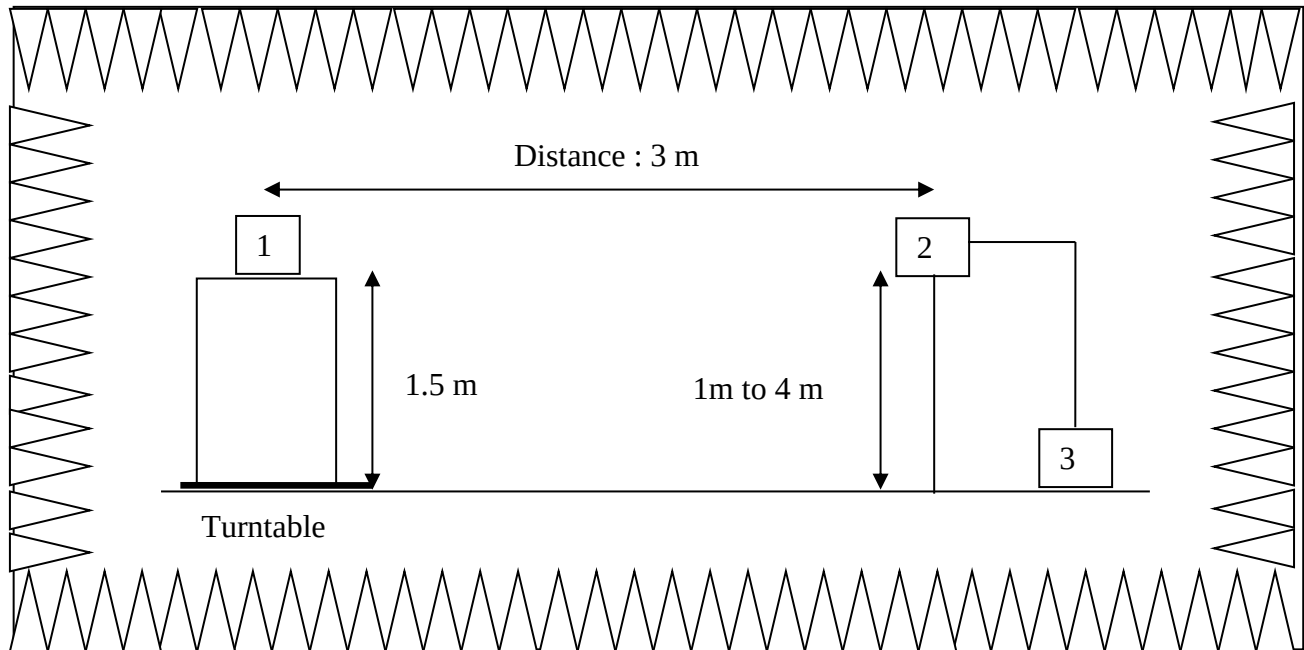

- 1: Equipment Under Test
- 2: Measurement antenna
- 3: Measurement equipment

Between 30 MHz and 1 GHz

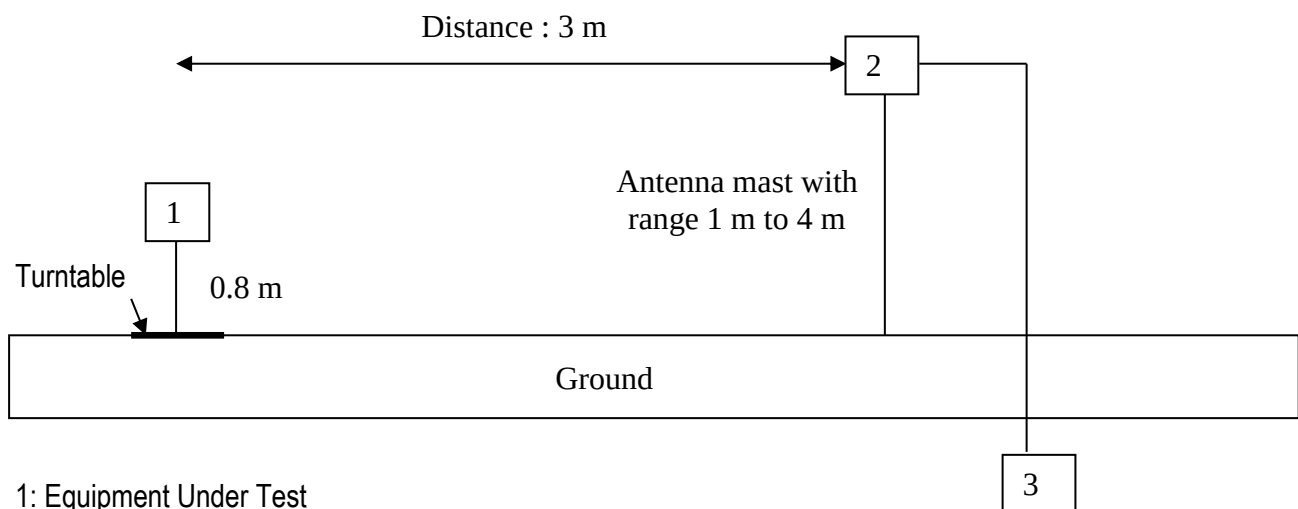

- 1: Equipment Under Test
- 2: Measurement antenna
- 3: Measurement equipment