FCC Radio Test Report

FCC ID: QISAP7050DE

This report concerns (check one): ☒**Original Grant** ☐**Class I Change** ☐**Class II Change**

Project No.	:	1604C207A
Equipment	:	Wireless LAN Access Point
Model Name	:	AP7050DE
Applicant	:	Huawei Technologies Co.,Ltd.
Address	:	Administration Building, Headquarters of Huawei Technologies Co., Ltd.,Bantian, Longgang District, Shenzhen 518129 China

Date of Receipt	:	May 17, 2016
Date of Test	:	May 17, 2016 ~ Jun. 08, 2016
Issued Date	:	Jun. 10, 2016
Tested by	:	BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents Page

1 . CERTIFICATION 6

2 . SUMMARY OF TEST RESULTS 7

2.1 TEST FACILITY 8

2.2 MEASUREMENT UNCERTAINTY 8

3 . GENERAL INFORMATION 9

3.1 GENERAL DESCRIPTION OF EUT 9

3.2 DESCRIPTION OF TEST MODES 11

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING 11

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 12

3.5 DESCRIPTION OF SUPPORT UNITS 12

4 . EMC EMISSION TEST 13

4.1 CONDUCTED EMISSION MEASUREMENT 13

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 13

4.1.2 TEST PROCEDURE 13

4.1.3 DEVIATION FROM TEST STANDARD 13

4.1.4 TEST SETUP 14

4.1.5 EUT OPERATING CONDITIONS 14

4.1.6 EUT TEST CONDITIONS 14

4.1.7 TEST RESULTS 14

4.2 RADIATED EMISSION MEASUREMENT 15

4.2.1 RADIATED EMISSION LIMITS 15

4.2.2 TEST PROCEDURE 16

4.2.3 DEVIATION FROM TEST STANDARD 16

4.2.4 TEST SETUP 17

4.2.5 EUT OPERATING CONDITIONS 18

4.2.6 EUT TEST CONDITIONS 18

4.2.7 TEST RESULTS (9KHZ TO 30MHZ) 18

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ) 18

4.2.9 TEST RESULTS (ABOVE 1000 MHZ) 18

5 . BANDWIDTH TEST 19

5.1 APPLIED PROCEDURES / LIMIT 19

5.1.1 TEST PROCEDURE 19

5.1.2 DEVIATION FROM STANDARD 19

5.1.3 TEST SETUP 19

5.1.4 EUT OPERATION CONDITIONS 19

5.1.5 EUT TEST CONDITIONS 19

5.1.6 TEST RESULTS 19

Table of Contents Page

6 . MAXIMUM OUTPUT POWER TEST 20
6.1 APPLIED PROCEDURES / LIMIT 20
6.1.1 TEST PROCEDURE 20
6.1.2 DEVIATION FROM STANDARD 20
6.1.3 TEST SETUP 20
6.1.4 EUT OPERATION CONDITIONS 20
6.1.5 EUT TEST CONDITIONS 20
6.1.6 TEST RESULTS 20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION 21
7.1 APPLIED PROCEDURES / LIMIT 21
7.1.1 TEST PROCEDURE 21
7.1.2 DEVIATION FROM STANDARD 21
7.1.3 TEST SETUP 21
7.1.4 EUT OPERATION CONDITIONS 21
7.1.5 EUT TEST CONDITIONS 21
7.1.6 TEST RESULTS 21
8 . POWER SPECTRAL DENSITY TEST 22
8.1 APPLIED PROCEDURES / LIMIT 22
8.1.1 TEST PROCEDURE 22
8.1.2 DEVIATION FROM STANDARD 22
8.1.3 TEST SETUP 22
8.1.4 EUT OPERATION CONDITIONS 22
8.1.5 EUT TEST CONDITIONS 22
8.1.6 TEST RESULTS 22
9 . MEASUREMENT INSTRUMENTS LIST 23
10 . EUT TEST PHOTO 25
ATTACHMENT A - CONDUCTED EMISSION 29
ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ) 32
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ) 34
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ) 41
ATTACHMENT D - BANDWIDTH 54
ATTACHMENT E - MAXIMUM OUTPUT POWER TEST 57
ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION 58
ATTACHMENT G - POWER SPECTRAL DENSITY TEST 62

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1604C207A	Original Issue.	Jun. 10, 2016

1. CERTIFICATION

Equipment	:	Wireless LAN Access Point
Brand Name	:	N/A
Model Name	:	AP7050DE
Applicant		Huawei Technologies Co.,Ltd.
Manufacturer	:	Huawei Technologies Co.,Ltd.
Address	:	Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen 518129, P.R.China
Factory	:	Huawei Technologies Co.,Ltd.
Address	:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test	:	May 17, 2016 ~ Jun. 08, 2016
Test Sample	:	Engineering Sample
Standard(s)	:	FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1604C207A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the Bluetooth LE Part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C		
Standard(s) Section	Test Item	Judgment
15.207	Conducted Emission	PASS
15.247(d)	Antenna conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Peak Output Power	PASS
15.247(e)	Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
15.209/15.205	Transmitter Radiated Emissions	PASS

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement **y** ± **U**, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless LAN Access Point	
Brand Name	N/A	
Model Name	AP7050DE	
Model Difference	NA	
Power Source	#1 DC voltage supplied from AC Adapter. Model: HW-120200U1W #2 Supplied from PoE. Model: PoE35-54A	
Power Rating	DC 12V 2A	
Product Description	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK
	Bit Rate of Transmitter	1Mbps
	Output Power (Max.)	4.31 dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	上海旌泓通信技术有限公司	N/A	Internal	U.FL	5.76

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode **NOTE (1)**

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test Software Version	N/A		
Frequency (MHz)	2402	2440	2480
BT LE	N/A	N/A	N/A

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

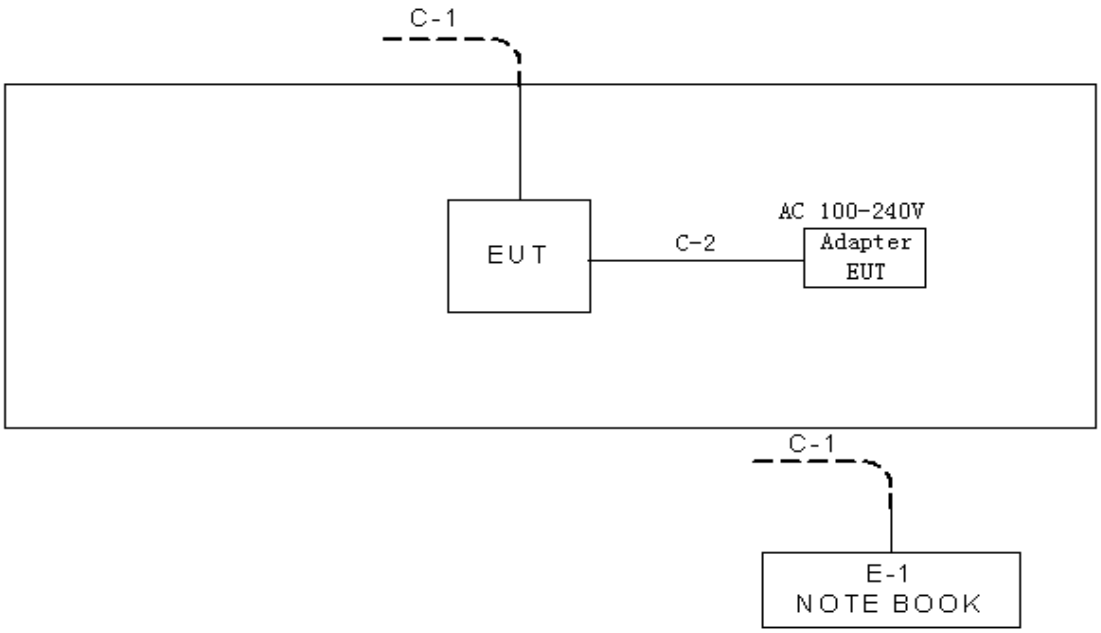

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
E-1	NOTEBOOK	Dell	DCSM 745	DOC	G7K832X

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	RJ45 Cable
C-2	NO	NO	1.5m	Power Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in『Length』column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

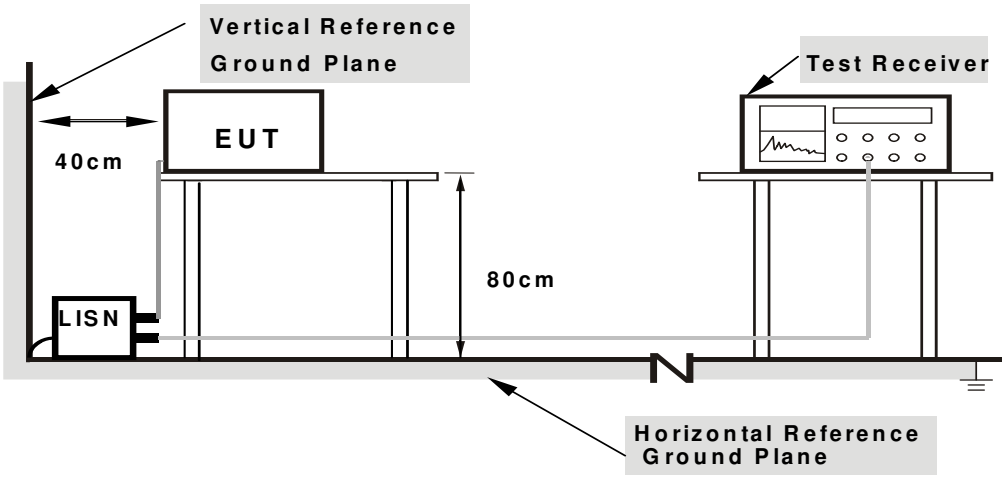

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a)\, then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

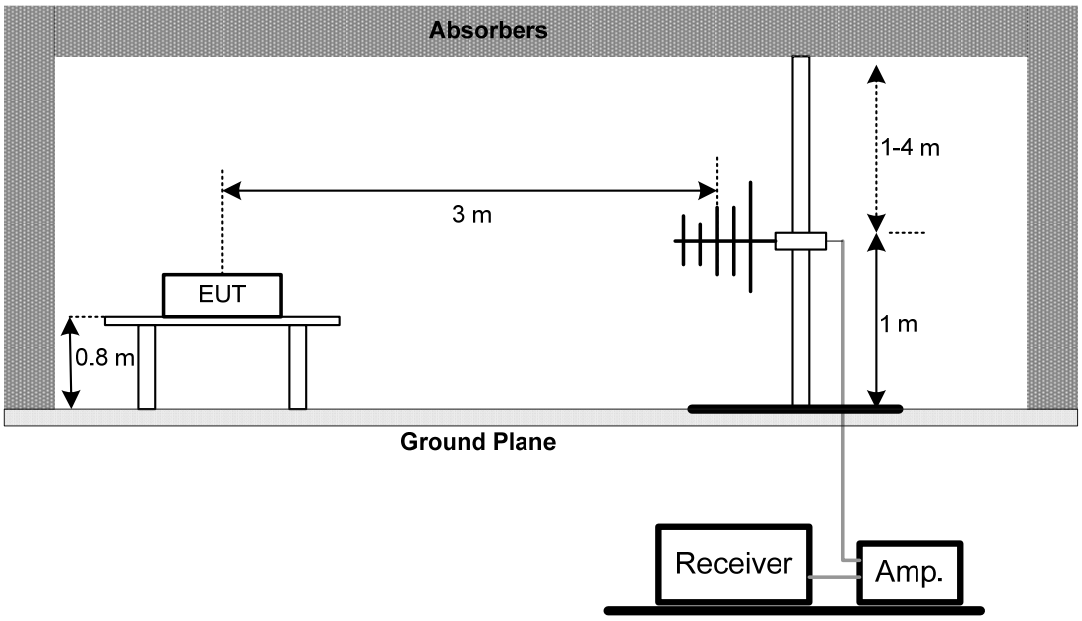

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

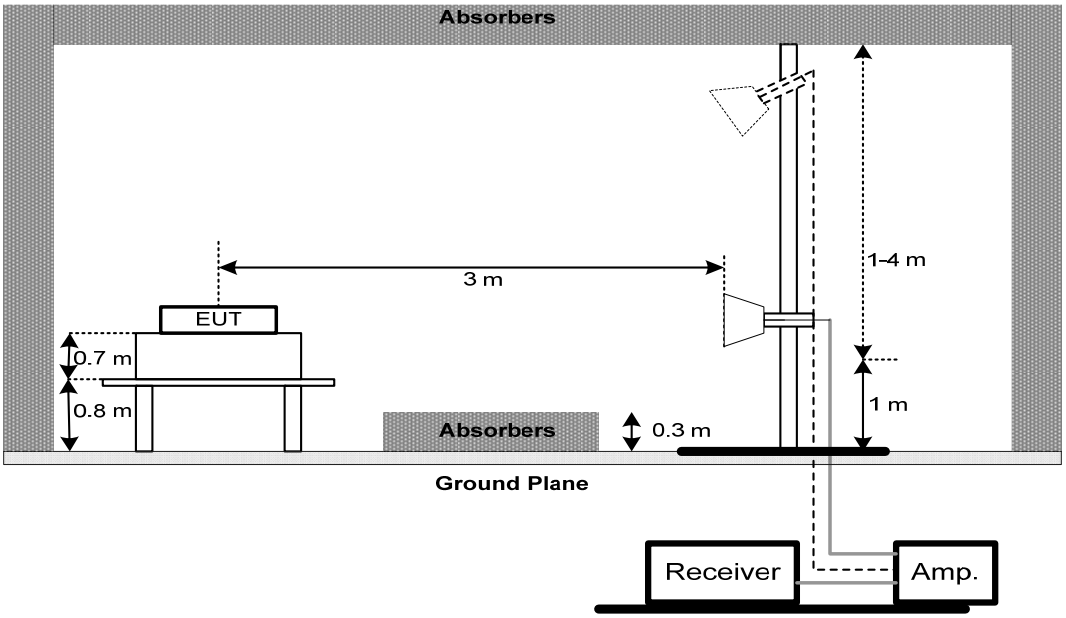

(C) For radiated emissions below 30MHz

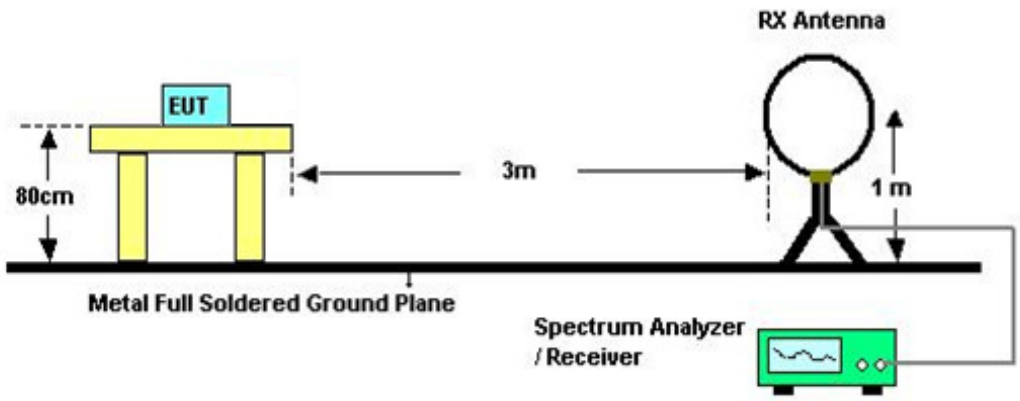

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

4.2.7TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

(1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
(2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r05.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
c. Offset=antanna gain + cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 27, 2017
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz－26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Position Control	MF	MF-7802	MF780208416	N/A
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-SM-9000(0.01GHz－26.5GHz)	C-100	N/A

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 27, 2017
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 27, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-SM-9000(0.01GHz－26.5GHz)	C-100	N/A

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-SM-9000(0.01GHz－26.5GHz)	C-100	N/A

Remark: ”N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode:	TX Mode

Line

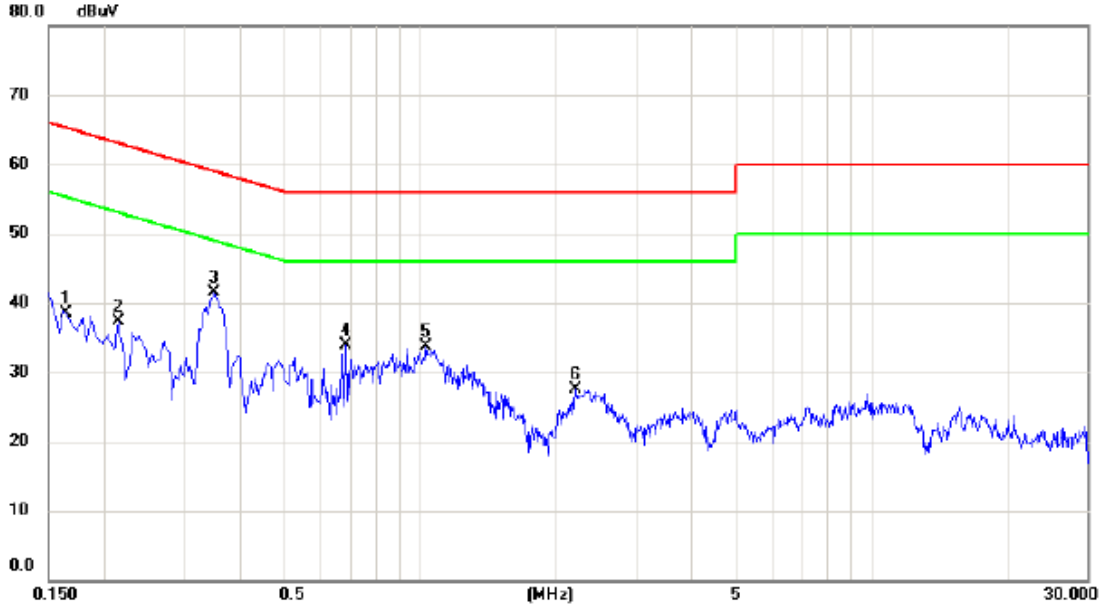

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1633	29.00	9.52	38.52	65.29	-26.77	peak	
2		0.2140	27.70	9.53	37.23	63.05	-25.82	peak	
3	*	0.3500	31.89	9.53	41.42	58.96	-17.54	peak	
4		0.6820	24.23	9.65	33.88	56.00	-22.12	peak	
5		1.0260	24.01	9.76	33.77	56.00	-22.23	peak	
6		2.2020	17.57	9.97	27.54	56.00	-28.46	peak	

Test Mode:	TX Mode

Neutral

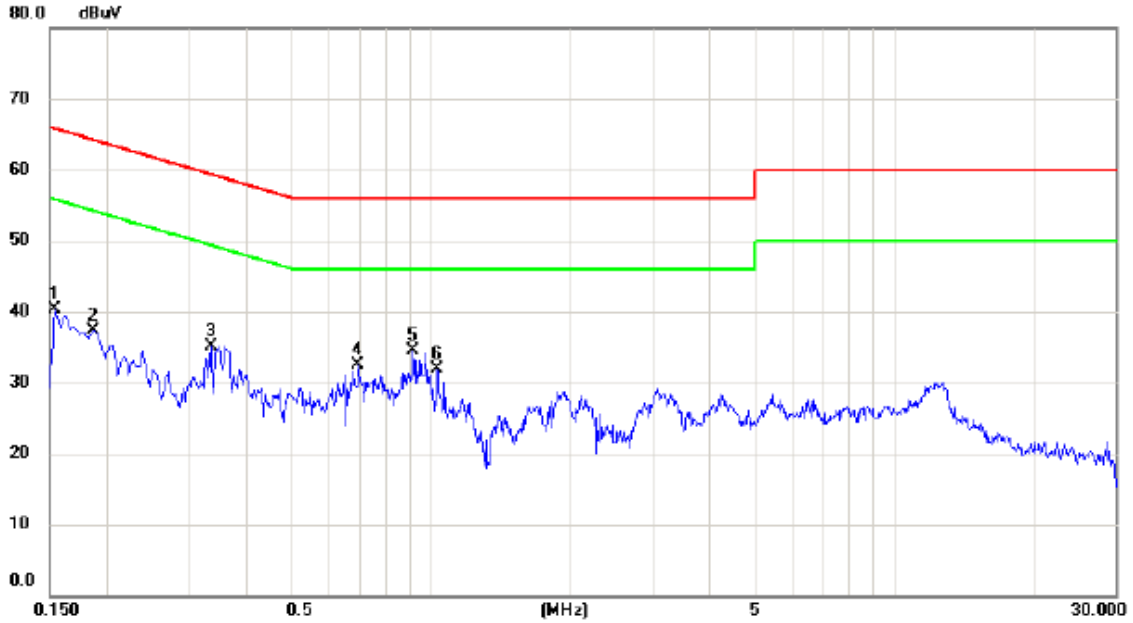

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1540	30.85	9.50	40.35	65.78	-25.43	peak	
2		0.1860	27.91	9.48	37.39	64.21	-26.82	peak	
3		0.3340	25.57	9.53	35.10	59.35	-24.25	peak	
4		0.6940	23.01	9.45	32.46	56.00	-23.54	peak	
5	*	0.9100	24.81	9.66	34.47	56.00	-21.53	peak	
6		1.0300	22.29	9.66	31.95	56.00	-24.05	peak	

ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0097	0°	13.52	24.95	38.47	127.87	-89.40	AVG
0.0097	0°	14.83	24.95	39.78	147.87	-108.09	PK
0.0282	0°	6.54	23.78	30.32	118.60	-88.28	AVG
0.0282	0°	8.12	23.78	31.90	138.60	-106.70	PK
0.0364	0°	3.25	23.26	26.51	116.38	-89.87	AVG
0.0364	0°	5.47	23.26	28.73	136.38	-107.65	PK
0.0578	0°	1.18	22.24	23.42	112.37	-88.94	AVG
0.0578	0°	2.54	22.24	24.78	132.37	-107.58	PK
0.5089	0°	19.83	19.83	39.66	73.47	-33.81	QP
1.9519	0°	23.41	19.50	42.91	69.54	-26.63	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0118	90°	13.62	24.30	37.92	126.17	-88.25	AVG
0.0118	90°	14.84	24.30	39.14	146.17	-107.03	PK
0.0259	90°	7.36	23.93	31.29	119.34	-88.05	AVG
0.0259	90°	8.78	23.93	32.71	139.34	-106.63	PK
0.0431	90°	5.22	22.84	28.06	114.91	-86.86	AVG
0.0431	90°	6.43	22.84	29.27	134.91	-105.65	PK
0.0579	90°	1.65	22.24	23.89	112.35	-88.46	AVG
0.0579	90°	2.93	22.24	25.17	132.35	-107.18	PK
0.6214	90°	22.31	20.19	42.50	71.74	-29.24	QP
2.0540	90°	24.18	19.47	43.65	69.54	-25.89	QP

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX 2402MHz -CH00

Vertical

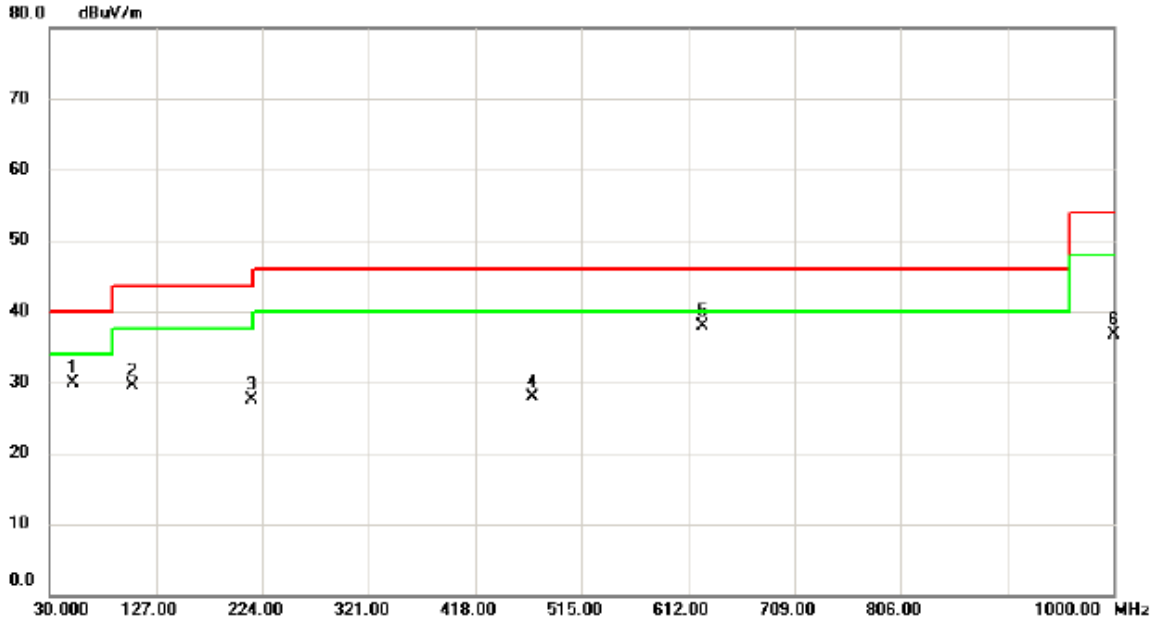

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		51.8250	42.24	-12.42	29.82	40.00	-10.18	peak	
2		106.1450	43.51	-14.06	29.45	43.50	-14.05	peak	
3		213.8150	41.43	-14.02	27.41	43.50	-16.09	peak	
4		470.3800	35.30	-7.35	27.95	46.00	-18.05	peak	
5	*	625.0950	41.28	-3.47	37.81	46.00	-8.19	peak	
6		1000.000	33.94	2.73	36.67	54.00	-17.33	peak	

Test Mode:	TX 2402MHz -CH00

Horizontal

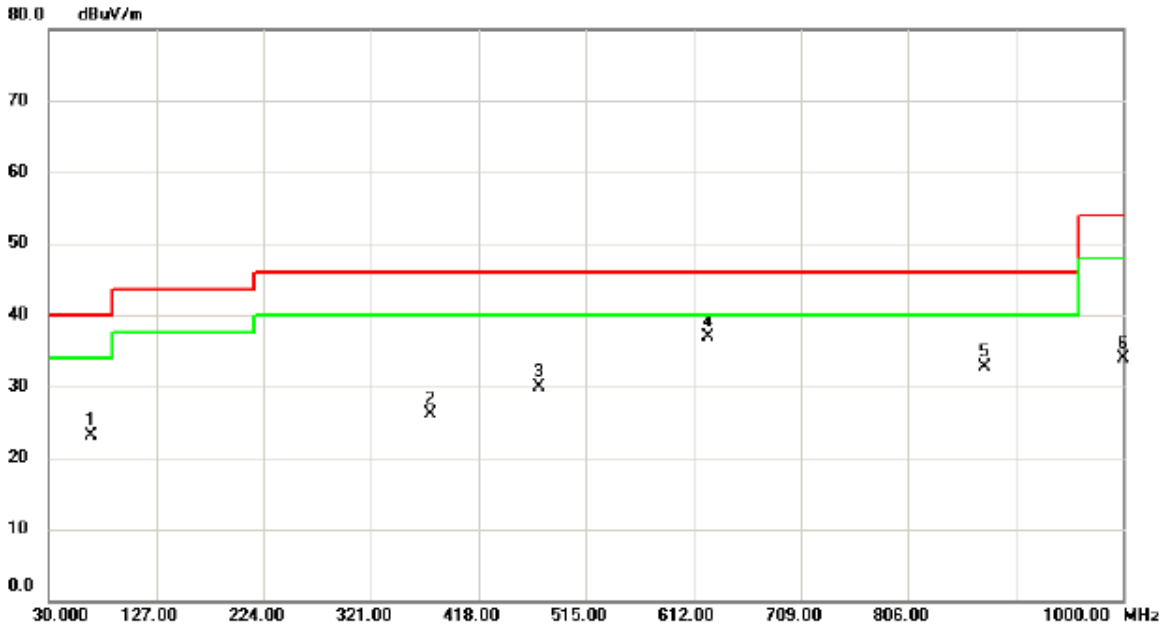

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		68.3150	37.66	-14.64	23.02	40.00	-16.98	peak	
2		374.8350	35.09	-9.01	26.08	46.00	-19.92	peak	
3		472.8050	37.26	-7.38	29.88	46.00	-16.12	peak	
4	*	625.0950	40.44	-3.47	36.97	46.00	-9.03	peak	
5		874.8700	32.10	0.57	32.67	46.00	-13.33	peak	
6		1000.000	31.26	2.73	33.99	54.00	-20.01	peak	

Test Mode:	TX 2440MHz -CH19

Vertical

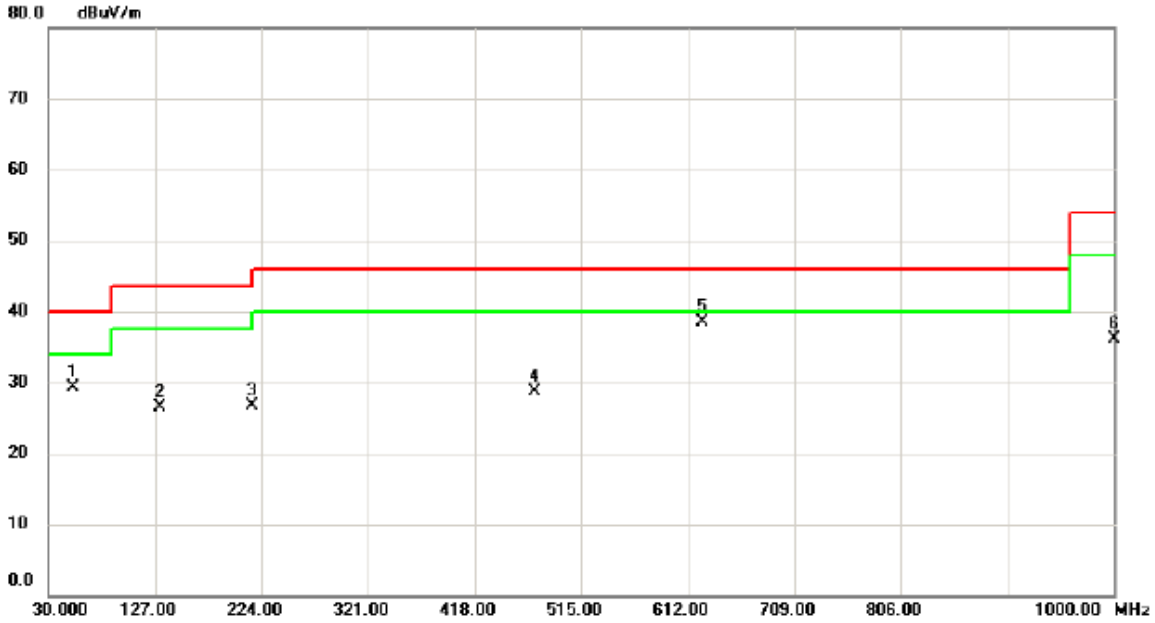

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		52.7950	41.63	-12.33	29.30	40.00	-10.70	peak	
2		131.3650	37.79	-11.19	26.60	43.50	-16.90	peak	
3		215.7550	40.66	-14.00	26.66	43.50	-16.84	peak	
4		472.3200	36.14	-7.38	28.76	46.00	-17.24	peak	
5	*	625.0950	42.01	-3.47	38.54	46.00	-7.46	peak	
6		1000.000	33.40	2.73	36.13	54.00	-17.87	peak	

Test Mode:	TX 2440MHz -CH19

Horizontal

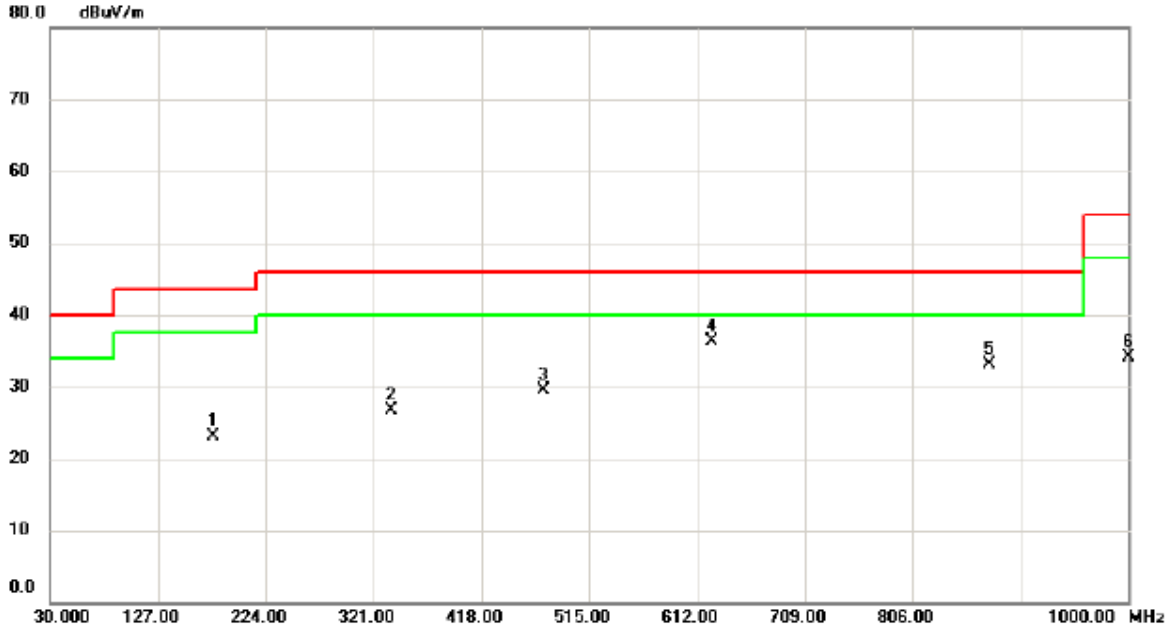

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		176.9550	34.79	-11.69	23.10	43.50	-20.40	peak	
2		337.4900	37.20	-10.58	26.62	46.00	-19.38	peak	
3		474.7450	36.90	-7.42	29.48	46.00	-16.52	peak	
4	*	625.0950	39.83	-3.47	36.36	46.00	-9.64	peak	
5		874.8700	32.49	0.57	33.06	46.00	-12.94	peak	
6		1000.000	31.44	2.73	34.17	54.00	-19.83	peak	

Test Mode:	TX 2480MHz -CH39

Vertical

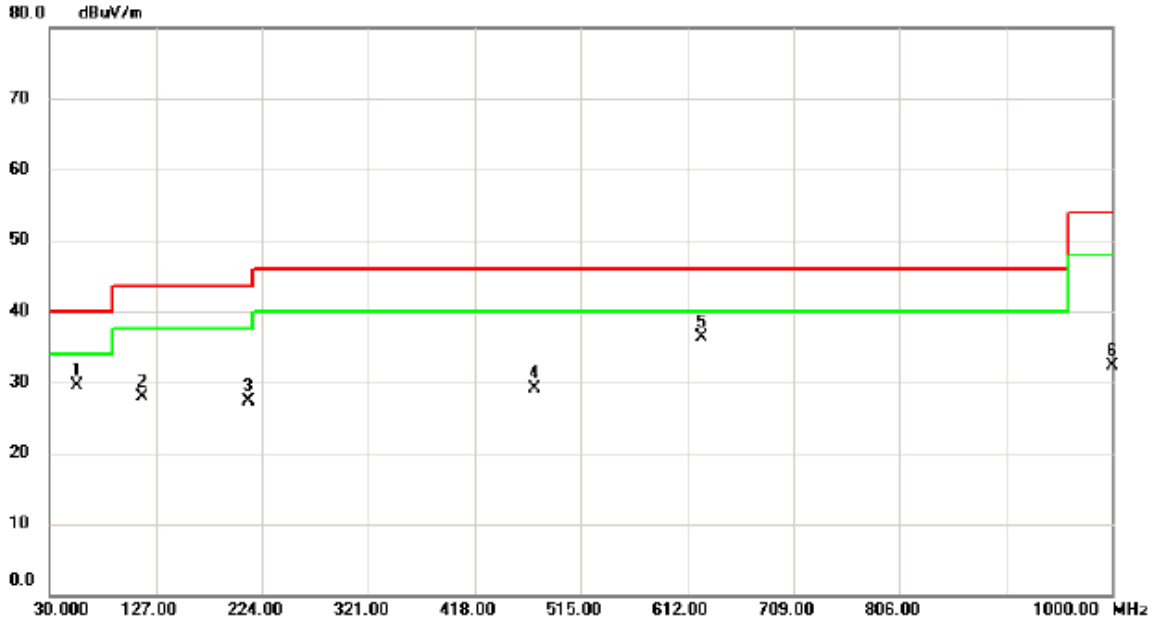

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		54.7350	41.71	-12.29	29.42	40.00	-10.58	peak	
2		114.8750	41.02	-13.19	27.83	43.50	-15.67	peak	
3		211.8750	41.26	-14.05	27.21	43.50	-16.29	peak	
4		472.3200	36.55	-7.38	29.17	46.00	-16.83	peak	
5	*	625.0950	39.72	-3.47	36.25	46.00	-9.75	peak	
6		1000.000	29.66	2.73	32.39	54.00	-21.61	peak	

Test Mode:	TX 2480MHz -CH39

Horizontal

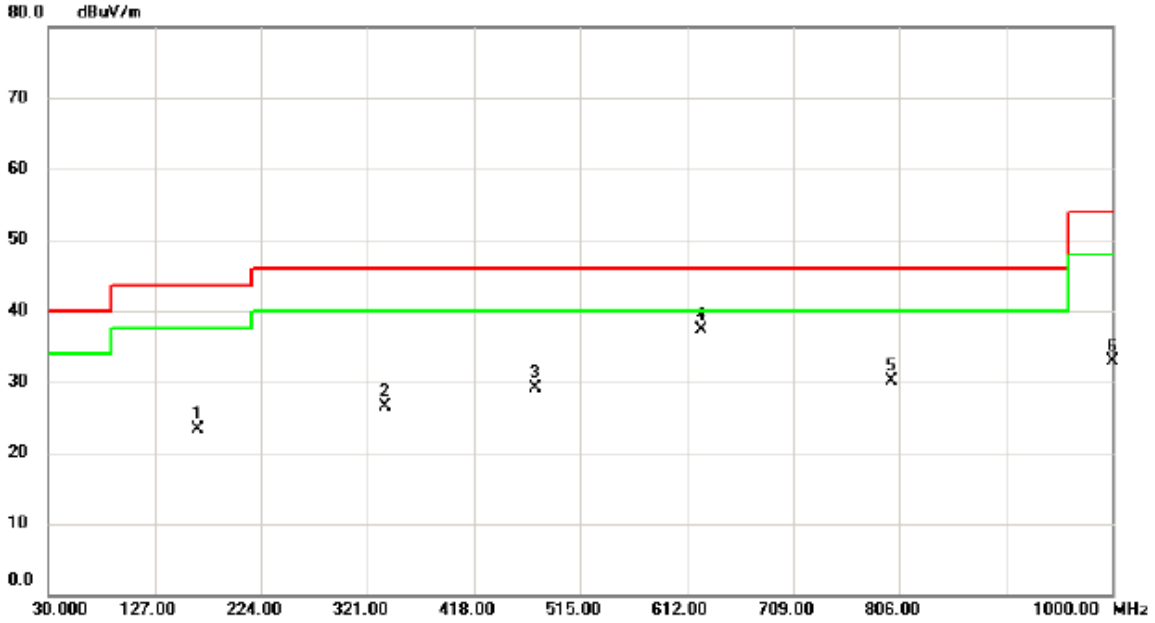

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		166.7700	34.53	-11.28	23.25	43.50	-20.25	peak	
2		337.0050	37.07	-10.57	26.50	46.00	-19.50	peak	
3		473.7750	36.47	-7.40	29.07	46.00	-16.93	peak	
4	*	625.0950	40.69	-3.47	37.22	46.00	-8.78	peak	
5		798.7250	29.93	0.16	30.09	46.00	-15.91	peak	
6		1000.000	30.19	2.73	32.92	54.00	-21.08	peak	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00

Vertical

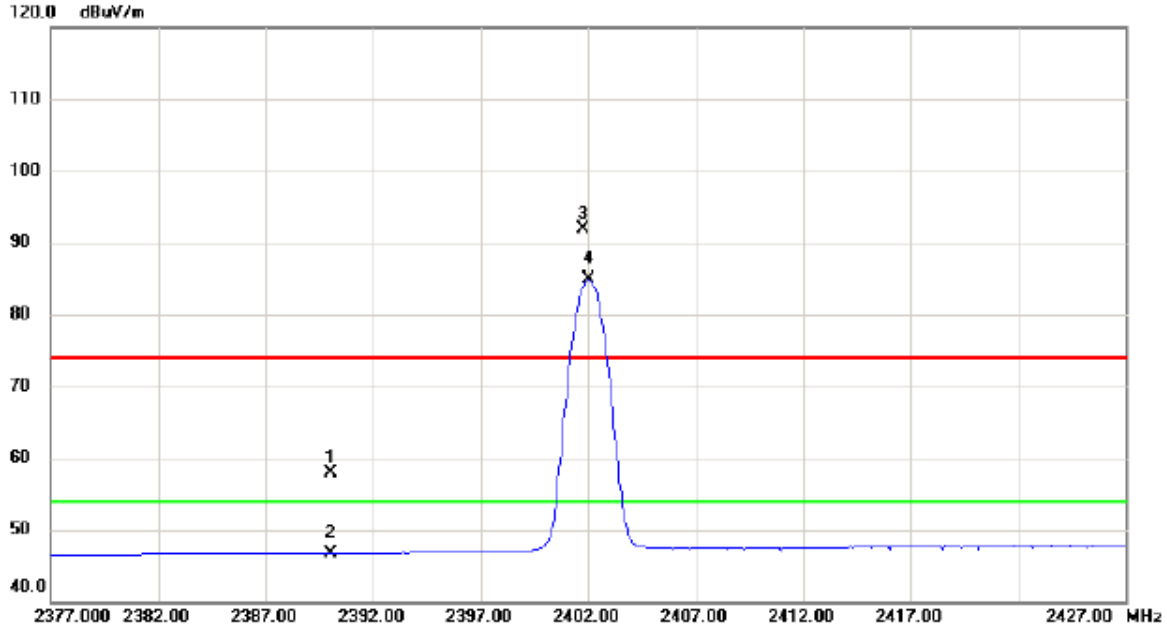

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.48	33.51	57.99	74.00	-16.01	peak	
2		2390.000	13.20	33.51	46.71	54.00	-7.29	AVG	
3	X	2401.750	58.24	33.58	91.82	74.00	17.82	peak	no limit
4	*	2402.050	51.24	33.58	84.82	54.00	30.82	AVG	no limit

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00

Vertical

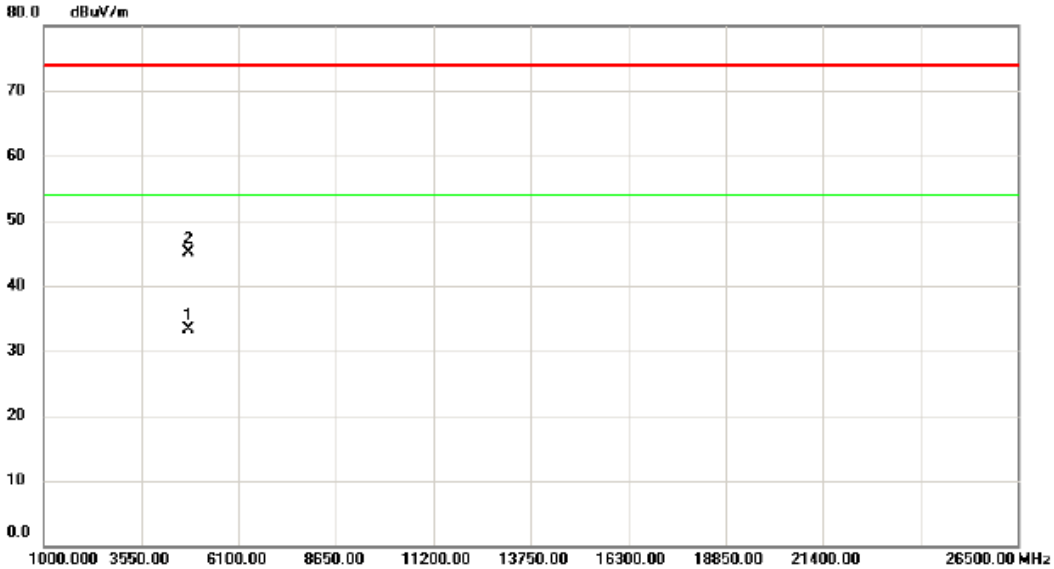

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4803.920	28.34	4.93	33.27	74.00	-40.73	peak	
2	*	4803.945	40.18	4.93	45.11	74.00	-28.89	peak	

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00

Horizontal

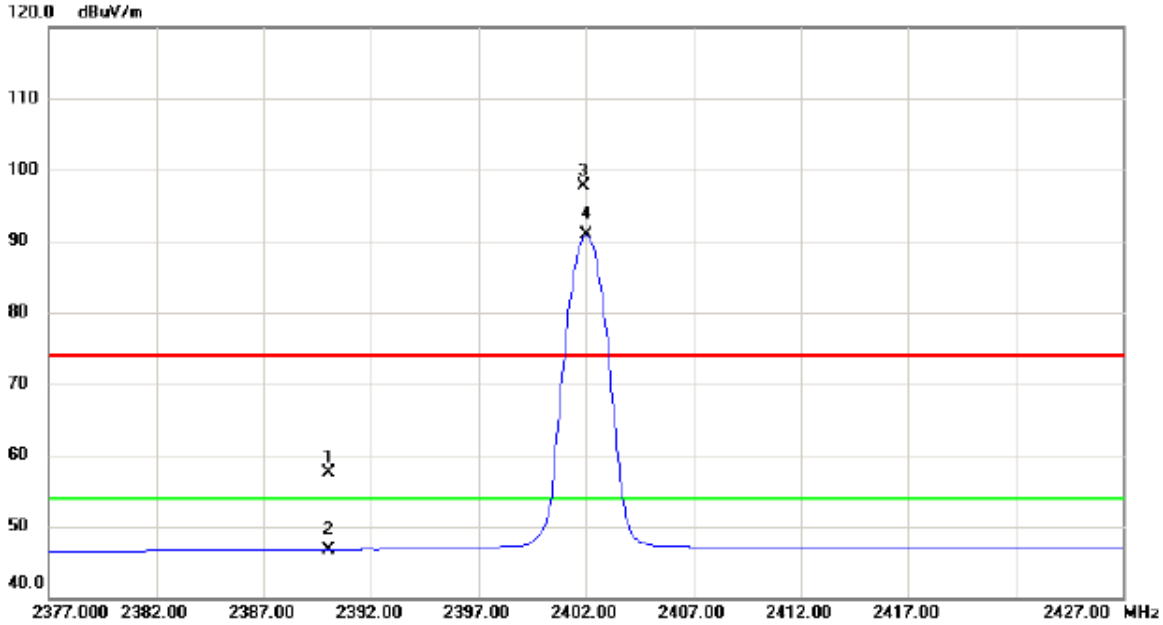

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.00	33.51	57.51	74.00	-16.49	peak	
2		2390.000	13.23	33.51	46.74	54.00	-7.26	AVG	
3	X	2401.900	64.11	33.58	97.69	74.00	23.69	peak	no limit
4	*	2402.050	57.24	33.58	90.82	54.00	36.82	AVG	no limit

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00

Horizontal

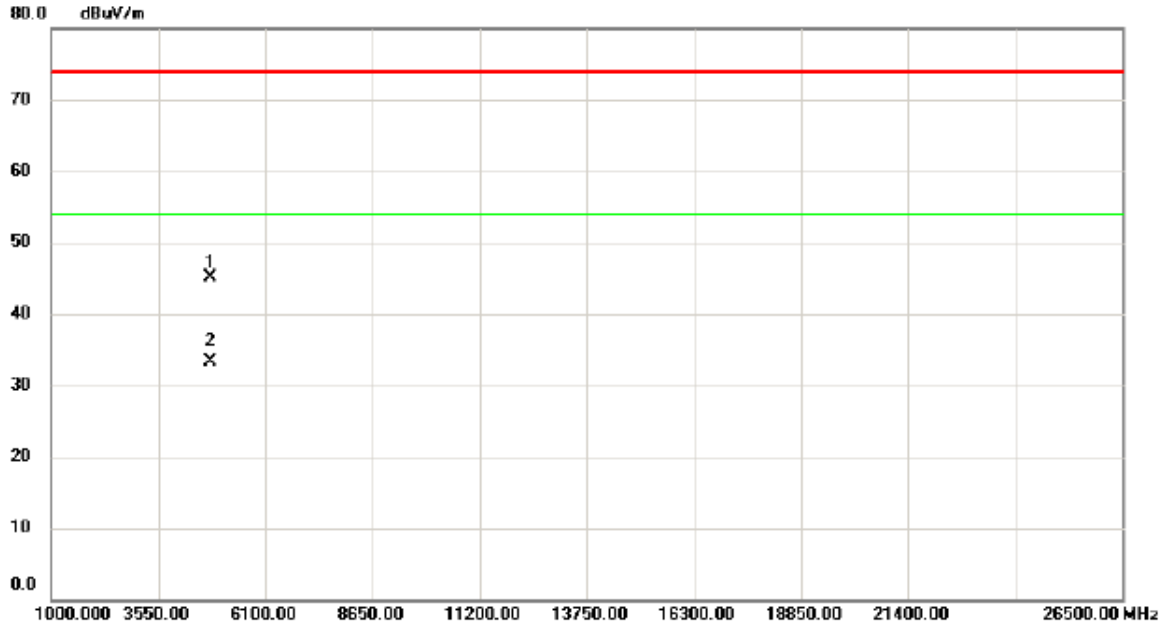

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.020	40.22	4.93	45.15	74.00	-28.85	peak	
2	*	4804.065	28.35	4.93	33.28	54.00	-20.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19

Vertical

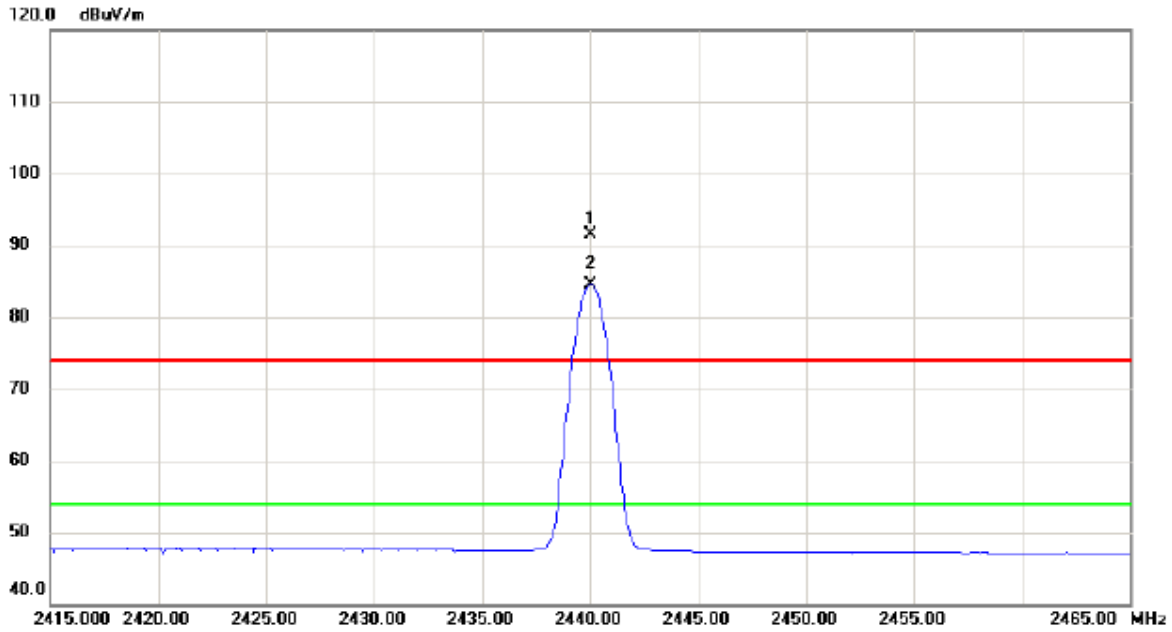

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2440.000	57.80	33.78	91.58	74.00	17.58	peak	no limit
2	*	2440.050	50.72	33.78	84.50	54.00	30.50	AVG	no limit

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19

Vertical

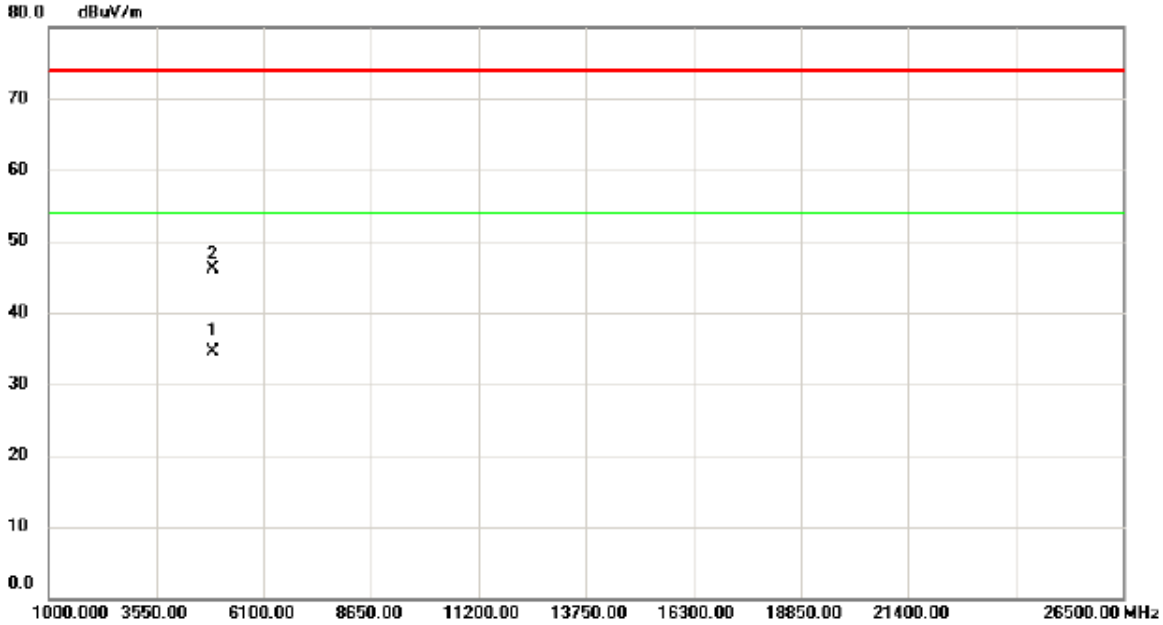

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4880.080	29.16	5.29	34.45	54.00	-19.55	AVG	
2		4879.800	40.87	5.29	46.16	74.00	-27.84	peak	

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19

Horizontal

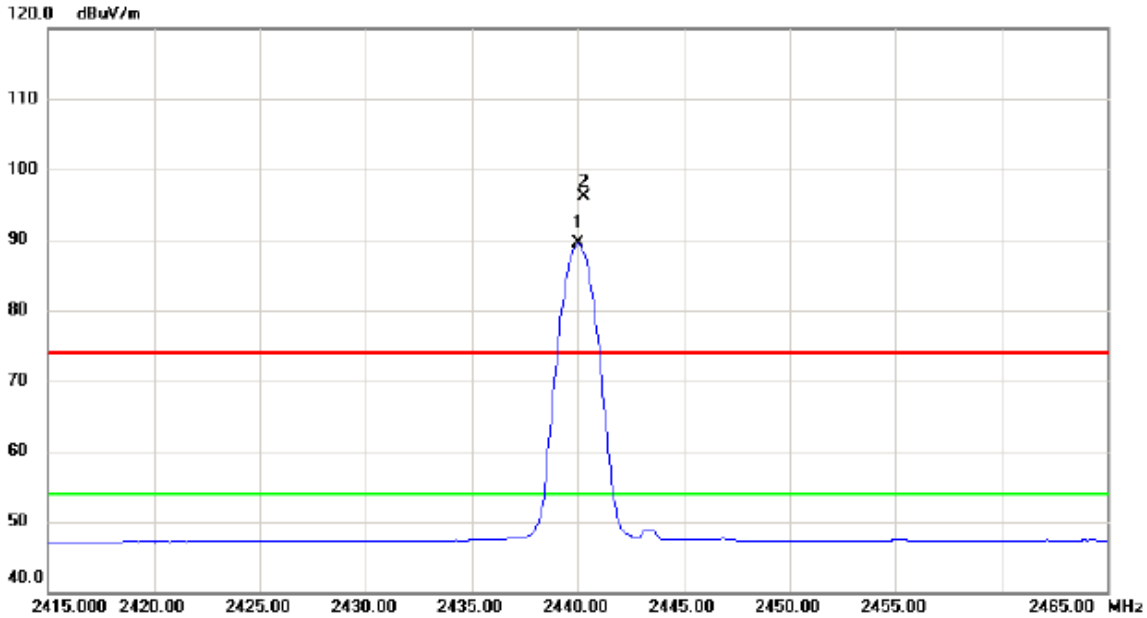

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2440.050	55.63	33.78	89.41	54.00	35.41	AVG	no limit
2	X	2440.300	62.39	33.80	96.19	74.00	22.19	peak	no limit

Orthogonal Axis :	X
Test Mode :	TX 2440MHz _CH19

Horizontal

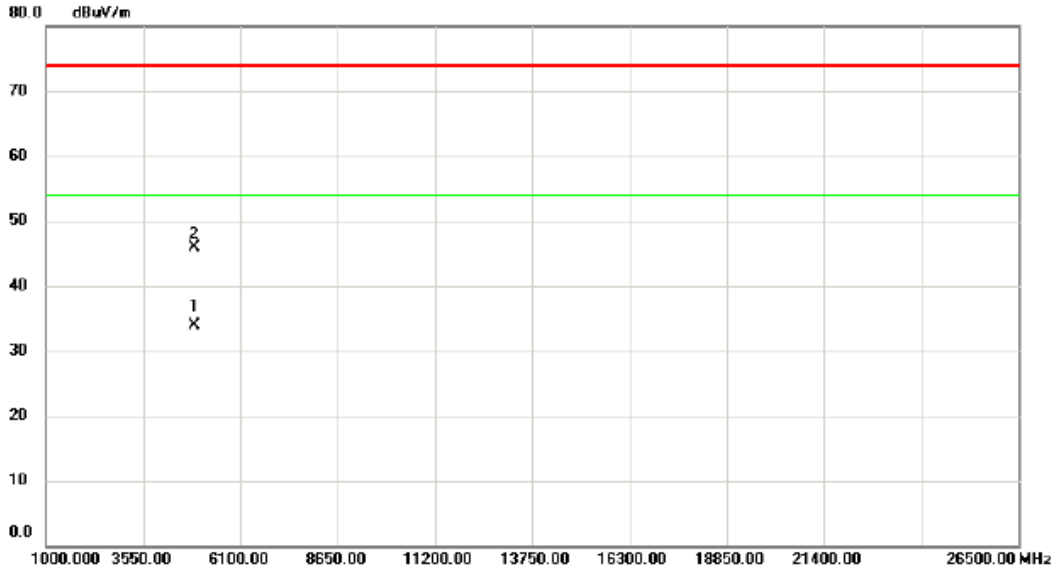

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4879.955	28.59	5.29	33.88	54.00	-20.12	AVG	
2		4879.990	40.58	5.29	45.87	74.00	-28.13	peak	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39

Vertical

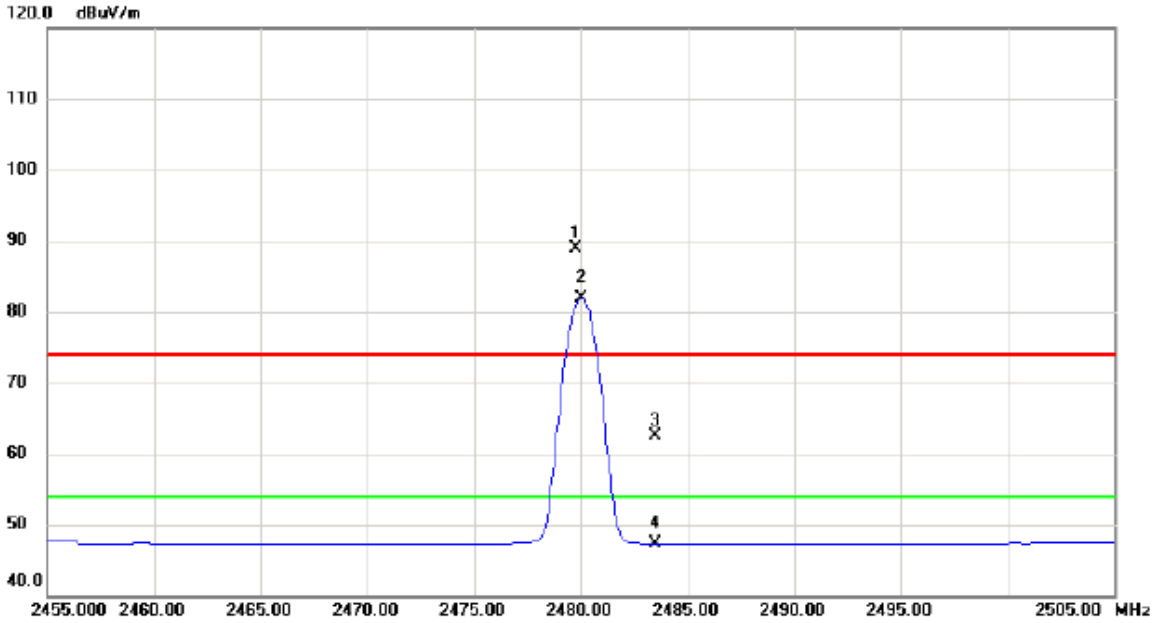

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.750	54.90	34.01	88.91	74.00	14.91	peak	no limit
2	*	2480.000	47.86	34.01	81.87	54.00	27.87	AVG	no limit
3		2483.500	28.52	34.02	62.54	74.00	-11.46	peak	
4		2483.500	13.30	34.02	47.32	54.00	-6.68	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39

Vertical

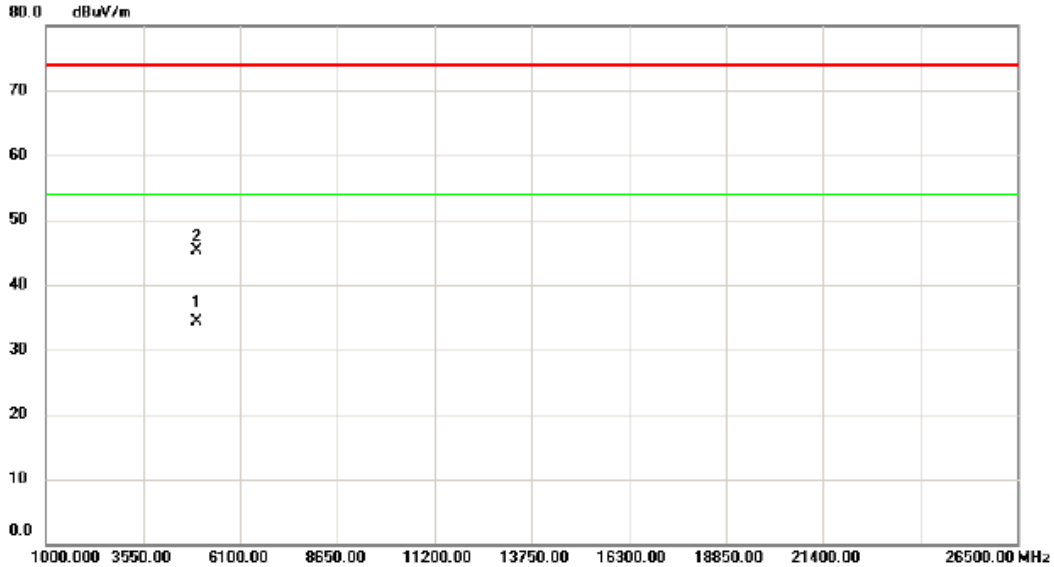

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.040	28.59	5.68	34.27	54.00	-19.73	AVG	
2		4959.500	39.64	5.68	45.32	74.00	-28.68	peak	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39

Horizontal

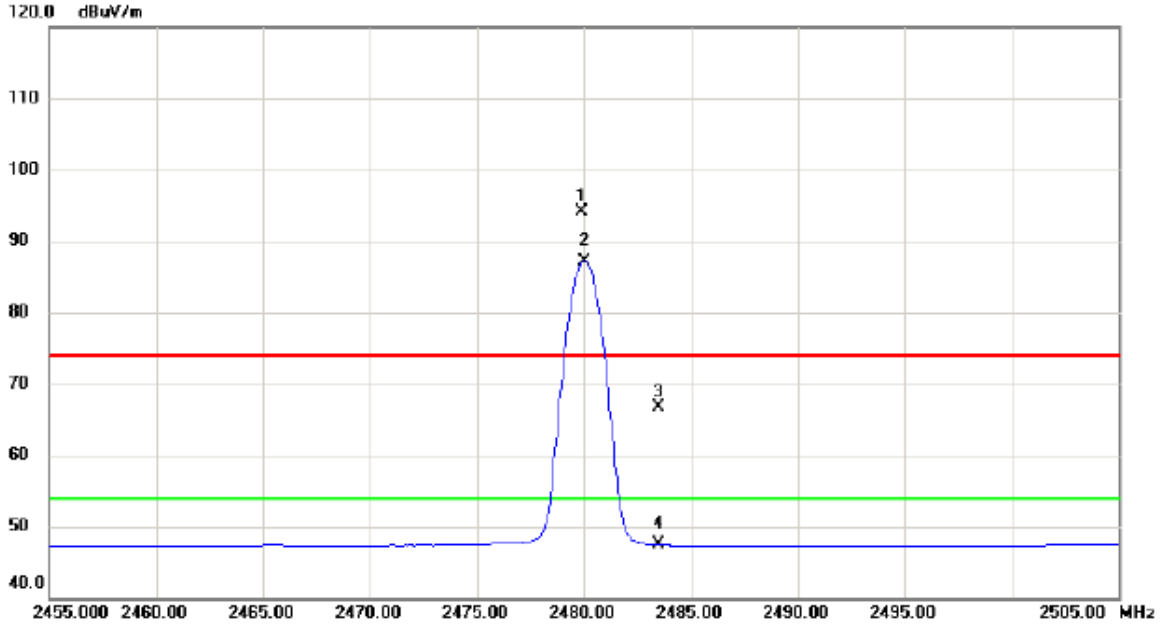

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.900	60.17	34.01	94.18	74.00	20.18	peak	no limit
2	*	2480.050	53.18	34.01	87.19	54.00	33.19	AVG	no limit
3		2483.500	32.72	34.02	66.74	74.00	-7.26	peak	
4		2483.500	13.43	34.02	47.45	54.00	-6.55	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH39

Horizontal

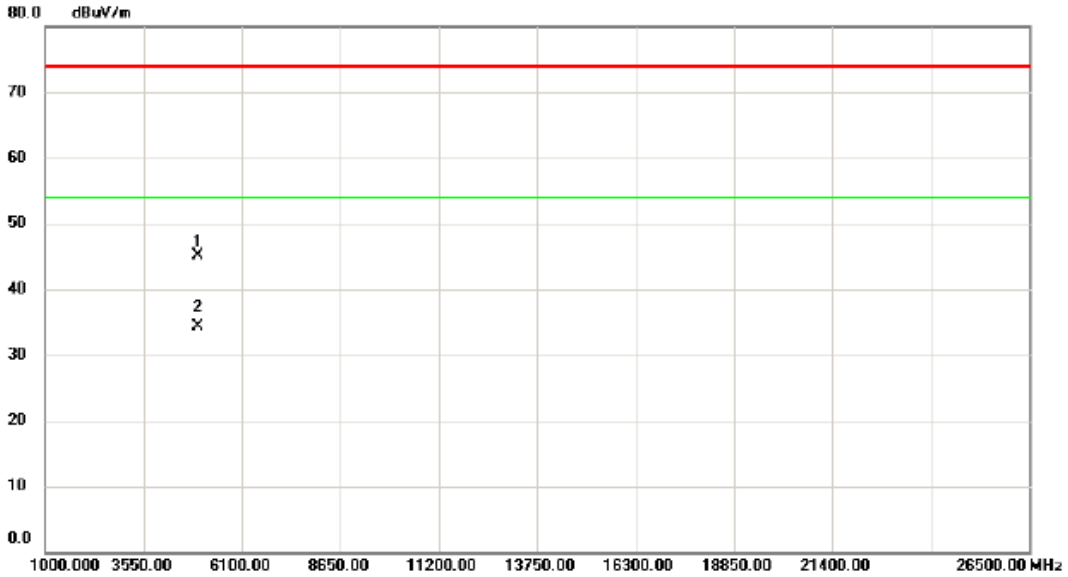

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.115	39.52	5.68	45.20	74.00	-28.80	peak	
2	*	4960.115	28.58	5.68	34.26	54.00	-19.74	AVG	

ATTACHMENT D - BANDWIDTH

Test Mode :	CH00, CH19 , CH39

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.75	1.11	500	Complies
2440	0.76	1.12	500	Complies
2480	0.78	1.12	500	Complies

TX CH00

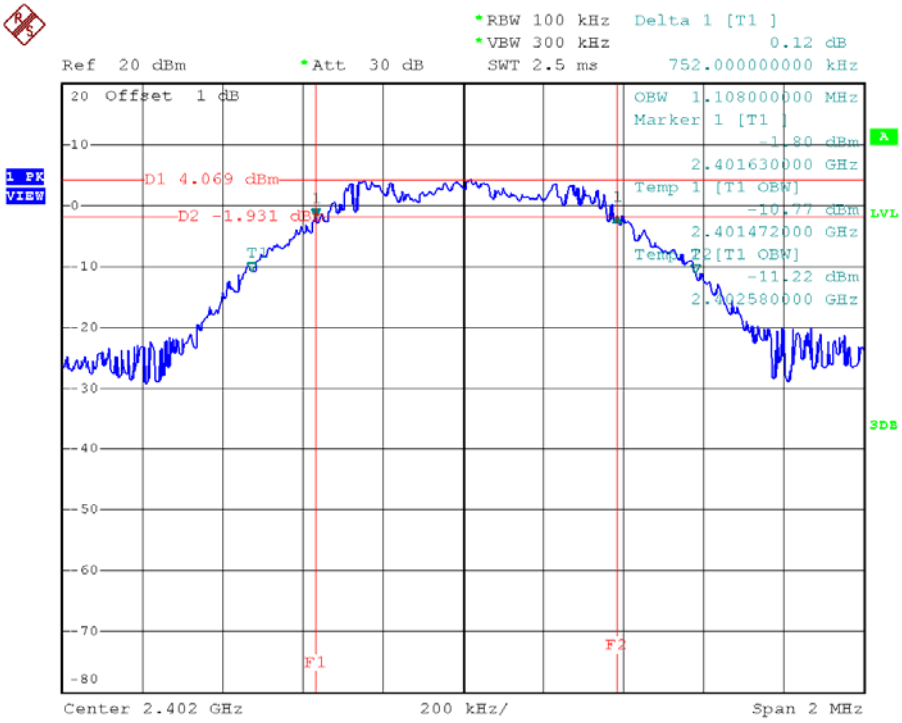

Date: 8.JUN.2016 17:46:13

TX CH19

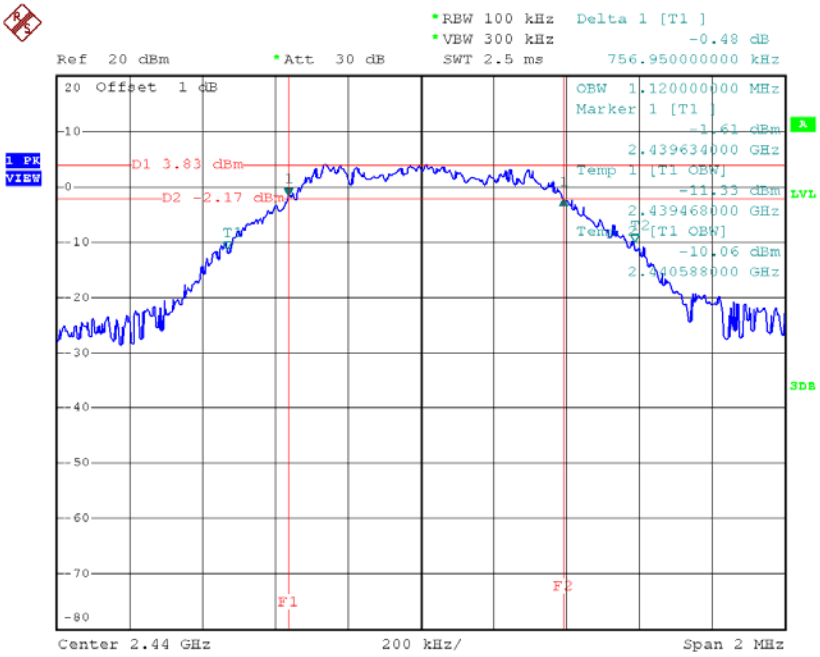

Date: 8.JUN.2016 17:48:27

TX CH39

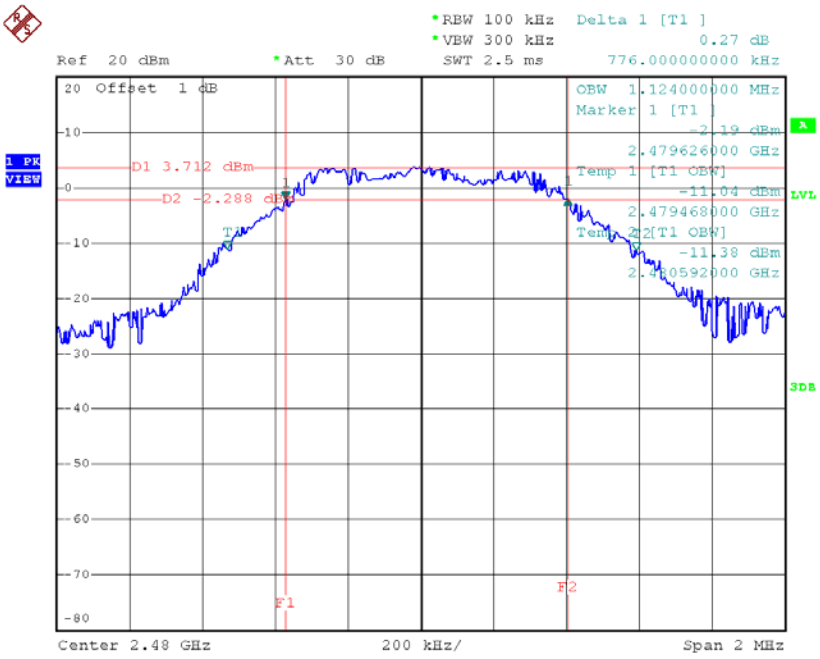

Date: 8.JUN.2016 17:50:11

ATTACHMENT E - MAXIMUM OUTPUT POWER TEST

Test Mode :	CH00, CH19 , CH39

Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit(dBm)	Max. Limit(W)	Result
2402 MHz	4.31	0.0027	30.00	1.0000	Complies
2440 MHz	4.15	0.0026	30.00	1.0000	Complies
2480 MHz	4.00	0.0025	30.00	1.0000	Complies

ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode :	CH00, CH19 , CH39

CH00 (Lower)

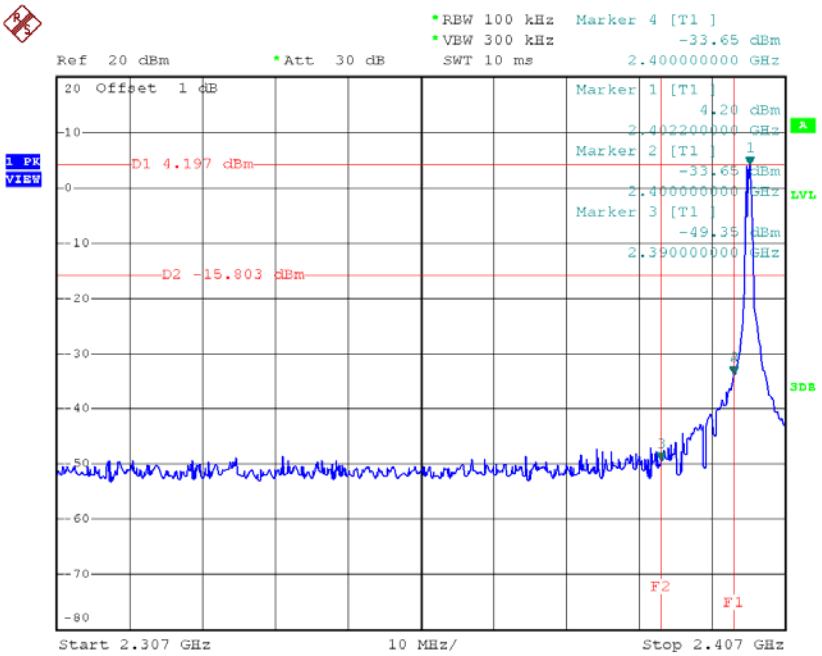

Date: 8.JUN.2016 17:46:22

CH39 (upper) - 1Mbps

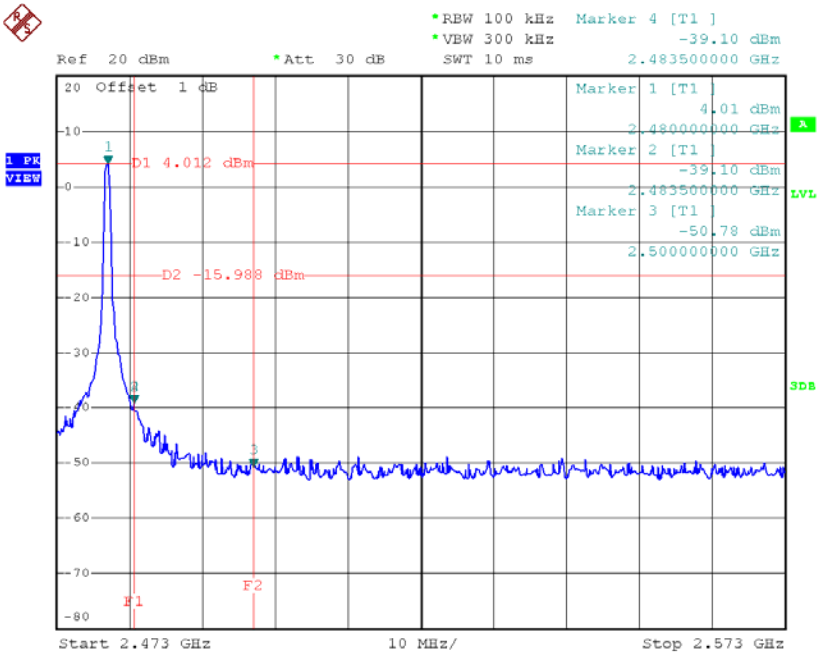

Date: 8.JUN.2016 17:50:19

CH00 (10 Harmonic of the frequency)

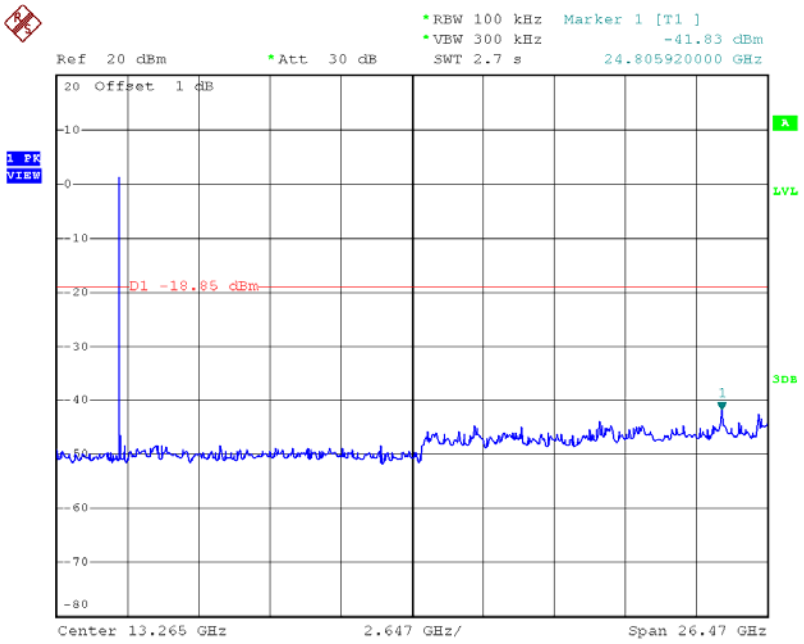

Date: 8.JUN.2016 18:05:45

CH19 (10 Harmonic of the frequency)

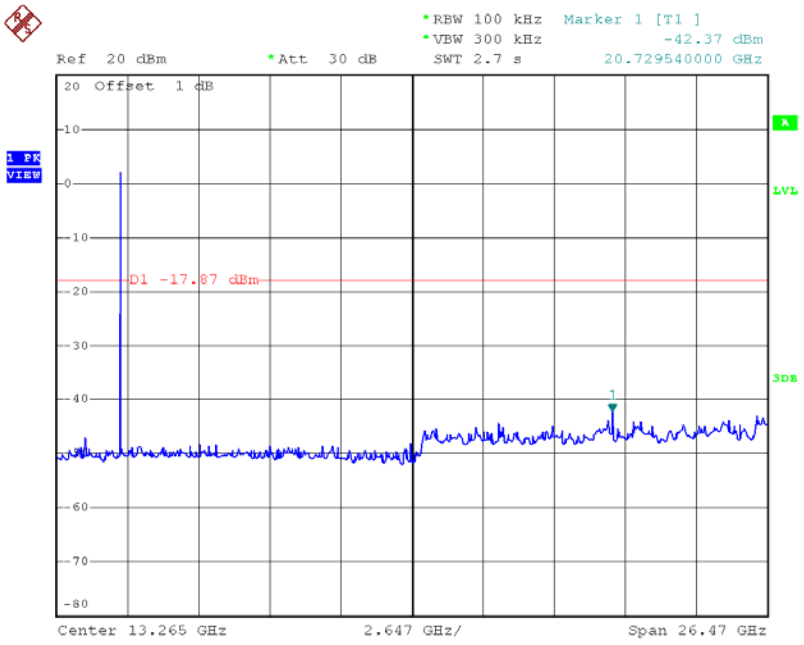

Date: 8.JUN.2016 18:04:17

CH39 (10 Harmonic of the frequency)

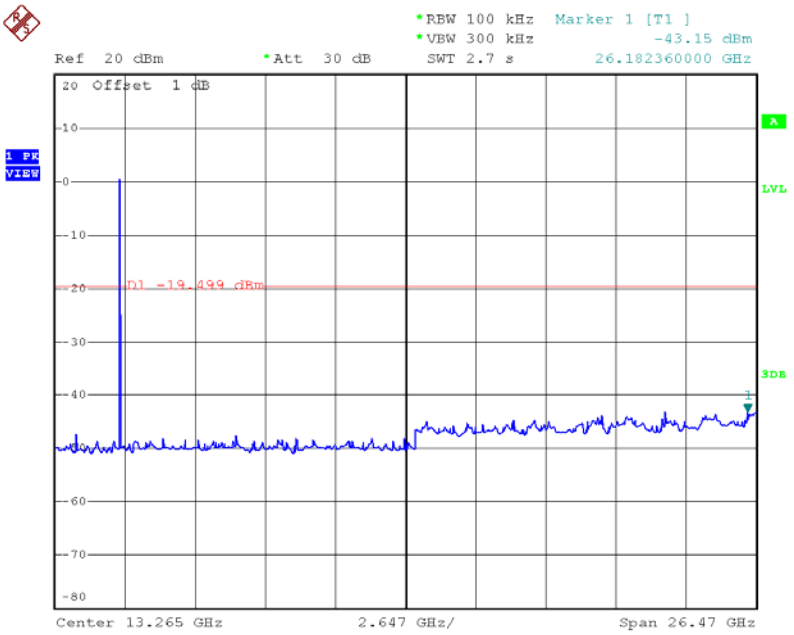

Date: 8.JUN.2016 17:57:45

ATTACHMENT G - POWER SPECTRAL DENSITY TEST

Test Mode :	CH00, CH19 , CH39

Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
2402	-10.97	8	Complies
2440	-10.80	8	Complies
2480	-11.00	8	Complies

TX CH00

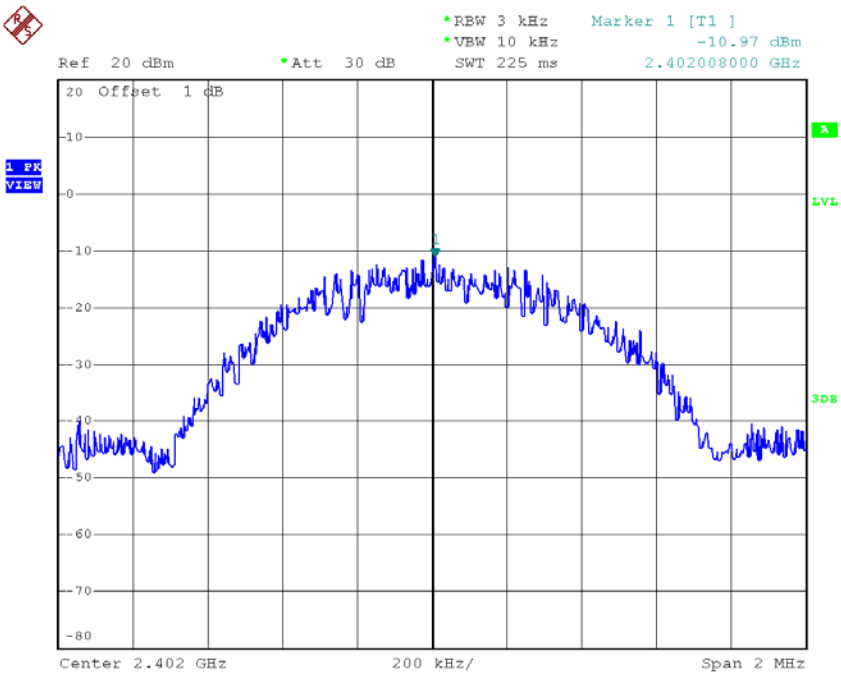

Date: 8.JUN.2016 17:47:08

TX CH19

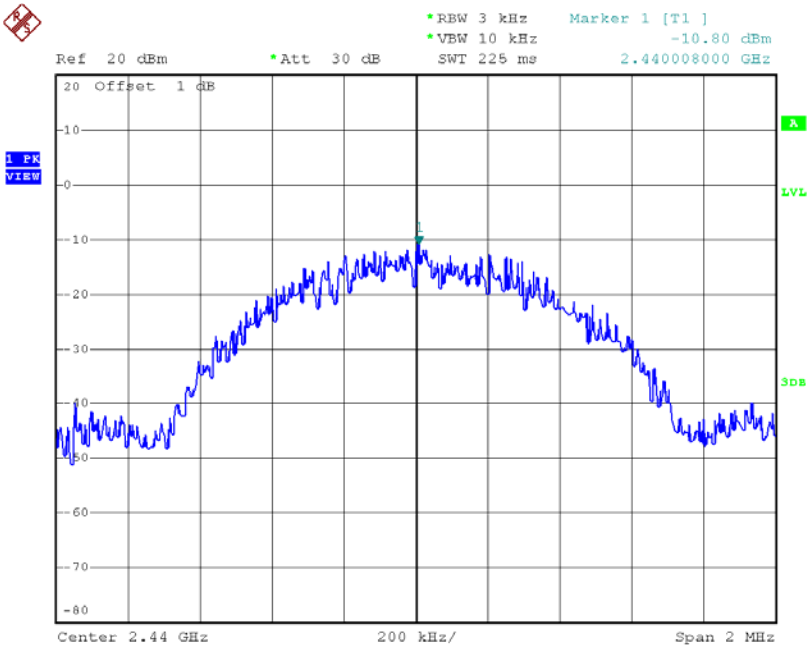

Date: 8.JUN.2016 17:49:02

TX CH39

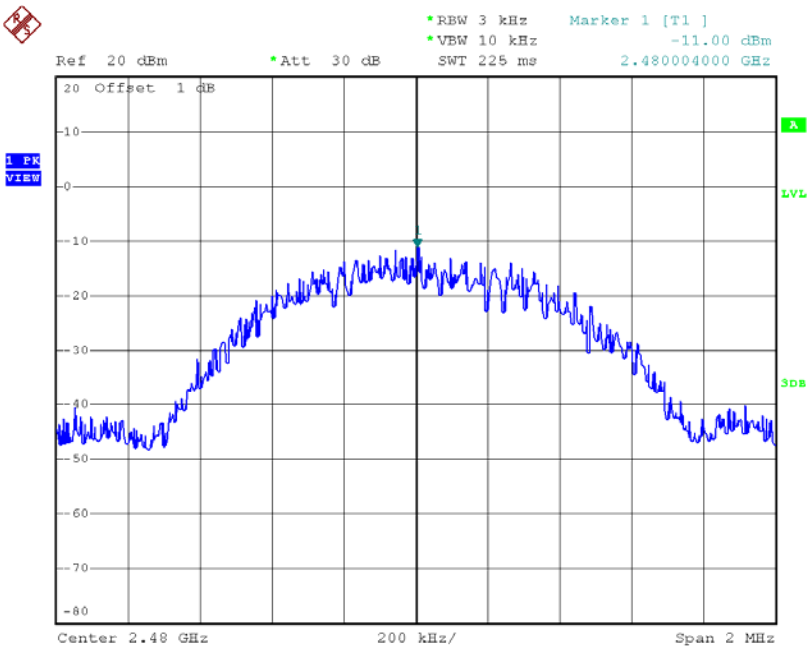

Date: 8.JUN.2016 17:50:55