TEST REPORT

N°: 163636-742946-A **Version : 01**

Subject	**Radio spectrum matters** **tests according to standards:** **47 CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5**
Issued to	**IJINUS** 25 ZA de Kervidanou 3 29300 - MELLAC FRANCE

Apparatus under test

Product	Temperature logger with 2 external probes
Trade mark	**IJINUS**
Manufacturer	**IJINUS**
Model under test	**LT7**
Serial number	**IJT 30 06 0000 4252**
FCC ID	**SE6E003**
IC	**10983A-E003**

Conclusion	See Test Program chapter
Test date	: October 8, 2019 to November 21, 2019
Test location	Fontenay Aux Roses
Test Site	6230B-1
Composition of document	40 pages
Document issued on	January 6, 2020

Written by :
Julien Palard
Tests operator

Approved by
Arnaud FAYETTE
Technical manager

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures.This document doesn't anticipate any certification decision.

PUBLICATION HISTORY

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.

Version	Date	Author	Modification
01	06/01/2019	J. PALARD	Creation of the document

Date of receipt of test item 08/10/2019

SUMMARY

1. TEST PROGRAM 4
2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER) 5
3. OCCUPIED BANDWIDTH 9
4. 6DB EMISSION BANDWIDTH 12
5. DUTY CYCLE 15
6. MAXIMUM CONDUCTED OUTPUT POWER 18
7. POWER SPECTRAL DENSITY 21
8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE 24
9. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS 27
10. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS 31
11. UNCERTAINTIES CHART 40

1. TEST PROGRAM

References

- **47 CFR Part 15.247**
- **RSS 247 Issue 2**
- **RSS Gen Issue 5**
- **KDB 558074 D01 DTS Meas Guidance v05r02**
- **ANSI C63.10-2013**

Radio requirement:

Clause (47CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5) Test Description	Test result - Comments			
Occupied Bandwidth	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
6dB Bandwidth	☑ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Duty Cycle	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Maximum Conducted Output Power	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Power Spectral Density	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Conducted Spurious Emission at the Band Edge	☑ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands	☑ PASS	☐ FAIL	☐ NA()	☐ NP(1)
AC Power Line Conducted Emission	☐ PASS	☐ FAIL	☑ NA(2)	☐ NP(1)
Unwanted Emissions into Restricted Frequency Bands	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Receiver Radiated emissions	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program
(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement
FAIL: EUT does not comply with standard's requirement
NA: Not Applicable
NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

IJINUS LT7 **Serial Number: IJT 30 06 0000 4252**

Equipment Under Test

Equipment Under Test

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
-	-	-	☐	☐	☐	-

Equipment information:

Type:				
Frequency band:	[902 – 928] MHz			
Number of Channel:	1			
Spacing channel:	-			
Channel bandwidth:	0,6 MHz			
Antenna Type:	☑ Integral	☐ External	☐ Dedicated	
Antenna connector:	☐ Yes	☐ No	☑ Temporary for test	
Transmit chains:	☑ 1	☐ 2		
Receiver chains	☑ 1	☐ 2		
Type of equipment:	☑ Stand-alone	☐ Plug-in	☐ Combined	
Ad-Hoc mode:	☐ Yes	☑ No		
Duty cycle:	☑ Continuous duty	☐ Intermittent duty	☐ 100% duty	
Equipment type:	☑ Production model	☐ Pre-production model		
Operating temperature range:	Tmin:	☑ -20°C	☐ 0°C	☐ X°C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☑ 60°C
Type of power source:	☐ AC power supply	☐ DC power supply	☑ Battery	
Operating voltage range:	Vnom:	☐ 120V/60Hz	☑ 3,6 Vdc	

Antenna Characteristic			
Antenna assembly	**Gain (dBi)**	**Frequency Band (MHz)**	**Impedance(Ω)**
1	0	902-928	50

CHANNEL PLAN	
Channel	**Frequency (MHz)**
Cnom	915

Modulation Type	Worst Case Modulation
GFSK	☑

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test mode 2	Permanent reception

Test	Running mode	
Occupied Bandwidth	☑ Test mode 1	☐ Alternative test mode()
6dB Bandwidth	☑ Test mode 1	☐ Alternative test mode()
Duty Cycle	☑ Test mode 1	☐ Alternative test mode()
Maximum Conducted Output Power	☑ Test mode 1	☐ Alternative test mode()
Power Spectral Density	☑ Test mode 1	☐ Alternative test mode()
Conducted Spurious Emission at the Band Edge	☑ Test mode 1	☐ Alternative test mode()
Unwanted Emissions into Non-Restricted Frequency Bands	☑ Test mode 1	☐ Alternative test mode()
AC Power Line Conducted Emission	☑ Test mode 1	☐ Alternative test mode()
Unwanted Emissions into Restricted Frequency Bands	☑ Test mode 1	☐ Alternative test mode()
Receiver Radiated emissions	☑ Test mode 2	☐ Alternative test mode()

2.3. EQUIPMENT LABELLING

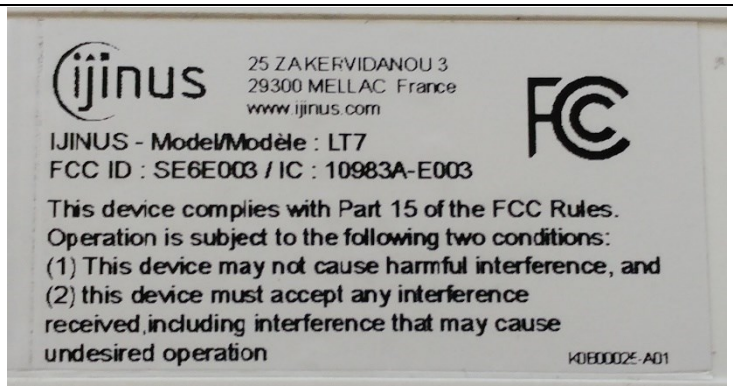

2.4. EQUIPMENT MODIFICATION

☑ None ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

3.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☐ RSS-Gen Issue 5 § 6.7
☑ ANSI C63.10 § 6.9.3

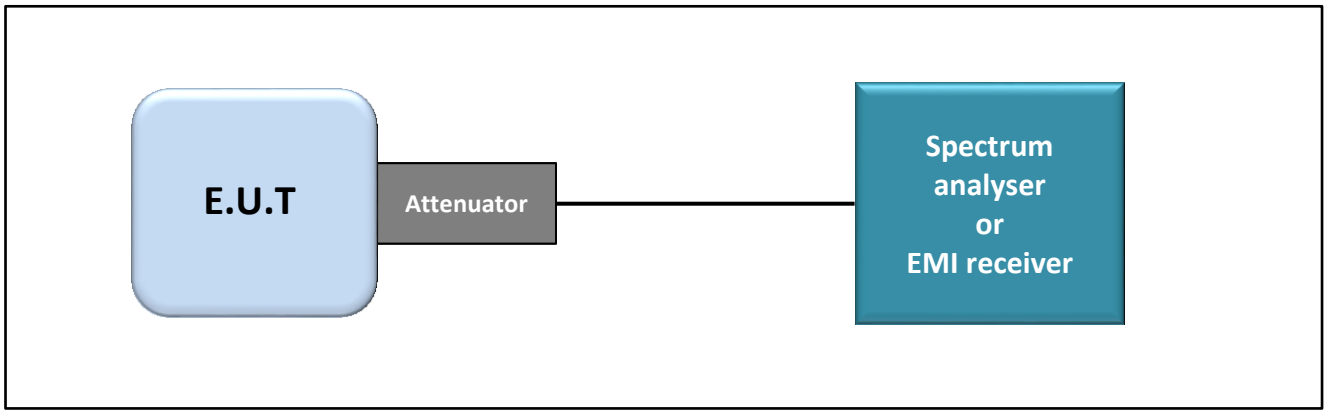

Test set up of Occupied Bandwidth

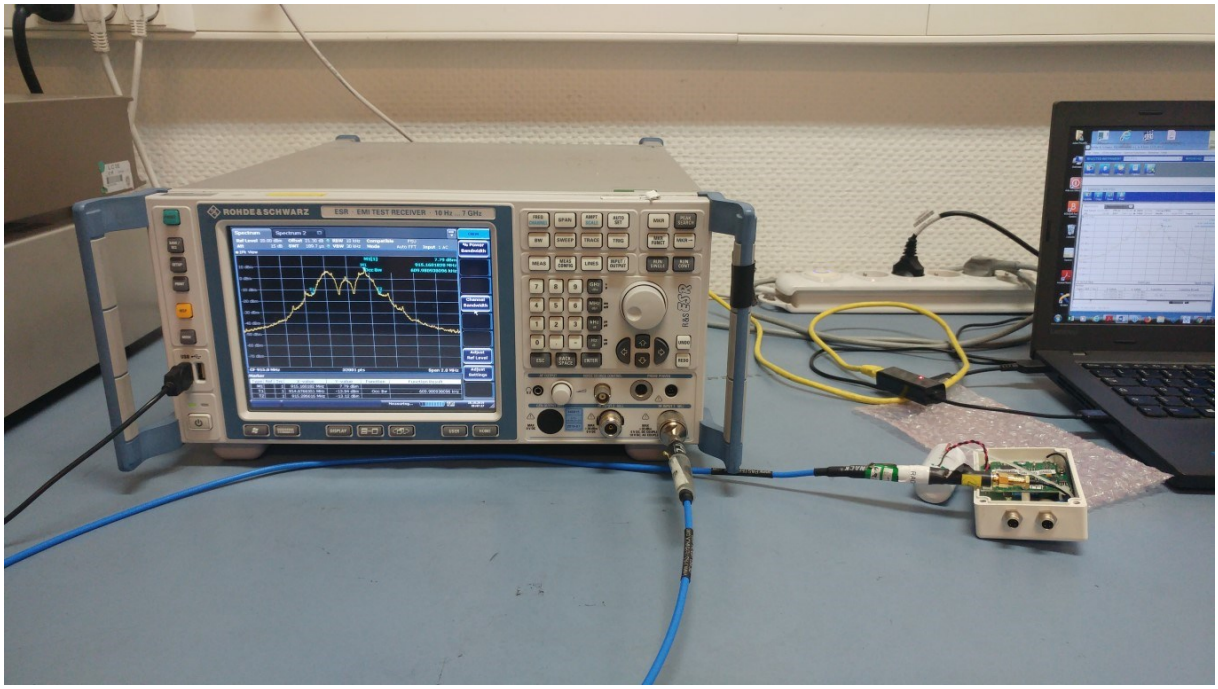

Photograph for Occupied bandwidth

3.3. LIMIT

None

3.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.5. RESULTS

Occupied Bandwidth	
Cnom	

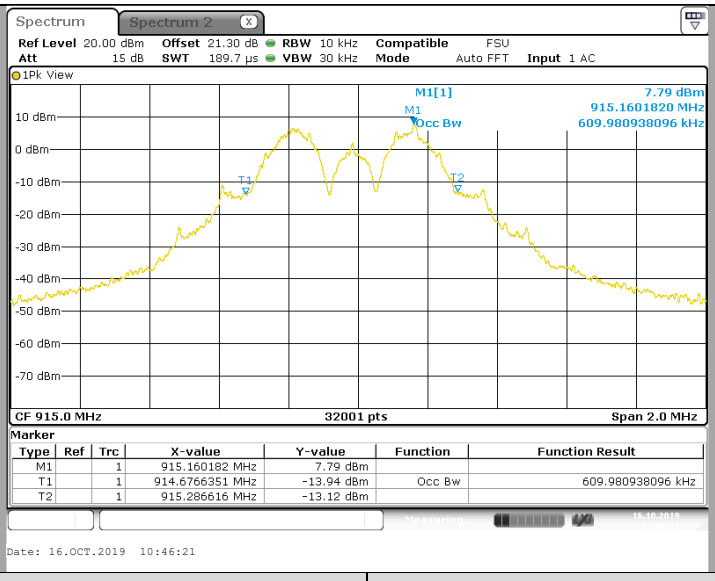

Channel	Occupied Bandwidth (MHz)
Cnom	0,610

3.6. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **IJINUS LT7**, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS-GEN ISSUE 5** limits.

4. 6dB Emission Bandwidth

4.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

4.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.8.1
☐ ANSI C63.10 § 11.8.2

Measurement Procedure:
1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

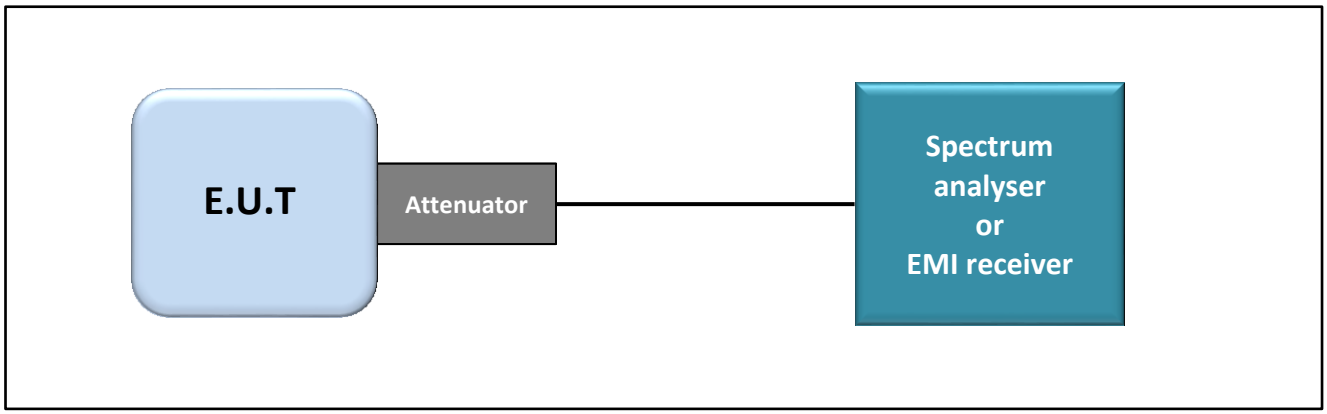

Test set up of 6dB Emission Bandwidth

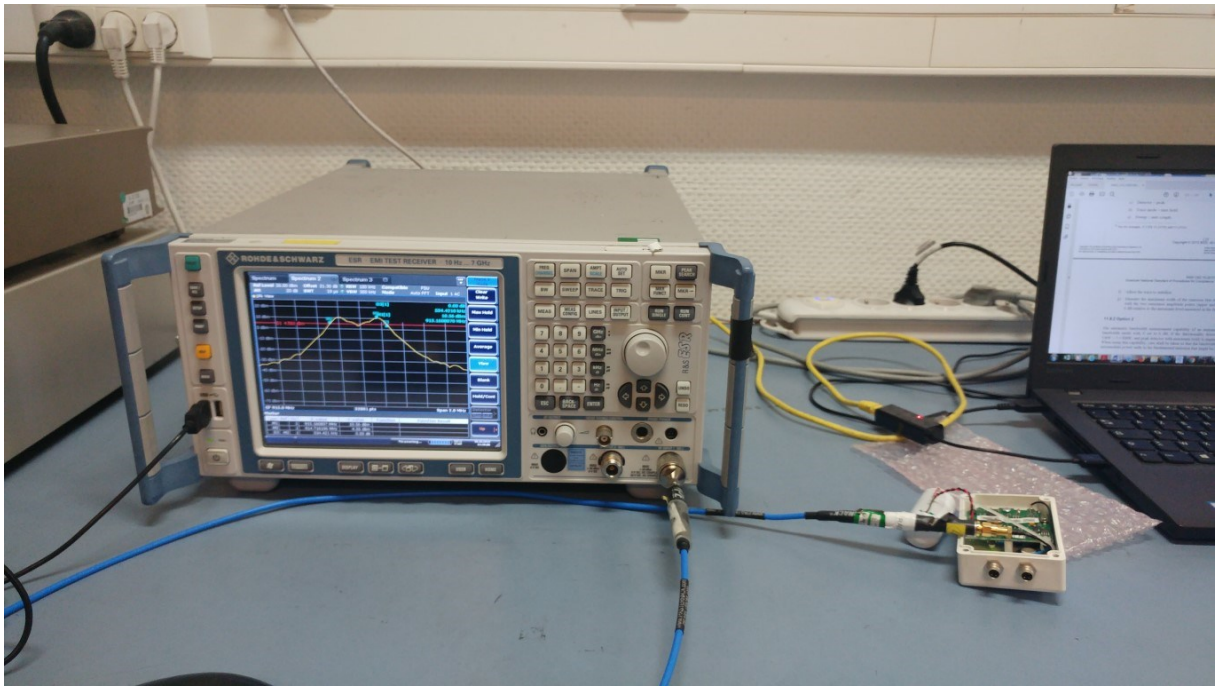

Photograph for 6dB emission bandwidth

4.3. LIMIT

The 6dB bandwidth shall be at least 500kHz

4.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. RESULTS

6dB Emission Bandwidth

Cnom

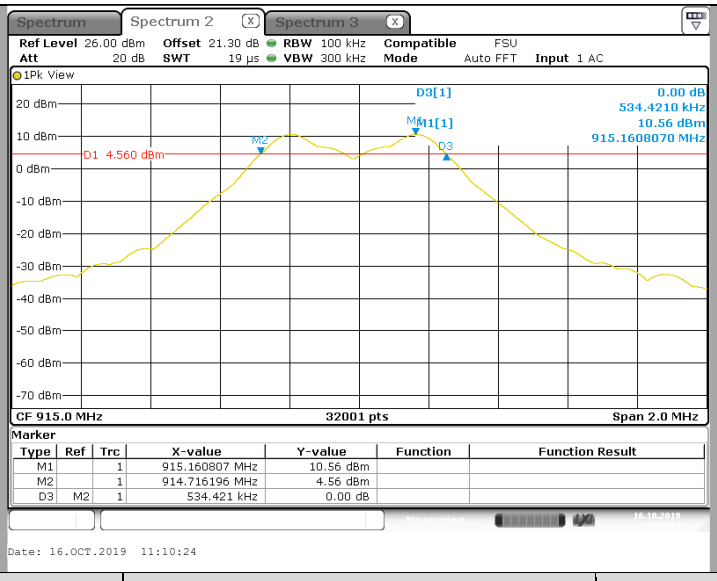

Channel	6dB Emission Bandwidth (MHz)	Limit (MHz)
Cmin	0,535	Minimum 0.5

4.6. CONCLUSION

6dB Emission Bandwidth measurement performed on the sample of the product **IJINUS LT7**, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

5. DUTY CYCLE

5.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

5.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.6

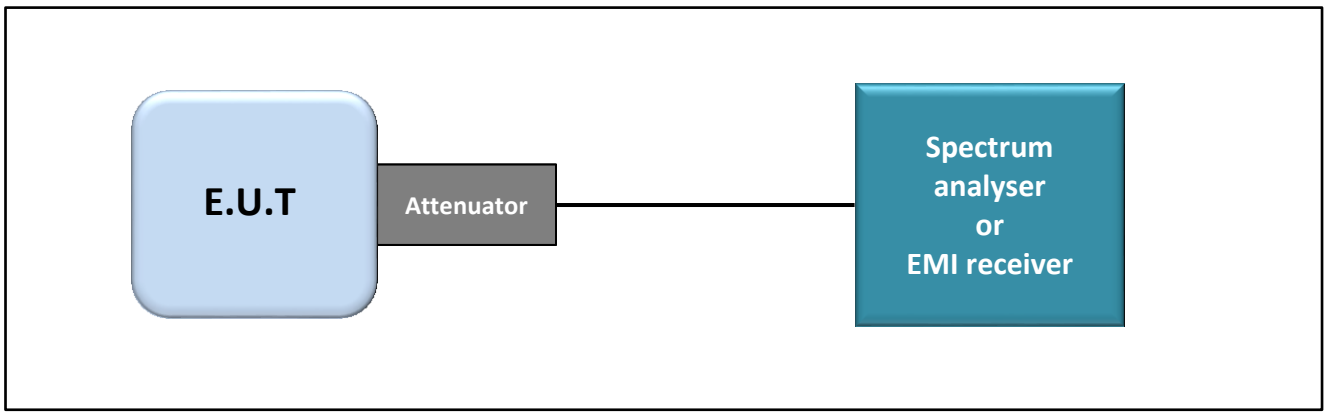

Test set up of Duty Cycle

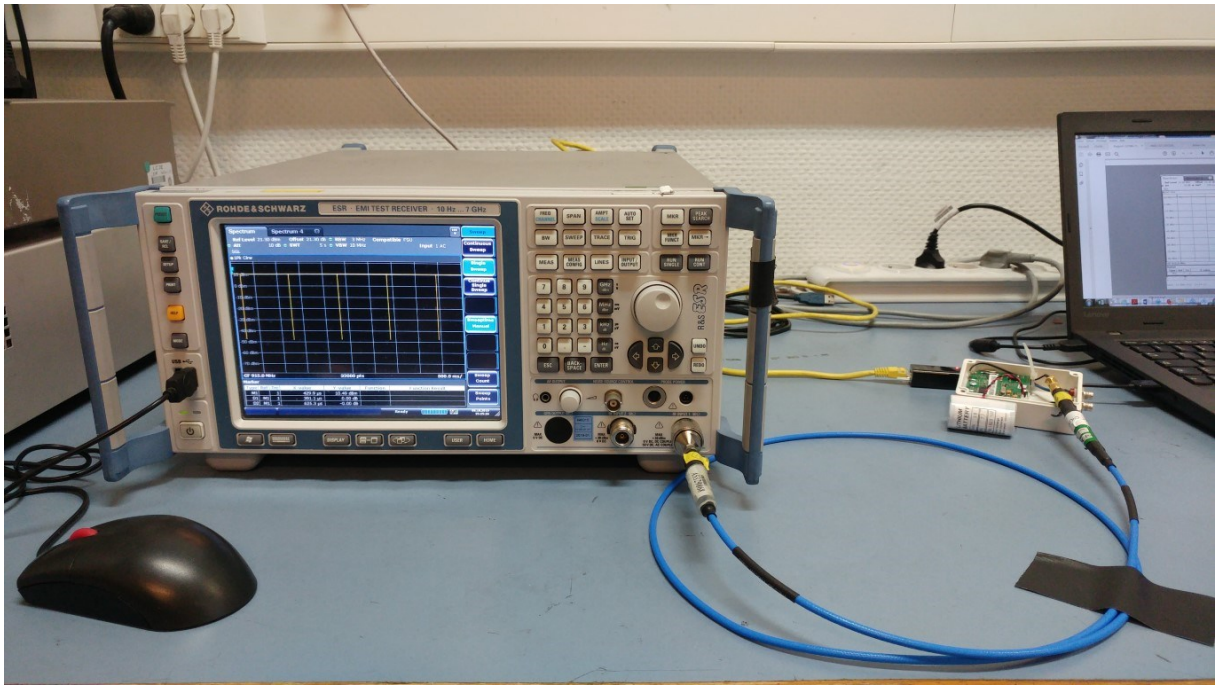

Photograph for Duty Cycle

5.3. LIMIT

None

5.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. RESULTS

Duty Cycle

Cnom

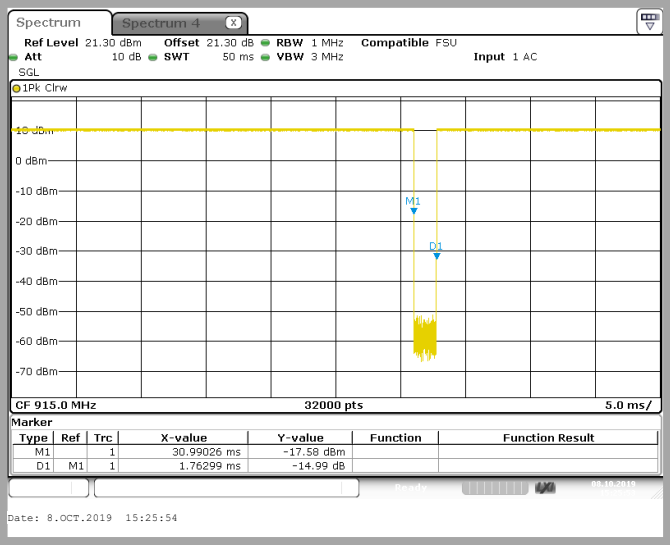

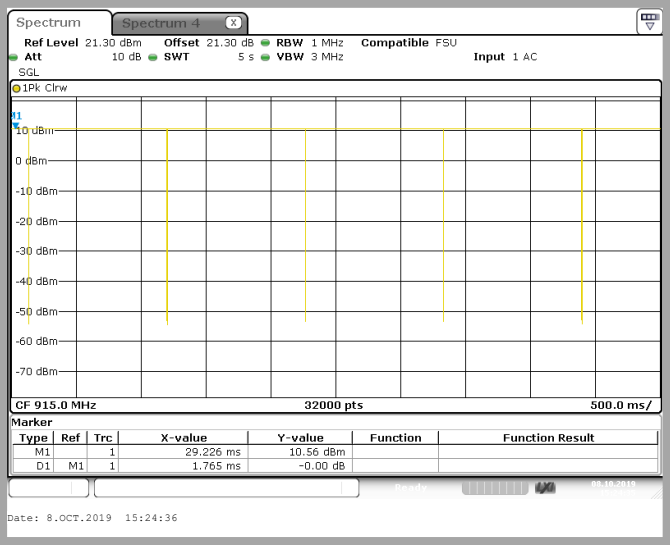

Channel	Duty Cycle (%)	Duty Cycle Correction (dB)
Cnom	99,82	$20\log(\frac{1}{cycle})$ = 0,0156

5.6. CONCLUSION

Duty Cycle measurement performed on the sample of the product **IJINUS** LT7, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

6.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.9.1.1
☐ ANSI C63.10 § 11.9.1.2
☐ ANSI C63.10 § 11.9.2.2.2 (Method AVGSA-1)
☐ ANSI C63.10 § 11.9.2.2.4 (Method AVGSA-2)

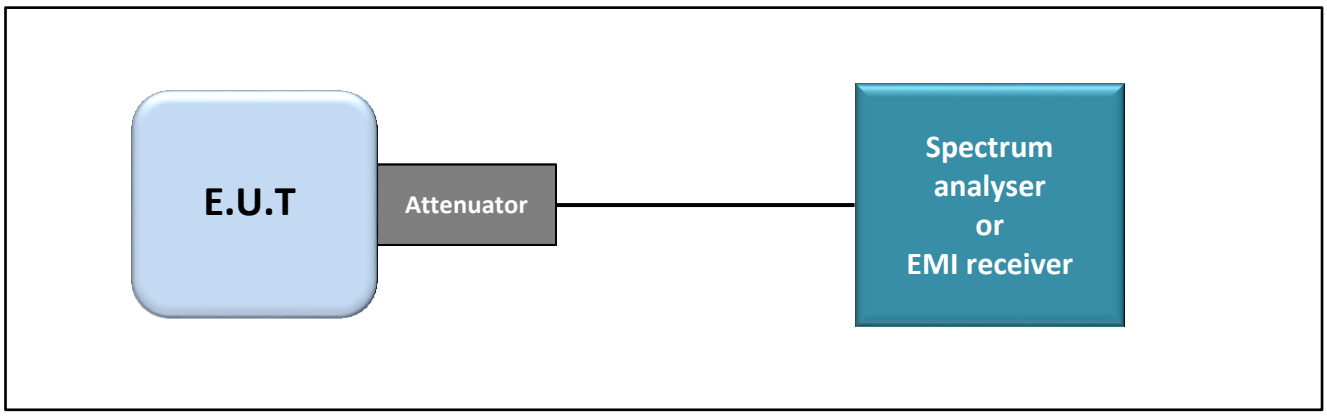

Test set up of Maximum Conducted Output Power

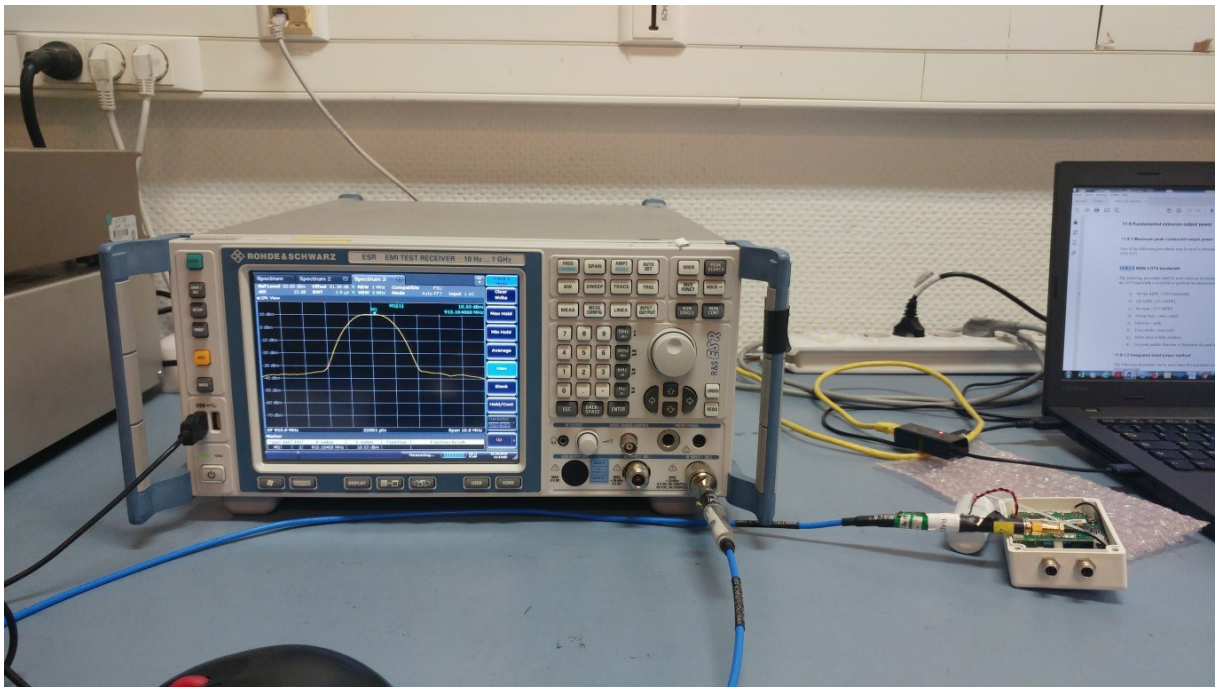

Photograph for Maximum Conducted Output Power

6.3. LIMIT

Maximum Conducted Output power:
902-928MHz: Shall not exceed 30dBm
Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

6.5. RESULTS

Maximum Conducted Output Power

Cnom

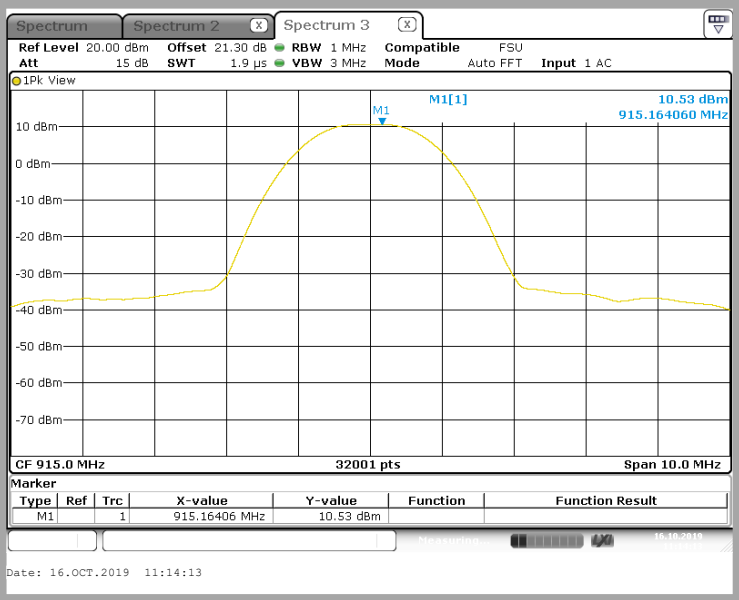

Channel	Offset Cable + Att (dB)	Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cnom	**21,3**	0	10,53	30

6.6. CONCLUSION

Maximum Conducted Output Power measurement performed on the sample of the product **IJINUS LT7**, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

7.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.10.2 (Method PKPSD)
☐ ANSI C63.10 § 11.10.3 (Method AVGPSD-1)

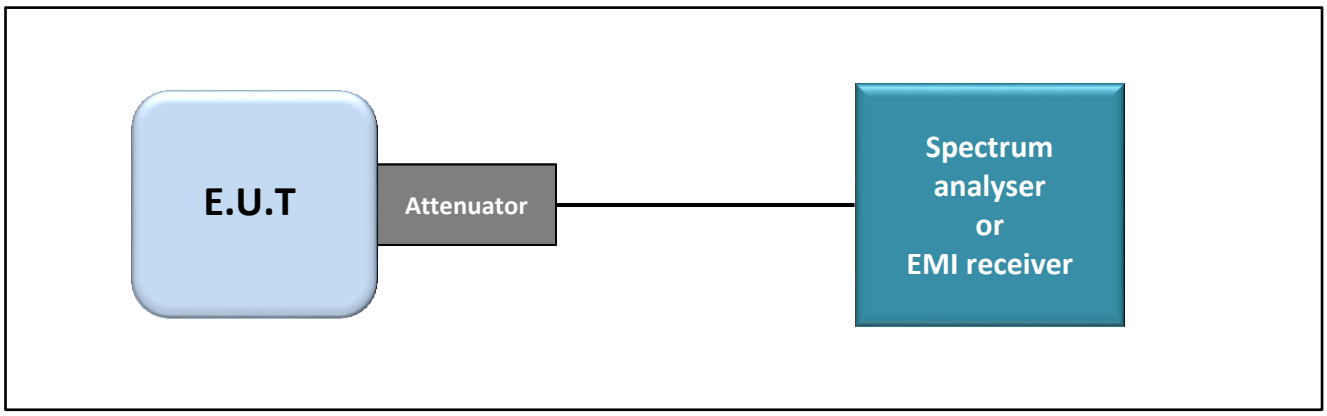

Test set up of Power Spectral Density

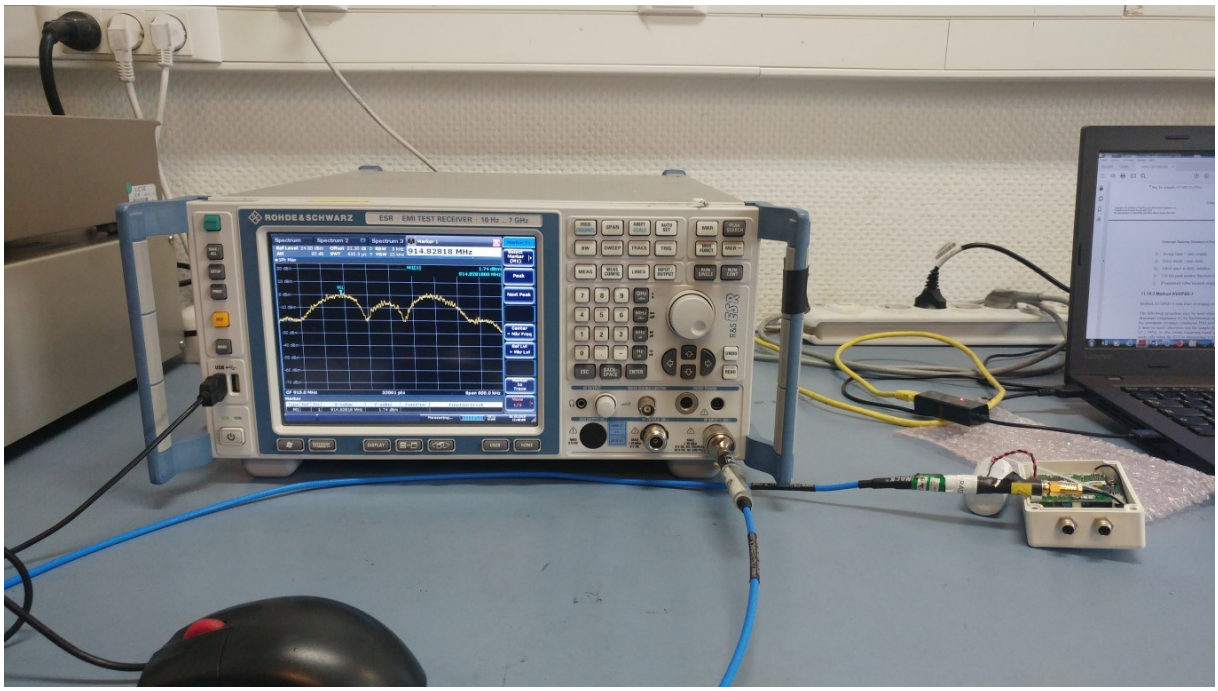

Photograph for Power Spectral Density

7.3. LIMIT

Power Spectral Density:
902-928MHz: Shall not exceed 8dBm/3kHz
Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

7.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

7.5. RESULTS

Power Spectral Density				
Cnom				
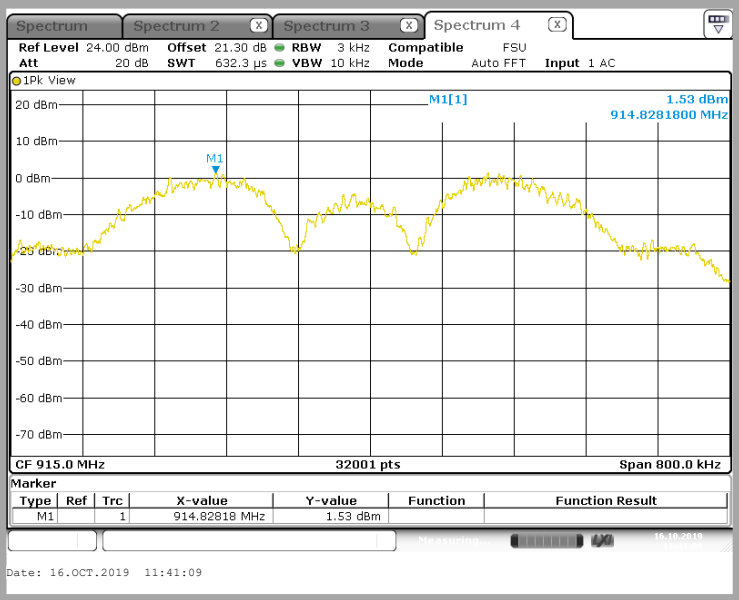				
Channel	Offset Cable + Att (dB)	Antenna Gain (dBi)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Cnom	**21,3**	0	1,53	8

7.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **IJINUS LT7,** SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE

8.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

8.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.11

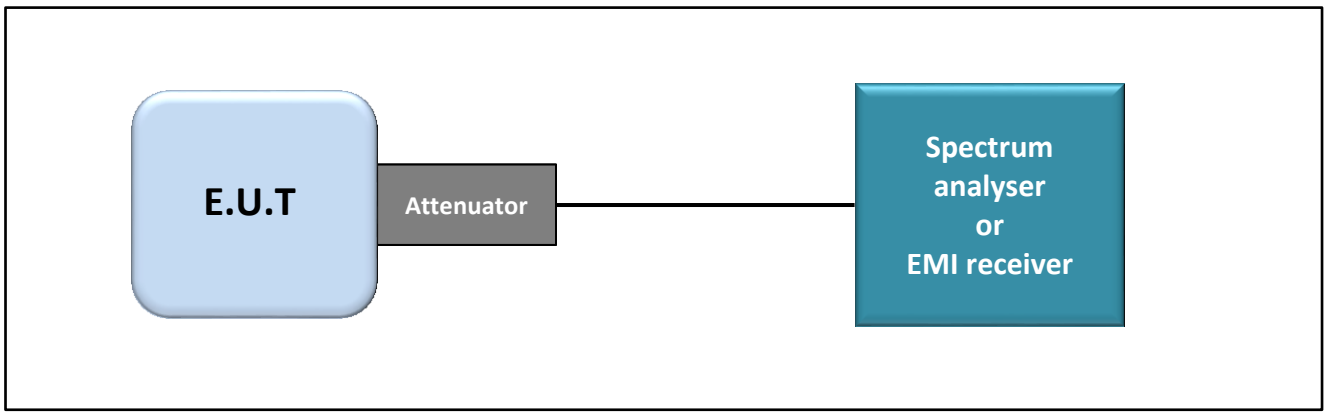

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands at the Band Edge

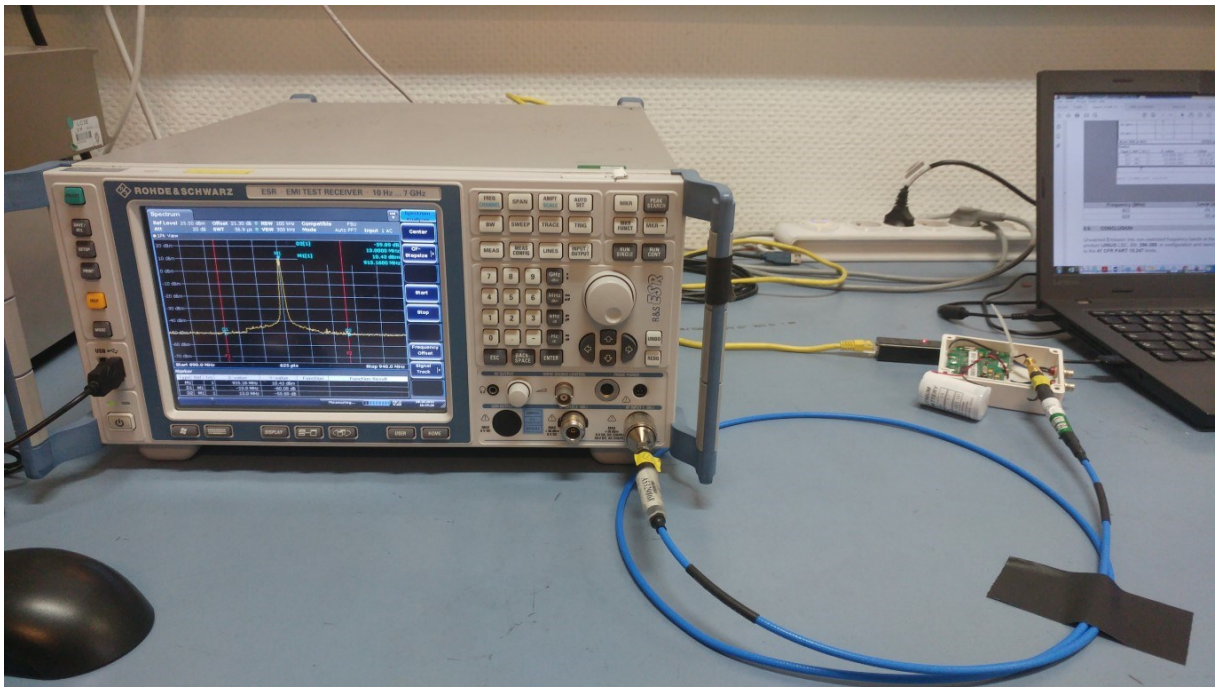

Photograph for Unwanted Emission into non-restricted frequency bands at the band edge

8.3. LIMIT

All Spurious Emissions must be at least 20dB (Maximum Conduted Power) below the Fundamental Radiator Level at the Band Edge Edge “902MHz & 928MHz”

8.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months.

8.5. RESULTS

Cnom

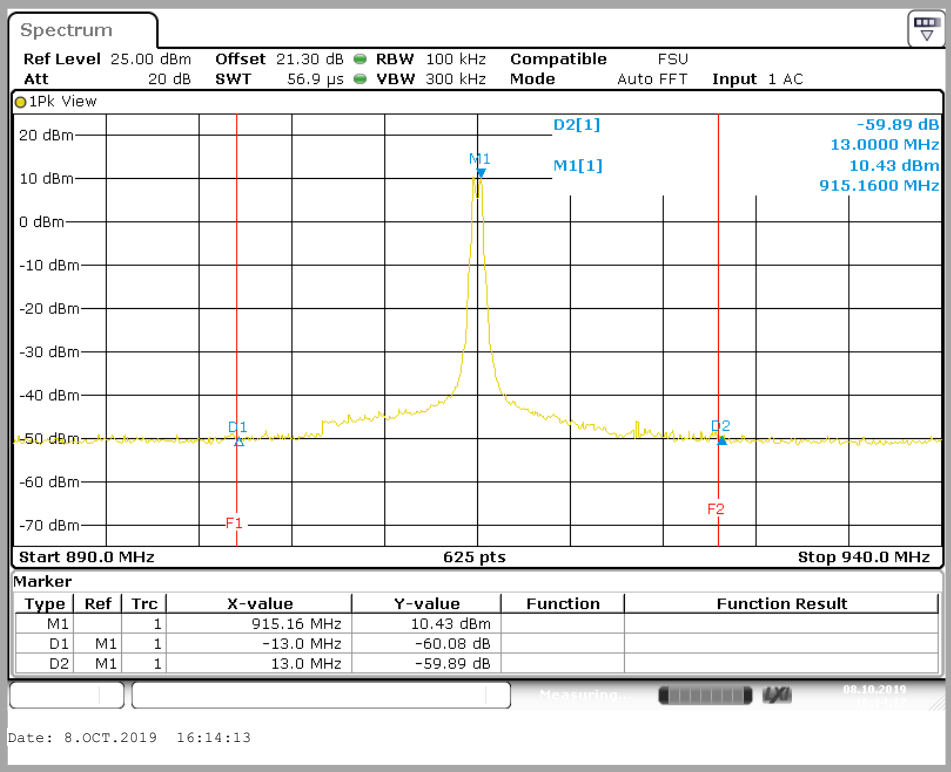

Frequency (MHz)	Level (dBc)	Limit (dBc)
902	-60,08	20
928	-59,89	20

8.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands at the band edge measurement performed on the sample of the product **IJINUS LT7**, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

9. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 8, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

9.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ ANSI C63.10 § 11.11

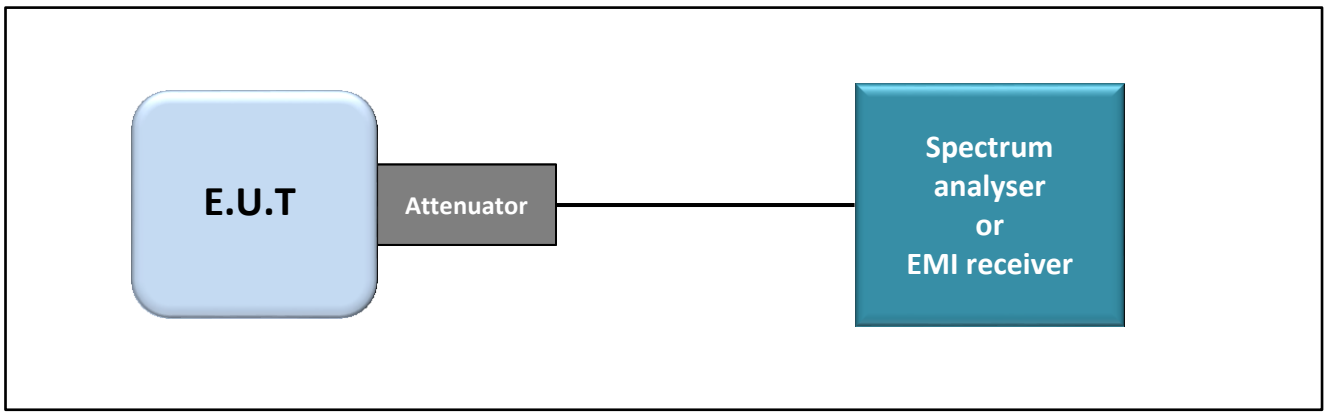

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands

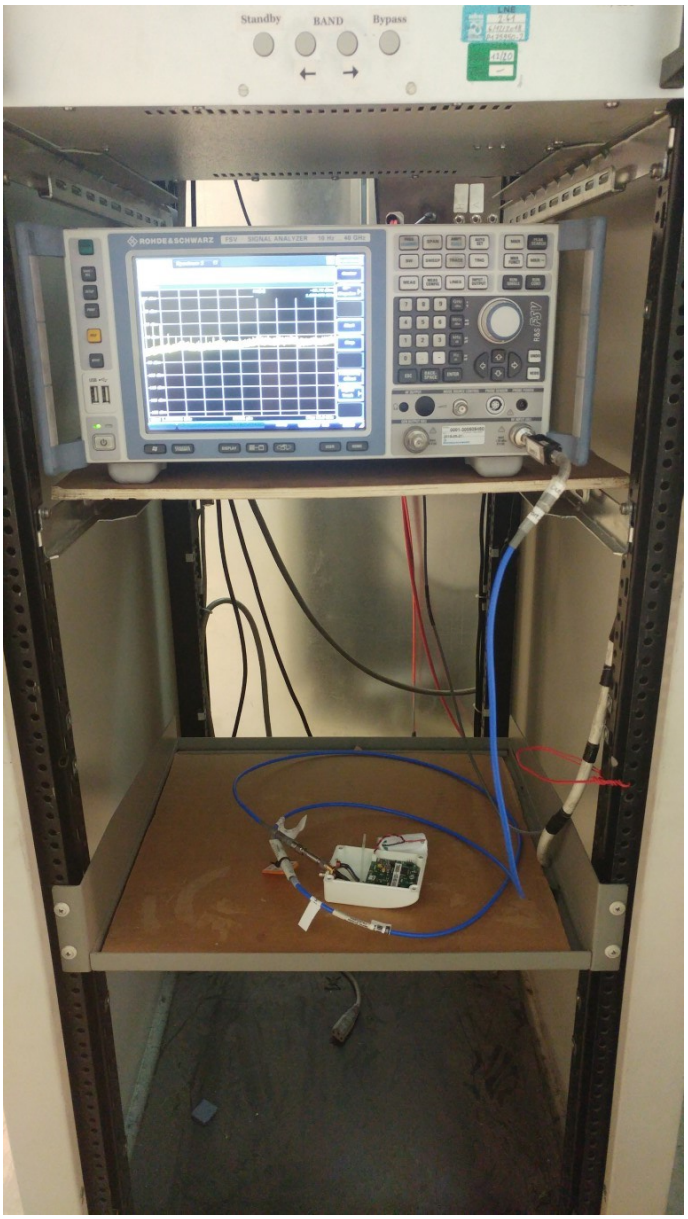

Photograph for Unwanted Emission into non-restricted frequency bands

9.3. LIMIT

All Spurious Emissions must be at least 20dB (Maximum Conduted Power) below the Fundamental Radiator Level

9.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Cable Conducted S36 chamber	TELEDYNE	084-0555-2MTR	A5329758	2019/02	2020/02
Attenuator 3dB Cable Spurious Conducted	-	WA54-3-12	A7122223	2019/02	2020/02
High Pass Filter 868MHz	WAINWRIGHT	WHKX12-935	A7484069	2017/10	2019/10
EMI receiver	ROHDE & SCHWARZ	FSV40GHz	A4060061	2019/05	2021/05

Note: In our quality system, the test equipment calibration due is more & less 2 months

9.5. RESULTS

Cmin/Cnom/Cmax

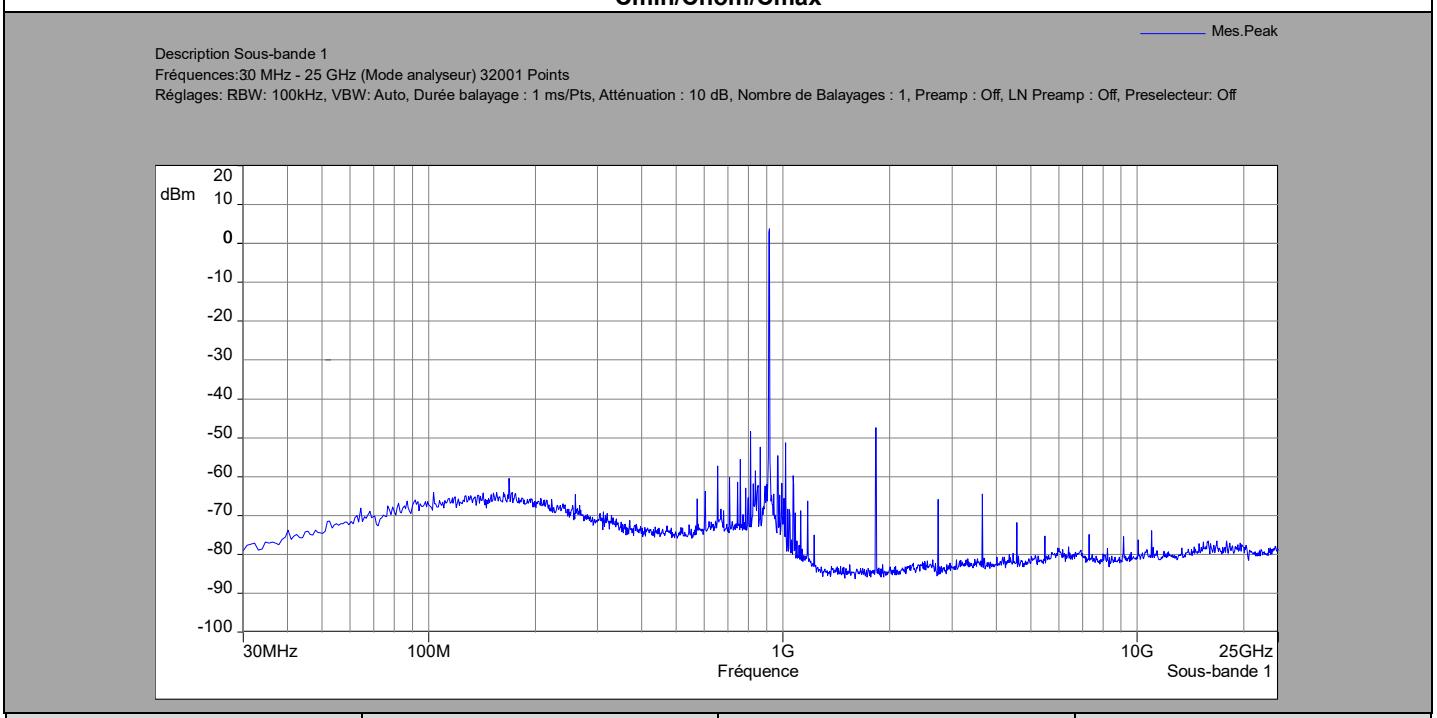

Frequency (MHz)	Level (dBm)	Level (dBc)	Limit (dBc)
915	3,73		
169	-60,45	64,18	20
655	-57,25	60,98	20
758,81	-55,55	59,28	20
810,31	-48,44	52,17	20
862,59	-52,46	56,19	20
967,16	-54,57	58,3	20
1018,65	-51,24	54,97	20
1070,16	-59,78	63,51	20
1830,18	-47,36	51,09	20
2744,71	-65,92	69,65	20
3659,23	-64,5	68,23	20
4573,76	-71,97	75,7	20
5490,63	-75,28	79,01	20
7318,12	-74,94	78,67	20
9151,07	-75,42	79,15	20
10977,78	-73,86	77,59	20

9.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands measurement performed on the sample of the product **IJINUS LT7,** SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

10. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

10.1. TEST CONDITIONS

Test performed by	: Steve BOGLER
Date of test	: October 23, 2019 to October 23, 2019
Ambient temperature	: 18 °C
Relative humidity	: 38 %

10.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013).
Test is performed in parallel, perpendicular and ground parallel axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m. The EUT is placed **in a semi-anechoic chamber**. Distance between measuring antenna and the EUT is **3m**.
Test is performed in horizontal (H) and vertical (V) polarization with **bilog** between 30MHz & 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 120kHz below 1GHz and 1MHz above 1GHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 1.5m high above 1GHz and at 0.8m high under 1GHz. The EUT is placed **in a semi-anechoic chamber** above 1GHz and **in a semi-anechoic chamber** from 30MHz to 1GHz. Distance between measuring antenna and the EUT is **3m**.

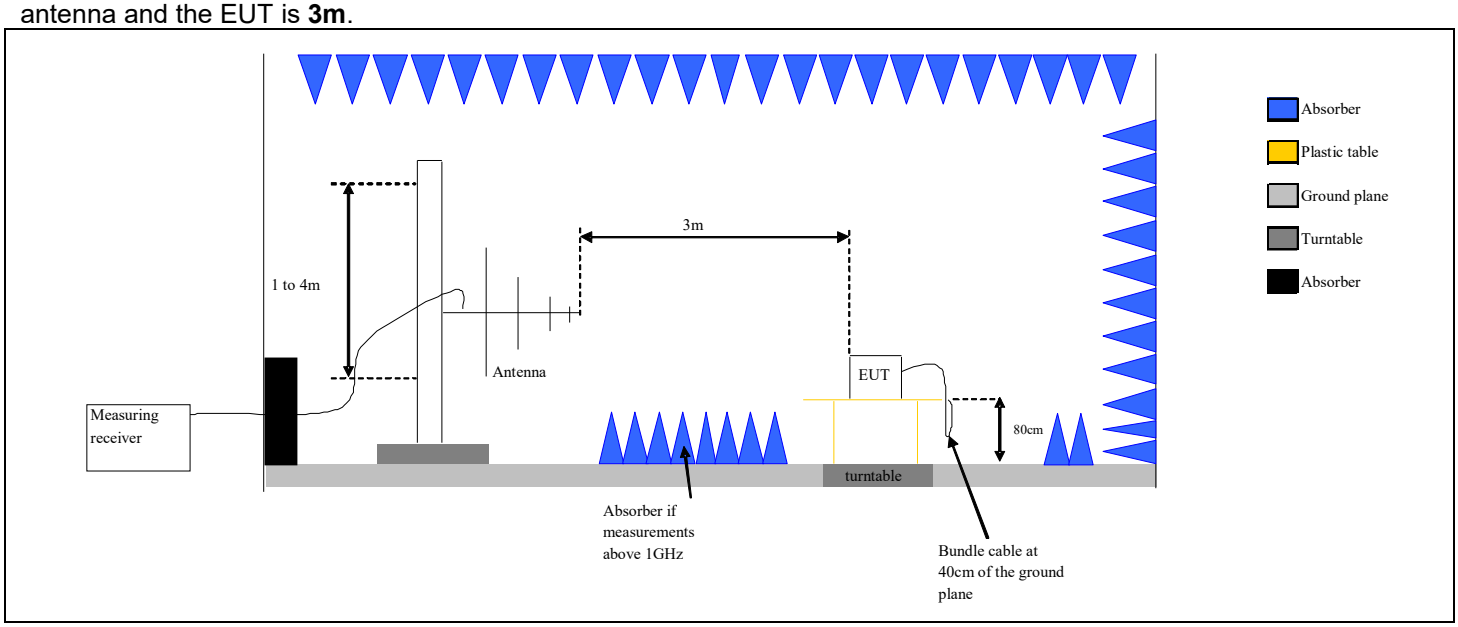

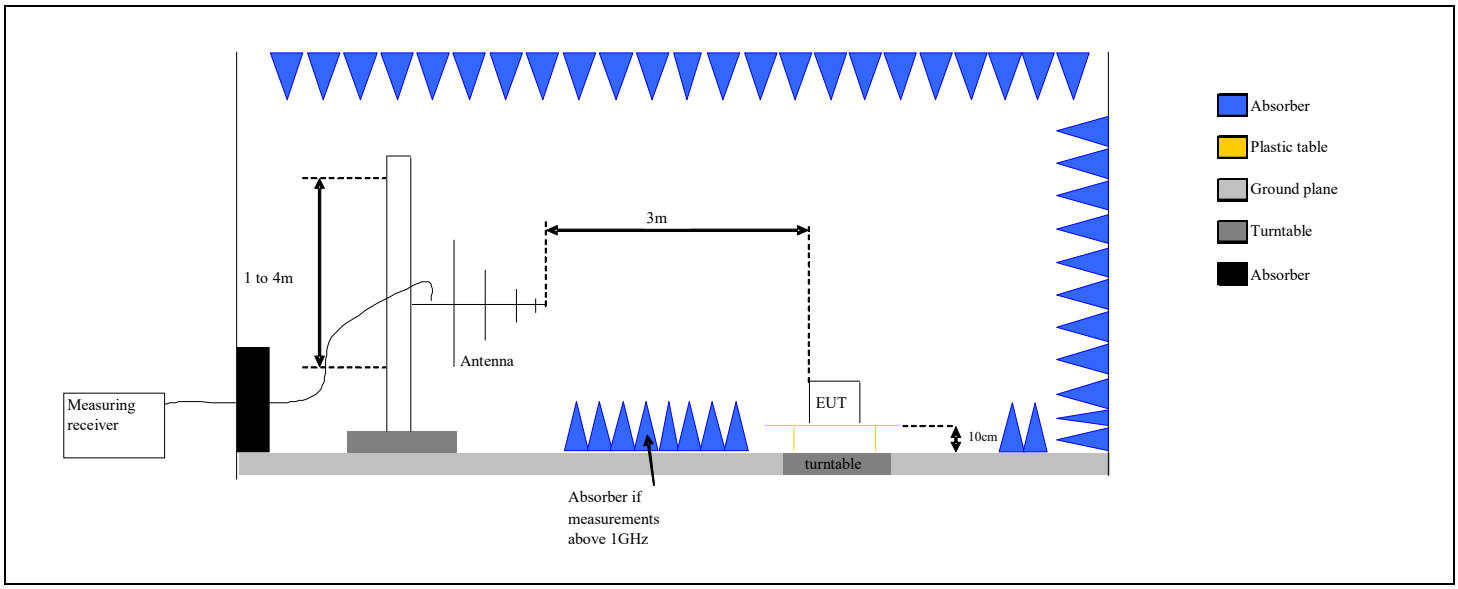

Test set up of Unwanted Emissions in Restricted Frequency Bands in semi anechoic chamber

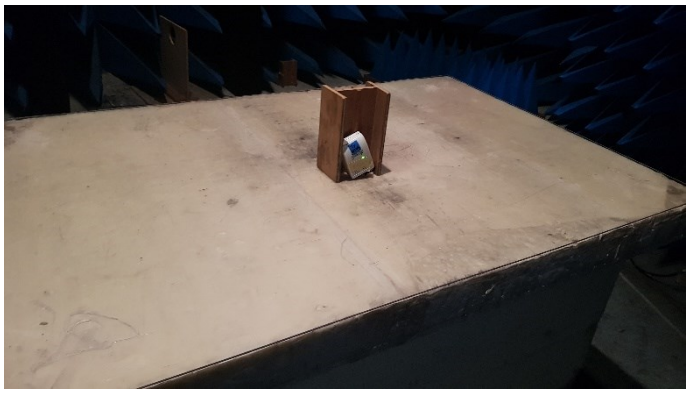

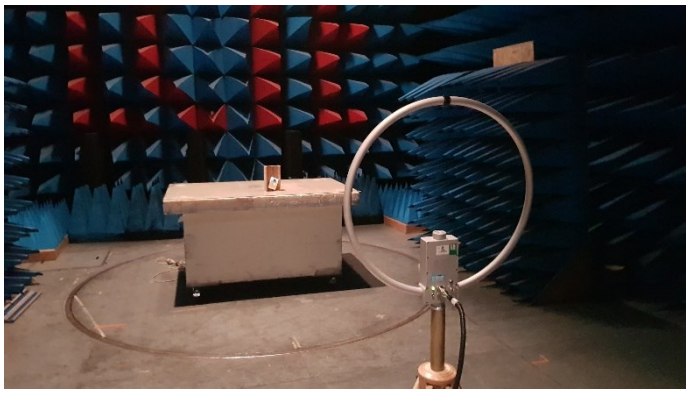

Photograph for Unwanted Emission in restricted frequency bands

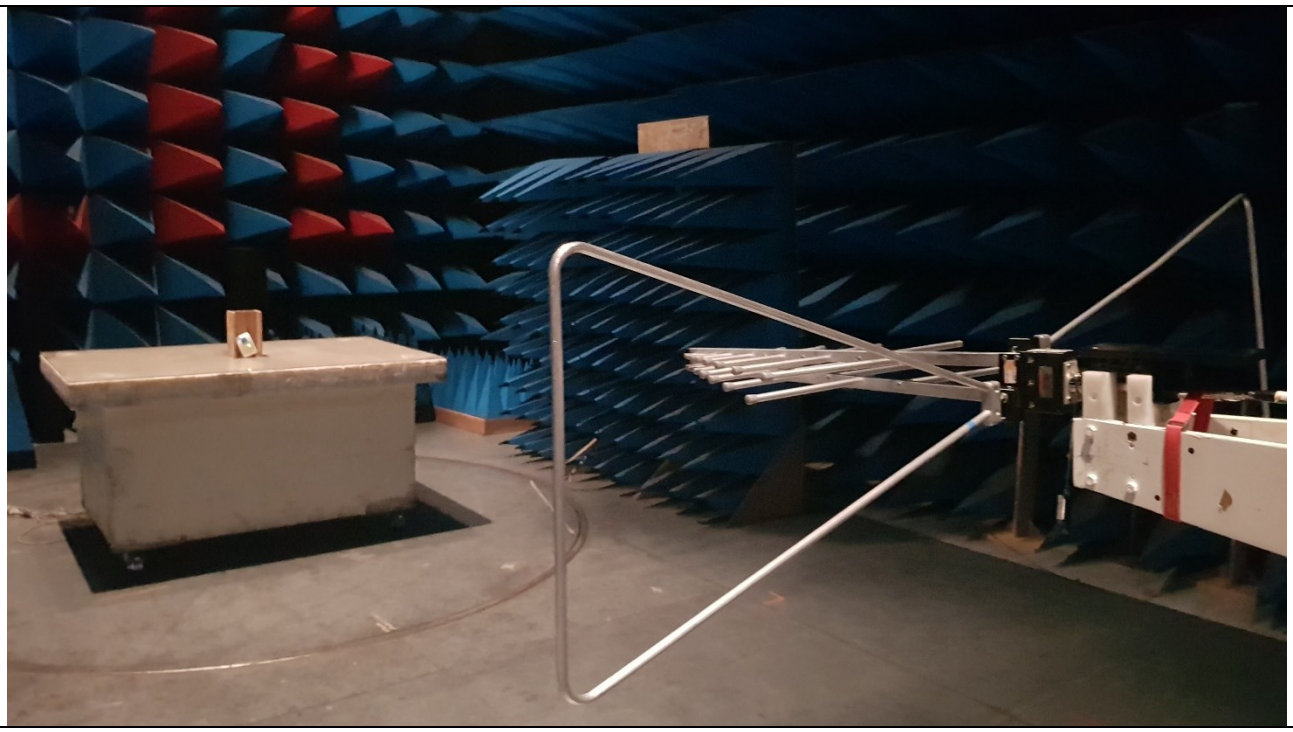

Photograph for Unwanted Emission in restricted frequency bands

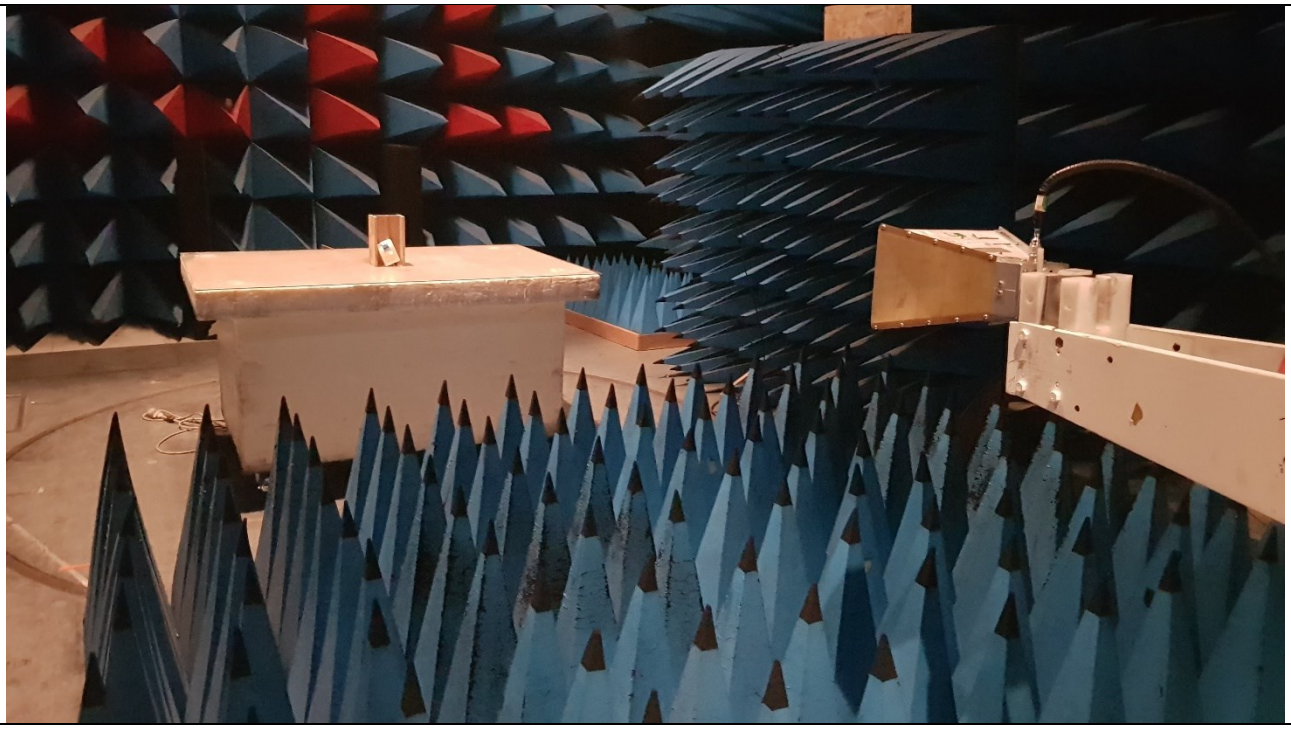

Photograph for Unwanted Emission in restricted frequency bands

10.3. LIMIT

Limit at 3m:
9kHz to 0,490MHz: 2400/F(kHz)µV/m (300m) or 20log(2400/F(kHz))dBµV/m (3m) QPeak
0,490MHz to 1.705MHz: 240000/F(kHz)µV/m (30m) or 20log(240000/F(kHz))dBµV/m (3m) QPeak
1.705MHz to 30MHz: 30µV/m (30m) or dBµV/m (3m) QPeak
30MHz to 88MHz: 40dBµV/m QPeak
88MHz to 216MHz: 43,5dBµV/m QPeak
216MHz to 960MHz: 46dBµV/m QPeak
960MHz to 1000MHz: 54dBµV/m QPeak
Above 1000MHz: 74dBµV/m Peak
54dBµV/m Average

Limit at 10m:
30MHz to 88MHz: 29.5dBµV/m QPeak
88MHz to 216MHz: 33dBµV/m QPeak
216MHz to 960MHz: 35.5dBµV/m QPeak
960MHz to 1000MHz: 43.5dBµV/m QPeak
Above 1000MHz: 63.5BµV/m Peak
43.5BµV/m Average

10.4. TEST EQUIPMENT LIST

Description	Constructor	Model	N°	Cal. Date	Cal. Due
Cable	-	-	A5329412	2018/10	2019/10
Loop antenna	SCHWARZBECK	FMZB1513	C2040209	2018/03	2020/03
Preamplifier	LCIE	-	A7086012	2019/04	2020/04
Bilog antenna	SCHWARZBECK	VULB9160	C2040150	2019/06	2020/06
Horn antenna	EMCO	3115	C2042018	2019/06	2020/06
EMI Receiver	ROHDE & SCHWARZ	ESU26	A2642018	2019/01	2021/01
Cable	-	-	A5329414	2019/02	2020/02
SEMI ANECHOIC CHAMBER	SIEPEL	VSWR	D3044008	2018/09	2021/09
Cable	-	-	A5329364	2018/11	2019/11

Note: In our quality system, the test equipment calibration due is more & less 2 months

10.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☑ None ☐ Divergence:

10.6. RESULTS

9kHz to 30MHz

Parallel Axis

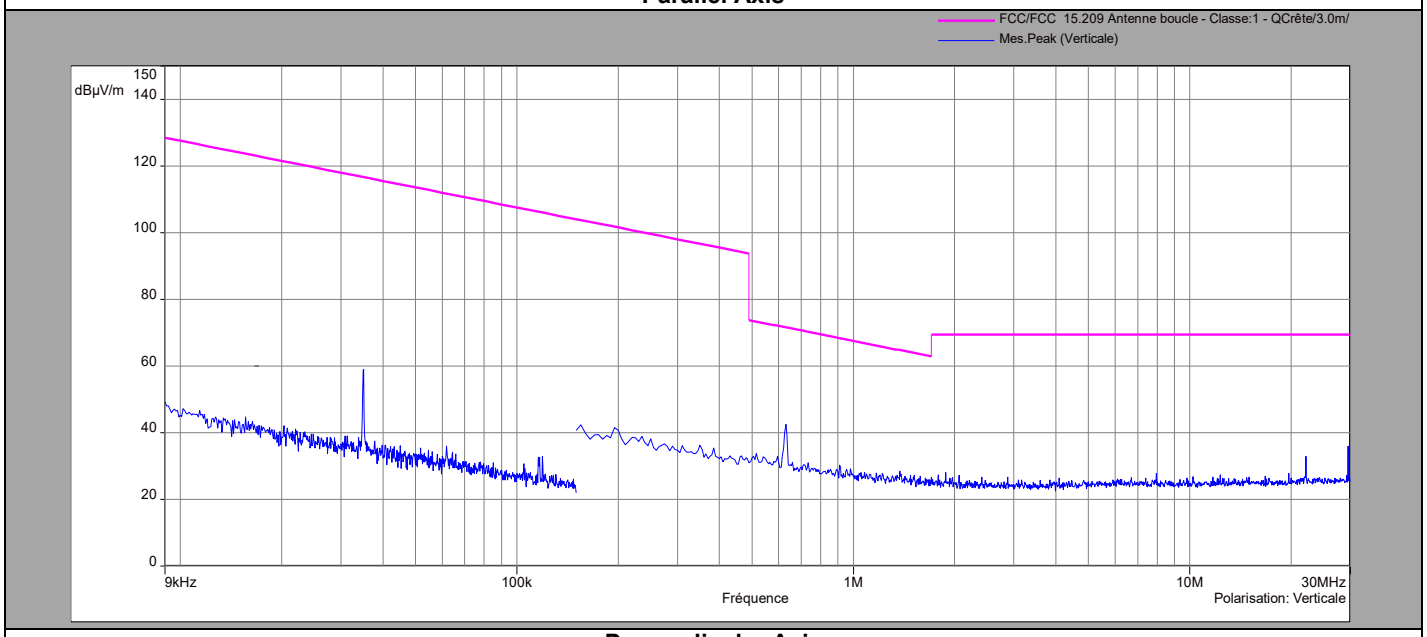

Perpendicular Axis

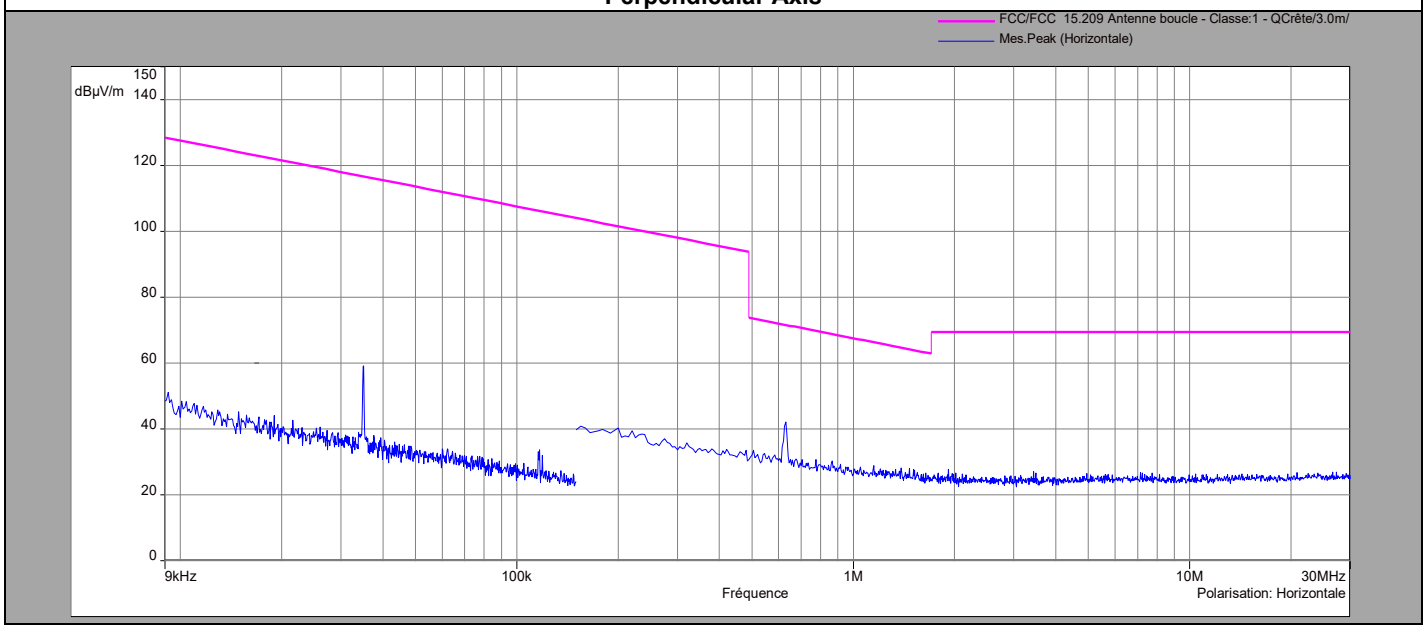

Ground Parallel Axis

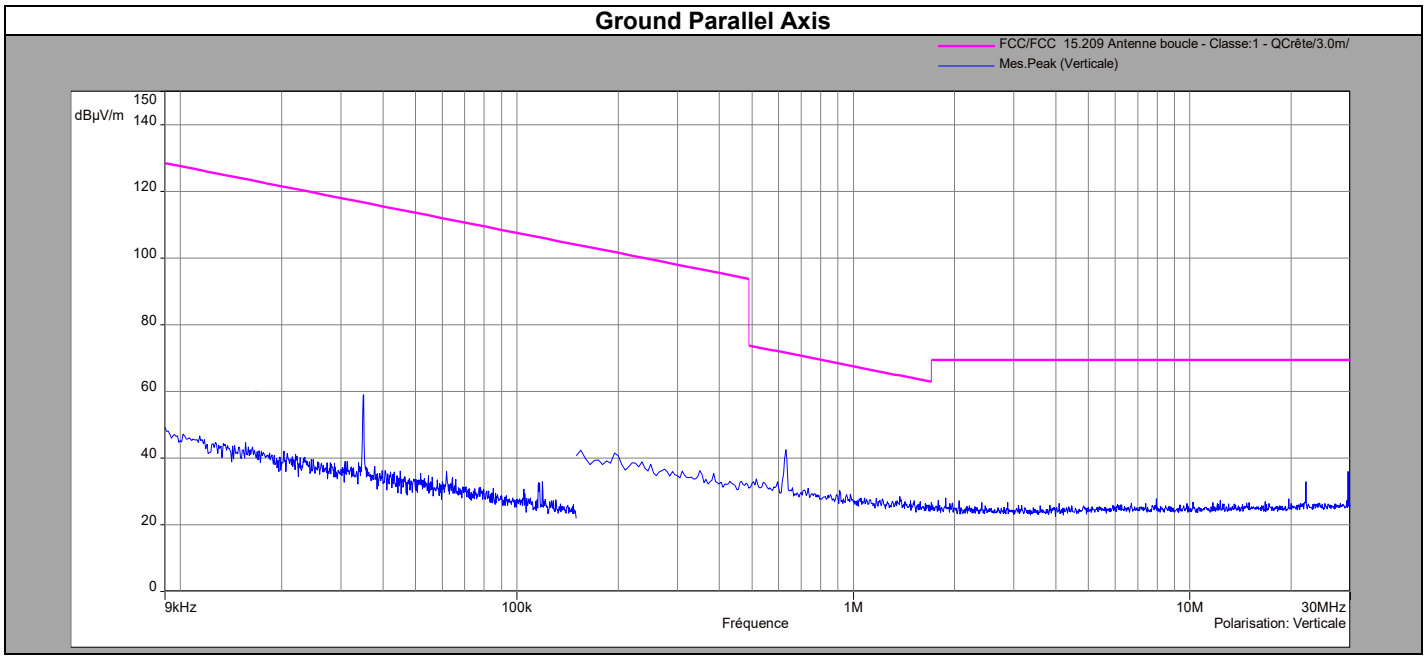

Below 1GHz

Channel

Vertical Polarization

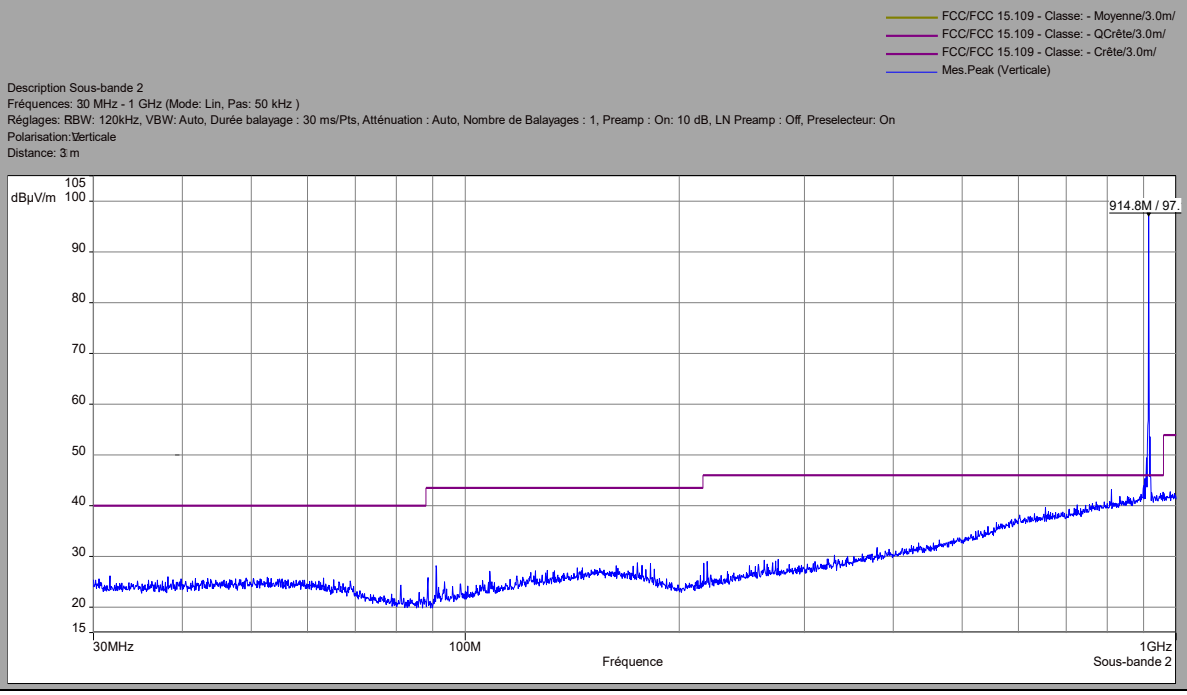

Horizontal polarization

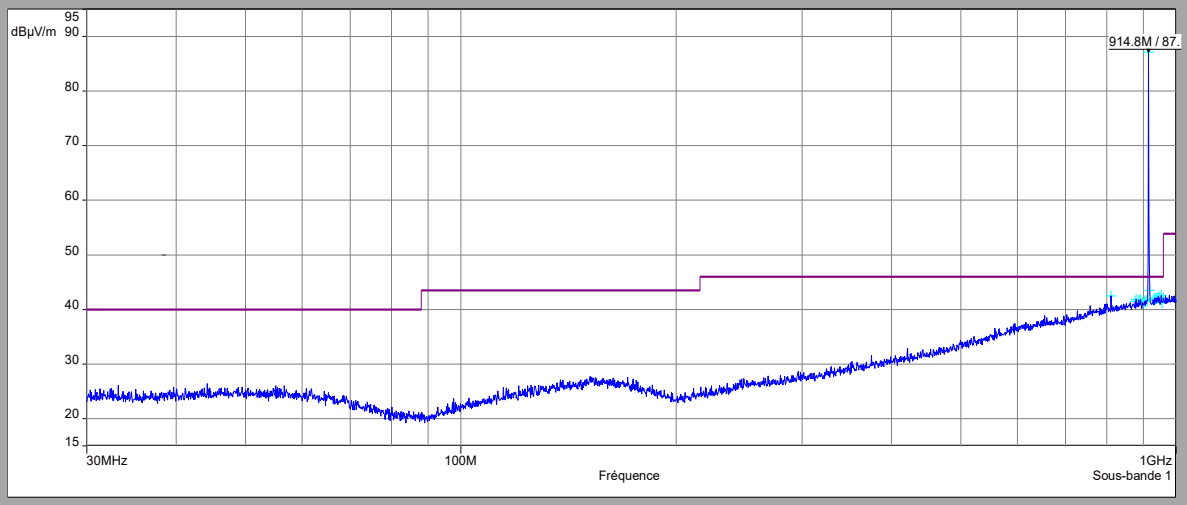

Above 1GHz

Cmin/Cnom/Cmax

Vertical Polarization

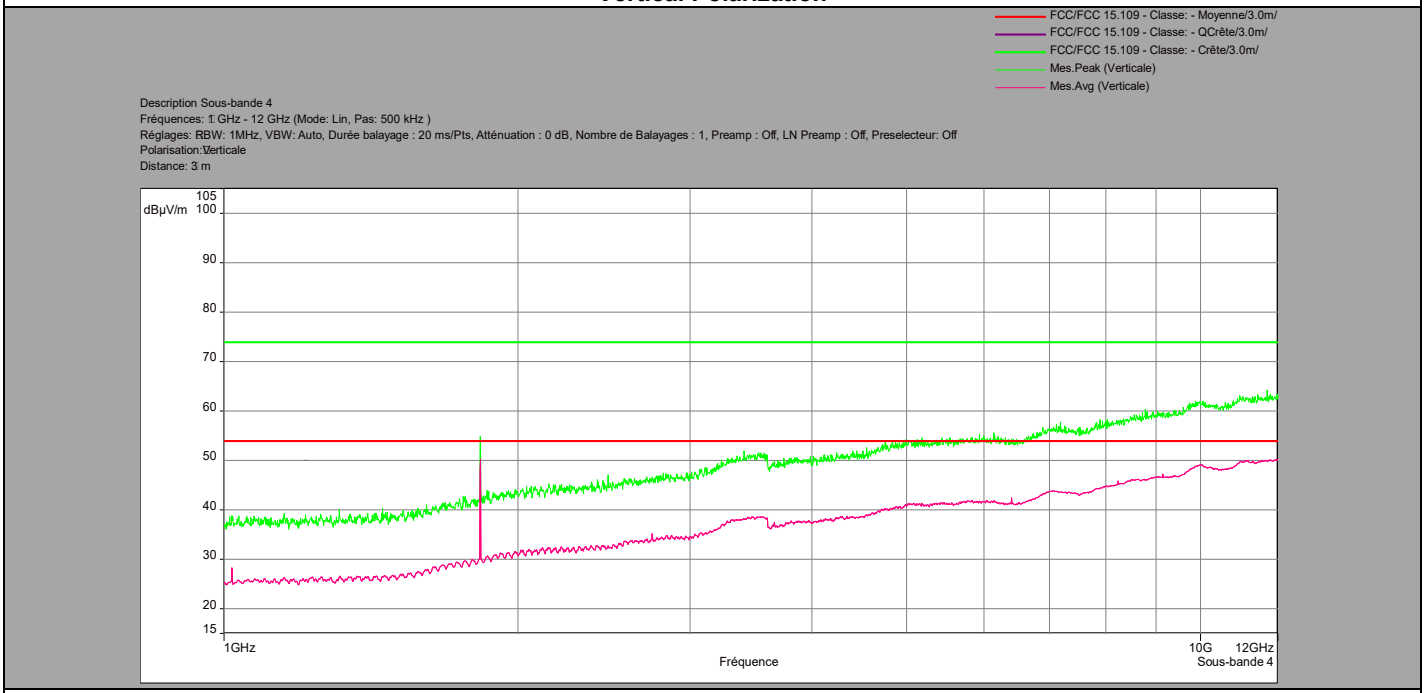

Horizontal polarization

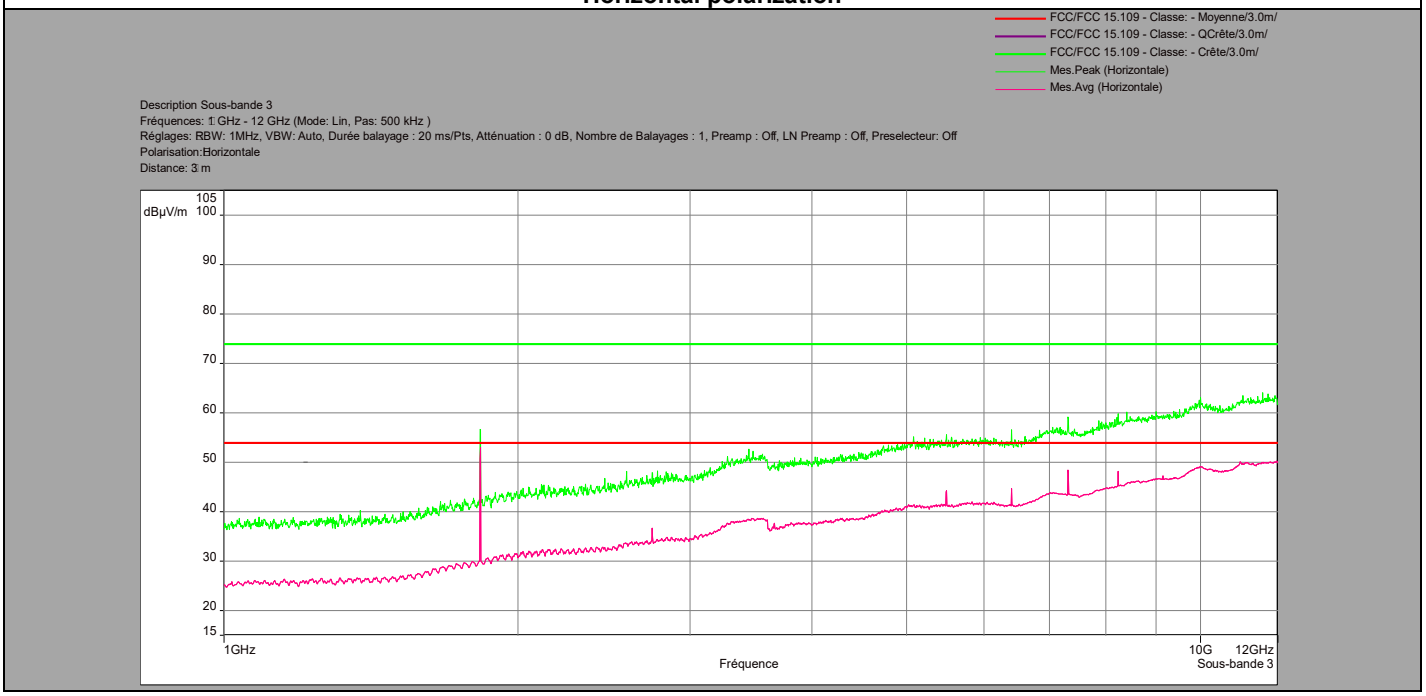

9kHz to 30MHz				
Polarization	**Frequency (MHz)**	**Peak Level (dBµV/m)**	**QPeak Level (dBµV/m)**	**Limit (dBµV/m)**
all emissions were greater than 20 dB below the limit				

Below 1GHz					
Polarization	**Frequency (MHz)**	**Peak Level (dBµV/m)**	**QPeak Level (dBµV/m)**	**Limit (dBµV/m)**	**Margin (dBµV/m)**
V	88.6	25.8	-	43.5	17.7
V	91	28.2	-	43.5	15.3
H	810	42.5	-	46	3.5
H	952.8	42.58	-	46	3.42
V	910.8	43.1	-	46	2.9
V	958	42.7	-	46	3.3

Above 1GHz								
Cmin/Cnom/Cmax								
Polarization	**Frequency (MHz)**	**Average Level (dBµV/m)**	**Average Level + Duty Cycle Factor (dBµV/m)**	**Average Limit (dBµV/m)**	**Average Margin Level (dBµV/m)**	**Peak Level (dBµV/m)**	**Peak Limit (dBµV/m)**	**Peak Margin Level (dBµV/m)**
H	1829	53.03	53.0456	54	0.9544	56.69	74	17.31
H	5491	44.22	44.2356	54	9.7644	55.59	74	18.41
H	6406	44.68	44.6956	54	9.3044	56.59	74	17.41
H	7318	48.38	48.3956	54	5.6044	59.16	74	14.84
H	8236	48.19	48.2056	54	5.7944	59.50	74	14.5
V	1829	50.23	50.2456	54	3.7544	54.83	74	19.17
V	6406	42.44	42.4556	54	11.5444	55.58	74	18.42

10.7. CONCLUSION

Unwanted Emission in restricted frequency bands measurement performed on the sample of the product **IJINUS** LT7, SN: **IJT 30 06 0000 4252**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.247 & RSS 247 ISSUE 2 limits.

11. UNCERTAINTIES CHART

47 CFR Part 15.209 & 15.207 Kind of test	Wide uncertainty laboratory (k=2) ±x(dB) / (Hz)/ ms	Uncertainty limit
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	2,67	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	2,67	3.4
Measurement of conducted disturbances in voltage on the telecommunication port. (AAN)	3,67	5.0
Measurement of conducted disturbances in current (current clamp)	2,73	2.9
Measurement of disturbance power	2,67	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC V01	4,48	/
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC C01	4,48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the OATS (Ecuelles)	4,88	6.3
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	/
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the OATS (Ecuelles)	4,99	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC C01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC C01	5,16	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC V01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC V01	5,15	6.3
Measurement of radiated electric field from 1 to 6 GHz C01	5,1	5.2
Measurement of radiated electric field from 1 to 6 GHz V01	4,85	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuelles)	4,48	/

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report