MEASUREMENT REPORT

FCC PART 15 Subpart C WLAN 802.11b/g/n

FCC ID:	SFK-802W
APPLICANT:	CIG Shanghai Co., Ltd.

Application Type:	Certification
Product:	Wi-Fi Extender
Model No.:	WF-802W
Brand Name:	CIG
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (Section 15.247)
Test Procedure(s):	ANSI C63.10-2013, KDB 558074 D01v04, KDB 662911 D01v02r01
Test Date:	March 20 ~ May 20, 2017

Reviewed By : Sunny Sun
(Sunny Sun)

Approved By : Marlinchen
(Marlin Chen)

ACCREDITED
TESTING LABORATORY
CERTIFICATE #3628.01

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1703RSU02001	Rev. 01	Initial Report	06-25-2017	Valid

CONTENTS

Description Page

§2.1033 General Information 5

1. INTRODUCTION 6

1.1. Scope 6
1.2. MRT Test Location 6

2. PRODUCT INFORMATION 7

2.1. Equipment Description 7
2.2. Product Specification Subjective to this Report 7
2.3. Operating Frequency and Channel List 8
2.4. Description of Available Antennas 8
2.5. Description of Antenna RF Port 10
2.6. Test Mode 10
2.7. Description of Test Software 10
2.8. Device Capabilities 11
2.9. Test Configuration 12
2.10. EMI Suppression Device(s)/Modifications 12
2.11. Labeling Requirements 12

3. DESCRIPTION of TEST 13

3.1. Evaluation Procedure 13
3.2. AC Line Conducted Emissions 13
3.3. Radiated Emissions 14

4. ANTENNA REQUIREMENTS 15

5. TEST EQUIPMENT CALIBRATION DATE 16

6. MEASUREMENT UNCERTAINTY 17

7. TEST RESULT 18

7.1. Summary 18
7.2. 6dB Bandwidth Measurement 19
7.2.1. Test Limit 19
7.2.2. Test Procedure used 19
7.2.3. Test Setting 19
7.2.4. Test Setup 19
7.2.5. Test Result 20
7.3. Output Power Measurement 29
7.3.1. Test Limit 29

7.3.2. Test Procedure Used 29
7.3.3. Test Setting 29
7.3.4. Test Setup 29
7.3.5. Test Result of Output Power 30
7.4. Power Spectral Density Measurement 33
7.4.1. Test Limit 33
7.4.2. Test Procedure Used 33
7.4.3. Test Setting 33
7.4.4. Test Setup 34
7.4.5. Test Result 35
7.5. Conducted Band Edge and Out-of-Band Emissions 57
7.5.1. Test Limit 57
7.5.2. Test Procedure Used 57
7.5.3. Test Settitng 57
7.5.4. Test Setup 58
7.5.5. Test Result 59
7.6. Radiated Spurious Emission Measurement 76
7.6.1. Test Limit 76
7.6.2. Test Procedure Used 76
7.6.3. Test Setting 77
7.6.4. Test Setup 78
7.6.5. Test Result 80
7.7. Radiated Restricted Band Edge Measurement 124
7.7.1. Test Limit 124
7.7.2. Test Procedure Used 124
7.7.3. Test Setup 125
7.7.4. Test Result 126
7.8. AC Conducted Emissions Measurement 238
7.8.1. Test Limit 238
7.8.2. Test Setup 238
7.8.3. Test Result 239

8. CONCLUSION 241

§2.1033 General Information

Applicant:	CIG Shanghai Co., Ltd.
Applicant Address:	5F, Building 8, NO.2388 CHENGHANG ROAD, MINHANG DISTRTCT, SHANGHAI
Manufacturer:	CIG Shanghai Co., Ltd., Shanghai Branch.
Manufacturer Address:	F/2, 3 Building 1, No. 505 Jiangyue Road, Minhang District, Shanghai, P.R.China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.247
Model No.:	WF-802W
FCC ID:	SFK-802W
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Digital Transmission System (DTS)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- **MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.**
- **MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.**
- **MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.**
- **MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.**

Accredited Laboratory

A2LA has accredited

MRT TECHNOLOGY (SUZHOU) CO., LTD.

Suzhou, Jiangsu, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 6th day of September 2016.

Senior Director of Quality and Communications
for the Accreditation Council
Certificate Number 3628.01
Valid to August 31, 2018

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.

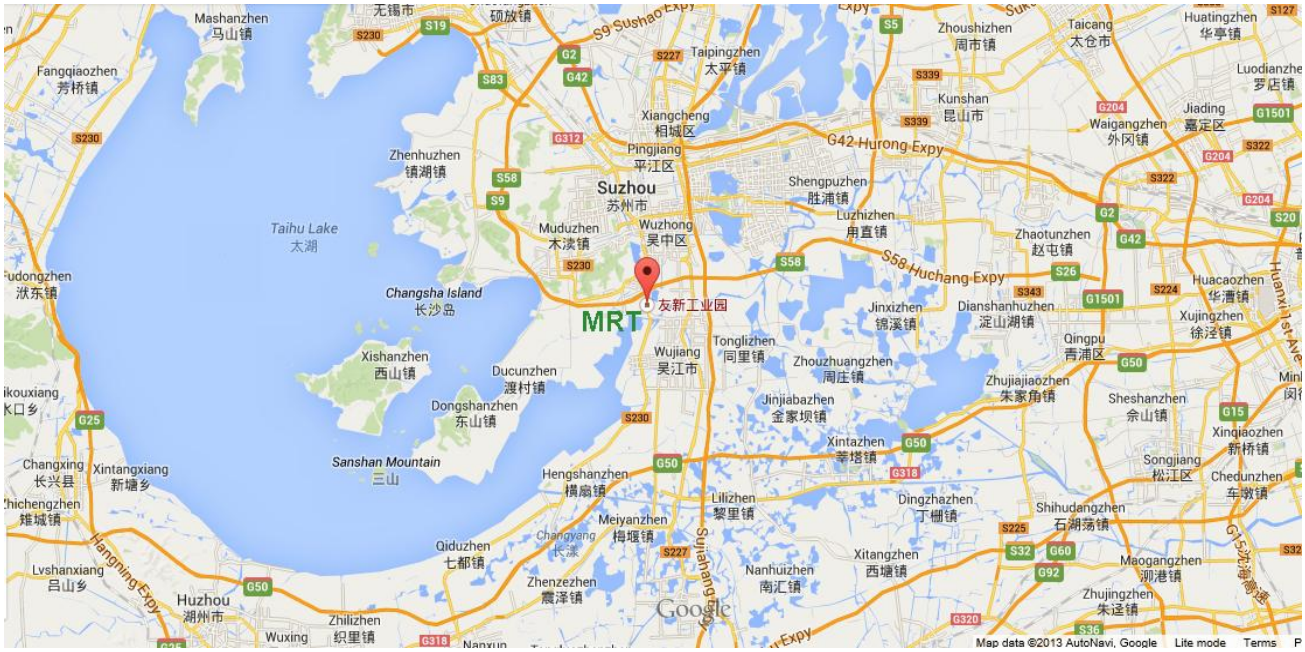

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Wi-Fi Extender
Model No.:	WF-802W
Brand Name:	CIG
Wi-Fi Specification:	802.11a/b/g/n/ac

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps
Maximum Average Output Power:	802.11b: 20.11dBm 802.11g: 19.93dBm 802.11n-HT20: 19.99dBm 802.11n-HT40: 19.82dBm

Note: For other features of this EUT, test report will be issued separately.

2.3. Operating Frequency and Channel List

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	TX Paths	Per Chain Max Antenna Gain (dBi)		Directional Gain (dBi)	Beam-Forming Gain (dBi)
			Ant 0	Ant 1		
PIFA Antenna	2412 ~ 2462	1	2.24	2.66	5.46	5.46
		2	2.24	2.66		
	5150 ~ 5850	1	3.44	3.66	6.56	6.56
		2	3.44	3.66		

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
   For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.
   1) If all antennas have the same gain, G_{ANT}, Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.
   - For power spectral density (PSD) measurements on all devices,
     Array Gain = 10 log (N_{ANT}/ N_{SS}) dB = 3.01;
   - For power measurements on IEEE 802.11 devices,
     Array Gain = 0 dB for $N_{ANT} \leq 4$;

   2) If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:
   - Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

- $$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

  $g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;

  G_k is the gain in dBi of the kth antenna.

2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n, not include 802.11a/ac.

   Correlated signals include, but are not limited to, signals transmitted in any of the following modes:

   - Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).

   Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, …, G_N dBi.

   - transmit signals are correlated, then
   - Directional gain = $10*\log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2/N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

2.5. Description of Antenna RF Port

Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1

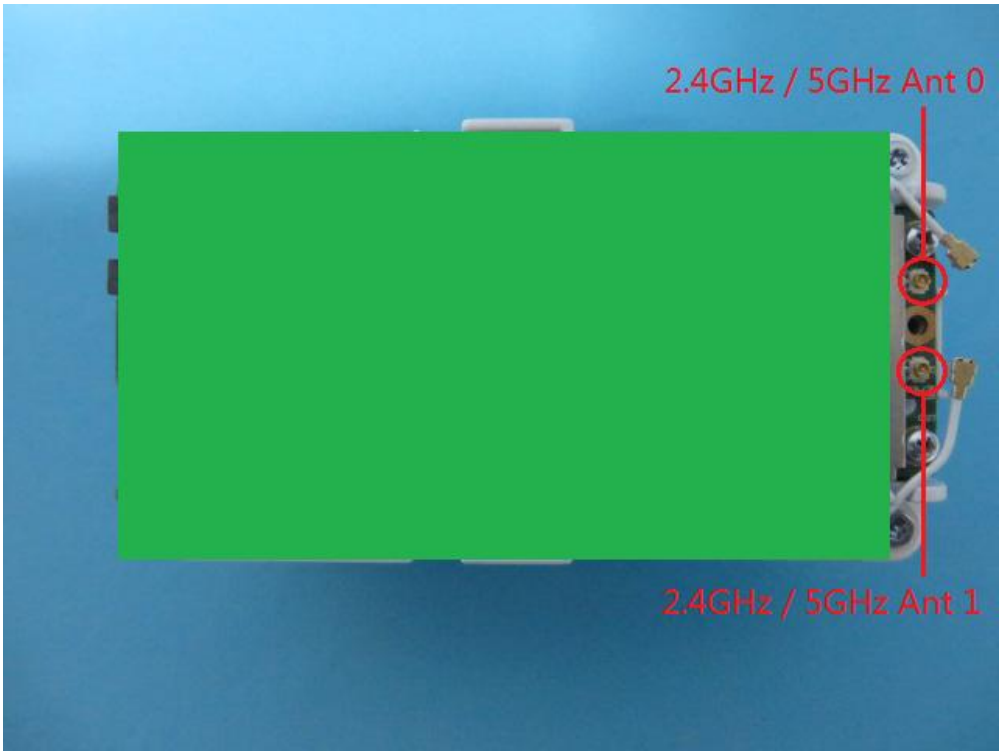

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-HT20 (CDD Mode / Beam-Forming Mode)
	Mode 4: Transmit by 802.11n-HT40 (CDD Mode / Beam-Forming Mode)

2.7. Description of Test Software

The test utility software used during testing was “QRCT”.

2.8. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (UNII).

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	98.96%
802.11g	95.95%
802.11n-HT20	98.23%
802.11n-HT40	96.41%

802.11b - Duty Cycle

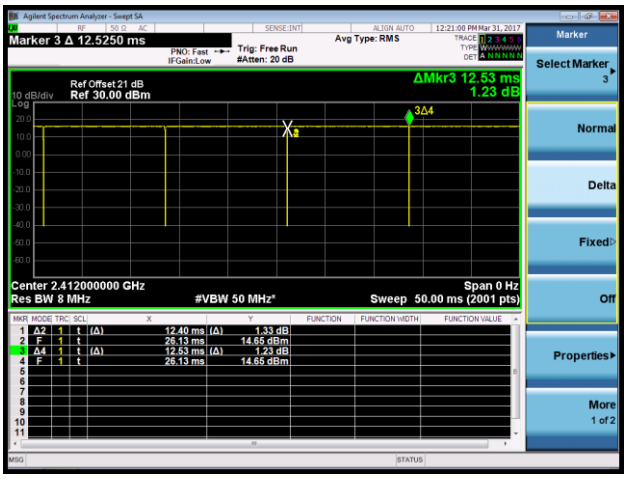

802.11g - Duty Cycle

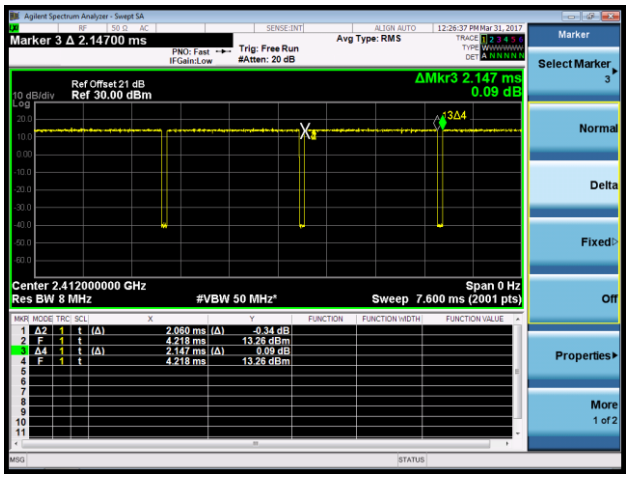

802.11n-HT20 - Duty Cycle

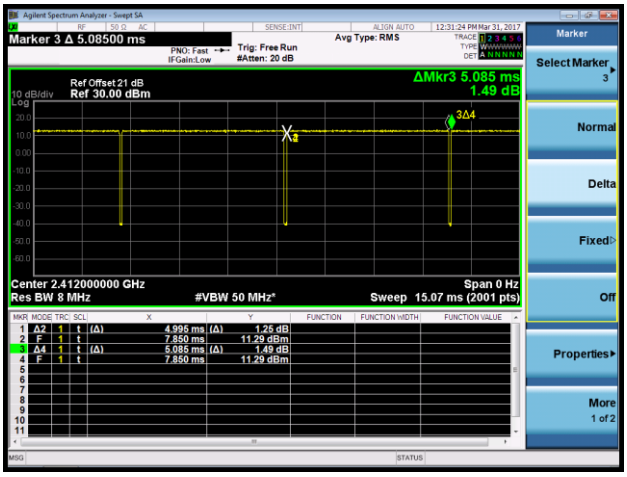

802.11n-HT40 - Duty Cycle

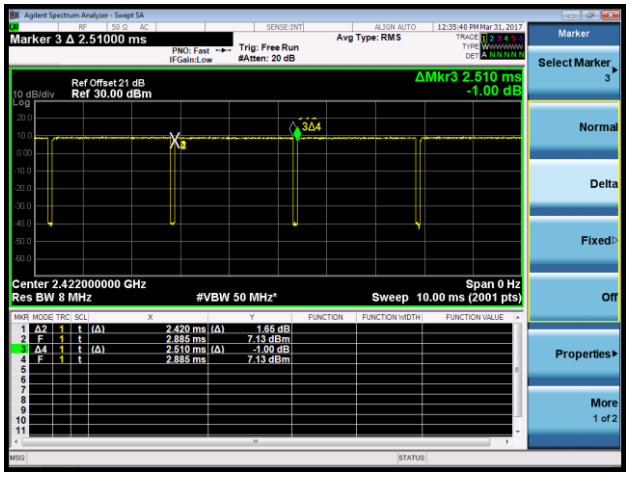

2.9. Test Configuration

The **Wi-Fi Extender** was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement of the **Wi-Fi Extender.**

Deviation from measurement procedure…….....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- There are provisions for the IPEX connection to an external antenna.

Conclusion:

The **Wi-Fi Extender FCC ID: SFK-802W** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2017/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2017/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/10

Radiated Spurious Emission and Radiated Restricted Band Edge - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/21
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/03/28
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2018/04/16
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2017/11/21
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2017/12/10
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2017/12/10
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/01/04
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06183	1 year	2017/12/20
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2018/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
USB wideband power sensor	Boonton	55006	MRTSUE06109	1 year	2018/04/25
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/20

Software	**Version**	**Function**
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Product Name: **Wi-Fi Extender**

FCC ID: **SFK-802W**

FCC Classification: **Digital Transmission System (DTS)**

Data Rate / MCS Tested: **1Mbps for 802.11b; 6Mbps for 802.11g; MCS0 for 802.11n-HT20; MCS0 for 802.11n-HT40**

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	≥ 500kHz	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	≤ 30.00dBm		Pass	Section 7.3
15.247(e)	Power Spectral Density	≤ 8.0dBm/3kHz		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	≥ 30dBc(Average)		Pass	Section 7.5
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2) Test Items “6dB Bandwidth” and “Band Edge / Out-of-Band Emissions” have been assessed the MIMO transmission, and showed the worst single test data in this report.

7.2. 6dB Bandwidth Measurement

7.2.1.Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

7.2.2.Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

7.2.3.Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4.Test Setup

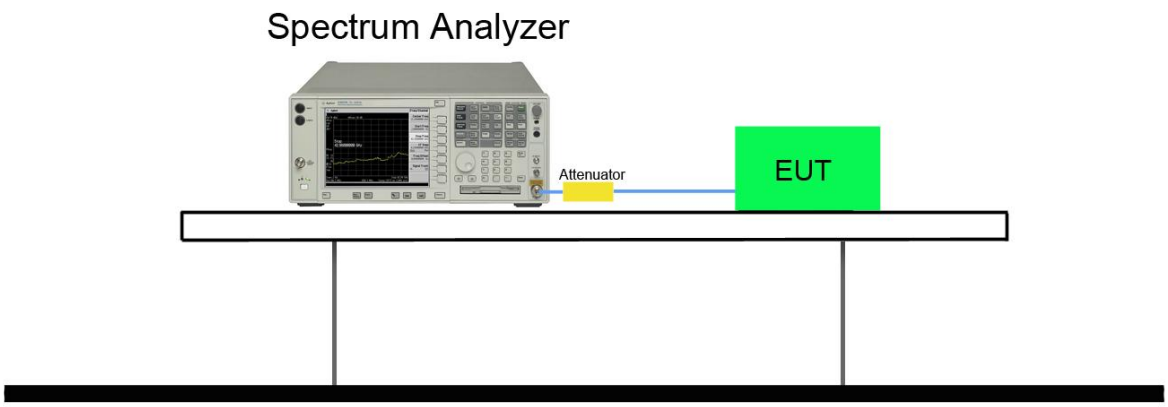

7.2.5.Test Result

Product	Wi-Fi Extender	Temperature	25°C
Test Engineer	Bruce Wang	Relative Humidity	54%
Test Site	TR3	Test Date	2017/03/31

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11b	1Mbps	01	2412	8.10	≥ 0.5	Pass
802.11b	1Mbps	06	2437	8.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	8.10	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.39	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.38	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.39	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.61	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.61	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.60	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.36	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.35	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	36.35	≥ 0.5	Pass
Ant 0 / Ant 0 + 1						
802.11b	1Mbps	01	2412	8.10	≥ 0.5	Pass
802.11b	1Mbps	06	2437	8.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	8.10	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.41	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.41	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.40	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.62	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.61	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.60	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.40	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.36	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	36.36	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)

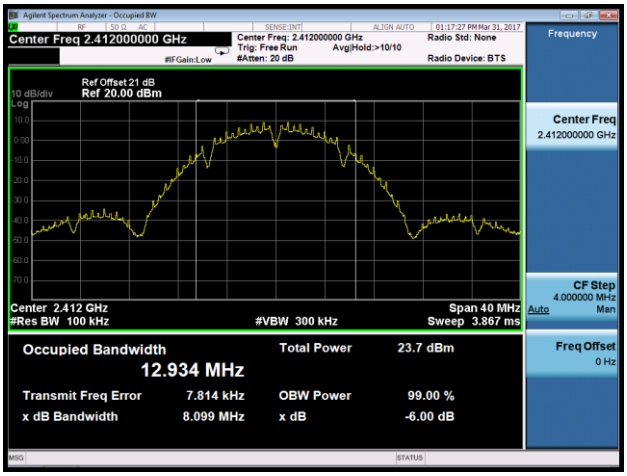

Channel 06 (2437MHz)

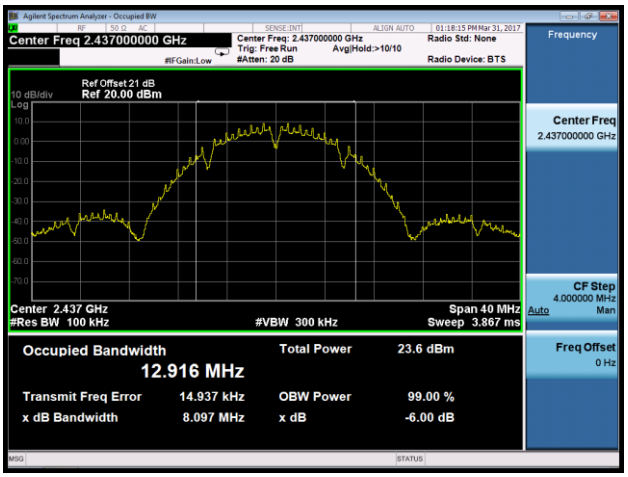

Channel 11 (2462MHz)

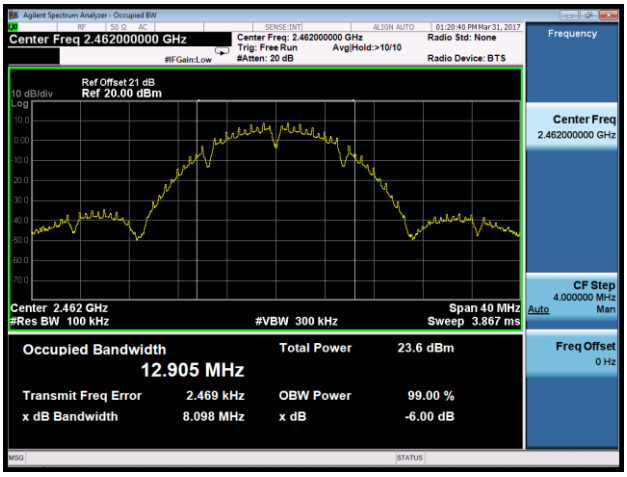

802.11g 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)

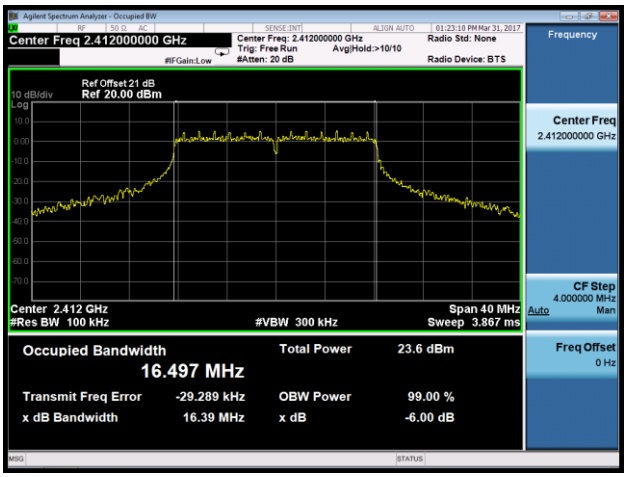

Channel 06 (2437MHz)

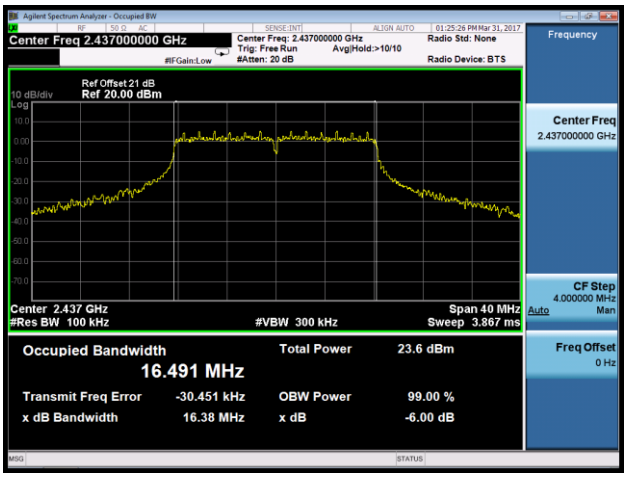

Channel 11 (2462MHz)

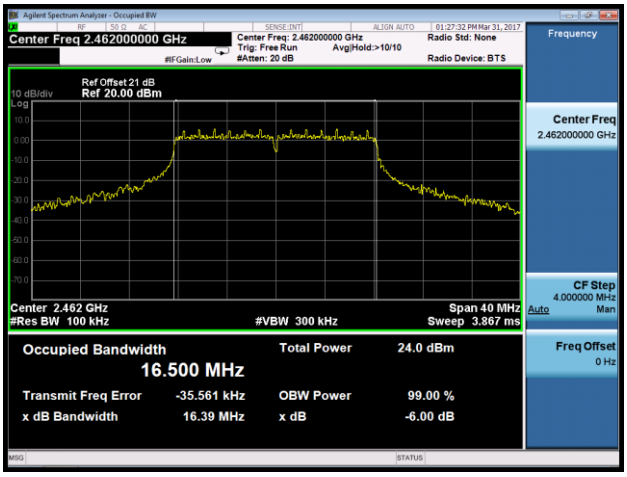

802.11n-HT20 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)

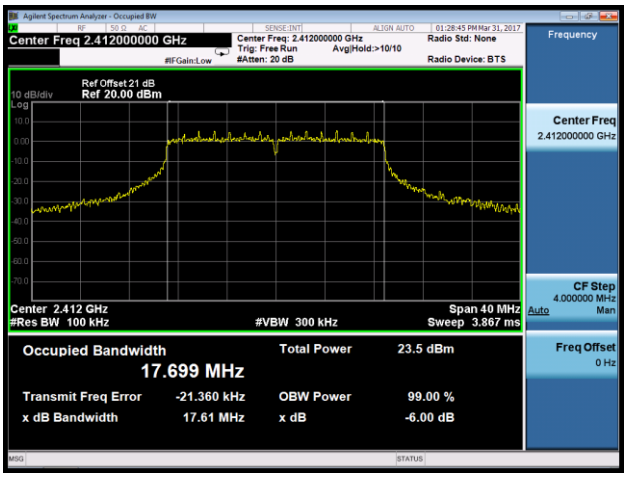

Channel 06 (2437MHz)

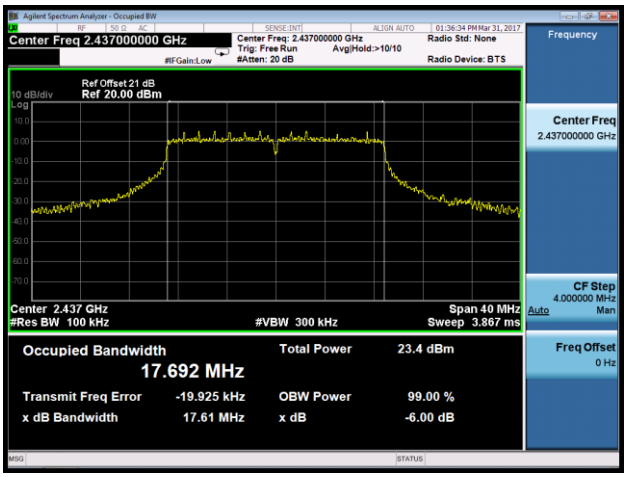

Channel 11 (2462MHz)

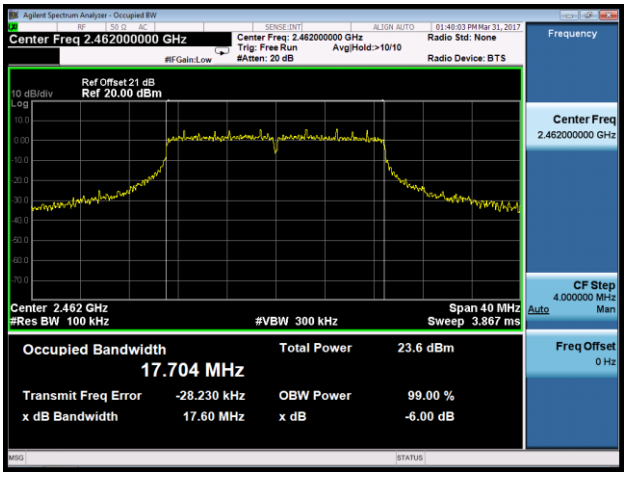

802.11n-HT40 6dB Bandwidth - Ant 0

Channel 03 (2422MHz)

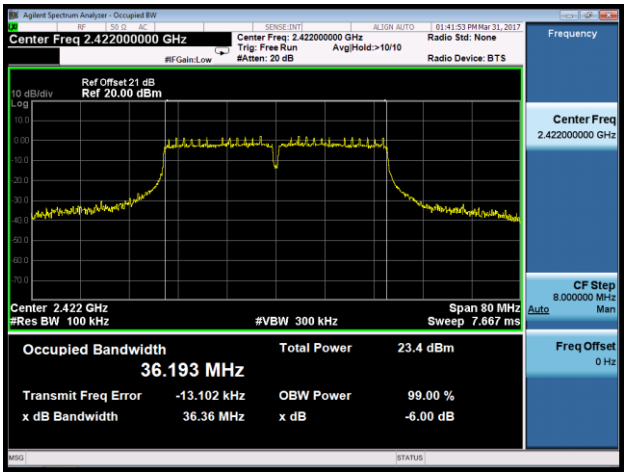

Channel 06 (2437MHz)

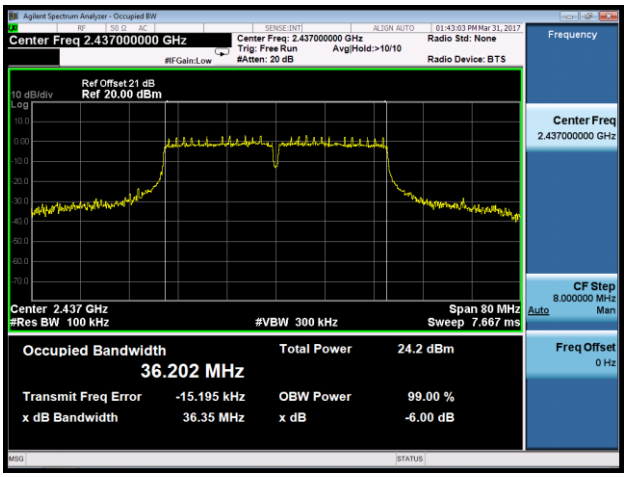

Channel 09 (2452MHz)

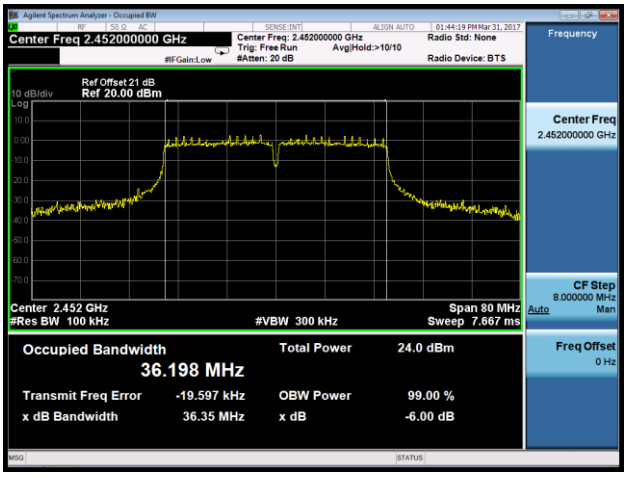

802.11b 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

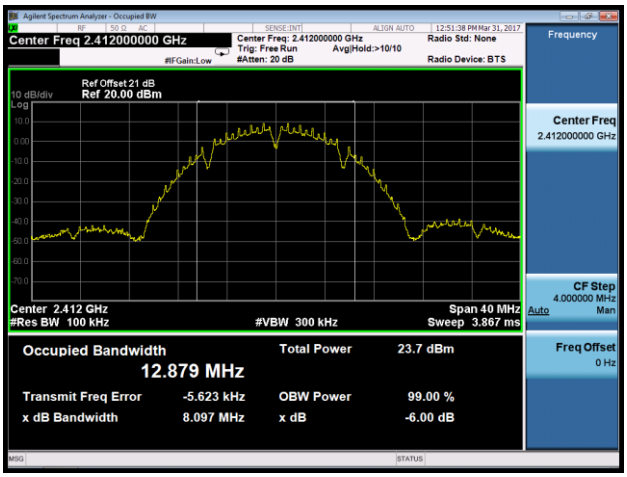

Channel 06 (2437MHz)

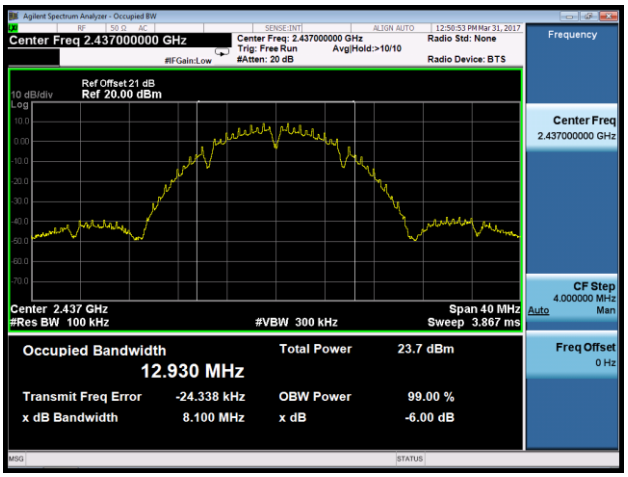

Channel 11 (2462MHz)

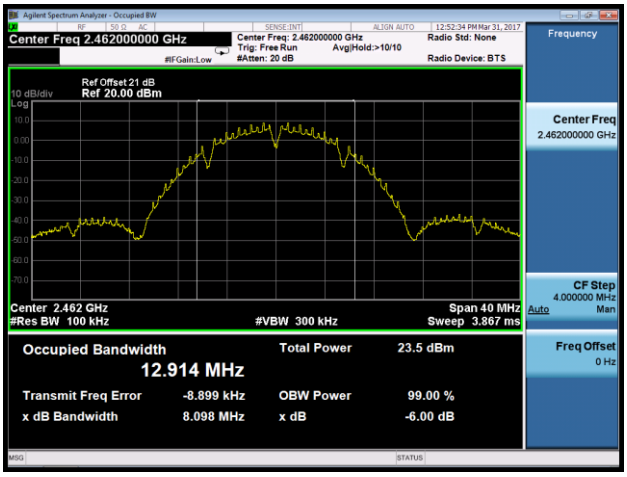

802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

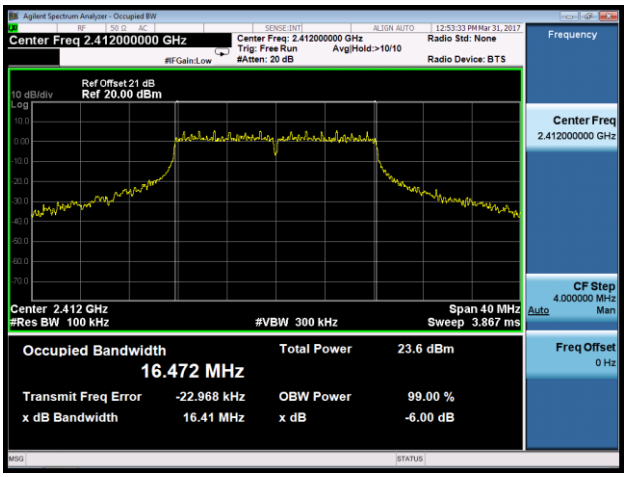

Channel 06 (2437MHz)

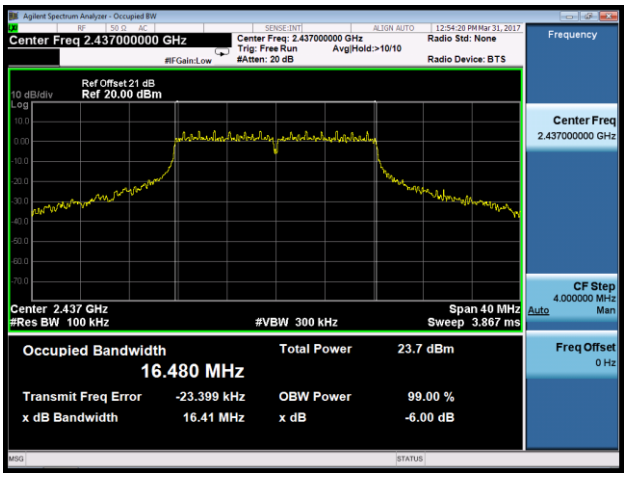

Channel 11 (2462MHz)

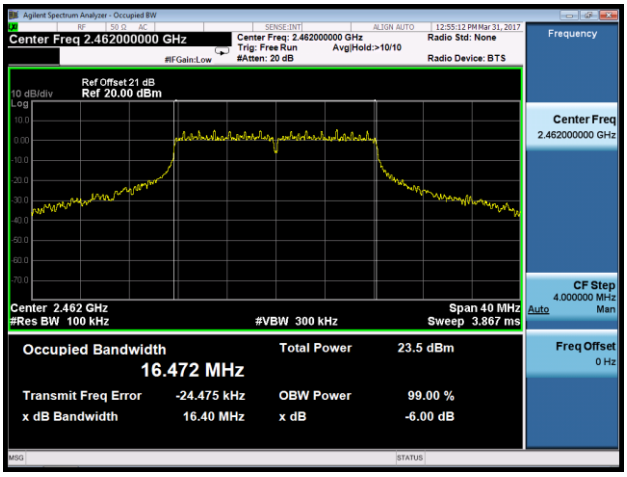

802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

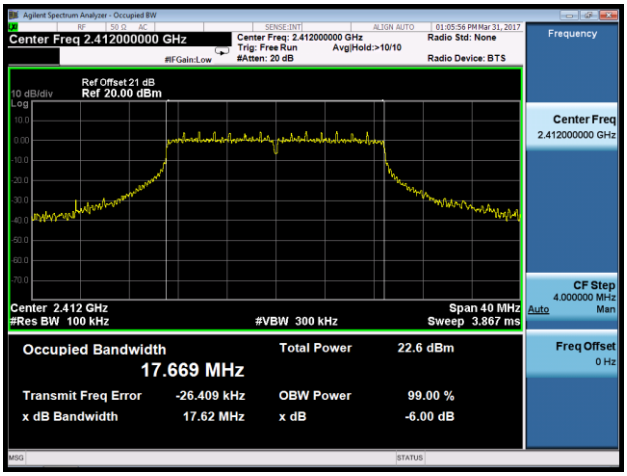

Channel 06 (2437MHz)

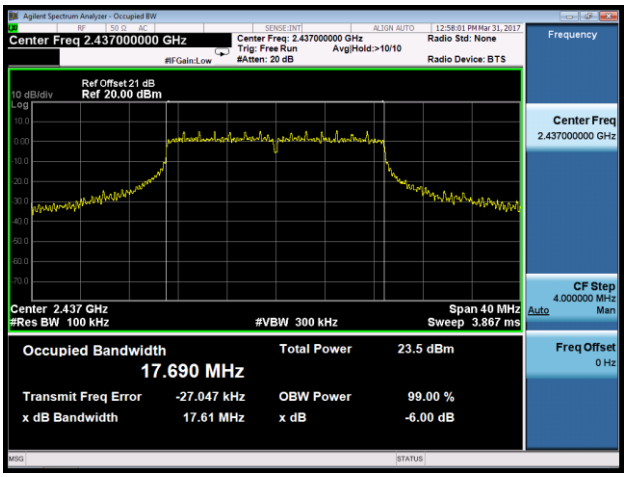

Channel 11 (2462MHz)

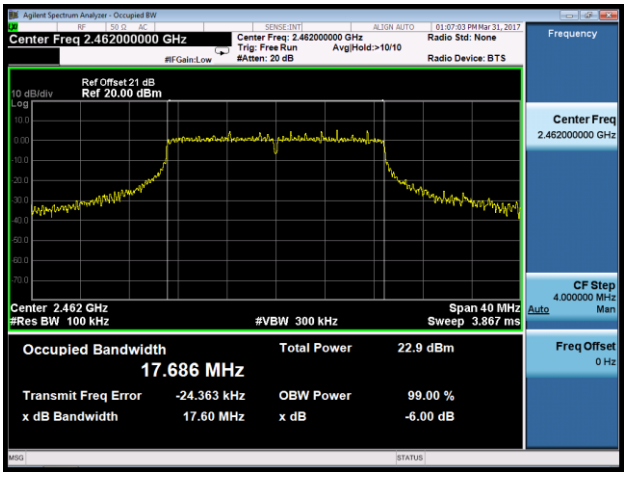

802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 03 (2422MHz)

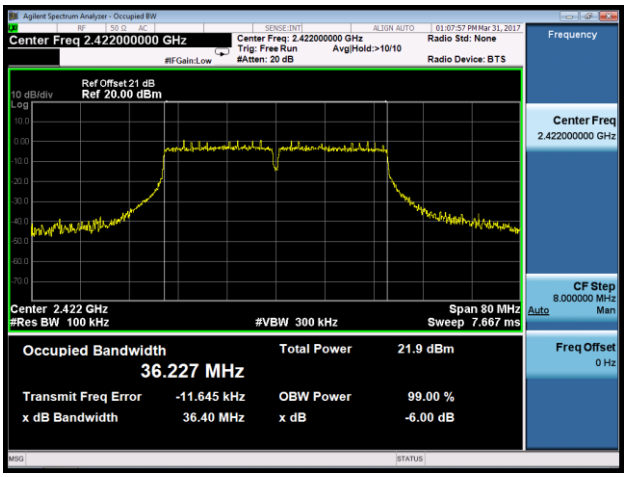

Channel 06 (2437MHz)

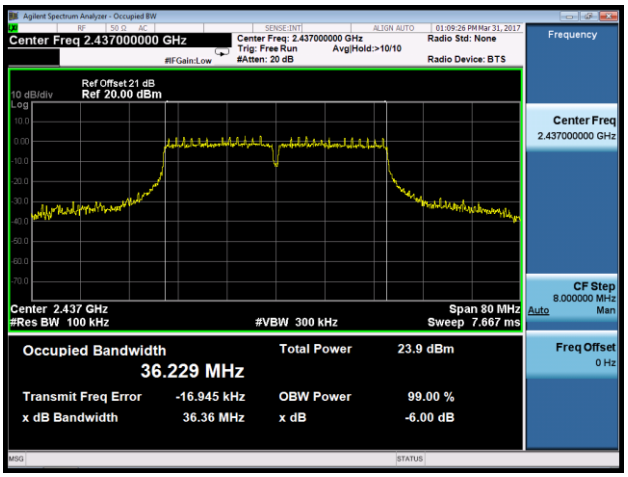

Channel 09 (2452MHz)

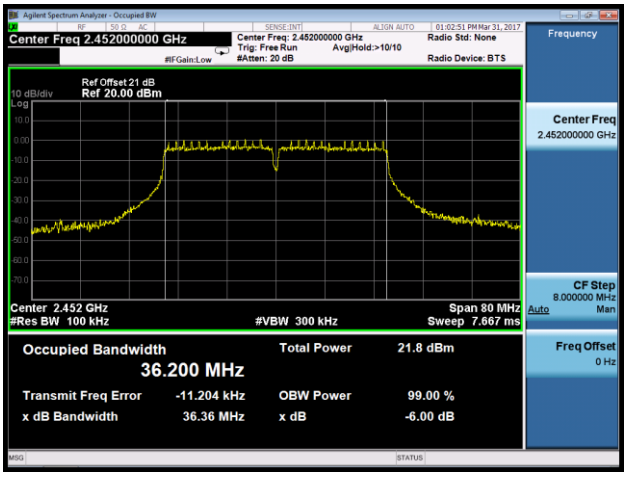

7.3. Output Power Measurement

7.3.1.Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2.Test Procedure Used

KDB 558074 D01v04 - Section 9.2.3.2 AVGPM-G Average Power Method

7.3.3.Test Setting

Average Power Measurement

Average power measurements were perform only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4.Test Setup

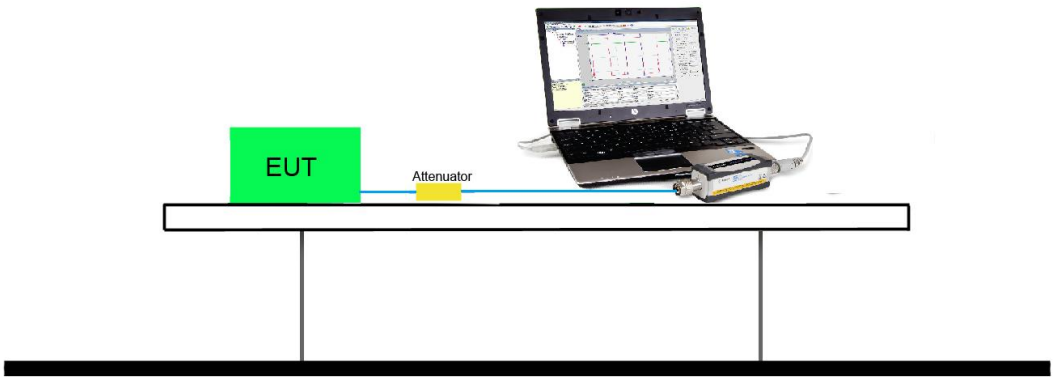

7.3.5.Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
Ant 0					
802.11b	20	6	2437	1Mbps	17.05
				5.5Mbps	16.88
				11Mbps	16.64
802.11g	20	6	2437	6Mbps	16.89
				24Mbps	16.65
				54Mbps	16.51
802.11n	20	6	2437	MCS0	16.90
				MCS4	16.74
				MCS7	16.57
802.11n	40	6	2437	MCS0	16.87
				MCS4	16.66
				MCS7	16.55

Product	Wi-Fi Extender	Temperature	23°C
Test Engineer	Bruce Wang	Relative Humidity	52%
Test Site	TR3	Test Date	2017/03/27

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
Ant 0						
11b	1	1	2412	16.54	≤ 30.00	Pass
11b	1	6	2437	17.05	≤ 30.00	Pass
11b	1	11	2462	16.53	≤ 30.00	Pass
11g	6	1	2412	15.89	≤ 30.00	Pass
11g	6	6	2437	16.89	≤ 30.00	Pass
11g	6	11	2462	16.74	≤ 30.00	Pass
11n-HT20	MCS0	1	2412	16.96	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	16.90	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	16.73	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	15.33	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	16.87	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	16.66	≤ 30.00	Pass
Ant 1						
11b	1	1	2412	16.36	≤ 30.00	Pass
11b	1	6	2437	16.51	≤ 30.00	Pass
11b	1	11	2462	15.47	≤ 30.00	Pass
11g	6	1	2412	16.05	≤ 30.00	Pass
11g	6	6	2437	16.49	≤ 30.00	Pass
11g	6	11	2462	16.08	≤ 30.00	Pass
11n-HT20	MCS0	1	2412	16.88	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	16.53	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	16.27	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	15.79	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	16.43	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	14.60	≤ 30.00	Pass

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
Ant 0 + 1 (CDD Mode)								
11b	1	1	2412	16.93	17.26	20.11	≤ 30.00	Pass
11b	1	6	2437	16.92	17.22	20.08	≤ 30.00	Pass
11b	1	11	2462	16.84	17.09	19.98	≤ 30.00	Pass
11g	6	1	2412	15.58	15.57	18.59	≤ 30.00	Pass
11g	6	6	2437	16.75	17.09	19.93	≤ 30.00	Pass
11g	6	11	2462	16.61	16.99	19.81	≤ 30.00	Pass
11n-HT20	MCS0	1	2412	15.59	15.59	18.60	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	16.80	17.15	19.99	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	16.66	17.03	19.86	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	15.33	15.31	18.33	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	16.55	17.05	19.82	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	14.87	14.71	17.80	≤ 30.00	Pass
Ant 0 + 1 (Beam Forming Mode)								
11n-HT20	MCS0	1	2412	15.59	15.59	18.60	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	16.80	17.15	19.99	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	16.66	17.03	19.86	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	15.06	15.14	18.11	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	16.55	17.05	19.82	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	15.59	15.47	18.54	≤ 30.00	Pass

Note: Total Average Power (dBm) = $10*\log\{10^{(\text{Ant 1 Average Power /10})} + 10^{(\text{Ant 2 Average Power /10})}\}$ (dBm).

7.4. Power Spectral Density Measurement

7.4.1.Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2.Test Procedure Used

KDB 558074 D01v04 - Section 10.5 Method AVGPSD

7.4.3.Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10kHz
5. VBW = 30kHz
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep ≥ 2 x span/RBW.
8. Sweep time = auto couple
9. Don’t use sweep triggering. Allow sweep to “free run”.
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add 10 log (1/x), where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.
13. Add Constant Factor = 10*log(3kHz / 10kHz) = -5.23

7.4.4.Test Setup

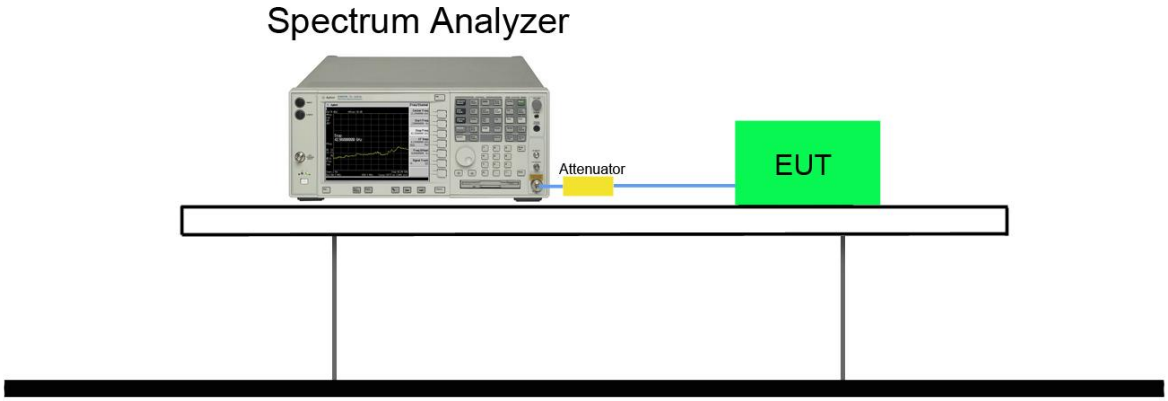

7.4.5.Test Result

Product	Wi-Fi Extender	Temperature	25°C
Test Engineer	Bruce Wang	Relative Humidity	54%
Test Site	TR3	Test Date	2017/03/31

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	AVGPSD (dBm / 10kHz)	Duty Cycle (%)	Constant Factor	Total AVGPSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
Ant 0									
11b	1	1	2412	-9.51	98.96	-5.23	-14.74	≤ 8.00	Pass
11b	1	6	2437	-9.92	98.96	-5.23	-15.15	≤ 8.00	Pass
11b	1	11	2462	-9.59	98.96	-5.23	-14.82	≤ 8.00	Pass
11g	6	1	2412	-11.87	95.95	-5.23	-16.92	≤ 8.00	Pass
11g	6	6	2437	-11.78	95.95	-5.23	-16.83	≤ 8.00	Pass
11g	6	11	2462	-11.83	95.95	-5.23	-16.88	≤ 8.00	Pass
11n-HT20	MCS0	1	2412	-12.08	98.23	-5.23	-17.31	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-12.02	98.23	-5.23	-17.25	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-11.20	98.23	-5.23	-16.43	≤ 8.00	Pass
11n-HT40	MCS0	3	2422	-14.83	96.41	-5.23	-19.90	≤ 8.00	Pass
11n-HT40	MCS0	6	2437	-13.64	96.41	-5.23	-18.71	≤ 8.00	Pass
11n-HT40	MCS0	9	2452	-14.22	96.41	-5.23	-19.29	≤ 8.00	Pass
Ant 1									
11b	1	1	2412	-8.94	98.96	-5.23	-14.17	≤ 8.00	Pass
11b	1	6	2437	-8.91	98.96	-5.23	-14.14	≤ 8.00	Pass
11b	1	11	2462	-9.09	98.96	-5.23	-14.32	≤ 8.00	Pass
11g	6	1	2412	-11.82	95.95	-5.23	-16.87	≤ 8.00	Pass
11g	6	6	2437	-11.75	95.95	-5.23	-16.80	≤ 8.00	Pass
11g	6	11	2462	-11.46	95.95	-5.23	-16.51	≤ 8.00	Pass
11n-HT20	MCS0	1	2412	-11.54	98.23	-5.23	-16.77	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-11.54	98.23	-5.23	-16.77	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.75	98.23	-5.23	-17.98	≤ 8.00	Pass
11n-HT40	MCS0	3	2422	-15.22	96.41	-5.23	-20.29	≤ 8.00	Pass
11n-HT40	MCS0	6	2437	-13.88	96.41	-5.23	-18.95	≤ 8.00	Pass
11n-HT40	MCS0	9	2452	-16.73	96.41	-5.23	-21.80	≤ 8.00	Pass

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Ant 1 AVGPSD (dBm / 10kHz)	Ant 2 AVGPSD (dBm / 10kHz)	Duty Cycle (%)	Total AVGPSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
Ant 0 + 1 (CDD Mode)									
11b	1	1	2412	-9.40	-9.46	98.96	-6.42	≤ 8.00	Pass
11b	1	6	2437	-9.23	-9.45	98.96	-6.33	≤ 8.00	Pass
11b	1	11	2462	-9.50	-9.59	98.96	-6.53	≤ 8.00	Pass
11g	6	1	2412	-11.95	-11.86	95.95	-8.71	≤ 8.00	Pass
11g	6	6	2437	-12.07	-12.49	95.95	-9.09	≤ 8.00	Pass
11g	6	11	2462	-12.03	-12.16	95.95	-8.90	≤ 8.00	Pass
11n-HT20	MCS0	1	2412	-12.60	-12.49	98.23	-9.53	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-11.87	-11.59	98.23	-8.72	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.05	-11.42	98.23	-8.71	≤ 8.00	Pass
11n-HT40	MCS0	3	2422	-15.38	-15.34	96.41	-12.19	≤ 8.00	Pass
11n-HT40	MCS0	6	2437	-14.90	-14.63	96.41	-11.59	≤ 8.00	Pass
11n-HT40	MCS0	9	2452	-16.60	-16.49	96.41	-13.38	≤ 8.00	Pass
Ant 0 + 1 (Beam Forming Mode)									
11n-HT20	MCS0	01	2412	-12.60	-12.49	98.23	-9.53	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-11.87	-11.59	98.23	-8.72	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.05	-11.42	98.23	-8.71	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-16.10	-15.96	96.41	-12.86	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-14.90	-14.63	96.41	-11.59	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-15.59	-16.19	96.41	-12.71	≤ 8.00	Pass

Note 1: When EUT duty cycle < 98%, the total AVGPSD = $10*\log\{10^{(\text{Ant 1 AVGPSD}/10)}+10^{(\text{Ant 2 AVGPSD}/10)}\}+10*\log(1/\text{duty cycle})$.

Note 2: When EUT duty cycle > 98%, the total AVGPSD = $10*\log\{10^{(\text{Ant 1 AVGPSD}/10)}+10^{(\text{Ant 2 AVGPSD}/10)}\}$

802.11b AVGPSD - Ant 0	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
Channel 11 (2462MHz)	

802.11g AVGPSD - Ant 0

Channel 01 (2412MHz)

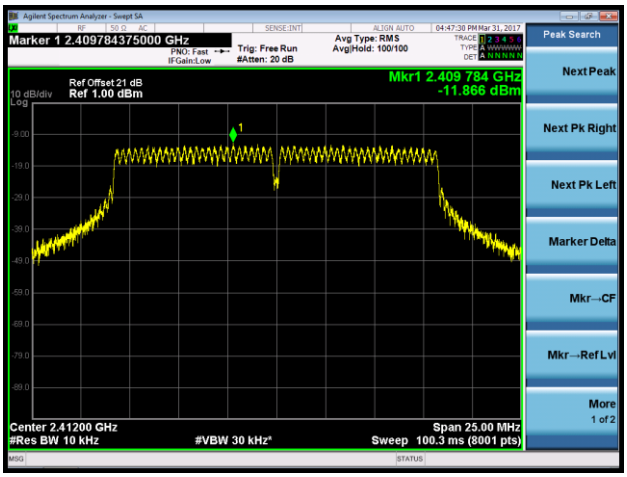

Channel 06 (2437MHz)

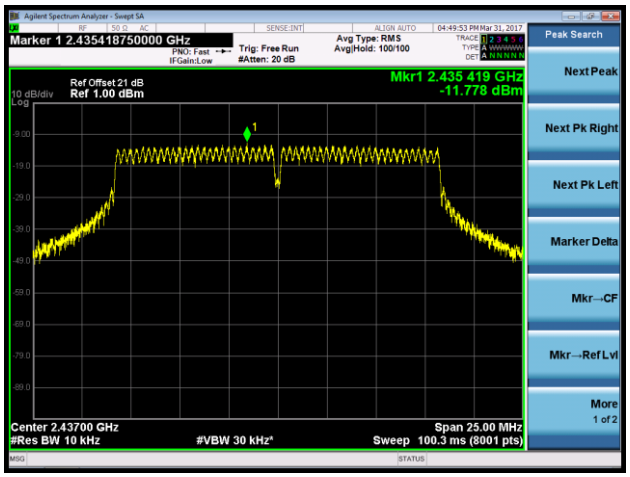

Channel 11 (2462MHz)

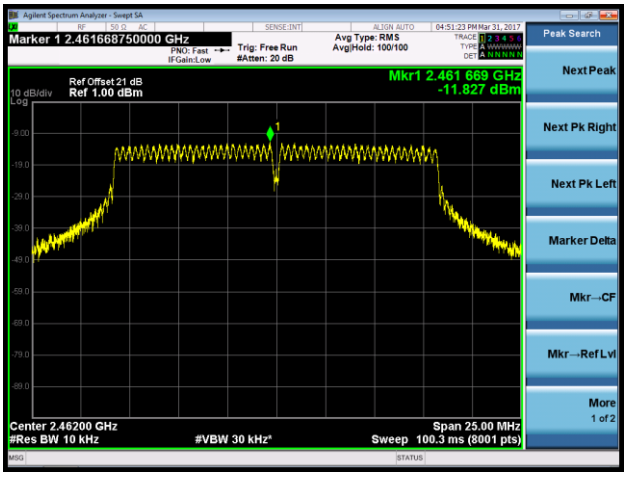

802.11n-HT20 AVGPSD - Ant 0	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
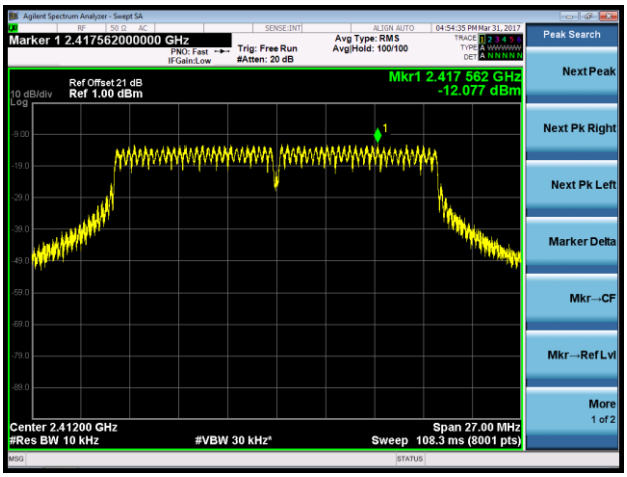	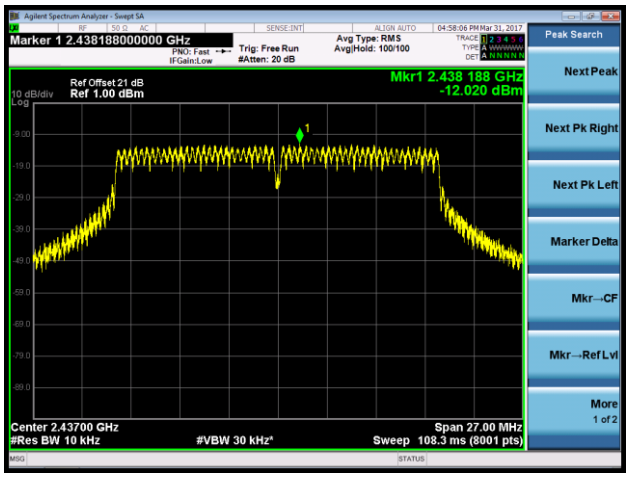
Channel 11 (2462MHz)	
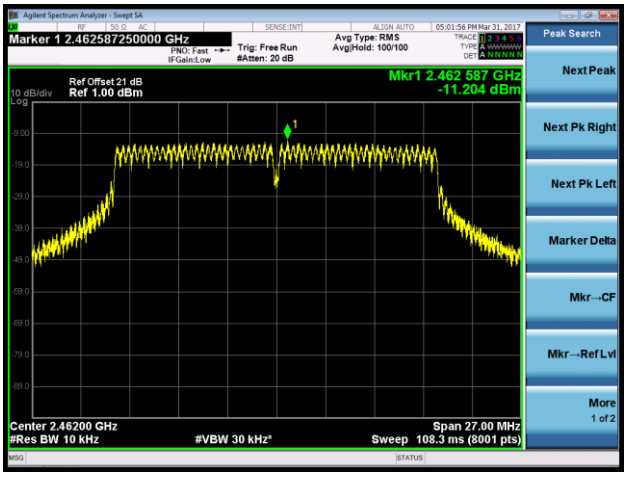	

802.11n-HT40 AVGPSD - Ant 0

Channel 03 (2422MHz)

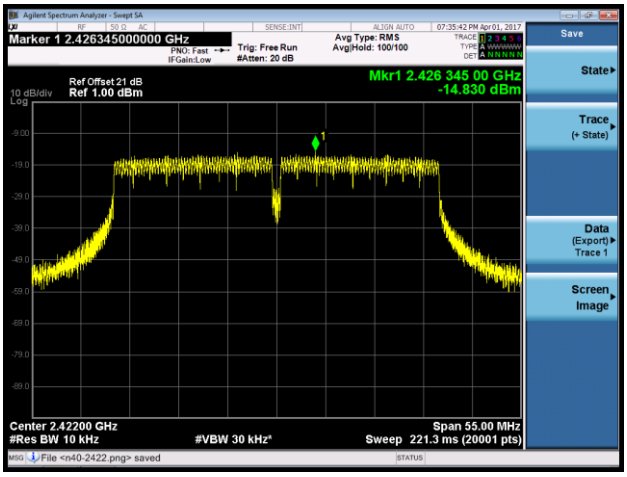

Channel 06 (2437MHz)

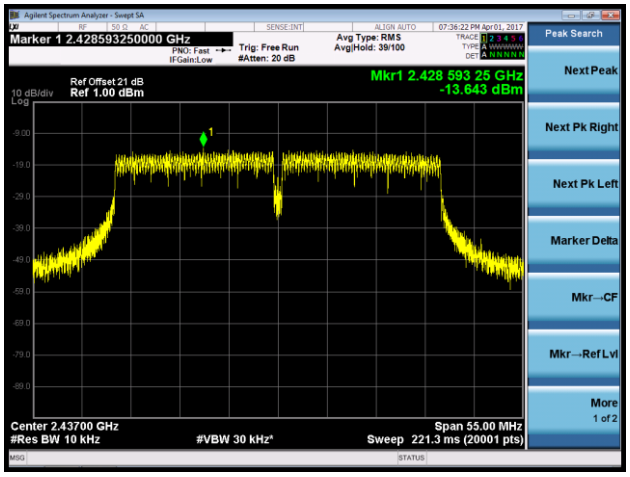

Channel 09 (2452MHz)

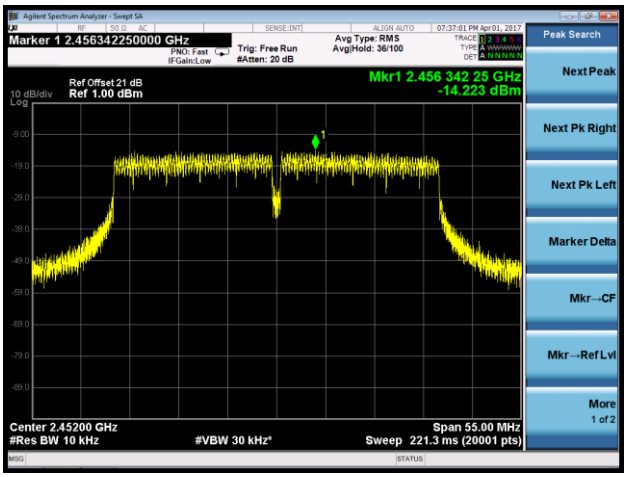

802.11b AVGPSD - Ant 1	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
Channel 11 (2462MHz)	

802.11g AVGPSD - Ant 1	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
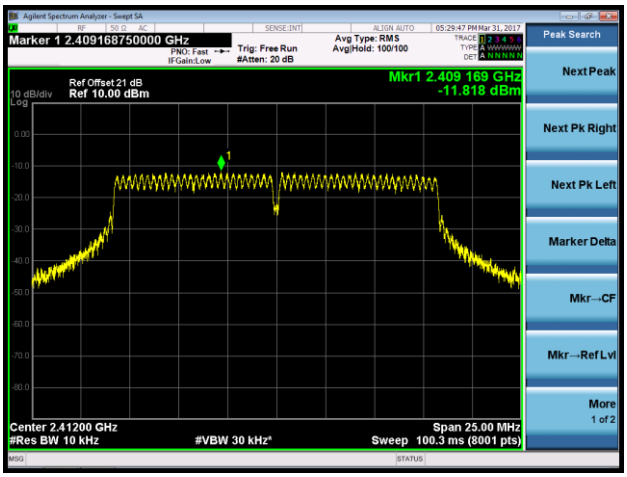	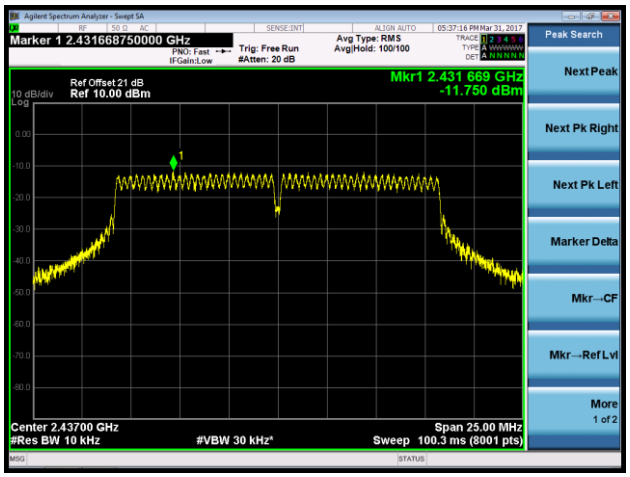
Channel 11 (2462MHz)	
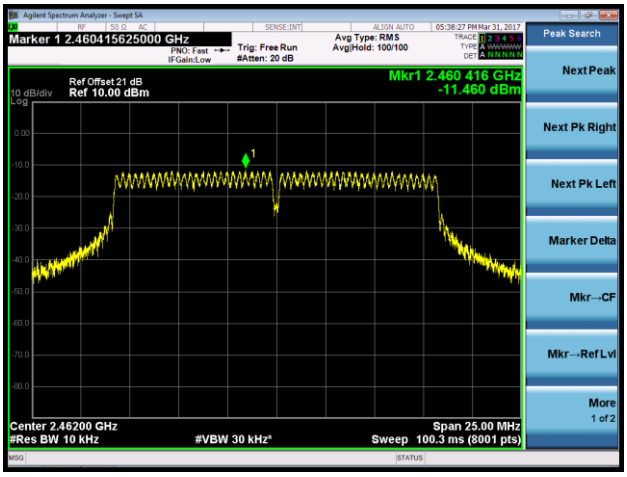	

802.11n-HT20 AVGPSD - Ant 1

Channel 01 (2412MHz)

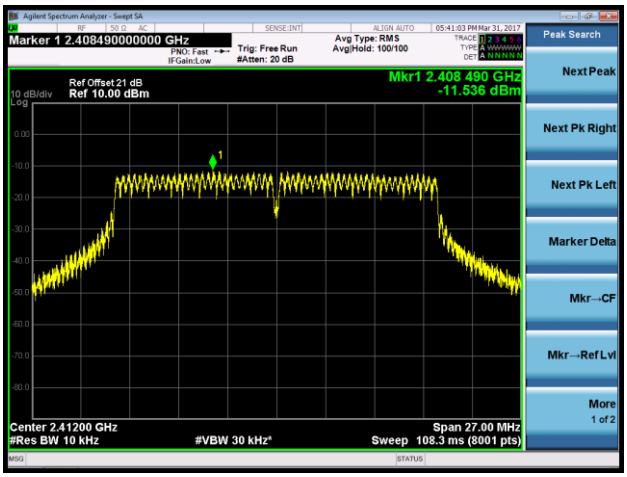

Channel 06 (2437MHz)

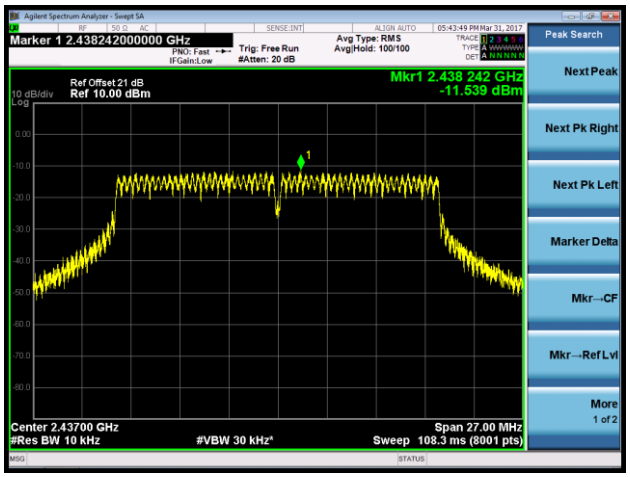

Channel 11 (2462MHz)

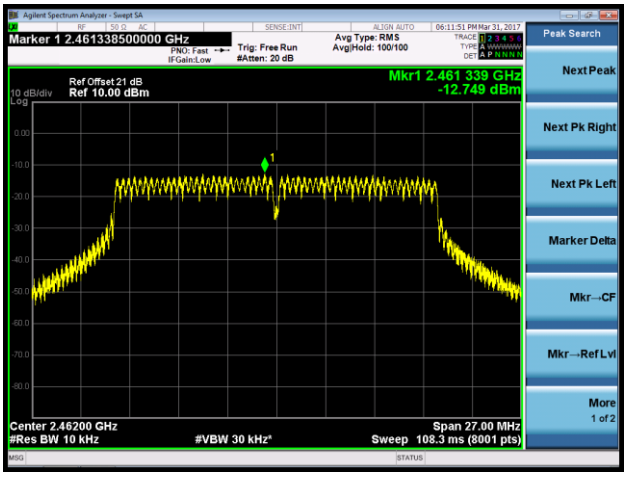

802.11n-HT40 AVGPSD - Ant 1	
Channel 03 (2422MHz)	**Channel 06 (2437MHz)**
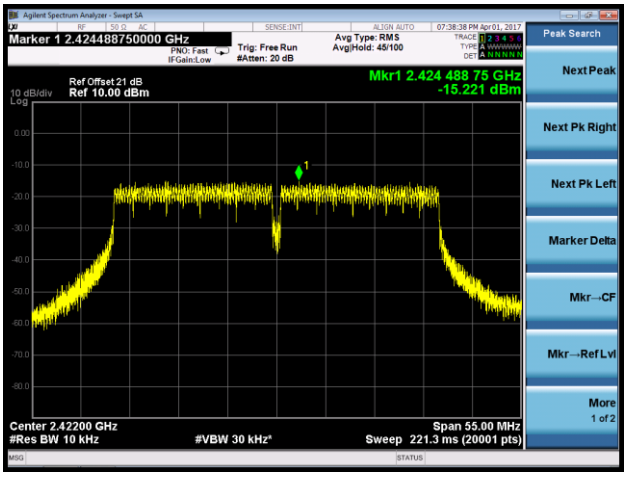	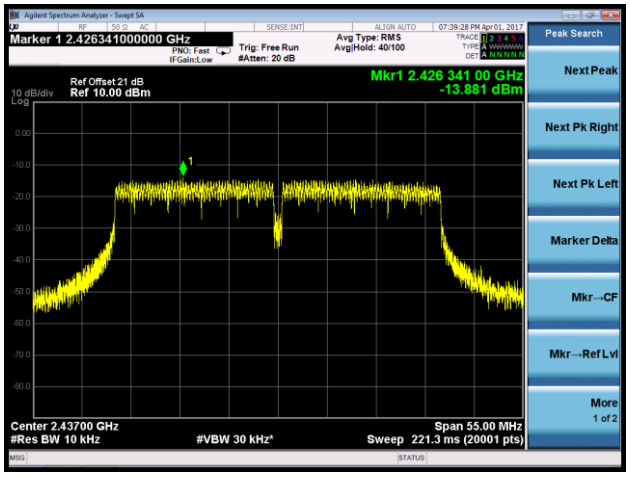
Channel 09 (2452MHz)	
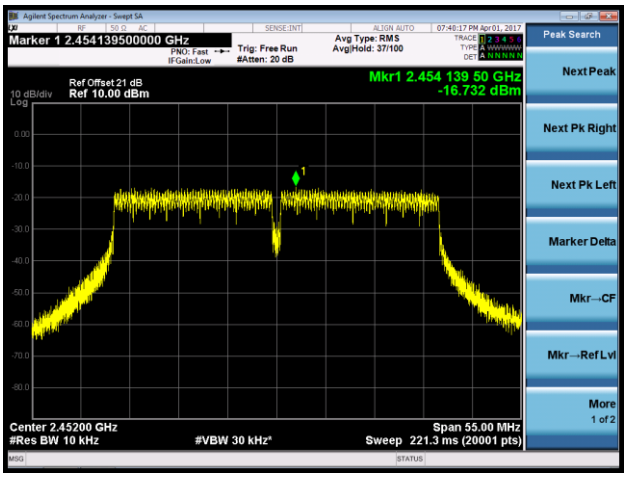	

CDD Mode

802.11b AVGPSD - Ant 0 / Ant 0 + 1	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
Channel 11 (2462MHz)	