




Annex C

15.207 A/C Powerline


Conducted Emission



Compliance Testing
Conducted Emissions - Class B
Line 1 (Neutral)

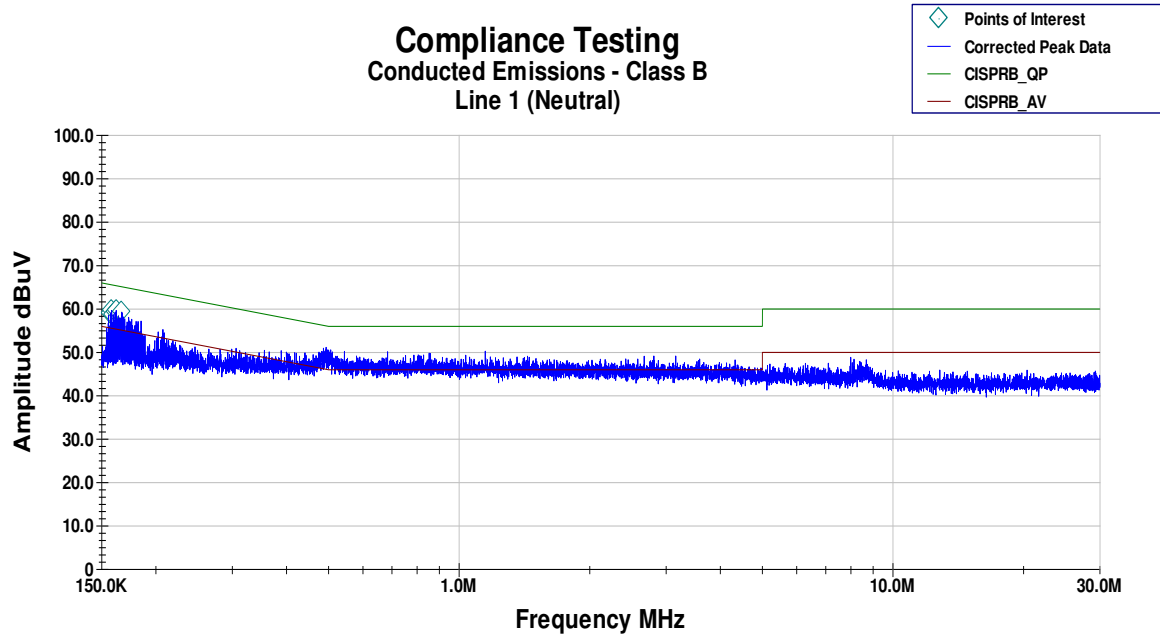

Compliance Testing
Conducted Emissions - Class B
Line 2 (Phase)

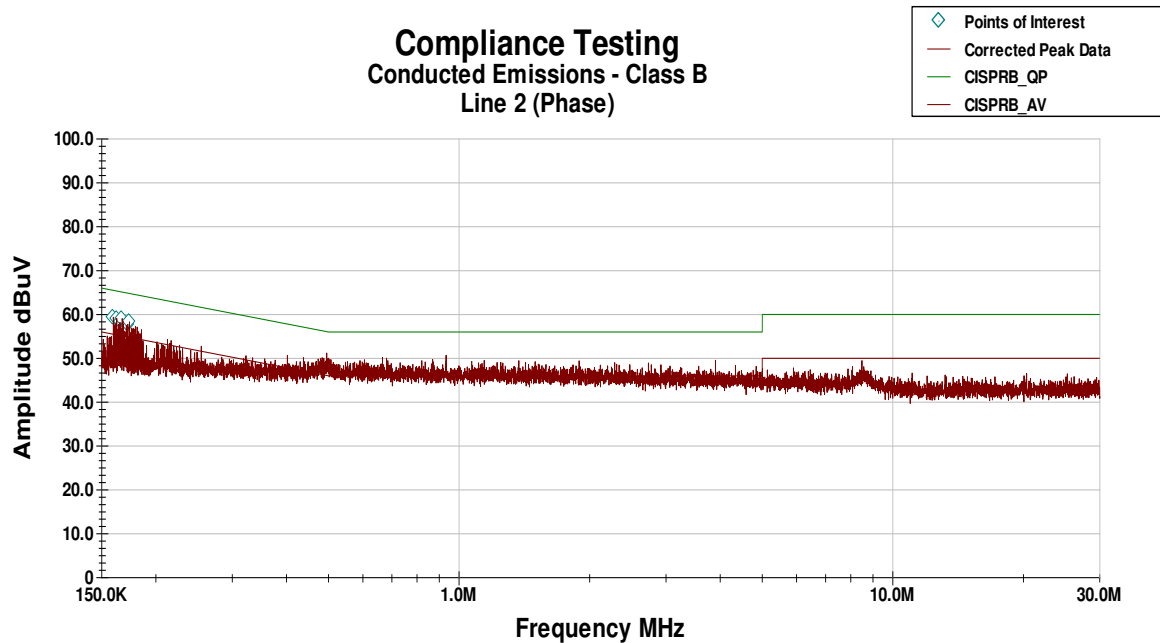



L1 Avg

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
157.95 KHz	35.15	0.22	0.02	10.2	45.592	55.773	-10.181
158.07 KHz	34.55	0.22	0.02	10.2	44.993	55.769	-10.776
158.55 KHz	35.03	0.21	0.02	10.2	45.468	55.756	-10.288
159.53 KHz	35.02	0.2	0.02	10.2	45.448	55.728	-10.28
163.09 KHz	38.44	0.2	0.02	10.169	48.828	55.626	-6.798
166.17 KHz	38.01	0.2	0.02	10.138	48.363	55.538	-7.175

L2 Avg

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
156.9 KHz	34.15	0.23	0.02	10.2	44.599	55.803	-11.204
158.45 KHz	34.37	0.22	0.02	10.2	44.804	55.759	-10.955
162.81 KHz	37.79	0.2	0.02	10.172	48.185	55.634	-7.449
165.46 KHz	37.85	0.2	0.02	10.145	48.215	55.558	-7.343
165.53 KHz	37.75	0.2	0.02	10.145	48.115	55.556	-7.441
165.85 KHz	37.81	0.2	0.02	10.141	48.172	55.547	-7.375

L1 QP

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
157.95 KHz	44.158	0.221	0.02	10.2	54.598	65.773	-11.175
158.07 KHz	43.436	0.219	0.02	10.2	53.875	65.769	-11.894
158.55 KHz	45.233	0.215	0.02	10.2	55.667	65.756	-10.089
159.53 KHz	45.905	0.205	0.02	10.2	56.329	65.728	-9.398
163.09 KHz	47.959	0.2	0.02	10.169	58.348	65.626	-7.278
166.17 KHz	47.671	0.2	0.02	10.138	58.029	65.538	-7.509

L2 QP

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
156.9 KHz	43.09	0.23	0.02	10.2	53.539	65.803	-12.264
158.45 KHz	45.31	0.22	0.02	10.2	55.749	65.759	-10.009
162.81 KHz	48.01	0.2	0.02	10.172	58.401	65.634	-7.233
165.46 KHz	47.09	0.2	0.02	10.145	57.456	65.558	-8.102
165.53 KHz	47.6	0.2	0.02	10.145	57.961	65.556	-7.595
165.85 KHz	47.52	0.2	0.02	10.141	57.883	65.547	-7.664