


100x130mm


Energizer®
Bluetooth Speaker

BTS356

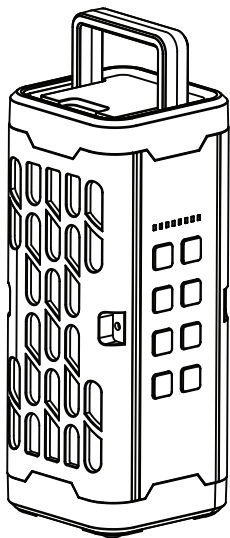

User Manual

Controls & Ports

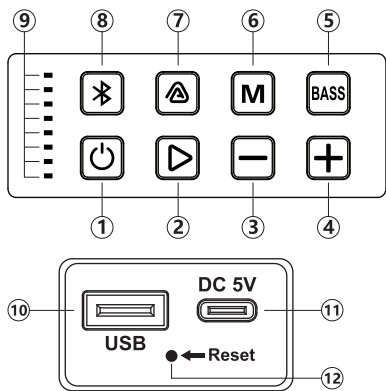

1. 【】 : Power Button: Press and hold to turn the speaker on or off.
2. 【】 : Press once to play or pause music.
3. 【】 : Press once to decrease the volume. Press and hold to play the previous track.
4. 【】 : Press once to increase the volume. Press and hold to play the next track.
5. 【**BASS**】 : Press once to enhance the bass effect.
6. 【**M**】 : Press once to switch between Bluetooth mode and USB mode.
7. 【】 : Multi-audio broadcasting. An audio source device can transmit audio to multiple receiving devices simultaneously.
8. 【】 : Press once to quickly enter Bluetooth mode. Press again to disconnect the current Bluetooth connection.
9. 【**Battery Indicator**】 : Displays the battery status.

01

10. 【**USB Port**】 : Insert a USB drive to play music files. Supports MP3 and WMA audio files. Can also be used as a power bank with a 5V $\equiv$ 1A output.
11. 【**DC 5V Port**】 : Charging port. Use the included Type-C charging cable and a compatible charger to charge the speaker.
12. 【**Reset Button**】 : Built-in hidden reset button. If the speaker cannot be powered on or off normally, insert a thin object into the reset hole to restore normal operation.

Bluetooth Connection

1. Turn on the speaker. Bluetooth mode will start automatically.
2. Enable Bluetooth on your mobile device.
3. Search for and select “**Energizer BTS356**”.
4. If prompted, enter the PIN code: 0000.
5. Press the Bluetooth button to reconnect or disconnect Bluetooth.

Auracast Connection

1. Turn on all compatible speakers.
2. Press the Auracast () button on one speaker to set it as the main speaker.
3. Press the Auracast () button on the additional speakers to pair them.
4. Once connected, audio will play simultaneously across all paired speakers.
5. Press the Auracast () button on the main speaker again to disconnect all paired speakers.
6. For best performance, keep speakers within 8 meters of each other.

Charging Instructions

1. To protect battery performance, avoid using the speaker while charging.
2. Connect the charging cable to a 5V $\equiv$ 2A charger and plug it into the charging port while the speaker is powered off. During charging, the white battery indicators will light up one by one. When fully charged, the white indicator remains solid. When the battery is low, the white indicator flashes.
3. To charge other devices, connect them to the USB charging port.

02

Troubleshooting

- 1. Speaker Powers Off Immediately After Startup**
The battery level is low. Please fully charge the speaker before use.
- 2. Speaker Shuts Down or Restarts During Playback**
The battery level is low. Please fully charge the speaker before use.
- 3. Charging Indicator Does Not Light Up / Speaker Does Not Charge**
Check whether the charging cable is properly connected or damaged. Check whether the charger is functioning properly. Please use a 5V $\equiv$ 2A charger to charge the speaker.
- 4. No Audio in Bluetooth Mode**
Check whether the Bluetooth connection was completed successfully. Make sure the connected Bluetooth device is playing audio. Make sure the volume is not set to the minimum level.
- 5. No Audio During USB Playback**
Check whether the USB drive is fully inserted and making proper contact. Check whether the audio files on the USB drive are in a supported format. Supported formats include MP3 and WMA audio files. Make sure the speaker volume is not set to the minimum level.
- 6. Charging Time Exceeds 15 Hours**
If charging exceeds 15 hours, the indicator light will flash red and green alternately.
- 7. Speaker Cannot Be Powered On or Off**
If the speaker cannot be powered on or off normally, insert a thin object (such as a paper clip) into the Reset port to activate the reset button and restart the system.

Technical Specifications

- Charging Input: 5V $\equiv$ 2A
- Audio Output: 70W Peak / 35W RMS
- Speaker Driver: 53 × 93 mm Woofer + 25 mm Tweeter
- Frequency Response: 65 Hz – 18 kHz
- Signal-to-Noise Ratio: $\geq$ 85 dB
- Product Dimensions: 85 × 84 × 208 mm

Package Contents

- Speaker *1
- USB-C Charging Cable *1
- User Manual *1

03

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter. The device can be used in portable exposure conditions without restriction.

04



PowerSafe Management
Guarantees against short circuit and over-charging for your power bank and devices.



Customer Service
For any questions about the product, please scan the QR code to visit our Support Center. Thank you!

Warranty

All products from the date of purchase are qualified for limited time warranty. For more warranty information, please visit: <http://www.energizerpowerpacks.com>



©2026 Energizer. Energizer and certain graphic designs are trademarks of Energizer Brands, LLC and related subsidiaries and are used under license by TennRich International Corp..

05