

- NOTES: UNLESS OTHERWISE SPECIFIED,
- ALL DIMENSIONS ARE IN MILLIMETERS.
 - SCALE 1:1
 - THIS ARTWORK FILM ONLY CONTAINS GRAPHICS INFORMATION. SEE TIVO DRAWING DLBL-00280-000 FOR MATERIAL AND DIE CUT DIMENSIONS.
 - COLORS: LABEL STOCK: (BLACK)

TEXT AND GRAPHICS: SILVER

- GRAPHIC ELEMENTS SHOWN IN GREEN ARE TO BE PRINTED BY THE CONTRACT MFR.AT FINAL ASSY. AND ARE SHOWN HERE FOR REFERENCE. WHEN PRINTED THESE ELEMENTS SHALL BE PRINTED IN SILVER.


TEXT: AVENIR LT STD

BARCODE SYMBOLOGY:

TIVO SN: CODE 128 PER ANSI/AIM BC4-1999
16 CHAR, X=7.0 MILS
MAC 1: CODE 128 PER ANSI/AIM BC4-1999
12 CHAR, X=7.0 MILS
MAC 2: CODE 128 PER ANSI/AIM BC4-1999
12 CHAR, X=7.0 MILS
SKU: CODE 128 PER ANSI/AIM BC4-1999
6 CHAR, X=7.0 MILS

- LABEL MUST COMPLY WITH TIVO PERMANENCE STANDARD, REF. SDOC-00130-000
- DATA FOR VERSION NAME, MODEL AND SKU ARE SHOWN IN VERSION TABLE ON THIS DRAWING.

REV	BY	DESCRIPTION	ECO	DATE
A1	J. PATTERSON	RELEASE TO MFG	ECO02353	24-MAY-2016
A2	J. PATTERSON	ADDED NAME	ECO02356	08-JUN-2016
A3	J. PATTERSON	RE-ARRANGED LABEL, PUT ITE UNDER UL	ECO02366	17-JUN-2016
A4	J. PATTERSON	added "reset", moved text above reset up to make space	ECO02374	05-JUL-2016

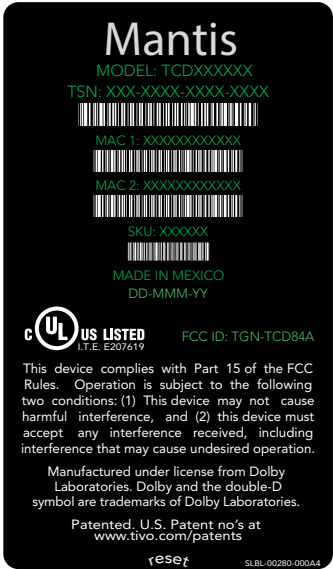

APPLY ADHESIVE TO FAR SIDE

DRAWN J.PATTERSON		DATE 24-FEB-2015		 2160 Gold Street Alviso, CA 95002	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TiVo INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TiVo INC IS STRICTLY PROHIBITED. PROPRIETARY AND CONFIDENTIAL					
SIZE B	SCALE 1.0	SHEET 1 OF 1	DWG. NO. ALBL-00280-000		REV A4