



802.11be-EHT40 Out-of-Band Emissions - Ant 1

Channel 03 (2422 MHz)

Reference Level

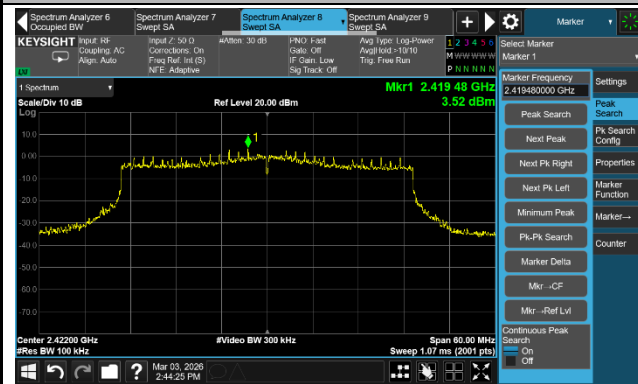

Low Band Edge

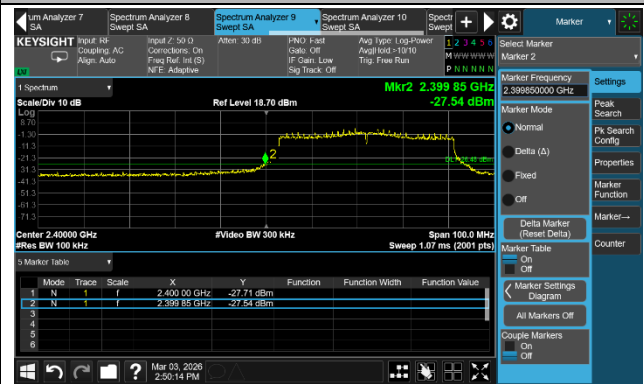


Spurious Emission




Channel 06 (2437 MHz)

Reference Level

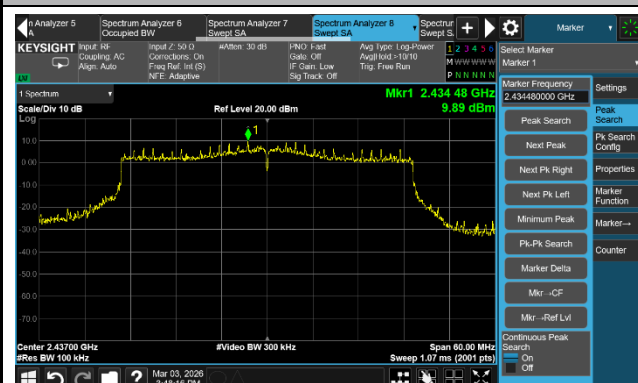


Spurious Emission

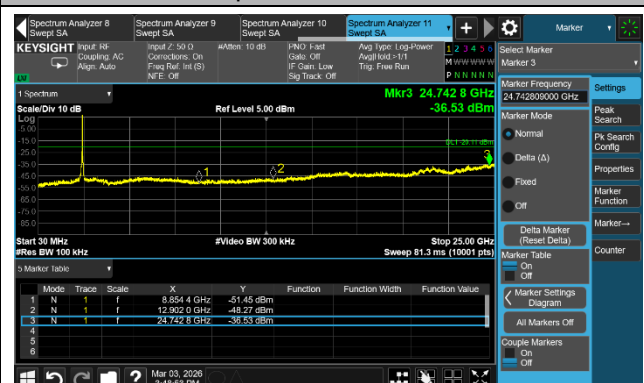


802.11be-EHT40 Out-of-Band Emissions - Ant 1

Channel 09 (2452 MHz)


Reference Level

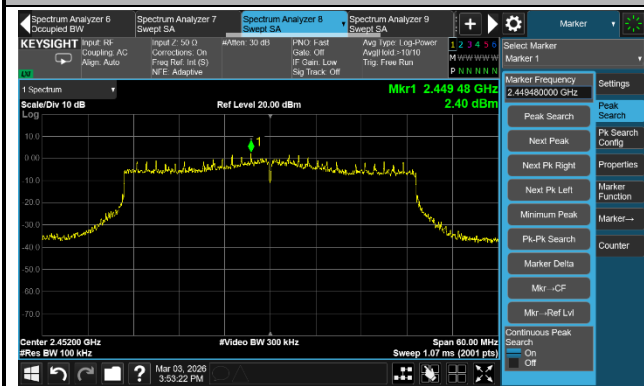

High Band Edge

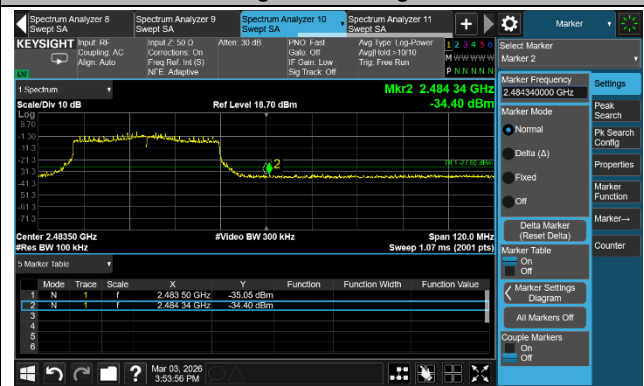

Spurious Emission

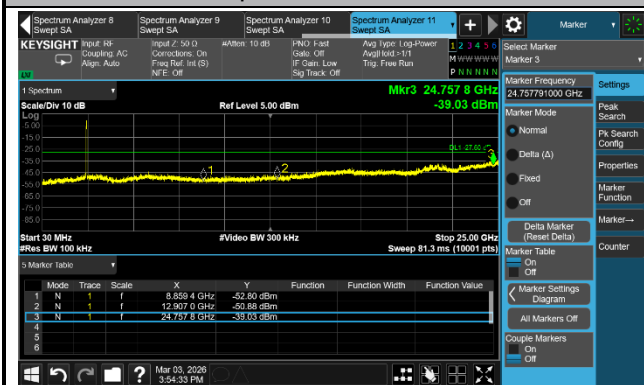

A.6 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	8310.00	34.54	10.03	44.57	74.00	-29.43	Peak	Horizontal
	11645.40	36.61	13.75	50.36	74.00	-23.64	Peak	Horizontal
	18000.00	20.11	24.16	44.27	54.00	-9.73	Average	Horizontal
	18000.00	35.04	24.16	59.20	74.00	-14.80	Peak	Horizontal
	7643.60	36.89	9.34	46.23	74.00	-27.77	Peak	Vertical
	11303.70	35.59	14.19	49.78	74.00	-24.22	Peak	Vertical
	18000.00	19.90	24.16	44.06	54.00	-9.94	Average	Vertical
	18000.00	33.19	24.16	57.35	74.00	-16.65	Peak	Vertical
06	7312.10	39.54	9.03	48.57	74.00	-25.43	Peak	Horizontal
	11441.40	36.16	14.30	50.46	74.00	-23.54	Peak	Horizontal
	18000.00	20.00	24.16	44.16	54.00	-9.84	Average	Horizontal
	18000.00	34.25	24.16	58.41	74.00	-15.59	Peak	Horizontal
	7648.70	36.31	9.43	45.74	74.00	-28.26	Peak	Vertical
	11295.20	36.18	14.26	50.44	74.00	-23.56	Peak	Vertical
	17984.70	19.87	24.02	43.89	54.00	-10.11	Average	Vertical
	17984.70	35.43	24.02	59.45	74.00	-14.55	Peak	Vertical
11	7385.20	39.17	9.05	48.22	74.00	-25.78	Peak	Horizontal
	11347.90	35.80	14.23	50.03	74.00	-23.97	Peak	Horizontal
	18000.00	20.01	24.16	44.17	54.00	-9.83	Average	Horizontal
	18000.00	33.06	24.16	57.22	74.00	-16.78	Peak	Horizontal
	7312.10	38.21	9.03	47.24	74.00	-26.76	Peak	Vertical
	11070.80	36.35	14.51	50.86	74.00	-23.14	Peak	Vertical
	17954.10	19.87	23.29	43.16	54.00	-10.84	Average	Vertical
	17954.10	35.66	23.29	58.95	74.00	-15.05	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7378.40	33.82	9.18	43.00	74.00	-31.00	Peak	Horizontal
	11291.80	35.98	14.26	50.24	74.00	-23.76	Peak	Horizontal
	18000.00	20.09	24.16	44.25	54.00	-9.75	Average	Horizontal
	18000.00	34.50	24.16	58.66	74.00	-15.34	Peak	Horizontal
	7380.10	37.14	9.14	46.28	74.00	-27.72	Peak	Vertical
	11288.40	35.62	14.27	49.89	74.00	-24.11	Peak	Vertical
	18000.00	20.15	24.16	44.31	54.00	-9.69	Average	Vertical
	18000.00	34.65	24.16	58.81	74.00	-15.19	Peak	Vertical
06	7310.40	38.50	9.01	47.51	74.00	-26.49	Peak	Horizontal
	11271.40	36.17	14.16	50.33	74.00	-23.67	Peak	Horizontal
	18000.00	20.11	24.16	44.27	54.00	-9.73	Average	Horizontal
	18000.00	33.38	24.16	57.54	74.00	-16.46	Peak	Horizontal
	7310.40	37.86	9.01	46.87	74.00	-27.13	Peak	Vertical
	10990.90	35.75	14.90	50.65	74.00	-23.35	Peak	Vertical
	18000.00	20.03	24.16	44.19	54.00	-9.81	Average	Vertical
	18000.00	35.50	24.16	59.66	74.00	-14.34	Peak	Vertical
11	7378.40	39.43	9.18	48.61	74.00	-25.39	Peak	Horizontal
	11171.10	35.67	14.26	49.93	74.00	-24.07	Peak	Horizontal
	18000.00	20.19	24.16	44.35	54.00	-9.65	Average	Horizontal
	18000.00	33.70	24.16	57.86	74.00	-16.14	Peak	Horizontal
	7385.20	41.10	9.05	50.15	74.00	-23.85	Peak	Vertical
	11366.60	35.60	14.28	49.88	74.00	-24.12	Peak	Vertical
	18000.00	20.31	24.16	44.47	54.00	-9.53	Average	Vertical
	18000.00	33.06	24.16	57.22	74.00	-16.78	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7653.80	37.08	9.33	46.41	74.00	-27.59	Peak	Horizontal
	10902.50	35.17	14.88	50.05	74.00	-23.95	Peak	Horizontal
	17993.20	20.34	24.10	44.44	54.00	-9.56	Average	Horizontal
	17993.20	34.54	24.10	58.64	74.00	-15.36	Peak	Horizontal
	7650.40	36.45	9.41	45.86	74.00	-28.14	Peak	Vertical
	11103.10	36.16	14.42	50.58	74.00	-23.42	Peak	Vertical
	18000.00	20.09	24.16	44.25	54.00	-9.75	Average	Vertical
	18000.00	33.61	24.16	57.77	74.00	-16.23	Peak	Vertical
06	7301.90	39.11	8.89	48.00	74.00	-26.00	Peak	Horizontal
	10990.90	35.35	14.90	50.25	74.00	-23.75	Peak	Horizontal
	18000.00	20.19	24.16	44.35	54.00	-9.65	Average	Horizontal
	18000.00	33.06	24.16	57.22	74.00	-16.78	Peak	Horizontal
	7322.30	37.54	9.18	46.72	74.00	-27.28	Peak	Vertical
	11295.20	35.24	14.26	49.50	74.00	-24.50	Peak	Vertical
	17989.80	20.06	24.07	44.13	54.00	-9.87	Average	Vertical
	17989.80	34.30	24.07	58.37	74.00	-15.63	Peak	Vertical
11	7393.70	38.64	8.92	47.56	74.00	-26.44	Peak	Horizontal
	10960.30	35.12	14.93	50.05	74.00	-23.95	Peak	Horizontal
	18000.00	20.00	24.16	44.16	54.00	-9.84	Average	Horizontal
	18000.00	35.29	24.16	59.45	74.00	-14.55	Peak	Horizontal
	7393.70	38.54	8.92	47.46	74.00	-26.54	Peak	Vertical
	11077.60	35.87	14.50	50.37	74.00	-23.63	Peak	Vertical
	18000.00	20.21	24.16	44.37	54.00	-9.63	Average	Vertical
	18000.00	34.34	24.16	58.50	74.00	-15.50	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7607.90	37.41	9.03	46.44	74.00	-27.56	Peak	Horizontal
	11040.20	36.05	14.65	50.70	74.00	-23.30	Peak	Horizontal
	18000.00	20.18	24.16	44.34	54.00	-9.66	Average	Horizontal
	18000.00	33.33	24.16	57.49	74.00	-16.51	Peak	Horizontal
	7397.10	36.00	8.92	44.92	74.00	-29.08	Peak	Vertical
	11405.70	35.23	14.25	49.48	74.00	-24.52	Peak	Vertical
	18000.00	20.34	24.16	44.50	54.00	-9.50	Average	Vertical
	18000.00	33.86	24.16	58.02	74.00	-15.98	Peak	Vertical
06	7567.10	36.47	9.22	45.69	74.00	-28.31	Peak	Horizontal
	11485.60	35.61	14.15	49.76	74.00	-24.24	Peak	Horizontal
	18000.00	20.21	24.16	44.37	54.00	-9.63	Average	Horizontal
	18000.00	33.72	24.16	57.88	74.00	-16.12	Peak	Horizontal
	7647.00	38.00	9.41	47.41	74.00	-26.59	Peak	Vertical
	11269.70	36.10	14.14	50.24	74.00	-23.76	Peak	Vertical
	18000.00	20.13	24.16	44.29	54.00	-9.71	Average	Vertical
	18000.00	33.57	24.16	57.73	74.00	-16.27	Peak	Vertical
09	7449.80	35.54	9.34	44.88	74.00	-29.12	Peak	Horizontal
	11291.80	35.64	14.26	49.90	74.00	-24.10	Peak	Horizontal
	18000.00	20.15	24.16	44.31	54.00	-9.69	Average	Horizontal
	18000.00	32.68	24.16	56.84	74.00	-17.16	Peak	Horizontal
	7380.10	36.70	9.14	45.84	74.00	-28.16	Peak	Vertical
	11201.70	35.42	14.20	49.62	74.00	-24.38	Peak	Vertical
	17966.00	20.09	23.42	43.51	54.00	-10.49	Average	Vertical
	17966.00	34.64	23.42	58.06	74.00	-15.94	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11ax-HE20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7648.70	36.33	9.43	45.76	74.00	-28.24	Peak	Horizontal
	11235.70	36.06	14.21	50.27	74.00	-23.73	Peak	Horizontal
	17981.30	20.00	23.94	43.94	54.00	-10.06	Average	Horizontal
	17981.30	34.28	23.94	58.22	74.00	-15.78	Peak	Horizontal
	7444.70	36.09	9.34	45.43	74.00	-28.57	Peak	Vertical
	11329.20	35.62	14.22	49.84	74.00	-24.16	Peak	Vertical
	18000.00	20.45	24.16	44.61	54.00	-9.39	Average	Vertical
	18000.00	33.53	24.16	57.69	74.00	-16.31	Peak	Vertical
06	7631.70	36.96	9.08	46.04	74.00	-27.96	Peak	Horizontal
	11128.60	35.74	14.37	50.11	74.00	-23.89	Peak	Horizontal
	18000.00	20.39	24.16	44.55	54.00	-9.45	Average	Horizontal
	18000.00	34.55	24.16	58.71	74.00	-15.29	Peak	Horizontal
	4843.70	38.25	3.67	41.92	74.00	-32.08	Peak	Vertical
	11103.10	35.78	14.42	50.20	74.00	-23.80	Peak	Vertical
	18000.00	20.34	24.16	44.50	54.00	-9.50	Average	Vertical
	18000.00	33.21	24.16	57.37	74.00	-16.63	Peak	Vertical
11	7381.80	37.24	9.11	46.35	74.00	-27.65	Peak	Horizontal
	11295.20	35.74	14.26	50.00	74.00	-24.00	Peak	Horizontal
	17993.20	20.28	24.10	44.38	54.00	-9.62	Average	Horizontal
	17993.20	34.15	24.10	58.25	74.00	-15.75	Peak	Horizontal
	4843.70	38.30	3.67	41.97	74.00	-32.03	Peak	Vertical
	11327.50	36.05	14.20	50.25	74.00	-23.75	Peak	Vertical
	18000.00	20.63	24.16	44.79	54.00	-9.21	Average	Vertical
	18000.00	32.96	24.16	57.12	74.00	-16.88	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11ax-HE40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7541.60	36.08	9.26	45.34	74.00	-28.66	Peak	Horizontal
	11288.40	35.19	14.27	49.46	74.00	-24.54	Peak	Horizontal
	18000.00	20.19	24.16	44.35	54.00	-9.65	Average	Horizontal
	18000.00	33.47	24.16	57.63	74.00	-16.37	Peak	Horizontal
	4843.70	37.81	3.67	41.48	74.00	-32.52	Peak	Vertical
	11664.10	37.14	13.63	50.77	74.00	-23.23	Peak	Vertical
	18000.00	20.29	24.16	44.45	54.00	-9.55	Average	Vertical
	18000.00	33.54	24.16	57.70	74.00	-16.30	Peak	Vertical
06	7303.60	38.52	8.91	47.43	74.00	-26.57	Peak	Horizontal
	11269.70	35.72	14.14	49.86	74.00	-24.14	Peak	Horizontal
	17993.20	20.28	24.10	44.38	54.00	-9.62	Average	Horizontal
	17993.20	34.70	24.10	58.80	74.00	-15.20	Peak	Horizontal
	4843.70	37.76	3.67	41.43	74.00	-32.57	Peak	Vertical
	11305.40	35.67	14.18	49.85	74.00	-24.15	Peak	Vertical
	18000.00	20.54	24.16	44.70	54.00	-9.30	Average	Vertical
	18000.00	33.26	24.16	57.42	74.00	-16.58	Peak	Vertical
09	7570.50	36.09	9.13	45.22	74.00	-28.78	Peak	Horizontal
	11332.60	35.30	14.26	49.56	74.00	-24.44	Peak	Horizontal
	18000.00	20.27	24.16	44.43	54.00	-9.57	Average	Horizontal
	18000.00	34.61	24.16	58.77	74.00	-15.23	Peak	Horizontal
	7526.30	34.96	9.14	44.10	74.00	-29.90	Peak	Vertical
	11332.60	35.94	14.26	50.20	74.00	-23.80	Peak	Vertical
	18000.00	20.32	24.16	44.48	54.00	-9.52	Average	Vertical
	18000.00	35.71	24.16	59.87	74.00	-14.13	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11be-EHT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4843.70	36.85	3.67	40.52	74.00	-33.48	Peak	Horizontal
	11312.20	35.97	14.12	50.09	74.00	-23.91	Peak	Horizontal
	18000.00	20.43	24.16	44.59	54.00	-9.41	Average	Horizontal
	18000.00	33.93	24.16	58.09	74.00	-15.91	Peak	Horizontal
	4843.70	38.12	3.67	41.79	74.00	-32.21	Peak	Vertical
	11404.00	35.44	14.23	49.67	74.00	-24.33	Peak	Vertical
	17988.10	20.27	24.05	44.32	54.00	-9.68	Average	Vertical
	17988.10	34.48	24.05	58.53	74.00	-15.47	Peak	Vertical
06	7322.30	38.07	9.18	47.25	74.00	-26.75	Peak	Horizontal
	11098.00	35.31	14.41	49.72	74.00	-24.28	Peak	Horizontal
	17998.30	20.19	24.15	44.34	54.00	-9.66	Average	Horizontal
	17998.30	34.25	24.15	58.40	74.00	-15.60	Peak	Horizontal
	4843.70	37.08	3.67	40.75	74.00	-33.25	Peak	Vertical
	10919.50	34.95	14.98	49.93	74.00	-24.07	Peak	Vertical
	18000.00	20.55	24.16	44.71	54.00	-9.29	Average	Vertical
	18000.00	34.02	24.16	58.18	74.00	-15.82	Peak	Vertical
11	7381.80	36.84	9.11	45.95	74.00	-28.05	Peak	Horizontal
	11213.60	35.32	14.22	49.54	74.00	-24.46	Peak	Horizontal
	17994.90	20.16	24.12	44.28	54.00	-9.72	Average	Horizontal
	17994.90	34.36	24.12	58.48	74.00	-15.52	Peak	Horizontal
	4078.70	36.54	1.33	37.87	74.00	-36.13	Peak	Vertical
	10994.30	34.58	14.88	49.46	74.00	-24.54	Peak	Vertical
	18000.00	20.22	24.16	44.38	54.00	-9.62	Average	Vertical
	18000.00	33.30	24.16	57.46	74.00	-16.54	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2026-03-06	Test Mode	802.11be-EHT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4843.70	37.12	3.67	40.79	74.00	-33.21	Peak	Horizontal
	11281.60	35.60	14.24	49.84	74.00	-24.16	Peak	Horizontal
	17828.30	22.14	21.19	43.33	54.00	-10.67	Average	Horizontal
	17828.30	31.50	21.19	52.69	74.00	-21.31	Peak	Horizontal
	4843.70	38.16	3.67	41.83	74.00	-32.17	Peak	Vertical
	11130.30	35.33	14.36	49.69	74.00	-24.31	Peak	Vertical
	17993.20	20.18	24.10	44.28	54.00	-9.72	Average	Vertical
	17993.20	34.10	24.10	58.20	74.00	-15.80	Peak	Vertical
06	7324.00	38.22	9.21	47.43	74.00	-26.57	Peak	Horizontal
	10968.80	34.84	14.92	49.76	74.00	-24.24	Peak	Horizontal
	17998.30	20.21	24.15	44.36	54.00	-9.64	Average	Horizontal
	17998.30	34.72	24.15	58.87	74.00	-15.13	Peak	Horizontal
	4843.70	37.51	3.67	41.18	74.00	-32.82	Peak	Vertical
	11261.20	35.53	14.11	49.64	74.00	-24.36	Peak	Vertical
	17994.90	20.15	24.12	44.27	54.00	-9.73	Average	Vertical
	17994.90	34.12	24.12	58.24	74.00	-15.76	Peak	Vertical
09	4843.70	37.10	3.67	40.77	74.00	-33.23	Peak	Horizontal
	11313.90	35.29	14.10	49.39	74.00	-24.61	Peak	Horizontal
	17991.50	20.32	24.08	44.40	54.00	-9.60	Average	Horizontal
	17991.50	34.35	24.08	58.43	74.00	-15.57	Peak	Horizontal
	4843.70	38.49	3.67	42.16	74.00	-31.84	Peak	Vertical
	11290.10	35.54	14.26	49.80	74.00	-24.20	Peak	Vertical
	17991.50	20.06	24.08	44.14	54.00	-9.86	Average	Vertical
	17991.50	34.37	24.08	58.45	74.00	-15.55	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission 9 kHz ~ 30 MHz:

Site	WZ-AC2	Test Date	2026-03-13
Temperature	23.2 °C	Humidity	31.8%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11b at 2412 MHz		

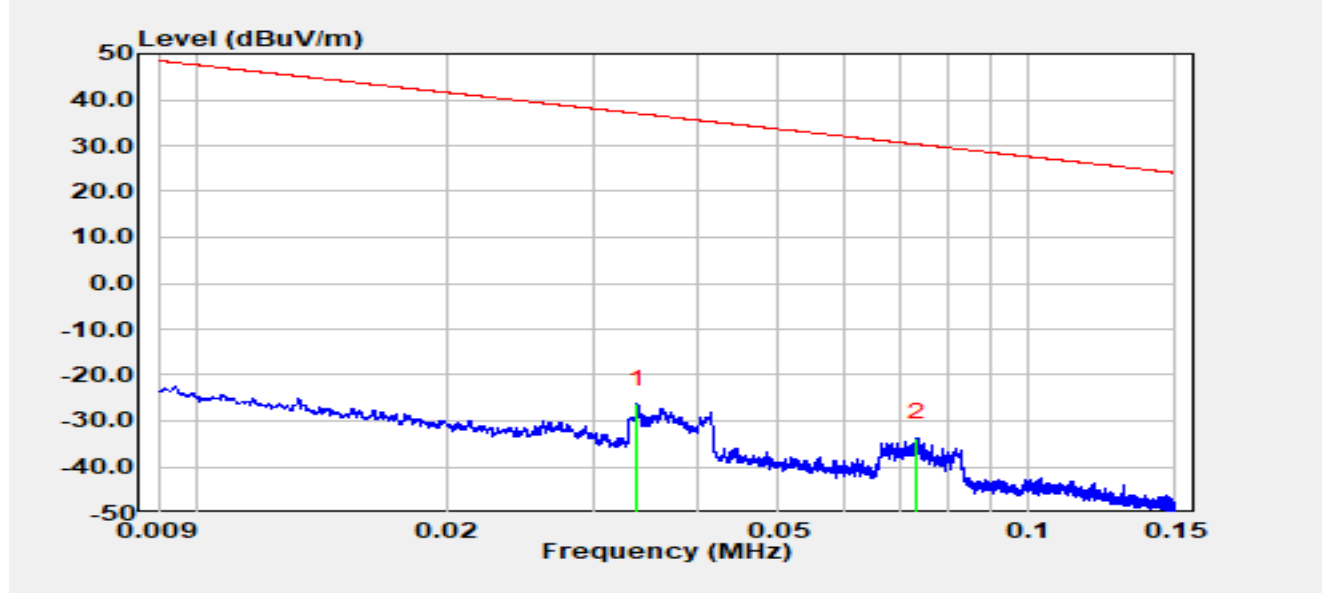


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.03	34.55	-60.95	-26.40	-63.39	36.99	Peak
2		0.07	27.41	-61.08	-33.67	-63.95	30.27	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-13
Temperature	23.2 °C	Humidity	31.8%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11b at 2412 MHz		

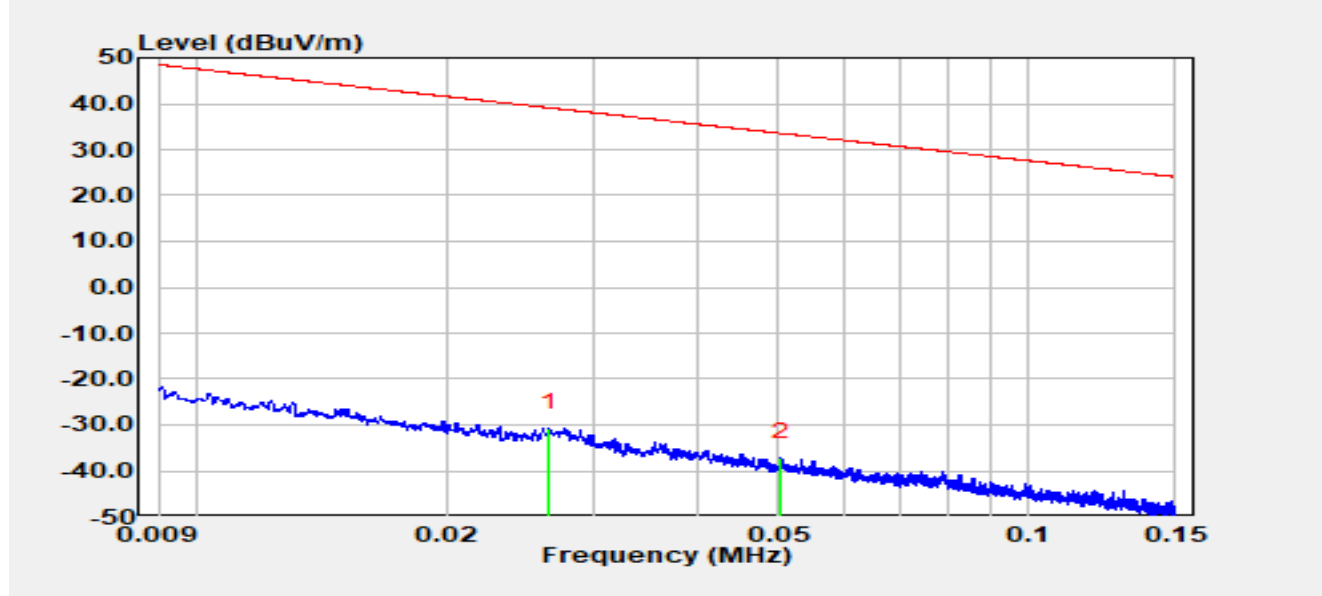


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.03	30.29	-60.87	-30.58	-69.71	39.12	Peak
2		0.05	23.94	-61.05	-37.11	-70.65	33.54	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- $C.F (dB/m) = Antenna\ Factor (dB/m) + Cable\ Loss (dB) + 40\log(d1/d2) (dB)$, $d1 = 3\ m$, $d2 = 300\ m$ (9 kHz - 490 kHz) or $30\ m$ (490 kHz - 30 MHz).
- $Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m)$.

Site	WZ-AC2	Test Date	2026-03-13
Temperature	23.2 °C	Humidity	31.8%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11b at 2412 MHz		

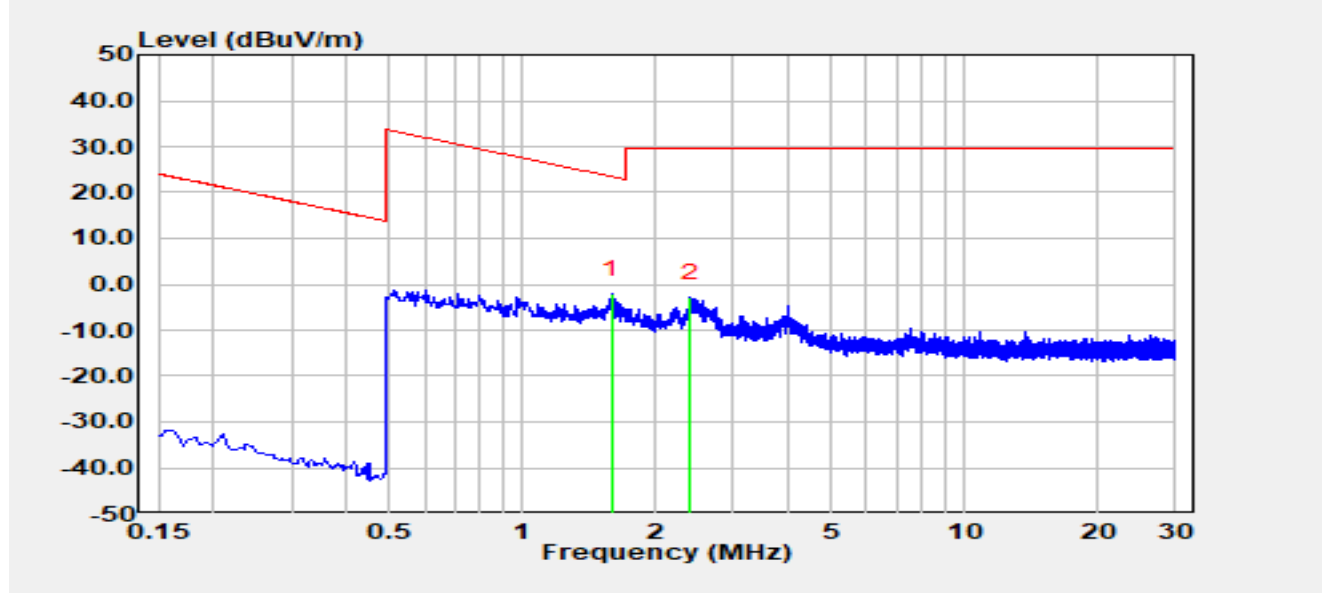


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	1.59	18.75	-20.97	-2.22	-25.83	23.61	Peak
2		2.39	17.99	-20.87	-2.88	-32.38	29.50	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-13
Temperature	23.2 °C	Humidity	31.8%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11b at 2412 MHz		

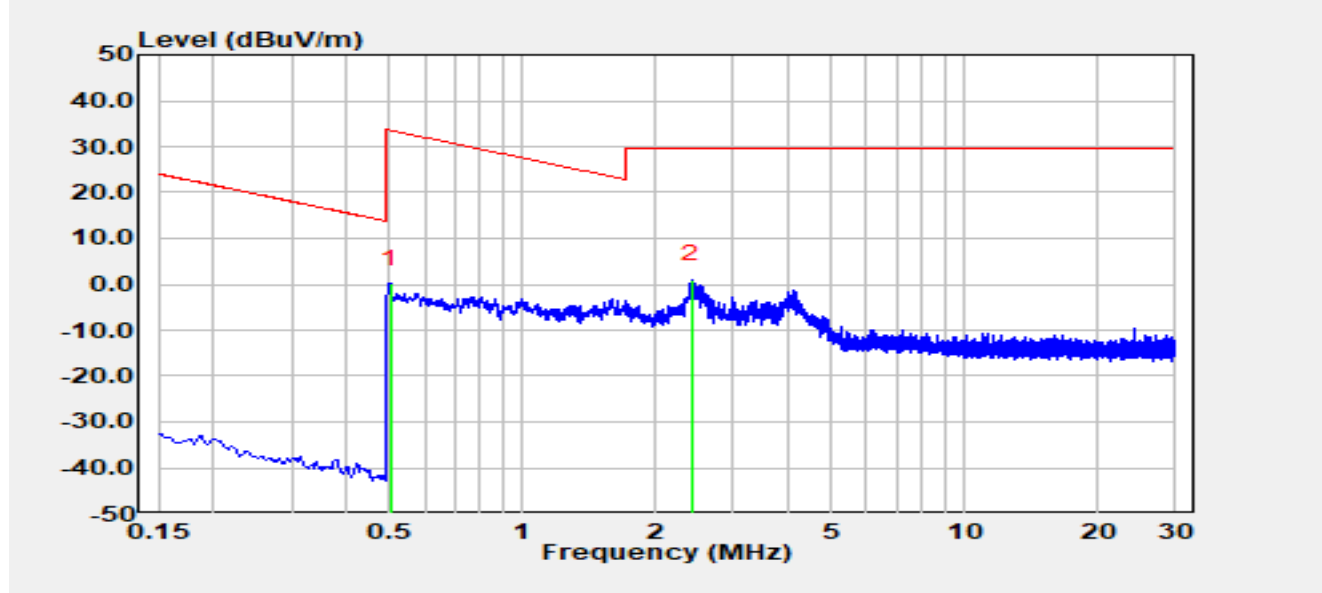


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.50	21.17	-21.12	0.05	-33.53	33.59	Peak
2	*	2.42	21.88	-20.86	1.01	-28.49	29.50	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission 30 MHz ~ 1 GHz:

Site	WZ-AC1	Test Date	2026-03-02
Temperature	20.8 °C	Humidity	50.4%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2437 MHz		

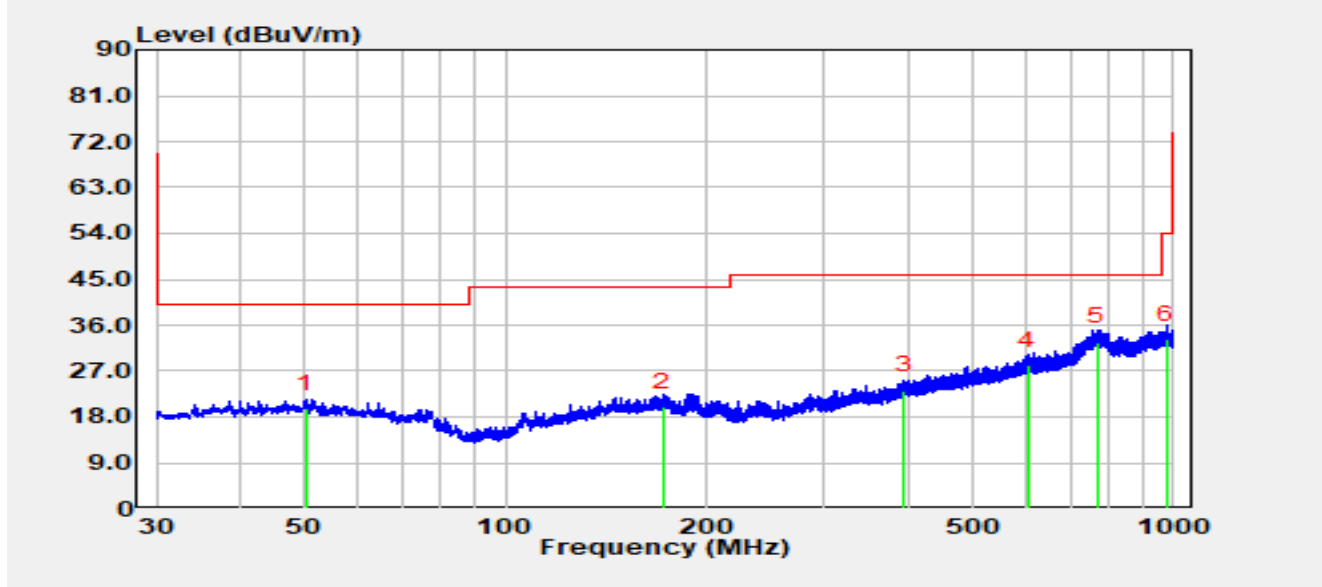


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		50.27	1.25	18.40	19.65	-20.35	40.00	QP
2		172.40	2.14	17.79	19.93	-23.57	43.50	QP
3		394.72	2.11	21.14	23.25	-22.75	46.00	QP
4		604.63	2.10	26.07	28.17	-17.83	46.00	QP
5	*	768.66	4.21	28.56	32.77	-13.23	46.00	QP
6		976.43	2.25	30.91	33.16	-20.84	54.00	QP

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2026-03-02
Temperature	20.8 °C	Humidity	50.4%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2437 MHz		

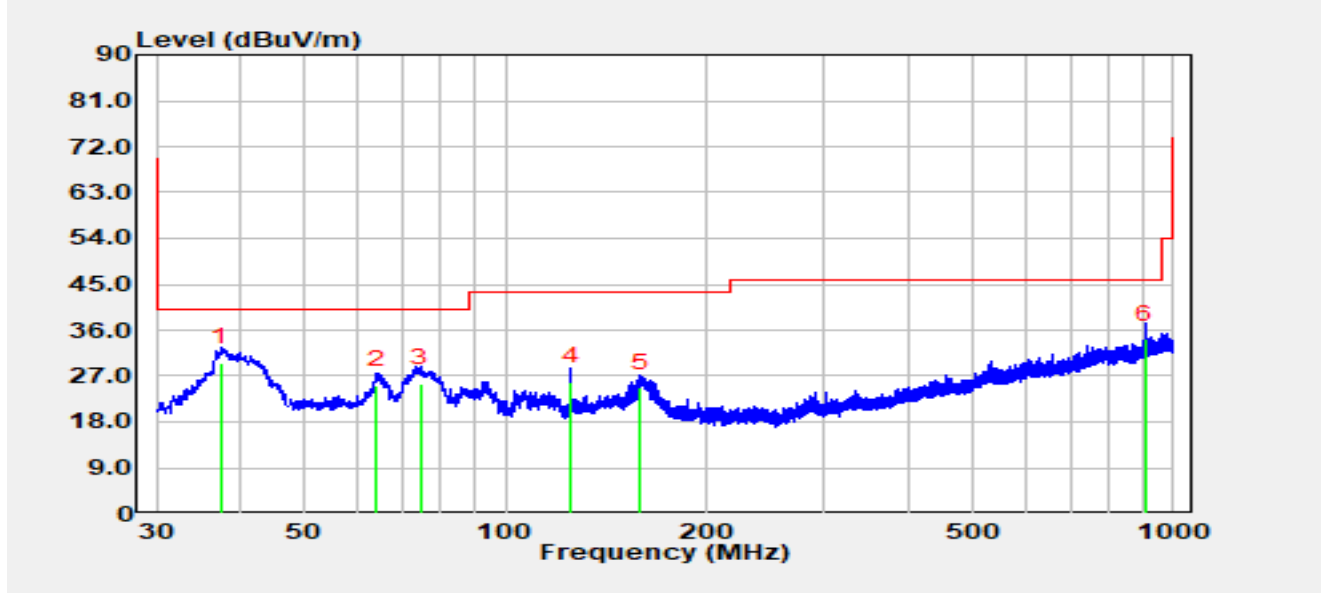


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	37.37	12.14	17.55	29.69	-10.31	40.00	QP
2		64.05	8.14	17.07	25.21	-14.79	40.00	QP
3		74.43	10.25	15.25	25.50	-14.50	40.00	QP
4		125.06	9.25	16.68	25.93	-17.57	43.50	QP
5		159.30	6.54	18.24	24.78	-18.72	43.50	QP
6		906.78	4.25	29.96	34.21	-11.79	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission 1 GHz ~ 18 GHz:

Site	WZ-AC1	Test Date	2026-03-06
Temperature	20.3 °C	Humidity	30.9%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Dick Shen
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

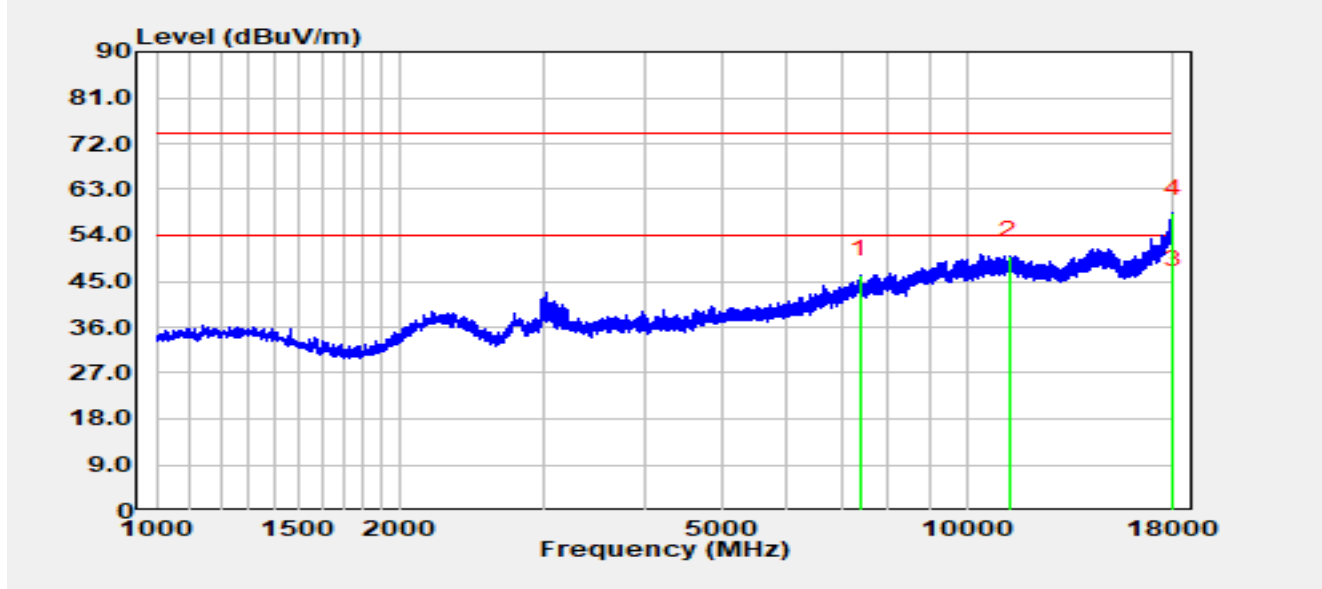


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7381.80	37.24	9.11	46.35	-27.65	74.00	Peak
2		11295.20	35.74	14.26	50.00	-24.00	74.00	Peak
3	*	17993.20	20.28	24.10	44.38	-9.62	54.00	Average
4		17993.20	34.15	24.10	58.25	-15.75	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2026-03-06
Temperature	20.3 °C	Humidity	30.9%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Dick Shen
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

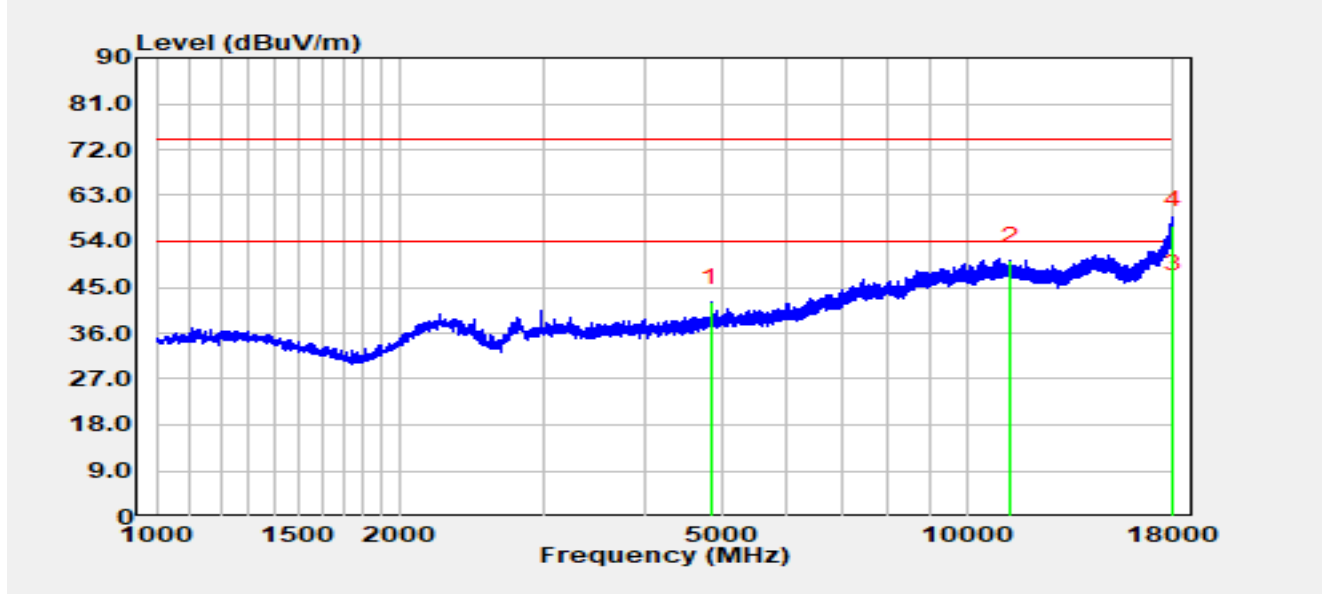


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		4843.70	38.30	3.67	41.97	-32.03	74.00	Peak
2		11327.50	36.05	14.20	50.26	-23.74	74.00	Peak
3	*	18000.00	20.63	24.16	44.79	-9.21	54.00	Average
4		18000.00	32.96	24.16	57.13	-16.87	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission above 18 GHz:

Site	WZ-AC2	Test Date	2026-01-05
Temperature	24.3 °C	Humidity	35.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2437 MHz		

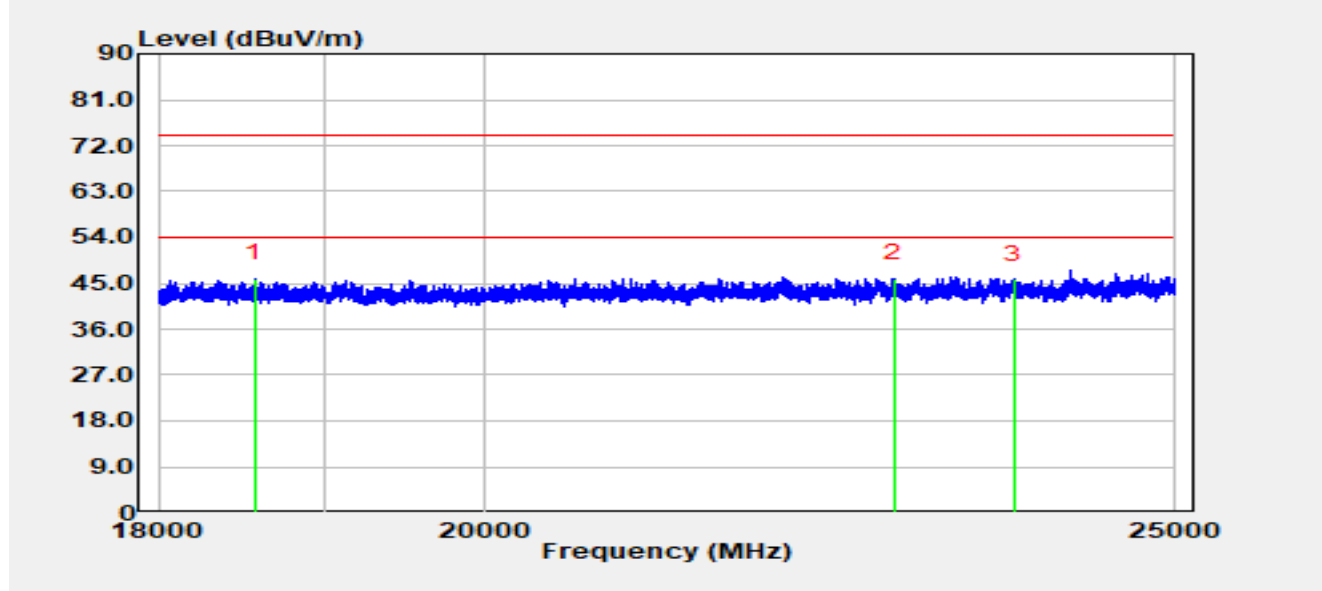


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18571.90	56.23	-10.26	45.97	-28.03	74.00	Peak
2	*	22829.30	52.35	-6.34	46.01	-27.99	74.00	Peak
3		23724.60	52.00	-6.17	45.83	-28.17	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-05
Temperature	24.3 °C	Humidity	35.2%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2437 MHz		

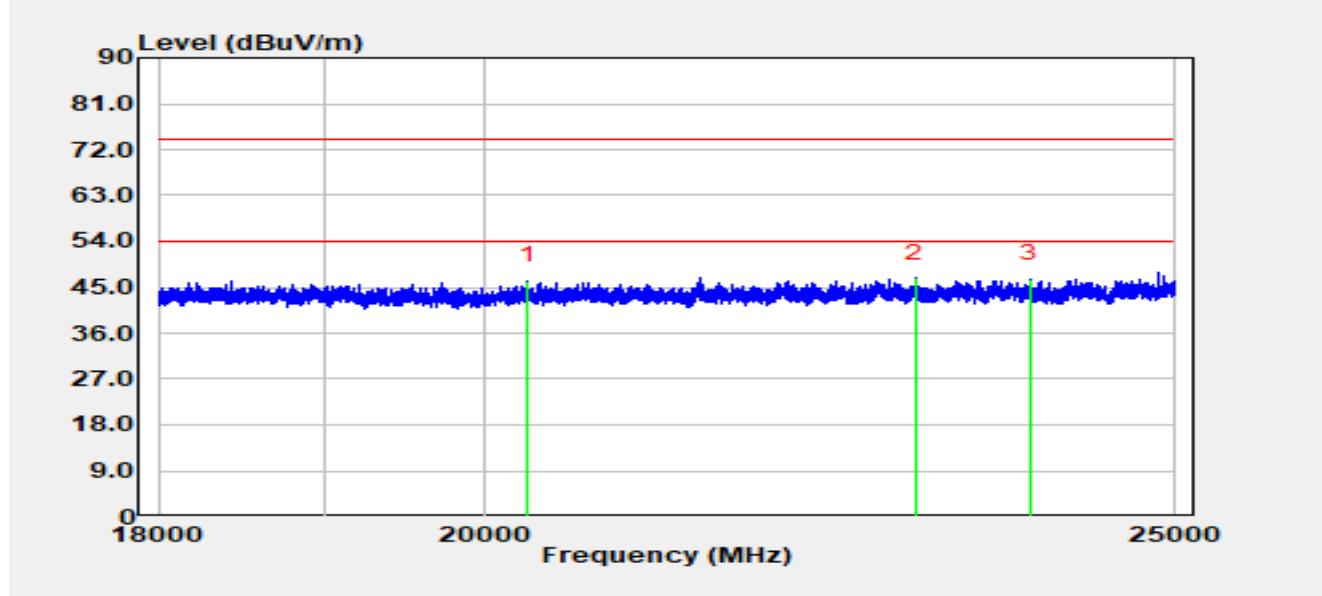


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		20284.10	55.12	-8.82	46.30	-27.70	74.00	Peak
2	*	22990.30	52.70	-5.89	46.80	-27.20	74.00	Peak
3		23855.50	52.31	-5.68	46.63	-27.37	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.7 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2412 MHz		

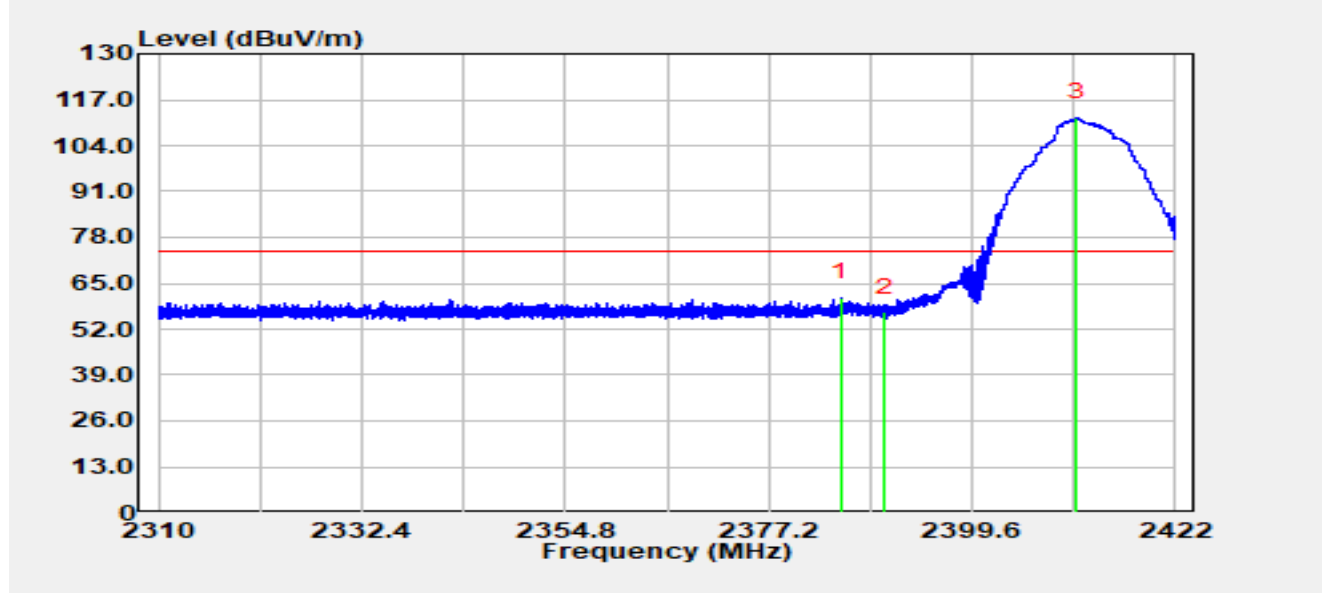


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.09	27.98	33.06	61.04	-12.96	74.00	Peak
2		2390.00	23.76	33.04	56.81	-17.19	74.00	Peak
3		2411.08	79.06	32.96	112.02	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2412 MHz		

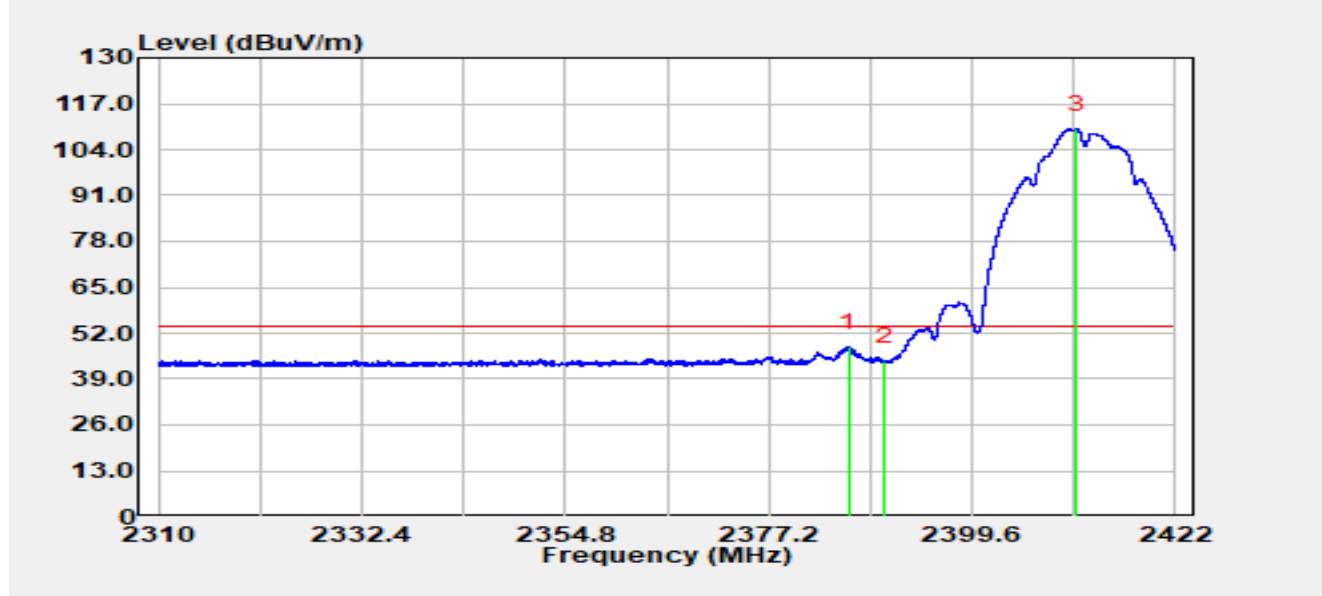


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.06	14.94	33.06	48.00	-6.00	54.00	Average
2		2390.00	11.09	33.04	44.13	-9.87	54.00	Average
3		2411.16	76.83	32.96	109.79	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2412 MHz		

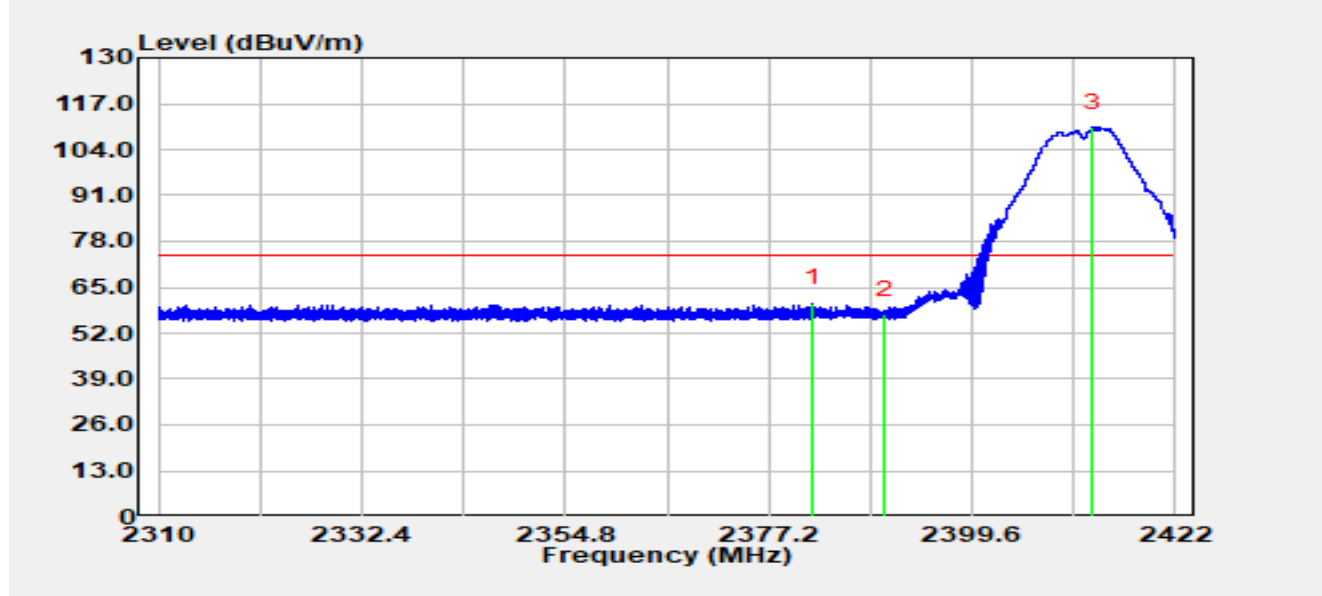


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2382.08	27.51	33.07	60.58	-13.42	74.00	Peak
2		2390.00	24.34	33.04	57.38	-16.62	74.00	Peak
3		2412.87	77.35	32.95	110.30	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2412 MHz		

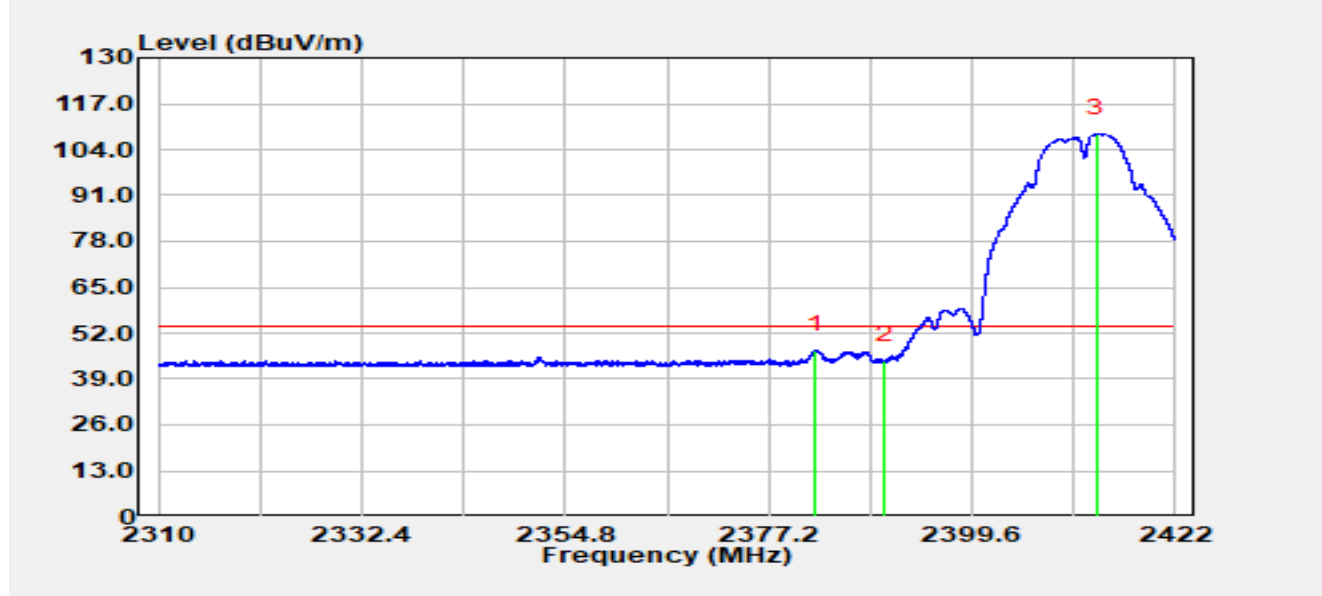


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2382.42	14.25	33.07	47.32	-6.68	54.00	Peak
2		2390.00	11.21	33.04	44.25	-9.75	54.00	Peak
3		2413.25	75.51	32.95	108.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2437 MHz		

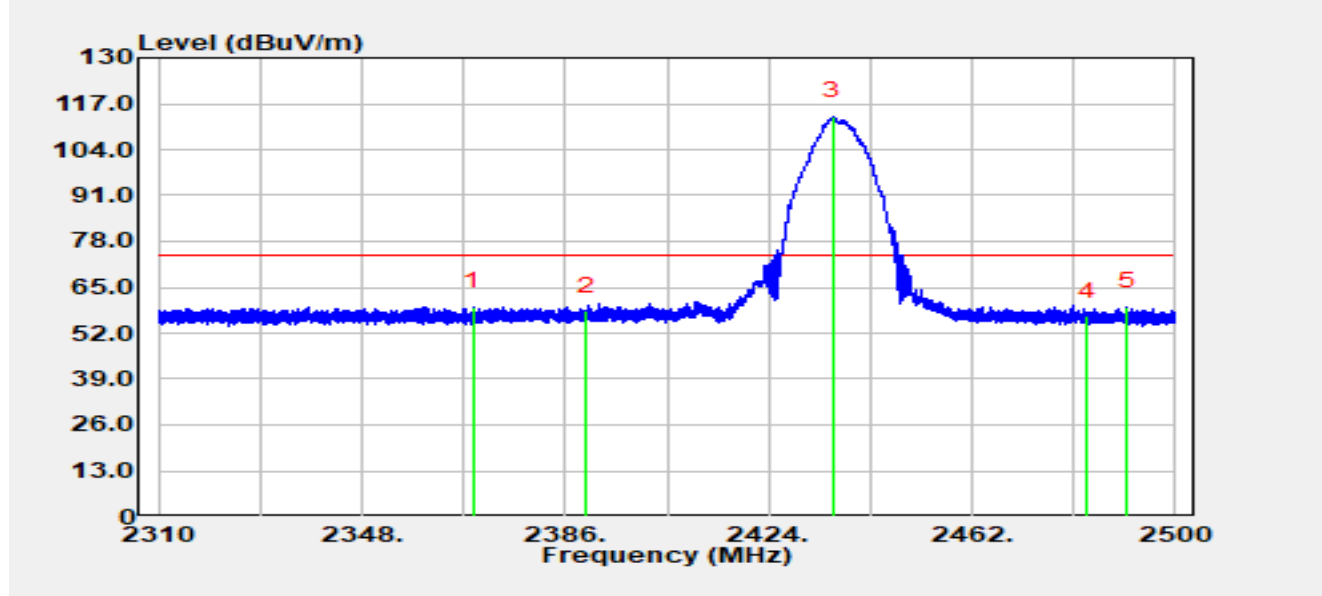


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2368.67	26.41	33.10	59.51	-14.49	74.00	Peak
2		2390.00	25.27	33.04	58.31	-15.69	74.00	Peak
3		2436.08	80.51	32.90	113.41	N/A	N/A	Peak
4		2483.50	24.08	32.77	56.85	-17.15	74.00	Peak
5		2490.96	26.63	32.76	59.39	-14.61	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2437 MHz		

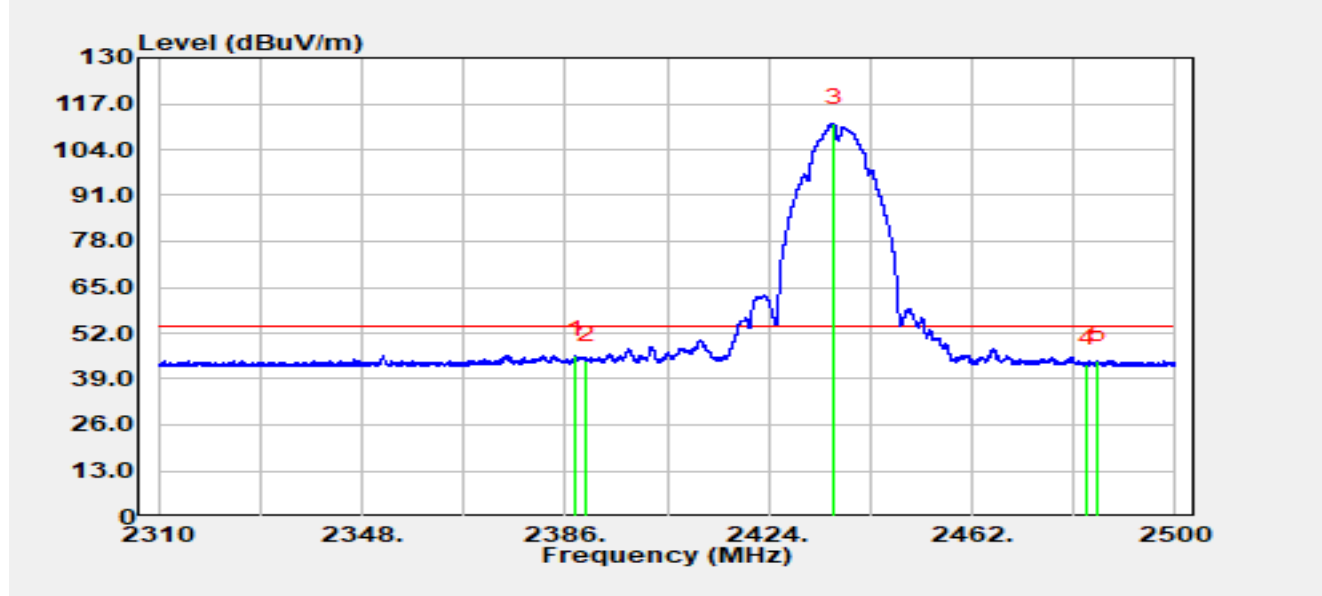


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.90	12.58	33.05	45.63	-8.37	54.00	Average
2		2390.00	11.25	33.04	44.29	-9.71	54.00	Average
3		2436.22	78.56	32.90	111.46	N/A	N/A	Average
4		2483.50	10.43	32.77	43.20	-10.80	54.00	Average
5		2485.39	11.47	32.77	44.24	-9.76	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2437 MHz		

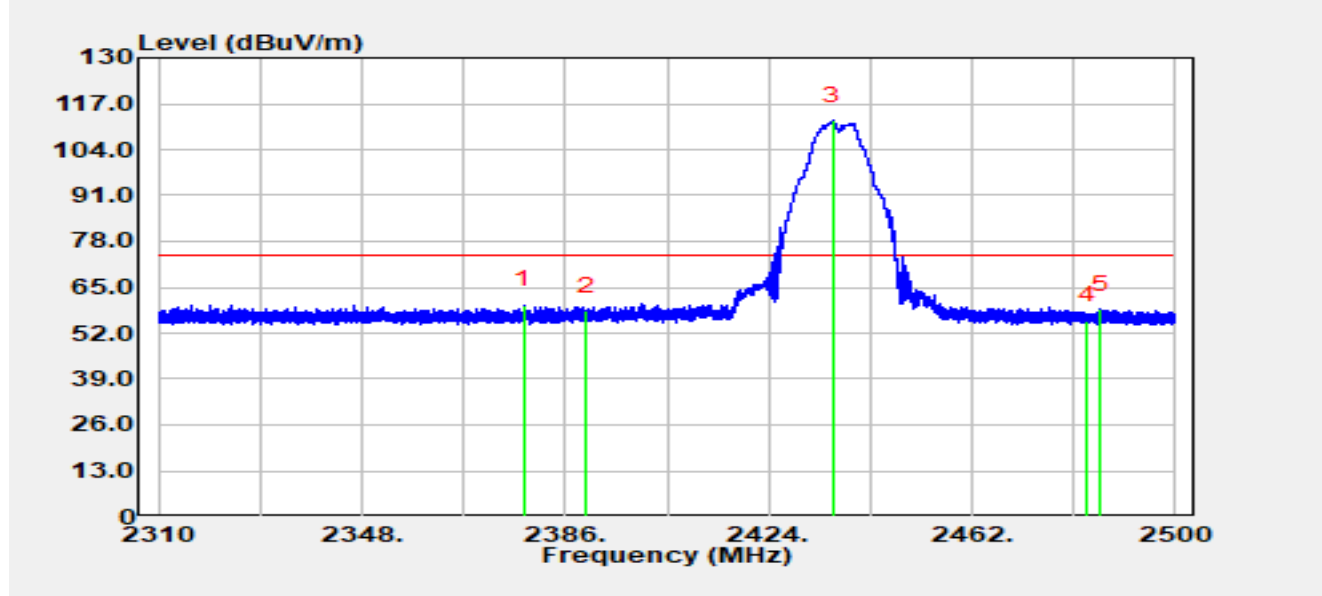


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2378.29	26.81	33.08	59.89	-14.11	74.00	Peak
2		2390.00	25.18	33.04	58.22	-15.78	74.00	Peak
3		2436.08	79.33	32.90	112.23	N/A	N/A	Peak
4		2483.50	22.75	32.77	55.51	-18.49	74.00	Peak
5		2485.98	25.98	32.77	58.75	-15.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2437 MHz		

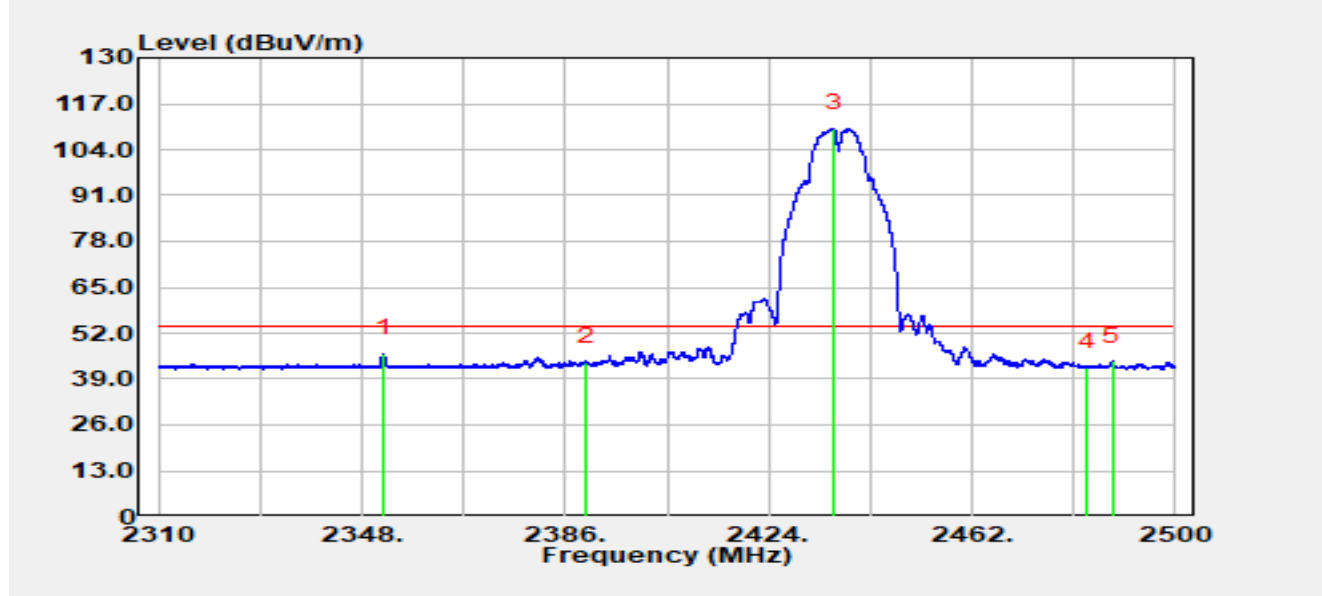


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.07	13.16	33.13	46.29	-7.71	54.00	Average
2		2390.00	10.65	33.04	43.69	-10.31	54.00	Average
3		2436.18	77.11	32.90	110.01	N/A	N/A	Average
4		2483.50	9.65	32.77	42.42	-11.58	54.00	Average
5		2488.20	11.18	32.76	43.94	-10.06	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2462 MHz		

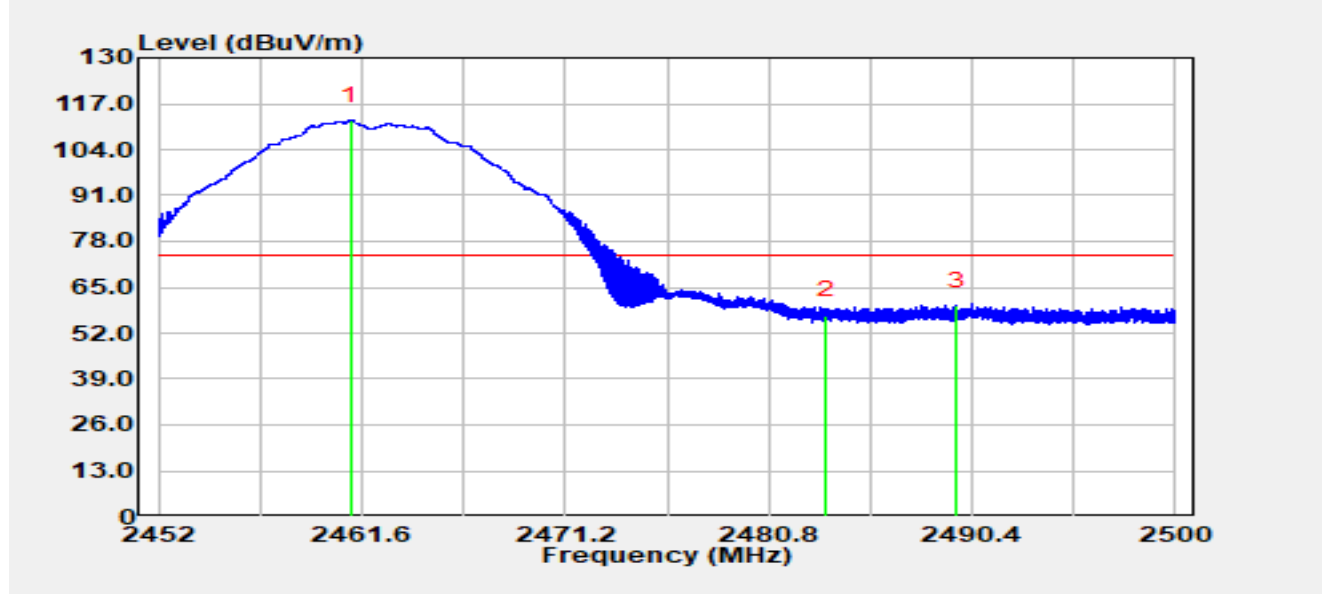


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.08	79.37	32.83	112.20	N/A	N/A	Peak
2		2483.50	24.31	32.77	57.08	-16.92	74.00	Peak
3	*	2489.65	27.08	32.76	59.84	-14.16	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2462 MHz		

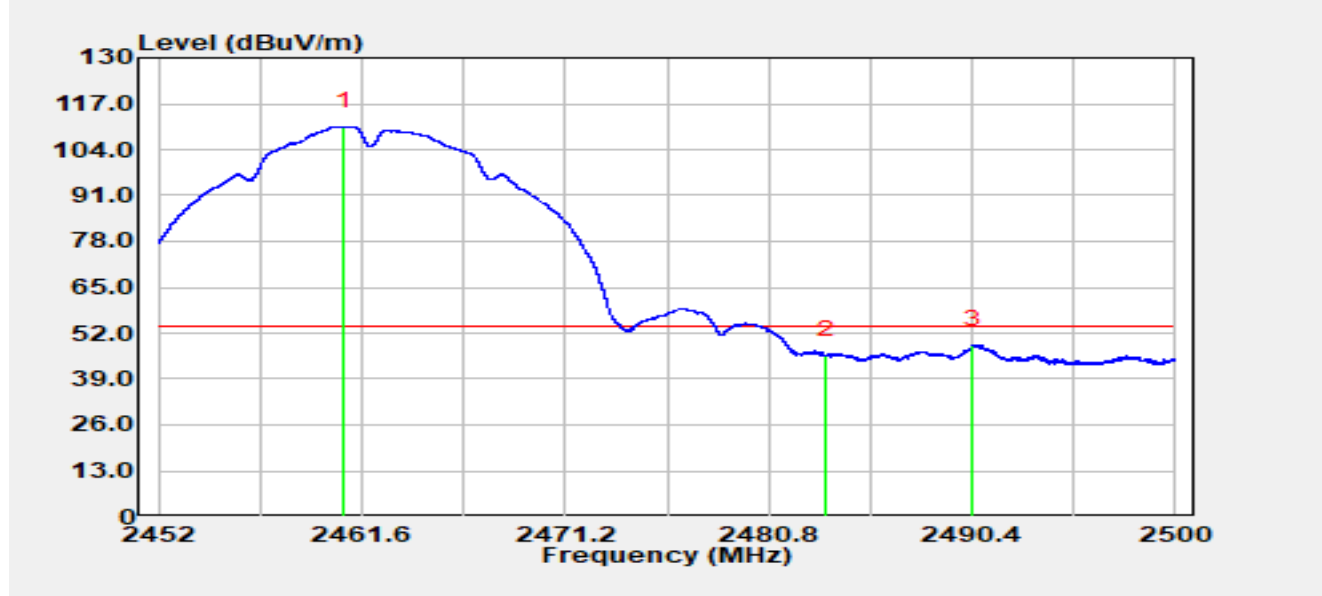


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.73	77.66	32.83	110.49	N/A	N/A	Average
2		2483.50	13.06	32.77	45.82	-8.18	54.00	Average
3	*	2490.44	15.83	32.76	48.59	-5.41	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2462 MHz		

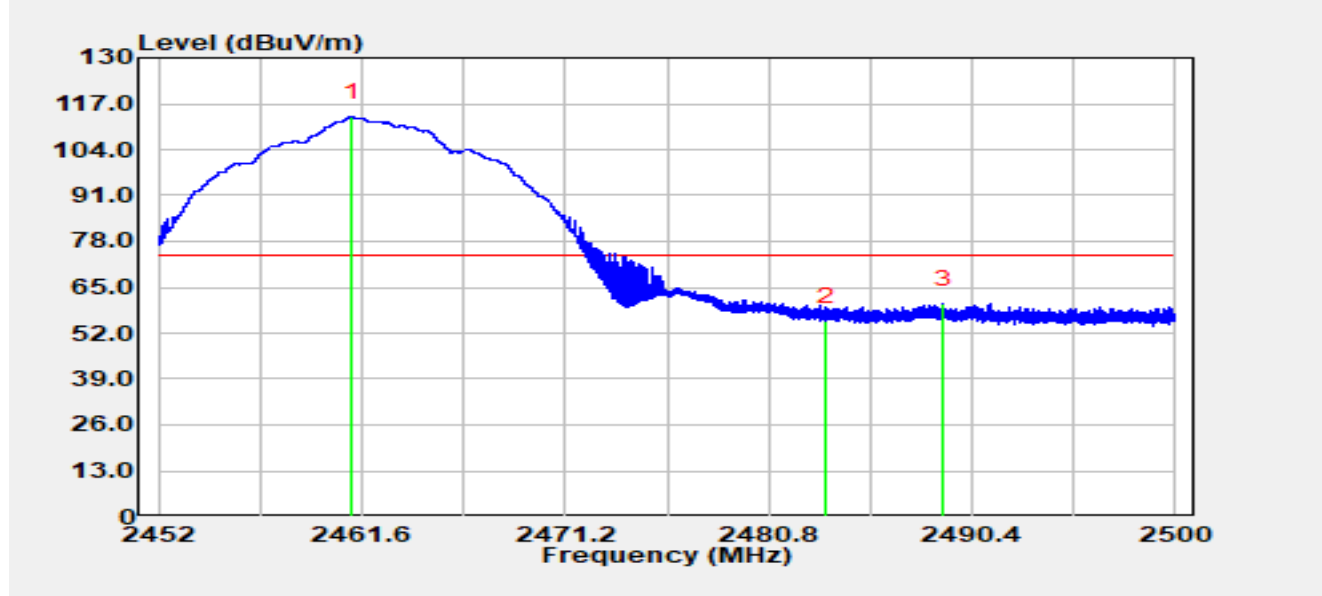


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.13	80.45	32.83	113.28	N/A	N/A	Peak
2		2483.50	22.56	32.77	55.33	-18.67	74.00	Peak
3	*	2489.07	27.55	32.76	60.31	-13.69	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2462 MHz		

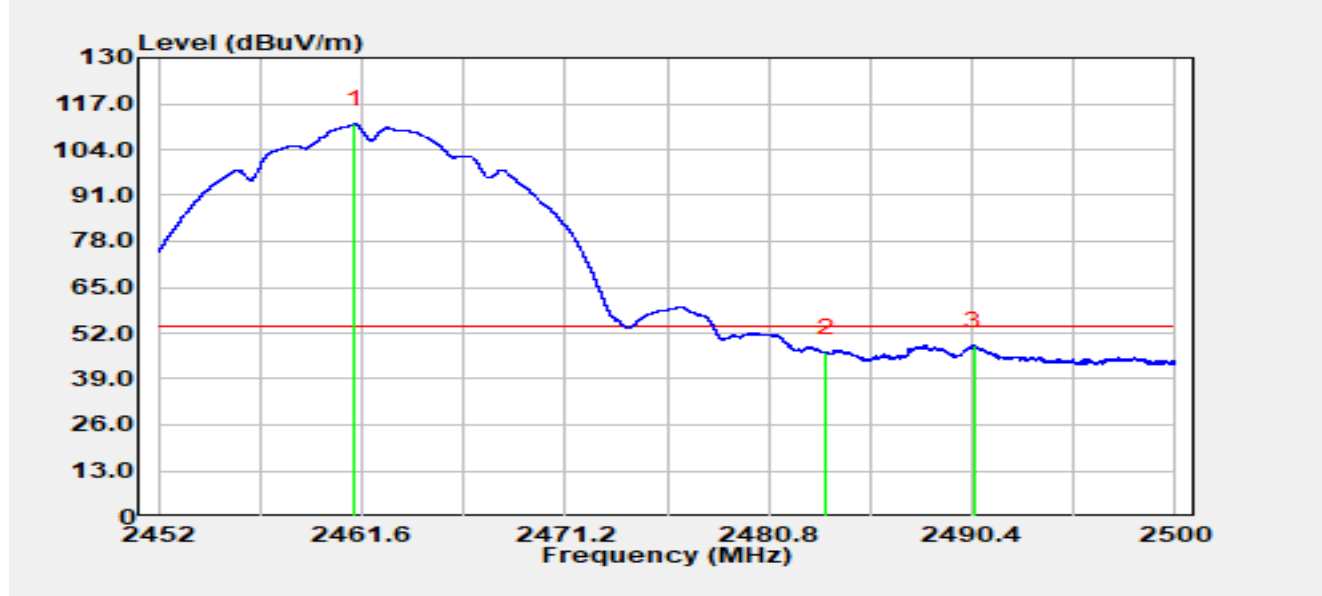


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.25	78.36	32.83	111.19	N/A	N/A	Average
2		2483.50	13.67	32.77	46.44	-7.56	54.00	Average
3	*	2490.46	15.68	32.76	48.44	-5.56	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2412 MHz		

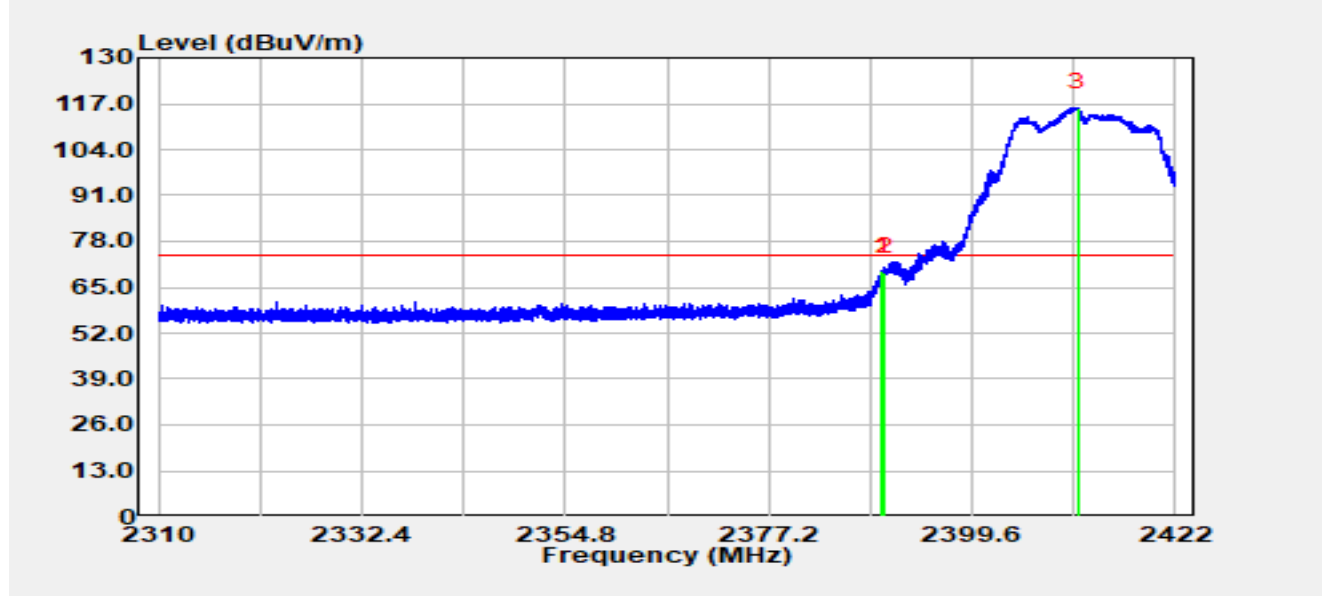


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.64	36.49	33.04	69.53	-4.47	74.00	Peak
2		2390.00	36.20	33.04	69.24	-4.76	74.00	Peak
3		2411.19	82.91	32.96	115.86	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2412 MHz		

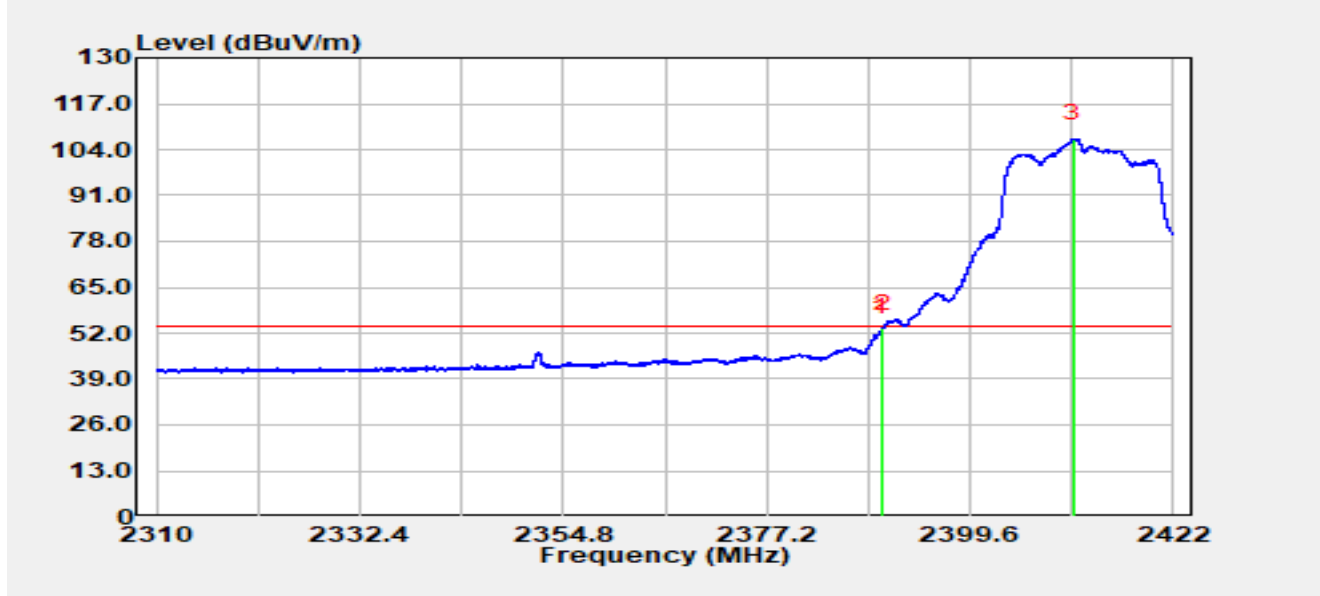


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.80	19.44	33.04	52.48	-1.52	54.00	Average
2	*	2390.00	20.19	33.04	53.23	-0.77	54.00	Average
3		2410.93	74.06	32.96	107.02	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2412 MHz		

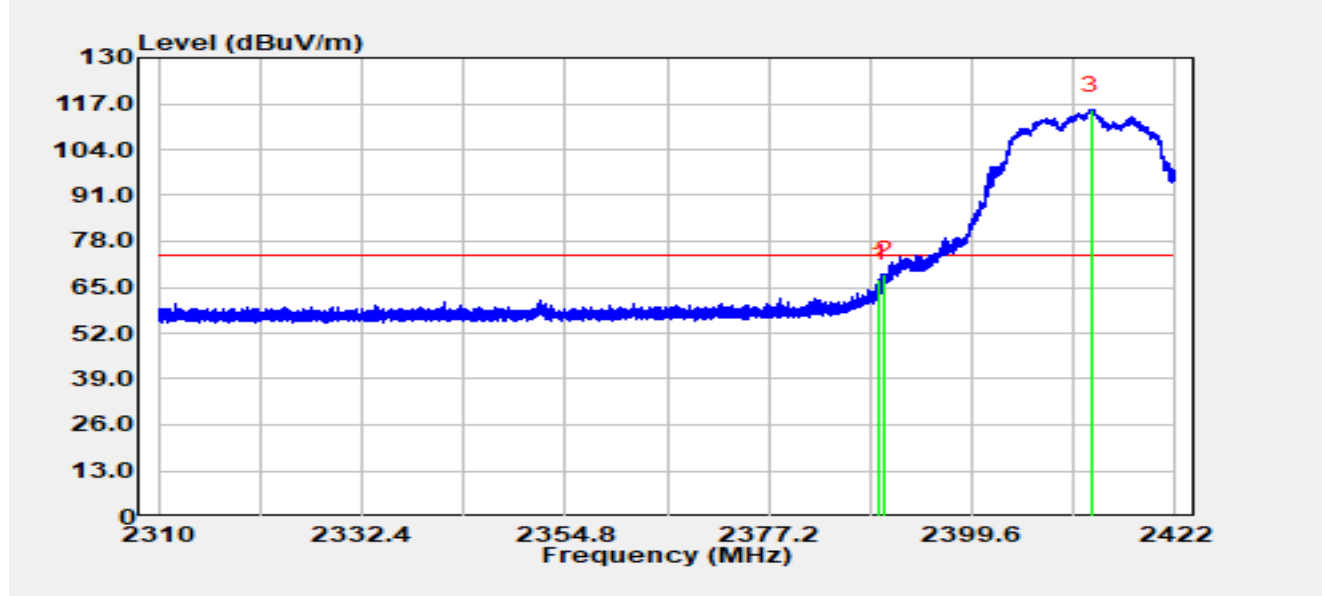


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.39	34.31	33.04	67.35	-6.65	74.00	Peak
2	*	2390.00	35.52	33.04	68.56	-5.44	74.00	Peak
3		2412.68	82.33	32.95	115.28	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2412 MHz		

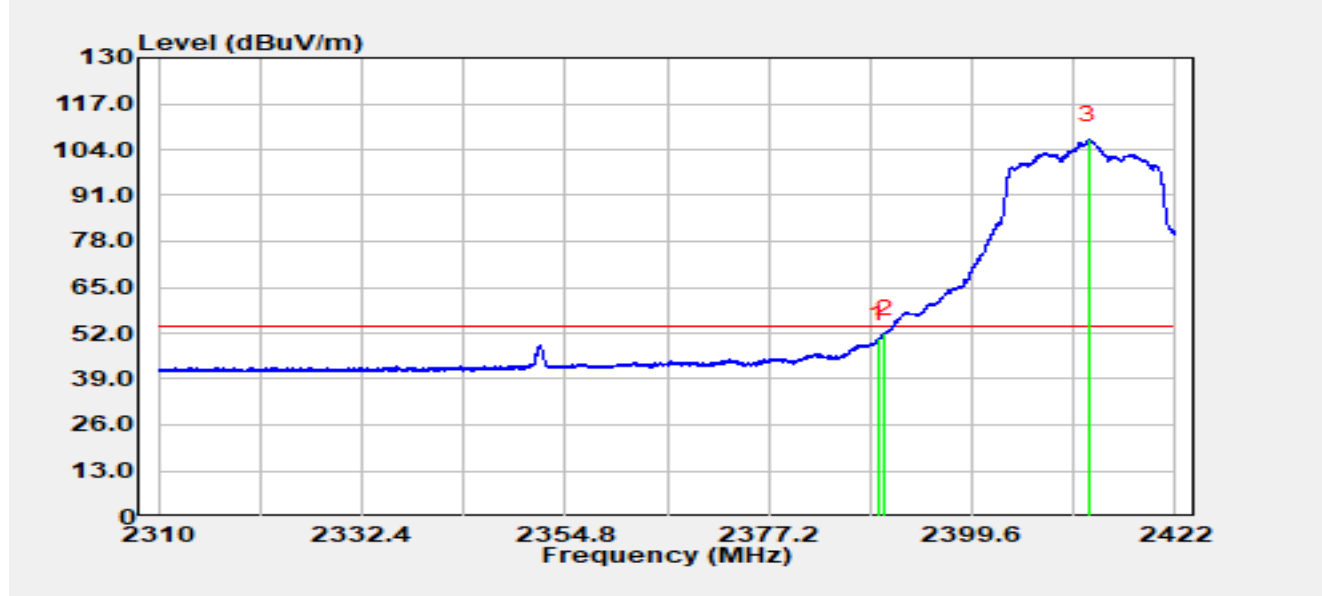


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.31	17.38	33.04	50.42	-3.58	54.00	Average
2	*	2390.00	18.83	33.04	51.87	-2.13	54.00	Average
3		2412.42	73.83	32.95	106.78	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2437 MHz		

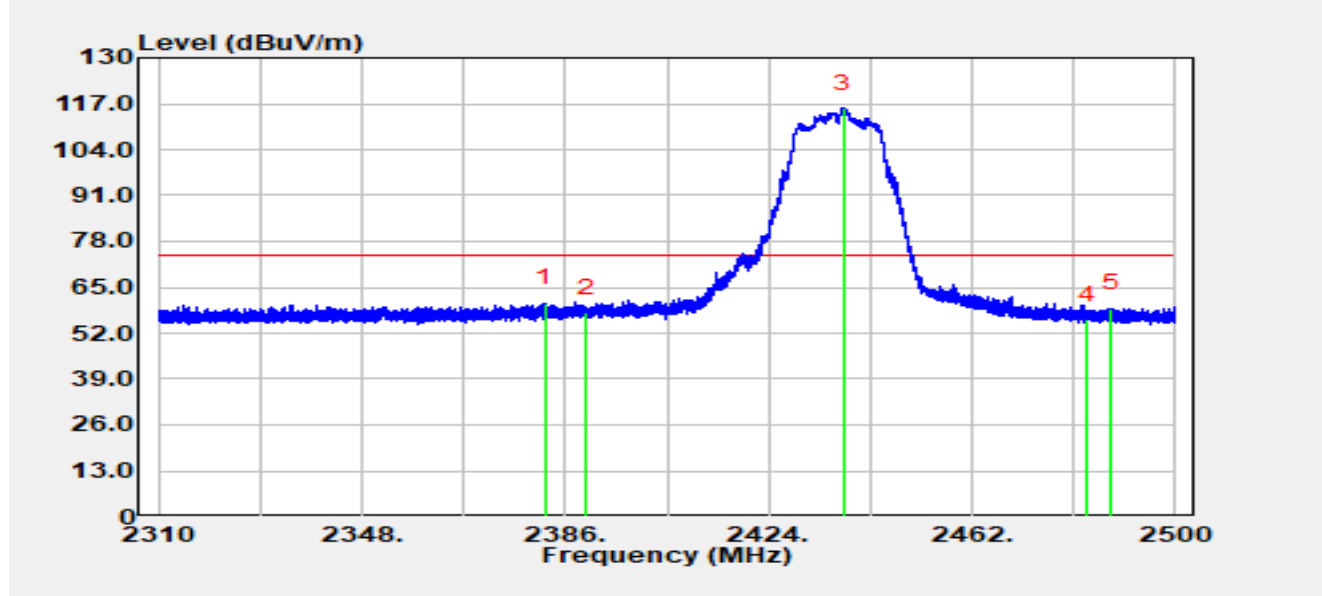


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2382.24	27.44	33.07	60.51	-13.49	74.00	Peak
2		2390.00	24.79	33.04	57.83	-16.17	74.00	Peak
3		2437.98	82.71	32.90	115.60	N/A	N/A	Peak
4		2483.50	22.93	32.77	55.70	-18.30	74.00	Peak
5		2487.94	26.34	32.76	59.11	-14.89	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2437 MHz		

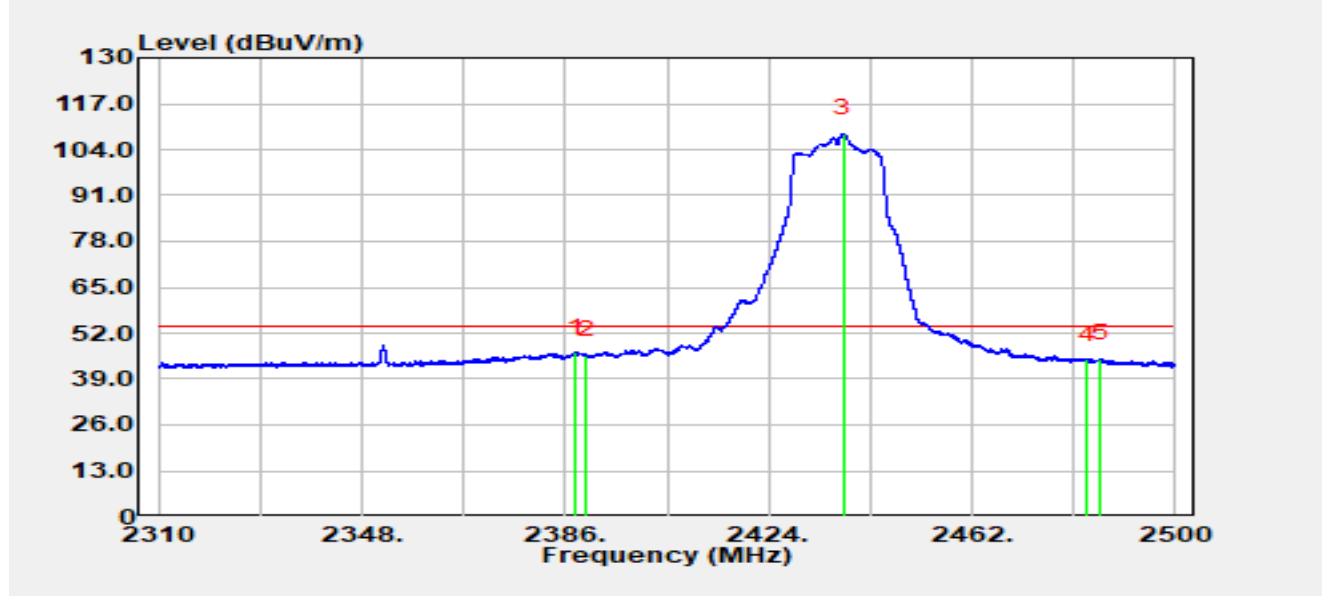


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.07	13.54	33.05	46.59	-7.41	54.00	Average
2		2390.00	12.62	33.04	45.66	-8.34	54.00	Average
3		2437.89	75.67	32.90	108.56	N/A	N/A	Average
4		2483.50	11.64	32.77	44.41	-9.59	54.00	Average
5		2485.94	11.94	32.77	44.71	-9.29	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2437 MHz		

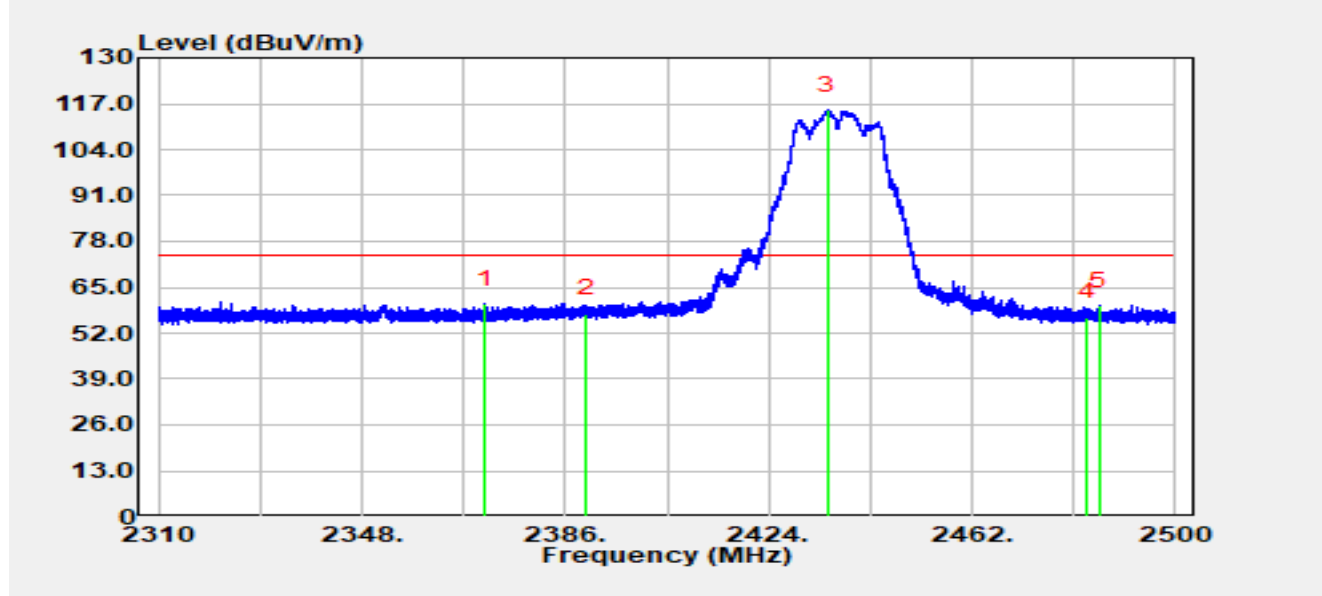


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2371.07	27.22	33.10	60.32	-13.68	74.00	Peak
2		2390.00	24.50	33.04	57.54	-16.46	74.00	Peak
3		2435.10	82.31	32.90	115.21	N/A	N/A	Peak
4		2483.50	23.81	32.77	56.58	-17.42	74.00	Peak
5		2485.81	27.04	32.77	59.80	-14.20	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2437 MHz		

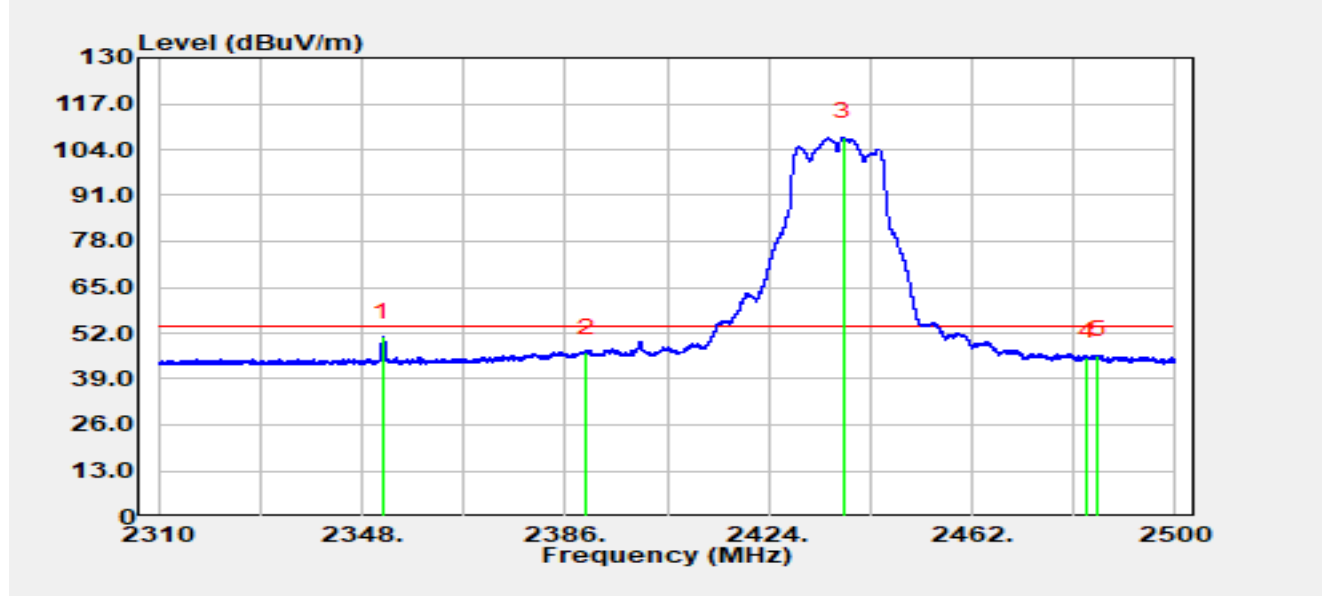


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.99	17.76	33.13	50.89	-3.11	54.00	Average
2		2390.00	13.44	33.04	46.48	-7.52	54.00	Average
3		2437.97	74.57	32.90	107.47	N/A	N/A	Average
4		2483.50	12.41	32.77	45.18	-8.82	54.00	Average
5		2485.52	12.89	32.77	45.66	-8.34	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2462 MHz		

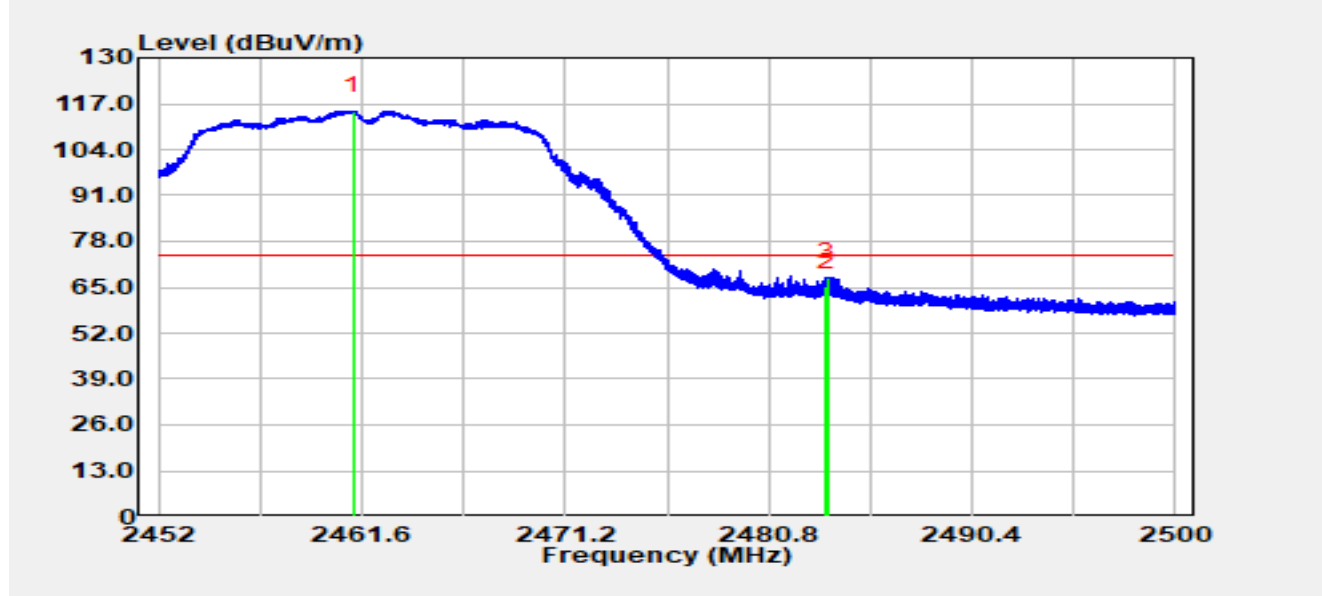


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.17	82.20	32.83	115.03	N/A	N/A	Peak
2		2483.50	32.40	32.77	65.17	-8.83	74.00	Peak
3	*	2483.59	34.97	32.77	67.73	-6.27	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2462 MHz		

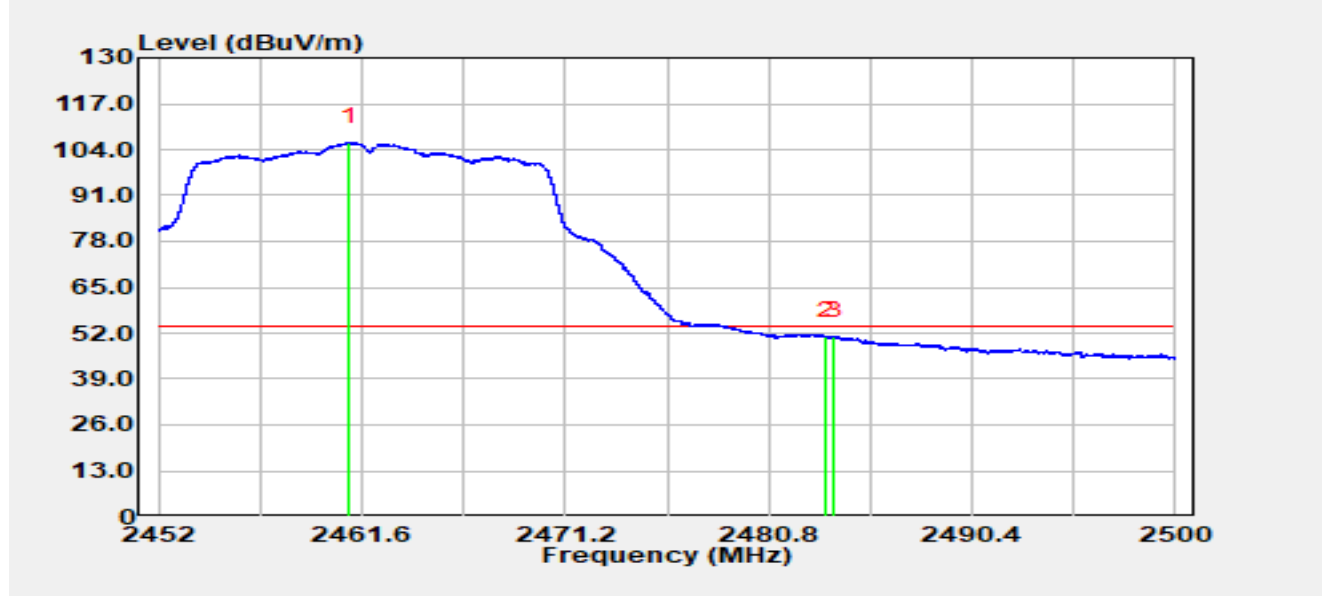


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.99	73.17	32.83	106.00	N/A	N/A	Average
2		2483.50	18.30	32.77	51.07	-2.93	54.00	Average
3	*	2483.90	18.31	32.77	51.08	-2.92	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2462 MHz		

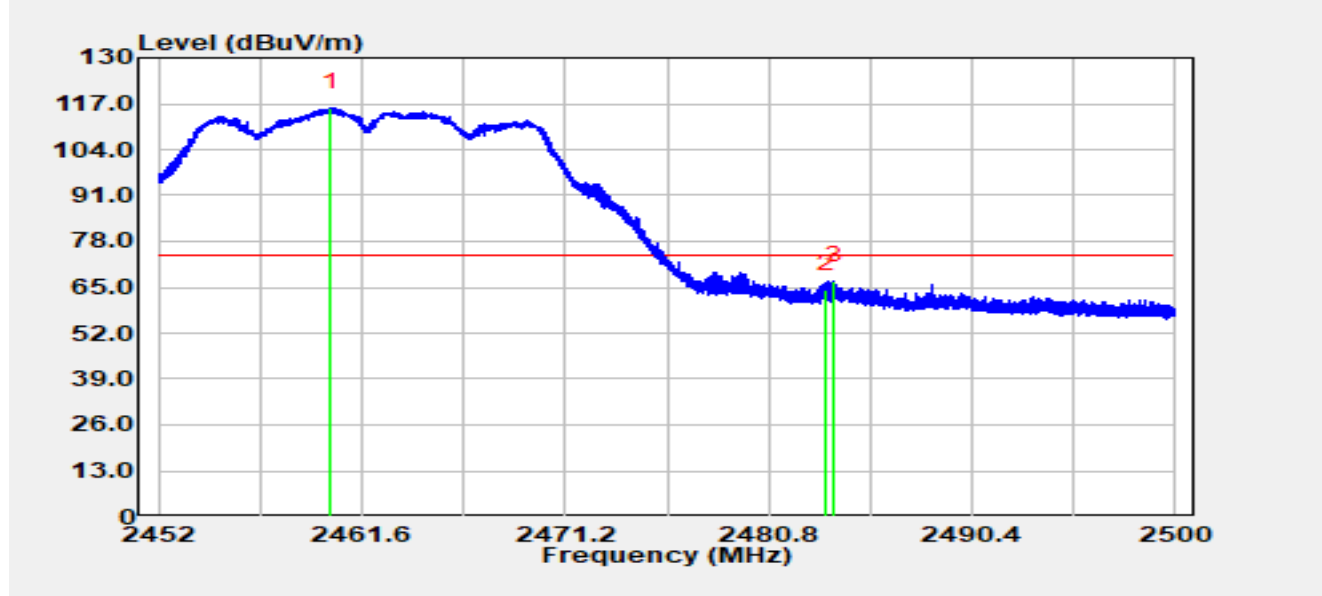


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.15	83.05	32.83	115.88	N/A	N/A	Peak
2		2483.50	31.71	32.77	64.48	-9.52	74.00	Peak
3	*	2483.92	33.95	32.77	66.72	-7.28	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2462 MHz		

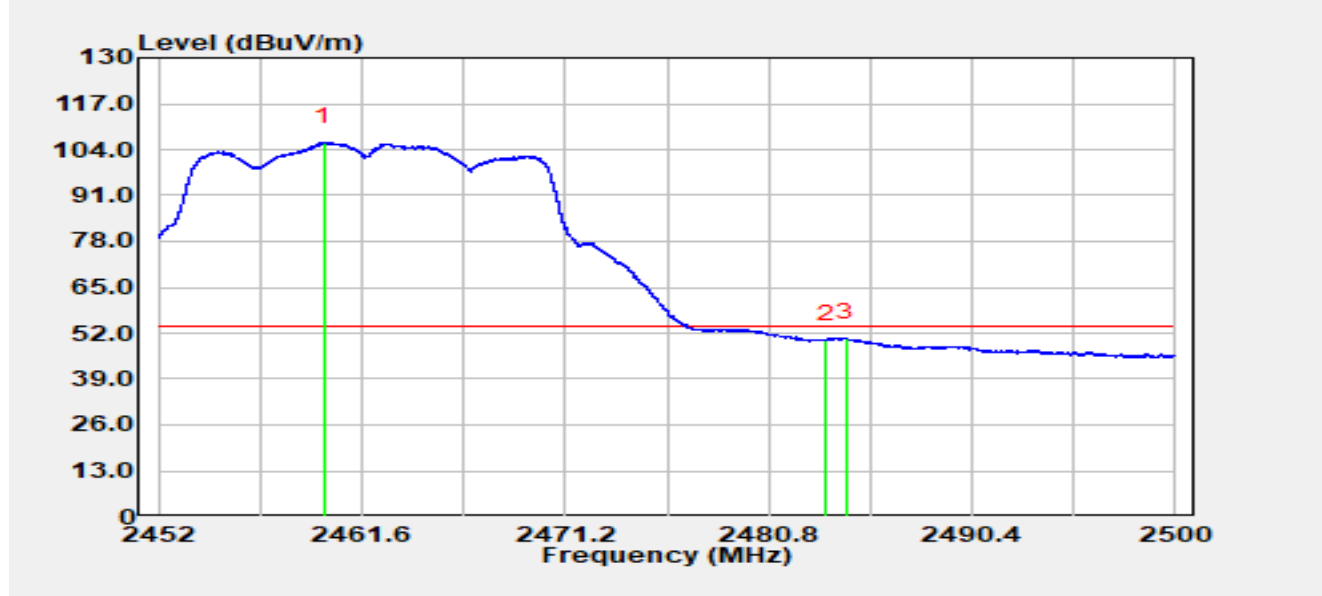


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2459.80	73.26	32.83	106.09	N/A	N/A	Average
2		2483.50	17.37	32.77	50.14	-3.86	54.00	Average
3	*	2484.45	17.98	32.77	50.74	-3.26	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

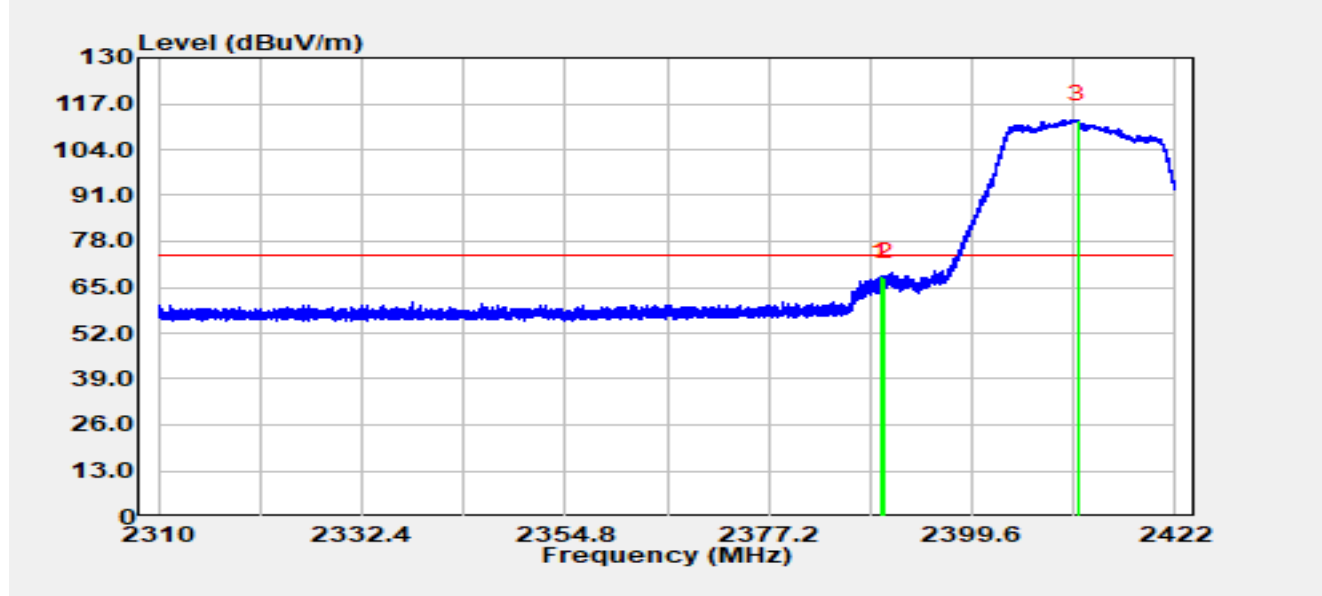


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.50	35.03	33.04	68.07	-5.93	74.00	Peak
2		2390.00	34.67	33.04	67.71	-6.29	74.00	Peak
3		2411.26	79.55	32.95	112.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

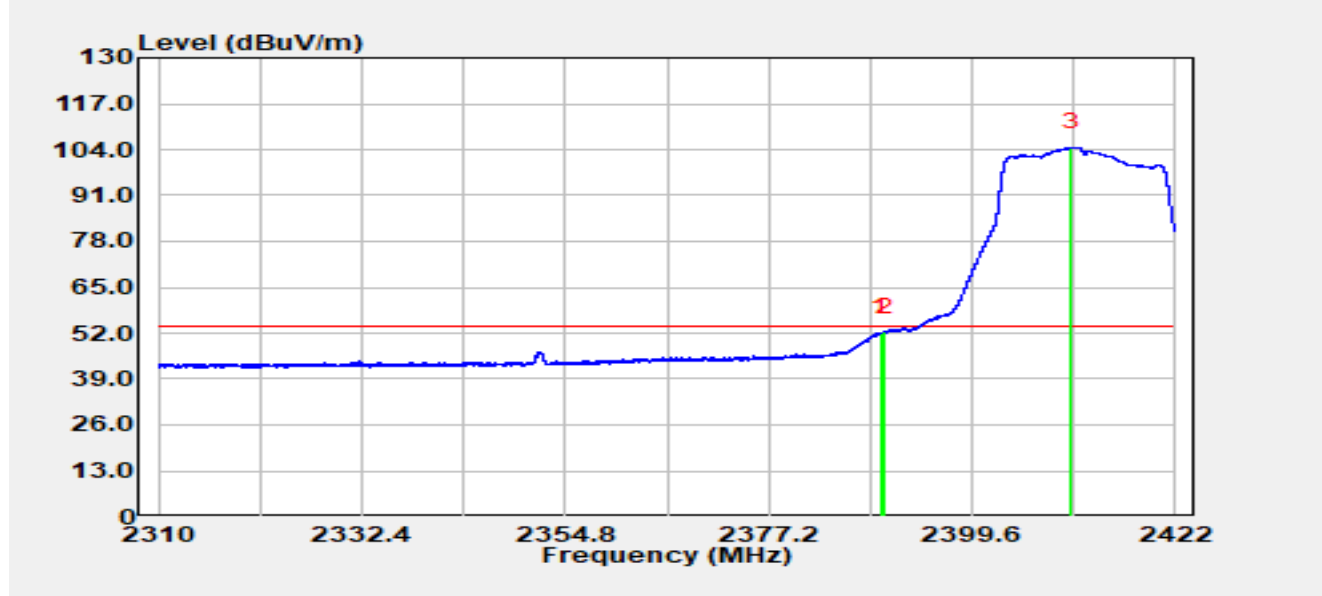


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.58	19.15	33.04	52.19	-1.81	54.00	Average
2	*	2390.00	19.21	33.04	52.25	-1.75	54.00	Average
3		2410.58	71.75	32.96	104.71	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

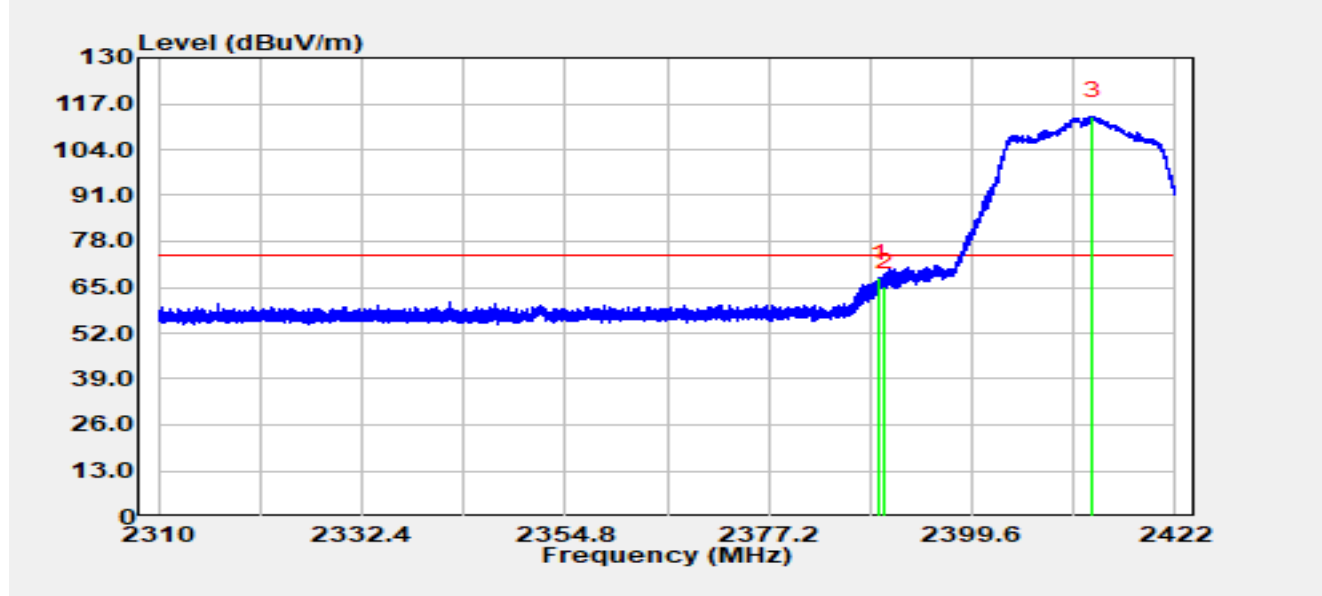


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.41	34.46	33.04	67.50	-6.50	74.00	Peak
2		2390.00	32.10	33.04	65.14	-8.86	74.00	Peak
3		2412.85	80.43	32.95	113.38	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

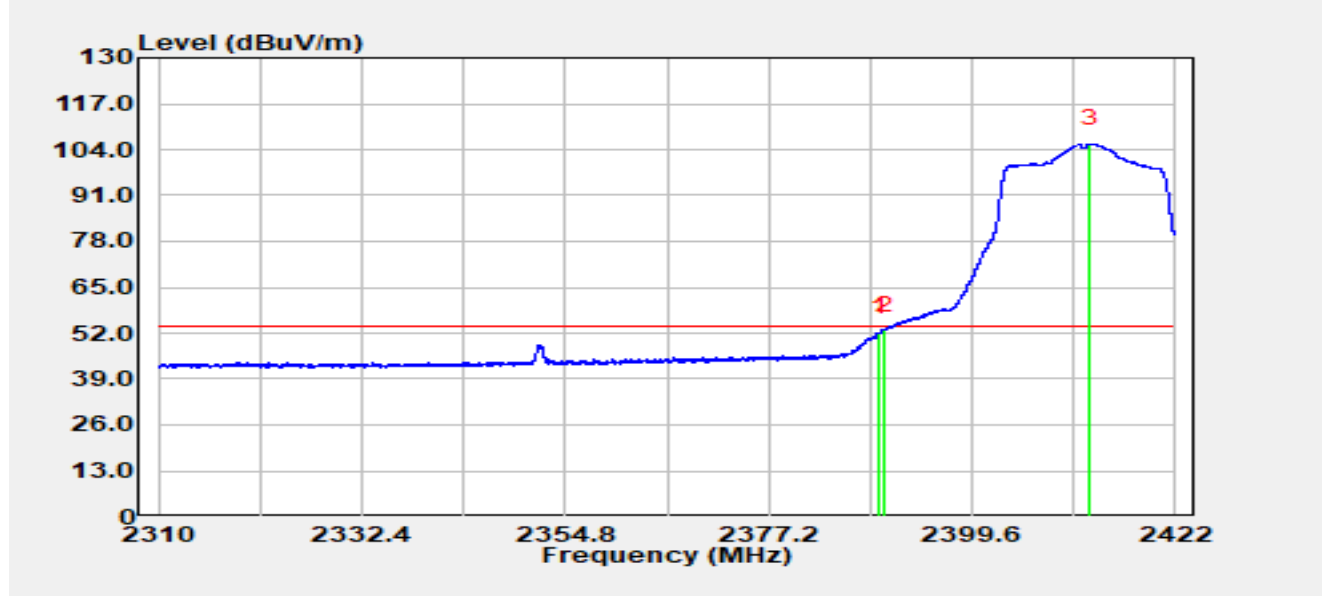


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.39	18.97	33.04	52.02	-1.98	54.00	Average
2	*	2390.00	19.91	33.04	52.95	-1.05	54.00	Average
3		2412.58	72.75	32.95	105.70	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

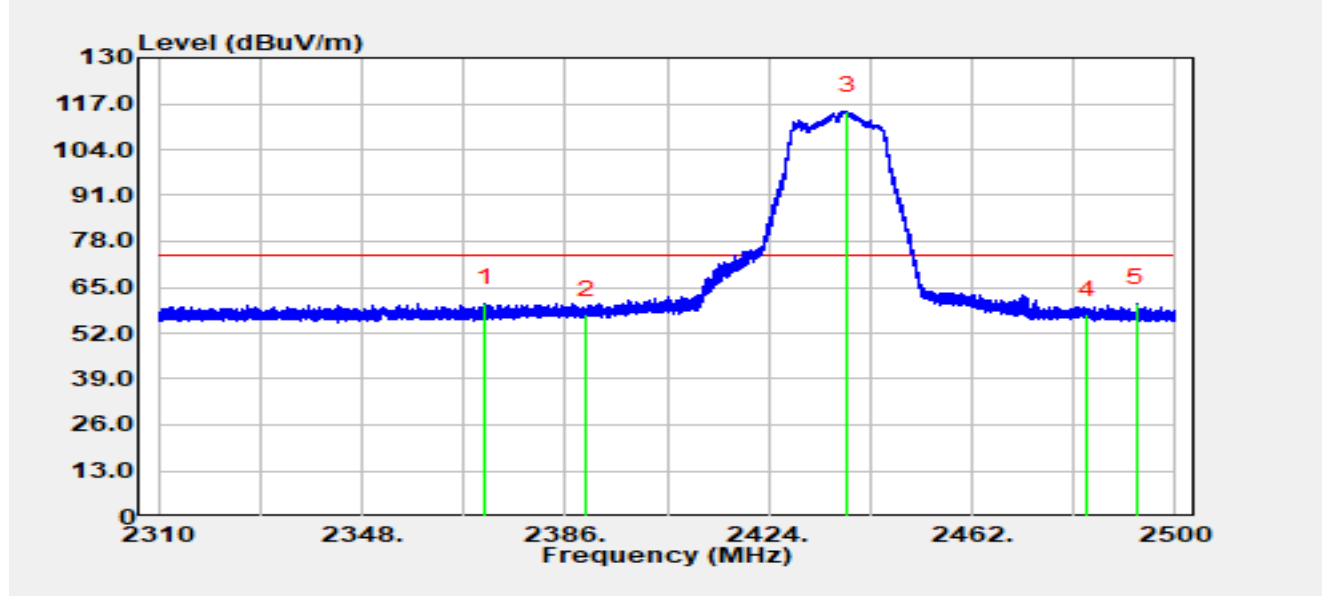


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2371.10	27.41	33.10	60.50	-13.50	74.00	Peak
2		2390.00	24.24	33.04	57.28	-16.72	74.00	Peak
3		2438.61	82.02	32.90	114.92	N/A	N/A	Peak
4		2483.50	24.41	32.77	57.18	-16.82	74.00	Peak
5		2492.78	27.64	32.76	60.40	-13.60	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

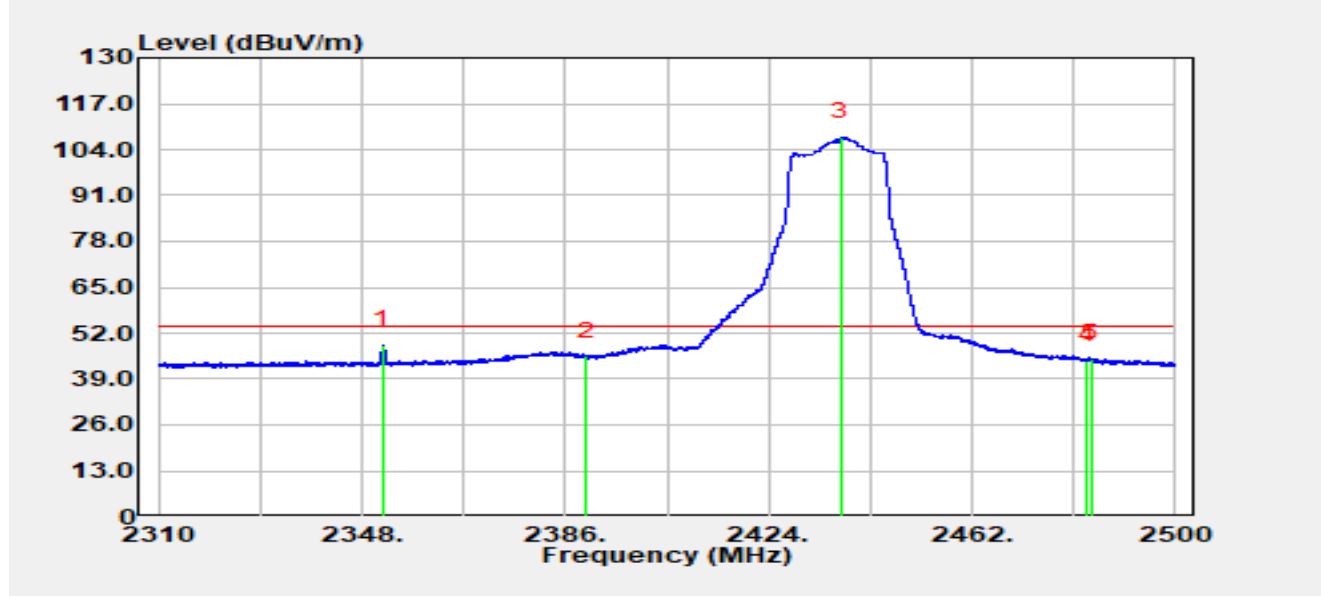


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.93	15.60	33.13	48.73	-5.27	54.00	Average
2		2390.00	12.53	33.04	45.57	-8.43	54.00	Average
3		2437.59	74.60	32.90	107.50	N/A	N/A	Average
4		2483.50	11.55	32.77	44.32	-9.68	54.00	Average
5		2484.34	11.89	32.77	44.65	-9.35	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

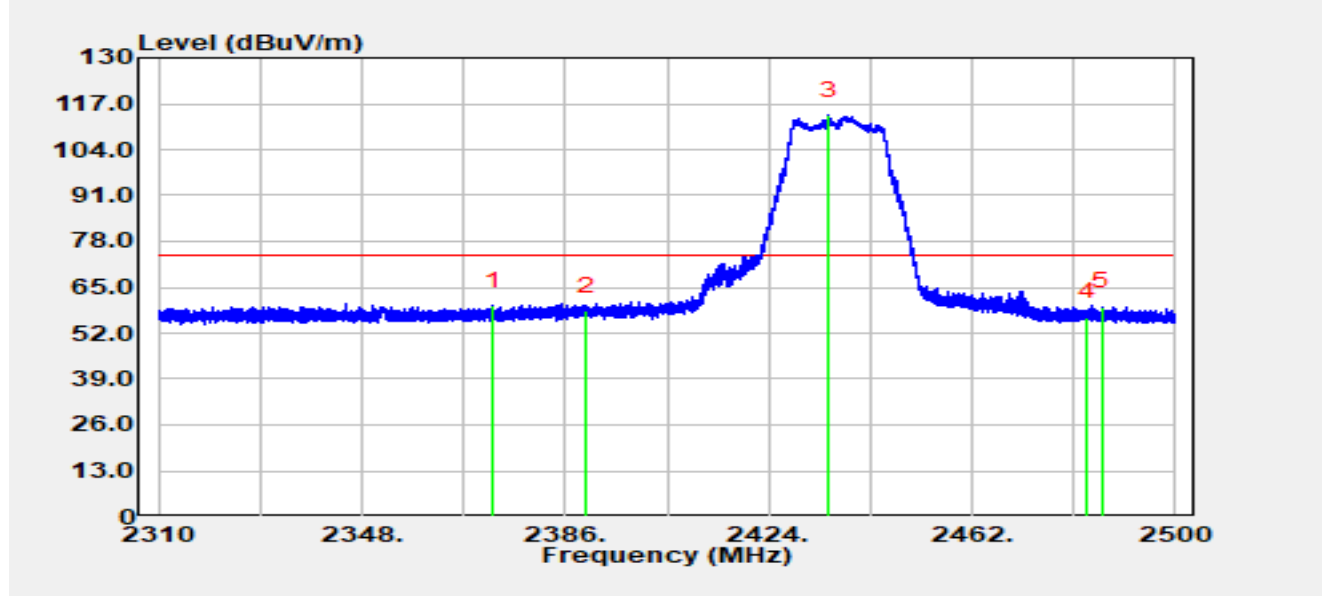


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.51	26.58	33.09	59.68	-14.32	74.00	Peak
2		2390.00	25.20	33.04	58.24	-15.76	74.00	Peak
3		2435.13	80.68	32.90	113.58	N/A	N/A	Peak
4		2483.50	23.87	32.77	56.64	-17.36	74.00	Peak
5		2486.32	26.76	32.76	59.52	-14.48	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

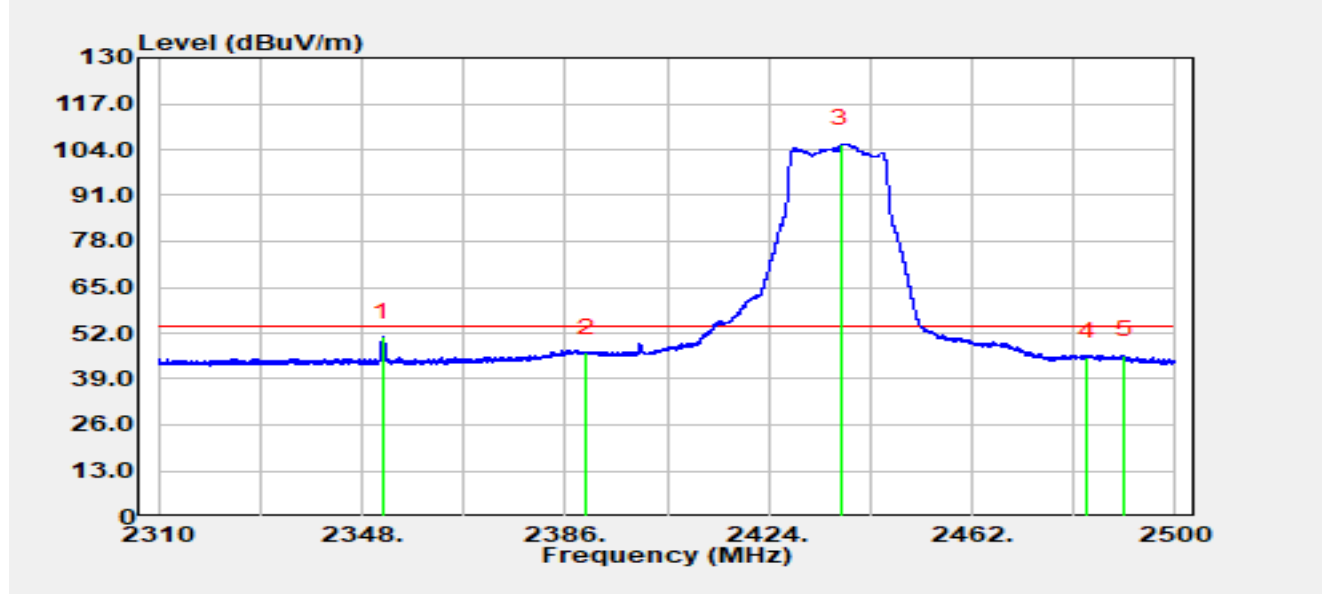


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.97	17.65	33.13	50.78	-3.22	54.00	Average
2		2390.00	13.44	33.04	46.48	-7.52	54.00	Average
3		2437.53	72.68	32.90	105.57	N/A	N/A	Average
4		2483.50	12.42	32.77	45.19	-8.81	54.00	Average
5		2490.37	13.02	32.76	45.78	-8.22	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

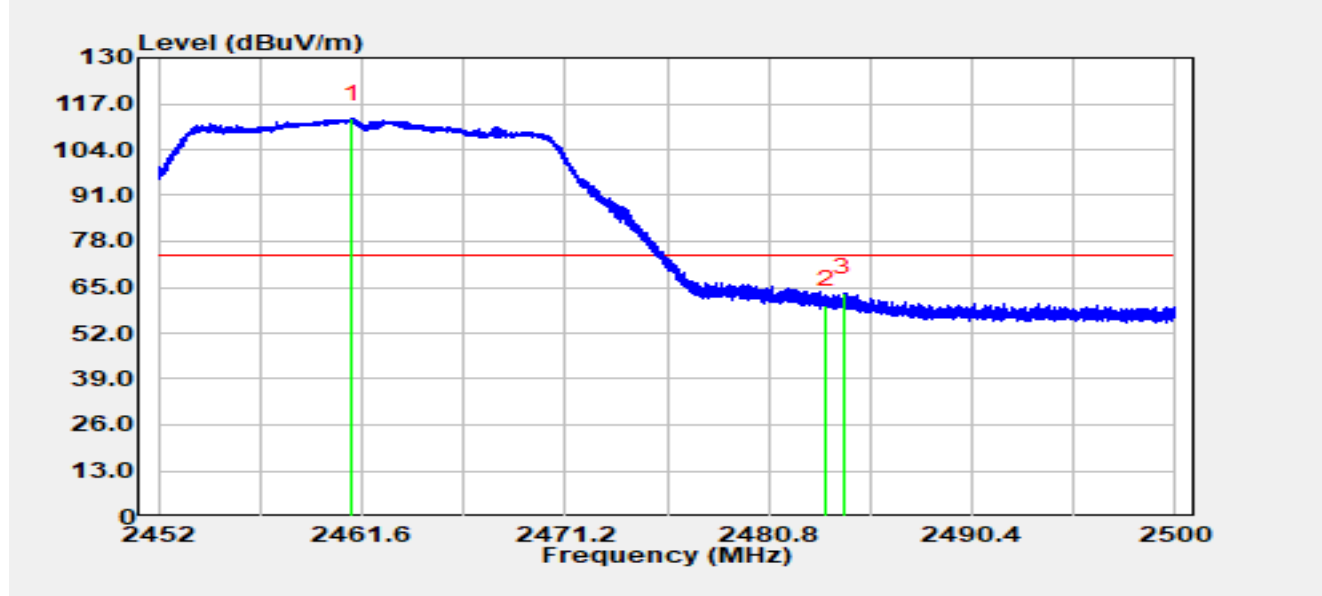


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.15	79.89	32.83	112.72	N/A	N/A	Peak
2		2483.50	27.24	32.77	60.01	-13.99	74.00	Peak
3	*	2484.35	30.53	32.77	63.30	-10.70	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

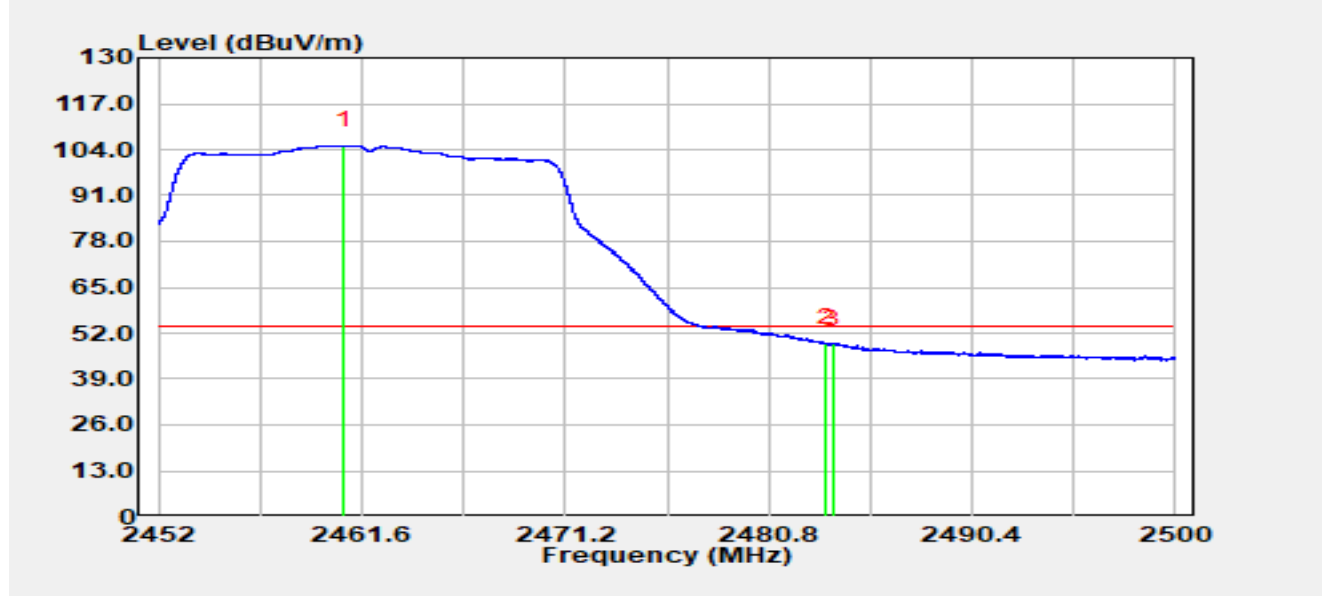


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.74	72.39	32.83	105.23	N/A	N/A	Average
2	*	2483.50	16.37	32.77	49.14	-4.86	54.00	Average
3		2483.82	16.17	32.77	48.93	-5.07	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

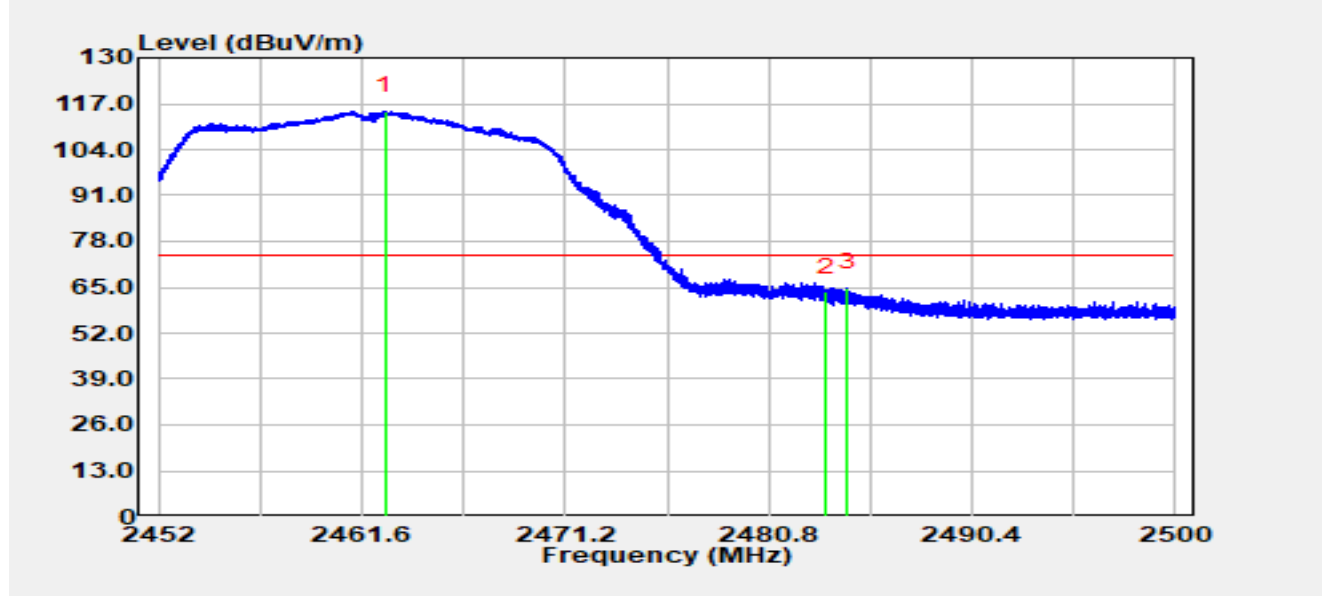


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.73	81.98	32.82	114.81	N/A	N/A	Peak
2		2483.50	30.95	32.77	63.72	-10.28	74.00	Peak
3	*	2484.54	32.16	32.77	64.92	-9.08	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

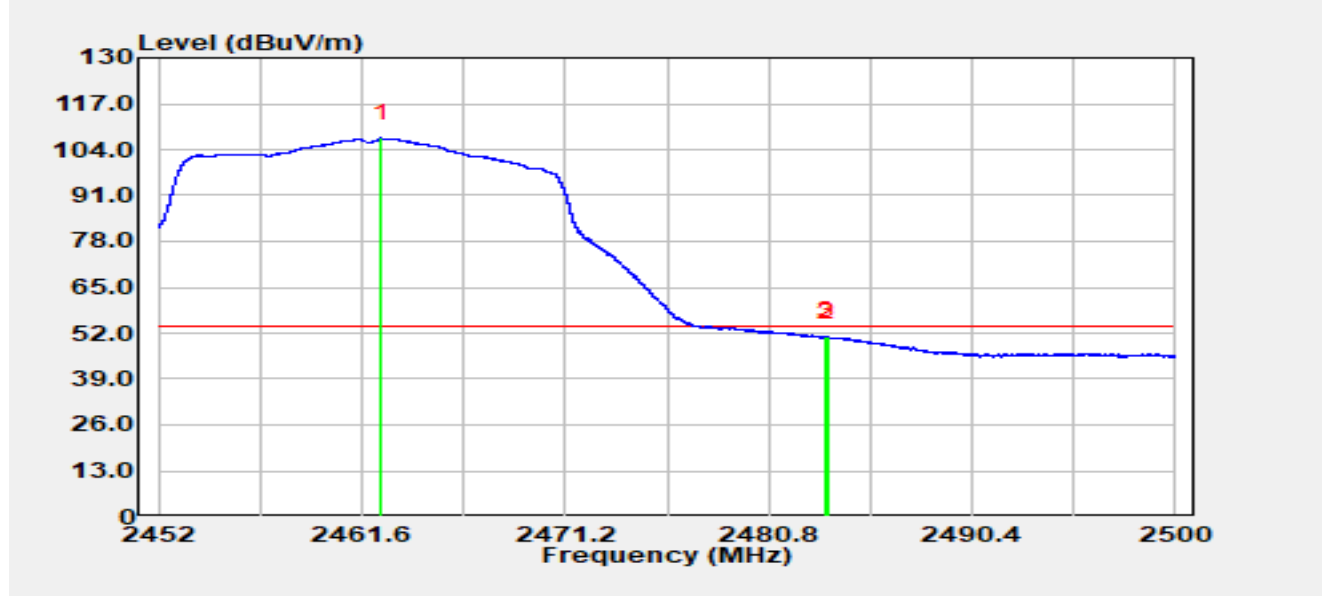


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.54	74.40	32.82	107.23	N/A	N/A	Average
2		2483.50	18.01	32.77	50.78	-3.22	54.00	Average
3	*	2483.56	18.29	32.77	51.06	-2.94	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

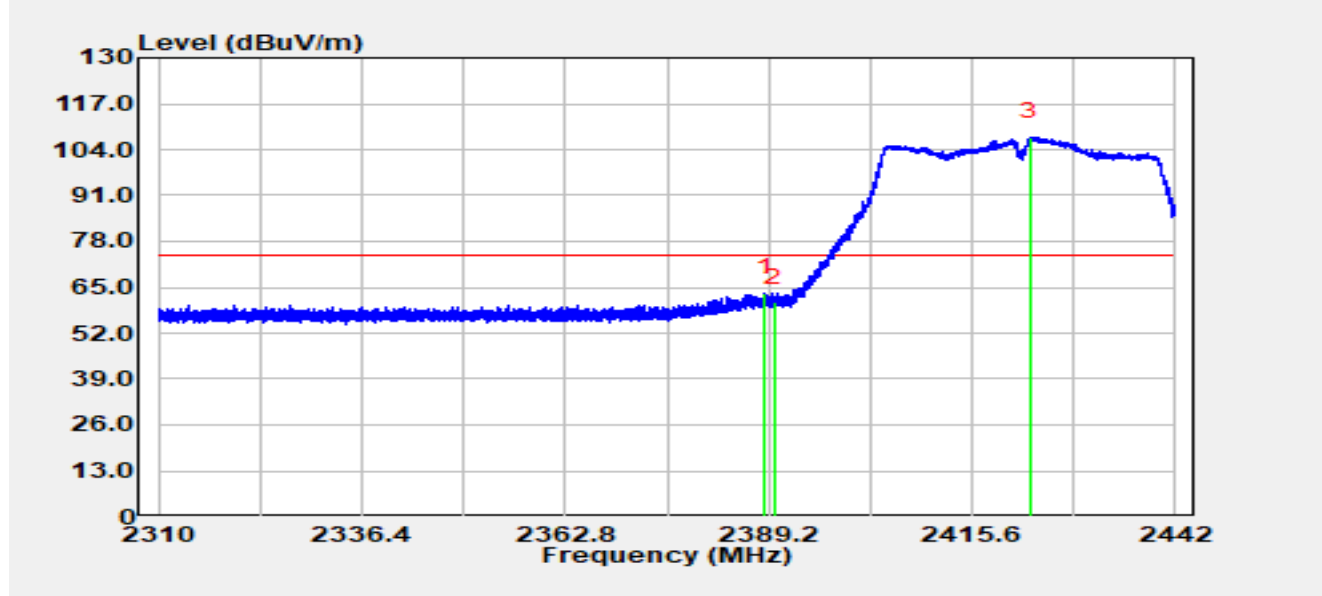


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.76	30.38	33.05	63.43	-10.57	74.00	Peak
2		2390.00	27.58	33.04	60.62	-13.38	74.00	Peak
3		2423.08	74.60	32.92	107.51	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

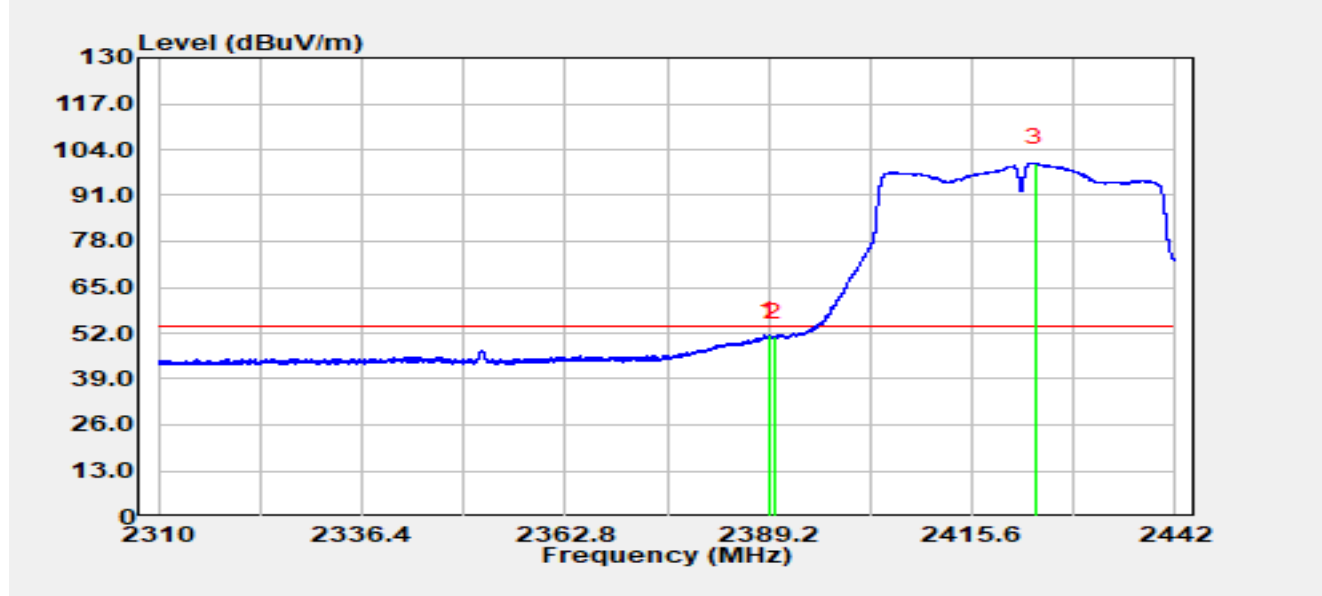


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.19	18.32	33.04	51.37	-2.63	54.00	Average
2		2390.00	17.96	33.04	51.00	-3.00	54.00	Average
3		2423.77	67.28	32.92	100.19	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

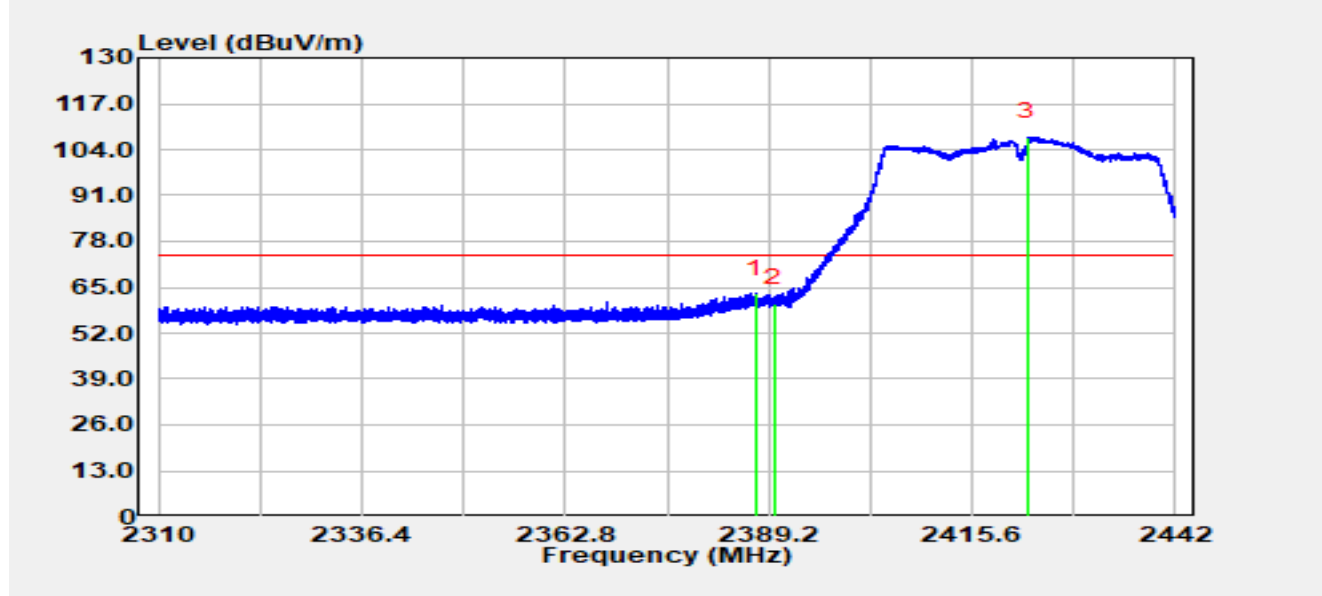


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.52	30.02	33.05	63.07	-10.93	74.00	Peak
2		2390.00	27.49	33.04	60.53	-13.47	74.00	Peak
3		2422.77	74.53	32.92	107.44	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

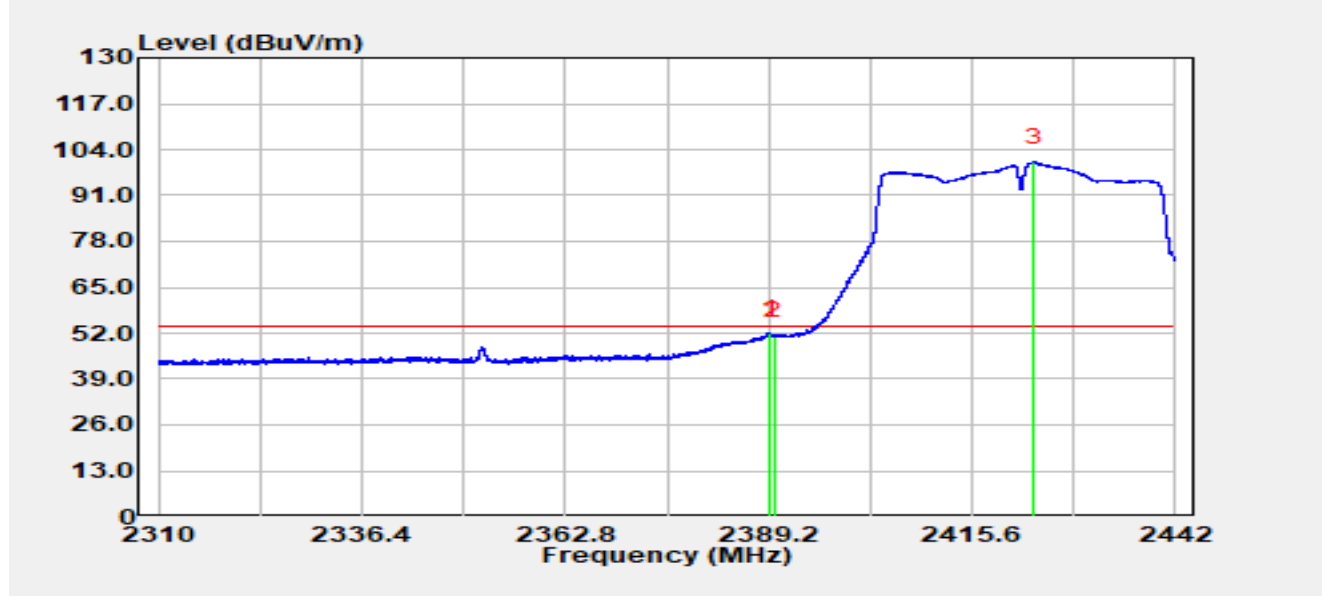


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.35	18.92	33.04	51.97	-2.03	54.00	Average
2		2390.00	18.13	33.04	51.17	-2.83	54.00	Average
3		2423.60	67.51	32.92	100.43	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2427 MHz		

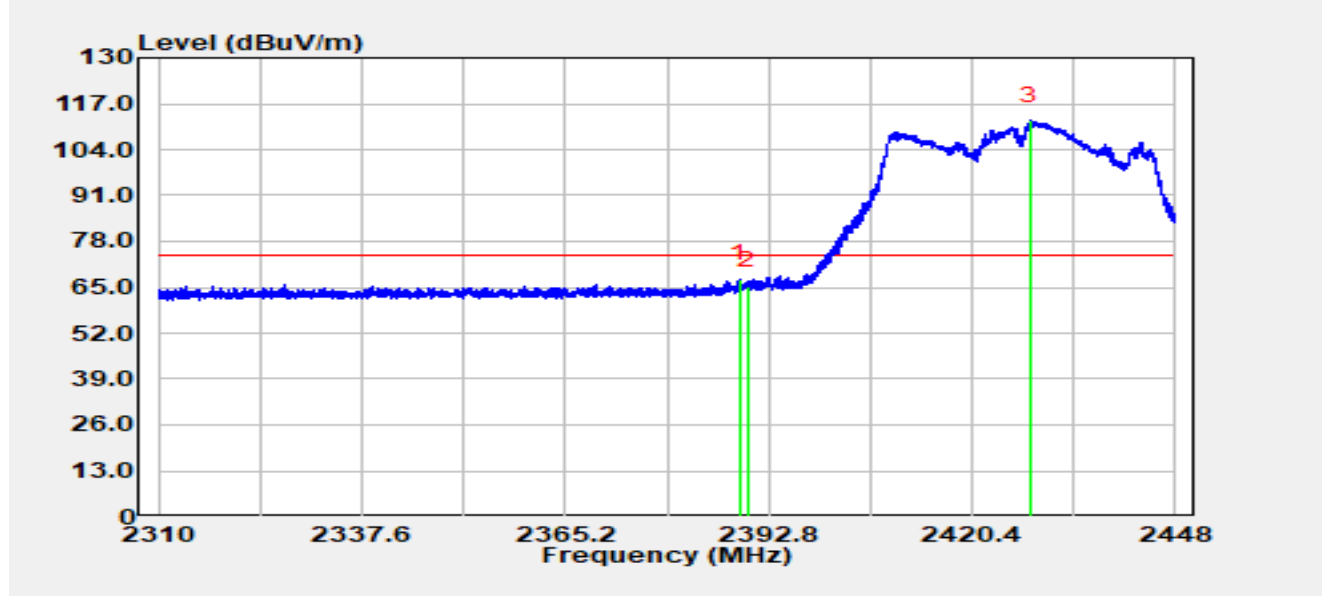


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.81	34.36	33.05	67.41	-6.59	74.00	Peak
2		2390.00	32.34	33.04	65.38	-8.62	74.00	Peak
3		2428.32	79.26	32.91	112.17	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2427 MHz		

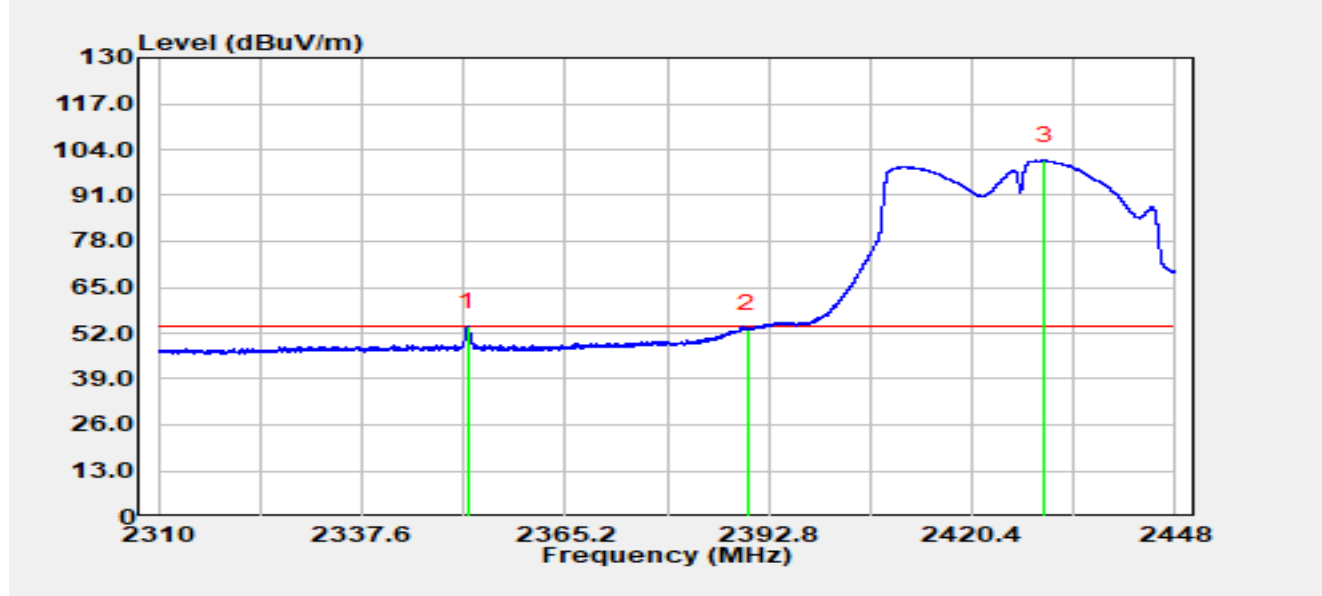


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.91	20.71	33.13	53.84	-0.16	54.00	Average
2		2390.00	20.18	33.04	53.22	-0.78	54.00	Average
3		2430.21	67.99	32.91	100.90	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2432 MHz		

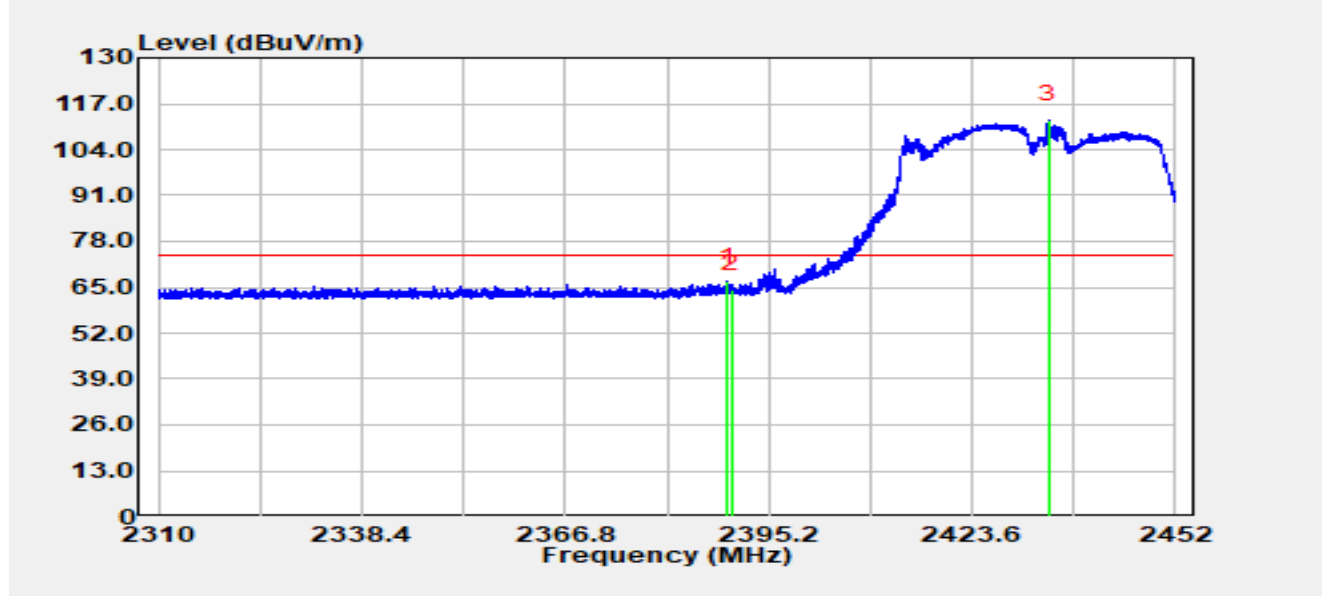


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.44	33.56	33.04	66.60	-7.40	74.00	Peak
2		2390.00	31.43	33.04	64.47	-9.53	74.00	Peak
3		2434.32	79.53	32.90	112.44	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2432 MHz		

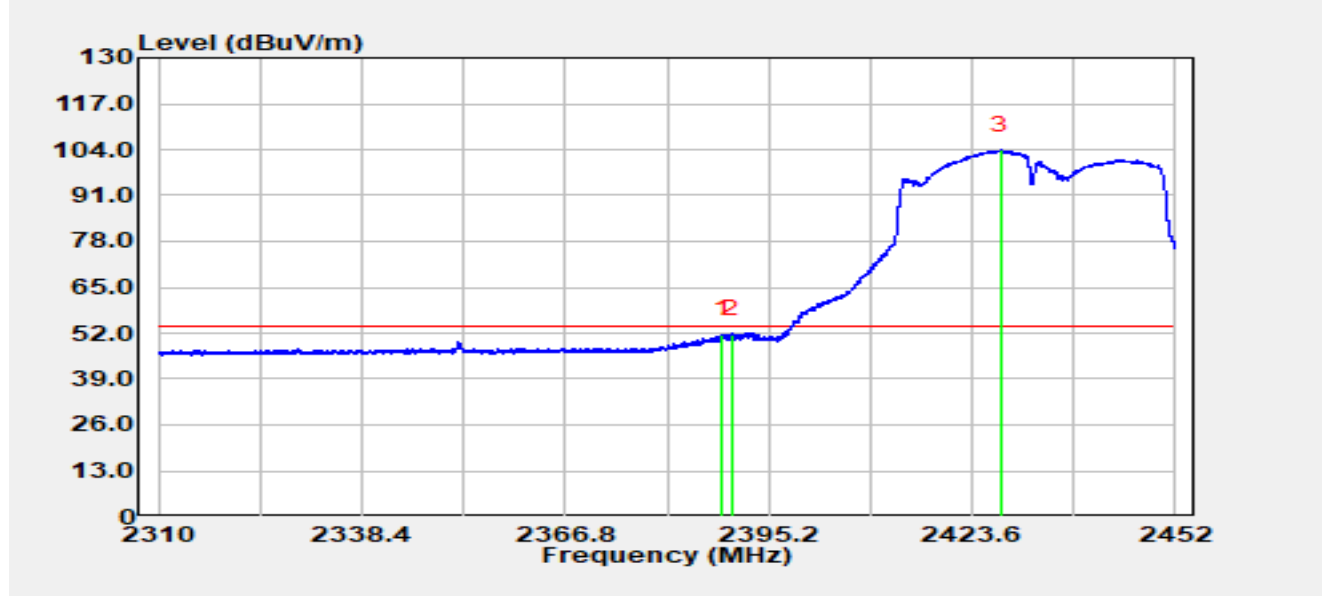


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.81	18.70	33.05	51.75	-2.25	54.00	Average
2		2390.00	18.51	33.04	51.55	-2.45	54.00	Average
3		2427.55	70.88	32.91	103.80	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

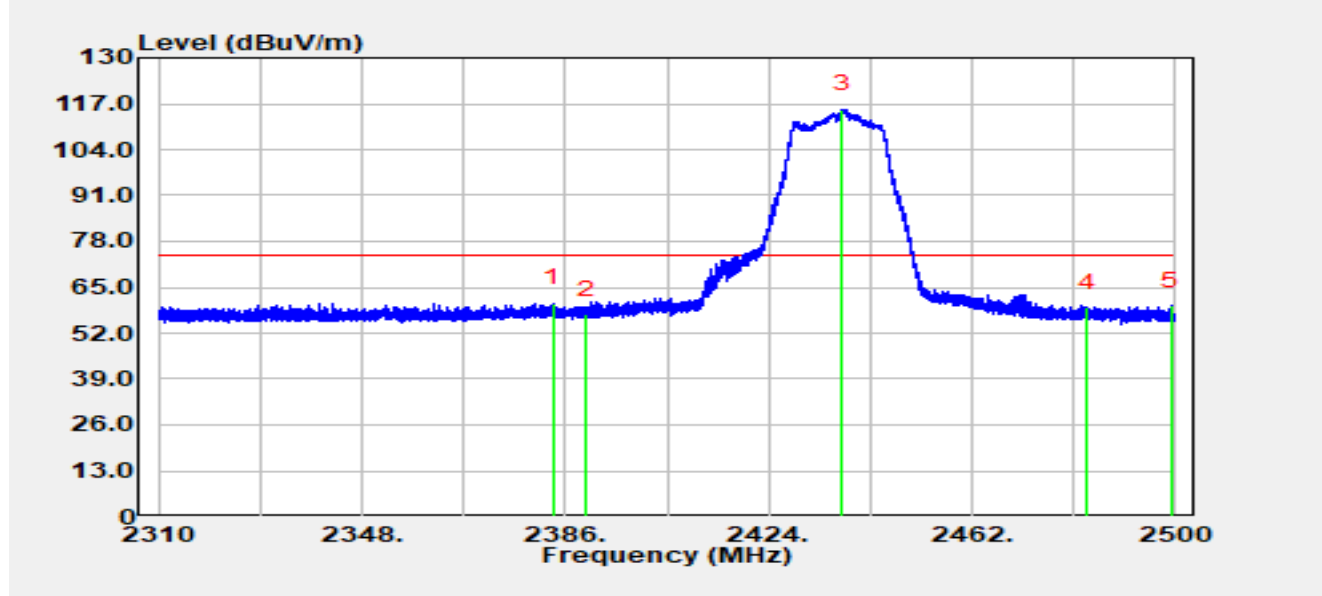


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2383.68	27.51	33.07	60.57	-13.43	74.00	Peak
2		2390.00	24.33	33.04	57.37	-16.63	74.00	Peak
3		2437.81	82.50	32.90	115.40	N/A	N/A	Peak
4		2483.50	26.50	32.77	59.27	-14.73	74.00	Peak
5		2499.09	27.04	32.77	59.81	-14.19	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

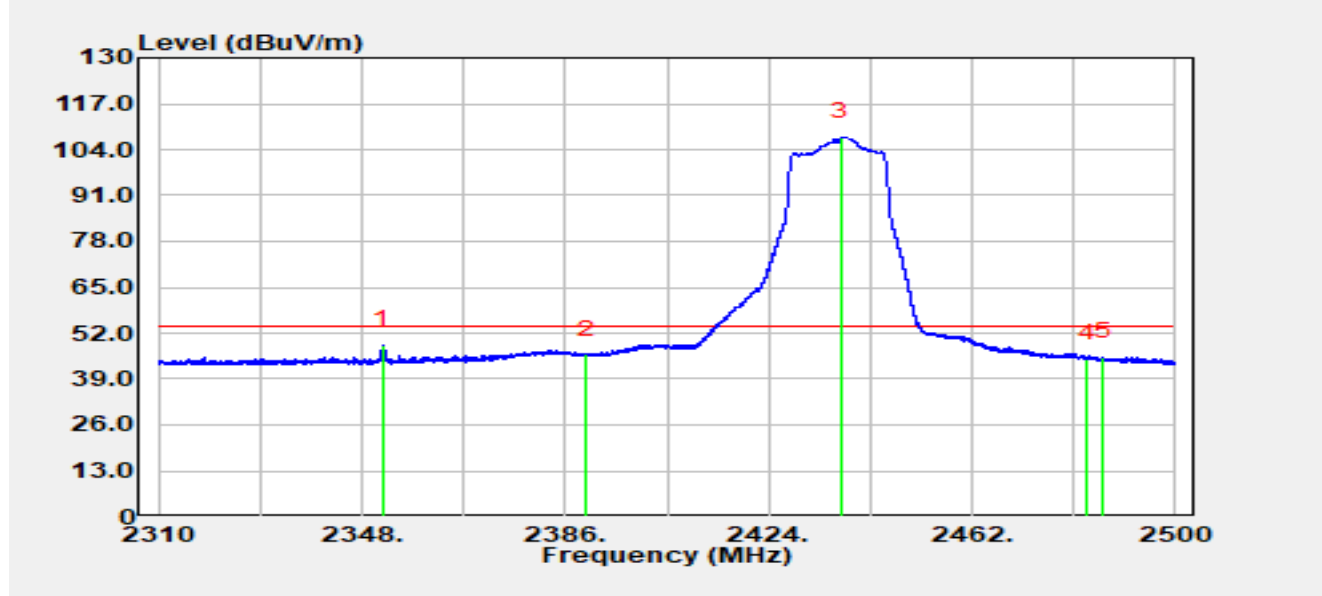


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.95	15.63	33.13	48.76	-5.24	54.00	Average
2		2390.00	12.86	33.04	45.90	-8.10	54.00	Average
3		2437.53	74.74	32.90	107.64	N/A	N/A	Average
4		2483.50	12.09	32.77	44.86	-9.14	54.00	Average
5		2486.49	12.55	32.76	45.31	-8.69	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

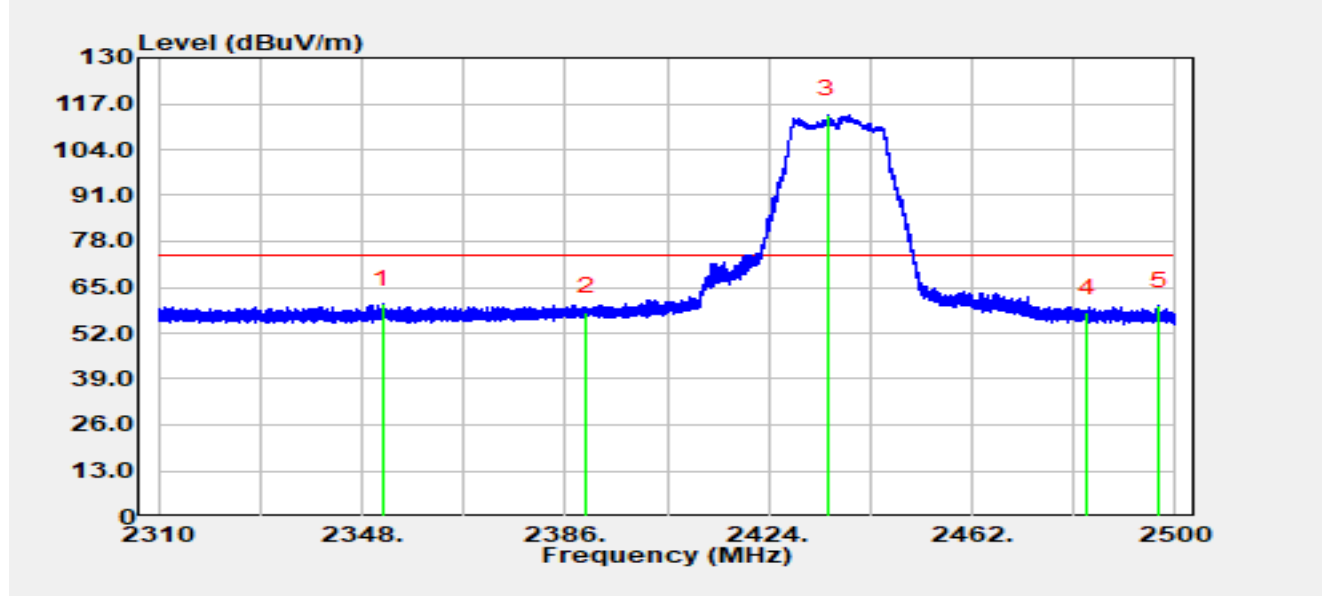


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.78	27.07	33.13	60.20	-13.80	74.00	Peak
2		2390.00	25.05	33.04	58.09	-15.91	74.00	Peak
3		2435.08	80.98	32.90	113.88	N/A	N/A	Peak
4		2483.50	24.91	32.77	57.68	-16.32	74.00	Peak
5		2497.00	26.94	32.77	59.70	-14.30	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

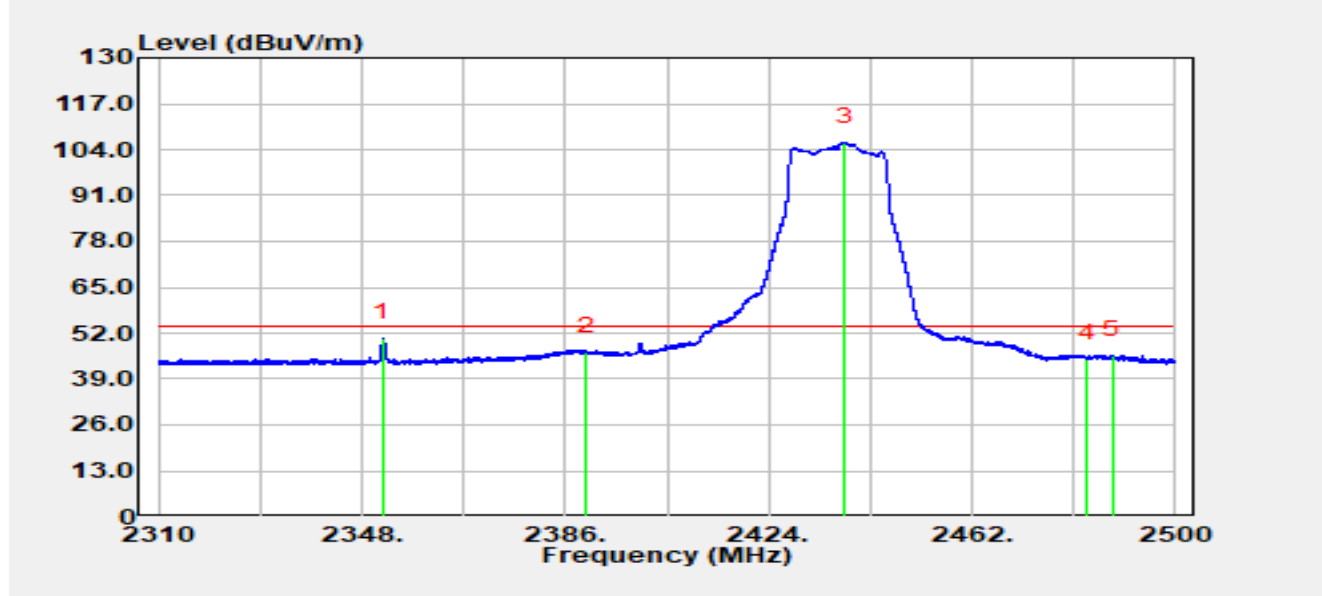


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.91	17.61	33.13	50.74	-3.26	54.00	Average
2		2390.00	13.57	33.04	46.61	-7.39	54.00	Average
3		2438.29	73.23	32.90	106.13	N/A	N/A	Average
4		2483.50	11.96	32.77	44.73	-9.27	54.00	Average
5		2488.33	13.01	32.76	45.77	-8.23	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2447 MHz		

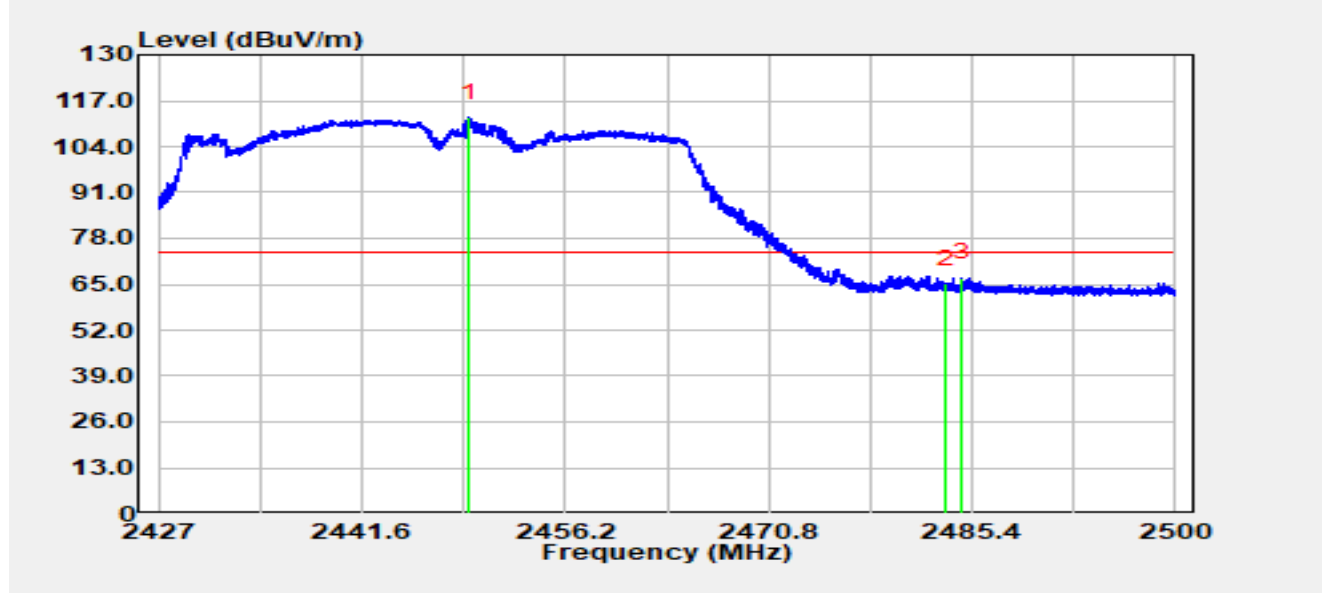


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2449.29	79.39	32.86	112.25	N/A	N/A	Peak
2		2483.50	32.31	32.77	65.08	-8.92	74.00	Peak
3	*	2484.71	33.95	32.77	66.72	-7.28	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2447 MHz		

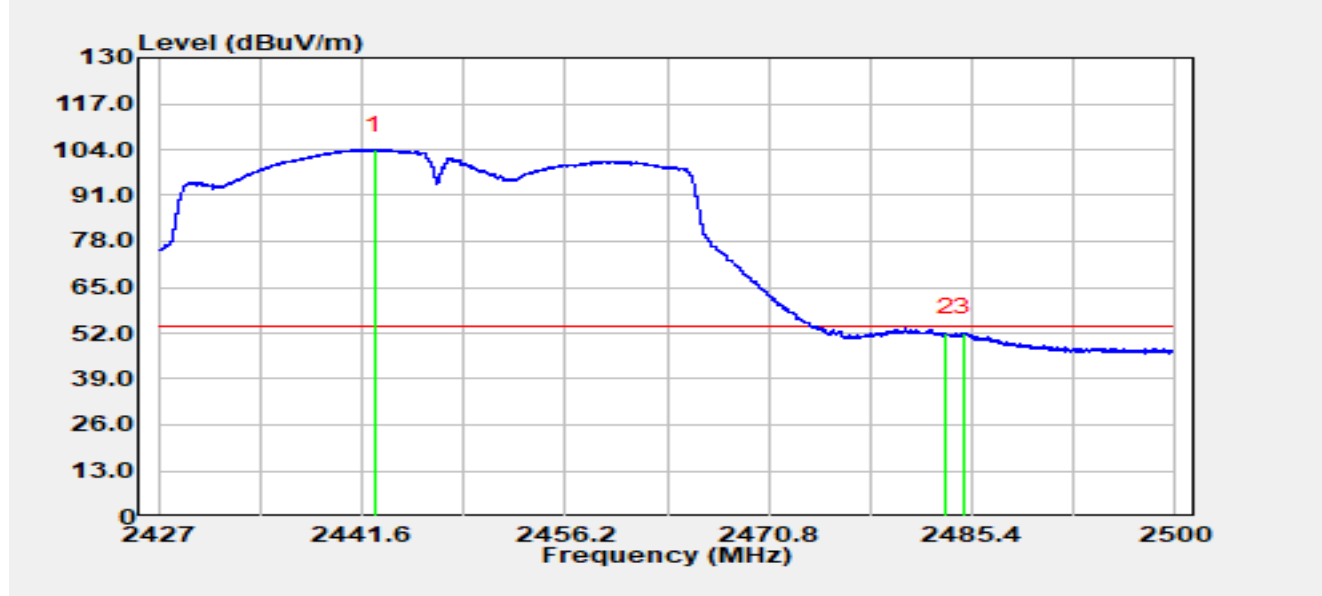


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2442.53	71.10	32.88	103.99	N/A	N/A	Average
2		2483.50	19.24	32.77	52.01	-1.99	54.00	Average
3	*	2484.74	19.30	32.77	52.06	-1.94	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

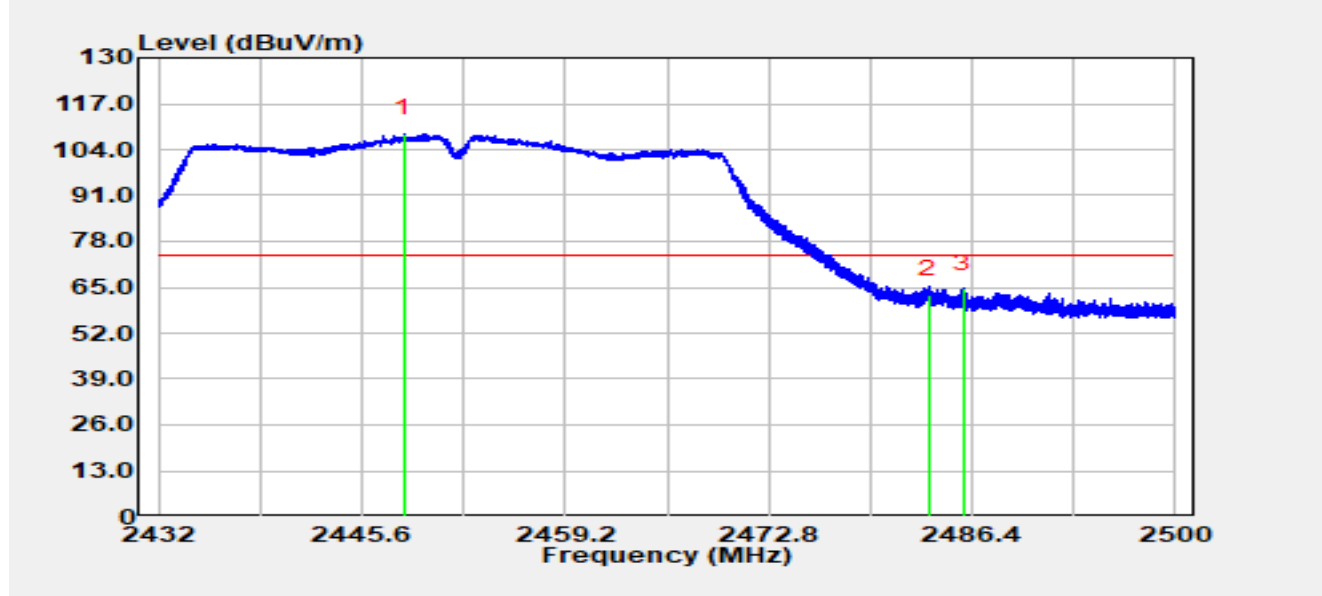


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2448.39	75.78	32.86	108.65	N/A	N/A	Peak
2		2483.50	30.11	32.77	62.88	-11.12	74.00	Peak
3	*	2485.83	31.82	32.77	64.59	-9.41	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

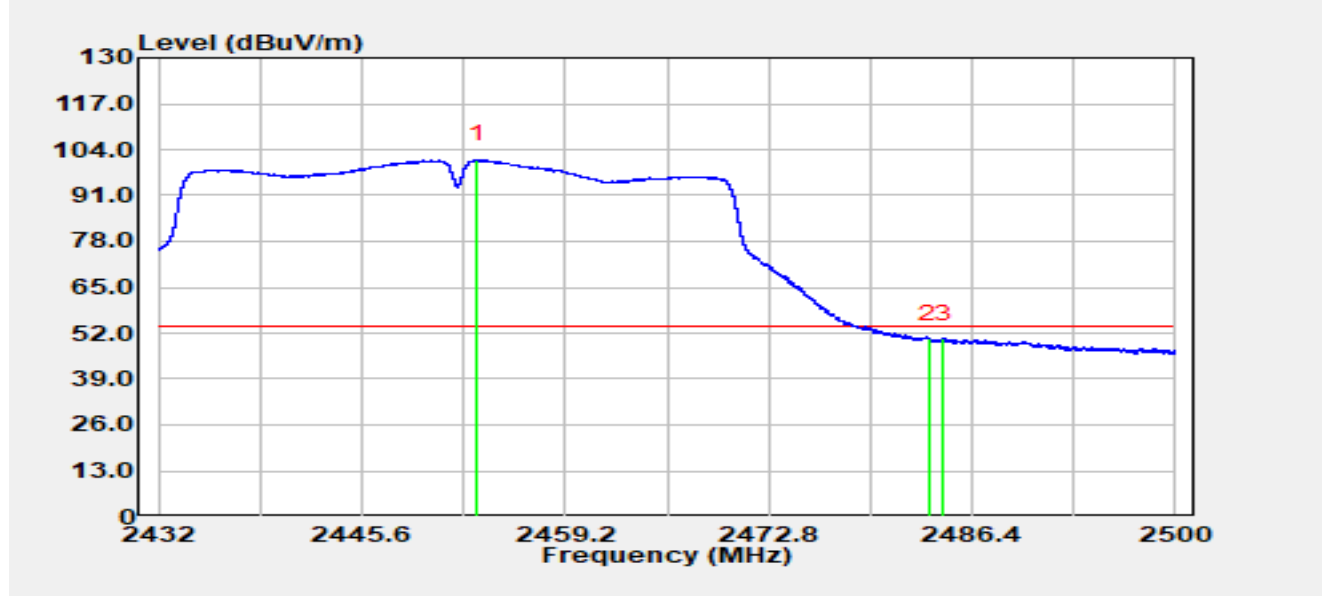


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.35	68.27	32.85	101.12	N/A	N/A	Average
2	*	2483.50	17.75	32.77	50.51	-3.49	54.00	Average
3		2484.50	17.71	32.77	50.48	-3.52	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

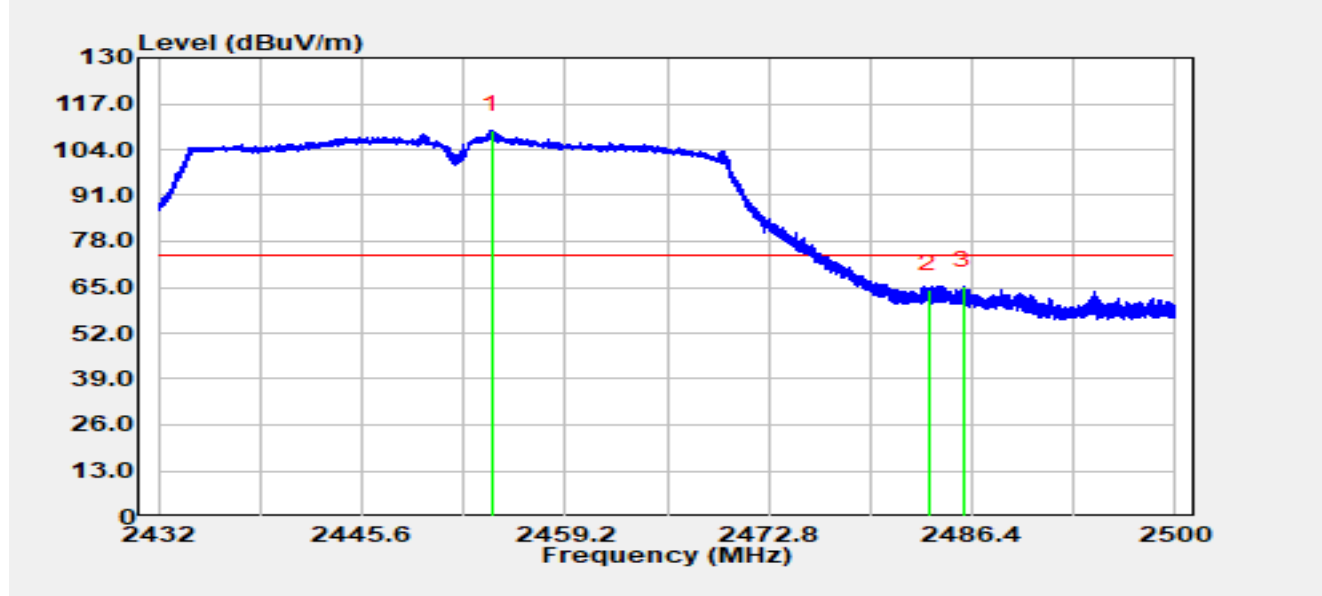


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2454.26	76.58	32.85	109.42	N/A	N/A	Peak
2		2483.50	31.68	32.77	64.45	-9.55	74.00	Peak
3	*	2485.84	32.72	32.77	65.49	-8.51	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

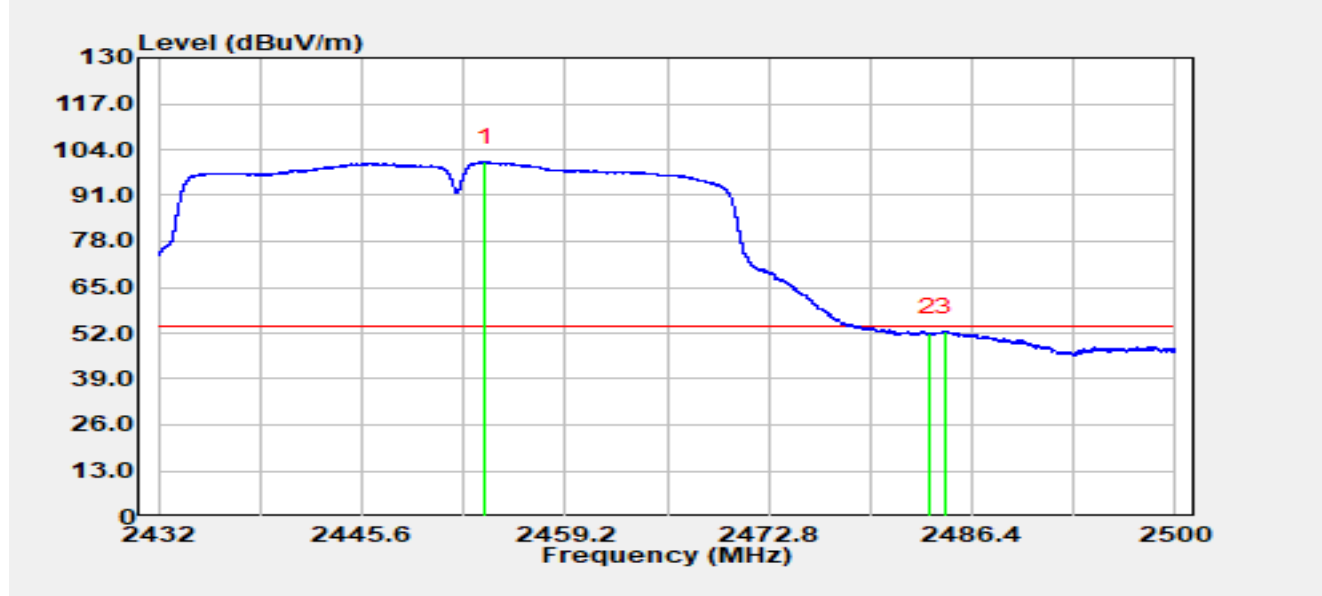


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.87	67.52	32.85	100.37	N/A	N/A	Average
2		2483.50	19.27	32.77	52.03	-1.97	54.00	Average
3	*	2484.61	19.64	32.77	52.40	-1.60	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2412 MHz		

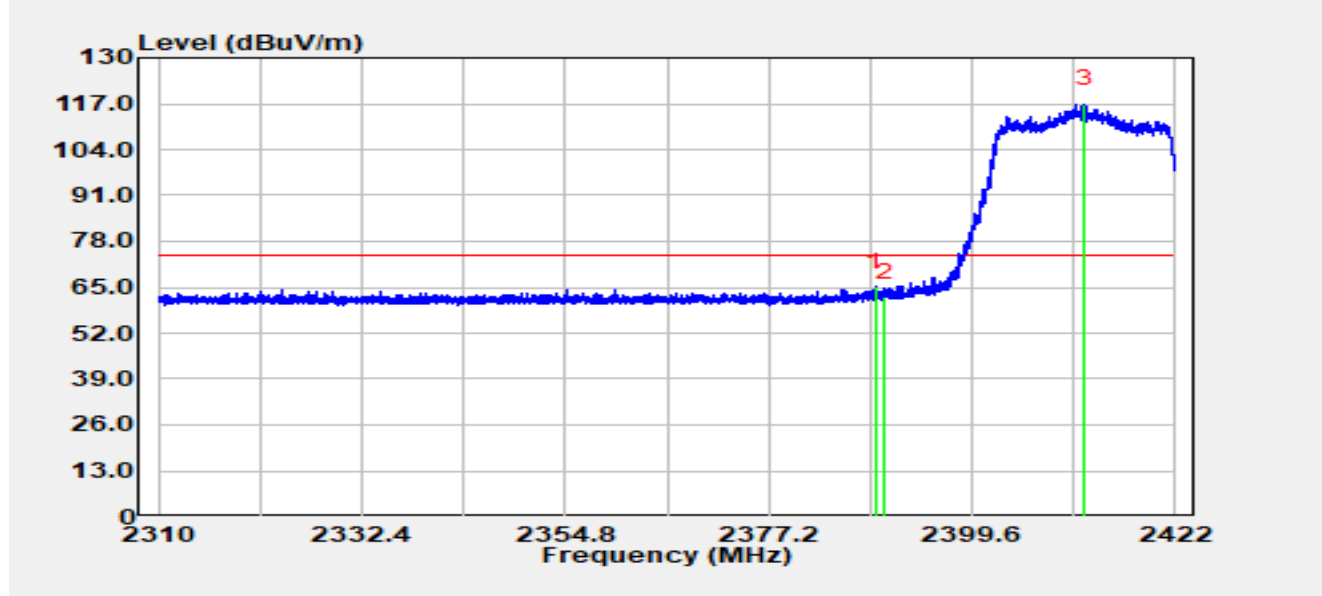


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.98	32.16	33.04	65.20	-8.80	74.00	Peak
2		2390.00	29.25	33.04	62.29	-11.71	74.00	Peak
3		2411.93	83.92	32.95	116.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2412 MHz		

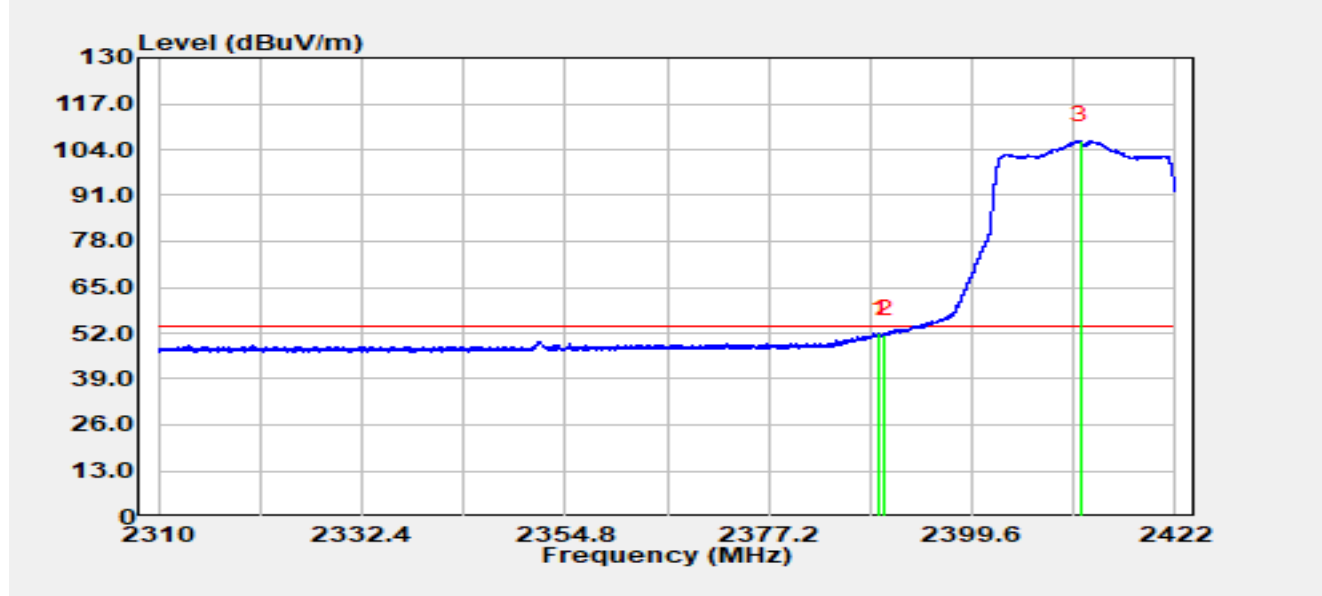


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.38	18.92	33.04	51.96	-2.04	54.00	Average
2		2390.00	18.57	33.04	51.61	-2.39	54.00	Average
3		2411.51	73.69	32.95	106.65	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2412 MHz		

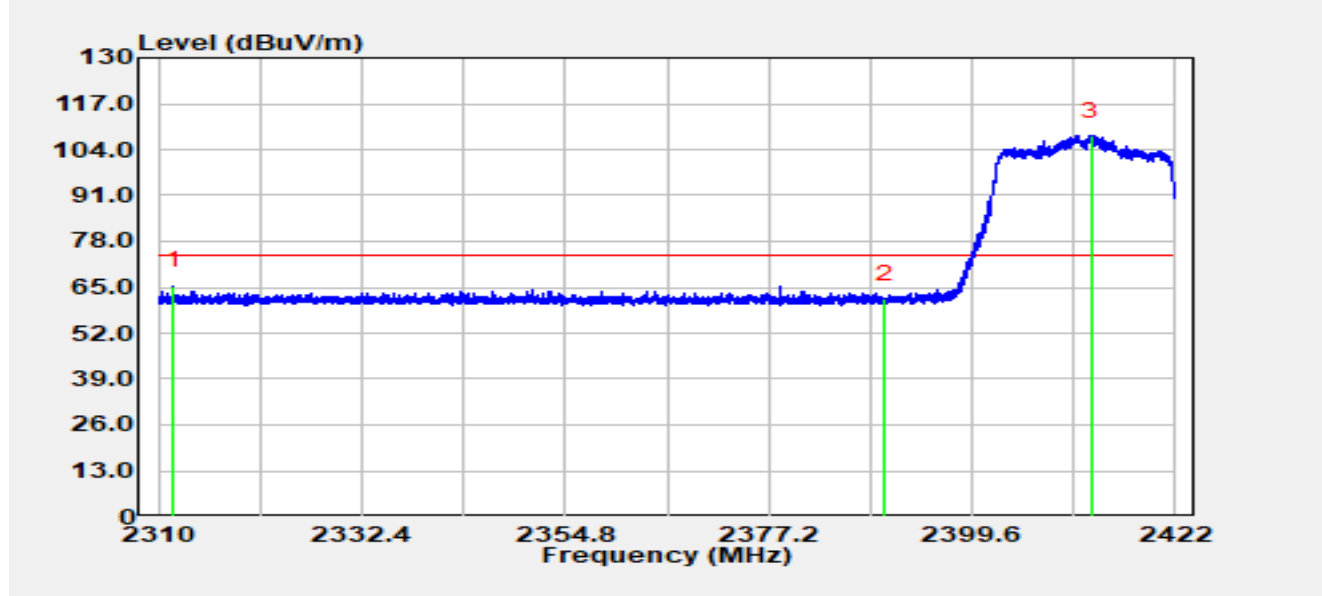


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2311.64	32.17	33.18	65.35	-8.65	74.00	Peak
2		2390.00	28.57	33.04	61.62	-12.38	74.00	Peak
3		2412.78	74.93	32.95	107.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2412 MHz		

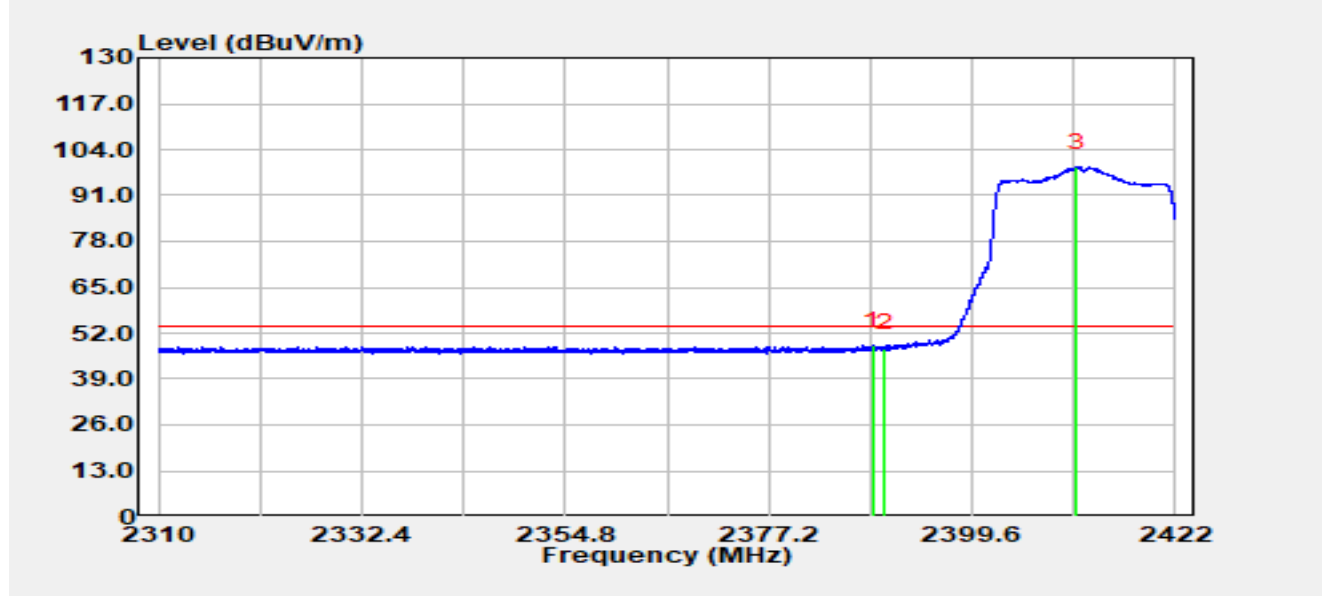


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.64	15.50	33.05	48.55	-5.45	54.00	Average
2		2390.00	14.71	33.04	47.75	-6.25	54.00	Average
3		2411.15	66.05	32.96	99.00	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2417 MHz		

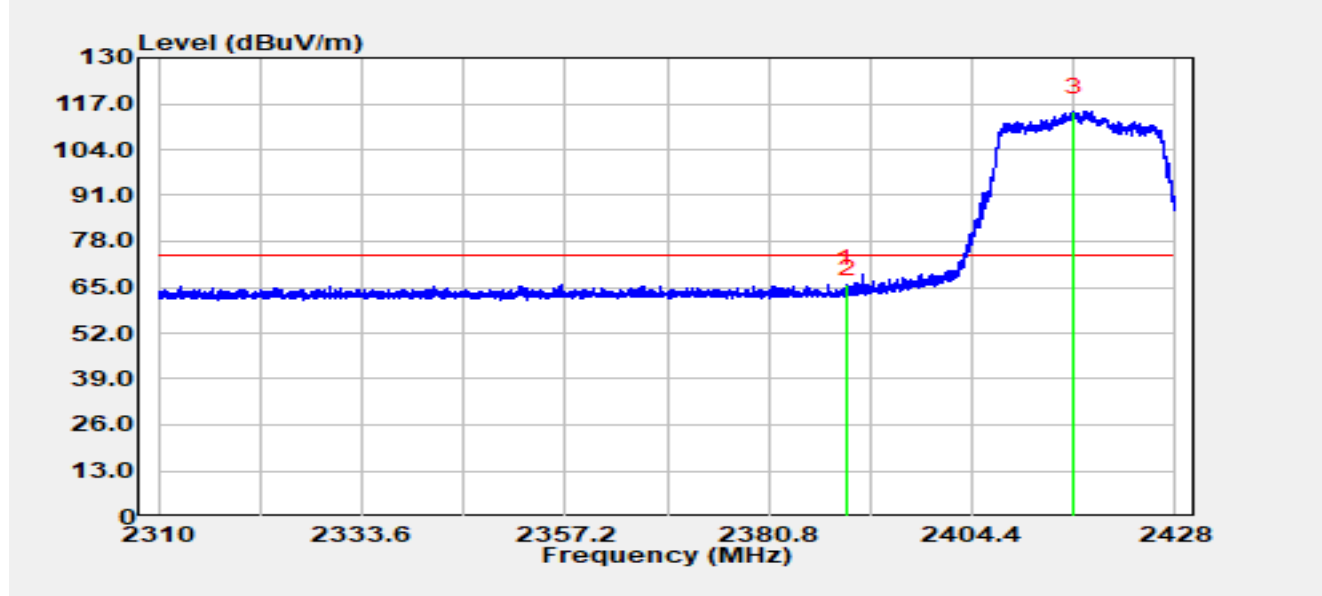


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.74	32.73	33.04	65.77	-8.23	74.00	Peak
2		2390.00	29.79	33.04	62.83	-11.17	74.00	Peak
3		2416.25	81.84	32.93	114.77	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2417 MHz		

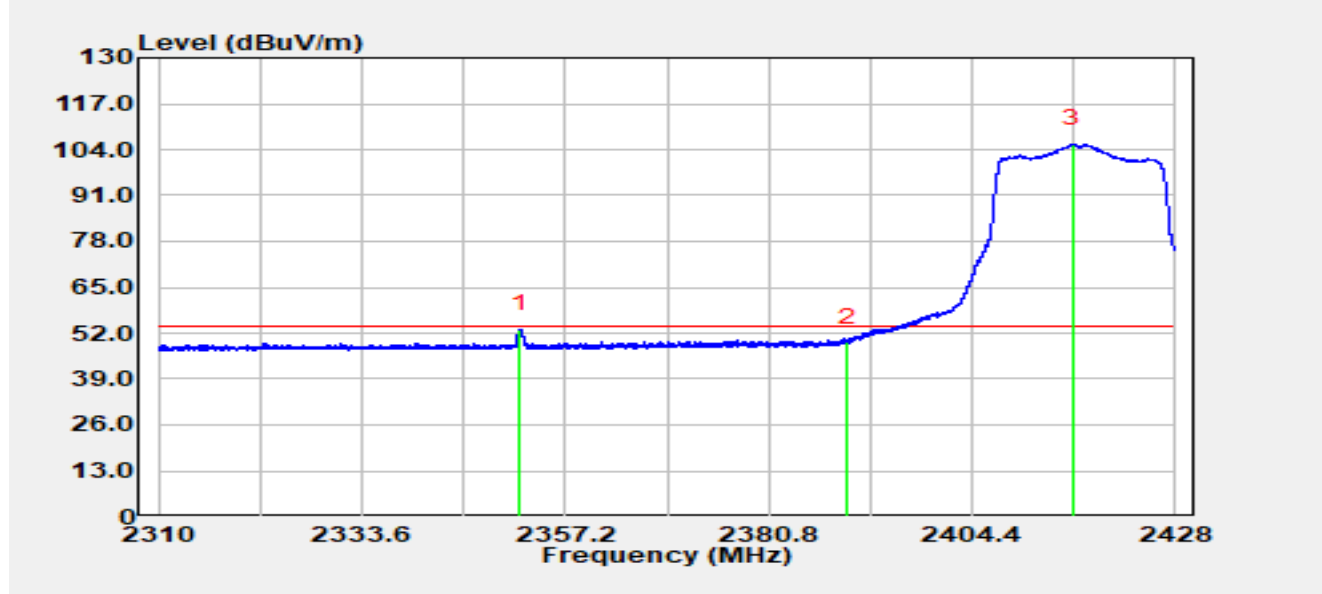


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.95	20.05	33.13	53.18	-0.82	54.00	Average
2		2390.00	16.27	33.04	49.32	-4.68	54.00	Average
3		2416.05	72.58	32.94	105.51	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2437 MHz		

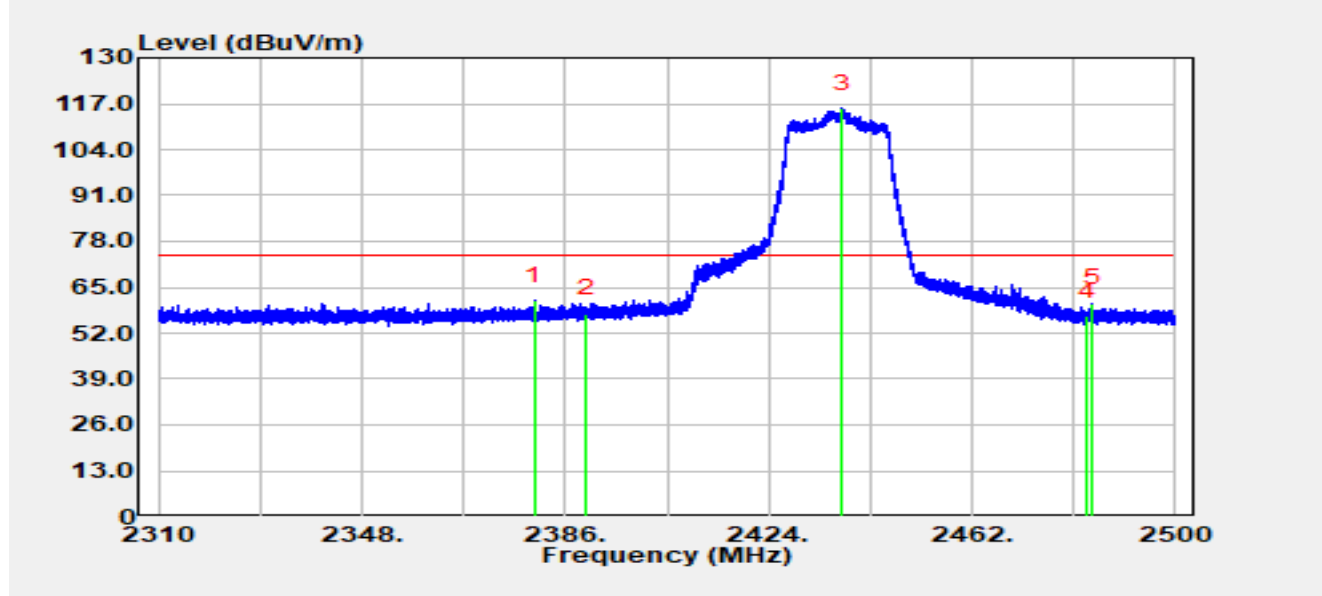


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.32	28.14	33.07	61.22	-12.78	74.00	Peak
2		2390.00	24.43	33.04	57.47	-16.53	74.00	Peak
3		2437.79	82.73	32.90	115.63	N/A	N/A	Peak
4		2483.50	24.06	32.77	56.83	-17.17	74.00	Peak
5		2484.61	27.77	32.77	60.53	-13.47	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2437 MHz		

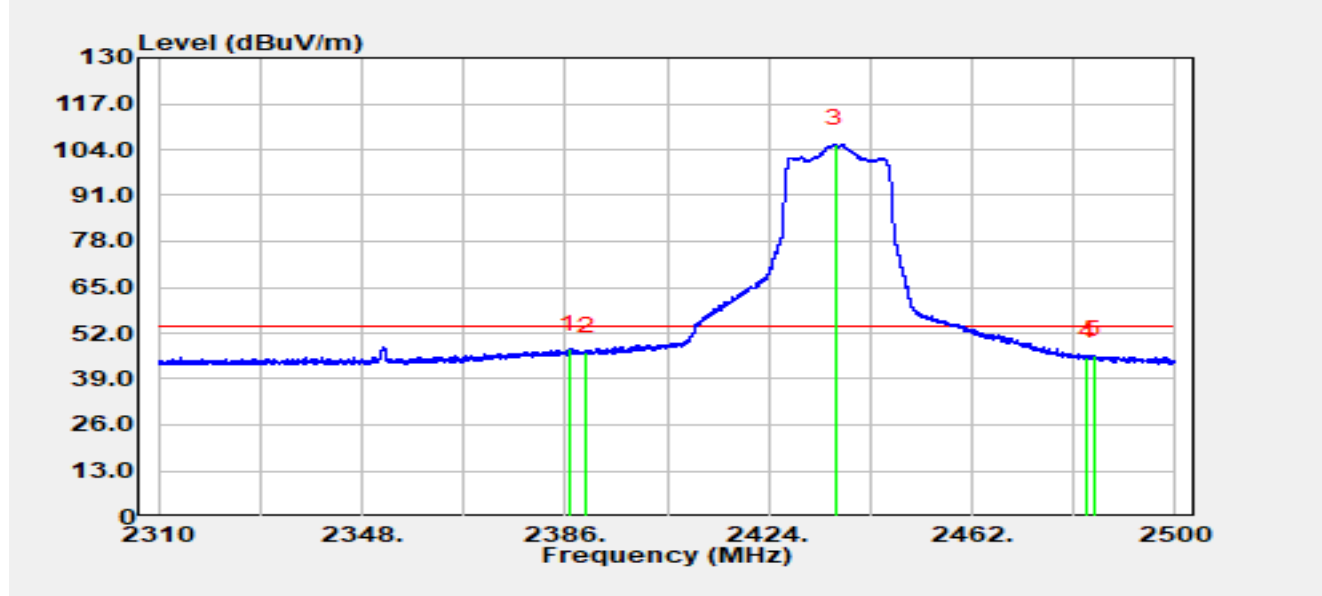


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.67	14.53	33.05	47.58	-6.42	54.00	Average
2		2390.00	13.78	33.04	46.82	-7.18	54.00	Average
3		2436.39	72.64	32.90	105.54	N/A	N/A	Average
4		2483.50	12.58	32.77	45.35	-8.65	54.00	Average
5		2484.65	12.88	32.77	45.64	-8.36	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2437 MHz		

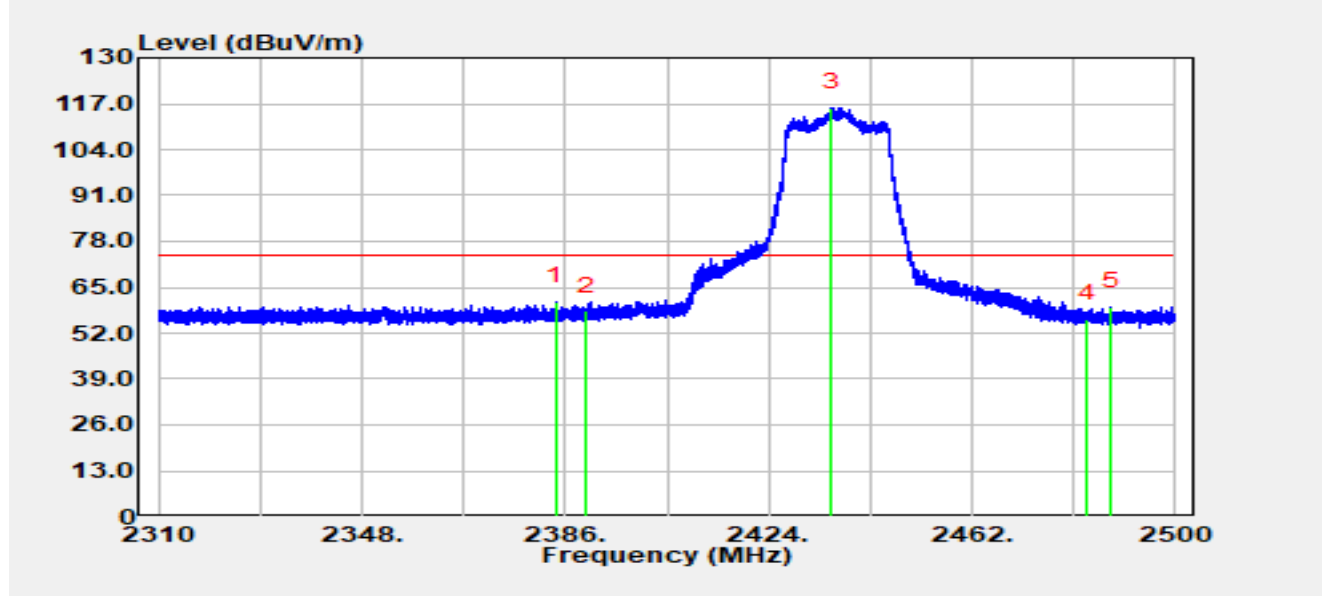


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.14	27.86	33.06	60.92	-13.08	74.00	Peak
2		2390.00	25.32	33.04	58.36	-15.64	74.00	Peak
3		2435.86	82.99	32.90	115.89	N/A	N/A	Peak
4		2483.50	23.40	32.77	56.16	-17.84	74.00	Peak
5		2487.99	26.79	32.76	59.55	-14.45	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2437 MHz		

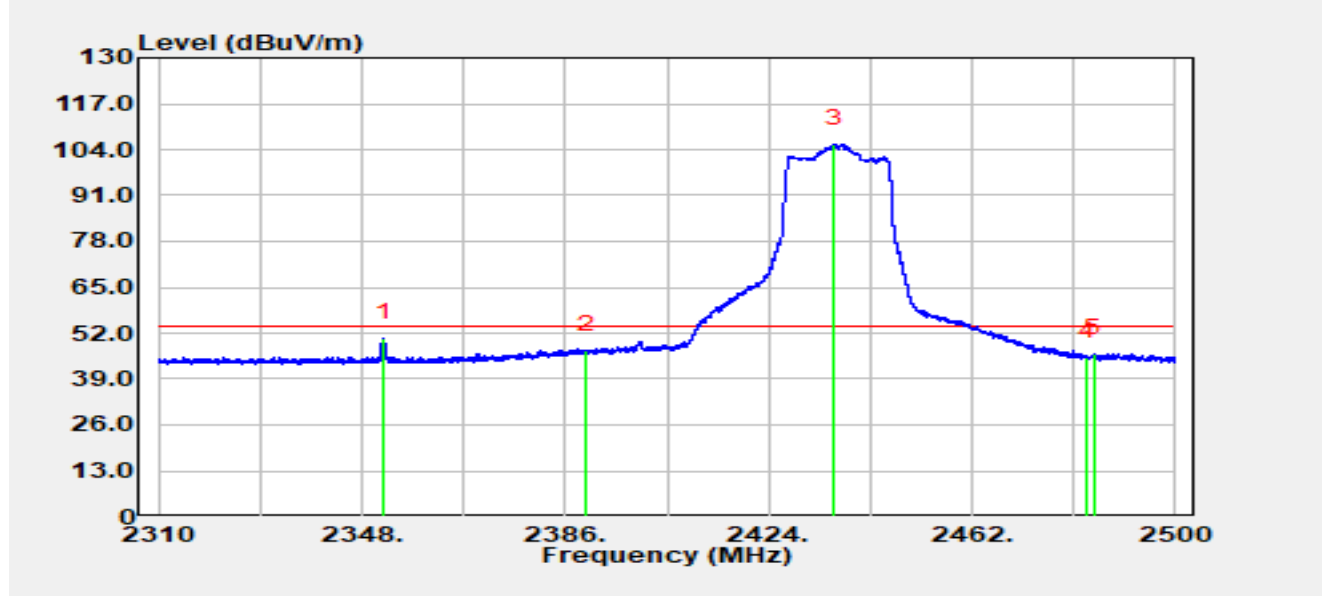


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.03	17.50	33.13	50.63	-3.37	54.00	Average
2		2390.00	14.06	33.04	47.10	-6.90	54.00	Average
3		2436.29	72.65	32.90	105.55	N/A	N/A	Average
4		2483.50	12.41	32.77	45.18	-8.82	54.00	Average
5		2484.74	13.56	32.77	46.32	-7.68	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

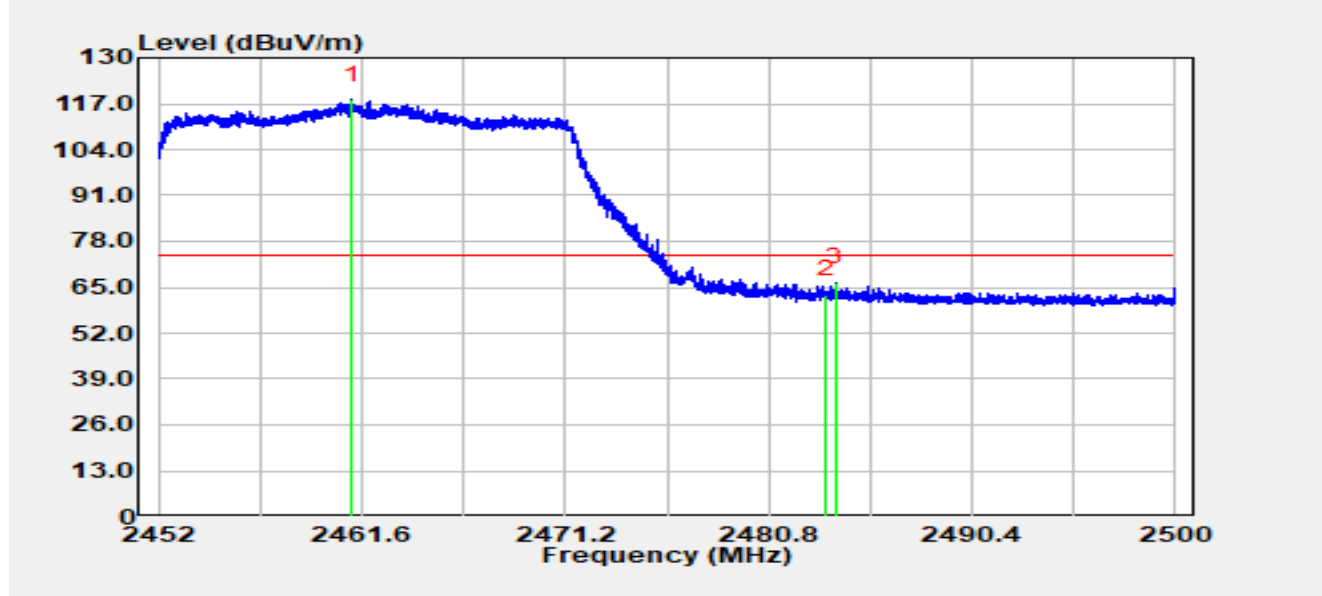


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.13	85.17	32.83	118.00	N/A	N/A	Peak
2		2483.50	30.19	32.77	62.96	-11.04	74.00	Peak
3	*	2483.95	33.62	32.77	66.39	-7.61	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

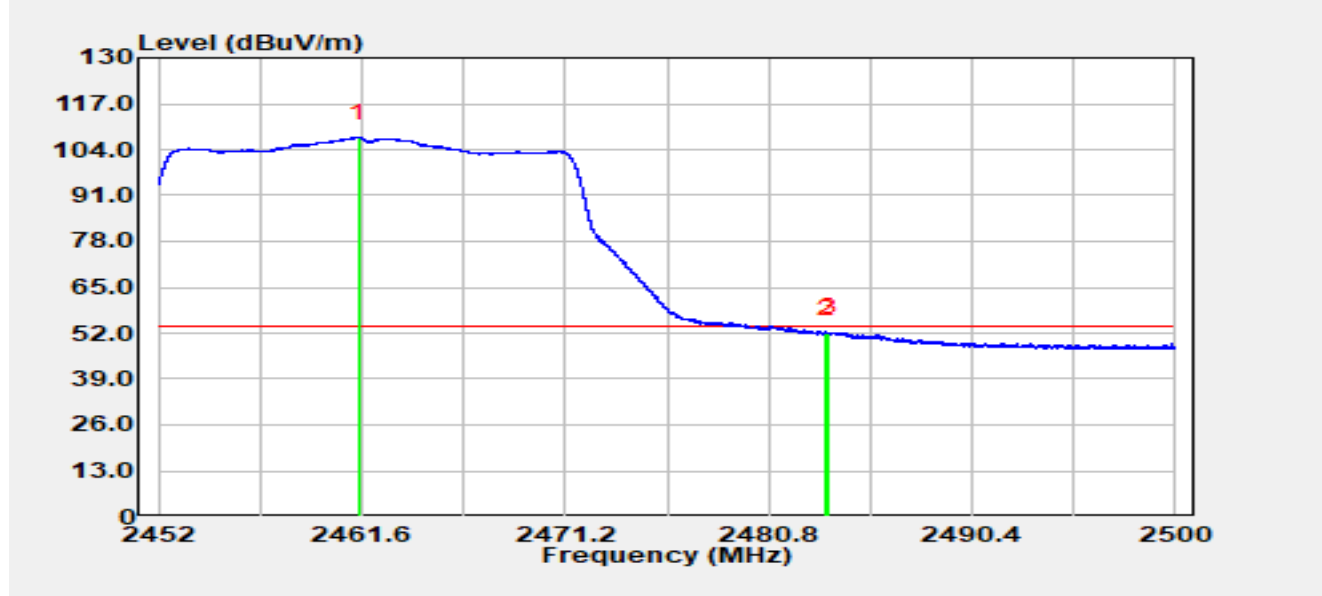


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.44	74.60	32.83	107.43	N/A	N/A	Average
2		2483.50	19.14	32.77	51.91	-2.09	54.00	Average
3	*	2483.66	19.43	32.77	52.20	-1.80	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

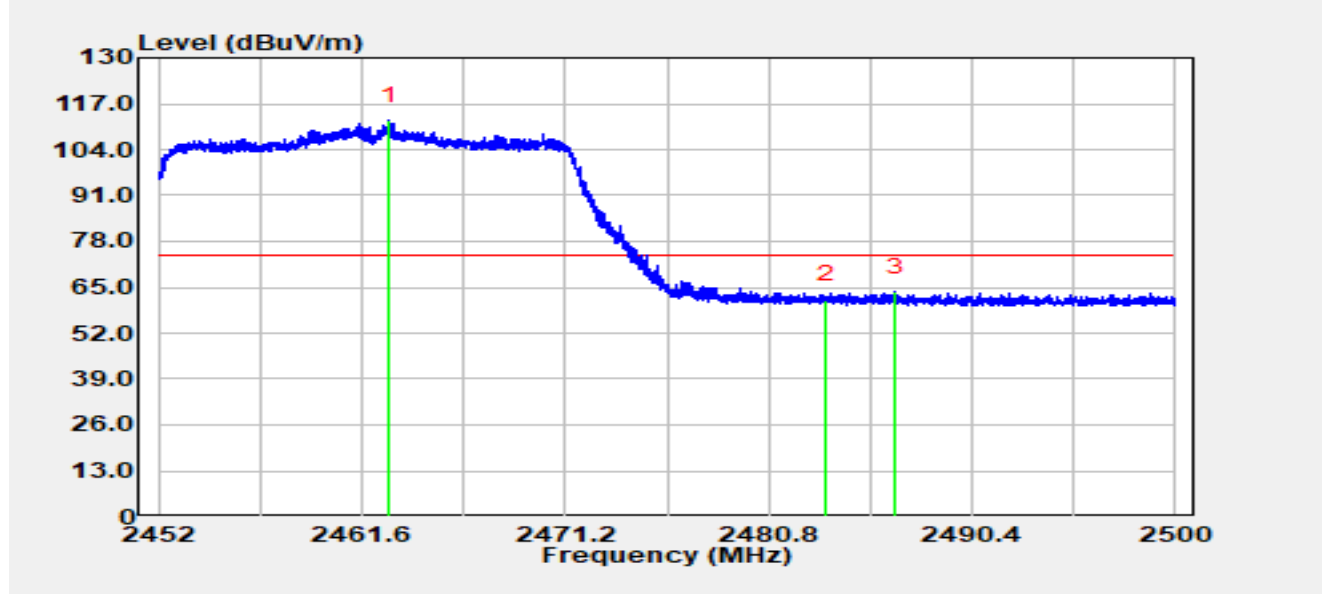


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.86	79.30	32.82	112.13	N/A	N/A	Peak
2		2483.50	28.74	32.77	61.51	-12.49	74.00	Peak
3	*	2486.81	30.97	32.76	63.74	-10.26	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 2462 MHz		

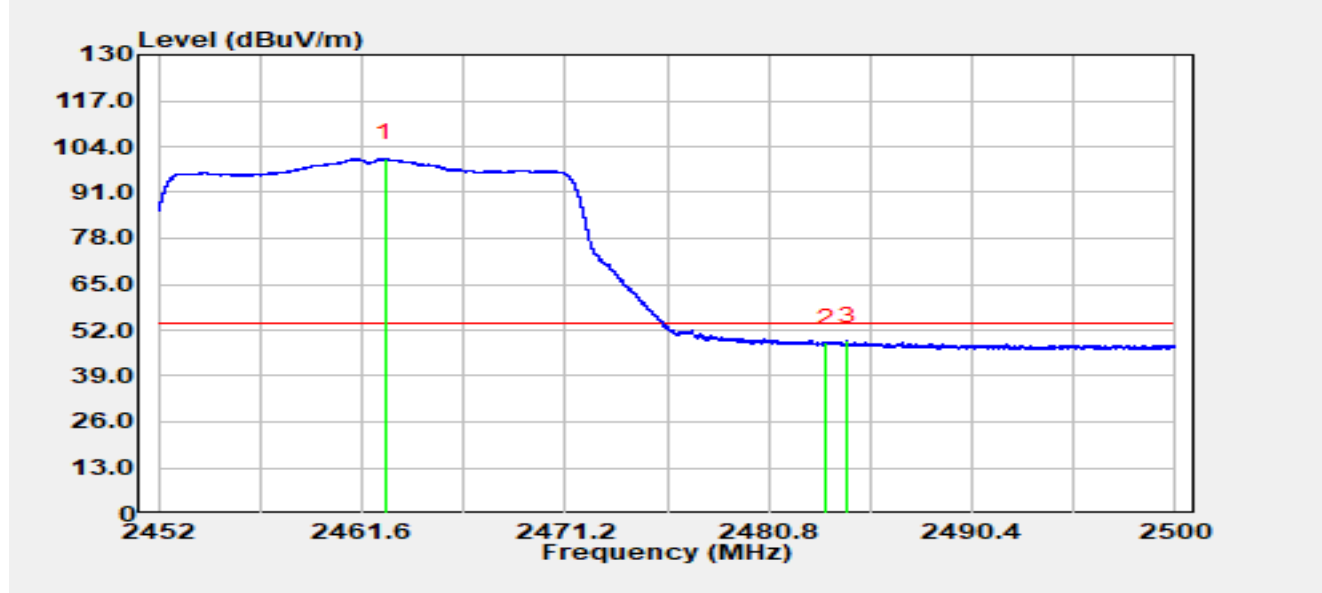


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.69	67.90	32.82	100.72	N/A	N/A	Average
2		2483.50	15.61	32.77	48.38	-5.62	54.00	Average
3	*	2484.51	16.27	32.77	49.04	-4.96	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2422 MHz		

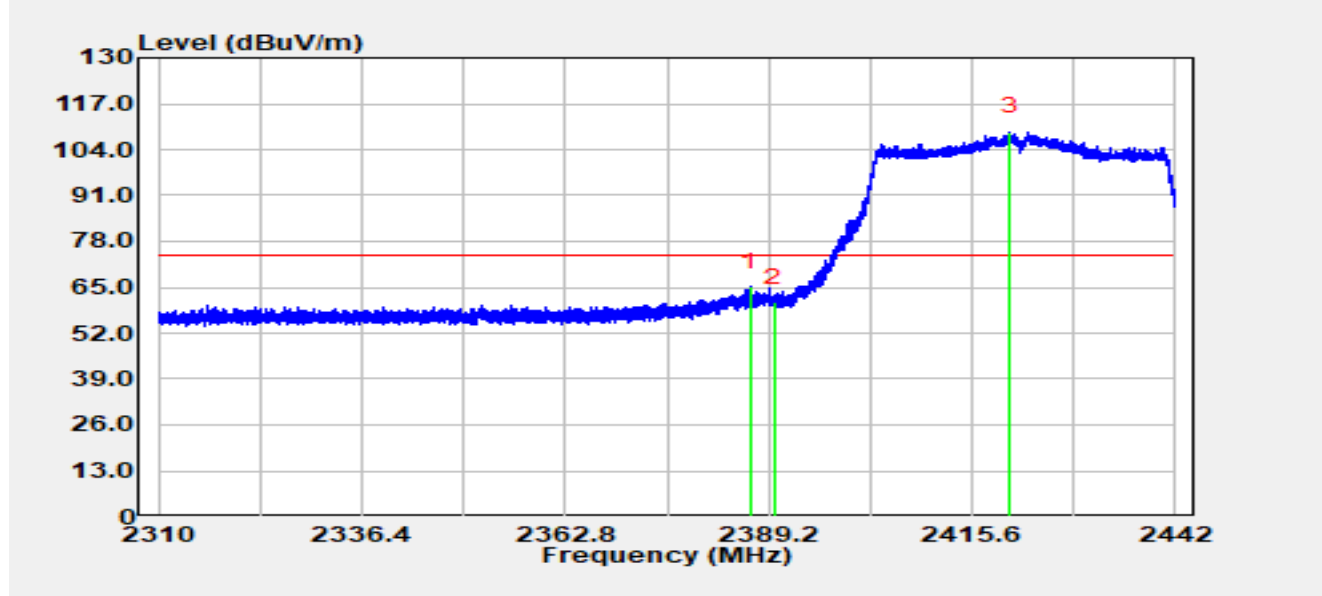


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.85	32.01	33.05	65.06	-8.94	74.00	Peak
2		2390.00	27.61	33.04	60.65	-13.35	74.00	Peak
3		2420.50	76.11	32.92	109.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2422 MHz		

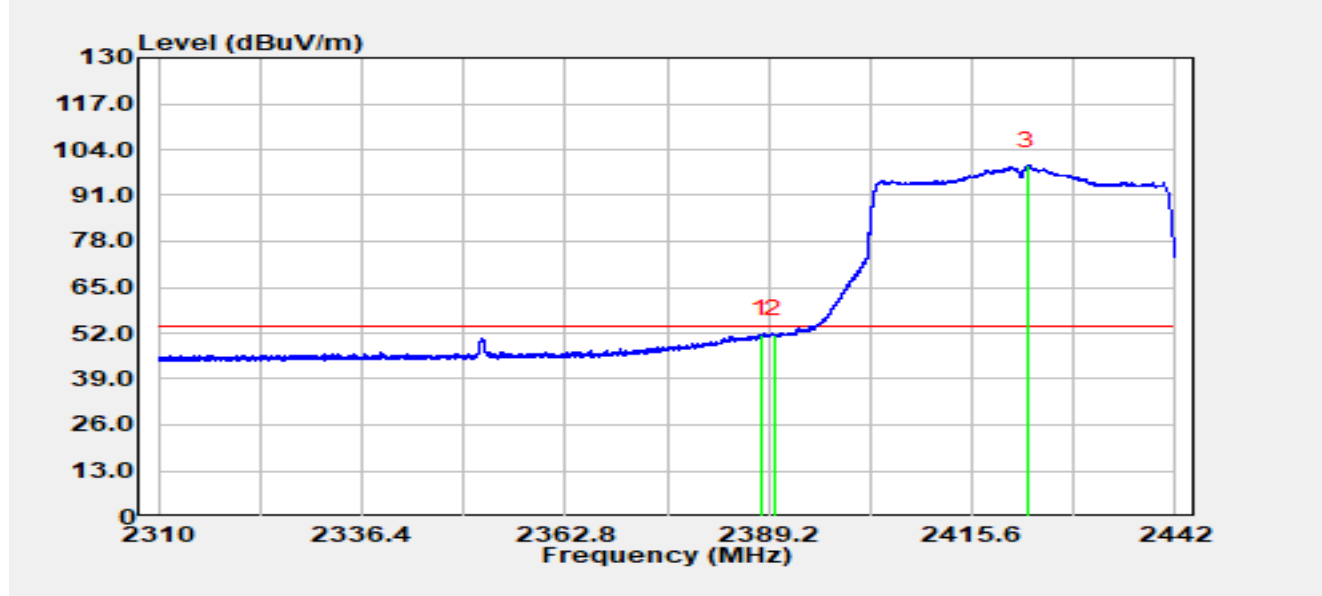


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.13	18.66	33.05	51.70	-2.30	54.00	Average
2		2390.00	18.49	33.04	51.53	-2.47	54.00	Average
3		2422.75	66.60	32.92	99.52	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2422 MHz		

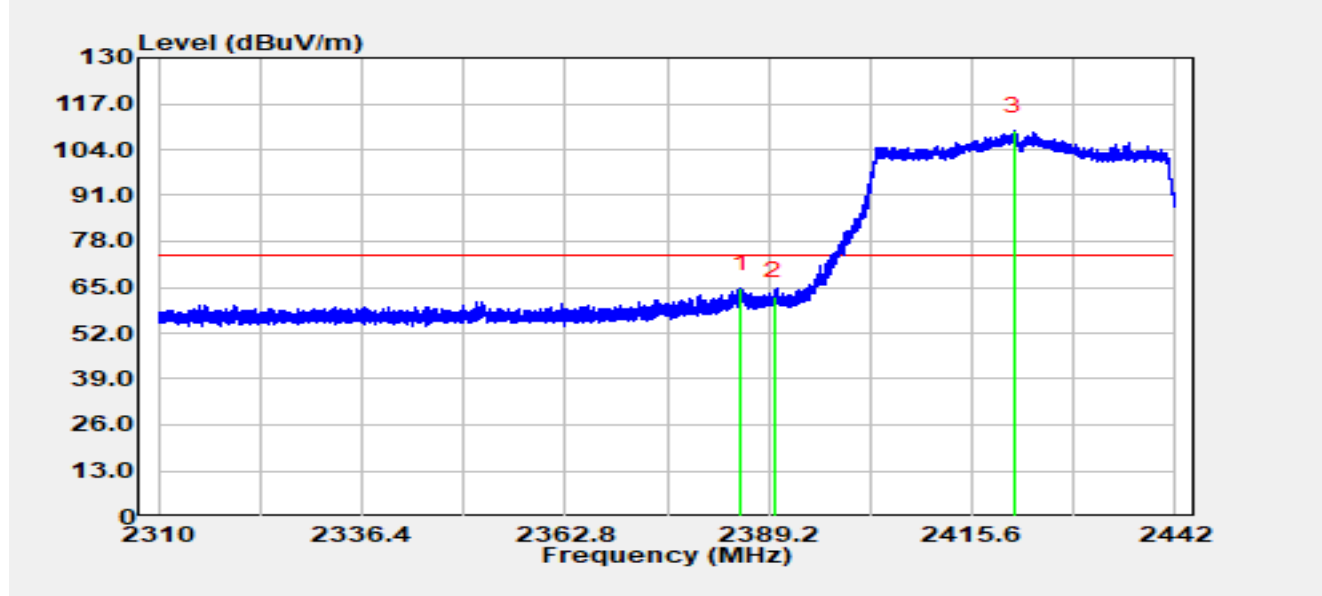


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.64	31.61	33.06	64.67	-9.33	74.00	Peak
2		2390.00	29.51	33.04	62.55	-11.45	74.00	Peak
3		2421.01	76.28	32.92	109.20	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2422 MHz		

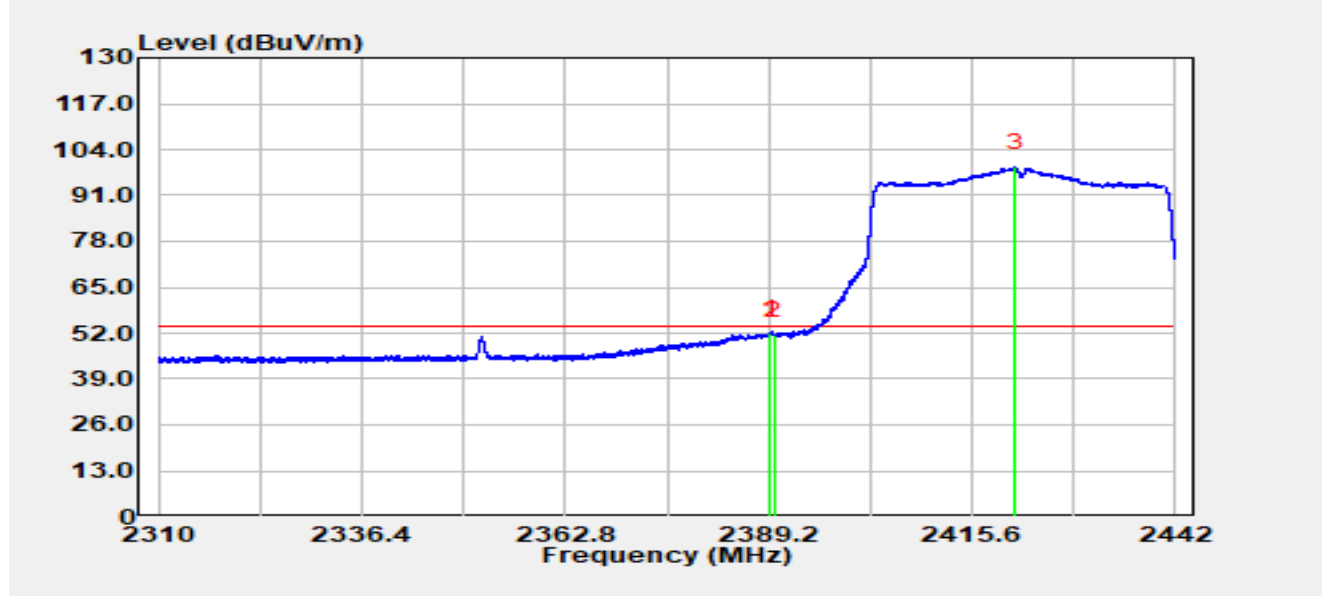


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.32	18.83	33.04	51.87	-2.13	54.00	Average
2		2390.00	18.29	33.04	51.33	-2.67	54.00	Average
3		2421.20	66.13	32.92	99.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2427 MHz		

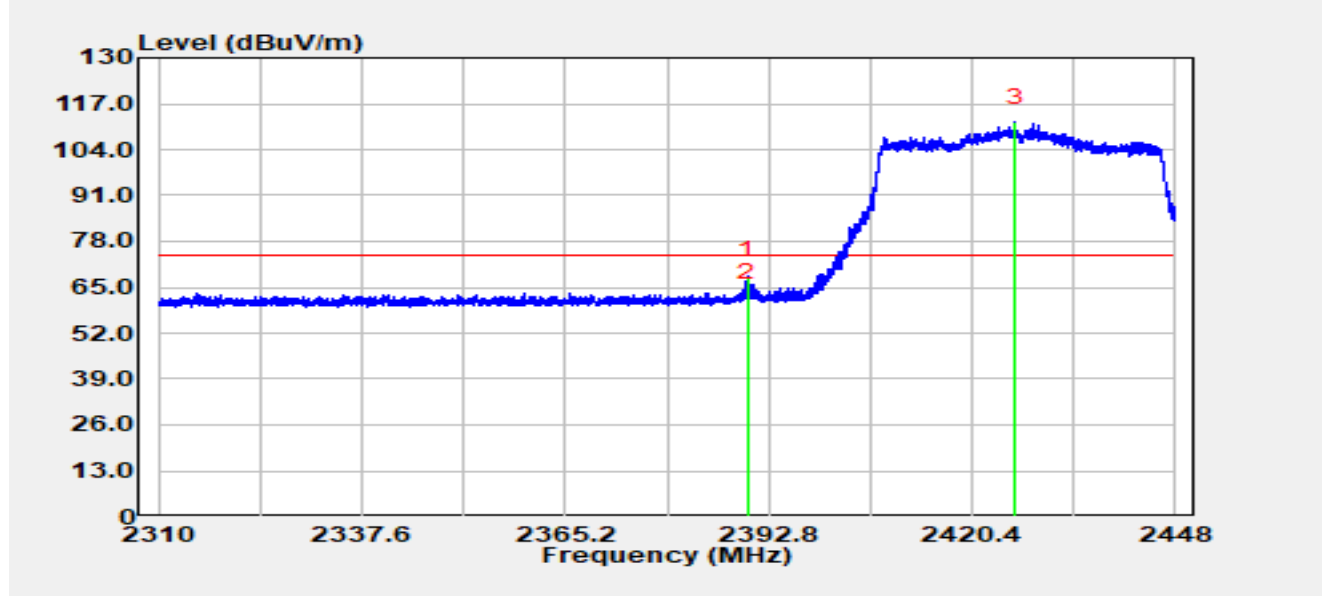


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.93	35.29	33.04	68.33	-5.67	74.00	Peak
2		2390.00	29.20	33.04	62.24	-11.76	74.00	Peak
3		2426.18	78.74	32.91	111.65	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2427 MHz		

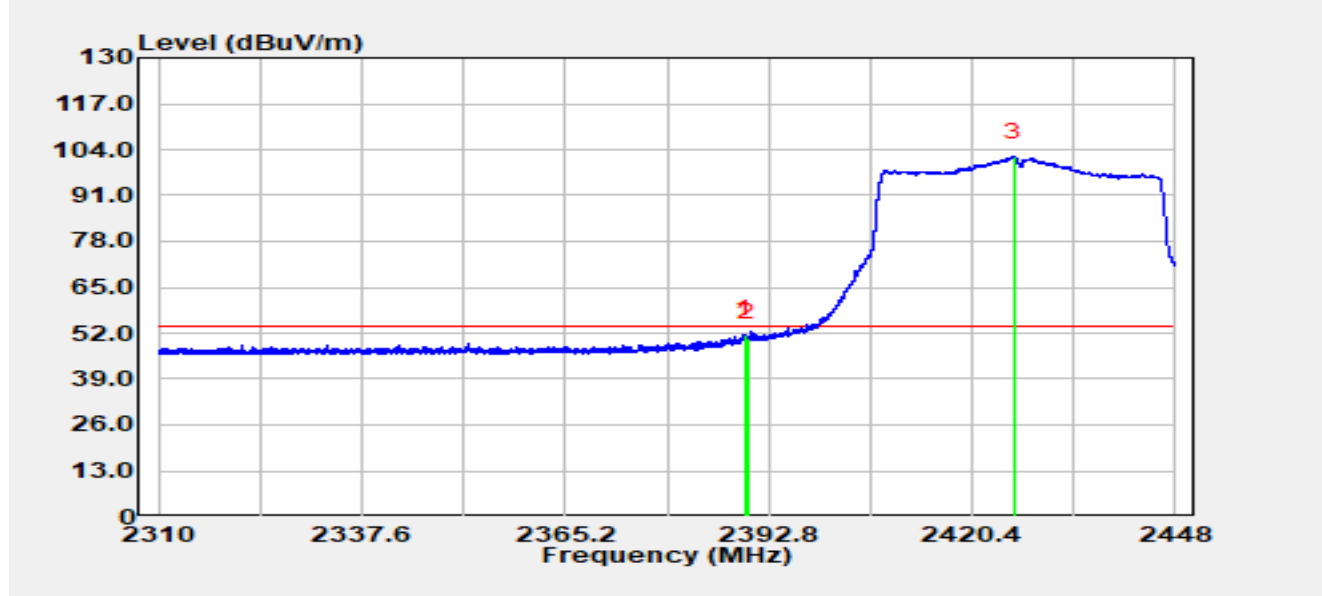


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.52	18.49	33.04	51.53	-2.47	54.00	Average
2		2390.00	17.68	33.04	50.72	-3.28	54.00	Average
3		2426.16	69.03	32.91	101.95	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2432 MHz		

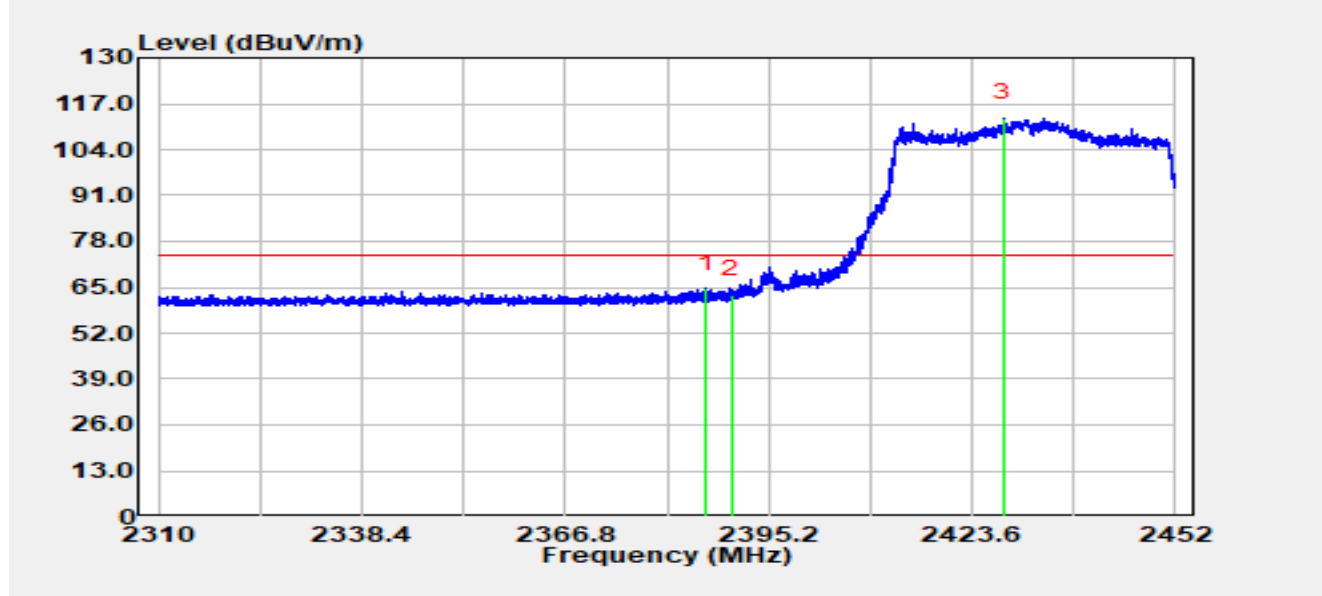


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.50	31.63	33.05	64.69	-9.31	74.00	Peak
2		2390.00	29.76	33.04	62.80	-11.20	74.00	Peak
3		2427.93	80.01	32.91	112.93	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-07
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2432 MHz		

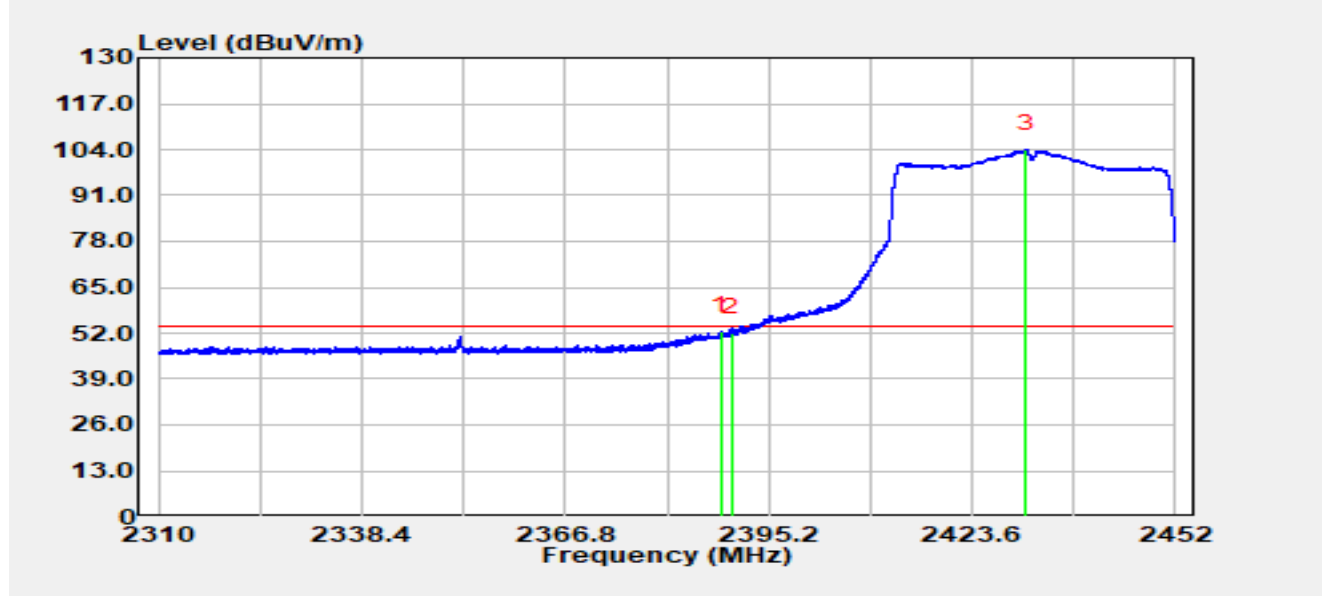


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.61	19.49	33.05	52.53	-1.47	54.00	Average
2		2390.00	19.12	33.04	52.16	-1.84	54.00	Average
3		2431.18	71.11	32.91	104.02	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2437 MHz		

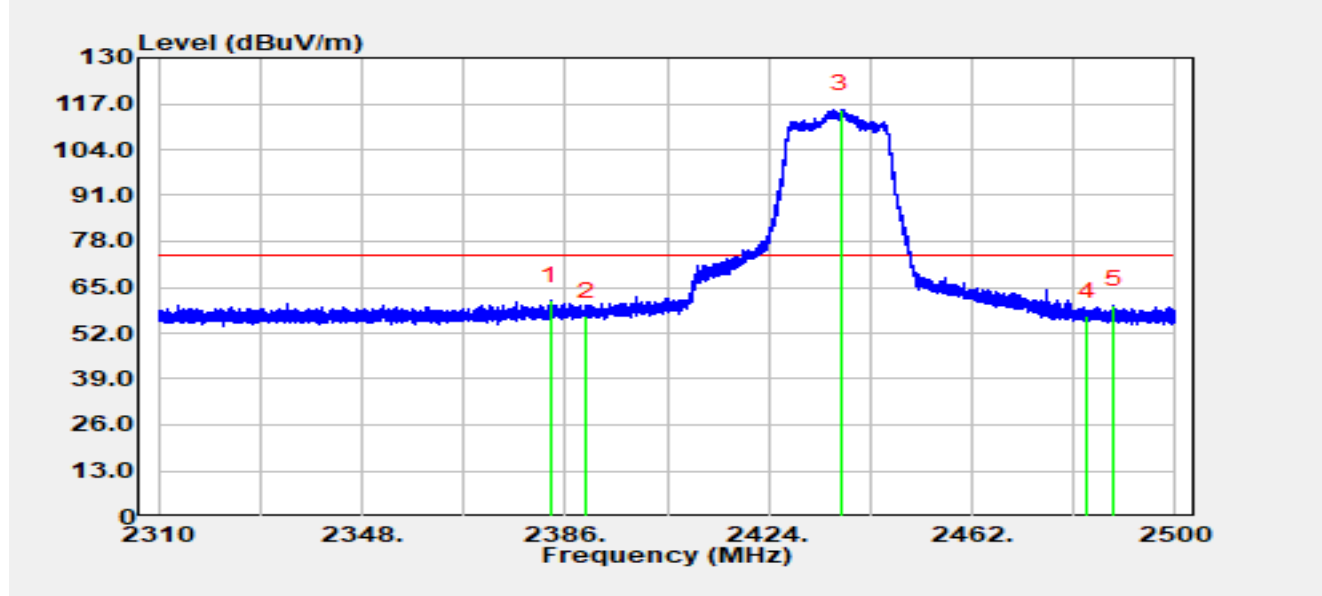


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2383.34	28.08	33.07	61.14	-12.86	74.00	Peak
2		2390.00	23.79	33.04	56.83	-17.17	74.00	Peak
3		2437.40	82.60	32.90	115.50	N/A	N/A	Peak
4		2483.50	24.00	32.77	56.77	-17.23	74.00	Peak
5		2488.49	27.12	32.76	59.88	-14.12	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2437 MHz		

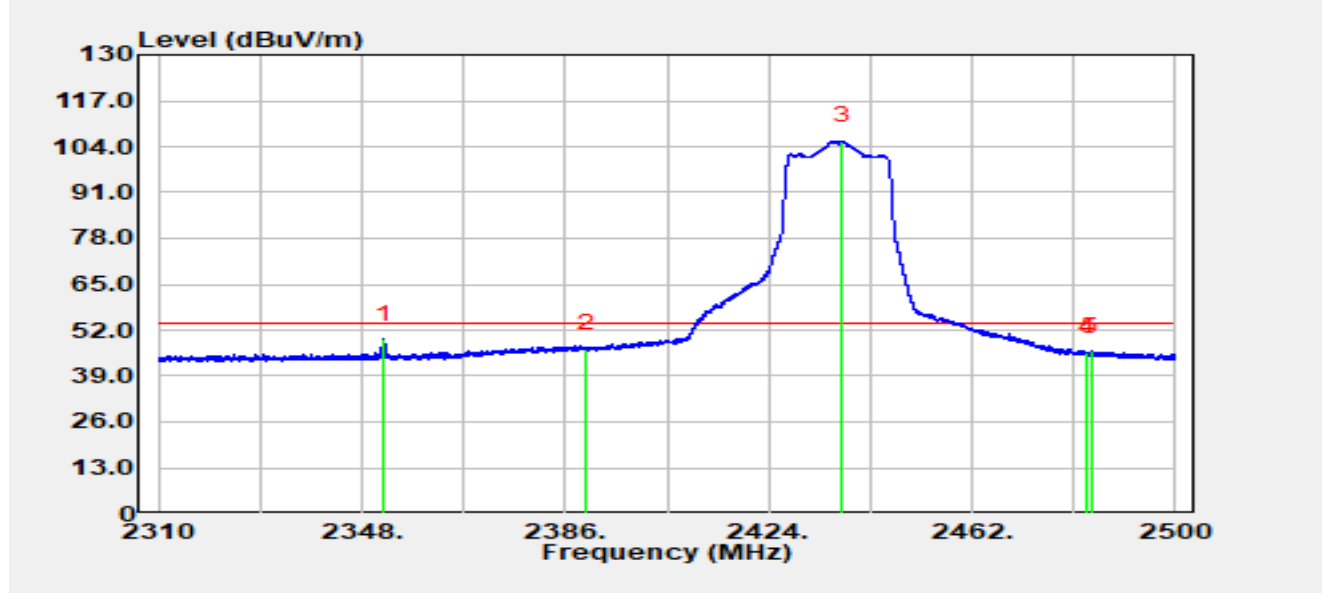


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.01	16.17	33.13	49.30	-4.70	54.00	Average
2		2390.00	13.66	33.04	46.70	-7.30	54.00	Average
3		2437.64	72.70	32.90	105.60	N/A	N/A	Average
4		2483.50	12.95	32.77	45.72	-8.28	54.00	Average
5		2484.29	13.26	32.77	46.03	-7.97	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2437 MHz		

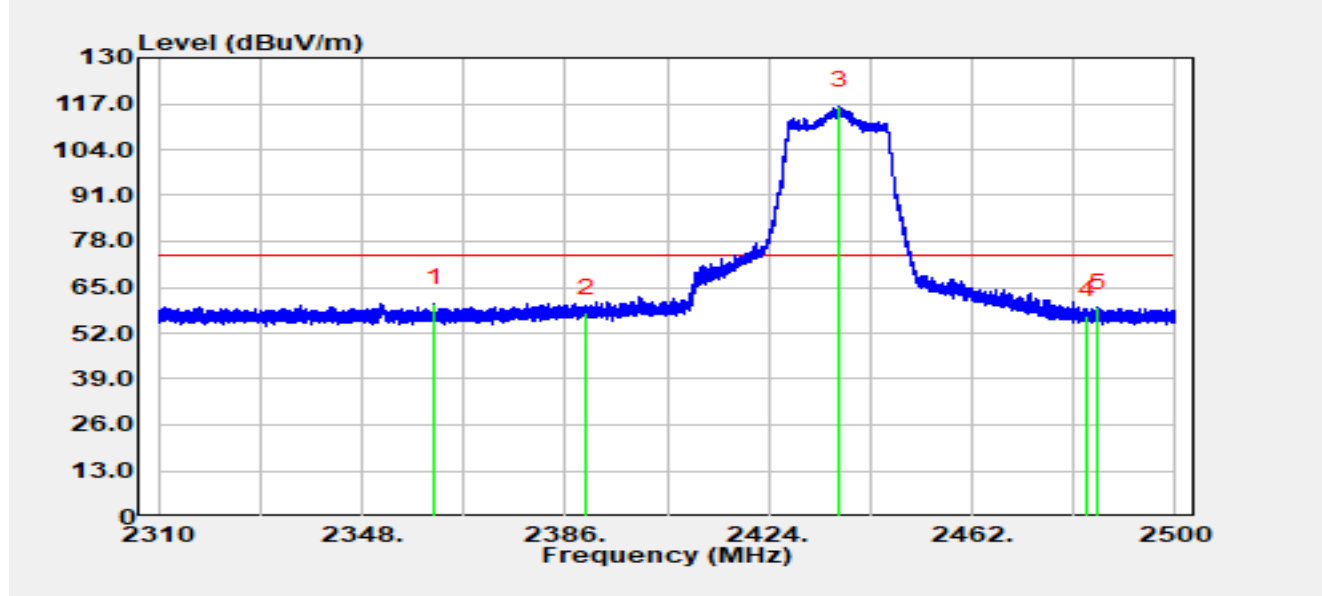


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2361.47	27.41	33.11	60.53	-13.47	74.00	Peak
2		2390.00	24.73	33.04	57.77	-16.23	74.00	Peak
3		2437.32	83.44	32.90	116.34	N/A	N/A	Peak
4		2483.50	24.18	32.77	56.95	-17.05	74.00	Peak
5		2485.58	26.53	32.77	59.30	-14.70	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2437 MHz		

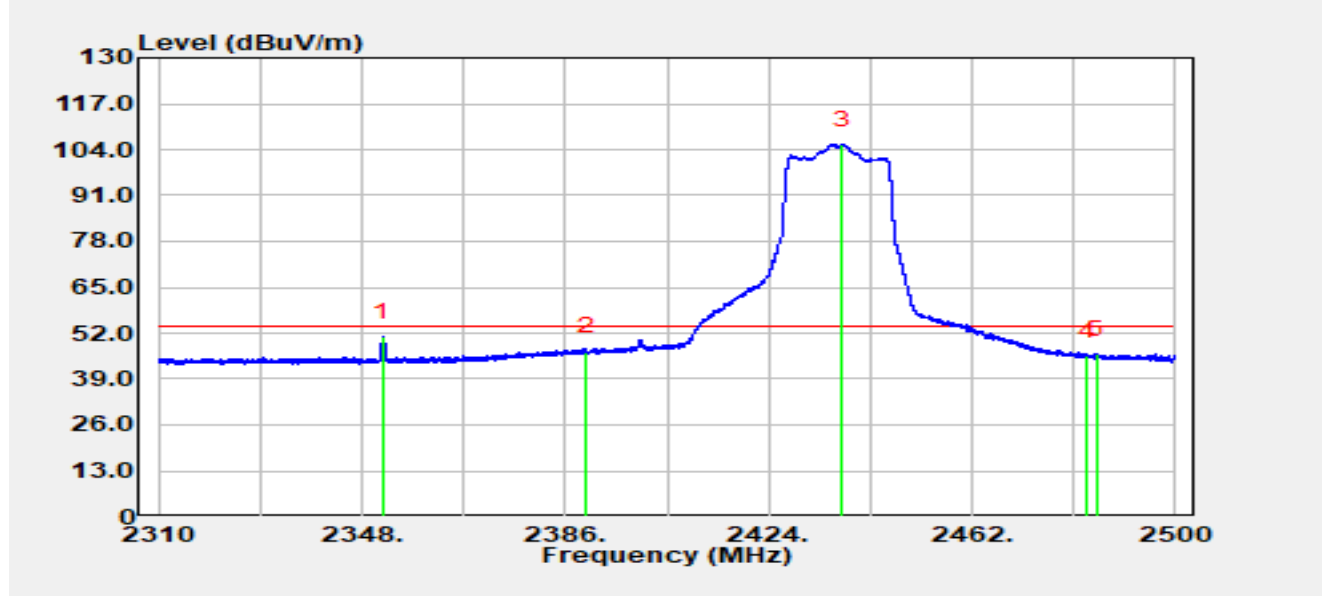


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.88	17.88	33.13	51.01	-2.99	54.00	Average
2		2390.00	13.77	33.04	46.81	-7.19	54.00	Average
3		2437.70	72.56	32.90	105.45	N/A	N/A	Average
4		2483.50	12.64	32.77	45.41	-8.59	54.00	Average
5		2485.14	13.27	32.77	46.04	-7.96	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2442 MHz		

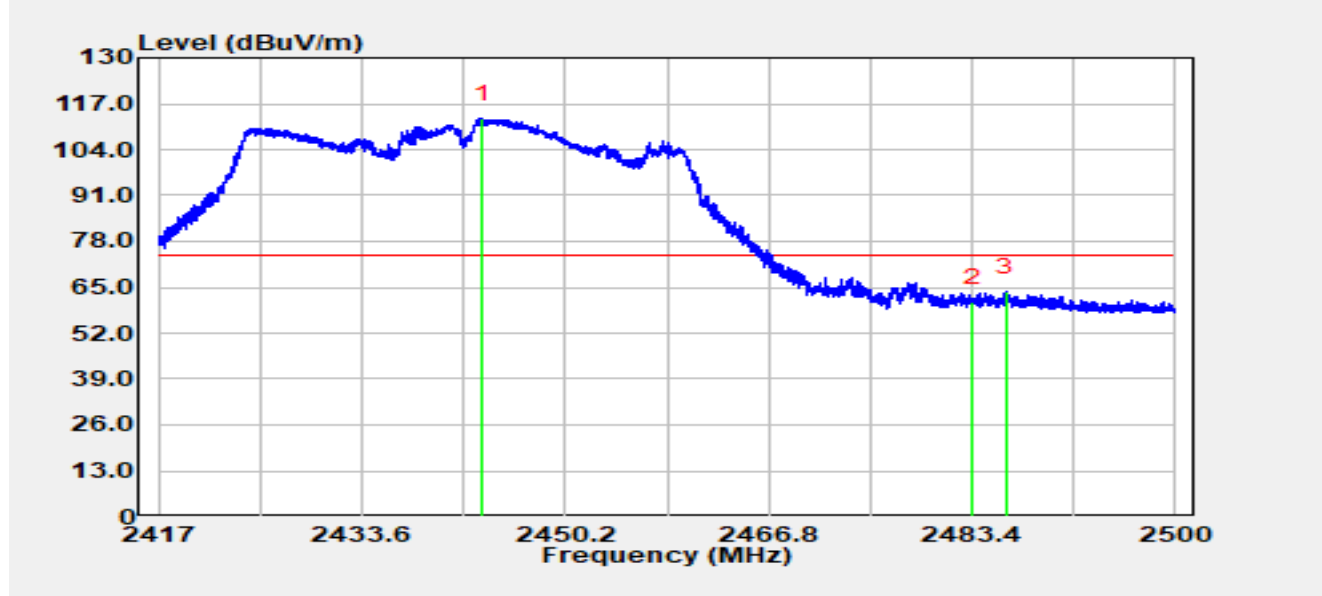


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2443.46	79.78	32.88	112.66	N/A	N/A	Peak
2		2483.50	27.95	32.77	60.72	-13.28	74.00	Peak
3	*	2486.19	31.01	32.77	63.77	-10.23	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2442 MHz		

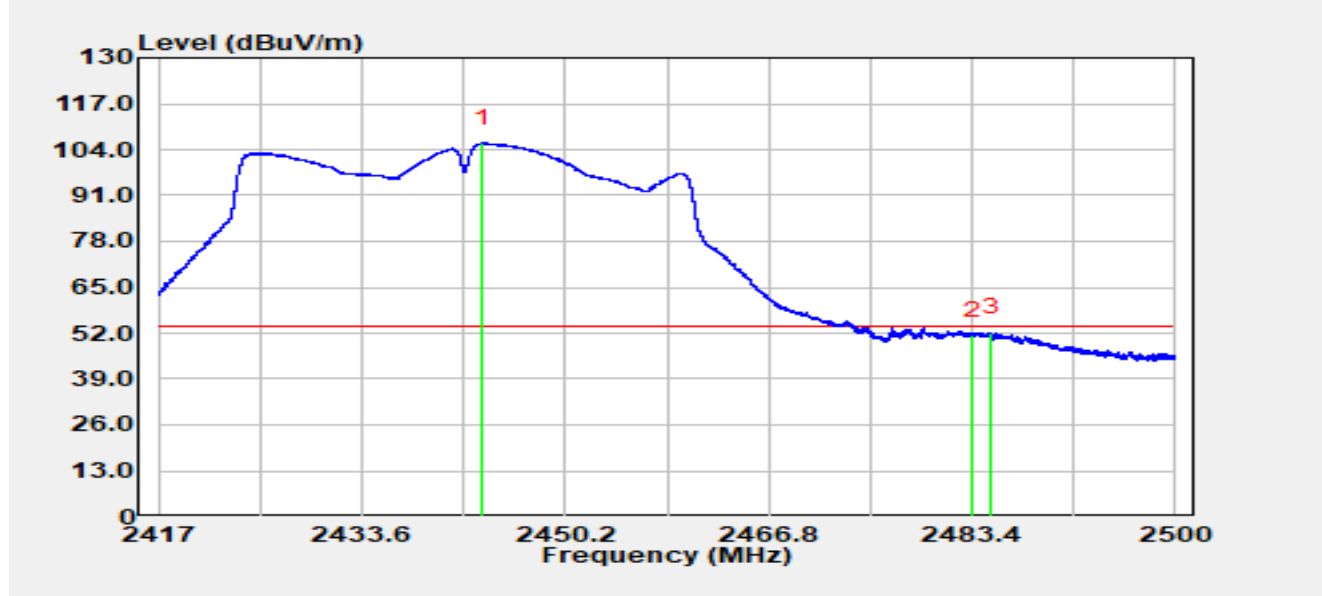


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2443.44	72.95	32.88	105.83	N/A	N/A	Average
2		2483.50	18.66	32.77	51.43	-2.57	54.00	Average
3	*	2484.93	19.42	32.77	52.19	-1.81	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-11
Temperature	23.7 °C	Humidity	31.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2447 MHz		

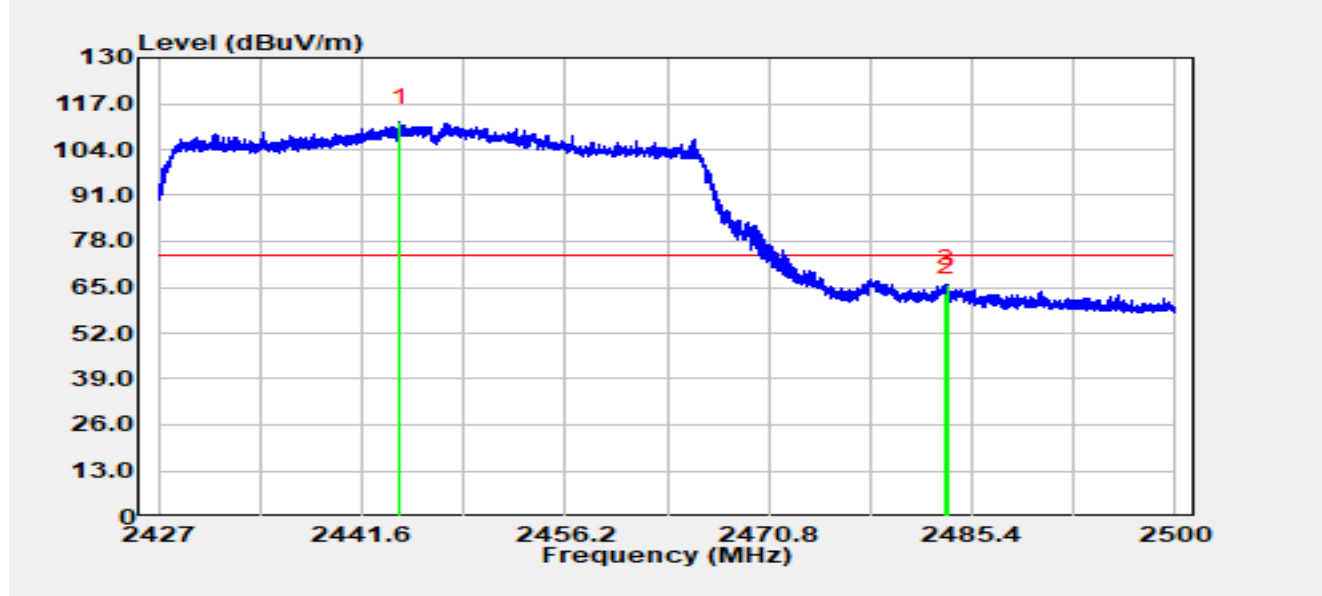


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2444.37	78.80	32.88	111.68	N/A	N/A	Peak
2		2483.50	30.70	32.77	63.47	-10.53	74.00	Peak
3	*	2483.58	33.06	32.77	65.83	-8.17	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-11
Temperature	23.7 °C	Humidity	31.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2447 MHz		

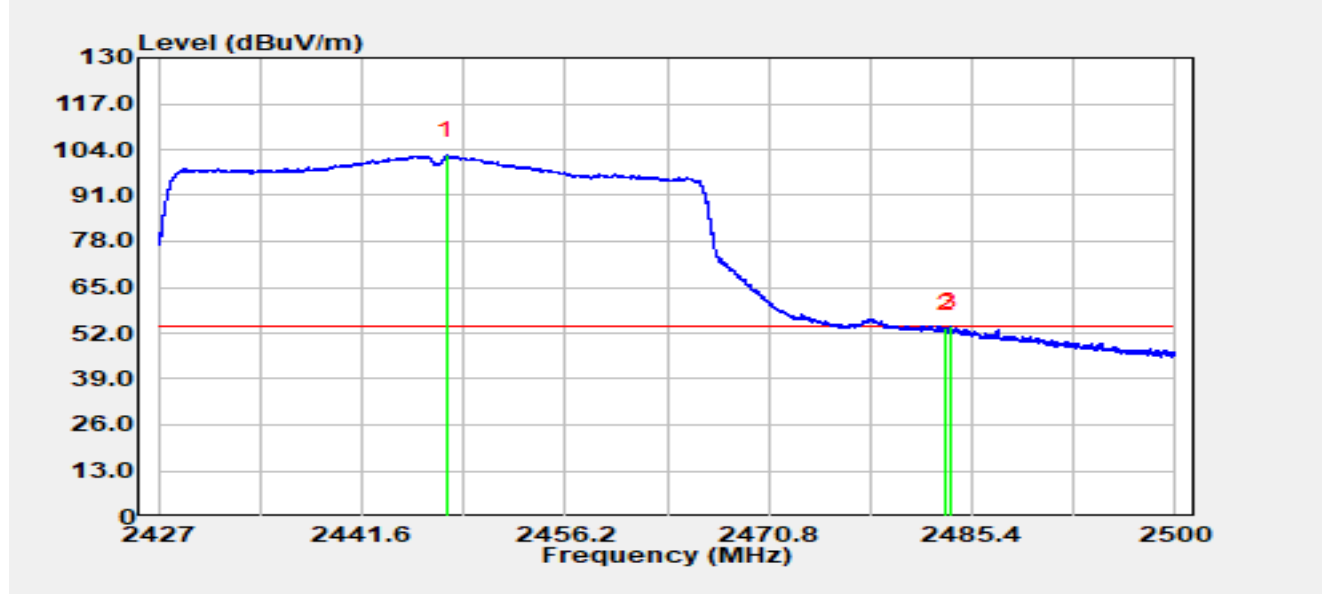


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2447.70	69.44	32.87	102.31	N/A	N/A	Average
2		2483.50	20.48	32.77	53.25	-0.75	54.00	Average
3	*	2483.82	21.03	32.77	53.80	-0.20	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2452 MHz		

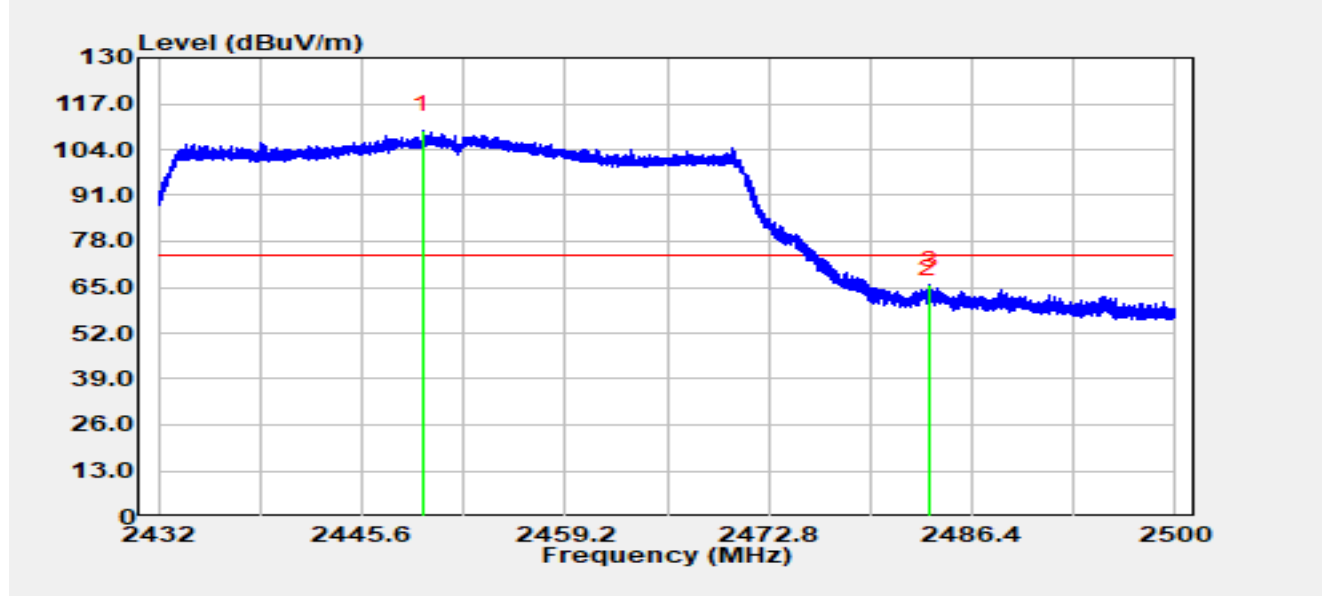


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2449.67	76.76	32.86	109.62	N/A	N/A	Peak
2		2483.50	30.04	32.77	62.81	-11.19	74.00	Peak
3	*	2483.61	32.79	32.77	65.56	-8.44	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 2452 MHz		

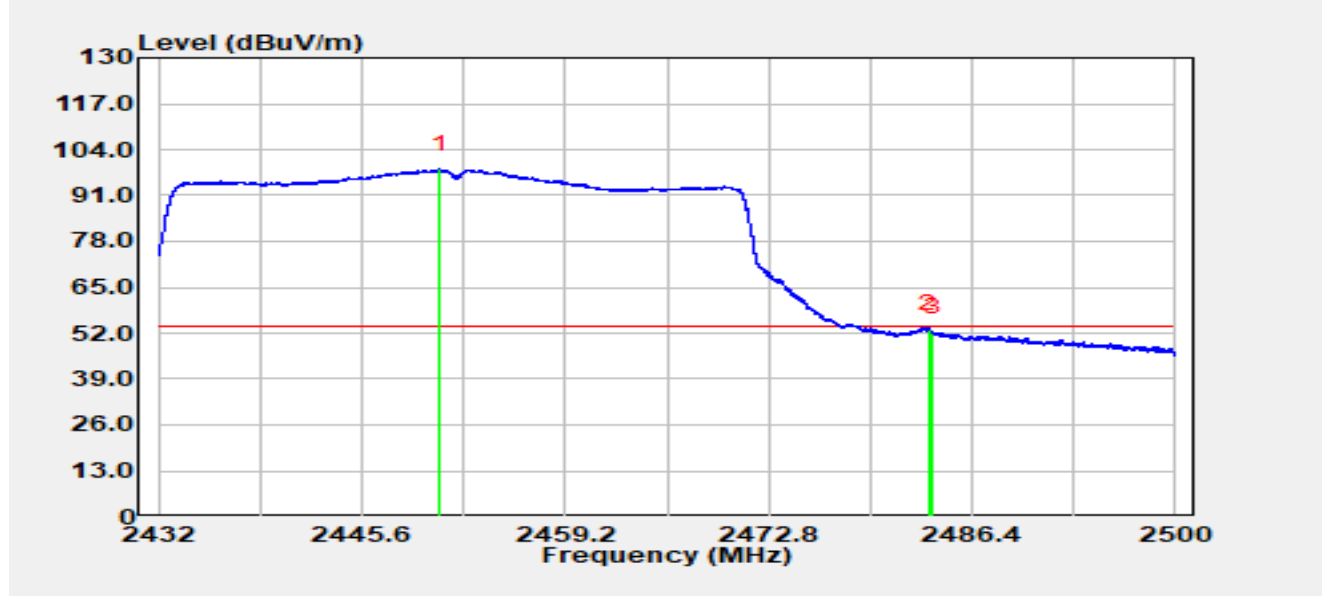


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.78	65.50	32.86	98.36	N/A	N/A	Average
2	*	2483.50	20.43	32.77	53.20	-0.80	54.00	Average
3		2483.77	19.47	32.77	52.24	-1.76	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2452 MHz		

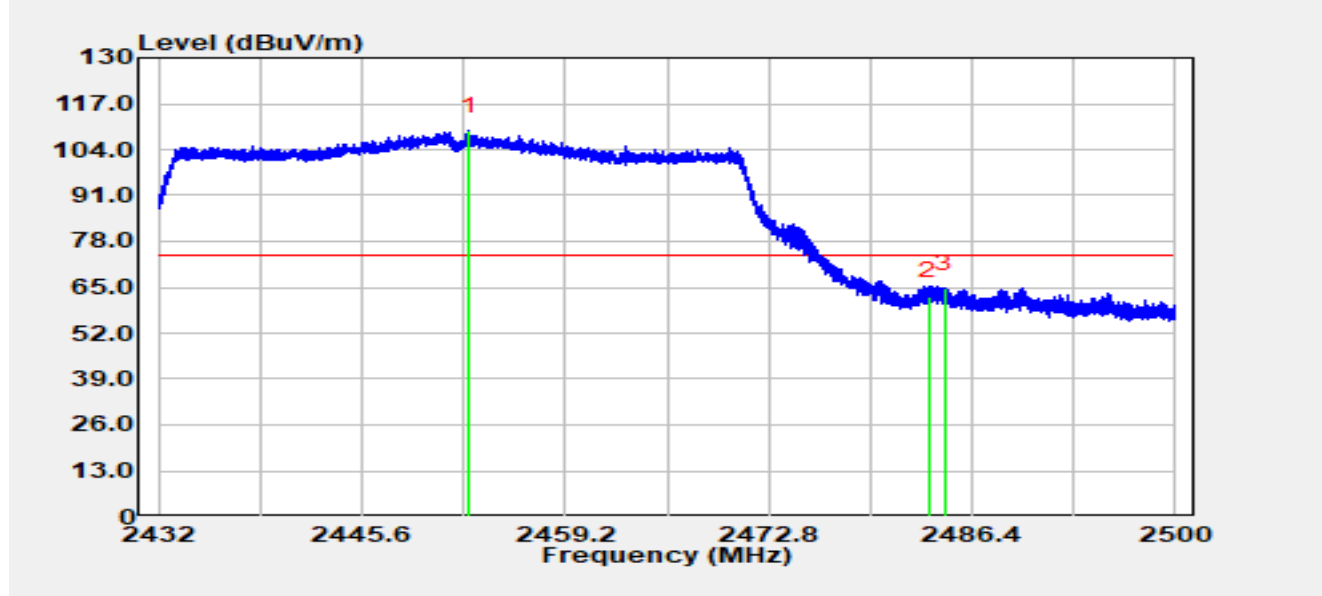


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.76	76.50	32.85	109.36	N/A	N/A	Peak
2		2483.50	29.59	32.77	62.36	-11.64	74.00	Peak
3	*	2484.61	31.84	32.77	64.60	-9.40	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 2452 MHz		

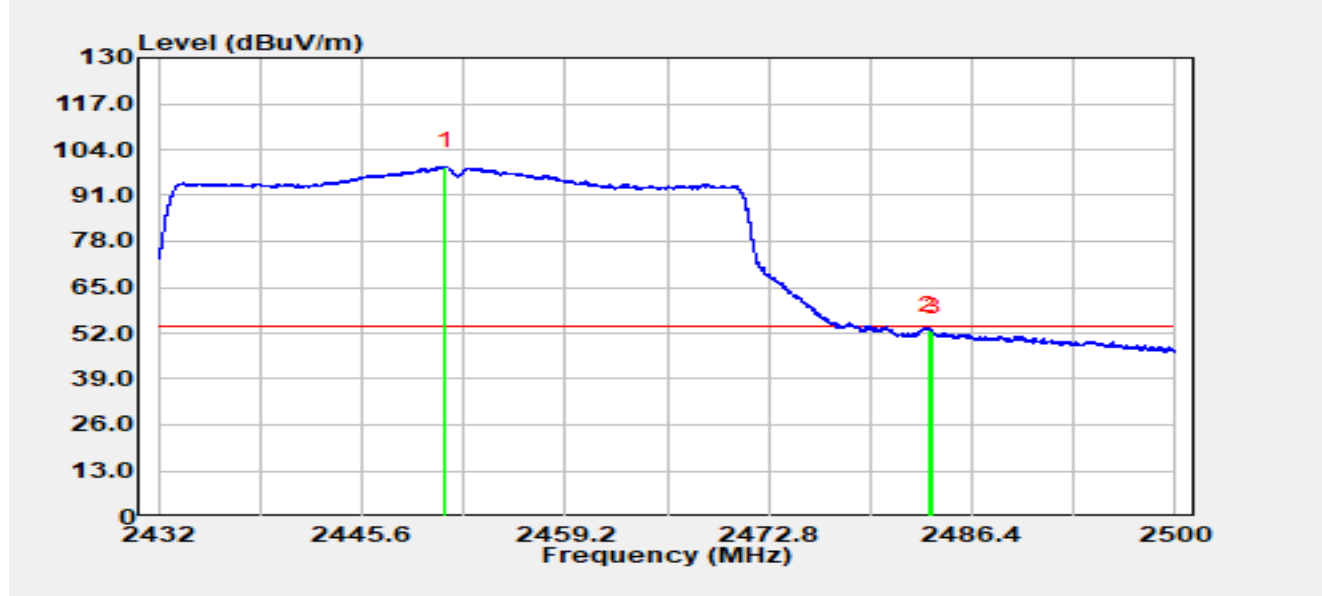


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.14	66.46	32.86	99.32	N/A	N/A	Average
2	*	2483.50	20.08	32.77	52.85	-1.15	54.00	Average
3		2483.74	19.53	32.77	52.30	-1.70	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

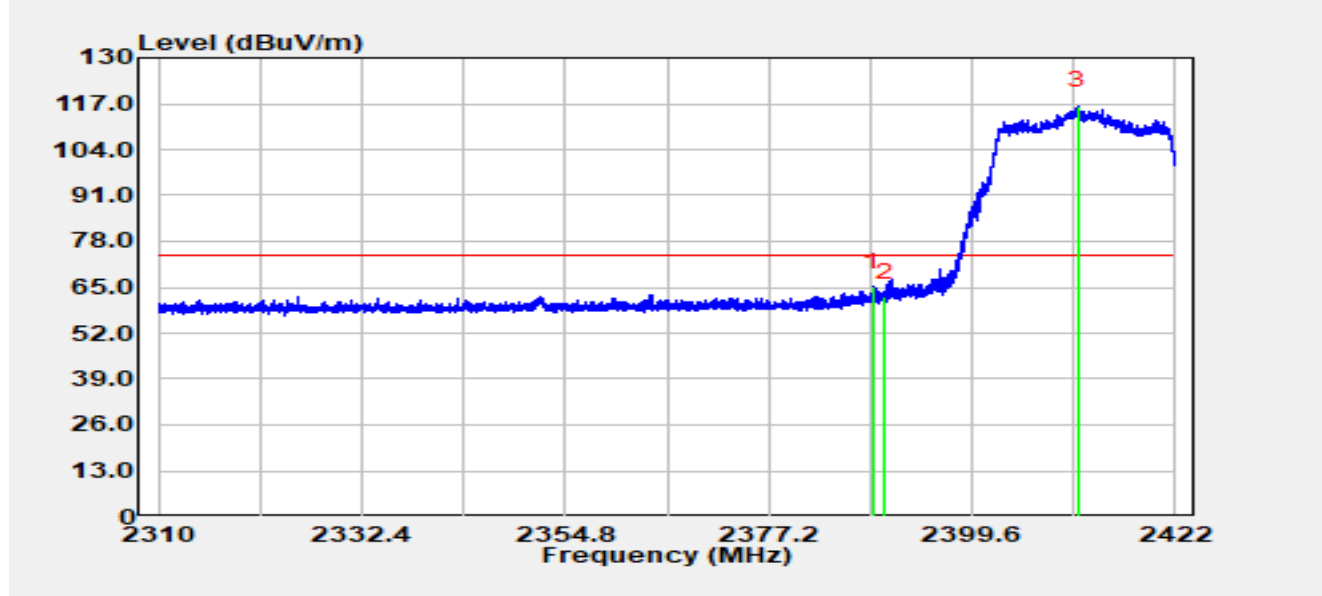


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.67	31.99	33.05	65.04	-8.96	74.00	Peak
2		2390.00	29.10	33.04	62.14	-11.86	74.00	Peak
3		2411.20	83.52	32.96	116.47	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

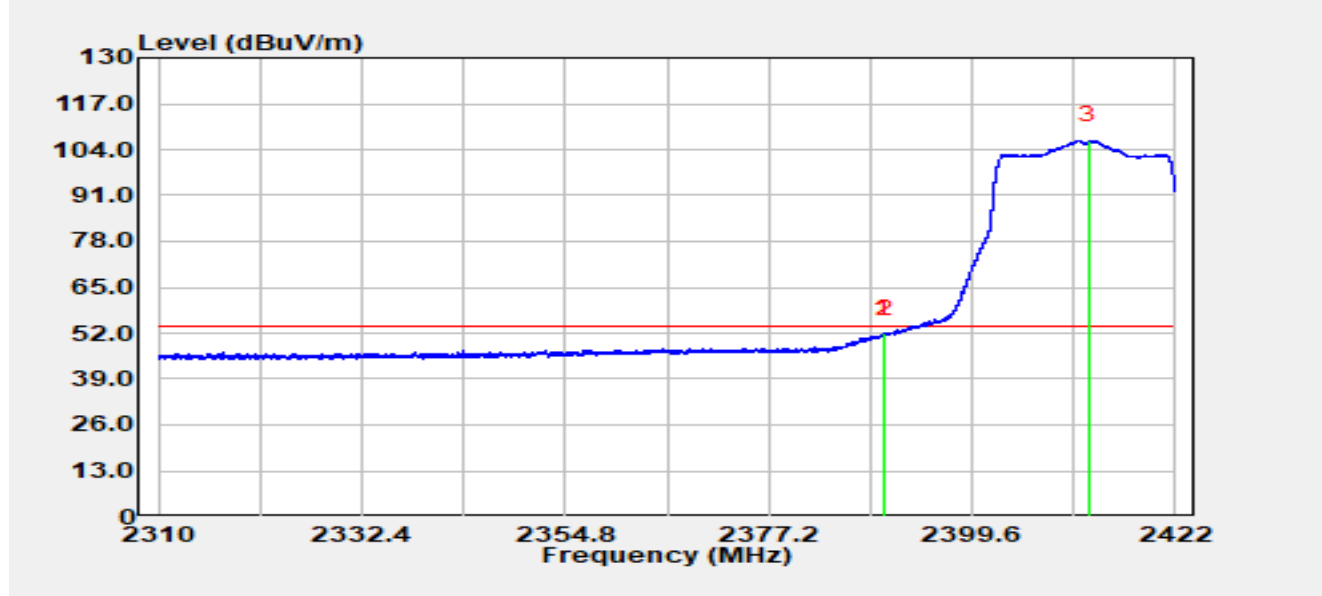


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.88	18.82	33.04	51.86	-2.14	54.00	Average
2		2390.00	18.61	33.04	51.65	-2.35	54.00	Average
3		2412.46	73.64	32.95	106.59	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

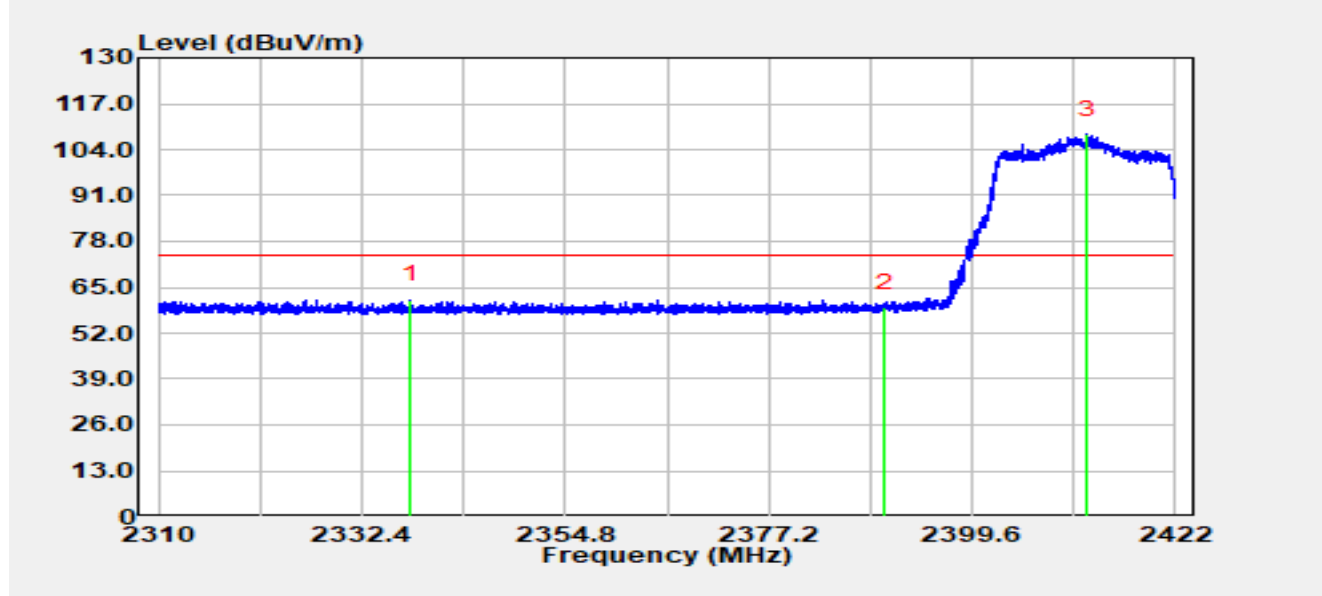


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.81	28.36	33.16	61.52	-12.48	74.00	Peak
2		2390.00	26.29	33.04	59.33	-14.67	74.00	Peak
3		2412.33	75.39	32.95	108.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

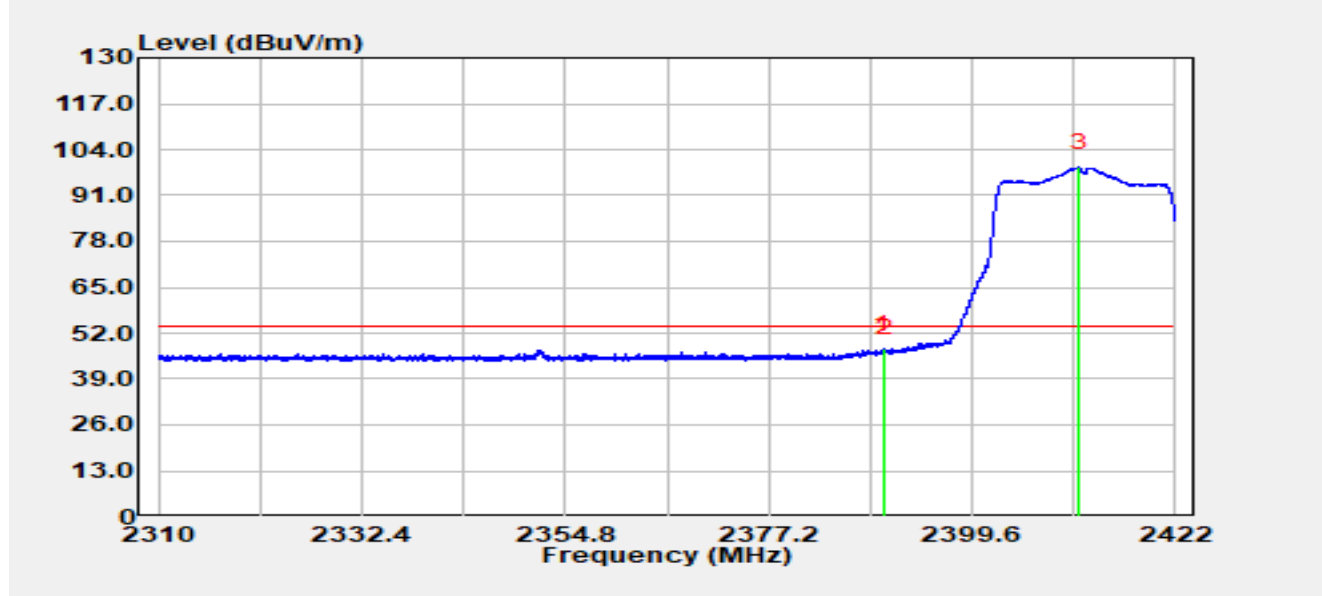


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.90	14.54	33.04	47.58	-6.42	54.00	Average
2		2390.00	13.44	33.04	46.48	-7.52	54.00	Average
3		2411.43	66.08	32.95	99.03	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2417 MHz		

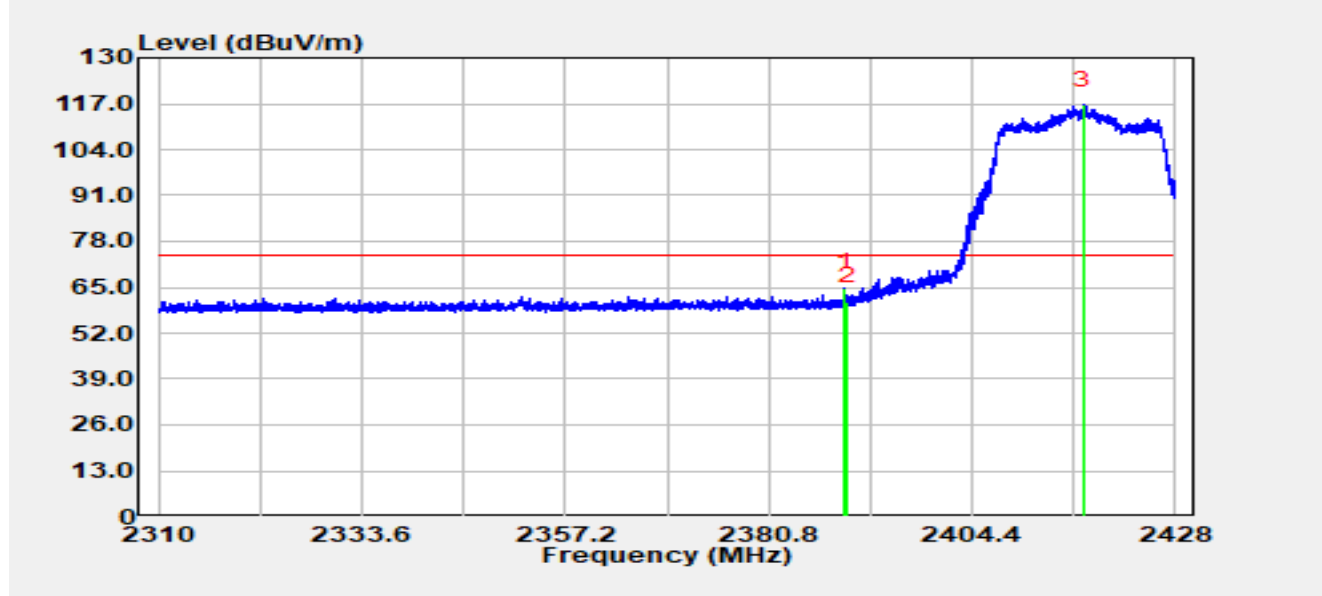


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.67	31.86	33.04	64.91	-9.09	74.00	Peak
2		2390.00	27.88	33.04	60.92	-13.08	74.00	Peak
3		2417.25	83.66	32.93	116.59	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2417 MHz		

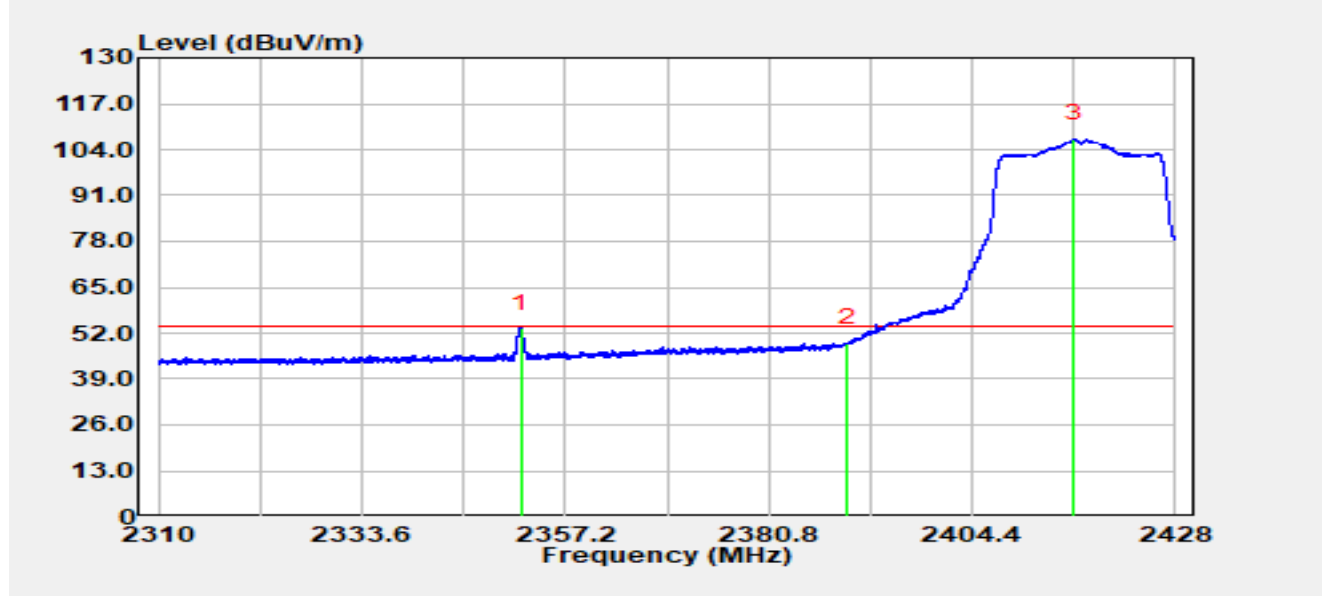


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.01	20.19	33.13	53.32	-0.68	54.00	Average
2		2390.00	16.02	33.04	49.06	-4.94	54.00	Average
3		2416.20	74.04	32.93	106.98	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2437 MHz		

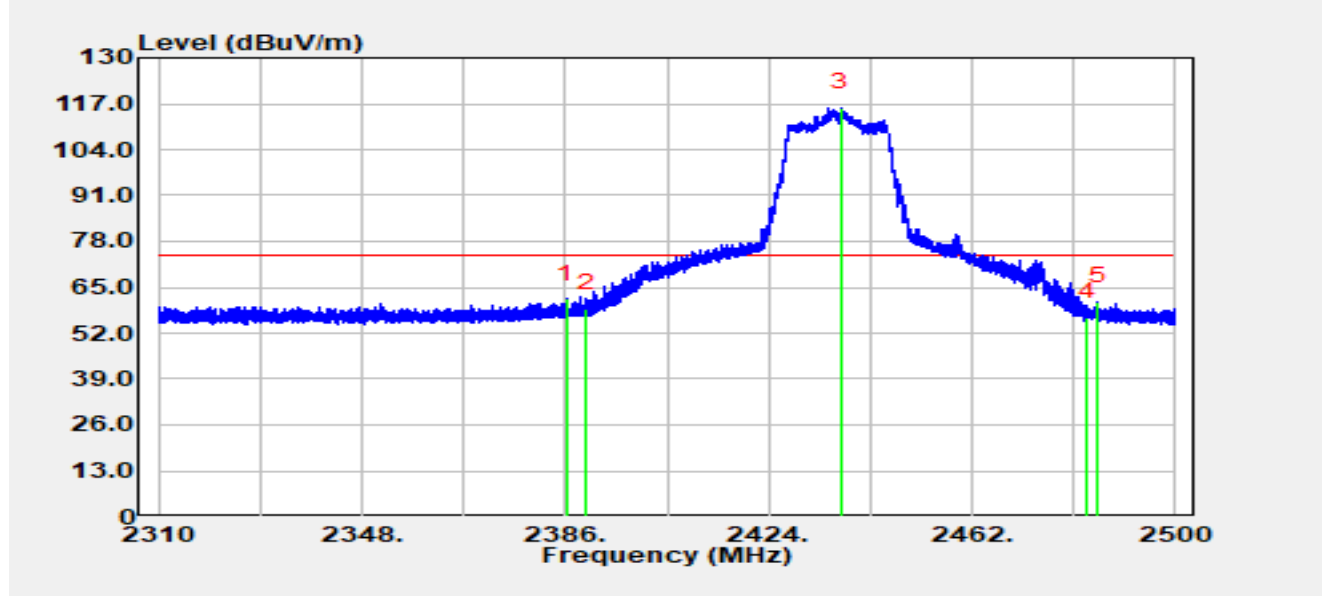


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.21	28.51	33.06	61.57	-12.43	74.00	Peak
2		2390.00	25.87	33.04	58.91	-15.09	74.00	Peak
3		2437.49	82.95	32.90	115.85	N/A	N/A	Peak
4		2483.50	23.71	32.77	56.48	-17.52	74.00	Peak
5		2485.54	28.08	32.77	60.85	-13.15	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2437 MHz		

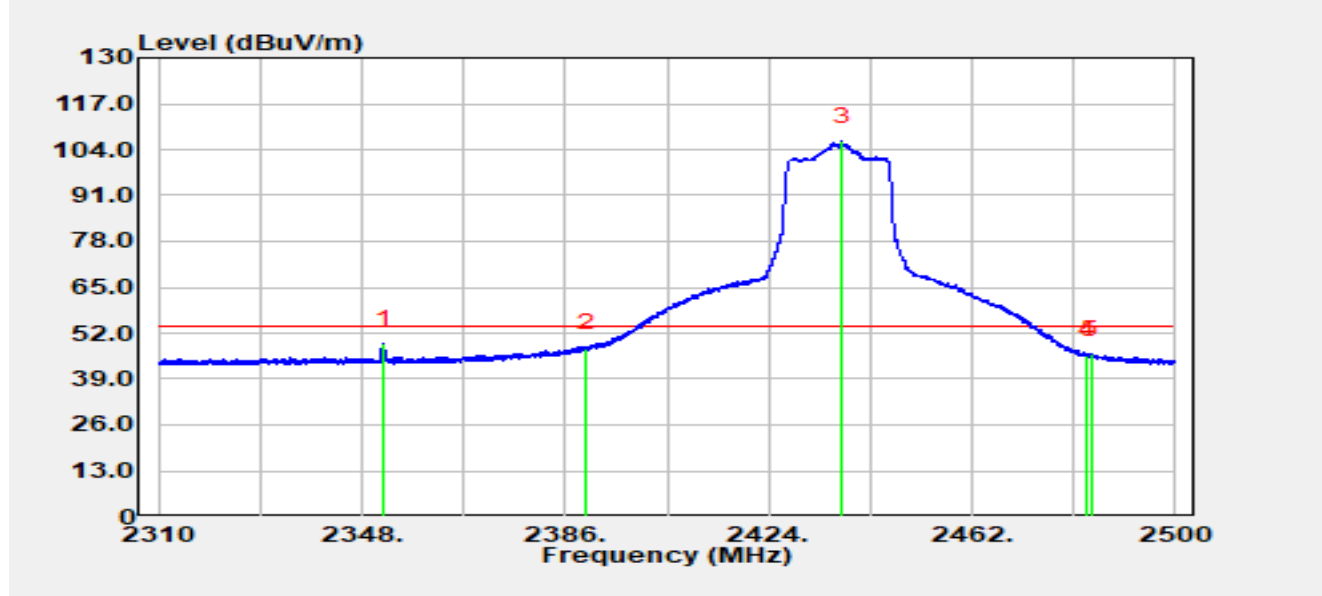


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.05	15.90	33.13	49.03	-4.97	54.00	Average
2		2390.00	14.78	33.04	47.82	-6.18	54.00	Average
3		2437.60	73.32	32.90	106.21	N/A	N/A	Average
4		2483.50	13.07	32.77	45.84	-8.16	54.00	Average
5		2484.29	13.34	32.77	46.11	-7.89	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2437 MHz		

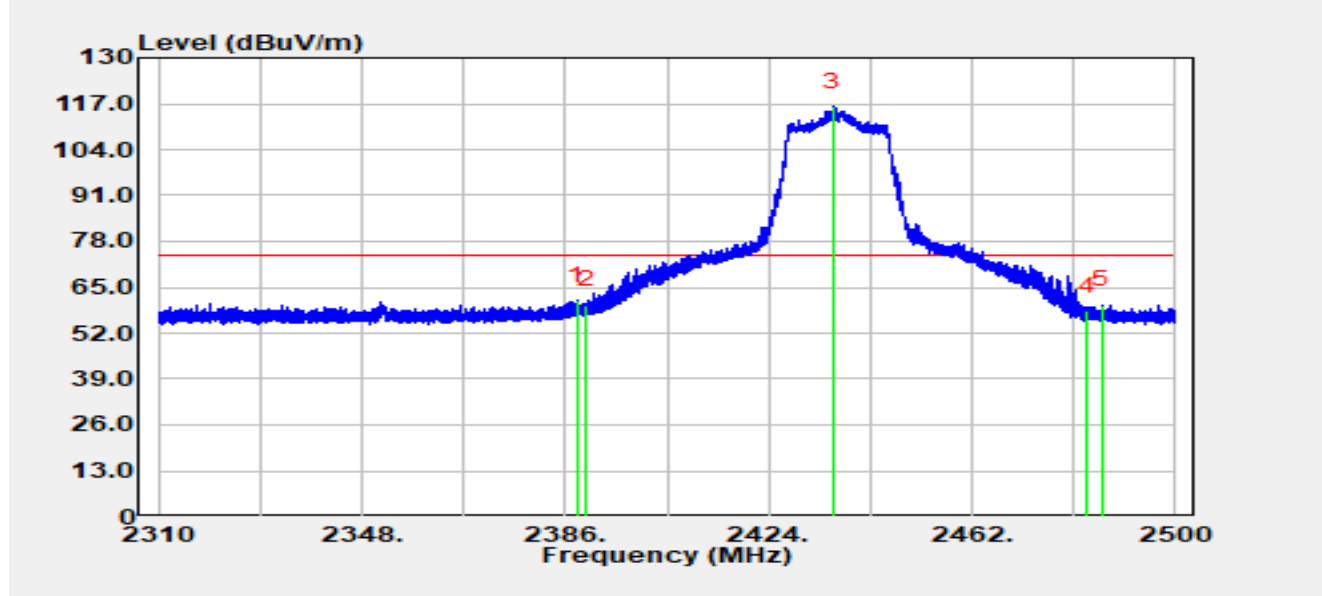


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.20	28.18	33.05	61.23	-12.77	74.00	Peak
2		2390.00	26.99	33.04	60.03	-13.97	74.00	Peak
3		2435.95	83.33	32.90	116.23	N/A	N/A	Peak
4		2483.50	25.39	32.77	58.15	-15.85	74.00	Peak
5		2486.28	27.28	32.76	60.04	-13.96	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2437 MHz		

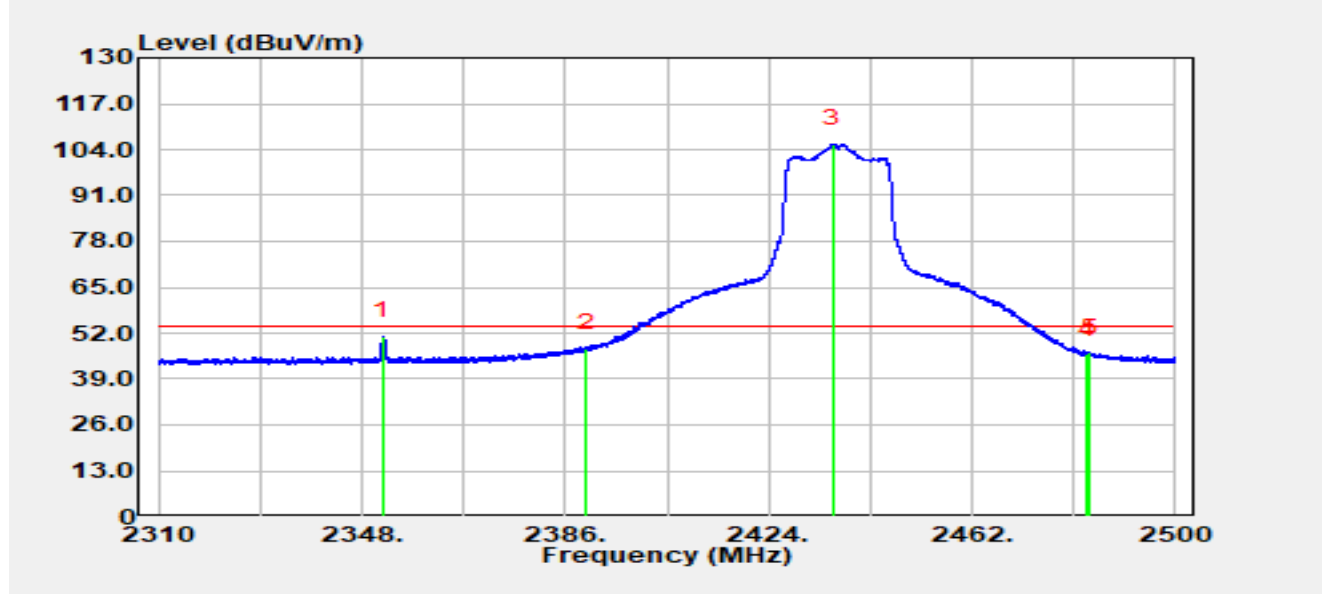


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.91	18.12	33.13	51.25	-2.75	54.00	Average
2		2390.00	14.70	33.04	47.74	-6.26	54.00	Average
3		2435.99	72.70	32.90	105.60	N/A	N/A	Average
4		2483.50	13.16	32.77	45.93	-8.07	54.00	Average
5		2484.00	13.76	32.77	46.53	-7.47	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

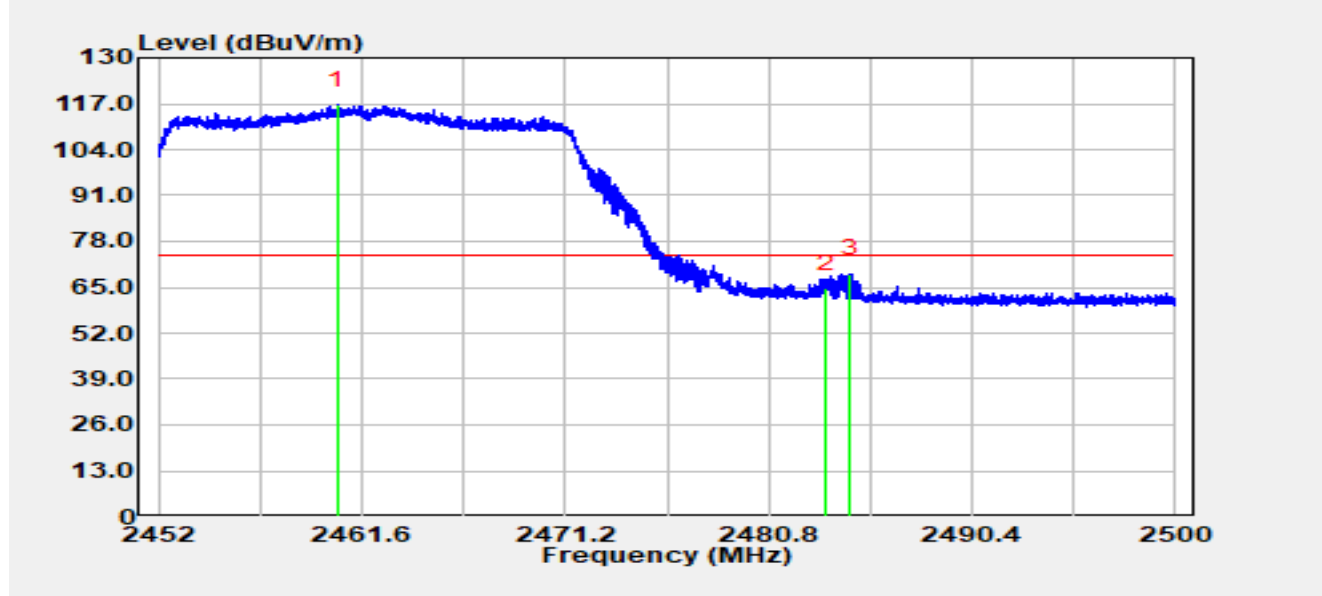


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.42	83.83	32.83	116.66	N/A	N/A	Peak
2		2483.50	31.89	32.77	64.66	-9.34	74.00	Peak
3	*	2484.67	35.96	32.77	68.73	-5.27	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

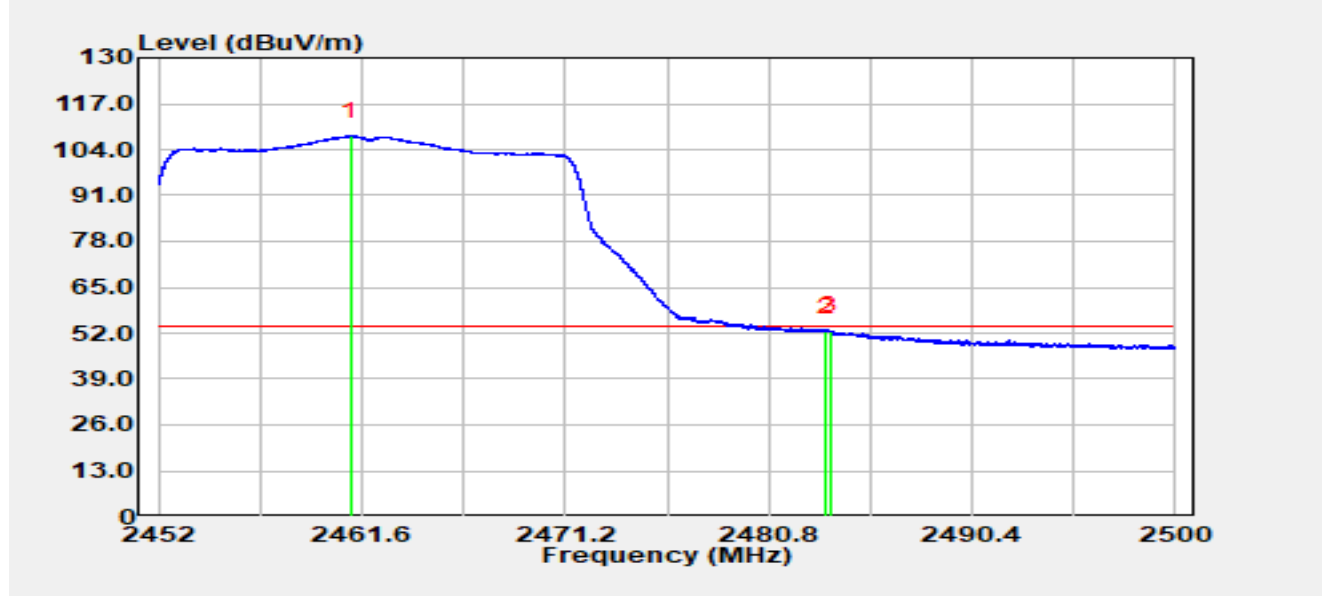


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.06	75.06	32.83	107.89	N/A	N/A	Average
2		2483.50	19.63	32.77	52.40	-1.60	54.00	Average
3	*	2483.67	19.90	32.77	52.67	-1.33	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

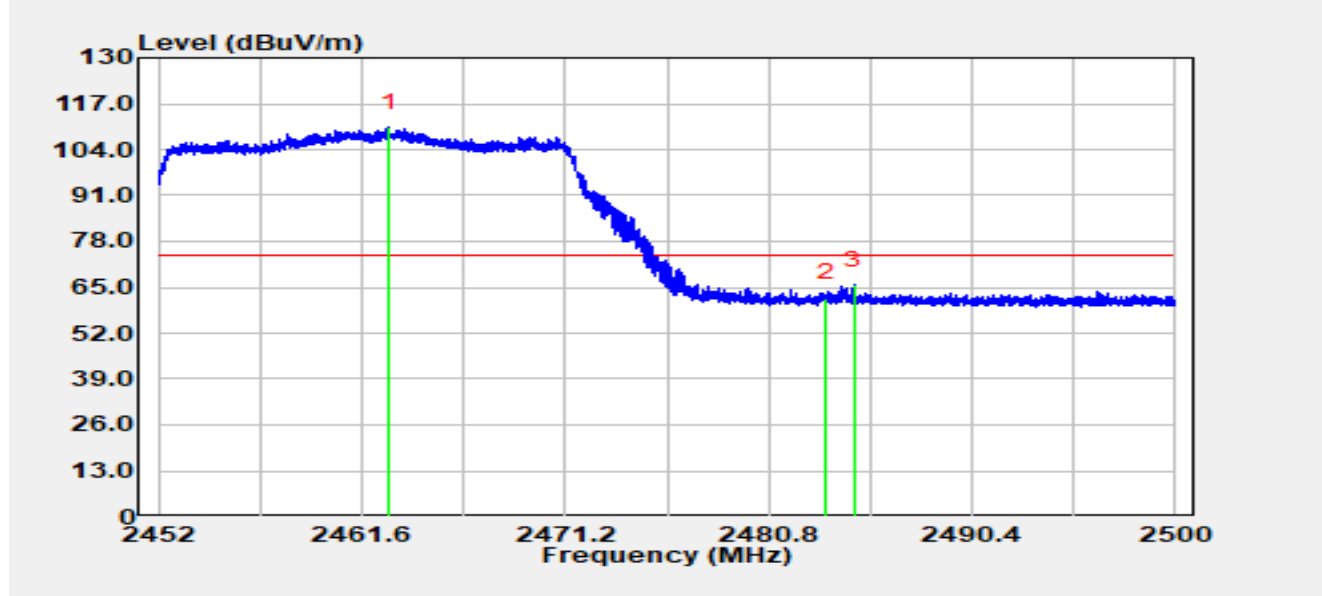


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.88	77.46	32.82	110.28	N/A	N/A	Peak
2		2483.50	29.21	32.77	61.98	-12.02	74.00	Peak
3	*	2484.81	32.90	32.77	65.67	-8.33	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

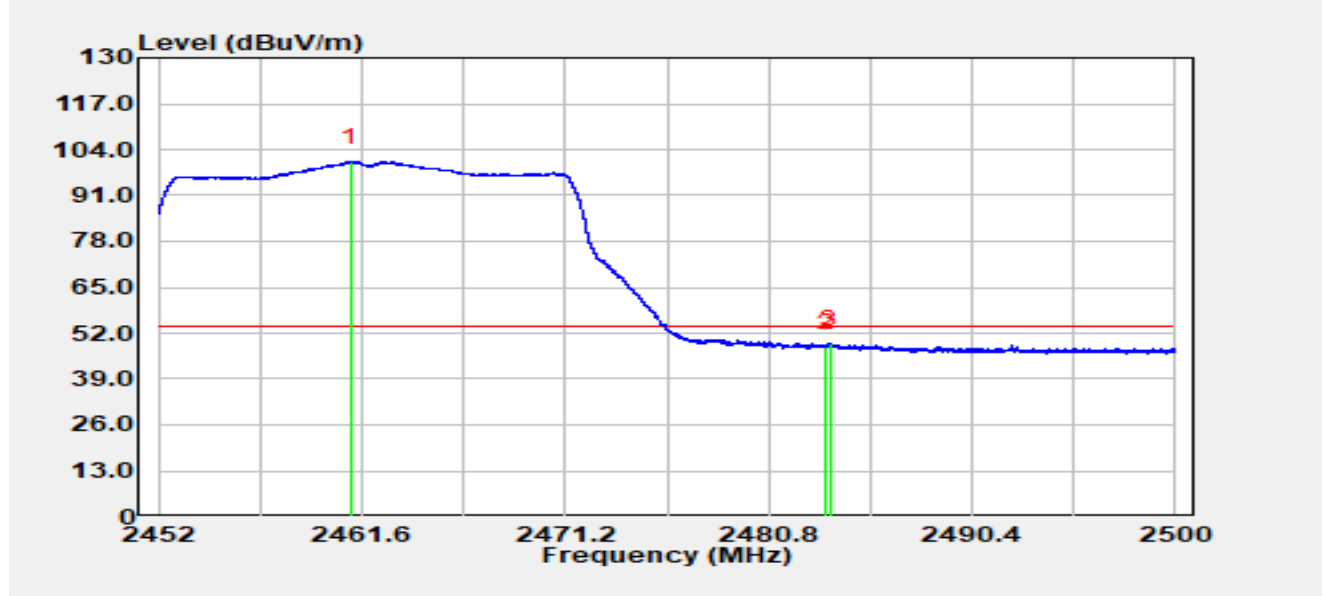


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.04	67.69	32.83	100.52	N/A	N/A	Average
2		2483.50	15.30	32.77	48.07	-5.93	54.00	Average
3	*	2483.68	16.21	32.77	48.98	-5.02	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

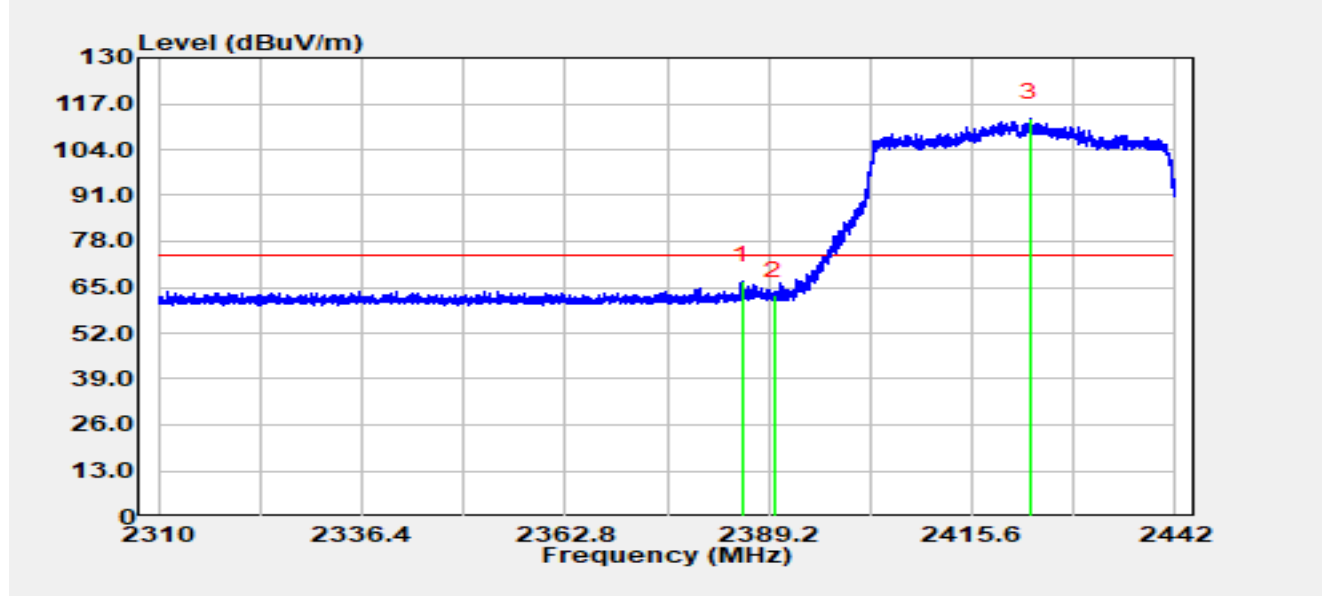


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.70	33.89	33.06	66.95	-7.05	74.00	Peak
2		2390.00	29.56	33.04	62.60	-11.40	74.00	Peak
3		2423.07	79.95	32.92	112.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

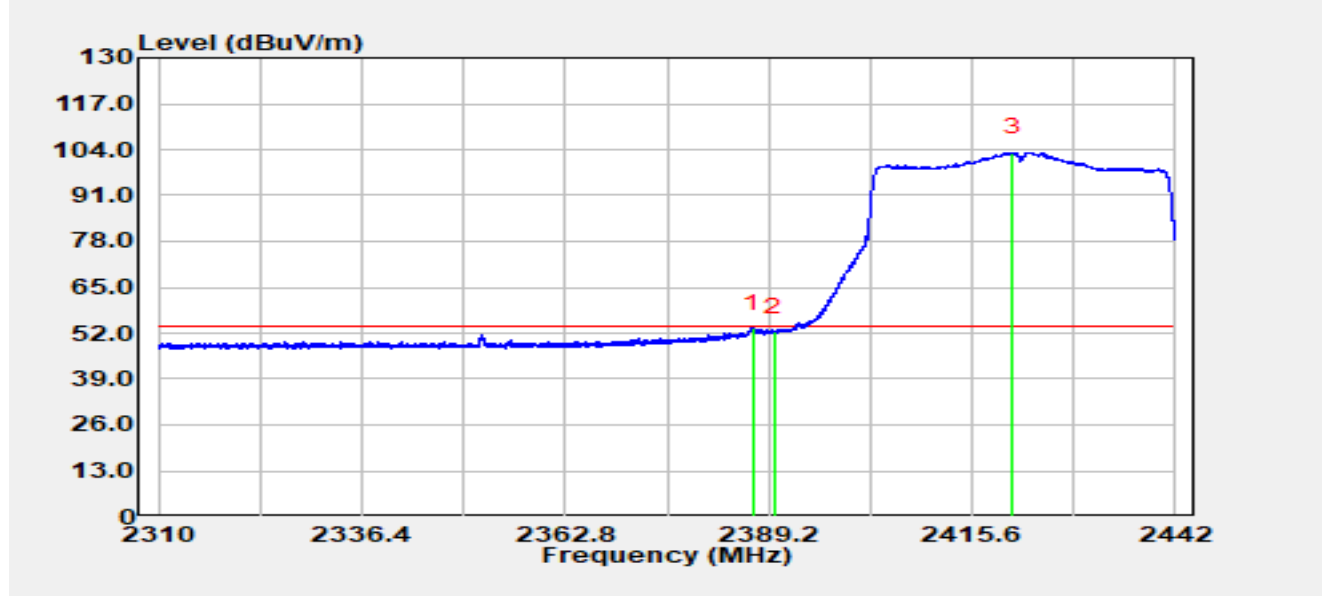


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.14	20.30	33.05	53.35	-0.65	54.00	Average
2		2390.00	19.36	33.04	52.40	-1.60	54.00	Average
3		2420.88	70.29	32.92	103.21	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

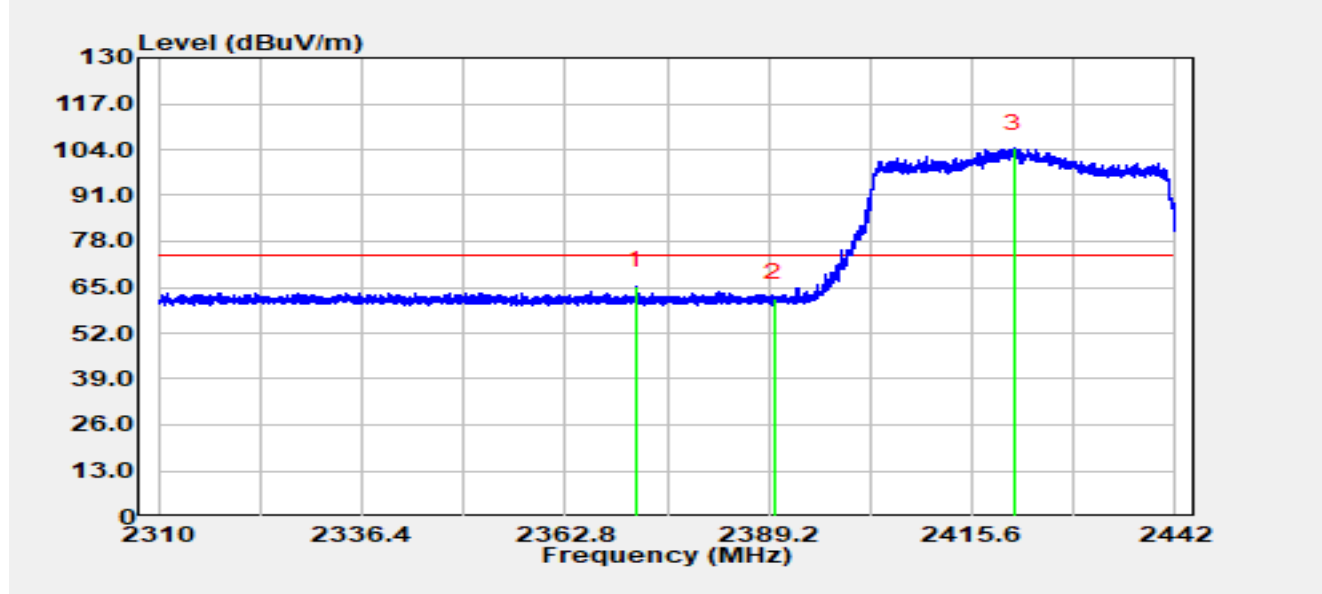


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2371.99	32.16	33.09	65.25	-8.75	74.00	Peak
2		2390.00	28.96	33.04	62.00	-12.00	74.00	Peak
3		2421.04	71.35	32.92	104.27	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

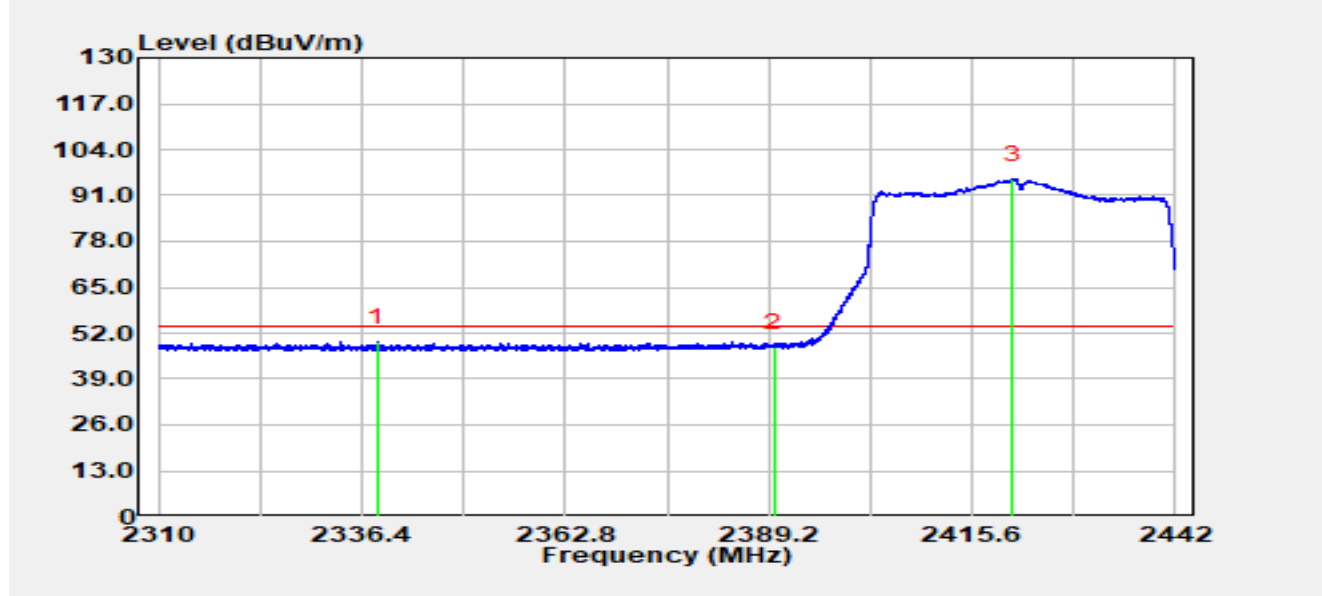


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2338.39	16.35	33.16	49.51	-4.49	54.00	Average
2		2390.00	14.98	33.04	48.02	-5.98	54.00	Average
3		2420.95	62.68	32.92	95.60	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2427 MHz		

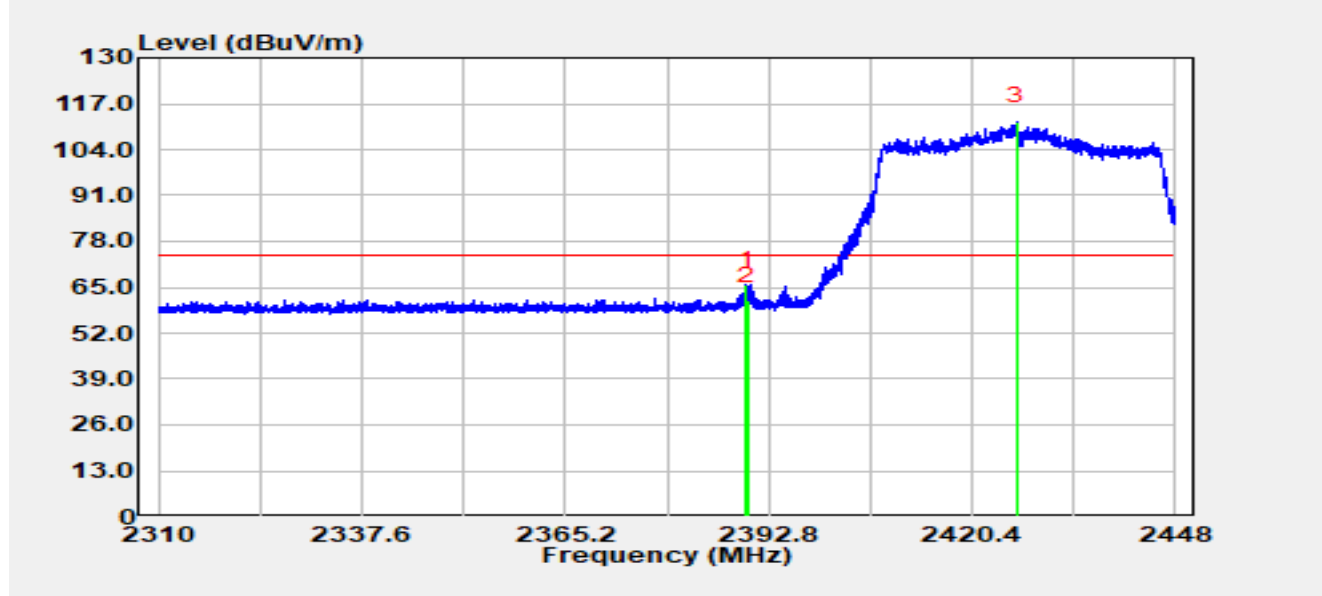


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.68	32.60	33.04	65.64	-8.36	74.00	Peak
2		2390.00	28.05	33.04	61.10	-12.90	74.00	Peak
3		2426.39	79.07	32.91	111.99	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2427 MHz		

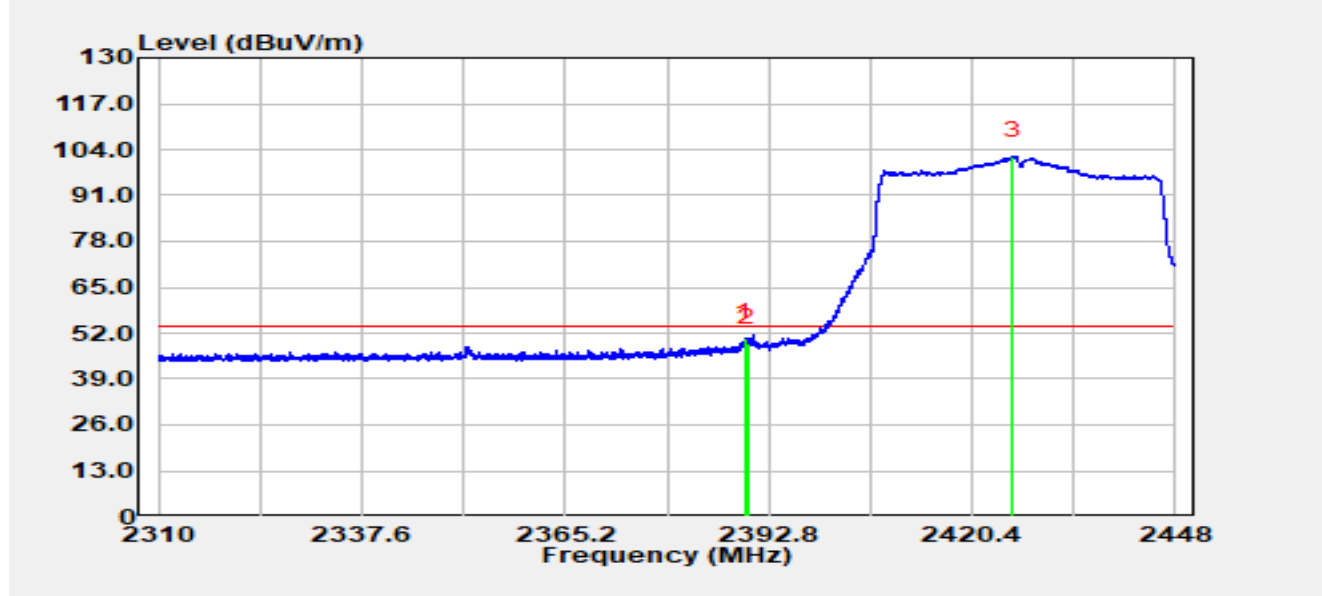


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.64	17.62	33.04	50.66	-3.34	54.00	Average
2		2390.00	16.11	33.04	49.15	-4.85	54.00	Average
3		2425.82	69.15	32.91	102.06	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2432 MHz		

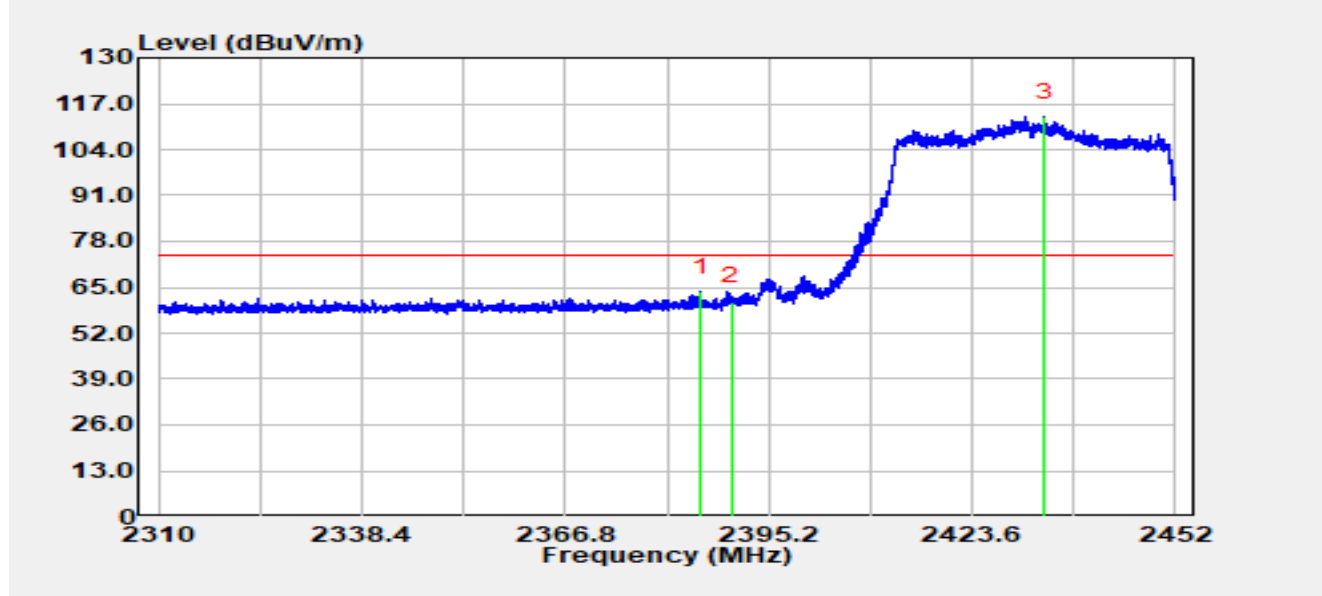


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.79	30.54	33.06	63.60	-10.40	74.00	Peak
2		2390.00	28.00	33.04	61.04	-12.96	74.00	Peak
3		2433.71	80.39	32.90	113.29	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2432 MHz		

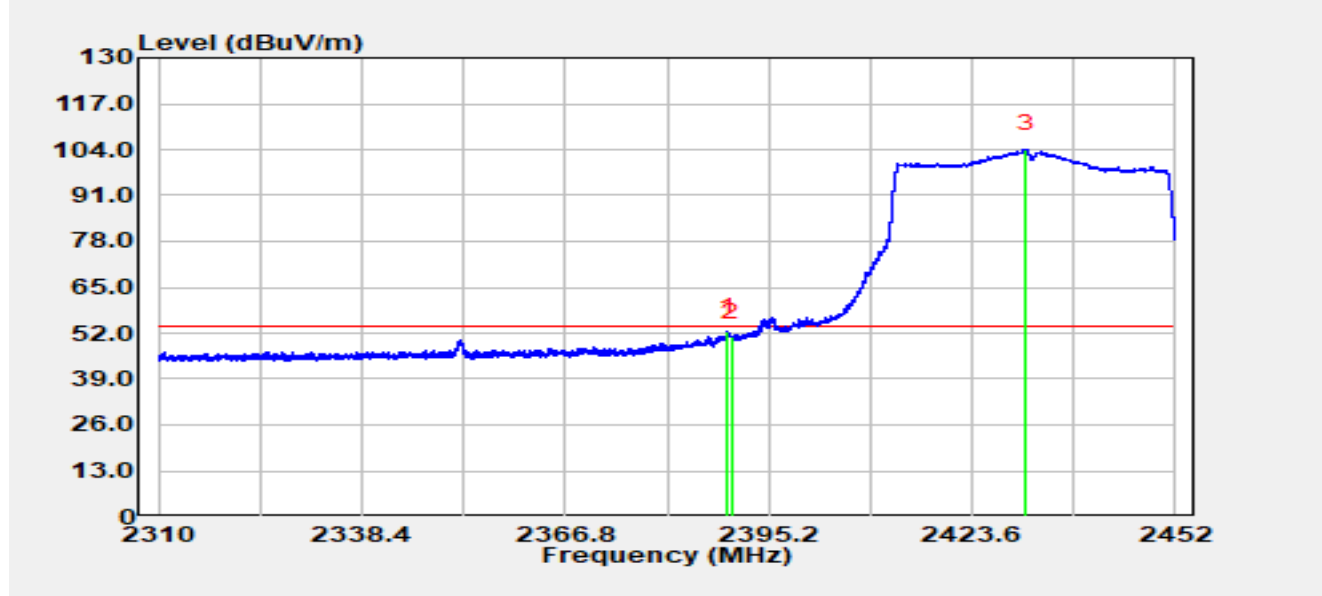


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.39	19.40	33.04	52.44	-1.56	54.00	Average
2		2390.00	17.89	33.04	50.93	-3.07	54.00	Average
3		2431.21	71.17	32.91	104.08	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2437 MHz		

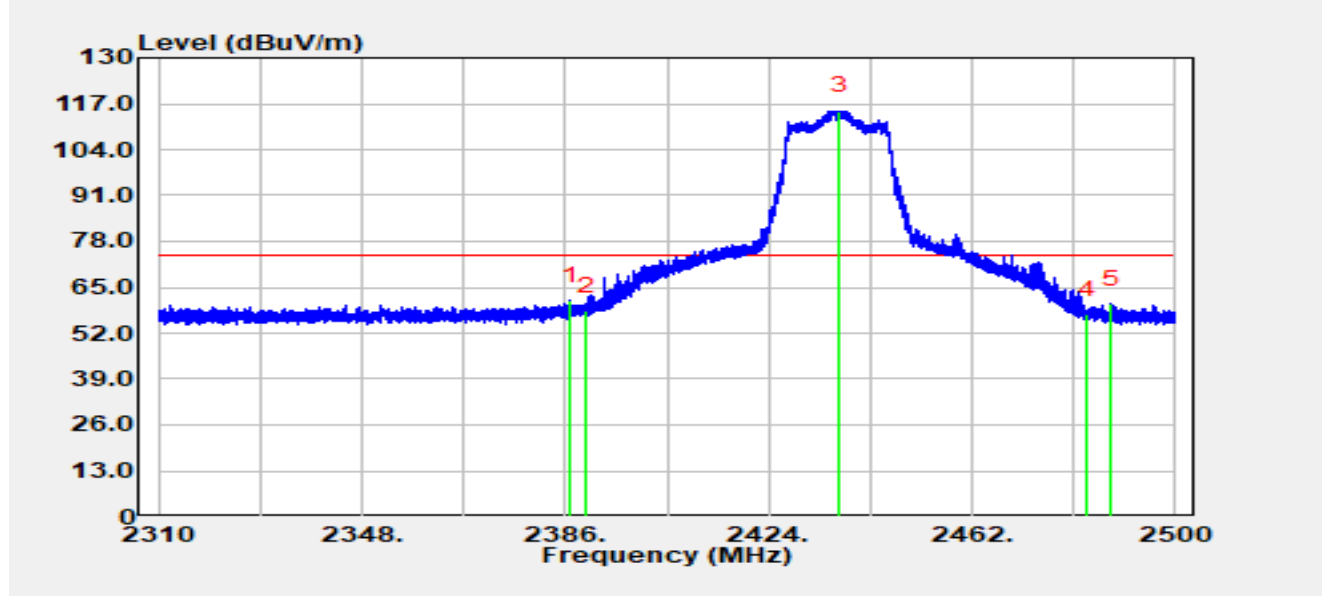


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.87	28.08	33.05	61.14	-12.86	74.00	Peak
2		2390.00	25.13	33.04	58.17	-15.83	74.00	Peak
3		2437.17	82.09	32.90	114.99	N/A	N/A	Peak
4		2483.50	24.47	32.77	57.24	-16.76	74.00	Peak
5		2487.97	27.50	32.76	60.27	-13.73	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2437 MHz		

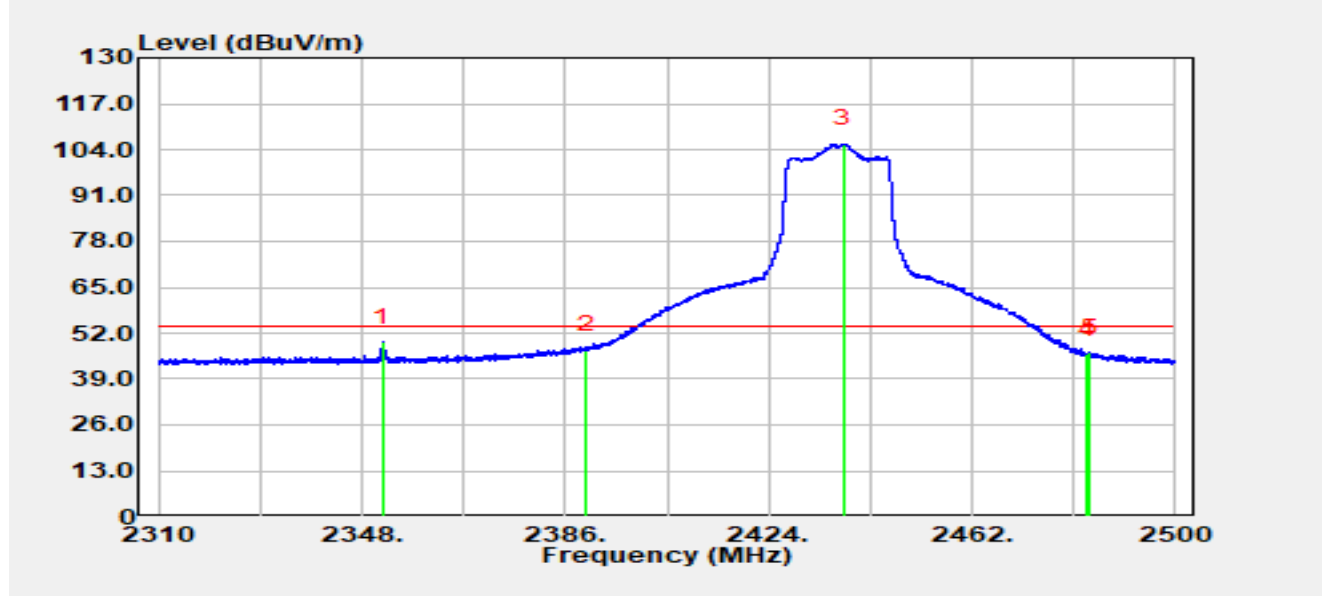


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.95	16.28	33.13	49.41	-4.59	54.00	Average
2		2390.00	14.26	33.04	47.30	-6.70	54.00	Average
3		2438.04	72.69	32.90	105.58	N/A	N/A	Average
4		2483.50	13.25	32.77	46.01	-7.99	54.00	Average
5		2484.10	13.79	32.77	46.56	-7.44	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2437 MHz		

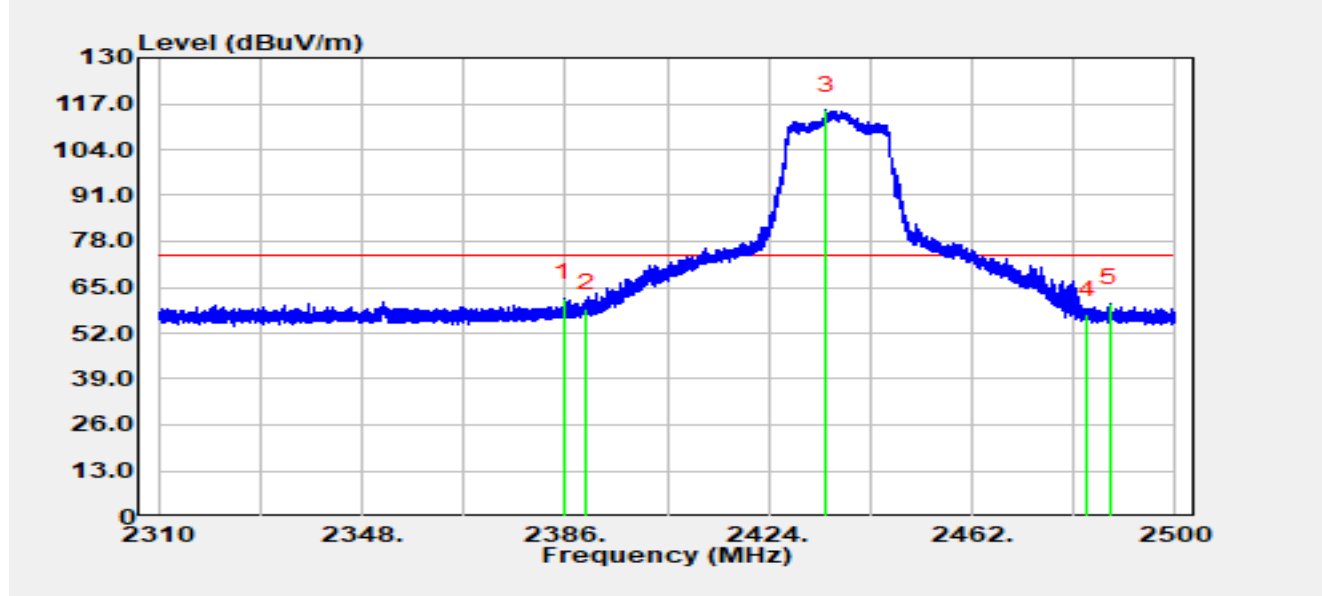


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.83	28.76	33.06	61.82	-12.18	74.00	Peak
2		2390.00	25.99	33.04	59.03	-14.97	74.00	Peak
3		2434.83	82.26	32.90	115.16	N/A	N/A	Peak
4		2483.50	24.56	32.77	57.32	-16.68	74.00	Peak
5		2487.69	27.67	32.76	60.43	-13.57	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-25
Temperature	17.7 °C	Humidity	34.4%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2437 MHz		

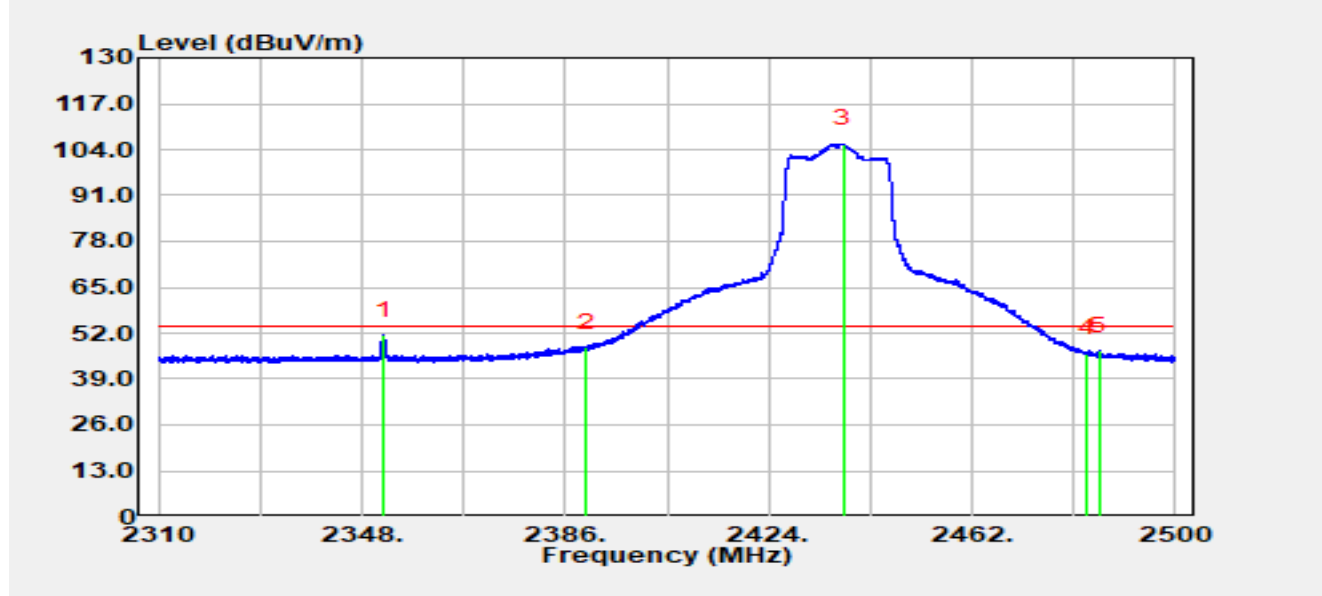


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.05	18.38	33.13	51.51	-2.49	54.00	Average
2		2390.00	14.93	33.04	47.97	-6.03	54.00	Average
3		2437.95	72.80	32.90	105.70	N/A	N/A	Average
4		2483.50	13.43	32.77	46.20	-7.80	54.00	Average
5		2485.69	14.10	32.77	46.87	-7.13	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2442 MHz		

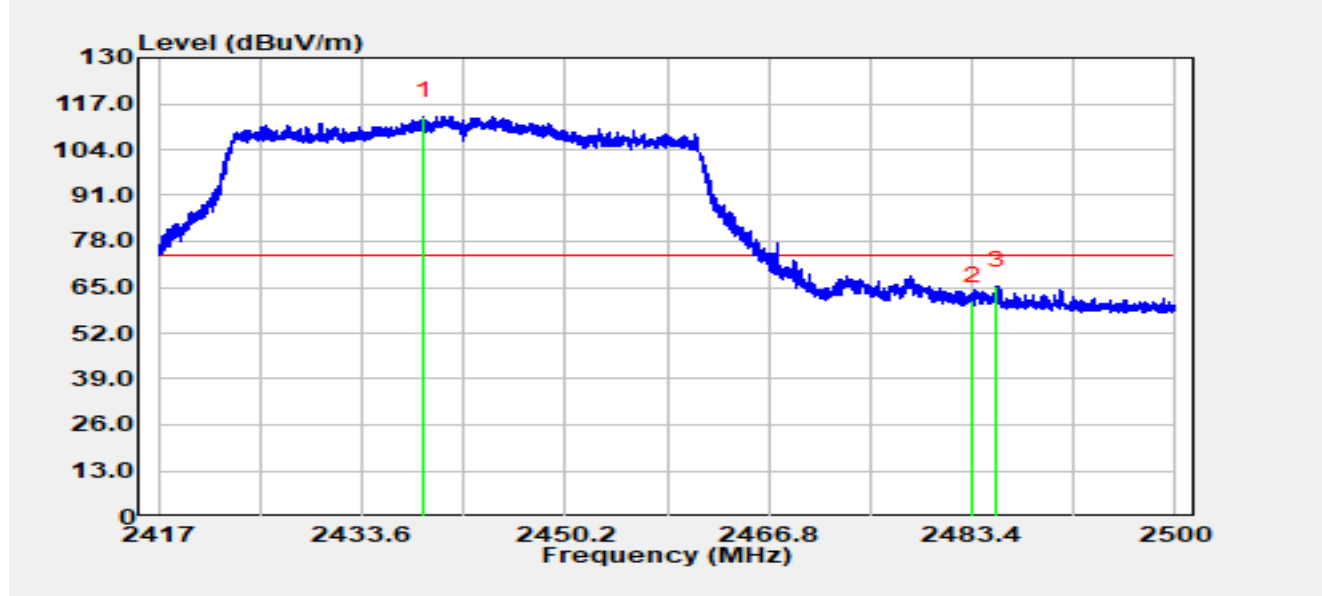


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2438.70	80.59	32.90	113.49	N/A	N/A	Peak
2		2483.50	28.42	32.77	61.19	-12.81	74.00	Peak
3	*	2485.38	32.67	32.77	65.43	-8.57	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2442 MHz		

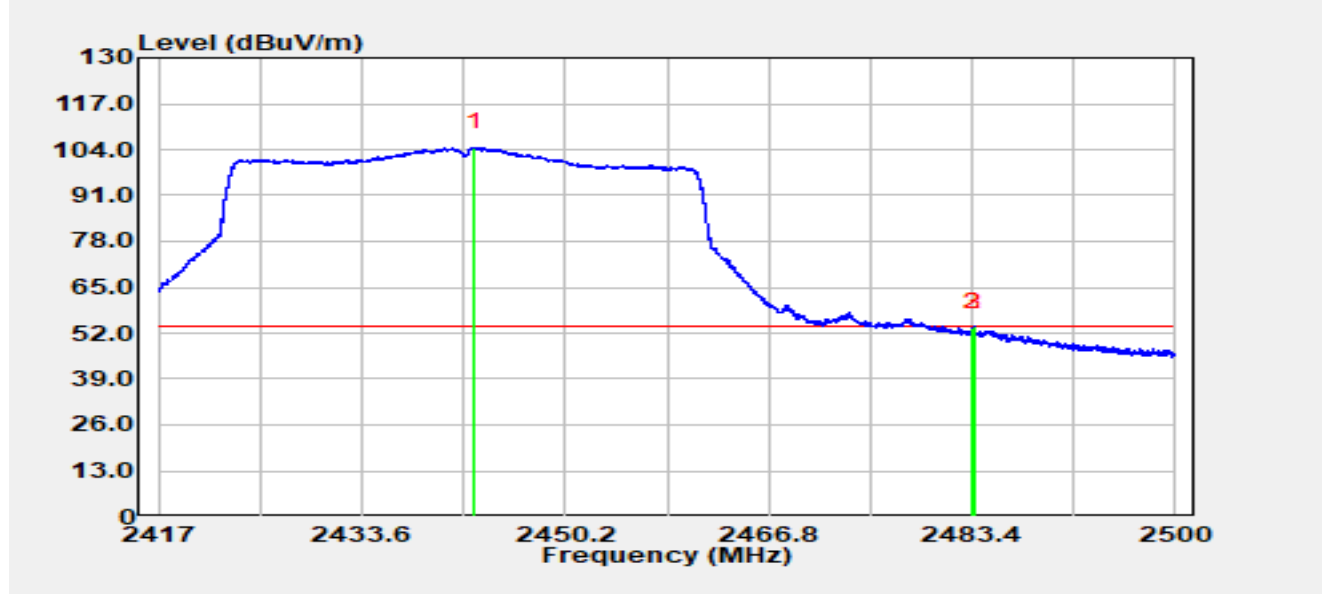


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2442.79	71.81	32.88	104.69	N/A	N/A	Average
2		2483.50	20.79	32.77	53.56	-0.44	54.00	Average
3	*	2483.56	21.06	32.77	53.83	-0.17	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2447 MHz		

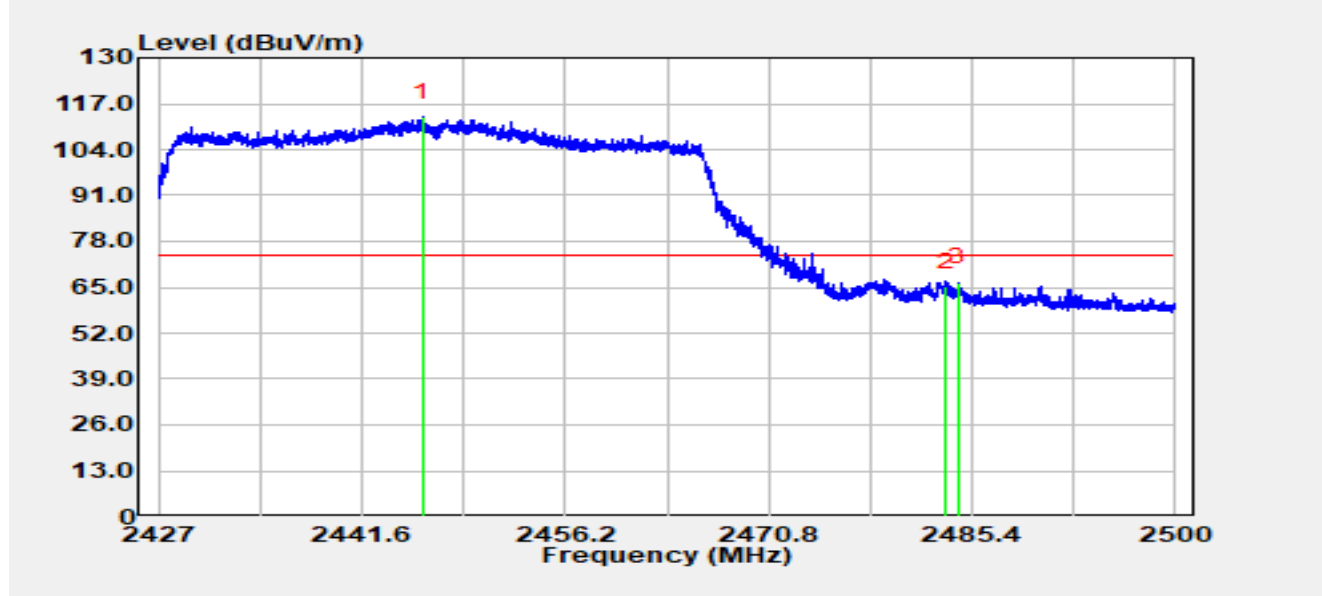


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2445.93	80.45	32.87	113.32	N/A	N/A	Peak
2		2483.50	32.25	32.77	65.01	-8.99	74.00	Peak
3	*	2484.40	33.49	32.77	66.25	-7.75	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-03-10
Temperature	22.7 °C	Humidity	30.5%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2447 MHz		

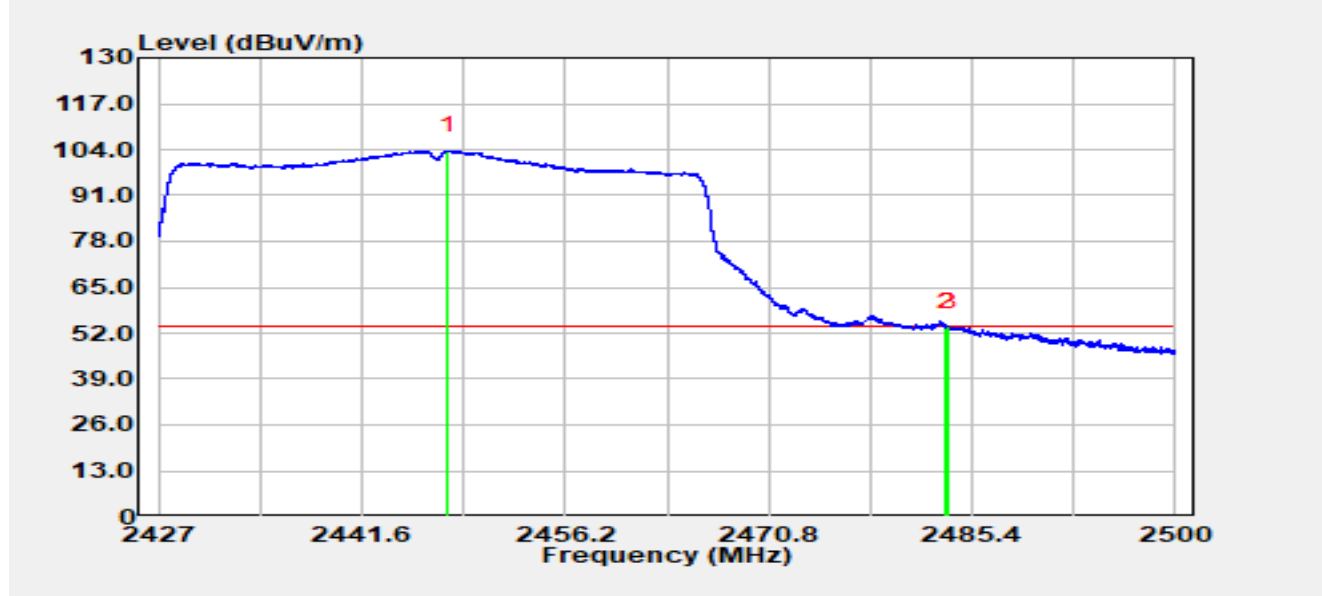


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2447.75	70.84	32.87	103.71	N/A	N/A	Average
2		2483.50	20.87	32.77	53.64	-0.36	54.00	Average
3	*	2483.75	21.07	32.77	53.84	-0.16	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

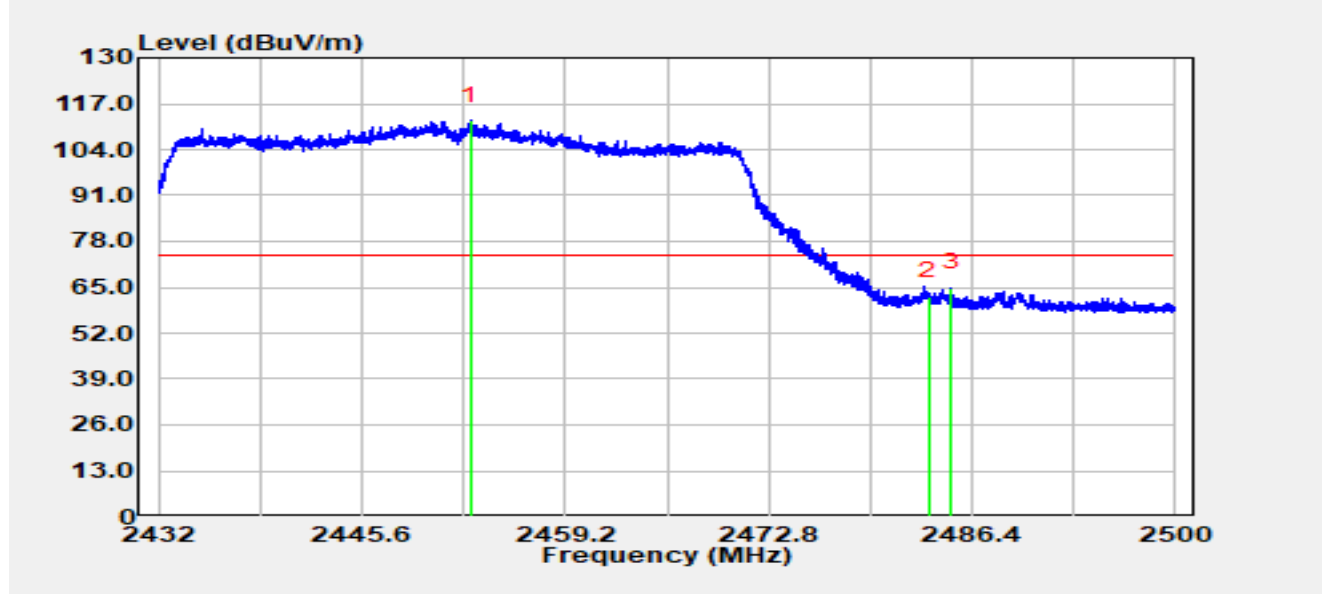


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.83	79.43	32.85	112.29	N/A	N/A	Peak
2		2483.50	29.75	32.77	62.52	-11.48	74.00	Peak
3	*	2484.98	32.16	32.77	64.92	-9.08	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

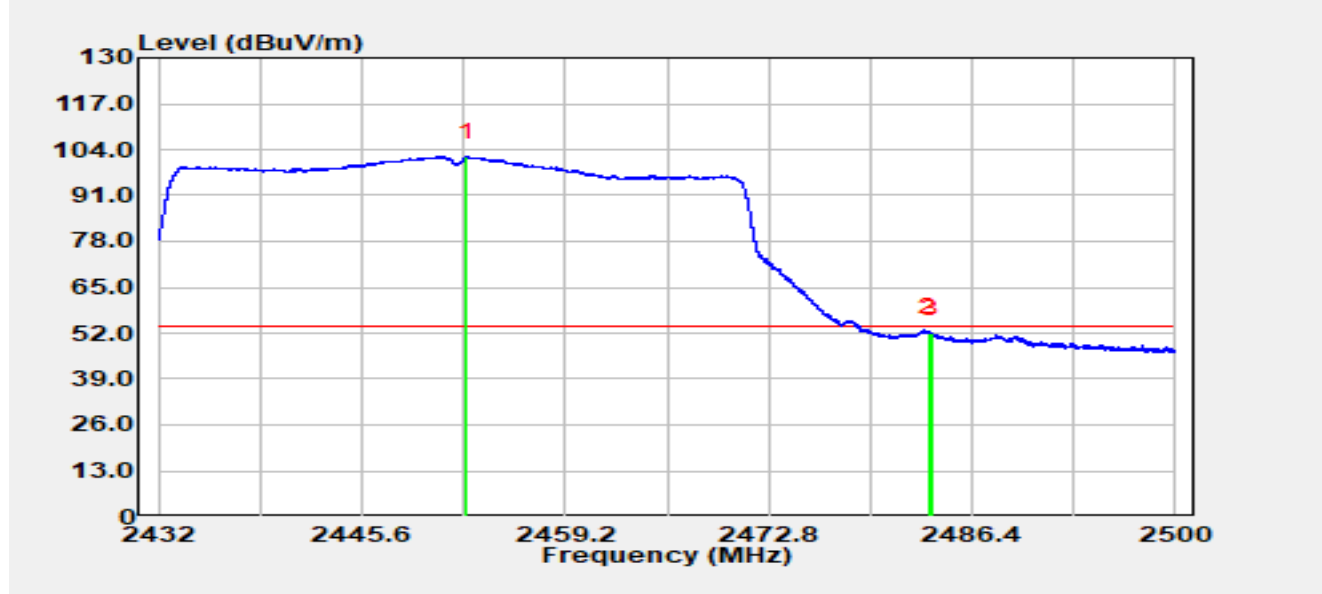


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.58	69.14	32.85	101.99	N/A	N/A	Average
2	*	2483.50	19.29	32.77	52.06	-1.94	54.00	Average
3		2483.65	19.09	32.77	51.86	-2.14	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

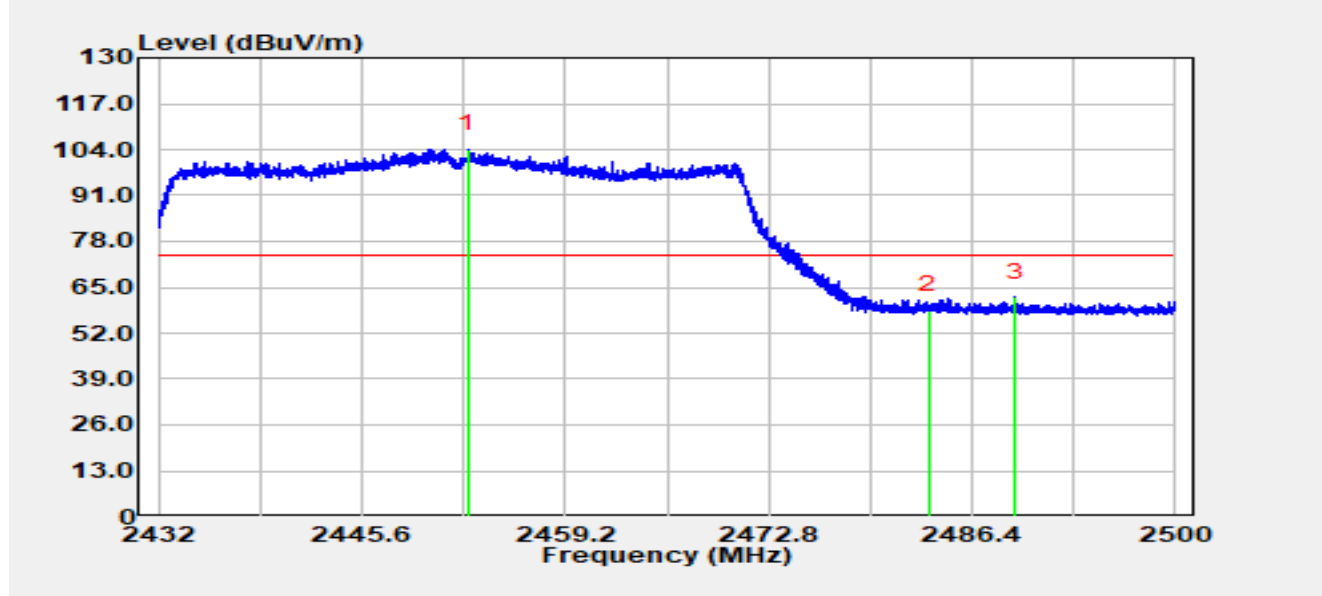


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.72	71.35	32.85	104.21	N/A	N/A	Peak
2		2483.50	25.76	32.77	58.52	-15.48	74.00	Peak
3	*	2489.26	29.54	32.76	62.30	-11.70	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-23
Temperature	22.2 °C	Humidity	32.9%
Limit	FCC_2.4G_RE(3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

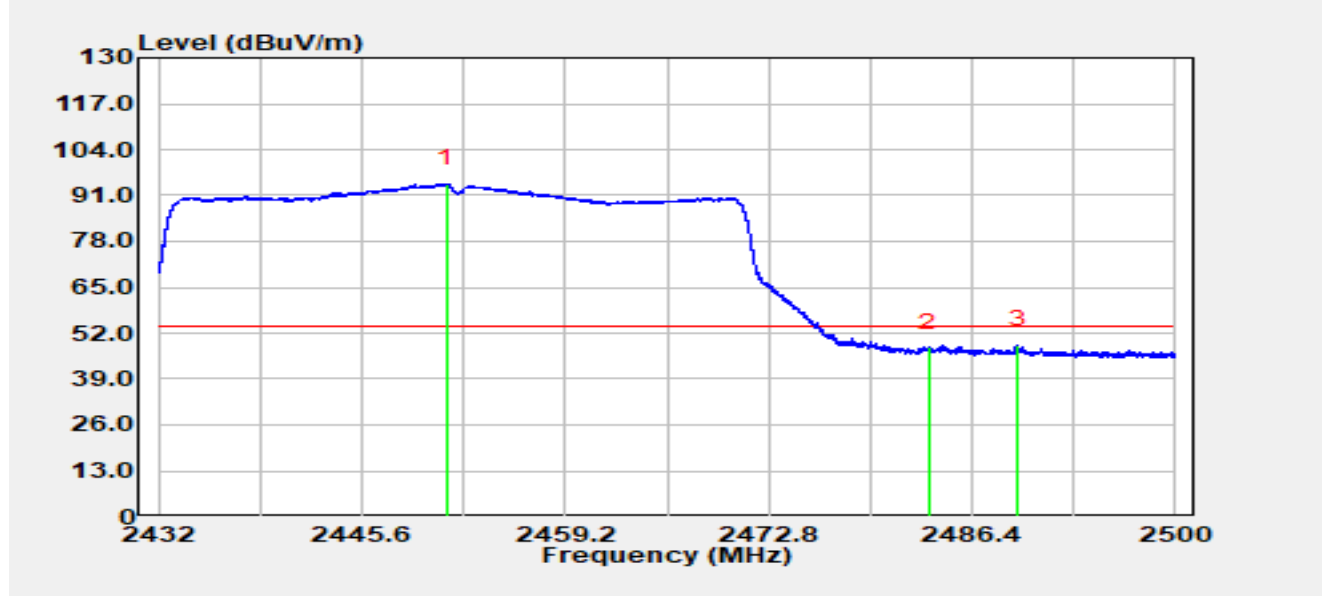


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.25	61.48	32.86	94.33	N/A	N/A	Average
2		2483.50	15.20	32.77	47.97	-6.03	54.00	Average
3	*	2489.43	15.82	32.76	48.58	-5.42	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2026-01-05
Temperature	17.4 °C	Humidity	36.8%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

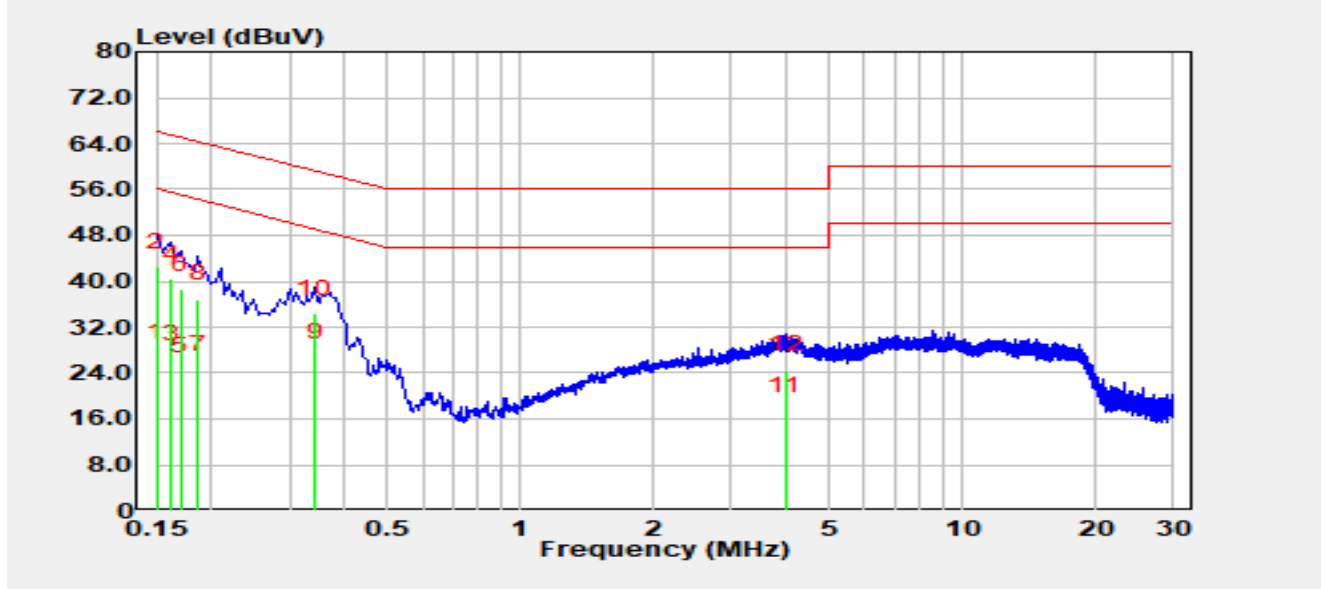


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	16.90	9.92	26.82	-29.18	56.00	Average
2		0.15	32.50	9.92	42.42	-23.58	66.00	QP
3		0.16	16.50	9.92	26.42	-28.94	55.36	Average
4		0.16	30.40	9.92	40.32	-25.04	65.36	QP
5		0.17	14.30	9.93	24.23	-30.73	54.96	Average
6		0.17	28.60	9.93	38.53	-26.43	64.96	QP
7		0.19	14.70	9.93	24.63	-29.58	54.21	Average
8		0.19	26.90	9.93	36.83	-27.38	64.21	QP
9	*	0.34	16.80	10.02	26.82	-22.34	49.15	Average
10		0.34	24.30	10.02	34.32	-24.84	59.15	QP
11		3.97	6.40	10.97	17.37	-28.63	46.00	Average
12		3.97	13.60	10.97	24.57	-31.43	56.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2026-01-05
Temperature	17.4 °C	Humidity	36.8%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11n-HT40 at 2437 MHz		

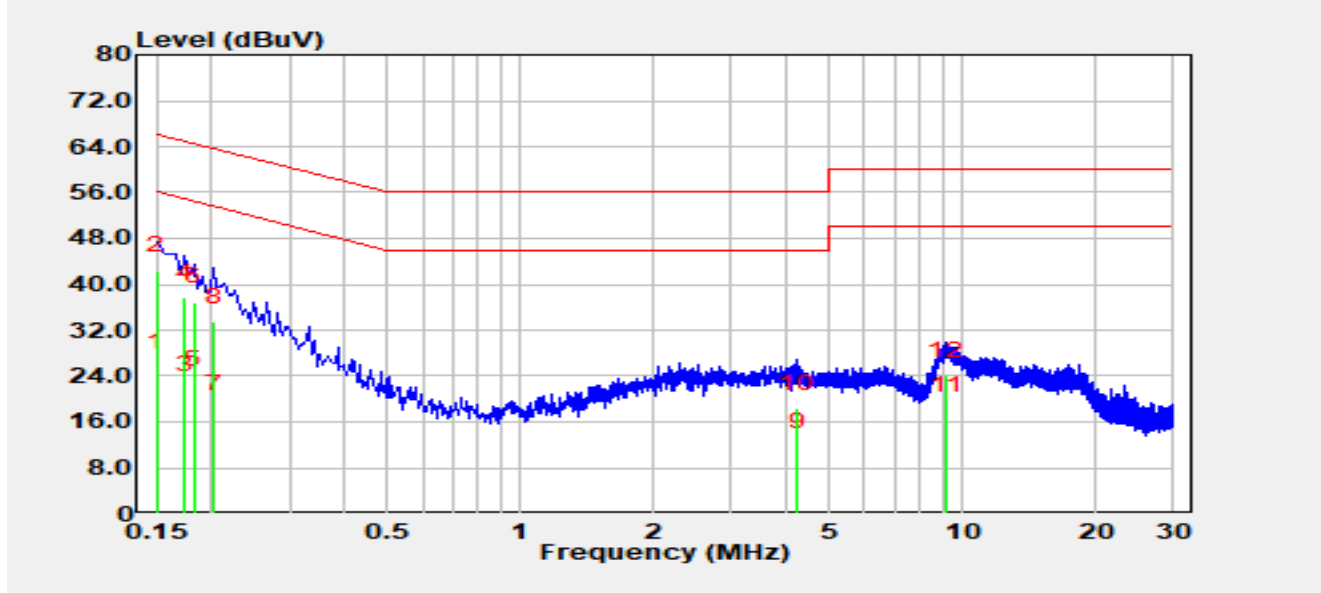

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	15.50	9.97	25.47	-30.53	56.00	Average
2	*	0.15	32.40	9.97	42.37	-23.63	66.00	QP
3		0.17	11.60	9.96	21.56	-33.21	54.77	Average
4		0.17	27.70	9.96	37.66	-27.11	64.77	QP
5		0.18	12.50	9.96	22.46	-31.94	54.39	Average
6		0.18	27.00	9.96	36.96	-27.44	64.39	QP
7		0.20	8.20	9.96	18.16	-35.37	53.53	Average
8		0.20	23.50	9.96	33.46	-30.07	63.53	QP
9		4.23	0.10	11.37	11.47	-34.53	46.00	Average
10		4.23	7.00	11.37	18.37	-37.63	56.00	QP
11		9.21	6.50	11.46	17.96	-32.04	50.00	Average
12		9.21	12.60	11.46	24.06	-35.94	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “R25S1028126-UT” file.

Appendix C - EUT Photograph

Refer to "R25S1028126-UE" file.

_____ The End _____