

USB+Bluetooth 2 mode Keyboard

FCC ID: 2AXE4-GK96S


Item:GK96/GK96S/GK96X/GK96XS/SK96/SK96S/AK96/AK96S

GK96/GK96X/SK96/AK96: USB Wired Mode

GK96S/GK96XS/SK96S/AK96S: USB+Bluetooth Dual Mode

Better for MAC

SKYLONG®

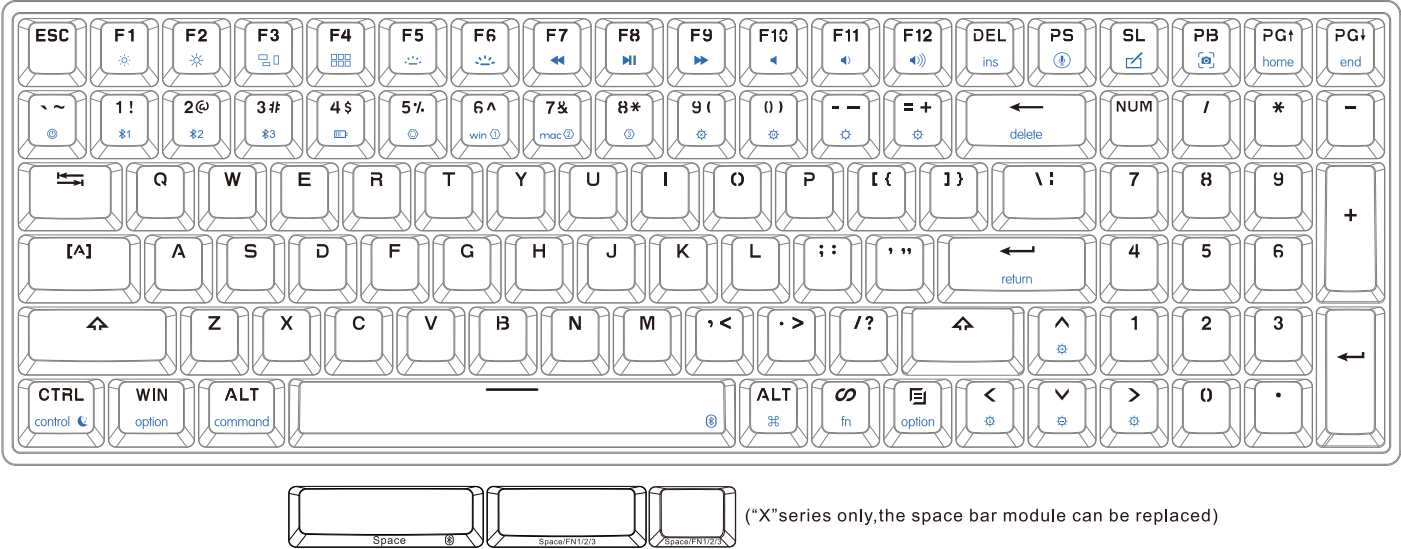

★ NOTE:Press Fn with the function keys.

★ One of the blue LED is flashing,The keyboard is connecting the BT equipment. FN + Space Bluetooth ON/OFF switch,Link to USB mode.

fn function description (Double-click FN to light FN's white LED,FN function is held,click FN again to escape from holding status).

Define mode

| Key                                            | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard mode                                  | Standard mode, all buttons can not be user-defined, User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended.(Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + " x " function can be also modified,except the backlight ,bluetooth and system control, The FN button can not be moved, but user can define your own FN1/FN2/FN3 at any key on the keyboard in the custom mode). |
| FN + 5% Driver mode                            | FN + 5% is the driver mode layer, " 5% " lights white LED, some special function ( For example:You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer ) and backlights can be set in this mode, You must keep the driver running and the keyboard connect with the driver, Press FN + 5% again, back to standard mode.                                                                                                    |
| FN + 6^ Onboard mode1 Layer1 / Fn1 WIN mode    | FN + 6^, onboard mode layer 1, " 6^ " lights white LED, no need to run and connect the driver, The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard, The reference setting: WIN mode setting to realize the habitual operation of win users                                                                                                                    |
| FN + 7& Onboard mode2 Layer2 / Fn2 MAC OS mode | FN + 7&, onboard mode layer 2, " 7& " lights white LED, The reference Setting:keyboard of MAC OS, the "control,option,command" key will be in the original position, user can modify the Settings by the driver, download and save to the keyboard , no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode.                                                                                                               |
| FN + 8* Onboard mode3 Layer3 / Fn3             | FN + 8*, onboard mode layer 3, " 8* " lights white LED. The reference Setting: Some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the key FN3 in layer1&layer2, All Settings in this mode can be modified and saved to the keyboard, Press FN+8* again, back to the standard mode.                                                                                                                                                   |

Backlight settings (Can not modify )

| Key     | Function                        |
|---------|---------------------------------|
| FN + 0) | Light effect pause/play         |
| FN + 9( | Backlight ON/OFF                |
| FN + ~  | Backlight mode 1—5 (Can modify) |
| FN + =+ | Backlight mode 6—9              |
| FN + ↓  | Backlight brightness –          |
| FN + ↑  | Backlight brightness +          |
| FN + ←  | Backlight Effect Speed –        |
| FN + →  | Backlight Effect Speed +        |

Bluetooth settings (Only for bluetooth mode,can not modify)

| Key        | Function                                                                                                                                                                |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FN + Space | Bluetooth ON/OFF switch<br>Link to USB mode or the last BT equipment.                                                                                                   |
| FN + 1!    | Long press: The red&green LED of 1! keycap will flash, The 1! bluetooth equipment can be paired.<br>Press: The keyboard will connect the 1! BT equipment or disconnect. |
| FN + 2@    | Long press: The red&green LED of 2@keycap will flash, The 2@ bluetooth equipment can be paired.<br>Press: The keyboard will connect the 2@ BT equipment or disconnect.  |
| FN + 3#    | Long press: The red&green LED of 3# keycap will flash, The 3# bluetooth equipment can be paired.<br>Press: The keyboard will connect the 3# BT equipment or disconnect. |

Note: If the Bluetooth pairing timed out or failed, please re-pair; if the bluetooth pairing is successful on the equipment, but the keyboard cannot work still, Please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile , restart the keyboard, and re-pair,

System Control (Cannot modify)

|              |                                                                                                                                                          |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| FN + @       | Mechanical dual model series long press for 3 seconds to on/off the keyboard.                                                                            |
| @            | Long press the @ label at the bottom of the Optical dual model keyboard for 3 seconds to turn on/off keyboard, wired version doesn't have this function. |
| FN + 4\$     | Turn off/on the charging indicator, low voltage alarm, the wired version does not have this function.                                                    |
| FN + control | Keyboard's sleep time setting, white LED on:never sleep, 1:5minutes, 2:10minutes,.....9:45minutes to sleep.                                              |

Fn function(Reference Settings, can be modified by driver)

| Key            | Mac mode function                  | Win mode function   |
|----------------|------------------------------------|---------------------|
| F1             | Screen brightness – for Mac        | F1                  |
| F2             | Screen brightness + for Mac        | F2                  |
| F3             | Copy for Mac                       | F3                  |
| F4             | Paste for Mac                      | F4                  |
| F5             | Backlight brightness – for Mac     | F5                  |
| F6             | Backlight brightness + for Mac     | F6                  |
| F7             | Previous                           | F7                  |
| F8             | Play/Pause                         | F8                  |
| F9             | Next                               | F9                  |
| F10            | Mute                               | F10                 |
| F11            | Volume –                           | F11                 |
| F12            | Volume +                           | F12                 |
| (PS)           | One click call Siri for Mac        | PS                  |
| (SL)           | One click call handwriting for Mac | SL                  |
| (PB)           | Screenshot for Mac                 | PB                  |
| FN + pgup      | home                               | home                |
| FN + pgdn      | end                                | end                 |
| FN + DEL       | ins                                | ins                 |
| FN + Backspace | delete                             | delete              |
| FN + Win       | Lock/Unlock Win key                | Lock/Unlock Win key |

More function and LED backlight settings, please download or update the driver from the following website: <http://www.jikedingzhi.com/downloadlist?driverID=41>

Dongguan Jizhi Electronic Technology Co., Ltd.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connct the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. 15.19

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.