




Nemko Test Report: 6L0165RUS1rev2

Applicant: IDS Ingegneria dei Sistemi SpA
via Stuperlino 20
Pisa
Italy

Equipment Under Test: Aladdin SK2
(E.U.T.)

In Accordance With: FCC Part 15, Subpart F, 15.509
UltraWideband Operation
Ground Penetrating Radar

Tested By: Nemko USA Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By: 
Kevin Rose Wireless Engineer

Date: July 31, 2006

Total number of pages:31

EQUIPMENT: *Aladdin SK2*

Table Of Contents

Section 1. Summary Of Test Results	3
Section 2. General Equipment Specification	5
Section 3. Pulse Repition Frequency	7
Section 4. Radiated Emissions	9
Section 6. Highest Radiated Emission (f_M)	25
Section 7. Test Equipment List	28
ANNEX A TEST DIAGRAMS	29

EQUIPMENT: Aladdin SK2

Section 1. Summary Of Test Results

Manufacturer: **IDS Ingegneria dei Sistemi SpA**

Model No.: Aladdin SK2

Serial No.: 10

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15.509. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated Emissions were made on an open area test site. with a 4 foot by 4foot by 4foot dry sand pit



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

This test report relates only to the item(s) tested.

The following deviations from, additions to, or exclusions from the test specifications have been made.

See “ Summary of Test Data”.



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: Aladdin SK2

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Conducted Emissions	15.207	NA
Pulse Repetition Frequency	15.509	Complies
Definition of UWB	15.203(a)/15.209(a)	Complies
Radiated Emissions	15.509(d)	Complies
Radiated Emissions	15.509(e)	Complies
Peak Emission at f_M	15.509(f)	Complies

The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B,

Footnotes For N/A's: EUT is a 12Vdc power device

Test Conditions:

The tests were performed with the EUT transmitting while on a pit filled with dry sand approximately 1 meter by 1 meter by 50 cm deep.

EQUIPMENT: Aladdin SK2

Section 2. General Equipment Specification

Frequency Range:	Single	
Operating Frequency(ies) of Sample:	2151 to 2538 MHz (10 dB BW)	
Tunable Bands:	Single	
10 dB Occupied Bandwidth:	2.7 GHz	
User Frequency Adjustment:	None	
Integral Antenna	Yes	No
	☒	☐

Nemko USA, Inc.

FCC PART 15, SUBPART F
TRANSMITTERS
TEST REPORT NO 6L0165RUS1REV2.:

EQUIPMENT: Aladdin SK2

Description of Device Tested

Ground Penetrating Radar Bipolar Antenna System

System Diagram

Refer to separate exhibit.

EQUIPMENT: Aladdin SK2

Section 3. Pulse Repetition Frequency

NAME OF TEST: Pulse Repetition Frequency	PARA. NO.: 15.509
TESTED BY: David Light	DATE:15 June 2006

Test Results: **Complies. See attached graph(s).**


Measurement Data: **See attached graph(s).**

Method of Measurement: **(Procedure ANSI C63.4-2003)**

General:

All measurements are traceable to national standards.

These tests were conducted using measurement procedures of ANSI C63.4-2003.

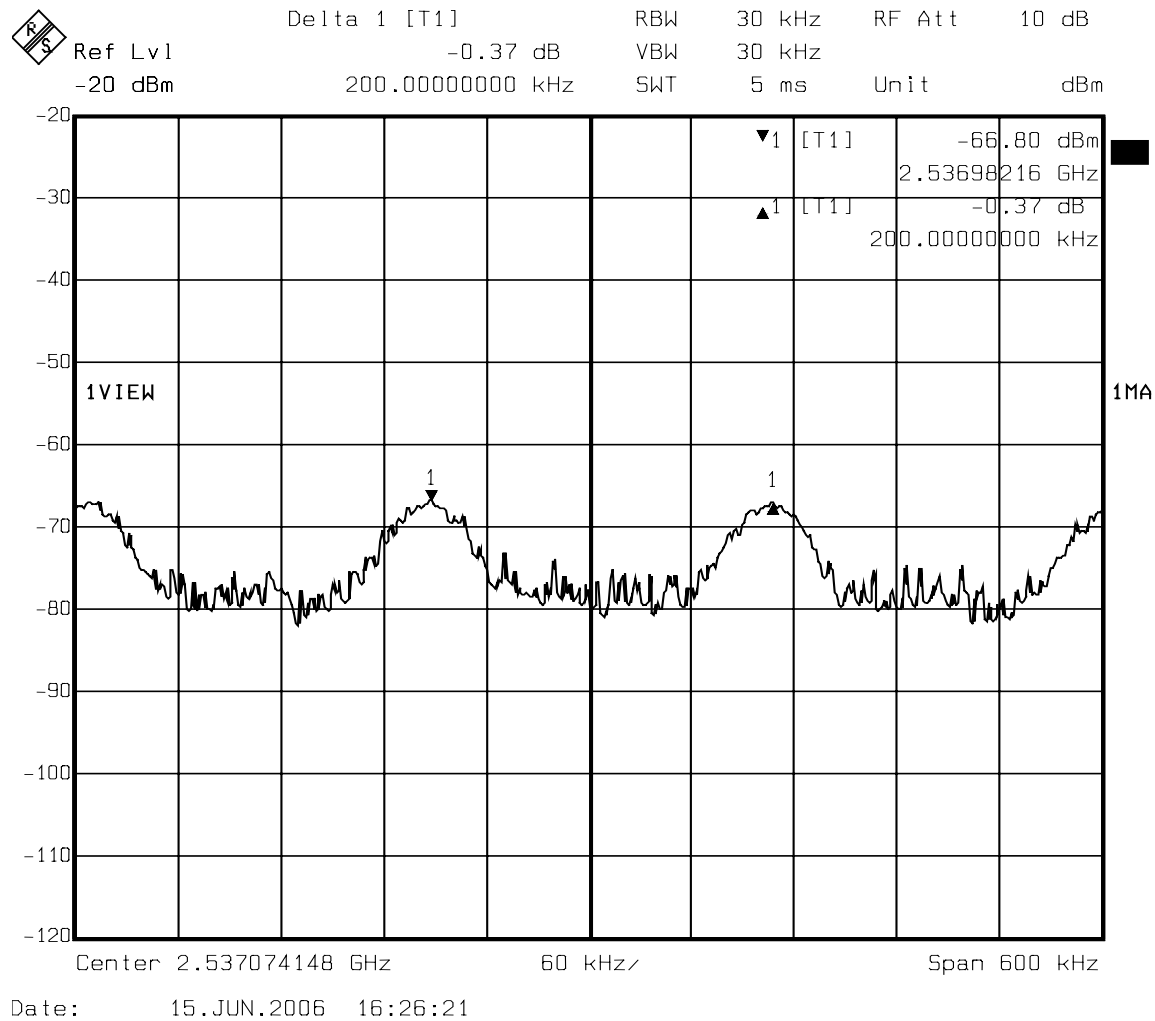EQUIPMENT: Aladdin SK2

EQUIPMENT: Aladdin SK2

Section 4. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.509(d)&(e)
TESTED BY: David Light	DATE: 16 June 2006

Minimum Standard: Para no. 15.509

Limits below 960 MHz (15.209 and 15.509):

Frequency (MHz)	Field Strength Limits (microvolts/m)	Measuring RBW	Distance (Meters)
0.009-0.490	2400/F(kHz)	1 kHz	300
0.490-1.705	24000/F(kHz)	10 kHz	30
1.705-30.0	30	10 kHz	30
30-88	100	100 kHz	3
88-216	150	100 kHz	3
216-960	200	100 kHz	3

Limits above 960 MHz (15.509)

Frequency (MHz)	E.I.R.P. (dBm)	Measuring RBW	Distance (Meters)
960-1610	-65.3	1 MHz	3
1610-1990	-53.3	1 MHz	3
1990-3100	-51.3	1 MHz	3
3100-10600	-41.3	1 MHz	3
Above 10600	-51.3	1 MHz	3
1164-1240	-75.3	1 kHz	3
159-1610	-75.3	1 kHz	3

E.I.R.P limits converted to field strength during measurements per 15.521(g)

Maximizing Emission Levels:

The emissions were scanned from 30 MHz to 15000 MHz.

For measurements below 960 MHz the emissions were made using a PEAK detector

RBW=VBW=100 kHz

For Frequency above 960 MHz and outside the below frequency bands, the emissions were measured using RMS detector, RBW=1MHz, VBW=3MHz

For frequencies fall inside 1164-1240 and 1559-1610 MHz, the emissions were measured using EMI RMS Detector, RBW = 1 KHz, VBW = 1 MHz

Note: The above tests were performed with the EUT in contact with the ground as its intended use. The EUT was tested in 8 positions (every 45°)

Test Results: Complies

Nemko USA, Inc.

FCC PART 15, SUBPART F

TRANSMITTERS

TEST REPORT NO 6L0165RUS1REV2.:

EQUIPMENT: Aladdin SK2

Measurement Data: **See attached table(s).**

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Note: All measurements were made at a distance of 1.5 meters.

<u>Radiated Emissions</u>								
Page <u>1</u> of <u>1</u>								
Job No.: 6L0165		Date: 7/16/2006						
Specification: 15.509		Temperature(°C): <u>28</u>						
Tested By: David Light		Relative Humidity(%) <u>40</u>						
E.U.T.: Ground Penetrating radar								
Configuration: Tx over sandpit								
Sample Number: 2								
Location: AC 3		RBW: 1 MHz						
Detector Type: Peak		VBW: 1 MHz						
<u>Test Equipment Used</u>								
Antenna: 993		Directional Coupler: #N/A						
Pre-Amp: 1016		Cable #1: 1484						
Filter: #N/A		Cable #2: 1485						
Receiver: 1036		Cable #3: #N/A						
Attenuator #1: #N/A		Cable #4: #N/A						
Attenuator #2: #N/A		Mixer: #N/A						
Measurement Uncertainty: +/- 3.6 dB								
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Angle / Polarity
								0° / Vertical
1.000	41.3	22.7	1.0	29.5	35.5	35.9	-0.4	
1.050	39.6	22.7	1.0	29.5	33.8	35.9	-2.1	
1.107	40.5	22.7	1.0	29.5	34.7	35.9	-1.2	
1.404	40.5	24.3	1.2	32.2	33.8	35.9	-2.1	
1.750	38.3	26.5	1.3	32.0	34.1	47.9	-13.8	
3.200	33.3	29.7	1.9	32.5	32.4	59.9	-27.5	
10.500	33.4	37.7	3.7	37.8	37.0	59.9	-22.9	
								GPS
1.164	25.6	22.7	1.0	29.5	19.8	25.9	-6.1	
1.200	24.9	22.7	1.0	29.5	19.1	25.9	-6.8	
1.240	28.3	22.7	1.0	29.5	22.5	25.9	-3.4	
1.559	22.3	24.3	1.2	32.2	15.6	25.9	-10.3	
1.585	22.5	24.3	1.2	32.2	15.8	25.9	-10.1	
1.610	26.9	24.3	1.2	32.2	20.2	25.9	-5.7	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								45° / Vertical
1.000	39.6	22.7	1.0	29.5	33.8	35.9	-2.1	
1.050	40.4	22.7	1.0	29.5	34.6	35.9	-1.3	
1.107	41.3	22.7	1.0	29.5	35.5	35.9	-0.4	
1.404	39.9	24.3	1.2	32.2	33.2	35.9	-2.7	
1.750	41.1	26.5	1.3	32.0	36.9	47.9	-11.0	
3.200	34.4	29.7	1.9	32.5	33.5	59.9	-26.4	
10.500	33.2	37.7	3.7	37.8	36.8	59.9	-23.1	
								GPS
1.164	26.4	22.7	1.0	29.5	20.6	25.9	-5.3	
1.200	26.1	22.7	1.0	29.5	20.3	25.9	-5.6	
1.240	26.1	22.7	1.0	29.5	20.3	25.9	-5.6	
1.559	19.4	24.3	1.2	32.2	12.7	25.9	-13.2	
1.585	22.1	24.3	1.2	32.2	15.4	25.9	-10.5	
1.610	21.5	24.3	1.2	32.2	14.8	25.9	-11.1	
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								90° / Vertical
1.000	37.7	22.7	1.0	29.5	31.9	35.9	-4.0	
1.277	37.3	22.7	1.0	29.5	31.5	35.9	-4.4	
1.500	38.3	24.3	1.2	32.2	31.6	35.9	-4.3	
1.687	43.4	24.3	1.2	32.2	36.7	47.9	-11.2	
1.750	39	26.5	1.3	32.0	34.8	47.9	-13.1	
3.200	37.8	29.7	1.9	32.5	36.9	59.9	-23.0	
10.500	33.3	37.7	3.7	37.8	36.9	59.9	-23.0	
								GPS
1.164	17.7	22.7	1.0	29.5	11.9	25.9	-14.0	
1.200	20.4	22.7	1.0	29.5	14.6	25.9	-11.3	
1.240	21.6	22.7	1.0	29.5	15.8	25.9	-10.1	
1.559	17.9	24.3	1.2	32.2	11.2	25.9	-14.7	
1.585	19.4	24.3	1.2	32.2	12.7	25.9	-13.2	
1.610	21.3	24.3	1.2	32.2	14.6	25.9	-11.3	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								135° / Vertical
1.000	35.5	22.7	1.0	29.5	29.7	35.9	-6.2	
1.277	39.9	22.7	1.0	29.5	34.1	35.9	-1.8	
1.600	38.6	24.3	1.2	32.2	31.9	35.9	-4.0	
1.920	40.5	28.5	1.4	32.7	37.7	47.9	-10.2	
2.999	45.8	29.7	1.9	32.7	44.7	47.9	-3.2	
3.200	34.3	29.7	1.9	32.5	33.4	59.9	-26.5	
10.500	33.2	37.7	3.7	37.8	36.8	59.9	-23.1	
								GPS
1.164	19.3	22.7	1.0	29.5	13.5	25.9	-12.4	
1.200	20.4	22.7	1.0	29.5	14.6	25.9	-11.3	
1.240	22.1	22.7	1.0	29.5	16.3	25.9	-9.6	
1.559	20.7	24.3	1.2	32.2	14.0	25.9	-11.9	
1.585	23.2	24.3	1.2	32.2	16.5	25.9	-9.4	
1.610	22.1	24.3	1.2	32.2	15.4	25.9	-10.5	
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								180° / Vertical
1.000	36.2	22.7	1.0	29.5	30.4	35.9	-5.5	
1.500	36.3	22.7	1.0	29.5	30.5	35.9	-5.4	
1.761	42.0	24.3	1.2	32.2	35.3	47.9	-12.6	
3.200	33.6	29.7	1.9	32.5	32.7	59.9	-27.2	
10.500	32.8	37.7	3.7	37.8	36.4	59.9	-23.5	
								GPS
1.164	13.7	22.7	1.0	29.5	7.9	25.9	-18.0	
1.200	14.8	22.7	1.0	29.5	9.0	25.9	-16.9	
1.240	15.2	22.7	1.0	29.5	9.4	25.9	-16.5	
1.559	20.3	24.3	1.2	32.2	13.6	25.9	-12.3	
1.585	21	24.3	1.2	32.2	14.3	25.9	-11.6	
1.610	18.3	24.3	1.2	32.2	11.6	25.9	-14.3	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								225° / Vertical
1.000	37.1	22.7	1.0	29.5	31.3	35.9	-4.6	
1.500	39.1	22.7	1.0	29.5	33.3	35.9	-2.6	
1.761	40.4	24.3	1.2	32.2	33.7	47.9	-14.2	
3.200	33.6	29.7	1.9	32.5	32.7	59.9	-27.2	
10.500	34.6	37.7	3.7	37.8	38.2	59.9	-21.7	
								GPS
1.164	17.4	22.7	1.0	29.5	11.6	25.9	-14.3	
1.200	17.5	22.7	1.0	29.5	11.7	25.9	-14.2	
1.240	16.6	22.7	1.0	29.5	10.8	25.9	-15.1	
1.559	19.7	24.3	1.2	32.2	13.0	25.9	-12.9	
1.585	18.7	24.3	1.2	32.2	12.0	25.9	-13.9	
1.610	19.1	24.3	1.2	32.2	12.4	25.9	-13.5	
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								270° / Vertical
1.000	41.2	22.7	1.0	29.5	35.4	35.9	-0.5	
1.500	38.7	22.7	1.0	29.5	32.9	35.9	-3.0	
1.761	43.9	24.3	1.2	32.2	37.2	47.9	-10.7	
2.850	35.0	29.7	1.9	32.5	34.1	47.9	-13.8	
3.200	35.5	29.7	1.9	32.5	34.6	59.9	-25.3	
10.500	34.2	37.7	3.7	37.8	37.8	59.9	-22.1	
								GPS
1.164	26.4	22.7	1.0	29.5	20.6	25.9	-5.3	
1.200	24.1	22.7	1.0	29.5	18.3	25.9	-7.6	
1.240	24.5	22.7	1.0	29.5	18.7	25.9	-7.2	
1.559	23.5	24.3	1.2	32.2	16.8	25.9	-9.1	
1.585	23.3	24.3	1.2	32.2	16.6	25.9	-9.3	
1.610	23.3	24.3	1.2	32.2	16.6	25.9	-9.3	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								315° / Vertical
1.000	41.3	22.7	1.0	29.5	35.5	35.9	-0.4	
1.500	37.1	22.7	1.0	29.5	31.3	35.9	-4.6	
1.761	41.7	24.3	1.2	32.2	35.0	47.9	-12.9	
2.850	39.1	29.7	1.9	32.5	38.2	47.9	-9.7	
3.200	34.0	29.7	1.9	32.5	33.1	59.9	-26.8	
10.500	34.4	37.7	3.7	37.8	38.0	59.9	-21.9	
								GPS
1.164	26.8	22.7	1.0	29.5	21.0	25.9	-4.9	
1.200	22.8	22.7	1.0	29.5	17.0	25.9	-8.9	
1.240	18.3	22.7	1.0	29.5	12.5	25.9	-13.4	
1.559	16.4	24.3	1.2	32.2	9.7	25.9	-16.2	
1.585	17	24.3	1.2	32.2	10.3	25.9	-15.6	
1.610	19.0	24.3	1.2	32.2	12.3	25.9	-13.6	
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Angle / Polarity
								0° / Horizontal
1.330	39.7	22.7	1.0	32.2	31.2	35.9	-4.7	
1.771	38.3	28.5	1.4	32.2	36.0	47.9	-11.9	
2.337	42.6	29.0	1.6	32.8	40.4	49.9	-9.5	
3.200	33.0	29.7	1.9	32.5	32.1	59.9	-27.8	
10.000	32.2	37.7	3.7	37.8	35.8	59.9	-24.1	
								GPS
1.164	19.4	22.7	1.0	29.5	13.6	25.9	-12.3	
1.200	14.4	22.7	1.0	29.5	8.6	25.9	-17.3	
1.240	17.5	22.7	1.0	29.5	11.7	25.9	-14.2	
1.559	21.0	24.3	1.2	29.5	17.0	25.9	-8.9	
1.585	20.4	24.3	1.2	29.5	16.4	25.9	-9.5	
1.610	18.7	24.3	1.2	29.5	14.7	25.9	-11.2	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								90° / Horizontal
1.330	38.8	22.7	1.0	32.2	30.3	35.9	-5.6	
1.771	42.3	28.5	1.4	32.2	40.0	47.9	-7.9	
2.337	42.0	29.0	1.6	32.8	39.8	49.9	-10.1	
3.200	33.0	29.7	1.9	32.5	32.1	59.9	-27.8	
10.000	32.2	37.7	3.7	37.8	35.8	59.9	-24.1	
								GPS
1.164	21.2	22.7	1.0	29.5	15.4	25.9	-10.5	
1.200	21.5	22.7	1.0	29.5	15.7	25.9	-10.2	
1.240	21.5	22.7	1.0	29.5	15.7	25.9	-10.2	
1.559	17.8	24.3	1.2	29.5	13.8	25.9	-12.1	
1.585	14.1	24.3	1.2	29.5	10.1	25.9	-15.8	
1.610	13.7	24.3	1.2	29.5	9.7	25.9	-16.2	
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								180° / Horizontal
1.330	40.9	22.7	1.0	32.2	32.4	35.9	-3.5	
1.771	43.0	28.5	1.4	32.2	40.7	47.9	-7.2	
2.337	41.3	29.0	1.6	32.8	39.1	49.9	-10.8	
3.200	33.1	29.7	1.9	32.5	32.2	59.9	-27.7	
10.000	32.2	37.7	3.7	37.8	35.8	59.9	-24.1	
								GPS
1.164	19.0	22.7	1.0	29.5	13.2	25.9	-12.7	
1.200	12.0	22.7	1.0	29.5	6.2	25.9	-19.7	
1.240	18.0	22.7	1.0	29.5	12.2	25.9	-13.7	
1.559	21.0	24.3	1.2	29.5	17.0	25.9	-8.9	
1.585	22.0	24.3	1.2	29.5	18.0	25.9	-7.9	
1.610	22.3	24.3	1.2	29.5	18.3	25.9	-7.6	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Delta (dB)	Detector / Polarity
								270° / Horizontal
1.330	38.6	22.7	1.0	32.2	30.1	35.9	-5.8	
1.771	37.3	28.5	1.4	32.2	35.0	47.9	-12.9	
2.337	37.3	29.0	1.6	32.8	35.1	49.9	-14.8	
3.200	32.7	29.7	1.9	32.5	31.8	59.9	-28.1	
10.000	31.5	37.7	3.7	37.8	35.1	59.9	-24.8	
								GPS
1.164	21.3	22.7	1.0	29.5	15.5	25.9	-10.4	
1.200	22.6	22.7	1.0	29.5	16.8	25.9	-9.1	
1.240	22.1	22.7	1.0	29.5	16.3	25.9	-9.6	
1.559	17.0	24.3	1.2	29.5	13.0	25.9	-12.9	
1.585	13.7	24.3	1.2	29.5	9.7	25.9	-16.2	
1.610	13.7	24.3	1.2	29.5	9.7	25.9	-16.2	

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Radiated Emissions Data											
Complete	<u> X </u>		Job # : <u>6L0165</u>				Test # : <u>REHE-01</u>				
Preliminary	<u> </u>		Page <u> 1 </u>				of <u> 6 </u>				
Client Name :	<u>IDS</u>										
EUT Name :	<u>Aladdin</u>										
EUT Model # :	<u>SK2</u>										
EUT Serial # :	<u>10</u>										
EUT Config. :	<u>Tx on sandpit</u>										
Specification :	<u>CFR47 Part 15, Subpart B, Class B</u>										
Rod. Ant. #:	<u> </u>		Temp. (deg. C) :	<u> 22 </u>		Reference :	<u> </u>				
Bicon Ant. #:	<u> 1195 </u>		Humidity (%) :	<u> 40 </u>		Date :	<u> 07/16/06 </u>				
Log Ant. #:	<u> 1034 </u>		EUT Voltage :	<u> 12 </u>		Time :	<u> 2:00 </u>				
Bilog Ant. #:	<u> </u>		EUT Frequency :	<u> dc </u>		Staff :	<u> D. Light </u>				
Dipole Ant. #:	<u> </u>		Phase:	<u> 0 </u>		Photo ID:	<u> na </u>				
Cable#:	<u> 1522 </u>		Location:	<u> D OATS </u>		Peak Bandwidth:	<u> 100 KHz </u>				
Preamp#:	<u> 791 </u>		Distance:	<u> 3 </u>		Video Bandwidth	<u> 100 KHz </u>				
Limiter#:	<u> na </u>										
Atten #:	<u> na </u>										
Detector#:	<u> 1036 </u>										

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	QP readings Comment
120	V	0	45	11.4	3.8	24.7	35.5	43.5	-8.0	Pass	0 Degrees
128	V	0	41	11.5	4.2	24.6	32.1	43.5	-11.4	Pass	
160	V	0	43.4	13.1	4.7	24.6	36.6	43.5	-6.9	Pass	
200	V	0	42	14.8	5.5	24.5	37.8	43.5	-5.7	Pass	
225	V	0	43.5	15.6	5.9	24.5	40.5	46.0	-5.5	Pass	
280	V	0	33.8	17.9	6.4	24.4	33.7	46.0	-12.3	Pass	
120	V	0	46.8	11.4	3.8	24.7	37.3	43.5	-6.2	Pass	45 Degrees
128	V	0	40.7	11.5	4.2	24.6	31.8	43.5	-11.7	Pass	
160	V	0	43.6	13.1	4.7	24.6	36.8	43.5	-6.7	Pass	
200	V	0	42.6	14.8	5.5	24.5	38.4	43.5	-5.1	Pass	
225	V	0	25.4	15.6	5.9	24.5	22.4	46.0	-23.6	Pass	
280	V	0	34.2	17.9	6.4	24.4	34.1	46.0	-11.9	Pass	
120	V	0	47.1	11.4	3.8	24.7	37.6	43.5	-5.9	Pass	90 Degrees
128	V	0	41.4	11.5	4.2	24.6	32.5	43.5	-11.0	Pass	
160	V	0	43.5	13.1	4.7	24.6	36.7	43.5	-6.8	Pass	
200	V	0	42.7	14.8	5.5	24.5	38.5	43.5	-5.0	Pass	
225	V	0	25.1	15.6	5.9	24.5	22.1	46.0	-23.9	Pass	
280	V	0	34.7	17.9	6.4	24.4	34.6	46.0	-11.4	Pass	

..\EMCShare\AUTOMATED\DATASHTS\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Radiated Emissions Data											
Complete	<u> X </u>	Job # :	<u> </u>	Test # :	<u>REHE-01</u>						
Preliminary	<u> </u>		Page <u> 2 </u>	of	<u> 6 </u>						
Client Name :		<u>IDS</u>									
EUT Name :		<u>Aladdin</u>									
EUT Model # :		<u>SK2</u>									
EUT Serial # :		<u>10</u>									
EUT Config. :		<u>Tx on sandpit</u>									
Specification :		<u>CFR47 Part 15, Subpart B, Class B</u>					Reference :				
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Det. Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
120	V	0	46.8	11.4	3.8	24.7	37.3	43.5	-6.2	Pass	135 Degrees
128	V	0	40.2	11.5	4.2	24.6	31.3	43.5	-12.2	Pass	
160	V	0	43.7	13.1	4.7	24.6	36.9	43.5	-6.6	Pass	
200	V	0	42.1	14.8	5.5	24.5	37.9	43.5	-5.6	Pass	
225	V	0	28.2	15.6	5.9	24.5	25.2	46.0	-20.8	Pass	
280	V	0	34.6	17.9	6.4	24.4	34.5	46.0	-11.5	Pass	
120	V	0	47.6	11.4	3.8	24.7	38.1	43.5	-5.4	Pass	180 Degrees
128	V	0	42	11.5	4.2	24.6	33.1	43.5	-10.4	Pass	
160	V	0	43.5	13.1	4.7	24.6	36.7	43.5	-6.8	Pass	
200	V	0	43.2	14.8	5.5	24.5	39.0	43.5	-4.5	Pass	
225	V	0	26	15.6	5.9	24.5	23.0	46.0	-23.0	Pass	
280	V	0	34.4	17.9	6.4	24.4	34.3	46.0	-11.7	Pass	
120	V	0	42.6	11.4	3.8	24.7	33.1	43.5	-10.4	Pass	225 Degrees
128	V	0	40.1	11.5	4.2	24.6	31.2	43.5	-12.3	Pass	
160	V	0	42	13.1	4.7	24.6	35.2	43.5	-8.3	Pass	
200	V	0	41.8	14.8	5.5	24.5	37.6	43.5	-5.9	Pass	
225	V	0	30	15.6	5.9	24.5	27.0	46.0	-19.0	Pass	
280	V	0	33	17.9	6.4	24.4	32.9	46.0	-13.1	Pass	
120	V	0	46.5	11.4	3.8	24.7	37.0	43.5	-6.5	Pass	270 Degrees
128	V	0	40.7	11.5	4.2	24.6	31.8	43.5	-11.7	Pass	
160	V	0	41	13.1	4.7	24.6	34.2	43.5	-9.3	Pass	
200	V	0	41.7	14.8	5.5	24.5	37.5	43.5	-6.0	Pass	
225	V	0	29.4	15.6	5.9	24.5	26.4	46.0	-19.6	Pass	
280	V	0	33	17.9	6.4	24.4	32.9	46.0	-13.1	Pass	
120	V	0	46.4	11.4	3.8	24.7	36.9	43.5	-6.6	Pass	315 Degrees
128	V	0	40	11.5	4.2	24.6	31.1	43.5	-12.4	Pass	
160	V	0	40.6	13.1	4.7	24.6	33.8	43.5	-9.7	Pass	
200	V	0	41.9	14.8	5.5	24.5	37.7	43.5	-5.8	Pass	
225	V	0	41.9	15.6	5.9	24.5	38.9	46.0	-7.1	Pass	
280	V	0	32.2	17.9	6.4	24.4	32.1	46.0	-13.9	Pass	

..\EMCShare\AUTOMATED\DATASHTS\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

Test Data – Radiated Emissions

Complete	<u>X</u>	Job # :	<u> </u>	Test # :	<u>REHE-01</u>
Preliminary	<u> </u>		Page <u> 3 </u>	of	<u> 6 </u>
Client Name :	<u>IDS</u>				
EUT Name :	<u>Aladdin</u>				
EUT Model # :	<u>SK2</u>				
EUT Serial # :	<u>10</u>				
EUT Config. :	<u>Tx on sandpit</u>				
Specification :	<u>CFR47 Part 15, Subpart B, Class B</u>		Reference :		

[illegible]

Document Control #EMC DS EM RAD HFE

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Radiated Emissions Data											
Complete	<u> X </u>		Job # :	<u> </u>		Test # :	<u>REHE-01</u>				
Preliminary	<u> </u>			Page	<u> 4 </u>	of	<u> 6 </u>				
Client Name :	<u>IDS</u>										
EUT Name :	<u>Aladdin</u>										
EUT Model # :	<u>SK2</u>										
EUT Serial # :	<u>10</u>										
EUT Config. :	<u>Tx on sandpit</u>										
Specification :	<u>CFR47 Part 15, Subpart B, Class B</u>						Reference :	<u> </u>			
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Det. Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
360	V	0	33.4	15.1	7.4	24.4	31.5	46.0	-14.5	Pass	0 Degrees
400	V	0	23	16.6	8.0	24.4	23.2	46.0	-22.8	Pass	
440	V	0	24.8	17.4	8.0	24.4	25.8	46.0	-20.2	Pass	
520	V	0	26.7	16.6	8.9	24.5	27.7	46.0	-18.3	Pass	
720	V	0	28.5	17.7	10.7	24.5	32.4	46.0	-13.6	Pass	
360	V	0	32.1	15.1	7.4	24.4	30.2	46.0	-15.8	Pass	45 degrees
400	V	0	21	16.6	8.0	24.4	21.2	46.0	-24.8	Pass	
440	V	0	26.7	17.4	8.0	24.4	27.7	46.0	-18.3	Pass	
520	V	0	26.9	16.6	8.9	24.5	27.9	46.0	-18.1	Pass	
720	V	0	27.8	17.7	10.7	24.5	31.7	46.0	-14.3	Pass	
360	V	0	33.6	15.1	7.4	24.4	31.7	46.0	-14.3	Pass	90
400	V	0	25	16.6	8.0	24.4	25.2	46.0	-20.8	Pass	
440	V	0	28.2	17.4	8.0	24.4	29.2	46.0	-16.8	Pass	
520	V	0	28.3	16.6	8.9	24.5	29.3	46.0	-16.7	Pass	
720	V	0	28	17.7	10.7	24.5	31.9	46.0	-14.1	Pass	
360	V	0	34.4	15.1	7.4	24.4	32.5	46.0	-13.5	Pass	135
400	V	0	25.9	16.6	8.0	24.4	26.1	46.0	-19.9	Pass	
440	V	0	28.2	17.4	8.0	24.4	29.2	46.0	-16.8	Pass	
520	V	0	26.9	16.6	8.9	24.5	27.9	46.0	-18.1	Pass	
720	V	0	26.5	17.7	10.7	24.5	30.4	46.0	-15.6	Pass	
360	V	0	34.6	15.1	7.4	24.4	32.7	46.0	-13.3	Pass	180
400	V	0	25.8	16.6	8.0	24.4	26.0	46.0	-20.0	Pass	
440	V	0	28.1	17.4	8.0	24.4	29.1	46.0	-16.9	Pass	
520	V	0	28.1	16.6	8.9	24.5	29.1	46.0	-16.9	Pass	
720	V	0	24.4	17.7	10.7	24.5	28.3	46.0	-17.7	Pass	
360	V	0	35.4	15.1	7.4	24.4	33.5	46.0	-12.5	Pass	225
400	V	0	26.5	16.6	8.0	24.4	26.7	46.0	-19.3	Pass	
440	V	0	29.7	17.4	8.0	24.4	30.7	46.0	-15.3	Pass	
520	V	0	29.7	16.6	8.9	24.5	30.7	46.0	-15.3	Pass	
720	V	0	26	17.7	10.7	24.5	29.9	46.0	-16.1	Pass	

..\EMCShare\AUTOMATE\DATASHTS\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

EQUIPMENT: Aladdin SK2

Test Data – Radiated Emissions

Radiated Emissions Data											
Complete	<u> X </u>		Job # :		<u> </u>		Test # :		<u>REHE-01</u>		
Preliminary	<u> </u>		Page		<u> 5 </u>		of		<u> 6 </u>		
Client Name :	<u>IDS</u>										
EUT Name :	<u>Aladdin</u>										
EUT Model # :	<u>SK2</u>										
EUT Serial # :	<u>10</u>										
EUT Config. :	<u>Tx on sandpit</u>										
Specification :	<u>CFR47 Part 15, Subpart B, Class B</u>							Reference : <u> </u>			
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Det. Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
360	V	0	36.6	15.1	7.4	24.4	34.7	46.0	-11.3	Pass	270
400	V	0	20.8	16.6	8.0	24.4	21.0	46.0	-25.0	Pass	
440	V	0	26.7	17.4	8.0	24.4	27.7	46.0	-18.3	Pass	
520	V	0	27.9	16.6	8.9	24.5	28.9	46.0	-17.1	Pass	
720	V	0	26.2	17.7	10.7	24.5	30.1	46.0	-15.9	Pass	
360	V	0	35	15.1	7.4	24.4	33.1	46.0	-12.9	Pass	315
400	V	0	24.7	16.6	8.0	24.4	24.9	46.0	-21.1	Pass	
440	V	0	27.7	17.4	8.0	24.4	28.7	46.0	-17.3	Pass	
520	V	0	28.5	16.6	8.9	24.5	29.5	46.0	-16.5	Pass	
720	V	0	26	17.7	10.7	24.5	29.9	46.0	-16.1	Pass	
360	H	0	30.2	15.1	7.4	24.4	28.3	46.0	-17.7	Pass	0
400	H	0	30.3	16.6	8.0	24.4	30.5	46.0	-15.5	Pass	
440	H	0	25	17.4	8.0	24.4	26.0	46.0	-20.0	Pass	
520	H	0	31.9	16.6	8.9	24.5	32.9	46.0	-13.1	Pass	
720	H	0	30	17.7	10.7	24.5	33.9	46.0	-12.1	Pass	
360	H	0	28.9	15.1	7.4	24.4	27.0	46.0	-19.0	Pass	45
400	H	0	30	16.6	8.0	24.4	30.2	46.0	-15.8	Pass	
440	H	0	25.1	17.4	8.0	24.4	26.1	46.0	-19.9	Pass	
520	H	0	31.3	16.6	8.9	24.5	32.3	46.0	-13.7	Pass	
720	H	0	30.7	17.7	10.7	24.5	34.6	46.0	-11.4	Pass	
360	H	0	28	15.1	7.4	24.4	26.1	46.0	-19.9	Pass	90
400	H	0	30	16.6	8.0	24.4	30.2	46.0	-15.8	Pass	
440	H	0	25	17.4	8.0	24.4	26.0	46.0	-20.0	Pass	
520	H	0	33.3	16.6	8.9	24.5	34.3	46.0	-11.7	Pass	
720	H	0	29.2	17.7	10.7	24.5	33.1	46.0	-12.9	Pass	
360	H	0	31	15.1	7.4	24.4	29.1	46.0	-16.9	Pass	135
400	H	0	28	16.6	8.0	24.4	28.2	46.0	-17.8	Pass	
440	H	0	25.4	17.4	8.0	24.4	26.4	46.0	-19.6	Pass	
520	H	0	32.3	16.6	8.9	24.5	33.3	46.0	-12.7	Pass	
720	H	0	27.8	17.7	10.7	24.5	31.7	46.0	-14.3	Pass	

..\EMCShare\AUTOMATE\DATASHTS\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

Test Data – Radiated Emissions

Complete	<u>X</u>	Job # :	<u>3L0165R</u>	Test # :	<u>REHE-01</u>
Preliminary	<u> </u>		Page <u>6</u>	of	<u>6</u>
Client Name :	<u>IDS</u>				
EUT Name :	<u>Aladdin</u>				
EUT Model # :	<u>SK2</u>				
EUT Serial # :	<u>10</u>				
EUT Config. :	<u>Tx on sandpit</u>				
Specification :	<u>CFR47 Part 15, Subpart B, Class B</u>		Reference :		

[illegible]

Page 23 of 31

EQUIPMENT: Aladdin SK2

Radiated Photographs



EQUIPMENT: Aladdin SK2

Section 5. Highest Radiated Emission (f_M)

NAME OF TEST: Highest Radiated Emission (f_M)	PARA. NO.: 15.509(f)
TESTED BY: David Light	DATE: 16 June 2006

Test Results: Complies**Measurement Data: See attached table.**

For UWB devices where the frequency at which the highest radiated emission occurs, f_M , is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in 15.521.

Calculation:


$$20 \log (1(\text{RBW})/50) = -34 \text{ dBm EIRP}$$

EQUIPMENT: Aladdin SK2Test Data - f_M

Field Strength of Spurious Emissions											
Page <u>1</u> of <u>1</u>						Complete <u>X</u>					
Job No.: <u>6L0165</u>		Date: <u>6/16/2006</u>				Preliminary <u> </u>					
Specification: <u>15.509(f)</u>		Temperature(°C): <u>22</u>									
Tested By: <u>David Light</u>		Relative Humidity(%) <u>40</u>									
E.U.T.: <u>GPR</u>											
Configuration: <u>Tx</u>											
Sample No: <u>2</u>											
Location: <u>AC 3</u>				RBW: <u>1 MHz</u>		Measurement					
Detector Type: <u>Peak</u>				VBW: <u>1 MHz</u>		Distance: <u>3</u> m					
Test Equipment Used											
Antenna: <u>993</u>				Directional Coupler: <u> </u>							
Pre-Amp: <u>1016</u>				Cable #1: <u>1484</u>							
Filter: <u> </u>				Cable #2: <u>1485</u>							
Receiver: <u>1036</u>				Cable #3: <u> </u>							
Attenuator #1: <u> </u>				Cable #4: <u> </u>							
Attenuator #2: <u> </u>				Mixer: <u> </u>							
Additional equipment used: <u> </u>											
Measurement Uncertainty: <u>+/-1.7 dB</u>											
Frequency (MHz)	Meter Reading (dBm)	Correction Factor (dB)		Pre-Amp Gain (dB)	Substitution Antenna Gain (dBi)	Limit	EIRP (dBm)	EIRP (mW)	Polarity	Comments	
										200 kHz Repetition	
2151	-49.4	36.8		33	5.6	-34.0	-40.0	0.0001	H		
2538	-46.3	36.9		33	7.1	-34.0	-35.3	0.0003	V		
Notes: <u> </u>											

EQUIPMENT: Aladdin SK2Test Data – f_L/f_H 

Marker 2 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -20 dBm -56.88 dBm VBW 1 MHz
3.79959920 GHz SWT 15 ms Unit dBm

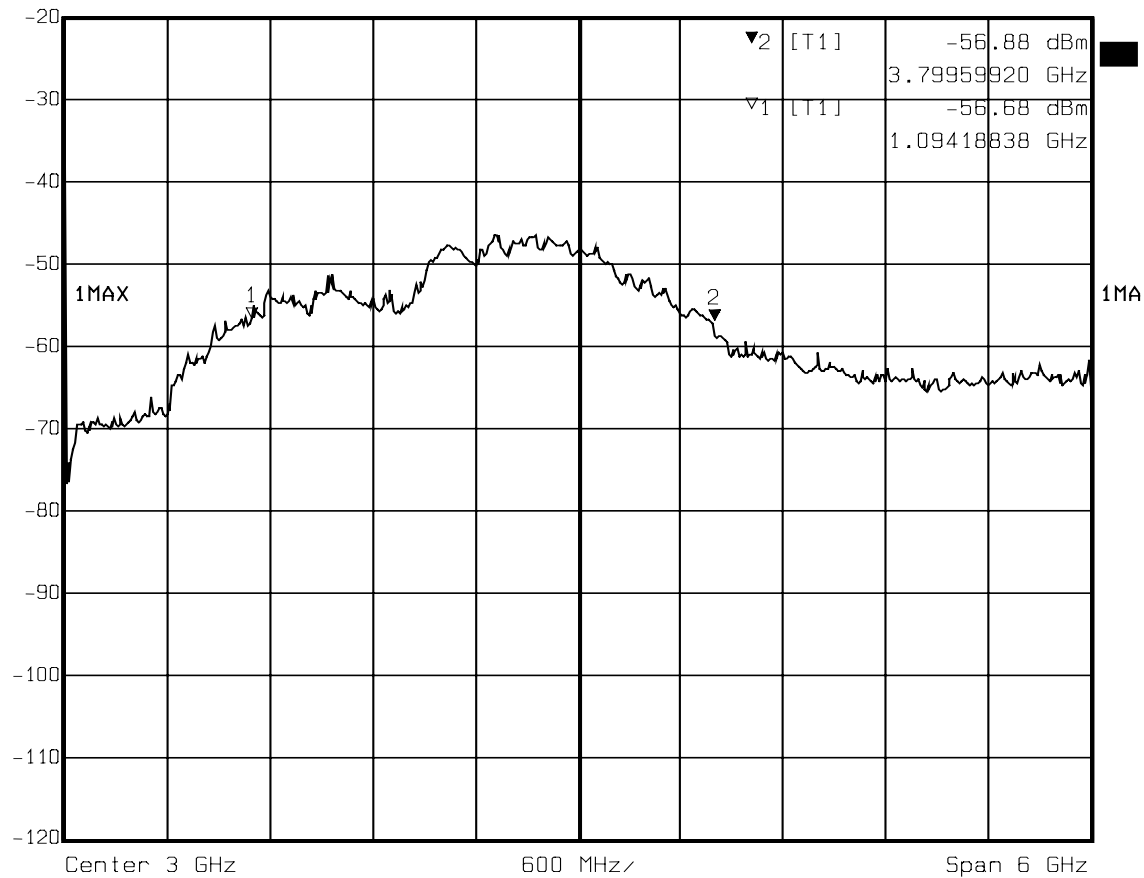

Date: 15.JUN.2006 16:23:51

EQUIPMENT: Aladdin SK2

Section6. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1484	Cable	Storm PR90-010-072	N/A	08/26/05	08/26/06
1485	Cable	Storm PR90-010-216	N/A	08/26/05	08/26/06
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	05/26/06	05/26/08
1082	CABLE	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	04/20/06	04/20/07
993	Horn antenna	A.H. Systems SAS-200/571	XXX	08/01/05	08/02/07
1195	ANTENNA,BICONICAL	A.H. SYSTEMS SAS-200/542	235	02/10/06	02/10/07
1034	ANTENNA,LP	A.H. SYSTEMS SAS-200/510	121	03/13/06	03/13/07
1522	Cable Assy, LAB 5 - D OATS	Nemko USA, Inc. Site D OATS	N/A	05/09/06	05/09/07
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	04/20/06	04/20/07


EQUIPMENT: Aladdin SK2

ANNEX A

TEST DIAGRAMS


EQUIPMENT: Aladdin SK2

Conducted Emissions

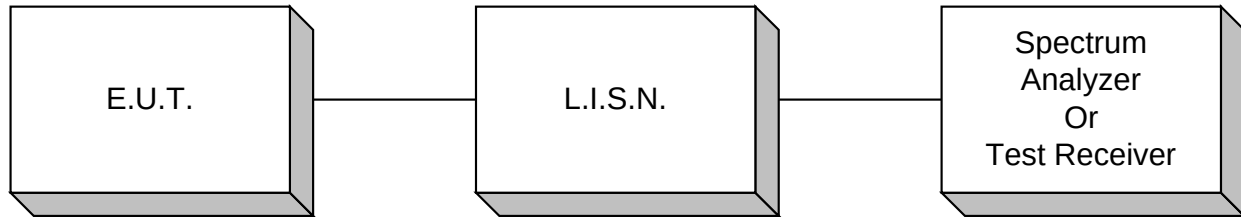


Radiated Prescan

EQUIPMENT: *Aladdin SK2*

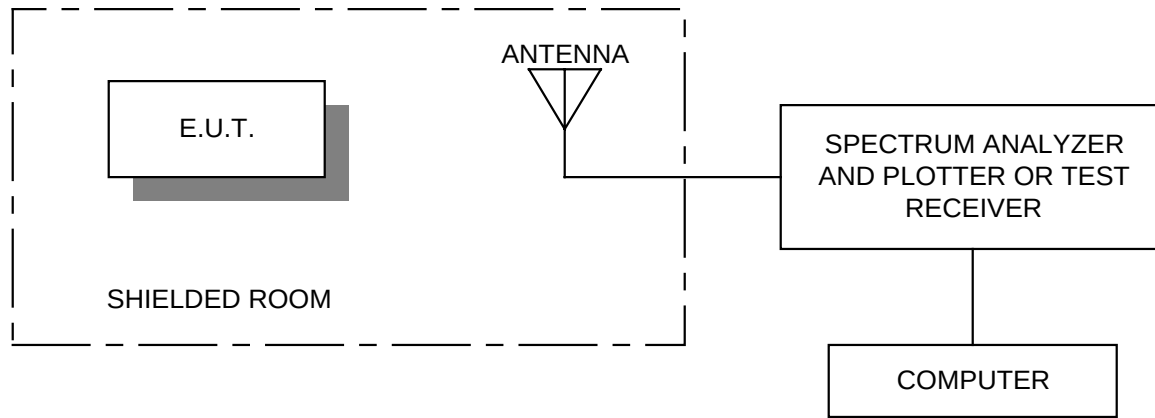

EQUIPMENT: Aladdin SK2

Test Site For Radiated Emissions

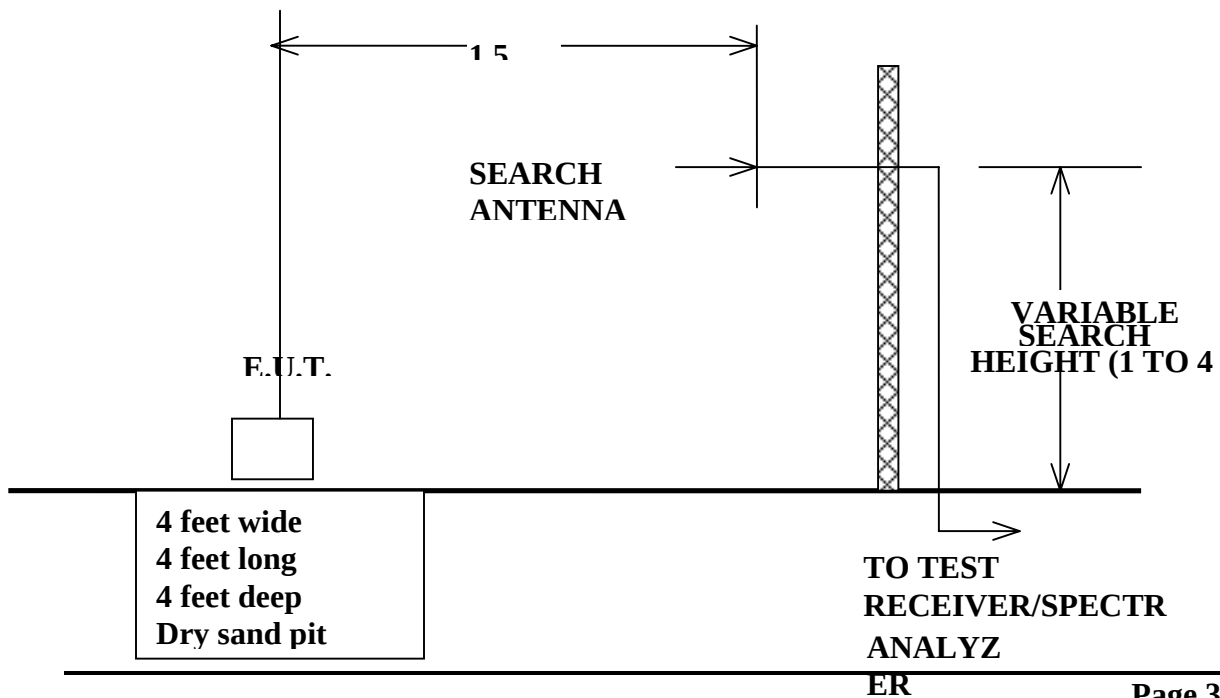

ER