



REPORT No.: SZ25120191W02

TEST REPORT

APPLICANT : Shenzhen Creality 3D
Technology Co., LTD.

PRODUCT NAME : Creality Sermoon P1

MODEL NAME : CRS14SP1

BRAND NAME : Sermoon

FCC ID : 2AXH6-CRS14SP1

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2025-12-12

TEST DATE : 2025-12-23 to 2026-02-24

ISSUE DATE : 2026-02-27



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.cn

Fax: 86-755-36698525
E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Results	4
1.1. Testing Applied Standards and Methods	5
1.2. Test Equipment and Software List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel Center Frequency of EUT	11
2.4. Test Configuration of EUT	15
2.5. Test Conditions	16
2.6. Test Setup Layout Diagram	17
3. Description of Test Items and Results	20
3.1. Antenna Requirement	20
3.2. Duty Cycle, Transmission Duration, and Maximum Power Control Level	21
3.3. Conducted Output Power and E.I.R.P.	22
3.4. Occupied Bandwidth and Emission Bandwidth	23
3.5. Power Spectral Density	24
3.6. Emission Mask	25
3.7. Contention Based Protocol	26
3.8. Frequency Stability	28
3.9. Conducted Emission	29
3.10. Restricted Frequency Bands	30
3.11. Radiated Emission	32
Annex A Test Data and Result	34
Notes	852



REPORT No.: SZ25120191W02

Change History		
Version	Date	Reason for change
1.0	2026-02-27	First edition



1. Summary of Test Results

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	ANSI C63.10	Duty Cycle of the Test Signal	Dec. 27, 2025 to Feb. 24, 2026	Li Xinpeng	PASS	/
3	15.407(a)	Conducted Output Power and E.I.R.P.	Dec. 27, 2025 to Feb. 24, 2026	Li Xinpeng	PASS	/
4	15.407(a)	Occupied Bandwidth and Emission Bandwidth	Dec. 27, 2025 to Feb. 24, 2026	Li Xinpeng	PASS	/
5	15.407(a)	Power Spectral Density	Dec. 27, 2025 to Feb. 24, 2026	Li Xinpeng	PASS	/
6	15.407(b)	Emission Mask	Jan. 06, 2026	Li Xinpeng	PASS	/
7	15.407(d)	Contention Based Protocol	Feb. 24, 2026	Li Xinpeng	PASS	/
8	15.407(g)	Frequency Stability	Jan. 06, 2026	Li Xinpeng	PASS	/
9	15.207	Conducted Emission	Jan. 04, 2026	Wang Yapeng	PASS	/
10	15.407(b)	Restricted Frequency Bands	Jan. 05, 2026	Zhong Xiangyun	PASS	/
11	15.407(b)	Radiated Emission	Jan. 05, 2026	Zhong Xiangyun	PASS	/

Note 1: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".



1.1. Testing Applied Standards and Methods

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

No.	Standards or Methods	Description
1	47 CFR Part 15 Subpart E	FCC Technical Requirements
2	ANSI C63.10	Procedures for Compliance Testing of Unlicensed Wireless Devices
3	KDB 789033 D02	Guidelines for compliance testing of U-NII devices
4	KDB 987594 D01	General guideline for U-NII 5,6,7,8 bands under Part 15 Subpart E
5	KDB 987594 D02	Guidelines for compliance testing of U-NII 6GHz devices
6	KDB 987594 D03	Questions and Answers for U-NII 5,6,7,8 bands under Part 15 Subpart E
7	KDB 662911 D01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band



1.2. Test Equipment and Software List

1.2.1. List of Software

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

1.2.2. Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.12.23	2026.12.22
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2025.09.03	2026.09.02
Temperature Chamber	12108015	DTL-003S101	YOMA	2025.09.03	2026.09.02
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.3. Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	101052	ESPI	R&S	2025.05.15	2026.05.14
LISN	103131	ENV 216	R&S	2025.03.20	2026.03.19
RF Coaxial Cable (DC-100MHz)	EMC-CE-00514	N/A	N/A	2025.05.06	2026.05.05

**1.2.4. Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	00131	FMZB1519B	Schwarzbeck	2025.09.08	2026.09.07
Test Antenna – Horn	9120D-963	BBHA 9120D	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2025.09.03	2026.09.02
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Frequency Stability	$\pm 2\%$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Shenzhen Creality 3D Technology Co., LTD.
Applicant Address:	18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen, 518131 Guangdong, P.R. China
Manufacturer:	Shenzhen Creality 3D Technology Co., LTD.
Manufacturer Address:	18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen, 518131 Guangdong, P.R. China

2.2. Information of EUT

Product Name:	Creality Sermoon P1			
Sample No.:	1#, 2#, 5#			
Hardware Version:	V1.0			
Software Version:	V0.0.12			
Modulation Technology:	OFDMA			
Modulation Mode:	802.11ax (HEW20), 802.11ax (HEW40), 802.11ax (HEW80), 802.11ax (HEW160), 802.11be (EHT20), 802.11be (EHT40), 802.11be (EHT80), 802.11be (EHT160), 802.11be (EHT320)			
U-NII Band:	☒U-NII 5 (5925-6425MHz), ☒U-NII 6 (6425-6525MHz), ☒U-NII 7 (6525-6875MHz), ☒U-NII 8 (6875-7125MHz).			
Operating Frequency Range:	U-NII 5 (5955-6415MHz), U-NII 6 (6435-6515MHz), U-NII 7 (6535-6855MHz), U-NII 8 (6875-7115MHz).			
Equipment Class:	☒Low Power Device		☐6ID ☐6PP ☒6XD ☐6CD	
	☐Standard Power Device		☐6SD ☐6FX ☐6FC	
Antenna Type:	PCB Antenna			
Antenna Gain(dBi):	Band	ANT 1	ANT 2	Directional Gain <small>Note2</small>
	5955MHz-6415MHz	5.58	4.82	8.22
	6435MHz-6515MHz	5.09	5.15	8.13
	6535MHz-6855MHz	5.77	5.90	8.85
	6875MHz-7115MHz	5.98	5.45	8.73

Accessory Information:	Battery	
	Brand Name:	NA
	Model No.:	C1336A1
	Serial No.:	N/A
	Capacity:	3500mAh
	Rated Voltage:	7.2V
	Charge Limit:	8.4V
	Manufacturer:	GUANGDONG POW-TECH NEW POWER CO., LTD.
	AC Adapter	
	Brand Name:	NA
	Model No.:	PD0657C-065A
	Serial No.:	N/A
	Rated Output:	20V $\pm$ 3.25A
	Rated Input:	100-240V $\sim$ 50/60Hz, 1.5A
	Manufacturer:	SHENZHEN ABP TECHNOLOGY CO., LTD.

Note 1: The EUT supports a MIMO function.

Modulation Mode	TX Function
☒ 802.11ax/be	2TX

Note 2: Directional gain is calculated based on KDB 662911 D01

KDB 662911 D01 Directional Gain Calculation			
Clause	Type	Correlation	Calculation formula
F.2.a	Equal G_{ANT} & Power	☐ (i). Correlated	$G_{ANT} + 10\log(N_{ANT})$
		☐ (ii). Uncorrelated	G_{ANT}
F.2.d	Unequal G_{ANT} & Equal Power	☒ (i). Correlated	$10\log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2/N_{ANT}]$
		☐ (ii). Uncorrelated	$10\log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{ANT}]$

Where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: All radiation test items operate at MIMO mode during the test.

Note 4: The dedicated software was used to control the EUT continuous transmission.

Note 5: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3. Channel Center Frequency of EUT

2.3.1. Channel center frequency of different bandwidths

Channel Center Frequency = 5950MHz + 5 x n _{ch} ; 1 ≤ n _{ch} ≤ 233	
Bandwidth	Value of n _{ch}
20MHz	1 + 4(n-1); 1 ≤ n ≤ 59
40MHz	3 + 8(n-1); 1 ≤ n ≤ 29
80MHz	7 + 16(n-1); 1 ≤ n ≤ 14
160MHz	15 + 32(n-1); 1 ≤ n ≤ 7
320MHz	31+64(n-1), 1≤ n ≤ 3.5

2.3.2. Center Frequency of Low Middle and High Channel in each U-NII band

Bandwidth	LCH/MCH/HCH	n/n _{ch} /Frequency@MHz			
		U-NII 5	U-NII 6	U-NII 7	U-NII 8
20MHz	LCH	1/1/5955	25/97/6435	30/117/6535	47/185/6875
	MCH	12/45/6175	27/105/6475	38/149/6695	53/209/6995
	HCH	24/93/6415	29/113/6515	46/181/6855	59/233/7115
40MHz	LCH	1/3/5965	13/99/6445	16/123/6565	24/187/6885
	MCH	7/51/6205	-/-/-	19/147/6685	26/203/6965
	HCH	12/91/6405	14/107/6485	23/179/6845	29/227/7085
80MHz	LCH	1/7/5985	-/-/-	9/135/6625	13/199/6945
	MCH	4/55/6225	7/103/6465	10/151/6705	-/-/-
	HCH	6/87/6385	-/-/-	11/167/6785	14/215/7025
160MHz	LCH	1/15/6025	-/-/-	-/-/-	-/-/-
	MCH	2/47/6185	-/-/-	5/143/6665	7/207/6985
	HCH	3/79/6345	-/-/-	-/-/-	-/-/-
320MHz	LCH	1/31/6105			
	-	1.5/63/6265			
	MCH	2/95/6425			
	-	2.5/127/6585			
	-	3/159/6745			
	HCH	3.5/191/6905			
	HCH	3/159/6745			

2.3.3. Channel Puncturing

For 802.11be channel puncturing is supported as follows:

PPDU Bandwidth	Cases	Puncturing Pattern (RU or MRU Index)	Field Value
20 MHz	No puncturing	[1] (242-tone RU 1)	0
40 MHz	No puncturing	[1 1] (484-tone RU 1)	0
80 MHz	No puncturing	[1 1 1 1] (996-tone RU 1)	0
	20 MHz puncturing	[x 1 1 1] (484+242-tone MRU 1)	1
		[1 x 1 1] (484+242-tone MRU 2)	2
		[1 1 x 1] (484+242-tone MRU 3)	3
		[1 1 1 x] (484+242-tone MRU 4)	4
160 MHz	No puncturing	[1 1 1 1 1 1 1 1] (2*996-tone RU 1)	0
	20 MHz puncturing	[x 1 1 1 1 1 1 1] (996+484+242-tone MRU 1)	1
		[1 x 1 1 1 1 1 1] (996+484+242-tone MRU 2)	2
		[1 1 x 1 1 1 1 1] (996+484+242-tone MRU 3)	3
		[1 1 1 x 1 1 1 1] (996+484+242-tone MRU 4)	4
		[1 1 1 1 x 1 1 1] (996+484+242-tone MRU 5)	5
		[1 1 1 1 1 x 1 1] (996+484+242-tone MRU 6)	6
		[1 1 1 1 1 1 x 1] (996+484+242-tone MRU 7)	7
		[1 1 1 1 1 1 1 x] (996+484+242-tone MRU 8)	8

Continued

PPDU Bandwidth	Cases	Puncturing Pattern (RU or MRU Index)	Field Value
160 MHz	40 MHz puncturing	[x x 1 1 1 1 1 1] (996+484-tone MRU 1)	9
		[1 1 x x 1 1 1 1] (996+484-tone MRU 2)	10
		[1 1 1 1 x x 1 1] (996+484-tone MRU 3)	11
		[1 1 1 1 1 1 x x] (996+484-tone MRU 4)	12
320 MHz	No puncturing	[1 1 1 1 1 1 1 1] (4x996-tone RU 1)	0
	40 MHz puncturing	[x 1 1 1 1 1 1 1] (3*996+484-tone MRU 1)	1
		[1 x 1 1 1 1 1 1] (3*996+484-tone MRU 2)	2
		[1 1 x 1 1 1 1 1] (3*996+484-tone MRU 3)	3
		[1 1 1 x 1 1 1 1] (3*996+484-tone MRU 4)	4
		[1 1 1 1 x 1 1 1] (3*996+484-tone MRU 5)	5
		[1 1 1 1 1 x 1 1] (3*996+484-tone MRU 6)	6
		[1 1 1 1 1 1 x 1] (3*996+484-tone MRU 7)	7
		[1 1 1 1 1 1 1 x] (3*996+484-tone MRU 8)	8
	80 MHz puncturing	[x x 1 1 1 1 1 1] (3*996-tone MRU 1)	9
		[1 1 x x 1 1 1 1] (3*996-tone MRU 2)	10
		[1 1 1 1 x x 1 1] (3*996-tone MRU 3)	11
		[1 1 1 1 1 1 x x] (3*996-tone MRU 4)	12

Continued

PPDU Bandwidth	Cases	Puncturing Pattern (RU or MRU Index)	Field Value
320 MHz	Concurrent 80 MHz and 40 MHz puncturing	[x x x 1 1 1 1 1] (2*996+484-tone MRU 7)	13
		[x x 1 x 1 1 1 1] (2*996+484-tone MRU 8)	14
		[x x 1 1 x 1 1 1] (2*996+484-tone MRU 9)	15
		[x x 1 1 1 x 1 1] (2*996+484-tone MRU 10)	16
		[x x 1 1 1 1 x 1] (2*996+484-tone MRU 11)	17
		[x x 1 1 1 1 1 x] (2*996+484-tone MRU 12)	18
		[x 1 1 1 1 1 x x] (2*996+484-tone MRU 1)	19
		[1 x 1 1 1 1 x x] (2*996+484-tone MRU 2)	20
		[1 1 x 1 1 1 x x] (2*996+484-tone MRU 3)	21
		[1 1 1 x 1 1 x x] (2*996+484-tone MRU 4)	22
		[1 1 1 1 x 1 x x] (2*996+484-tone MRU 5)	23
		[1 1 1 1 1 x x x] (2*996+484-tone MRU 6)	24

Note 1: The channel puncturing mode is for improving network performance and not available for CBP.

Note 2: Only the worst cases are shown in this report.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate
802.11ax	20/40/80/160 (HEW20/40/80/160)	OFDMA	BPSK	MSC0~MCS11
			QPSK	
			16QAM	
			64QAM	
			256QAM	
			1024QAM	
802.11be	20/40/80/160/320 (EHT20/40/80/160/320)	OFDMA	BPSK	MSC0~MCS13
			QPSK	
			16QAM	
			64QAM	
			256QAM	
			1024QAM	
			2048QAM	
			4096QAM	

Note1: The RU allocation of 802.11ax mode, only full ru is supported.

Note2: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note3: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.

2.4.2. Evaluation of The Worst Case

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode
Conducted Output Power and E.I.R.P.	be320 6745MHz@Ant2
Power Spectral Density	ax20 6875MHz MIMO
Occupied Bandwidth and Emission Bandwidth	be320 puncturing 40 MRU2 6105MHz@MIMO
Emission Mask	Each Bandwidth
Contention Based Protocol	Each U-NII Band and Each Bandwidth
Frequency Stability	Unmodulated Signal
Conducted Emission	Normal Use
Restricted Frequency Bands	ax20, ax40, ax80 in U-NII 5&8
Radiated Emission	ax20

Note 1: The worst-case mode in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.


2.5. Test Conditions

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


1) For Output Power:

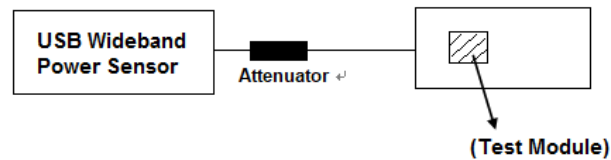


2) For Contention Based Protocol:

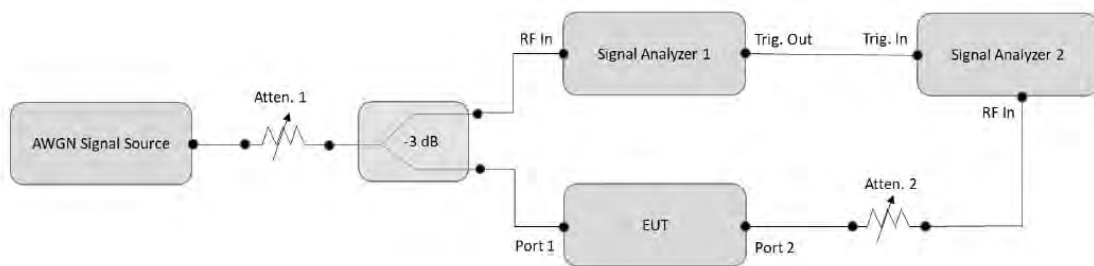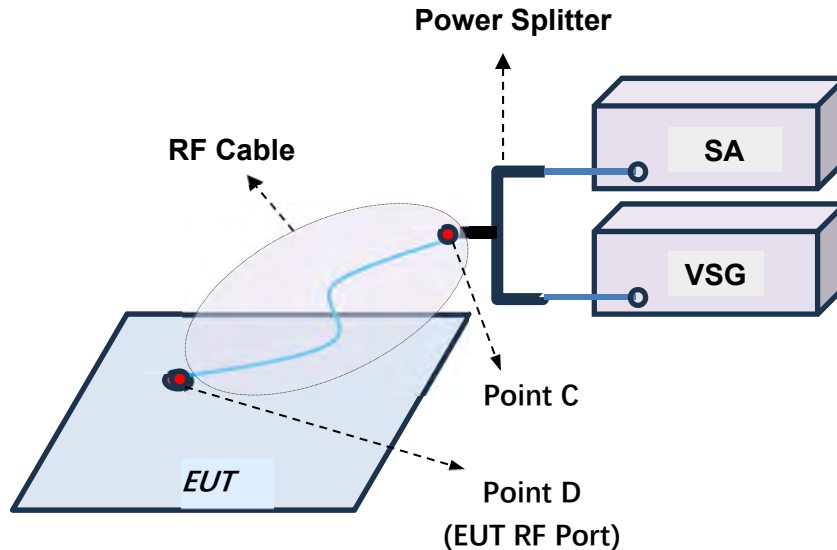


3) For Frequency Stability:

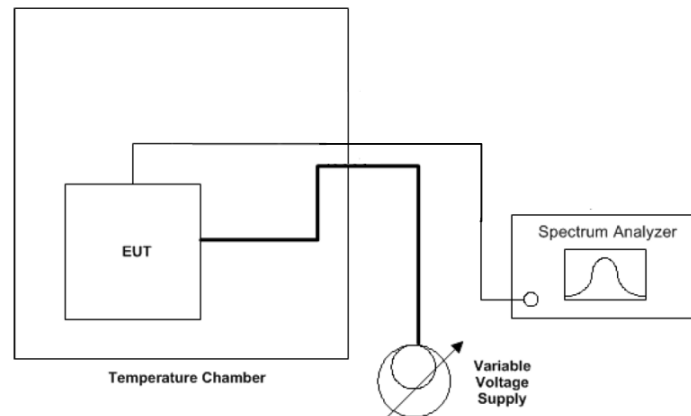

4) For other items:

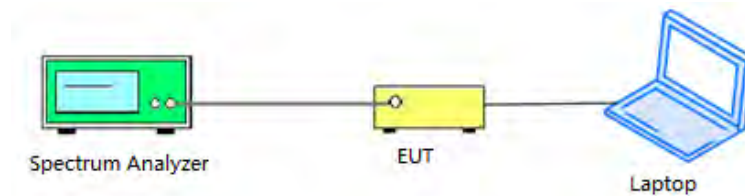


2.6.2. Conducted Emission Measurement

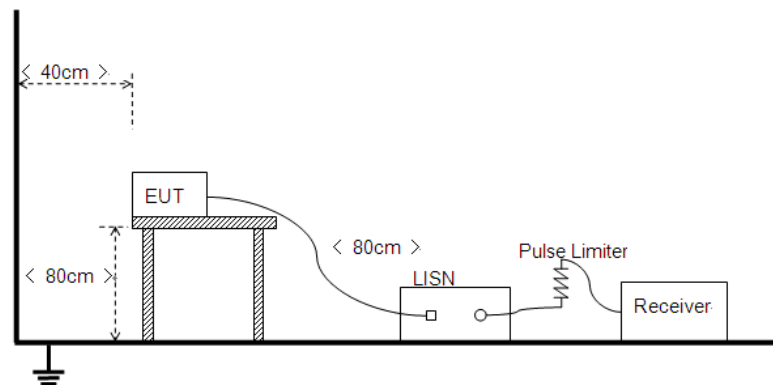


2.6.3. Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

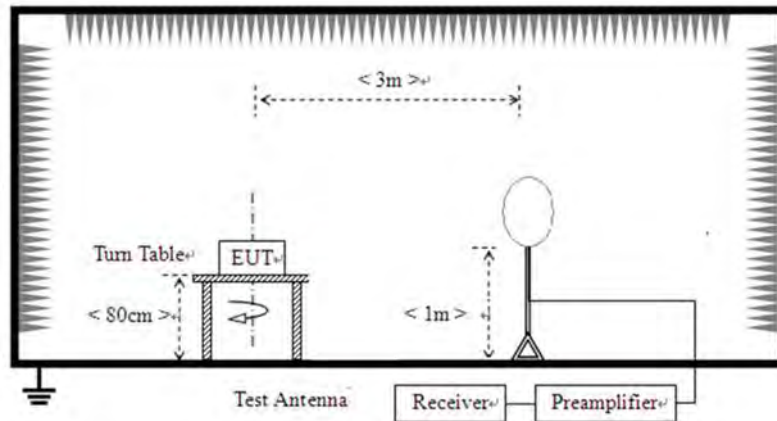

2) For radiated emissions from 30MHz to 1GHz

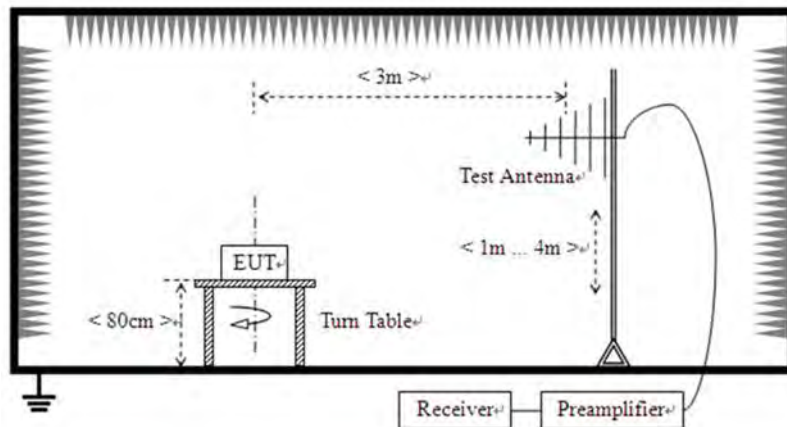

3) For radiated emissions above 1GHz

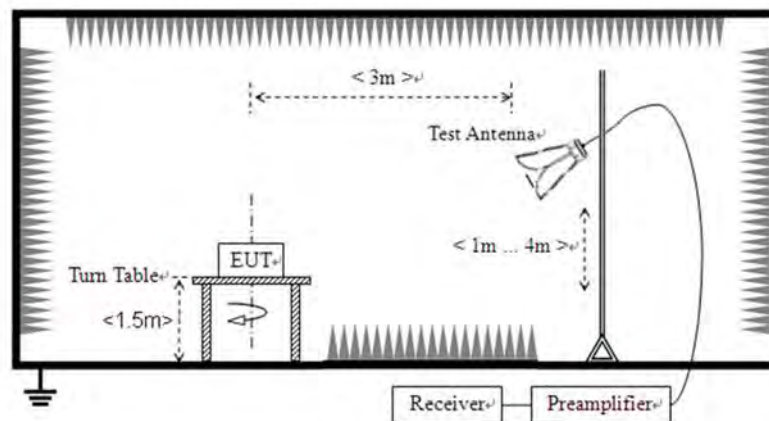

3. Description of Test Items and Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☒ PCB Antenna ☐ PIFA Antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☒ Layout

3.2. Duty Cycle, Transmission Duration, and Maximum Power Control Level

3.2.1. Requirement

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x , and maximum-power transmission duration, T , are required for each tested mode of operation. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non-constant.

- 1) T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- 2) Duty cycle (x), as used in this document, refers to the fraction of time over which the transmitter is on and is transmitting at its maximum power control level.
- 3) The term “maximum power control level” is intended to distinguish between operating power levels of the EUT and differences in power levels of individual symbols that occur with some modulation types such as quadrature amplitude modulation (QAM). During testing, the EUT is not required to transmit continuously its highest possible symbol power level. Rather, it shall transmit all of the symbols and shall do so at the highest power control level (i.e., highest operating power level) of the EUT.

3.2.2. Test Procedures

Refer to section II.B.2 of KDB 789033 D02.

3.2.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.2.4. Test Result

Refer to Annex A.1 in this report.

3.3. Conducted Output Power and E.I.R.P.

3.3.1. Requirement

Device Class	U-NII Band	EIRP	Clause
Standard-Power AP	U-NII 5 U-NII 7	36dBm ($\leq 21\text{dBm}@>30^\circ$ for outdoor device)	15.407(a)(4)
Client Connected to Standard-Power AP			
Client Device (Except fixed client)		30dBm (Power below its associated standard power access point's authorized transmit power $\leq 6\text{dB}$)	15.407(a)(7)
Low-Power AP	U-NII 5	30dBm	15.407(a)(5)
Client Connected to Low-Power AP	U-NII 6 U-NII 7	24dBm	15.407(a)(8)
Subordinate Device	U-NII 8	30dBm	15.407(a)(6)

3.3.2. Test Procedures

Refer to the Method PM-G which in section II.C.1. of KDB 789033 D02.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Occupied Bandwidth and Emission Bandwidth

3.4.1. Requirement

The occupied bandwidth is the bandwidth containing 99 % of the power of the signal.

The emission bandwidth here is the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio of 26dB.

The maximum occupied bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

There is no requirement on the occupied bandwidth and emission bandwidth itself, but the value of emission bandwidth is required in other test items, such as emission mask, etc.

3.4.1. Test Procedures

Refer to section II.C.1. of KDB 789033 D02.

3.4.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3. Test Result

Refer to Annex A.3 in this report.

3.5. Power Spectral Density

3.5.1. Requirement

Device Class	U-NII Band	EIRP.SD	Clause
Standard-Power AP	U-NII 5 U-NII 7	23dBm/MHz	15.407(a)(4)
Client Connected to Standard-Power AP			
Client Device (Except fixed client)		17dBm/MHz	15.407(a)(7)
Low-Power AP	U-NII 5 U-NII 6 U-NII 7 U-NII 8	5dBm/MHz	15.407(a)(5)
Client Connected to Low-Power AP		-1dBm/MHz	15.407(a)(8)
Subordinate Device		5dBm/MHz	15.407(a)(6)

3.5.2. Test Procedures

Refer to section II.F of KDB 789033 D02.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.


3.5.4. Test Result

Refer to Annex A.4 in this report.

3.6. Emission Mask

3.6.1. Requirement

For transmitters operating within the 5.925–7.125GHz bands: Power spectral density must be suppressed by 20dB at 1 MHz outside of channel edge, by 28dB at one channel bandwidth from the channel center, and by 40dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20dB and 28dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28dB and 40dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40dB.

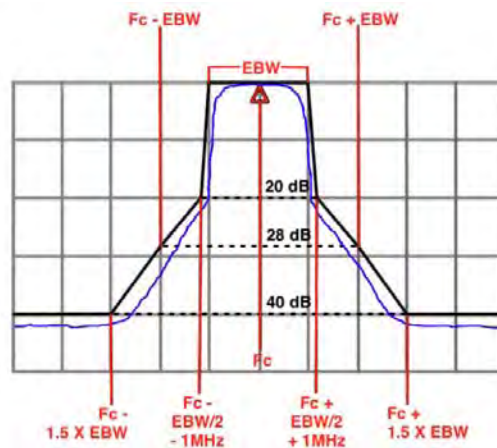

Generic Emission Mask

3.6.2. Test Procedures

Refer to section II.J of KDB 987594 D02.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 in this report.



3.7. Contention Based Protocol

3.7.1. Requirement

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125GHz band are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62dBm). The -62dBm (or lower) threshold is referenced to a 0dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Parameters	Limit		
Detection Threshold	≤ -62dBm		
Detection Probability	≥ 90%		
Simulating Incumbent Signal Type	AWGN		
Simulating Incumbent Signal Bandwidth	10MHz		
Number of tests			
	If	Number of Tests	Placement of Incumbent Transmission
	$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
	$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
	$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
	$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel
where:			
BW_{EUT} : Transmission bandwidth of EUT signal			
BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)			
f_{c1} : Center frequency of EUT transmission			
f_{c2} : Center frequency of simulated incumbent signal			

Min_{DL} is the Minimum AWGN single level that the EUT detects and determines the medium is busy.

3.7.2. Test Procedures

Refer to section II.J of KDB 987594 D02.

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.6 in this report.



3.8. Frequency Stability

3.8.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.8.2. Test Procedures

Refer to section 6.8 of ANSI C63.10.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.7 in this report.

3.9. Conducted Emission

3.9.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.9.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.9.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.

3.10. Restricted Frequency Bands

3.10.1. Requirement

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), should comply with the radiated emission limits specified in Section 15.209(a) (below table).

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m):

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the above table.

For Above 1000MHz, the emission limit in above is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

3.10.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.



KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result

Refer to Annex A.9 in this report.

3.11. Radiated Emission

3.11.1. Requirement

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of –27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

3.11.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT



distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.11.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.11.4. Test Result

Refer to Annex A.10 in this report.

Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	ax20 SISO	5955	Ant1	100	0	0
NVNT	ax20 SISO	6175	Ant1	100	0	0
NVNT	ax20 SISO	6415	Ant1	100	0	0
NVNT	ax20 SISO	6435	Ant1	100	0	0
NVNT	ax20 SISO	6475	Ant1	100	0	0
NVNT	ax20 SISO	6515	Ant1	100	0	0
NVNT	ax20 SISO	6535	Ant1	100	0	0
NVNT	ax20 SISO	6695	Ant1	100	0	0
NVNT	ax20 SISO	6855	Ant1	100	0	0
NVNT	ax20 SISO	6875	Ant1	100	0	0
NVNT	ax20 SISO	6995	Ant1	100	0	0
NVNT	ax20 SISO	7115	Ant1	100	0	0
NVNT	ax20 SISO	5955	Ant2	100	0	0
NVNT	ax20 SISO	6175	Ant2	100	0	0
NVNT	ax20 SISO	6415	Ant2	100	0	0
NVNT	ax20 SISO	6435	Ant2	100	0	0
NVNT	ax20 SISO	6475	Ant2	100	0	0
NVNT	ax20 SISO	6515	Ant2	100	0	0
NVNT	ax20 SISO	6535	Ant2	100	0	0
NVNT	ax20 SISO	6695	Ant2	100	0	0
NVNT	ax20 SISO	6855	Ant2	100	0	0
NVNT	ax20 SISO	6875	Ant2	100	0	0
NVNT	ax20 SISO	6995	Ant2	100	0	0
NVNT	ax20 SISO	7115	Ant2	100	0	0
NVNT	ax20 MIMO	5955	Sum	100	0	0
NVNT	ax20 MIMO	6175	Sum	100	0	0
NVNT	ax20 MIMO	6415	Sum	100	0	0
NVNT	ax20 MIMO	6435	Sum	100	0	0
NVNT	ax20 MIMO	6475	Sum	100	0	0
NVNT	ax20 MIMO	6515	Sum	100	0	0
NVNT	ax20 MIMO	6535	Sum	100	0	0
NVNT	ax20 MIMO	6695	Sum	100	0	0



NVNT	ax20 MIMO	6855	Sum	100	0	0
NVNT	ax20 MIMO	6875	Sum	100	0	0
NVNT	ax20 MIMO	6995	Sum	100	0	0
NVNT	ax20 MIMO	7115	Sum	100	0	0
NVNT	ax40 SISO	5965	Ant1	100	0	0
NVNT	ax40 SISO	6205	Ant1	100	0	0
NVNT	ax40 SISO	6405	Ant1	100	0	0
NVNT	ax40 SISO	6445	Ant1	100	0	0
NVNT	ax40 SISO	6485	Ant1	100	0	0
NVNT	ax40 SISO	6565	Ant1	100	0	0
NVNT	ax40 SISO	6685	Ant1	100	0	0
NVNT	ax40 SISO	6845	Ant1	100	0	0
NVNT	ax40 SISO	6885	Ant1	100	0	0
NVNT	ax40 SISO	6965	Ant1	100	0	0
NVNT	ax40 SISO	7085	Ant1	100	0	0
NVNT	ax40 SISO	5965	Ant2	100	0	0
NVNT	ax40 SISO	6205	Ant2	100	0	0
NVNT	ax40 SISO	6405	Ant2	100	0	0
NVNT	ax40 SISO	6445	Ant2	100	0	0
NVNT	ax40 SISO	6485	Ant2	100	0	0
NVNT	ax40 SISO	6565	Ant2	100	0	0
NVNT	ax40 SISO	6685	Ant2	100	0	0
NVNT	ax40 SISO	6845	Ant2	100	0	0
NVNT	ax40 SISO	6885	Ant2	100	0	0
NVNT	ax40 SISO	6965	Ant2	100	0	0
NVNT	ax40 SISO	7085	Ant2	100	0	0
NVNT	ax40 MIMO	5965	Sum	100	0	0
NVNT	ax40 MIMO	6205	Sum	100	0	0
NVNT	ax40 MIMO	6405	Sum	100	0	0
NVNT	ax40 MIMO	6445	Sum	100	0	0
NVNT	ax40 MIMO	6485	Sum	100	0	0
NVNT	ax40 MIMO	6565	Sum	100	0	0
NVNT	ax40 MIMO	6685	Sum	100	0	0
NVNT	ax40 MIMO	6845	Sum	100	0	0
NVNT	ax40 MIMO	6885	Sum	100	0	0
NVNT	ax40 MIMO	6965	Sum	100	0	0
NVNT	ax40 MIMO	7085	Sum	100	0	0
NVNT	ax80 SISO	5985	Ant1	100	0	0



NVNT	ax80 SISO	6225	Ant1	100	0	0
NVNT	ax80 SISO	6385	Ant1	100	0	0
NVNT	ax80 SISO	6465	Ant1	100	0	0
NVNT	ax80 SISO	6625	Ant1	100	0	0
NVNT	ax80 SISO	6705	Ant1	100	0	0
NVNT	ax80 SISO	6785	Ant1	100	0	0
NVNT	ax80 SISO	6945	Ant1	100	0	0
NVNT	ax80 SISO	7025	Ant1	100	0	0
NVNT	ax80 SISO	5985	Ant2	100	0	0
NVNT	ax80 SISO	6225	Ant2	100	0	0
NVNT	ax80 SISO	6385	Ant2	100	0	0
NVNT	ax80 SISO	6465	Ant2	100	0	0
NVNT	ax80 SISO	6625	Ant2	100	0	0
NVNT	ax80 SISO	6705	Ant2	100	0	0
NVNT	ax80 SISO	6785	Ant2	100	0	0
NVNT	ax80 SISO	6945	Ant2	100	0	0
NVNT	ax80 SISO	7025	Ant2	100	0	0
NVNT	ax80 MIMO	5985	Sum	100	0	0
NVNT	ax80 MIMO	6225	Sum	100	0	0
NVNT	ax80 MIMO	6385	Sum	100	0	0
NVNT	ax80 MIMO	6465	Sum	100	0	0
NVNT	ax80 MIMO	6625	Sum	100	0	0
NVNT	ax80 MIMO	6705	Sum	100	0	0
NVNT	ax80 MIMO	6785	Sum	100	0	0
NVNT	ax80 MIMO	6945	Sum	100	0	0
NVNT	ax80 MIMO	7025	Sum	100	0	0
NVNT	ax160 SISO	6025	Ant1	100	0	0
NVNT	ax160 SISO	6185	Ant1	100	0	0
NVNT	ax160 SISO	6345	Ant1	100	0	0
NVNT	ax160 SISO	6665	Ant1	100	0	0
NVNT	ax160 SISO	6985	Ant1	100	0	0
NVNT	ax160 SISO	6025	Ant2	100	0	0
NVNT	ax160 SISO	6185	Ant2	100	0	0
NVNT	ax160 SISO	6345	Ant2	100	0	0
NVNT	ax160 SISO	6665	Ant2	100	0	0
NVNT	ax160 SISO	6985	Ant2	100	0	0
NVNT	ax160 MIMO	6025	Sum	100	0	0
NVNT	ax160 MIMO	6185	Sum	100	0	0



NVNT	ax160 MIMO	6345	Sum	100	0	0
NVNT	ax160 MIMO	6665	Sum	100	0	0
NVNT	ax160 MIMO	6985	Sum	100	0	0
NVNT	be20 SISO	5955	Ant1	100	0	0
NVNT	be20 SISO	6175	Ant1	100	0	0
NVNT	be20 SISO	6415	Ant1	100	0	0
NVNT	be20 SISO	6435	Ant1	100	0	0
NVNT	be20 SISO	6475	Ant1	100	0	0
NVNT	be20 SISO	6515	Ant1	100	0	0
NVNT	be20 SISO	6535	Ant1	100	0	0
NVNT	be20 SISO	6695	Ant1	100	0	0
NVNT	be20 SISO	6855	Ant1	100	0	0
NVNT	be20 SISO	6875	Ant1	100	0	0
NVNT	be20 SISO	6995	Ant1	100	0	0
NVNT	be20 SISO	7115	Ant1	100	0	0
NVNT	be20 SISO	5955	Ant2	100	0	0
NVNT	be20 SISO	6175	Ant2	100	0	0
NVNT	be20 SISO	6415	Ant2	100	0	0
NVNT	be20 SISO	6435	Ant2	100	0	0
NVNT	be20 SISO	6475	Ant2	100	0	0
NVNT	be20 SISO	6515	Ant2	100	0	0
NVNT	be20 SISO	6535	Ant2	100	0	0
NVNT	be20 SISO	6695	Ant2	100	0	0
NVNT	be20 SISO	6855	Ant2	100	0	0
NVNT	be20 SISO	6875	Ant2	100	0	0
NVNT	be20 SISO	6995	Ant2	100	0	0
NVNT	be20 SISO	7115	Ant2	100	0	0
NVNT	be20 MIMO	5955	Sum	100	0	0
NVNT	be20 MIMO	6175	Sum	100	0	0
NVNT	be20 MIMO	6415	Sum	100	0	0
NVNT	be20 MIMO	6435	Sum	100	0	0
NVNT	be20 MIMO	6475	Sum	100	0	0
NVNT	be20 MIMO	6515	Sum	100	0	0
NVNT	be20 MIMO	6535	Sum	100	0	0
NVNT	be20 MIMO	6695	Sum	100	0	0
NVNT	be20 MIMO	6855	Sum	100	0	0
NVNT	be20 MIMO	6875	Sum	100	0	0
NVNT	be20 MIMO	6995	Sum	100	0	0



NVNT	be20 MIMO	7115	Sum	100	0	0
NVNT	be40 SISO	5965	Ant1	100	0	0
NVNT	be40 SISO	6205	Ant1	100	0	0
NVNT	be40 SISO	6405	Ant1	100	0	0
NVNT	be40 SISO	6445	Ant1	100	0	0
NVNT	be40 SISO	6485	Ant1	100	0	0
NVNT	be40 SISO	6565	Ant1	100	0	0
NVNT	be40 SISO	6685	Ant1	100	0	0
NVNT	be40 SISO	6845	Ant1	100	0	0
NVNT	be40 SISO	6885	Ant1	100	0	0
NVNT	be40 SISO	6965	Ant1	100	0	0
NVNT	be40 SISO	7085	Ant1	100	0	0
NVNT	be40 SISO	5965	Ant2	100	0	0
NVNT	be40 SISO	6205	Ant2	100	0	0
NVNT	be40 SISO	6405	Ant2	100	0	0
NVNT	be40 SISO	6445	Ant2	100	0	0
NVNT	be40 SISO	6485	Ant2	100	0	0
NVNT	be40 SISO	6565	Ant2	100	0	0
NVNT	be40 SISO	6685	Ant2	100	0	0
NVNT	be40 SISO	6845	Ant2	100	0	0
NVNT	be40 SISO	6885	Ant2	100	0	0
NVNT	be40 SISO	6965	Ant2	100	0	0
NVNT	be40 SISO	7085	Ant2	100	0	0
NVNT	be40 MIMO	5965	Sum	100	0	0
NVNT	be40 MIMO	6205	Sum	100	0	0
NVNT	be40 MIMO	6405	Sum	100	0	0
NVNT	be40 MIMO	6445	Sum	100	0	0
NVNT	be40 MIMO	6485	Sum	100	0	0
NVNT	be40 MIMO	6565	Sum	100	0	0
NVNT	be40 MIMO	6685	Sum	100	0	0
NVNT	be40 MIMO	6845	Sum	100	0	0
NVNT	be40 MIMO	6885	Sum	100	0	0
NVNT	be40 MIMO	6965	Sum	100	0	0
NVNT	be40 MIMO	7085	Sum	100	0	0
NVNT	be80 SISO	5985	Ant1	100	0	0
NVNT	be80 SISO	6225	Ant1	100	0	0
NVNT	be80 SISO	6385	Ant1	100	0	0
NVNT	be80 SISO	6465	Ant1	100	0	0



NVNT	be80 SISO	6625	Ant1	100	0	0
NVNT	be80 SISO	6705	Ant1	100	0	0
NVNT	be80 SISO	6785	Ant1	100	0	0
NVNT	be80 SISO	6945	Ant1	100	0	0
NVNT	be80 SISO	7025	Ant1	100	0	0
NVNT	be80 SISO	5985	Ant2	100	0	0
NVNT	be80 SISO	6225	Ant2	100	0	0
NVNT	be80 SISO	6385	Ant2	100	0	0
NVNT	be80 SISO	6465	Ant2	100	0	0
NVNT	be80 SISO	6625	Ant2	100	0	0
NVNT	be80 SISO	6705	Ant2	100	0	0
NVNT	be80 SISO	6785	Ant2	100	0	0
NVNT	be80 SISO	6945	Ant2	100	0	0
NVNT	be80 SISO	7025	Ant2	100	0	0
NVNT	be80 MIMO	5985	Sum	100	0	0
NVNT	be80 MIMO	6225	Sum	100	0	0
NVNT	be80 MIMO	6385	Sum	100	0	0
NVNT	be80 MIMO	6465	Sum	100	0	0
NVNT	be80 MIMO	6625	Sum	100	0	0
NVNT	be80 MIMO	6705	Sum	100	0	0
NVNT	be80 MIMO	6785	Sum	100	0	0
NVNT	be80 MIMO	6945	Sum	100	0	0
NVNT	be80 MIMO	7025	Sum	100	0	0
NVNT	be160 SISO	6025	Ant1	100	0	0
NVNT	be160 SISO	6185	Ant1	100	0	0
NVNT	be160 SISO	6345	Ant1	100	0	0
NVNT	be160 SISO	6665	Ant1	100	0	0
NVNT	be160 SISO	6985	Ant1	100	0	0
NVNT	be160 SISO	6025	Ant2	100	0	0
NVNT	be160 SISO	6185	Ant2	100	0	0
NVNT	be160 SISO	6345	Ant2	100	0	0
NVNT	be160 SISO	6665	Ant2	100	0	0
NVNT	be160 SISO	6985	Ant2	100	0	0
NVNT	be160 MIMO	6025	Sum	100	0	0
NVNT	be160 MIMO	6185	Sum	100	0	0
NVNT	be160 MIMO	6345	Sum	100	0	0
NVNT	be160 MIMO	6665	Sum	100	0	0
NVNT	be160 MIMO	6985	Sum	100	0	0



NVNT	be320 SISO	6105	Ant1	100	0	0
NVNT	be320 SISO	6425	Ant1	100	0	0
NVNT	be320 SISO	6745	Ant1	100	0	0
NVNT	be320 SISO	6905	Ant1	100	0	0
NVNT	be320 SISO	6105	Ant2	100	0	0
NVNT	be320 SISO	6425	Ant2	100	0	0
NVNT	be320 SISO	6745	Ant2	100	0	0
NVNT	be320 SISO	6905	Ant2	100	0	0
NVNT	be320 MIMO	6105	Sum	100	0	0
NVNT	be320 MIMO	6425	Sum	100	0	0
NVNT	be320 MIMO	6745	Sum	100	0	0
NVNT	be320 MIMO	6905	Sum	100	0	0
NVNT	be80 puncturing 20 MRU2 SISO	5985	Ant1	99.63	0.02	0.09
NVNT	be80 puncturing 20 MRU2 SISO	5985	Ant2	100	0	0
NVNT	be80 puncturing 20 MRU2 MIMO	5985	Sum	100	0	0
NVNT	be160 puncturing 20 MRU2 SISO	6025	Ant1	100	0	0
NVNT	be160 puncturing 20 MRU2 SISO	6025	Ant2	100	0	0
NVNT	be160 puncturing 20 MRU2 MIMO	6025	Sum	100	0	0
NVNT	be160 puncturing 40 MRU2 SISO	6025	Ant1	99.9	0	0
NVNT	be160 puncturing 40 MRU2 SISO	6025	Ant2	100	0	0
NVNT	be160 puncturing 40 MRU2 MIMO	6025	Sum	100	0	0
NVNT	be320 puncturing 40 MRU2 SISO	6105	Ant1	100	0	0
NVNT	be320 puncturing 40 MRU2 SISO	6105	Ant2	100	0	0
NVNT	be320 puncturing 40 MRU2 MIMO	6105	Sum	100	0	0
NVNT	be320 puncturing 80 MRU3 SISO	6105	Ant1	100	0	0
NVNT	be320 puncturing 80	6105	Ant2	99.9	0	0



	MRU3 SISO					
NVNT	be320 puncturing 80 MRU3 MIMO	6105	Sum	100	0	0
NVNT	be320 puncturing 80+40 MRU3 SISO	6105	Ant1	100	0	0
NVNT	be320 puncturing 80+40 MRU3 SISO	6105	Ant2	100	0	0
NVNT	be320 puncturing 80+40 MRU3 MIMO	6105	Sum	100	0	0

**A.2. Conducted Output Power and E.I.R.P.**

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Gain (dBi)	eirp Power	Limit (dBm)	Verdict
ax20 SISO	5955	Ant1	3.01	0	3.01	5.58	8.59	24	Pass
ax20 SISO	6175	Ant1	3.71	0	3.71	5.58	9.29	24	Pass
ax20 SISO	6415	Ant1	2.94	0	2.94	5.58	8.52	24	Pass
ax20 SISO	6435	Ant1	3.08	0	3.08	5.09	8.17	24	Pass
ax20 SISO	6475	Ant1	3.47	0	3.47	5.09	8.56	24	Pass
ax20 SISO	6515	Ant1	3.84	0	3.84	5.09	8.93	24	Pass
ax20 SISO	6535	Ant1	3.2	0	3.2	5.77	8.97	24	Pass
ax20 SISO	6695	Ant1	4.07	0	4.07	5.77	9.84	24	Pass
ax20 SISO	6855	Ant1	3.28	0	3.28	5.77	9.05	24	Pass
ax20 SISO	6875	Ant1	3.19	0	3.19	5.77	8.96	24	Pass
ax20 SISO	6995	Ant1	2.95	0	2.95	5.98	8.93	24	Pass
ax20 SISO	7115	Ant1	0.91	0	0.91	5.98	6.89	24	Pass
ax20 SISO	5955	Ant2	4.38	0	4.38	4.82	9.2	24	Pass
ax20 SISO	6175	Ant2	4.26	0	4.26	4.82	9.08	24	Pass
ax20 SISO	6415	Ant2	3.73	0	3.73	4.82	8.55	24	Pass
ax20 SISO	6435	Ant2	4.07	0	4.07	5.15	9.22	24	Pass
ax20 SISO	6475	Ant2	4.09	0	4.09	5.15	9.24	24	Pass
ax20 SISO	6515	Ant2	3.61	0	3.61	5.15	8.76	24	Pass
ax20 SISO	6535	Ant2	2.46	0	2.46	5.9	8.36	24	Pass
ax20 SISO	6695	Ant2	3.18	0	3.18	5.9	9.08	24	Pass
ax20 SISO	6855	Ant2	2.41	0	2.41	5.9	8.31	24	Pass
ax20 SISO	6875	Ant2	2.35	0	2.35	5.9	8.25	24	Pass
ax20 SISO	6995	Ant2	1.37	0	1.37	5.45	6.82	24	Pass
ax20 SISO	7115	Ant2	0.82	0	0.82	5.45	6.27	24	Pass
ax20 MIMO	5955	Ant1	-0.58	0	-0.58	5.58	5	24	Pass
ax20 MIMO	5955	Ant2	2.9	0	2.9	4.82	7.72	24	Pass
ax20 MIMO	5955	Sum					9.58	24	Pass
ax20 MIMO	6175	Ant1	-0.5	0	-0.5	5.58	5.08	24	Pass
ax20 MIMO	6175	Ant2	3.74	0	3.74	4.82	8.56	24	Pass
ax20 MIMO	6175	Sum					10.17	24	Pass
ax20 MIMO	6415	Ant1	-0.53	0	-0.53	5.58	5.05	24	Pass
ax20 MIMO	6415	Ant2	2.72	0	2.72	4.82	7.54	24	Pass
ax20 MIMO	6415	Sum					9.48	24	Pass
ax20 MIMO	6435	Ant1	-0.39	0	-0.39	5.09	4.7	24	Pass



ax20 MIMO	6435	Ant2	2.44	0	2.44	5.15	7.59	24	Pass
ax20 MIMO	6435	Sum					9.39	24	Pass
ax20 MIMO	6475	Ant1	0.03	0	0.03	5.09	5.12	24	Pass
ax20 MIMO	6475	Ant2	3.13	0	3.13	5.15	8.28	24	Pass
ax20 MIMO	6475	Sum					9.99	24	Pass
ax20 MIMO	6515	Ant1	-0.37	0	-0.37	5.09	4.72	24	Pass
ax20 MIMO	6515	Ant2	3.01	0	3.01	5.15	8.16	24	Pass
ax20 MIMO	6515	Sum					9.78	24	Pass
ax20 MIMO	6535	Ant1	-0.88	0	-0.88	5.77	4.89	24	Pass
ax20 MIMO	6535	Ant2	2.2	0	2.2	5.9	8.1	24	Pass
ax20 MIMO	6535	Sum					9.8	24	Pass
ax20 MIMO	6695	Ant1	-1.03	0	-1.03	5.77	4.74	24	Pass
ax20 MIMO	6695	Ant2	1.97	0	1.97	5.9	7.87	24	Pass
ax20 MIMO	6695	Sum					9.59	24	Pass
ax20 MIMO	6855	Ant1	-0.81	0	-0.81	5.77	4.96	24	Pass
ax20 MIMO	6855	Ant2	-0.14	0	-0.14	5.9	5.76	24	Pass
ax20 MIMO	6855	Sum					8.39	24	Pass
ax20 MIMO	6875	Ant1	-0.41	0	-0.41	5.77	5.36	24	Pass
ax20 MIMO	6875	Ant2	0.33	0	0.33	5.9	6.23	24	Pass
ax20 MIMO	6875	Sum					8.83	24	Pass
ax20 MIMO	6995	Ant1	-0.03	0	-0.03	5.98	5.95	24	Pass
ax20 MIMO	6995	Ant2	-0.08	0	-0.08	5.45	5.37	24	Pass
ax20 MIMO	6995	Sum					8.68	24	Pass
ax20 MIMO	7115	Ant1	-2.74	0	-2.74	5.98	3.24	24	Pass
ax20 MIMO	7115	Ant2	0.21	0	0.21	5.45	5.66	24	Pass
ax20 MIMO	7115	Sum					7.63	24	Pass
ax40 SISO	5965	Ant1	6.17	0	6.17	5.58	11.75	24	Pass
ax40 SISO	6205	Ant1	6.85	0	6.85	5.58	12.43	24	Pass
ax40 SISO	6405	Ant1	6.36	0	6.36	5.58	11.94	24	Pass
ax40 SISO	6445	Ant1	6.6	0	6.6	5.09	11.69	24	Pass
ax40 SISO	6485	Ant1	6.97	0	6.97	5.09	12.06	24	Pass
ax40 SISO	6565	Ant1	6.91	0	6.91	5.77	12.68	24	Pass
ax40 SISO	6685	Ant1	6.4	0	6.4	5.77	12.17	24	Pass
ax40 SISO	6845	Ant1	5.68	0	5.68	5.77	11.45	24	Pass
ax40 SISO	6885	Ant1	5.74	0	5.74	5.98	11.72	24	Pass
ax40 SISO	6965	Ant1	5.4	0	5.4	5.98	11.38	24	Pass
ax40 SISO	7085	Ant1	3.64	0	3.64	5.98	9.62	24	Pass
ax40 SISO	5965	Ant2	7.44	0	7.44	4.82	12.26	24	Pass



ax40 SISO	6205	Ant2	7.94	0	7.94	4.82	12.76	24	Pass
ax40 SISO	6405	Ant2	7.59	0	7.59	4.82	12.41	24	Pass
ax40 SISO	6445	Ant2	7.29	0	7.29	5.15	12.44	24	Pass
ax40 SISO	6485	Ant2	7.28	0	7.28	5.15	12.43	24	Pass
ax40 SISO	6565	Ant2	6.11	0	6.11	5.9	12.01	24	Pass
ax40 SISO	6685	Ant2	6.61	0	6.61	5.9	12.51	24	Pass
ax40 SISO	6845	Ant2	5.78	0	5.78	5.9	11.68	24	Pass
ax40 SISO	6885	Ant2	5.64	0	5.64	5.45	11.09	24	Pass
ax40 SISO	6965	Ant2	5.18	0	5.18	5.45	10.63	24	Pass
ax40 SISO	7085	Ant2	4.79	0	4.79	5.45	10.24	24	Pass
ax40 MIMO	5965	Ant1	0.79	0	0.79	5.58	6.37	24	Pass
ax40 MIMO	5965	Ant2	5.59	0	5.59	4.82	10.41	24	Pass
ax40 MIMO	5965	Sum					11.85	24	Pass
ax40 MIMO	6205	Ant1	1.63	0	1.63	5.58	7.21	24	Pass
ax40 MIMO	6205	Ant2	5.55	0	5.55	4.82	10.37	24	Pass
ax40 MIMO	6205	Sum					12.08	24	Pass
ax40 MIMO	6405	Ant1	1.11	0	1.11	5.58	6.69	24	Pass
ax40 MIMO	6405	Ant2	5.14	0	5.14	4.82	9.96	24	Pass
ax40 MIMO	6405	Sum					11.64	24	Pass
ax40 MIMO	6445	Ant1	1.3	0	1.3	5.09	6.39	24	Pass
ax40 MIMO	6445	Ant2	4.84	0	4.84	5.15	9.99	24	Pass
ax40 MIMO	6445	Sum					11.56	24	Pass
ax40 MIMO	6485	Ant1	1.66	0	1.66	5.09	6.75	24	Pass
ax40 MIMO	6485	Ant2	4.89	0	4.89	5.15	10.04	24	Pass
ax40 MIMO	6485	Sum					11.71	24	Pass
ax40 MIMO	6565	Ant1	1.7	0	1.7	5.77	7.47	24	Pass
ax40 MIMO	6565	Ant2	3.92	0	3.92	5.9	9.82	24	Pass
ax40 MIMO	6565	Sum					11.81	24	Pass
ax40 MIMO	6685	Ant1	2.36	0	2.36	5.77	8.13	24	Pass
ax40 MIMO	6685	Ant2	4.55	0	4.55	5.9	10.45	24	Pass
ax40 MIMO	6685	Sum					12.45	24	Pass
ax40 MIMO	6845	Ant1	1.86	0	1.86	5.77	7.63	24	Pass
ax40 MIMO	6845	Ant2	3.75	0	3.75	5.9	9.65	24	Pass
ax40 MIMO	6845	Sum					11.77	24	Pass
ax40 MIMO	6885	Ant1	1.73	0	1.73	5.98	7.71	24	Pass
ax40 MIMO	6885	Ant2	3.5	0	3.5	5.45	8.95	24	Pass
ax40 MIMO	6885	Sum					11.38	24	Pass
ax40 MIMO	6965	Ant1	1.18	0	1.18	5.98	7.16	24	Pass



ax40 MIMO	6965	Ant2	3.34	0	3.34	5.45	8.79	24	Pass
ax40 MIMO	6965	Sum					11.06	24	Pass
ax40 MIMO	7085	Ant1	0.5	0	0.5	5.98	6.48	24	Pass
ax40 MIMO	7085	Ant2	3.13	0	3.13	5.45	8.58	24	Pass
ax40 MIMO	7085	Sum					10.67	24	Pass
ax80 SISO	5985	Ant1	9.19	0	9.19	5.58	14.77	24	Pass
ax80 SISO	6225	Ant1	9.79	0	9.79	5.58	15.37	24	Pass
ax80 SISO	6385	Ant1	9.18	0	9.18	5.58	14.76	24	Pass
ax80 SISO	6465	Ant1	9.71	0	9.71	5.09	14.8	24	Pass
ax80 SISO	6625	Ant1	8.61	0	8.61	5.77	14.38	24	Pass
ax80 SISO	6705	Ant1	8.85	0	8.85	5.77	14.62	24	Pass
ax80 SISO	6785	Ant1	7.9	0	7.9	5.77	13.67	24	Pass
ax80 SISO	6945	Ant1	7.96	0	7.96	5.98	13.94	24	Pass
ax80 SISO	7025	Ant1	7.37	0	7.37	5.98	13.35	24	Pass
ax80 SISO	5985	Ant2	10.83	0	10.83	4.82	15.65	24	Pass
ax80 SISO	6225	Ant2	11.22	0	11.22	4.82	16.04	24	Pass
ax80 SISO	6385	Ant2	10.59	0	10.59	4.82	15.41	24	Pass
ax80 SISO	6465	Ant2	10.02	0	10.02	5.15	15.17	24	Pass
ax80 SISO	6625	Ant2	9.11	0	9.11	5.9	15.01	24	Pass
ax80 SISO	6705	Ant2	9.15	0	9.15	5.9	15.05	24	Pass
ax80 SISO	6785	Ant2	8.29	0	8.29	5.9	14.19	24	Pass
ax80 SISO	6945	Ant2	8.14	0	8.14	5.45	13.59	24	Pass
ax80 SISO	7025	Ant2	7.58	0	7.58	5.45	13.03	24	Pass
ax80 MIMO	5985	Ant1	3.93	0	3.93	5.58	9.51	24	Pass
ax80 MIMO	5985	Ant2	7.91	0	7.91	4.82	12.73	24	Pass
ax80 MIMO	5985	Sum					14.42	24	Pass
ax80 MIMO	6225	Ant1	4.39	0	4.39	5.58	9.97	24	Pass
ax80 MIMO	6225	Ant2	8.48	0	8.48	4.82	13.3	24	Pass
ax80 MIMO	6225	Sum					14.96	24	Pass
ax80 MIMO	6385	Ant1	4.15	0	4.15	5.58	9.73	24	Pass
ax80 MIMO	6385	Ant2	8.04	0	8.04	4.82	12.86	24	Pass
ax80 MIMO	6385	Sum					14.58	24	Pass
ax80 MIMO	6465	Ant1	4.35	0	4.35	5.09	9.44	24	Pass
ax80 MIMO	6465	Ant2	7.62	0	7.62	5.15	12.77	24	Pass
ax80 MIMO	6465	Sum					14.43	24	Pass
ax80 MIMO	6625	Ant1	4.63	0	4.63	5.77	10.4	24	Pass
ax80 MIMO	6625	Ant2	6.85	0	6.85	5.9	12.75	24	Pass
ax80 MIMO	6625	Sum					14.74	24	Pass



ax80 MIMO	6705	Ant1	5.01	0	5.01	5.77	10.78	24	Pass
ax80 MIMO	6705	Ant2	6.88	0	6.88	5.9	12.78	24	Pass
ax80 MIMO	6705	Sum					14.9	24	Pass
ax80 MIMO	6785	Ant1	4.7	0	4.7	5.77	10.47	24	Pass
ax80 MIMO	6785	Ant2	6.7	0	6.7	5.9	12.6	24	Pass
ax80 MIMO	6785	Sum					14.67	24	Pass
ax80 MIMO	6945	Ant1	3.86	0	3.86	5.98	9.84	24	Pass
ax80 MIMO	6945	Ant2	5.64	0	5.64	5.45	11.09	24	Pass
ax80 MIMO	6945	Sum					13.52	24	Pass
ax80 MIMO	7025	Ant1	3.38	0	3.38	5.98	9.36	24	Pass
ax80 MIMO	7025	Ant2	5.16	0	5.16	5.45	10.61	24	Pass
ax80 MIMO	7025	Sum					13.04	24	Pass
ax160 SISO	6025	Ant1	11.22	0	11.22	5.58	16.8	24	Pass
ax160 SISO	6185	Ant1	11.56	0	11.56	5.58	17.14	24	Pass
ax160 SISO	6345	Ant1	11.05	0	11.05	5.58	16.63	24	Pass
ax160 SISO	6665	Ant1	11.24	0	11.24	5.77	17.01	24	Pass
ax160 SISO	6985	Ant1	10.03	0	10.03	5.98	16.01	24	Pass
ax160 SISO	6025	Ant2	11.93	0	11.93	4.82	16.75	24	Pass
ax160 SISO	6185	Ant2	12.31	0	12.31	4.82	17.13	24	Pass
ax160 SISO	6345	Ant2	12	0	12	4.82	16.82	24	Pass
ax160 SISO	6665	Ant2	10.72	0	10.72	5.9	16.62	24	Pass
ax160 SISO	6985	Ant2	9.72	0	9.72	5.45	15.17	24	Pass
ax160 MIMO	6025	Ant1	6.19	0	6.19	5.58	11.77	24	Pass
ax160 MIMO	6025	Ant2	9.51	0	9.51	4.82	14.33	24	Pass
ax160 MIMO	6025	Sum					16.25	24	Pass
ax160 MIMO	6185	Ant1	6.25	0	6.25	5.58	11.83	24	Pass
ax160 MIMO	6185	Ant2	10.28	0	10.28	4.82	15.1	24	Pass
ax160 MIMO	6185	Sum					16.78	24	Pass
ax160 MIMO	6345	Ant1	5.48	0	5.48	5.58	11.06	24	Pass
ax160 MIMO	6345	Ant2	9.54	0	9.54	4.82	14.36	24	Pass
ax160 MIMO	6345	Sum					16.03	24	Pass
ax160 MIMO	6665	Ant1	6.61	0	6.61	5.77	12.38	24	Pass
ax160 MIMO	6665	Ant2	8.77	0	8.77	5.9	14.67	24	Pass
ax160 MIMO	6665	Sum					16.68	24	Pass
ax160 MIMO	6985	Ant1	5.65	0	5.65	5.98	11.63	24	Pass
ax160 MIMO	6985	Ant2	7.32	0	7.32	5.45	12.77	24	Pass
ax160 MIMO	6985	Sum					15.25	24	Pass
be20 SISO	5955	Ant1	3.07	0	3.07	5.58	8.65	24	Pass



be20 SISO	6175	Ant1	3.78	0	3.78	5.58	9.36	24	Pass
be20 SISO	6415	Ant1	2.98	0	2.98	5.58	8.56	24	Pass
be20 SISO	6435	Ant1	3.07	0	3.07	5.09	8.16	24	Pass
be20 SISO	6475	Ant1	3.47	0	3.47	5.09	8.56	24	Pass
be20 SISO	6515	Ant1	3.94	0	3.94	5.09	9.03	24	Pass
be20 SISO	6535	Ant1	3.11	0	3.11	5.77	8.88	24	Pass
be20 SISO	6695	Ant1	4.05	0	4.05	5.77	9.82	24	Pass
be20 SISO	6855	Ant1	3.26	0	3.26	5.77	9.03	24	Pass
be20 SISO	6875	Ant1	3.19	0	3.19	5.77	8.96	24	Pass
be20 SISO	6995	Ant1	2.79	0	2.79	5.98	8.77	24	Pass
be20 SISO	7115	Ant1	0.5	0	0.5	5.98	6.48	24	Pass
be20 SISO	5955	Ant2	4.35	0	4.35	4.82	9.17	24	Pass
be20 SISO	6175	Ant2	4.33	0	4.33	4.82	9.15	24	Pass
be20 SISO	6415	Ant2	3.72	0	3.72	4.82	8.54	24	Pass
be20 SISO	6435	Ant2	4.02	0	4.02	5.15	9.17	24	Pass
be20 SISO	6475	Ant2	3.95	0	3.95	5.15	9.1	24	Pass
be20 SISO	6515	Ant2	3.53	0	3.53	5.15	8.68	24	Pass
be20 SISO	6535	Ant2	2.45	0	2.45	5.9	8.35	24	Pass
be20 SISO	6695	Ant2	3.18	0	3.18	5.9	9.08	24	Pass
be20 SISO	6855	Ant2	2.5	0	2.5	5.9	8.4	24	Pass
be20 SISO	6875	Ant2	2.34	0	2.34	5.9	8.24	24	Pass
be20 SISO	6995	Ant2	1.29	0	1.29	5.45	6.74	24	Pass
be20 SISO	7115	Ant2	0.75	0	0.75	5.45	6.2	24	Pass
be20 MIMO	5955	Ant1	-1.5	0	-1.5	5.58	4.08	24	Pass
be20 MIMO	5955	Ant2	1.92	0	1.92	4.82	6.74	24	Pass
be20 MIMO	5955	Sum					8.62	24	Pass
be20 MIMO	6175	Ant1	-1.4	0	-1.4	5.58	4.18	24	Pass
be20 MIMO	6175	Ant2	2.86	0	2.86	4.82	7.68	24	Pass
be20 MIMO	6175	Sum					9.28	24	Pass
be20 MIMO	6415	Ant1	-1.46	0	-1.46	5.58	4.12	24	Pass
be20 MIMO	6415	Ant2	1.87	0	1.87	4.82	6.69	24	Pass
be20 MIMO	6415	Sum					8.6	24	Pass
be20 MIMO	6435	Ant1	-1.44	0	-1.44	5.09	3.65	24	Pass
be20 MIMO	6435	Ant2	1.45	0	1.45	5.15	6.6	24	Pass
be20 MIMO	6435	Sum					8.38	24	Pass
be20 MIMO	6475	Ant1	-1.06	0	-1.06	5.09	4.03	24	Pass
be20 MIMO	6475	Ant2	2.11	0	2.11	5.15	7.26	24	Pass
be20 MIMO	6475	Sum					8.95	24	Pass



be20 MIMO	6515	Ant1	-1.49	0	-1.49	5.09	3.6	24	Pass
be20 MIMO	6515	Ant2	1.96	0	1.96	5.15	7.11	24	Pass
be20 MIMO	6515	Sum					8.71	24	Pass
be20 MIMO	6535	Ant1	-1.04	0	-1.04	5.77	4.73	24	Pass
be20 MIMO	6535	Ant2	2.14	0	2.14	5.9	8.04	24	Pass
be20 MIMO	6535	Sum					9.7	24	Pass
be20 MIMO	6695	Ant1	-1.2	0	-1.2	5.77	4.57	24	Pass
be20 MIMO	6695	Ant2	1.85	0	1.85	5.9	7.75	24	Pass
be20 MIMO	6695	Sum					9.46	24	Pass
be20 MIMO	6855	Ant1	-0.6	0	-0.6	5.77	5.17	24	Pass
be20 MIMO	6855	Ant2	-0.29	0	-0.29	5.9	5.61	24	Pass
be20 MIMO	6855	Sum					8.41	24	Pass
be20 MIMO	6875	Ant1	-0.56	0	-0.56	5.77	5.21	24	Pass
be20 MIMO	6875	Ant2	0.17	0	0.17	5.9	6.07	24	Pass
be20 MIMO	6875	Sum					8.67	24	Pass
be20 MIMO	6995	Ant1	-0.49	0	-0.49	5.98	5.49	24	Pass
be20 MIMO	6995	Ant2	0.02	0	0.02	5.45	5.47	24	Pass
be20 MIMO	6995	Sum					8.49	24	Pass
be20 MIMO	7115	Ant1	-2.76	0	-2.76	5.98	3.22	24	Pass
be20 MIMO	7115	Ant2	0.22	0	0.22	5.45	5.67	24	Pass
be20 MIMO	7115	Sum					7.63	24	Pass
be40 SISO	5965	Ant1	6.2	0	6.2	5.58	11.78	24	Pass
be40 SISO	6205	Ant1	6.9	0	6.9	5.58	12.48	24	Pass
be40 SISO	6405	Ant1	6.36	0	6.36	5.58	11.94	24	Pass
be40 SISO	6445	Ant1	6.59	0	6.59	5.09	11.68	24	Pass
be40 SISO	6485	Ant1	6.88	0	6.88	5.09	11.97	24	Pass
be40 SISO	6565	Ant1	5.73	0	5.73	5.77	11.5	24	Pass
be40 SISO	6685	Ant1	6.35	0	6.35	5.77	12.12	24	Pass
be40 SISO	6845	Ant1	5.72	0	5.72	5.77	11.49	24	Pass
be40 SISO	6885	Ant1	5.74	0	5.74	5.98	11.72	24	Pass
be40 SISO	6965	Ant1	5.28	0	5.28	5.98	11.26	24	Pass
be40 SISO	7085	Ant1	3.34	0	3.34	5.98	9.32	24	Pass
be40 SISO	5965	Ant2	7.27	0	7.27	4.82	12.09	24	Pass
be40 SISO	6205	Ant2	7.78	0	7.78	4.82	12.6	24	Pass
be40 SISO	6405	Ant2	7.44	0	7.44	4.82	12.26	24	Pass
be40 SISO	6445	Ant2	7.13	0	7.13	5.15	12.28	24	Pass
be40 SISO	6485	Ant2	7.08	0	7.08	5.15	12.23	24	Pass
be40 SISO	6565	Ant2	5.92	0	5.92	5.9	11.82	24	Pass



be40 SISO	6685	Ant2	6.47	0	6.47	5.9	12.37	24	Pass
be40 SISO	6845	Ant2	5.59	0	5.59	5.9	11.49	24	Pass
be40 SISO	6885	Ant2	5.46	0	5.46	5.45	10.91	24	Pass
be40 SISO	6965	Ant2	5.04	0	5.04	5.45	10.49	24	Pass
be40 SISO	7085	Ant2	4.58	0	4.58	5.45	10.03	24	Pass
be40 MIMO	5965	Ant1	0.66	0	0.66	5.58	6.24	24	Pass
be40 MIMO	5965	Ant2	5.12	0	5.12	4.82	9.94	24	Pass
be40 MIMO	5965	Sum					11.48	24	Pass
be40 MIMO	6205	Ant1	1.31	0	1.31	5.58	6.89	24	Pass
be40 MIMO	6205	Ant2	5.37	0	5.37	4.82	10.19	24	Pass
be40 MIMO	6205	Sum					11.86	24	Pass
be40 MIMO	6405	Ant1	0.88	0	0.88	5.58	6.46	24	Pass
be40 MIMO	6405	Ant2	4.92	0	4.92	4.82	9.74	24	Pass
be40 MIMO	6405	Sum					11.41	24	Pass
be40 MIMO	6445	Ant1	1.13	0	1.13	5.09	6.22	24	Pass
be40 MIMO	6445	Ant2	4.75	0	4.75	5.15	9.9	24	Pass
be40 MIMO	6445	Sum					11.45	24	Pass
be40 MIMO	6485	Ant1	1.48	0	1.48	5.09	6.57	24	Pass
be40 MIMO	6485	Ant2	4.71	0	4.71	5.15	9.86	24	Pass
be40 MIMO	6485	Sum					11.53	24	Pass
be40 MIMO	6565	Ant1	1.48	0	1.48	5.77	7.25	24	Pass
be40 MIMO	6565	Ant2	3.75	0	3.75	5.9	9.65	24	Pass
be40 MIMO	6565	Sum					11.62	24	Pass
be40 MIMO	6685	Ant1	2.07	0	2.07	5.77	7.84	24	Pass
be40 MIMO	6685	Ant2	4.4	0	4.4	5.9	10.3	24	Pass
be40 MIMO	6685	Sum					12.25	24	Pass
be40 MIMO	6845	Ant1	1.51	0	1.51	5.77	7.28	24	Pass
be40 MIMO	6845	Ant2	3.62	0	3.62	5.9	9.52	24	Pass
be40 MIMO	6845	Sum					11.55	24	Pass
be40 MIMO	6885	Ant1	1.37	0	1.37	5.98	7.35	24	Pass
be40 MIMO	6885	Ant2	3.42	0	3.42	5.45	8.87	24	Pass
be40 MIMO	6885	Sum					11.19	24	Pass
be40 MIMO	6965	Ant1	0.93	0	0.93	5.98	6.91	24	Pass
be40 MIMO	6965	Ant2	3.07	0	3.07	5.45	8.52	24	Pass
be40 MIMO	6965	Sum					10.8	24	Pass
be40 MIMO	7085	Ant1	-0.51	0	-0.51	5.98	5.47	24	Pass
be40 MIMO	7085	Ant2	3.09	0	3.09	5.45	8.54	24	Pass
be40 MIMO	7085	Sum					10.28	24	Pass



be80 SISO	5985	Ant1	9.1	0	9.1	5.58	14.68	24	Pass
be80 SISO	6225	Ant1	9.8	0	9.8	5.58	15.38	24	Pass
be80 SISO	6385	Ant1	9.18	0	9.18	5.58	14.76	24	Pass
be80 SISO	6465	Ant1	9.72	0	9.72	5.09	14.81	24	Pass
be80 SISO	6625	Ant1	8.7	0	8.7	5.77	14.47	24	Pass
be80 SISO	6705	Ant1	8.97	0	8.97	5.77	14.74	24	Pass
be80 SISO	6785	Ant1	8.14	0	8.14	5.77	13.91	24	Pass
be80 SISO	6945	Ant1	7.97	0	7.97	5.98	13.95	24	Pass
be80 SISO	7025	Ant1	7.4	0	7.4	5.98	13.38	24	Pass
be80 SISO	5985	Ant2	10.83	0	10.83	4.82	15.65	24	Pass
be80 SISO	6225	Ant2	11.3	0	11.3	4.82	16.12	24	Pass
be80 SISO	6385	Ant2	10.46	0	10.46	4.82	15.28	24	Pass
be80 SISO	6465	Ant2	10.17	0	10.17	5.15	15.32	24	Pass
be80 SISO	6625	Ant2	9.12	0	9.12	5.9	15.02	24	Pass
be80 SISO	6705	Ant2	9.17	0	9.17	5.9	15.07	24	Pass
be80 SISO	6785	Ant2	8.29	0	8.29	5.9	14.19	24	Pass
be80 SISO	6945	Ant2	8.15	0	8.15	5.45	13.6	24	Pass
be80 SISO	7025	Ant2	7.6	0	7.6	5.45	13.05	24	Pass
be80 MIMO	5985	Ant1	3.91	0	3.91	5.58	9.49	24	Pass
be80 MIMO	5985	Ant2	7.9	0	7.9	4.82	12.72	24	Pass
be80 MIMO	5985	Sum					14.41	24	Pass
be80 MIMO	6225	Ant1	4.53	0	4.53	5.58	10.11	24	Pass
be80 MIMO	6225	Ant2	8.51	0	8.51	4.82	13.33	24	Pass
be80 MIMO	6225	Sum					15.02	24	Pass
be80 MIMO	6385	Ant1	4.14	0	4.14	5.58	9.72	24	Pass
be80 MIMO	6385	Ant2	8	0	8	4.82	12.82	24	Pass
be80 MIMO	6385	Sum					14.55	24	Pass
be80 MIMO	6465	Ant1	4.29	0	4.29	5.09	9.38	24	Pass
be80 MIMO	6465	Ant2	7.61	0	7.61	5.15	12.76	24	Pass
be80 MIMO	6465	Sum					14.4	24	Pass
be80 MIMO	6625	Ant1	4.62	0	4.62	5.77	10.39	24	Pass
be80 MIMO	6625	Ant2	6.73	0	6.73	5.9	12.63	24	Pass
be80 MIMO	6625	Sum					14.66	24	Pass
be80 MIMO	6705	Ant1	5.06	0	5.06	5.77	10.83	24	Pass
be80 MIMO	6705	Ant2	6.93	0	6.93	5.9	12.83	24	Pass
be80 MIMO	6705	Sum					14.95	24	Pass
be80 MIMO	6785	Ant1	4.77	0	4.77	5.77	10.54	24	Pass
be80 MIMO	6785	Ant2	6.75	0	6.75	5.9	12.65	24	Pass



be80 MIMO	6785	Sum					14.73	24	Pass
be80 MIMO	6945	Ant1	3.99	0	3.99	5.98	9.97	24	Pass
be80 MIMO	6945	Ant2	5.65	0	5.65	5.45	11.1	24	Pass
be80 MIMO	6945	Sum					13.58	24	Pass
be80 MIMO	7025	Ant1	3.35	0	3.35	5.98	9.33	24	Pass
be80 MIMO	7025	Ant2	5.22	0	5.22	5.45	10.67	24	Pass
be80 MIMO	7025	Sum					13.06	24	Pass
be160 SISO	6025	Ant1	11.59	0	11.59	5.58	17.17	24	Pass
be160 SISO	6185	Ant1	11.75	0	11.75	5.58	17.33	24	Pass
be160 SISO	6345	Ant1	11.38	0	11.38	5.58	16.96	24	Pass
be160 SISO	6665	Ant1	10.99	0	10.99	5.77	16.76	24	Pass
be160 SISO	6985	Ant1	9.83	0	9.83	5.98	15.81	24	Pass
be160 SISO	6025	Ant2	11.29	0	11.29	4.82	16.11	24	Pass
be160 SISO	6185	Ant2	11.66	0	11.66	4.82	16.48	24	Pass
be160 SISO	6345	Ant2	11.39	0	11.39	4.82	16.21	24	Pass
be160 SISO	6665	Ant2	11.15	0	11.15	5.9	17.05	24	Pass
be160 SISO	6985	Ant2	11.15	0	11.15	5.45	16.6	24	Pass
be160 MIMO	6025	Ant1	5.7	0	5.7	5.58	11.28	24	Pass
be160 MIMO	6025	Ant2	8.8	0	8.8	4.82	13.62	24	Pass
be160 MIMO	6025	Sum					15.62	24	Pass
be160 MIMO	6185	Ant1	5.58	0	5.58	5.58	11.16	24	Pass
be160 MIMO	6185	Ant2	9.1	0	9.1	4.82	13.92	24	Pass
be160 MIMO	6185	Sum					15.77	24	Pass
be160 MIMO	6345	Ant1	5.16	0	5.16	5.58	10.74	24	Pass
be160 MIMO	6345	Ant2	8.82	0	8.82	4.82	13.64	24	Pass
be160 MIMO	6345	Sum					15.44	24	Pass
be160 MIMO	6665	Ant1	6.3	0	6.3	5.77	12.07	24	Pass
be160 MIMO	6665	Ant2	7.32	0	7.32	5.9	13.22	24	Pass
be160 MIMO	6665	Sum					15.69	24	Pass
be160 MIMO	6985	Ant1	6.05	0	6.05	5.98	12.03	24	Pass
be160 MIMO	6985	Ant2	7.01	0	7.01	5.45	12.46	24	Pass
be160 MIMO	6985	Sum					15.26	24	Pass
be320 SISO	6105	Ant1	12.76	0	12.76	5.58	18.34	24	Pass
be320 SISO	6425	Ant1	12.86	0	12.86	5.58	18.44	24	Pass
be320 SISO	6745	Ant1	13.56	0	13.56	5.77	19.33	24	Pass
be320 SISO	6905	Ant1	14.41	0	14.41	5.98	20.39	24	Pass
be320 SISO	6105	Ant2	13.35	0	13.35	4.82	18.17	24	Pass
be320 SISO	6425	Ant2	13.06	0	13.06	4.82	17.88	24	Pass



be320 SISO	6745	Ant2	12.89	0	12.89	5.9	18.79	24	Pass
be320 SISO	6905	Ant2	12.02	0	12.02	5.45	17.47	24	Pass
be320 MIMO	6105	Ant1	7.53	0	7.53	5.58	13.11	24	Pass
be320 MIMO	6105	Ant2	10.98	0	10.98	4.82	15.8	24	Pass
be320 MIMO	6105	Sum					17.67	24	Pass
be320 MIMO	6425	Ant1	7.11	0	7.11	5.58	12.69	24	Pass
be320 MIMO	6425	Ant2	10.72	0	10.72	4.82	15.54	24	Pass
be320 MIMO	6425	Sum					17.36	24	Pass
be320 MIMO	6745	Ant1	7.79	0	7.79	5.77	13.56	24	Pass
be320 MIMO	6745	Ant2	10.33	0	10.33	5.9	16.23	24	Pass
be320 MIMO	6745	Sum					18.11	24	Pass
be320 MIMO	6905	Ant1	8.34	0	8.34	5.98	14.32	24	Pass
be320 MIMO	6905	Ant2	7.94	0	7.94	5.45	13.39	24	Pass
be320 MIMO	6905	Sum					16.89	24	Pass
be80 puncturing 20 MRU2 SISO	5985	Ant1	9.68	0	9.68	5.58	15.26	24	Pass
be80 puncturing 20 MRU2 SISO	5985	Ant2	10.33	0	10.33	4.82	15.15	24	Pass
be80 puncturing 20 MRU2 MIMO	5985	Ant1	4.27	0	4.27	5.58	9.85	24	Pass
be80 puncturing 20 MRU2 MIMO	5985	Ant2	7.6	0	7.6	4.82	12.42	24	Pass
be80 puncturing 20 MRU2 MIMO	5985	Sum					14.33	24	Pass
be160 puncturing 20 MRU2 SISO	6025	Ant1	11.2	0	11.2	5.58	16.78	24	Pass
be160 puncturing 20 MRU2 SISO	6025	Ant2	11.38	0	11.38	4.82	16.2	24	Pass
be160 puncturing 20 MRU2 MIMO	6025	Ant1	6.08	0	6.08	5.58	11.66	24	Pass
be160	6025	Ant2	8.92	0	8.92	4.82	13.74	24	Pass



puncturing 20 MRU2 MIMO									
be160 puncturing 20 MRU2 MIMO	6025	Sum					15.83	24	Pass
be160 puncturing 40 MRU2 SISO	6025	Ant1	12.17	0	12.17	5.58	17.75	24	Pass
be160 puncturing 40 MRU2 SISO	6025	Ant2	10.86	0	10.86	4.82	15.68	24	Pass
be160 puncturing 40 MRU2 MIMO	6025	Ant1	5.66	0	5.66	5.58	11.24	24	Pass
be160 puncturing 40 MRU2 MIMO	6025	Ant2	8.51	0	8.51	4.82	13.33	24	Pass
be160 puncturing 40 MRU2 MIMO	6025	Sum					15.42	24	Pass
be320 puncturing 40 MRU2 SISO	6105	Ant1	12.32	0	12.32	5.58	17.9	24	Pass
be320 puncturing 40 MRU2 SISO	6105	Ant2	12.5	0	12.5	4.82	17.32	24	Pass
be320 puncturing 40 MRU2 MIMO	6105	Ant1	6.84	0	6.84	5.58	12.42	24	Pass
be320 puncturing 40 MRU2 MIMO	6105	Ant2	9.97	0	9.97	4.82	14.79	24	Pass
be320 puncturing 40 MRU2 MIMO	6105	Sum					16.78	24	Pass
be320 puncturing 80 MRU3 SISO	6105	Ant1	12.65	0	12.65	5.58	18.23	24	Pass
be320	6105	Ant2	12.71	0	12.71	4.82	17.53	24	Pass



puncturing 80 MRU3 SISO									
be320 puncturing 80 MRU3 MIMO	6105	Ant1	7.11	0	7.11	5.58	12.69	24	Pass
be320 puncturing 80 MRU3 MIMO	6105	Ant2	10.4	0	10.4	4.82	15.22	24	Pass
be320 puncturing 80 MRU3 MIMO	6105	Sum					17.15	24	Pass
be320 puncturing 80+40 MRU3 SISO	6105	Ant1	12.19	0	12.19	5.58	17.77	24	Pass
be320 puncturing 80+40 MRU3 SISO	6105	Ant2	13.24	0	13.24	4.82	18.06	24	Pass
be320 puncturing 80+40 MRU3 MIMO	6105	Ant1	7.44	0	7.44	5.58	13.02	24	Pass
be320 puncturing 80+40 MRU3 MIMO	6105	Ant2	10.77	0	10.77	4.82	15.59	24	Pass
be320 puncturing 80+40 MRU3 MIMO	6105	Sum					17.5	24	Pass

**A.3. Occupied Bandwidth and Emission Bandwidth****a. Emission Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	ax20 SISO	5955	Ant1	23.36
NVNT	ax20 SISO	6175	Ant1	23.33
NVNT	ax20 SISO	6415	Ant1	23.34
NVNT	ax20 SISO	6435	Ant1	23.33
NVNT	ax20 SISO	6475	Ant1	23.09
NVNT	ax20 SISO	6515	Ant1	23.27
NVNT	ax20 SISO	6535	Ant1	23.17
NVNT	ax20 SISO	6695	Ant1	23.2
NVNT	ax20 SISO	6855	Ant1	22.47
NVNT	ax20 SISO	6875	Ant1	23.33
NVNT	ax20 SISO	6995	Ant1	23.29
NVNT	ax20 SISO	7115	Ant1	23.54
NVNT	ax20 SISO	5955	Ant2	23.21
NVNT	ax20 SISO	6175	Ant2	23.45
NVNT	ax20 SISO	6415	Ant2	23.12
NVNT	ax20 SISO	6435	Ant2	22.6
NVNT	ax20 SISO	6475	Ant2	23.16
NVNT	ax20 SISO	6515	Ant2	22.99
NVNT	ax20 SISO	6535	Ant2	22.98
NVNT	ax20 SISO	6695	Ant2	23.46
NVNT	ax20 SISO	6855	Ant2	23.23
NVNT	ax20 SISO	6875	Ant2	23.74
NVNT	ax20 SISO	6995	Ant2	23.49
NVNT	ax20 SISO	7115	Ant2	23.31
NVNT	ax20 MIMO	5955	Ant1	22.95
NVNT	ax20 MIMO	5955	Ant2	22.7
NVNT	ax20 MIMO	6175	Ant1	23.24
NVNT	ax20 MIMO	6175	Ant2	23.13
NVNT	ax20 MIMO	6415	Ant1	22.89
NVNT	ax20 MIMO	6415	Ant2	23.24
NVNT	ax20 MIMO	6435	Ant1	23.65
NVNT	ax20 MIMO	6435	Ant2	23.27
NVNT	ax20 MIMO	6475	Ant1	22.97



NVNT	ax20 MIMO	6475	Ant2	22.86
NVNT	ax20 MIMO	6515	Ant1	23.44
NVNT	ax20 MIMO	6515	Ant2	23.51
NVNT	ax20 MIMO	6535	Ant1	23.03
NVNT	ax20 MIMO	6535	Ant2	23.42
NVNT	ax20 MIMO	6695	Ant1	23.38
NVNT	ax20 MIMO	6695	Ant2	23.19
NVNT	ax20 MIMO	6855	Ant1	23.31
NVNT	ax20 MIMO	6855	Ant2	22.91
NVNT	ax20 MIMO	6875	Ant1	23.01
NVNT	ax20 MIMO	6875	Ant2	23.22
NVNT	ax20 MIMO	6995	Ant1	23.61
NVNT	ax20 MIMO	6995	Ant2	23.12
NVNT	ax20 MIMO	7115	Ant1	23.18
NVNT	ax20 MIMO	7115	Ant2	23.49
NVNT	ax40 SISO	5965	Ant1	44.31
NVNT	ax40 SISO	6205	Ant1	43.68
NVNT	ax40 SISO	6405	Ant1	44.69
NVNT	ax40 SISO	6445	Ant1	43.38
NVNT	ax40 SISO	6485	Ant1	45.25
NVNT	ax40 SISO	6565	Ant1	45.2
NVNT	ax40 SISO	6685	Ant1	43.81
NVNT	ax40 SISO	6845	Ant1	45.77
NVNT	ax40 SISO	6885	Ant1	44.77
NVNT	ax40 SISO	6965	Ant1	43.62
NVNT	ax40 SISO	7085	Ant1	43.2
NVNT	ax40 SISO	5965	Ant2	44.43
NVNT	ax40 SISO	6205	Ant2	44.76
NVNT	ax40 SISO	6405	Ant2	44.83
NVNT	ax40 SISO	6445	Ant2	44.03
NVNT	ax40 SISO	6485	Ant2	43.84
NVNT	ax40 SISO	6565	Ant2	43.61
NVNT	ax40 SISO	6685	Ant2	44.32
NVNT	ax40 SISO	6845	Ant2	43.3
NVNT	ax40 SISO	6885	Ant2	43.44
NVNT	ax40 SISO	6965	Ant2	44.29
NVNT	ax40 SISO	7085	Ant2	43.51
NVNT	ax40 MIMO	5965	Ant1	44.23



NVNT	ax40 MIMO	5965	Ant2	45.03
NVNT	ax40 MIMO	6205	Ant1	45.51
NVNT	ax40 MIMO	6205	Ant2	43.81
NVNT	ax40 MIMO	6405	Ant1	44.78
NVNT	ax40 MIMO	6405	Ant2	43.97
NVNT	ax40 MIMO	6445	Ant1	43.47
NVNT	ax40 MIMO	6445	Ant2	43.8
NVNT	ax40 MIMO	6485	Ant1	44.8
NVNT	ax40 MIMO	6485	Ant2	44.21
NVNT	ax40 MIMO	6565	Ant1	46.71
NVNT	ax40 MIMO	6565	Ant2	43.99
NVNT	ax40 MIMO	6685	Ant1	44.6
NVNT	ax40 MIMO	6685	Ant2	44.31
NVNT	ax40 MIMO	6845	Ant1	43.89
NVNT	ax40 MIMO	6845	Ant2	44.51
NVNT	ax40 MIMO	6885	Ant1	44.25
NVNT	ax40 MIMO	6885	Ant2	44.05
NVNT	ax40 MIMO	6965	Ant1	44.87
NVNT	ax40 MIMO	6965	Ant2	45.92
NVNT	ax40 MIMO	7085	Ant1	44.58
NVNT	ax40 MIMO	7085	Ant2	44.83
NVNT	ax80 SISO	5985	Ant1	88.55
NVNT	ax80 SISO	6225	Ant1	90.14
NVNT	ax80 SISO	6385	Ant1	91.13
NVNT	ax80 SISO	6465	Ant1	89.61
NVNT	ax80 SISO	6625	Ant1	91.88
NVNT	ax80 SISO	6705	Ant1	89.88
NVNT	ax80 SISO	6785	Ant1	90.69
NVNT	ax80 SISO	6945	Ant1	91.38
NVNT	ax80 SISO	7025	Ant1	90.13
NVNT	ax80 SISO	5985	Ant2	90.82
NVNT	ax80 SISO	6225	Ant2	90.58
NVNT	ax80 SISO	6385	Ant2	89.44
NVNT	ax80 SISO	6465	Ant2	90.1
NVNT	ax80 SISO	6625	Ant2	90.91
NVNT	ax80 SISO	6705	Ant2	90.54
NVNT	ax80 SISO	6785	Ant2	89
NVNT	ax80 SISO	6945	Ant2	90.89



NVNT	ax80 SISO	7025	Ant2	90.63
NVNT	ax80 MIMO	5985	Ant1	93.13
NVNT	ax80 MIMO	5985	Ant2	91.67
NVNT	ax80 MIMO	6225	Ant1	91.9
NVNT	ax80 MIMO	6225	Ant2	91.51
NVNT	ax80 MIMO	6385	Ant1	89.53
NVNT	ax80 MIMO	6385	Ant2	90.99
NVNT	ax80 MIMO	6465	Ant1	91.21
NVNT	ax80 MIMO	6465	Ant2	89.14
NVNT	ax80 MIMO	6625	Ant1	90.49
NVNT	ax80 MIMO	6625	Ant2	91.04
NVNT	ax80 MIMO	6705	Ant1	90.88
NVNT	ax80 MIMO	6705	Ant2	89.52
NVNT	ax80 MIMO	6785	Ant1	90.46
NVNT	ax80 MIMO	6785	Ant2	90.9
NVNT	ax80 MIMO	6945	Ant1	92.46
NVNT	ax80 MIMO	6945	Ant2	91.11
NVNT	ax80 MIMO	7025	Ant1	91.2
NVNT	ax80 MIMO	7025	Ant2	93.19
NVNT	ax160 SISO	6025	Ant1	177.3
NVNT	ax160 SISO	6185	Ant1	172
NVNT	ax160 SISO	6345	Ant1	173.3
NVNT	ax160 SISO	6665	Ant1	174.1
NVNT	ax160 SISO	6985	Ant1	174.8
NVNT	ax160 SISO	6025	Ant2	176.1
NVNT	ax160 SISO	6185	Ant2	172.5
NVNT	ax160 SISO	6345	Ant2	174.7
NVNT	ax160 SISO	6665	Ant2	174.5
NVNT	ax160 SISO	6985	Ant2	177
NVNT	ax160 MIMO	6025	Ant1	174.6
NVNT	ax160 MIMO	6025	Ant2	172.6
NVNT	ax160 MIMO	6185	Ant1	178
NVNT	ax160 MIMO	6185	Ant2	174.5
NVNT	ax160 MIMO	6345	Ant1	171.9
NVNT	ax160 MIMO	6345	Ant2	171.1
NVNT	ax160 MIMO	6665	Ant1	174.3
NVNT	ax160 MIMO	6665	Ant2	174.9
NVNT	ax160 MIMO	6985	Ant1	173.5



NVNT	ax160 MIMO	6985	Ant2	172.2
NVNT	be20 SISO	5955	Ant1	23.92
NVNT	be20 SISO	6175	Ant1	23.27
NVNT	be20 SISO	6415	Ant1	23.06
NVNT	be20 SISO	6435	Ant1	24.01
NVNT	be20 SISO	6475	Ant1	23.39
NVNT	be20 SISO	6515	Ant1	23.29
NVNT	be20 SISO	6535	Ant1	24.1
NVNT	be20 SISO	6695	Ant1	23.11
NVNT	be20 SISO	6855	Ant1	23.24
NVNT	be20 SISO	6875	Ant1	22.88
NVNT	be20 SISO	6995	Ant1	22.74
NVNT	be20 SISO	7115	Ant1	22.79
NVNT	be20 SISO	5955	Ant2	23.24
NVNT	be20 SISO	6175	Ant2	23.53
NVNT	be20 SISO	6415	Ant2	23.4
NVNT	be20 SISO	6435	Ant2	23.38
NVNT	be20 SISO	6475	Ant2	23.52
NVNT	be20 SISO	6515	Ant2	23.33
NVNT	be20 SISO	6535	Ant2	23.36
NVNT	be20 SISO	6695	Ant2	23.38
NVNT	be20 SISO	6855	Ant2	23
NVNT	be20 SISO	6875	Ant2	23.01
NVNT	be20 SISO	6995	Ant2	23.41
NVNT	be20 SISO	7115	Ant2	23.23
NVNT	be20 MIMO	5955	Ant1	23.84
NVNT	be20 MIMO	5955	Ant2	23.64
NVNT	be20 MIMO	6175	Ant1	23.39
NVNT	be20 MIMO	6175	Ant2	24.32
NVNT	be20 MIMO	6415	Ant1	23.05
NVNT	be20 MIMO	6415	Ant2	24.14
NVNT	be20 MIMO	6435	Ant1	23.31
NVNT	be20 MIMO	6435	Ant2	23.77
NVNT	be20 MIMO	6475	Ant1	23.47
NVNT	be20 MIMO	6475	Ant2	23.86
NVNT	be20 MIMO	6515	Ant1	23.11
NVNT	be20 MIMO	6515	Ant2	23.36
NVNT	be20 MIMO	6535	Ant1	23.53



NVNT	be20 MIMO	6535	Ant2	23.89
NVNT	be20 MIMO	6695	Ant1	23.55
NVNT	be20 MIMO	6695	Ant2	23.49
NVNT	be20 MIMO	6855	Ant1	23.06
NVNT	be20 MIMO	6855	Ant2	23.42
NVNT	be20 MIMO	6875	Ant1	23.03
NVNT	be20 MIMO	6875	Ant2	23.73
NVNT	be20 MIMO	6995	Ant1	23.12
NVNT	be20 MIMO	6995	Ant2	23.22
NVNT	be20 MIMO	7115	Ant1	23.84
NVNT	be20 MIMO	7115	Ant2	23.71
NVNT	be40 SISO	5965	Ant1	45.1
NVNT	be40 SISO	6205	Ant1	43.66
NVNT	be40 SISO	6405	Ant1	45.41
NVNT	be40 SISO	6445	Ant1	43.31
NVNT	be40 SISO	6485	Ant1	44.48
NVNT	be40 SISO	6565	Ant1	44.28
NVNT	be40 SISO	6685	Ant1	43.91
NVNT	be40 SISO	6845	Ant1	45.2
NVNT	be40 SISO	6885	Ant1	44
NVNT	be40 SISO	6965	Ant1	45.87
NVNT	be40 SISO	7085	Ant1	43.95
NVNT	be40 SISO	5965	Ant2	44.17
NVNT	be40 SISO	6205	Ant2	43.54
NVNT	be40 SISO	6405	Ant2	43.61
NVNT	be40 SISO	6445	Ant2	44.27
NVNT	be40 SISO	6485	Ant2	44.49
NVNT	be40 SISO	6565	Ant2	44.2
NVNT	be40 SISO	6685	Ant2	44.33
NVNT	be40 SISO	6845	Ant2	43.82
NVNT	be40 SISO	6885	Ant2	43.57
NVNT	be40 SISO	6965	Ant2	43.52
NVNT	be40 SISO	7085	Ant2	43.91
NVNT	be40 MIMO	5965	Ant1	44.31
NVNT	be40 MIMO	5965	Ant2	43.17
NVNT	be40 MIMO	6205	Ant1	45
NVNT	be40 MIMO	6205	Ant2	44.66
NVNT	be40 MIMO	6405	Ant1	44.44



NVNT	be40 MIMO	6405	Ant2	44.78
NVNT	be40 MIMO	6445	Ant1	44.44
NVNT	be40 MIMO	6445	Ant2	44.77
NVNT	be40 MIMO	6485	Ant1	44.9
NVNT	be40 MIMO	6485	Ant2	45.22
NVNT	be40 MIMO	6565	Ant1	43.88
NVNT	be40 MIMO	6565	Ant2	43.52
NVNT	be40 MIMO	6685	Ant1	44.7
NVNT	be40 MIMO	6685	Ant2	44.53
NVNT	be40 MIMO	6845	Ant1	44.09
NVNT	be40 MIMO	6845	Ant2	43.88
NVNT	be40 MIMO	6885	Ant1	44.13
NVNT	be40 MIMO	6885	Ant2	43.92
NVNT	be40 MIMO	6965	Ant1	45.23
NVNT	be40 MIMO	6965	Ant2	44.92
NVNT	be40 MIMO	7085	Ant1	45
NVNT	be40 MIMO	7085	Ant2	44.06
NVNT	be80 SISO	5985	Ant1	90.65
NVNT	be80 SISO	6225	Ant1	89.14
NVNT	be80 SISO	6385	Ant1	89.87
NVNT	be80 SISO	6465	Ant1	89.3
NVNT	be80 SISO	6625	Ant1	90.67
NVNT	be80 SISO	6705	Ant1	89.69
NVNT	be80 SISO	6785	Ant1	89.86
NVNT	be80 SISO	6945	Ant1	90.8
NVNT	be80 SISO	7025	Ant1	89.66
NVNT	be80 SISO	5985	Ant2	92.19
NVNT	be80 SISO	6225	Ant2	91.64
NVNT	be80 SISO	6385	Ant2	89.4
NVNT	be80 SISO	6465	Ant2	91.85
NVNT	be80 SISO	6625	Ant2	92.69
NVNT	be80 SISO	6705	Ant2	89.46
NVNT	be80 SISO	6785	Ant2	90.18
NVNT	be80 SISO	6945	Ant2	91.45
NVNT	be80 SISO	7025	Ant2	89.34
NVNT	be80 MIMO	5985	Ant1	94.21
NVNT	be80 MIMO	5985	Ant2	89.74
NVNT	be80 MIMO	6225	Ant1	90.53



NVNT	be80 MIMO	6225	Ant2	88.51
NVNT	be80 MIMO	6385	Ant1	90.34
NVNT	be80 MIMO	6385	Ant2	89.39
NVNT	be80 MIMO	6465	Ant1	90.49
NVNT	be80 MIMO	6465	Ant2	90.06
NVNT	be80 MIMO	6625	Ant1	92.01
NVNT	be80 MIMO	6625	Ant2	89.17
NVNT	be80 MIMO	6705	Ant1	91.58
NVNT	be80 MIMO	6705	Ant2	89.96
NVNT	be80 MIMO	6785	Ant1	88.36
NVNT	be80 MIMO	6785	Ant2	90.26
NVNT	be80 MIMO	6945	Ant1	92.23
NVNT	be80 MIMO	6945	Ant2	91.44
NVNT	be80 MIMO	7025	Ant1	89.79
NVNT	be80 MIMO	7025	Ant2	91.17
NVNT	be160 SISO	6025	Ant1	173
NVNT	be160 SISO	6185	Ant1	172.7
NVNT	be160 SISO	6345	Ant1	173
NVNT	be160 SISO	6665	Ant1	175
NVNT	be160 SISO	6985	Ant1	175.5
NVNT	be160 SISO	6025	Ant2	175.9
NVNT	be160 SISO	6185	Ant2	172.9
NVNT	be160 SISO	6345	Ant2	175.1
NVNT	be160 SISO	6665	Ant2	171.2
NVNT	be160 SISO	6985	Ant2	174.5
NVNT	be160 MIMO	6025	Ant1	177.1
NVNT	be160 MIMO	6025	Ant2	173.3
NVNT	be160 MIMO	6185	Ant1	173.8
NVNT	be160 MIMO	6185	Ant2	174.1
NVNT	be160 MIMO	6345	Ant1	176.8
NVNT	be160 MIMO	6345	Ant2	173.9
NVNT	be160 MIMO	6665	Ant1	179.3
NVNT	be160 MIMO	6665	Ant2	173.4
NVNT	be160 MIMO	6985	Ant1	176.3
NVNT	be160 MIMO	6985	Ant2	173.2
NVNT	be320 SISO	6105	Ant1	334.4
NVNT	be320 SISO	6425	Ant1	330.6
NVNT	be320 SISO	6745	Ant1	330.3




NVNT	be320 SISO	6905	Ant1	335
NVNT	be320 SISO	6105	Ant2	332.2
NVNT	be320 SISO	6425	Ant2	334
NVNT	be320 SISO	6745	Ant2	332.4
NVNT	be320 SISO	6905	Ant2	331.3
NVNT	be320 MIMO	6105	Ant1	387.9
NVNT	be320 MIMO	6105	Ant2	335
NVNT	be320 MIMO	6425	Ant1	355.4
NVNT	be320 MIMO	6425	Ant2	332
NVNT	be320 MIMO	6745	Ant1	333.2
NVNT	be320 MIMO	6745	Ant2	332.1
NVNT	be320 MIMO	6905	Ant1	333.2
NVNT	be320 MIMO	6905	Ant2	338.9
NVNT	be80 puncturing 20 MRU2 SISO	5985	Ant1	89.17
NVNT	be80 puncturing 20 MRU2 SISO	5985	Ant2	89.14
NVNT	be80 puncturing 20 MRU2 MIMO	5985	Ant1	91.74
NVNT	be80 puncturing 20 MRU2 MIMO	5985	Ant2	89.22
NVNT	be160 puncturing 20 MRU2 SISO	6025	Ant1	176.2
NVNT	be160 puncturing 20 MRU2 SISO	6025	Ant2	173.6
NVNT	be160 puncturing 20 MRU2 MIMO	6025	Ant1	175.6
NVNT	be160 puncturing 20 MRU2 MIMO	6025	Ant2	171.7
NVNT	be160 puncturing 40 MRU2 SISO	6025	Ant1	176.9
NVNT	be160 puncturing 40 MRU2 SISO	6025	Ant2	175.6
NVNT	be160 puncturing 40 MRU2 MIMO	6025	Ant1	172.7
NVNT	be160 puncturing 40 MRU2 MIMO	6025	Ant2	174.1
NVNT	be320 puncturing 40 MRU2 SISO	6105	Ant1	429.5
NVNT	be320 puncturing 40 MRU2 SISO	6105	Ant2	331.9
NVNT	be320 puncturing 40 MRU2 MIMO	6105	Ant1	431.8
NVNT	be320 puncturing 40 MRU2 MIMO	6105	Ant2	333
NVNT	be320 puncturing 80 MRU3 SISO	6105	Ant1	409.8
NVNT	be320 puncturing 80 MRU3 SISO	6105	Ant2	331.8
NVNT	be320 puncturing 80 MRU3 MIMO	6105	Ant1	335.2
NVNT	be320 puncturing 80 MRU3 MIMO	6105	Ant2	331.5
NVNT	be320 puncturing 80+40 MRU3 SISO	6105	Ant1	297.4
NVNT	be320 puncturing 80+40 MRU3 SISO	6105	Ant2	278.6
NVNT	be320 puncturing 80+40 MRU3	6105	Ant1	318.8




REPORT No.: SZ25120191W02


	MIMO			
NVNT	be320 puncturing 80+40 MRU3 MIMO	6105	Ant2	286.5

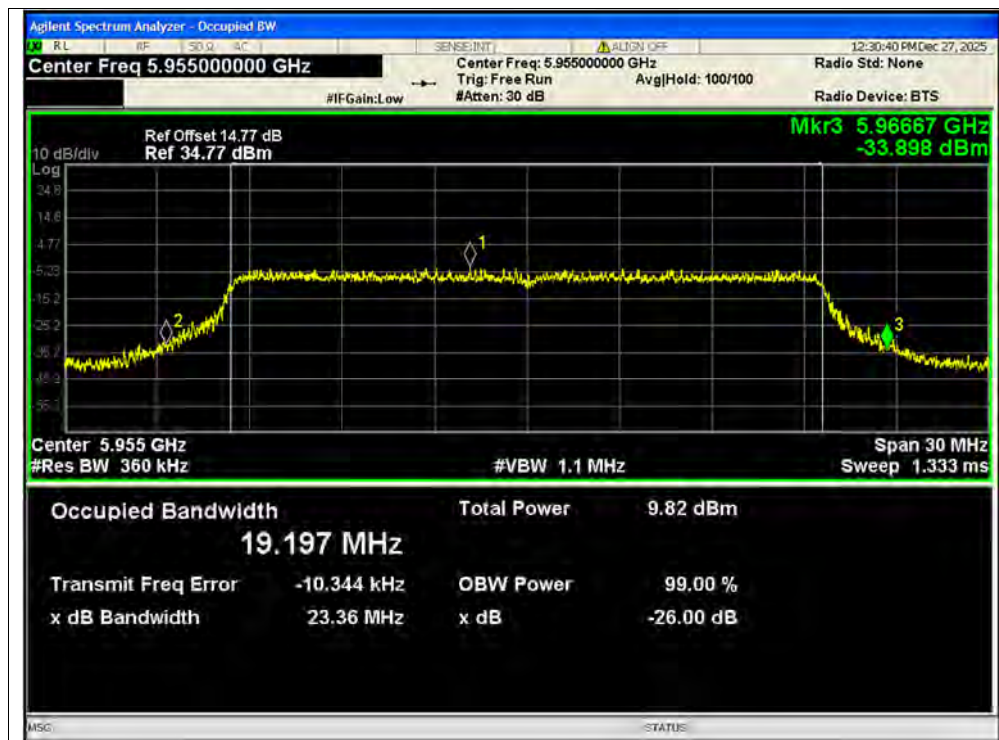


-26dB Bandwidth NVNT ax20 5955MHz Ant1 SISO

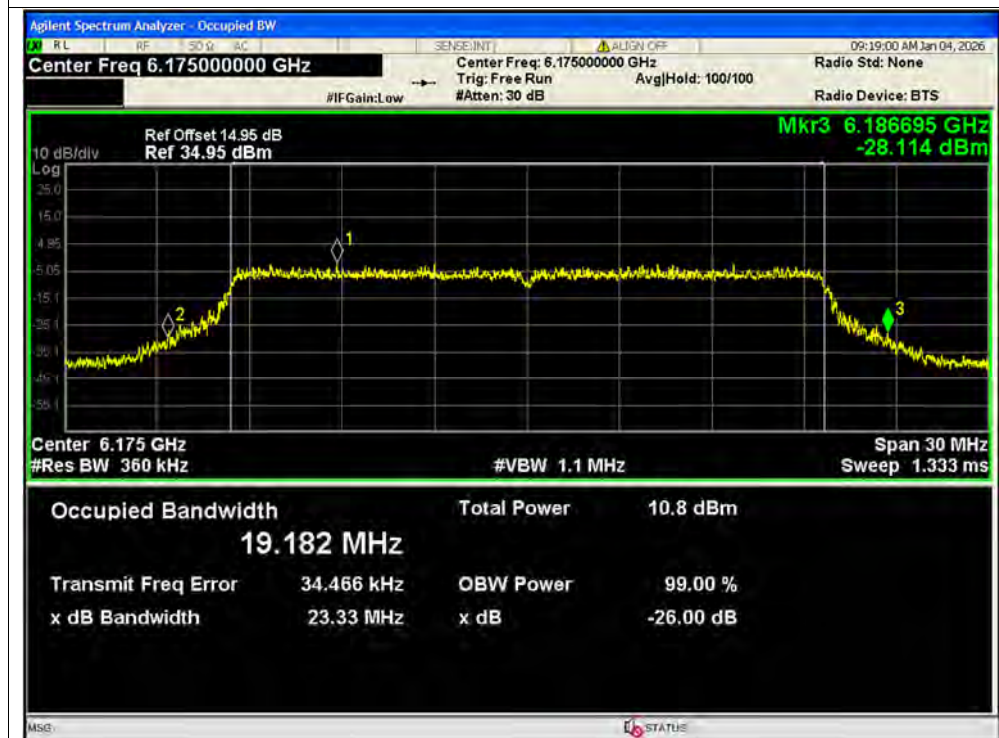


-26dB Bandwidth NVNT ax20 6175MHz Ant1 SISO

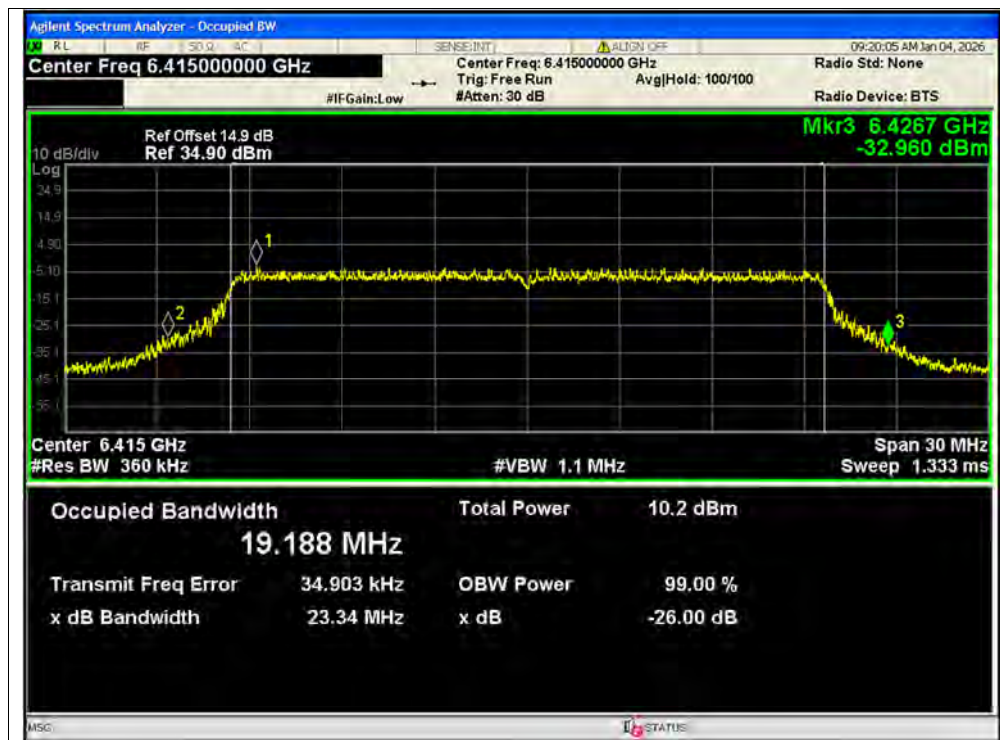


-26dB Bandwidth NVNT ax20 6415MHz Ant1 SISO

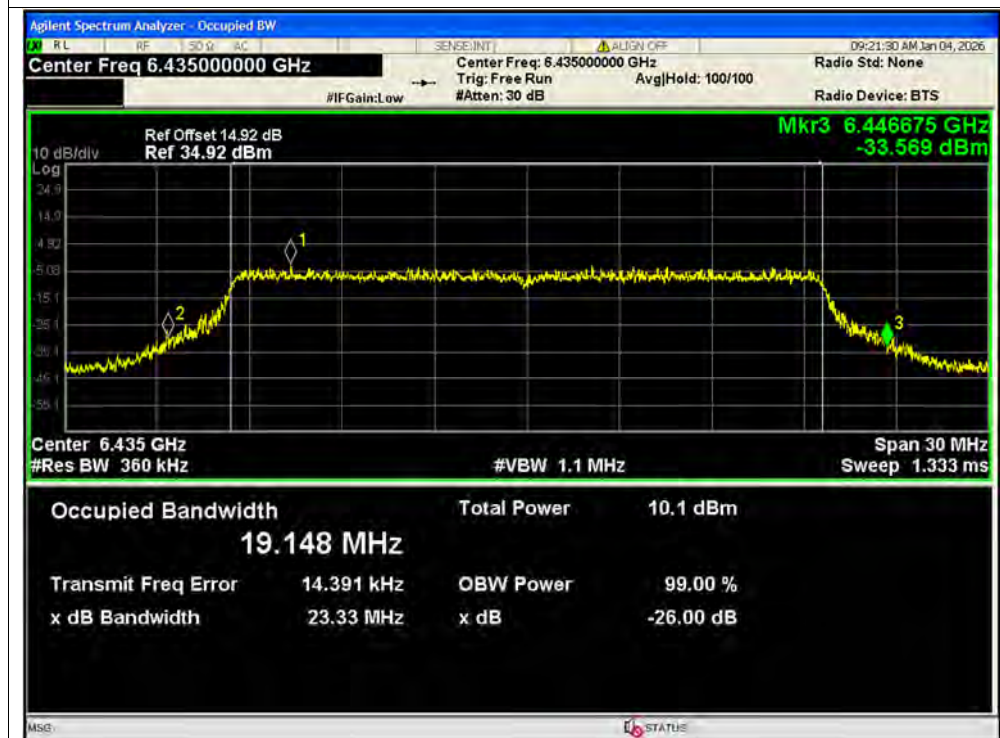


-26dB Bandwidth NVNT ax20 6435MHz Ant1 SISO

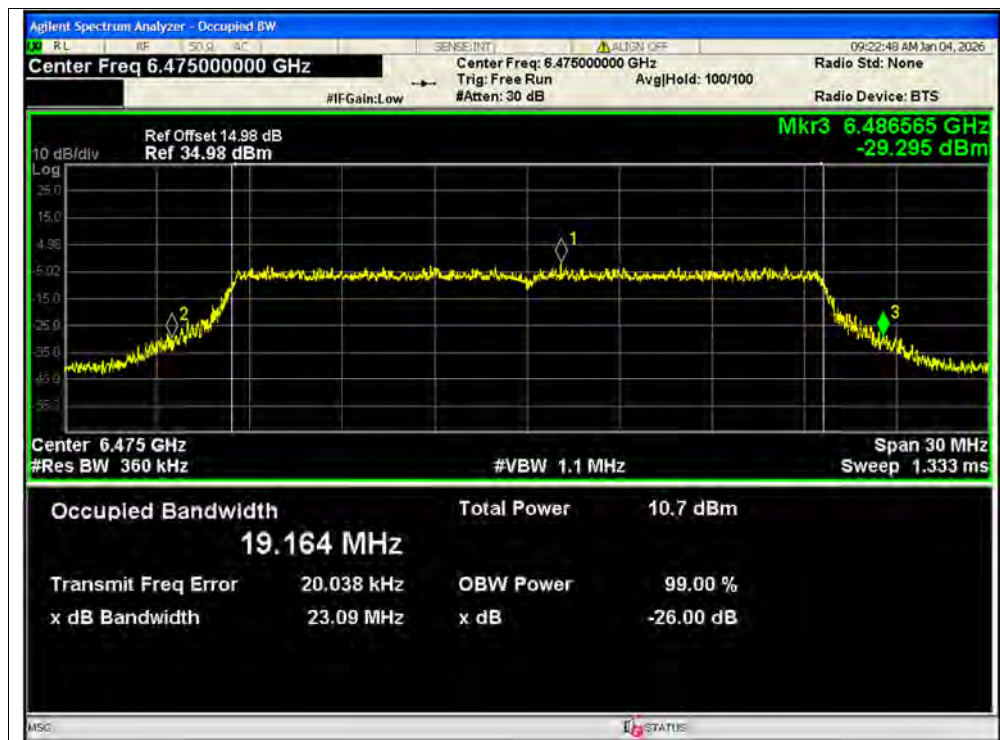


-26dB Bandwidth NVNT ax20 6475MHz Ant1 SISO

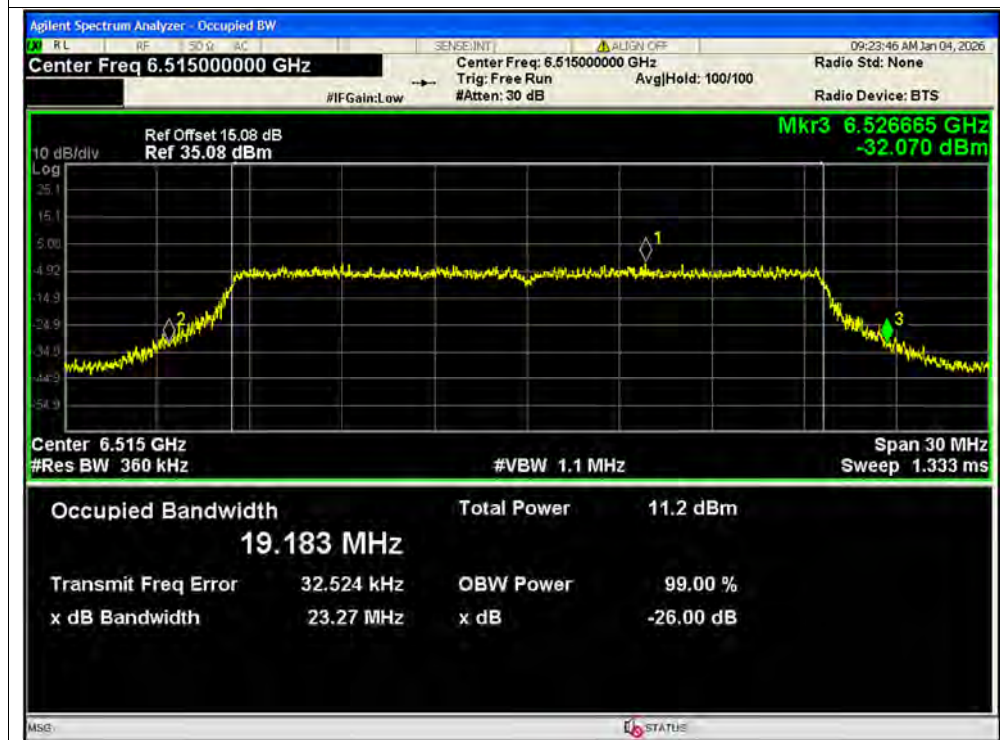


-26dB Bandwidth NVNT ax20 6515MHz Ant1 SISO

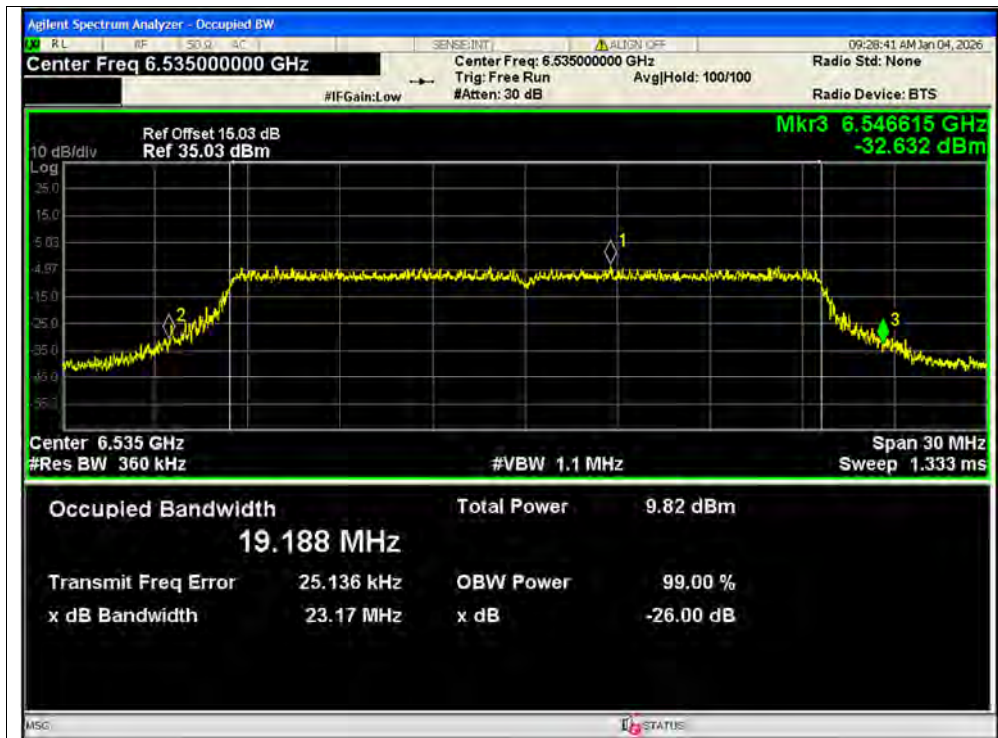


-26dB Bandwidth NVNT ax20 6535MHz Ant1 SISO

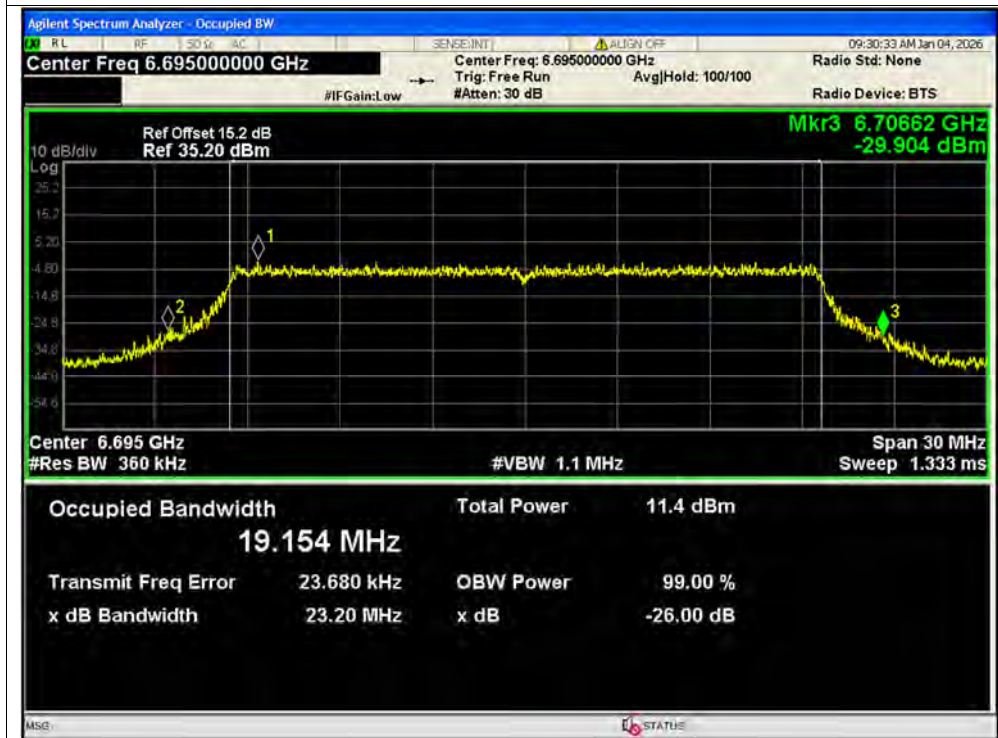


-26dB Bandwidth NVNT ax20 6695MHz Ant1 SISO

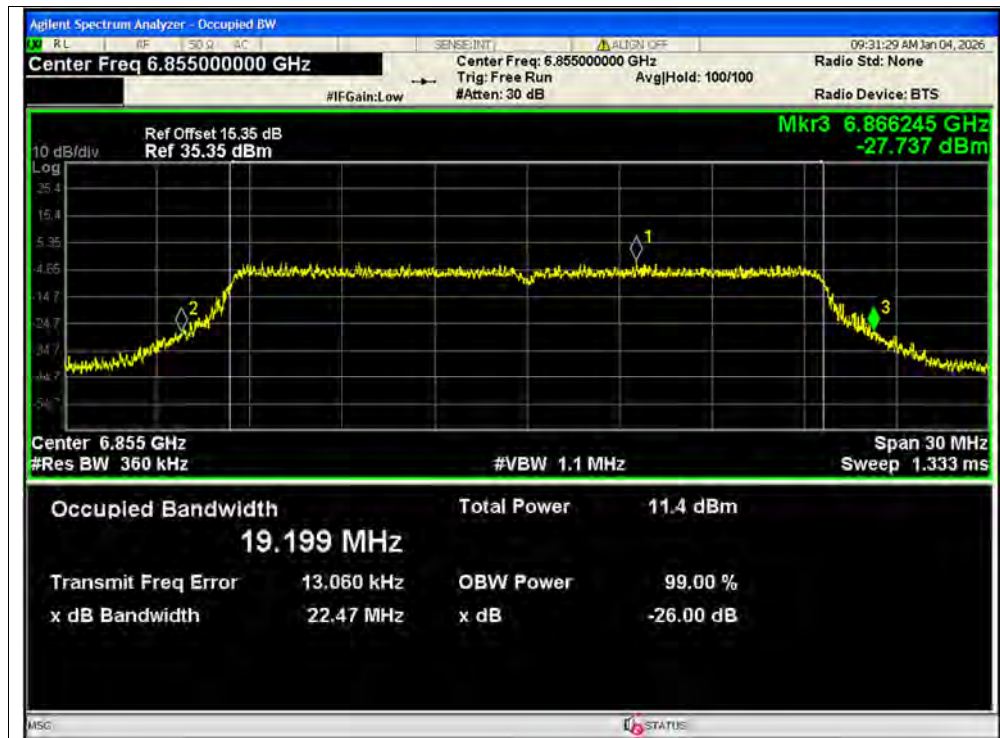

-26dB Bandwidth NVNT ax20 6855MHz Ant1 SISO

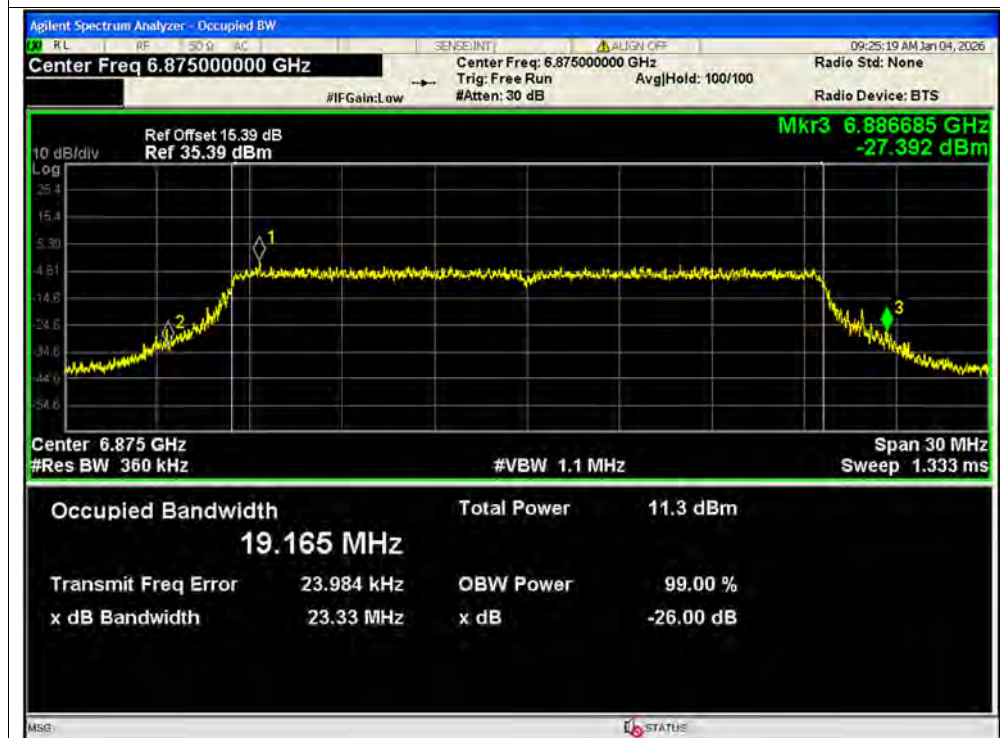


-26dB Bandwidth NVNT ax20 6875MHz Ant1 SISO

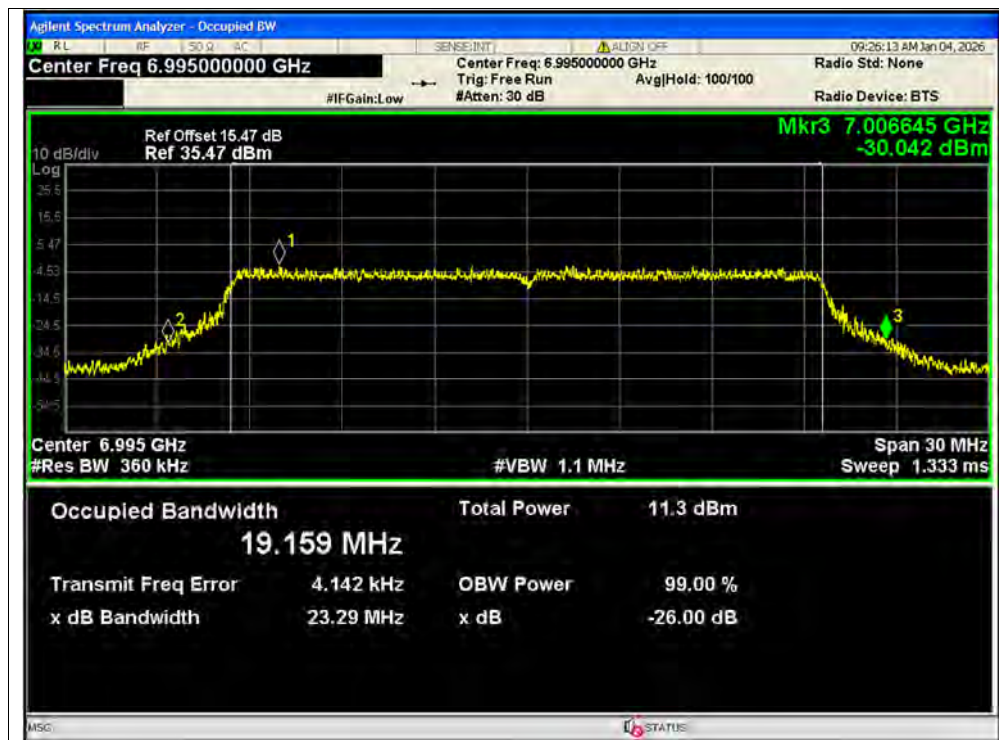


-26dB Bandwidth NVNT ax20 6995MHz Ant1 SISO




-26dB Bandwidth NVNT ax20 7115MHz Ant1 SISO

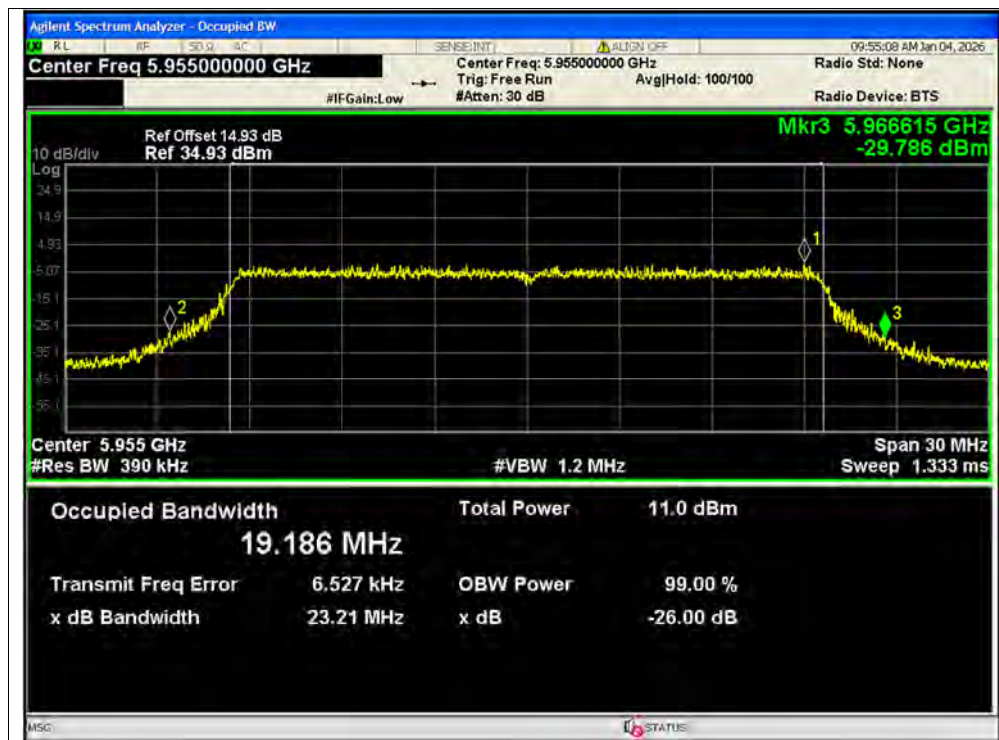


-26dB Bandwidth NVNT ax20 5955MHz Ant2 SISO

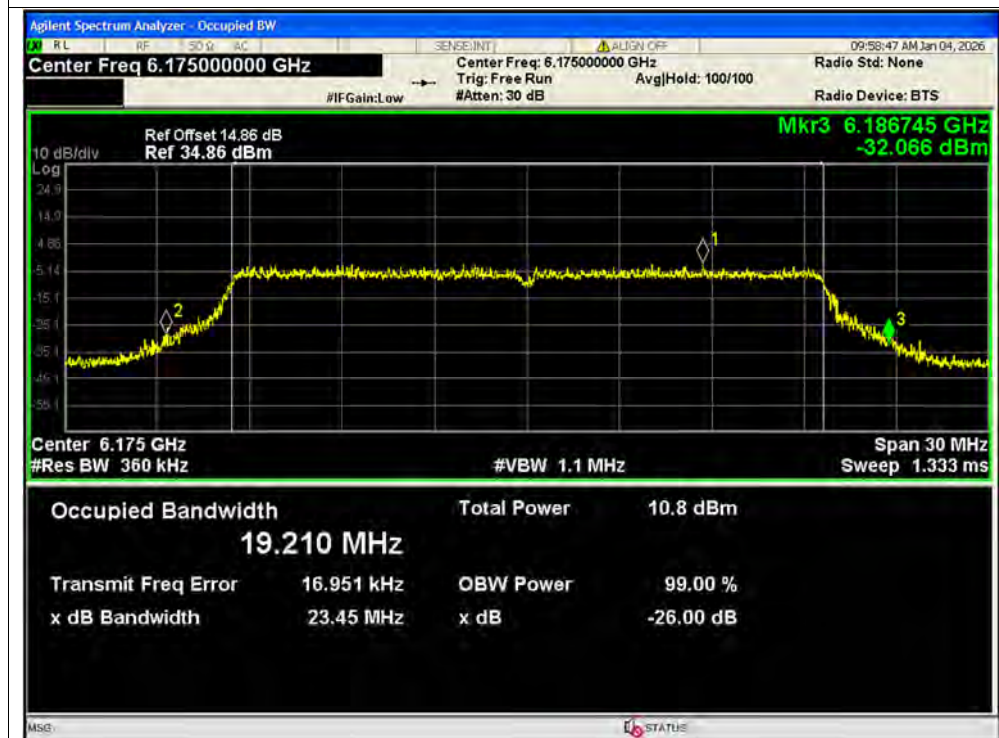

-26dB Bandwidth NVNT ax20 6175MHz Ant2 SISO

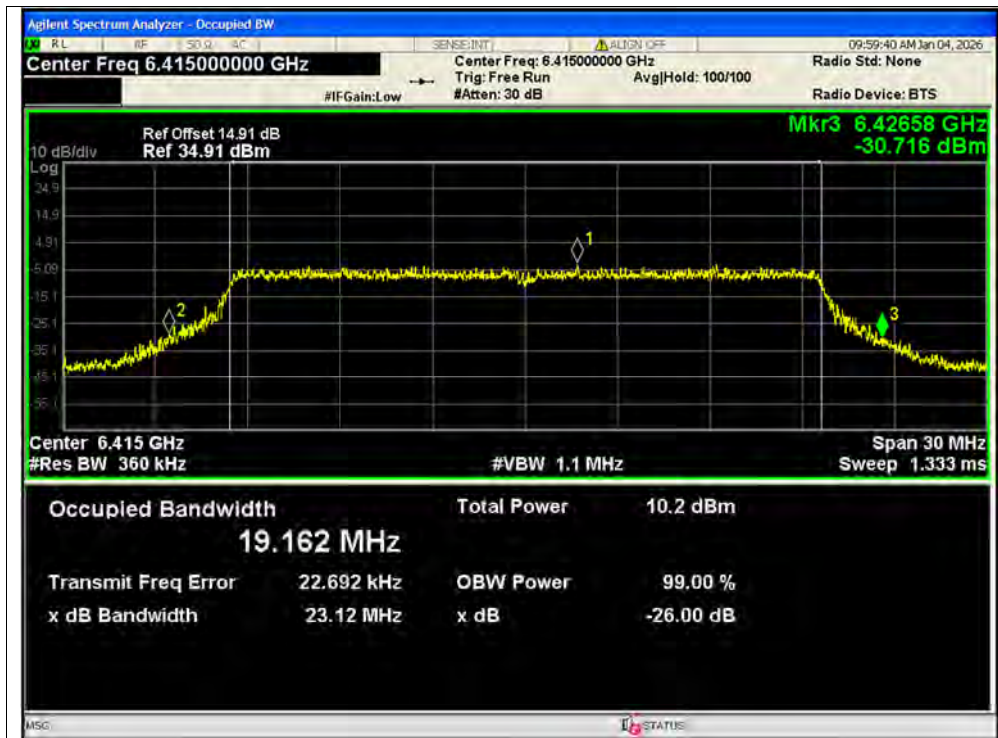


-26dB Bandwidth NVNT ax20 6415MHz Ant2 SISO

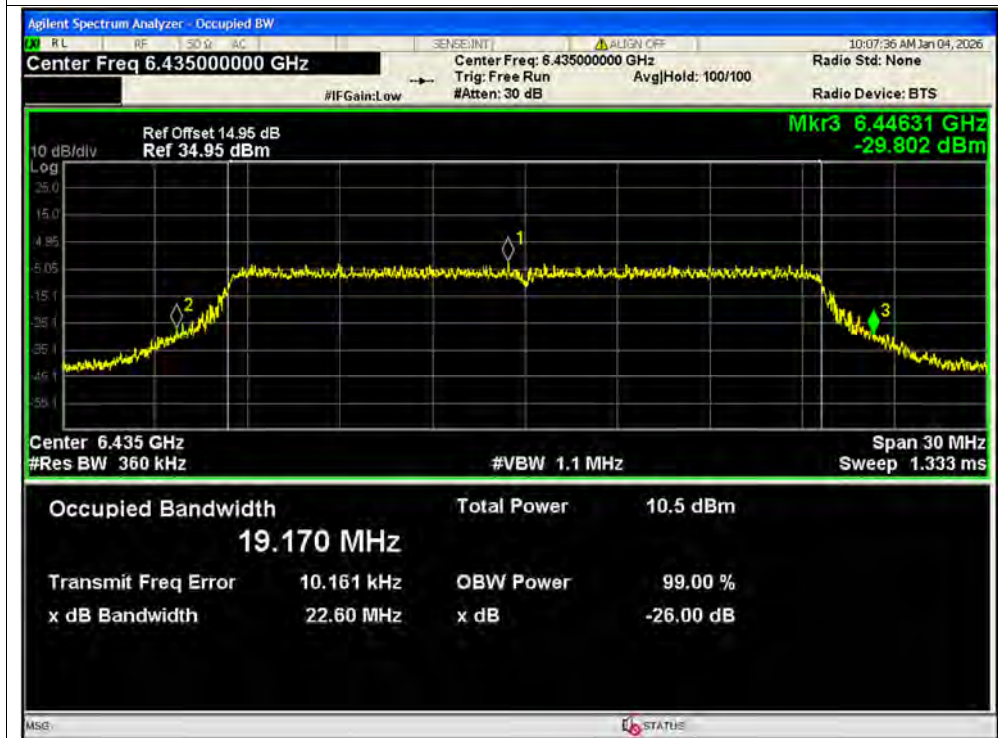

-26dB Bandwidth NVNT ax20 6435MHz Ant2 SISO




-26dB Bandwidth NVNT ax20 6475MHz Ant2 SISO

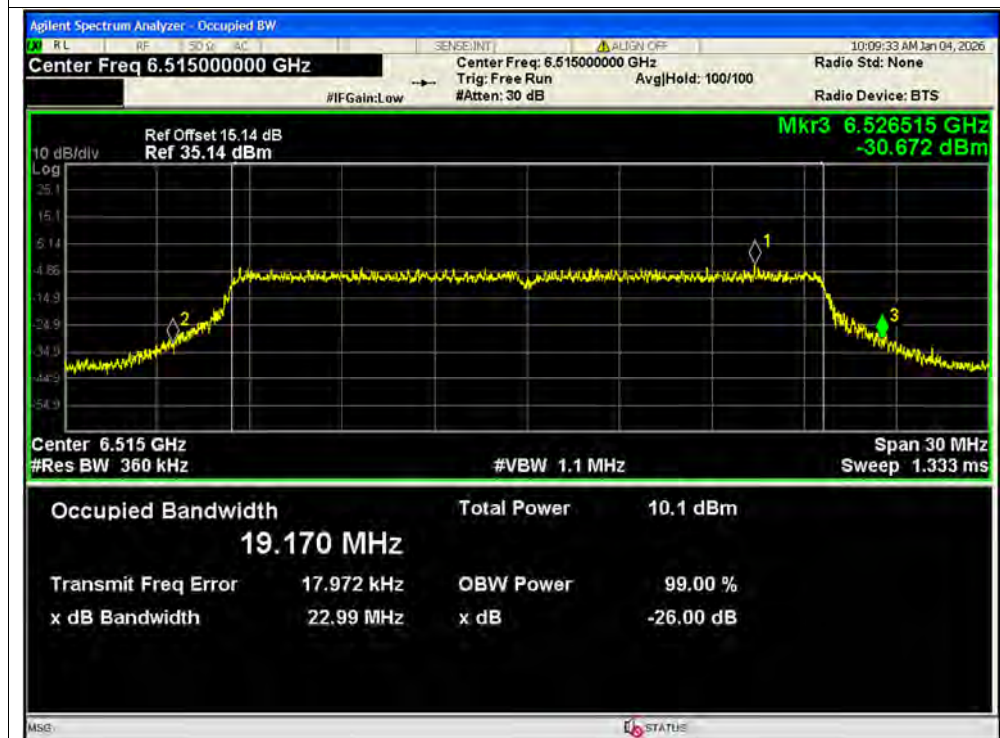


-26dB Bandwidth NVNT ax20 6515MHz Ant2 SISO



-26dB Bandwidth NVNT ax20 6535MHz Ant2 SISO

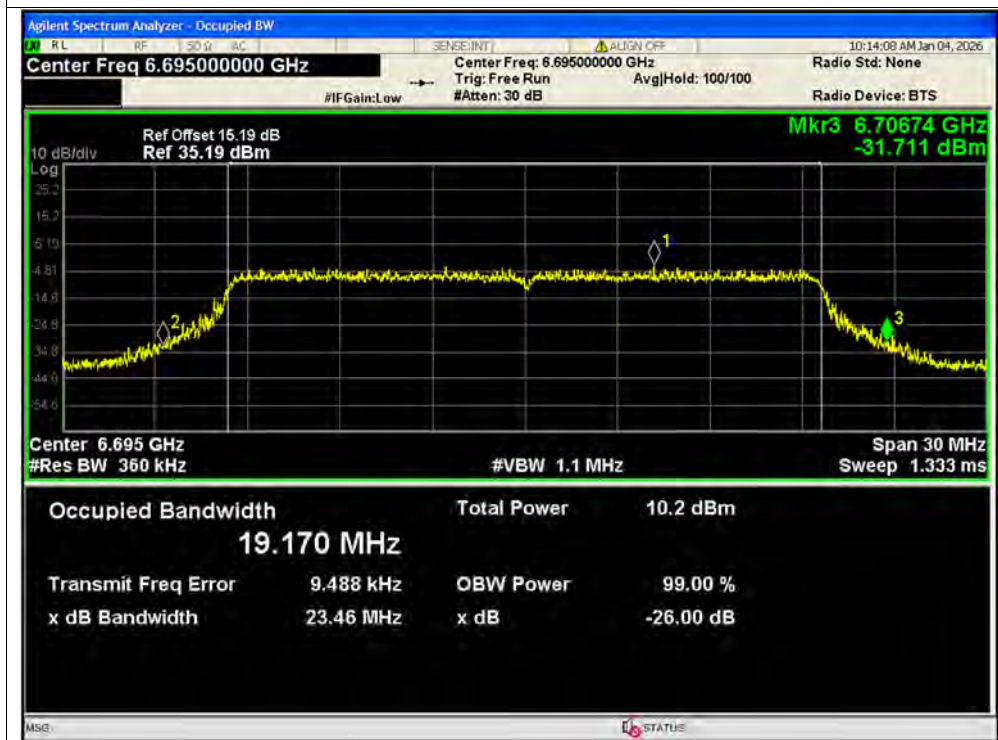


-26dB Bandwidth NVNT ax20 6695MHz Ant2 SISO

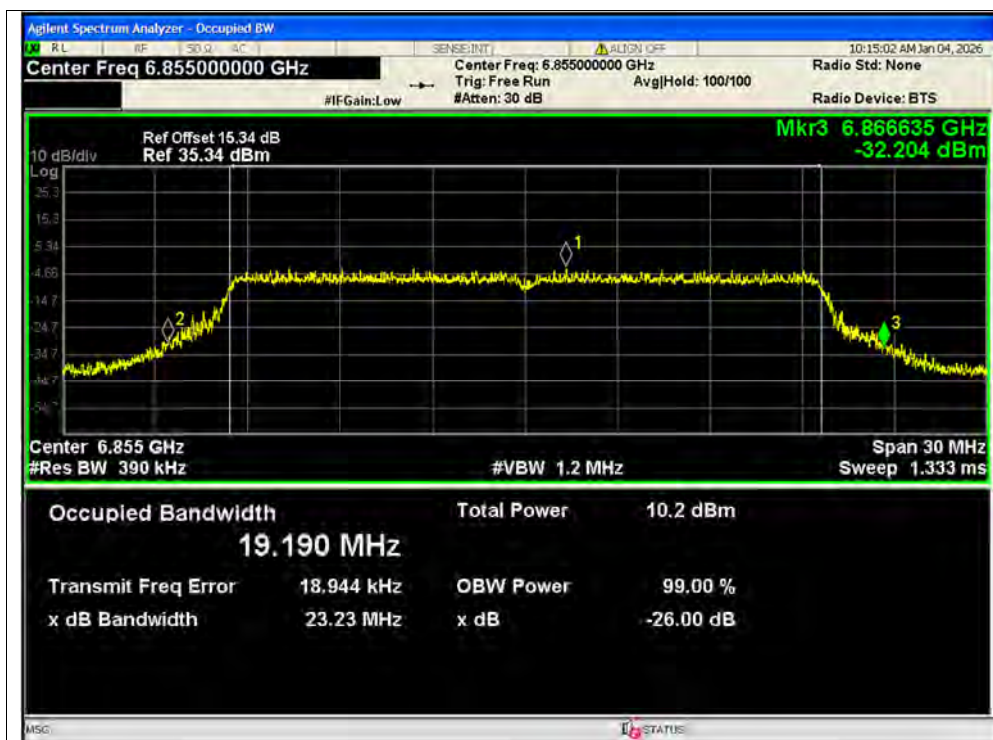


-26dB Bandwidth NVNT ax20 6855MHz Ant2 SISO




-26dB Bandwidth NVNT ax20 6875MHz Ant2 SISO

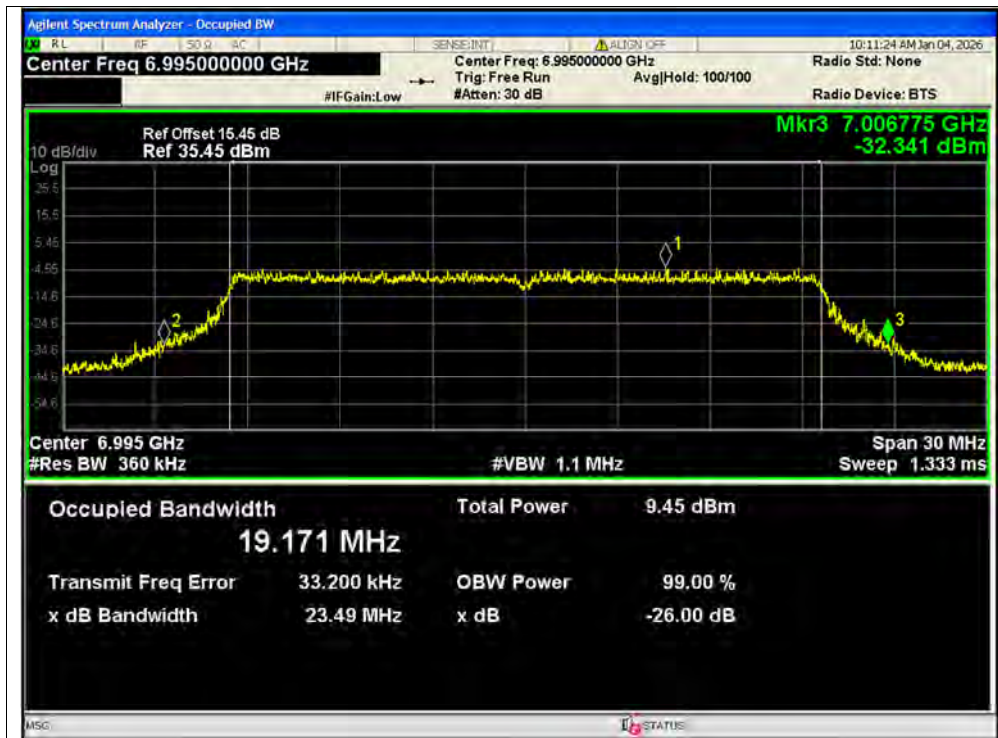


-26dB Bandwidth NVNT ax20 6995MHz Ant2 SISO

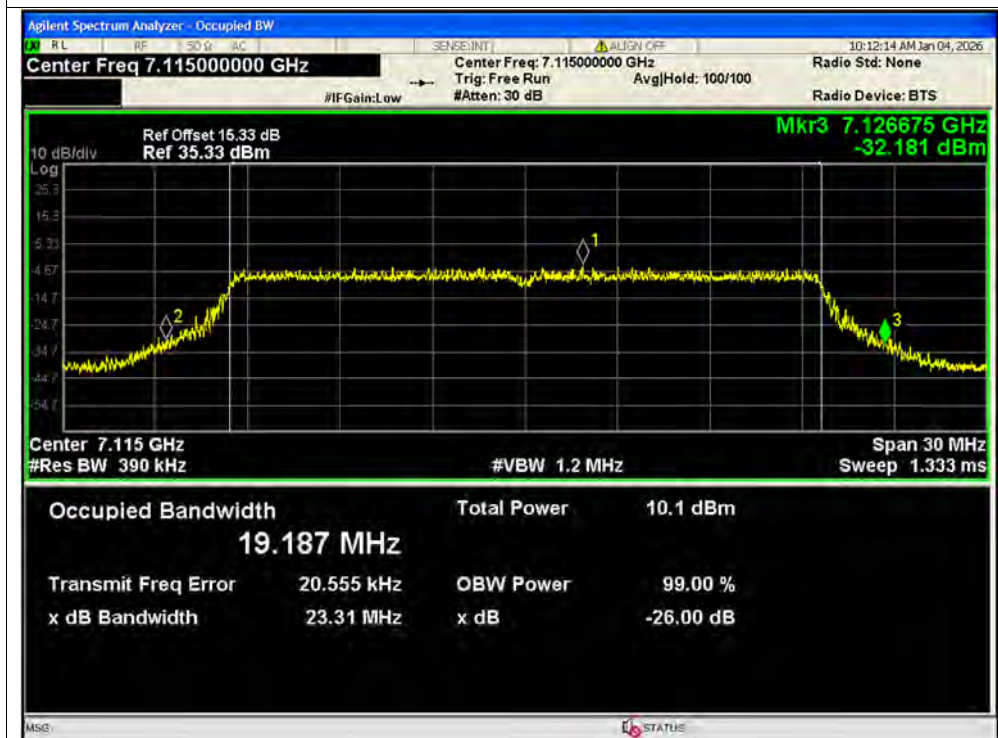


-26dB Bandwidth NVNT ax20 7115MHz Ant2 SISO

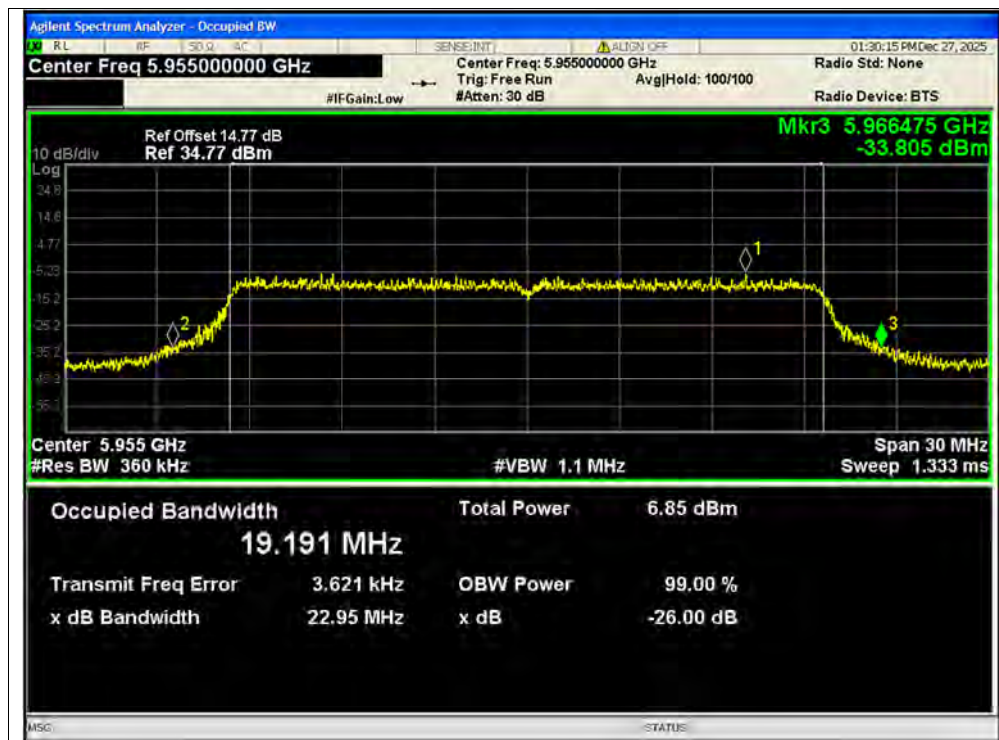


-26dB Bandwidth NVNT ax20 5955MHz Ant1 MIMO

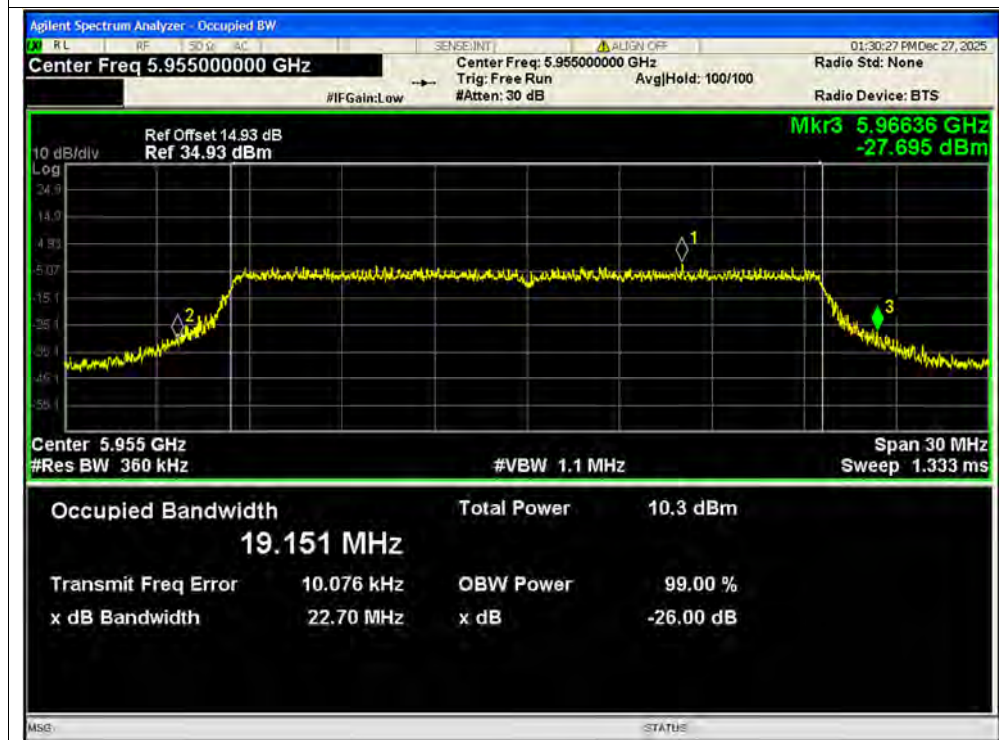


-26dB Bandwidth NVNT ax20 5955MHz Ant2 MIMO

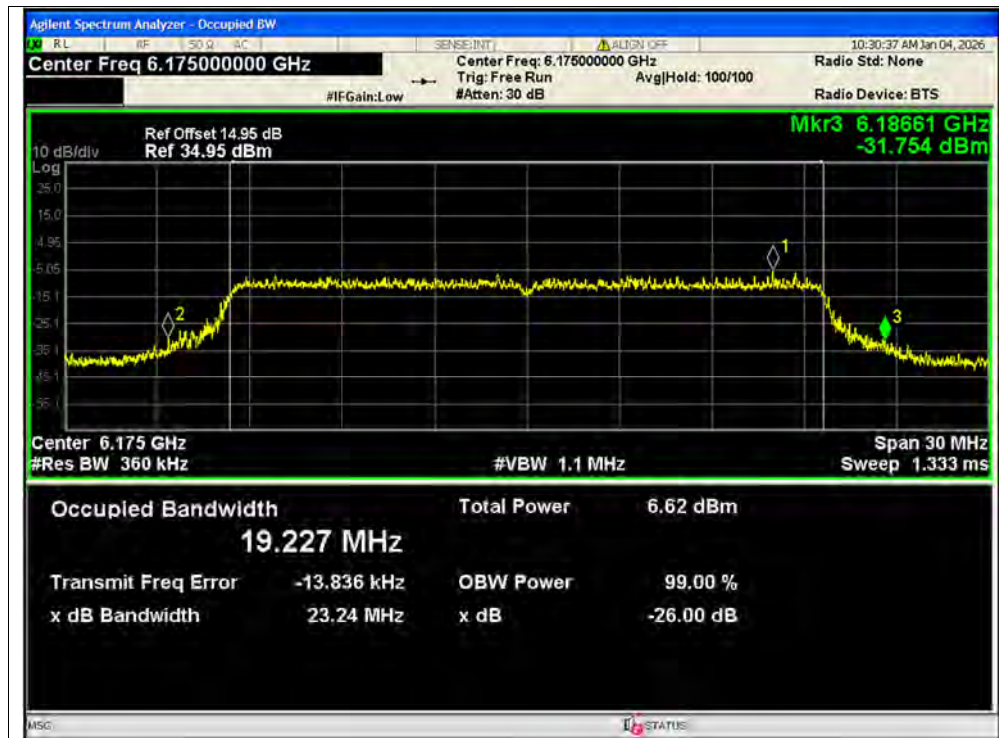

-26dB Bandwidth NVNT ax20 6175MHz Ant1 MIMO

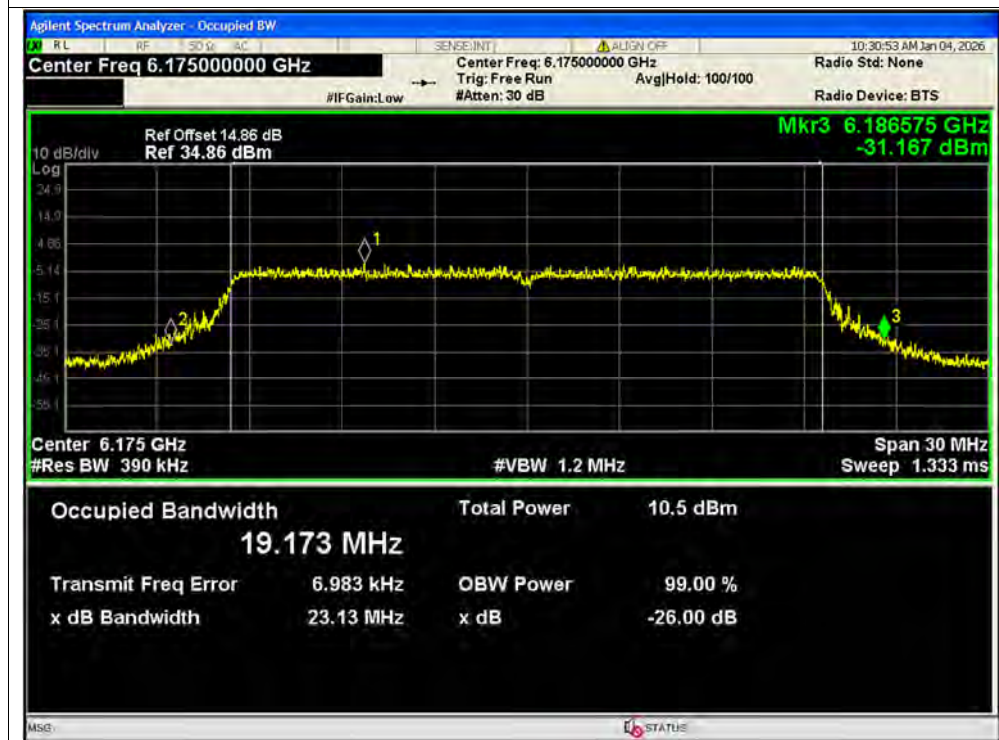


-26dB Bandwidth NVNT ax20 6175MHz Ant2 MIMO

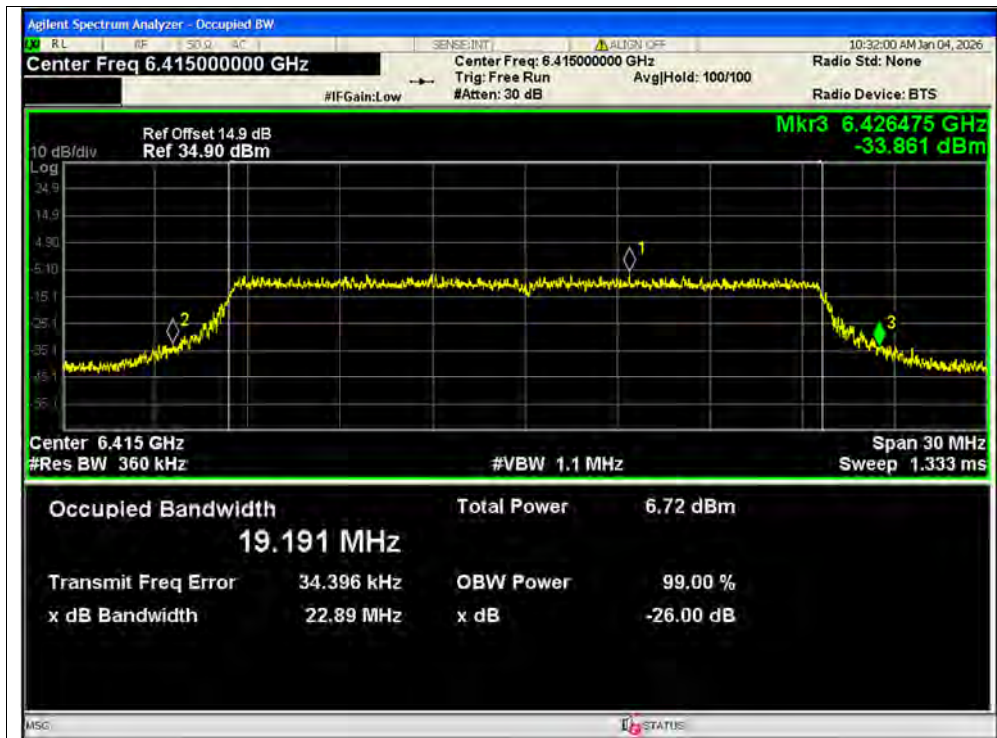


-26dB Bandwidth NVNT ax20 6415MHz Ant1 MIMO




-26dB Bandwidth NVNT ax20 6415MHz Ant2 MIMO

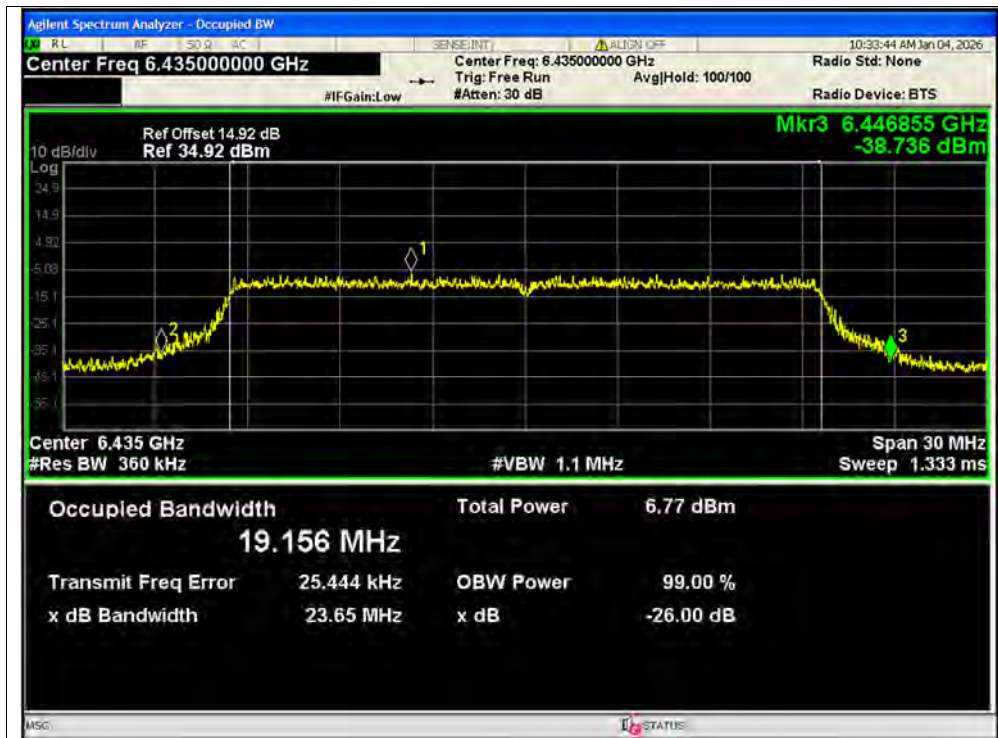

-26dB Bandwidth NVNT ax20 6435MHz Ant1 MIMO

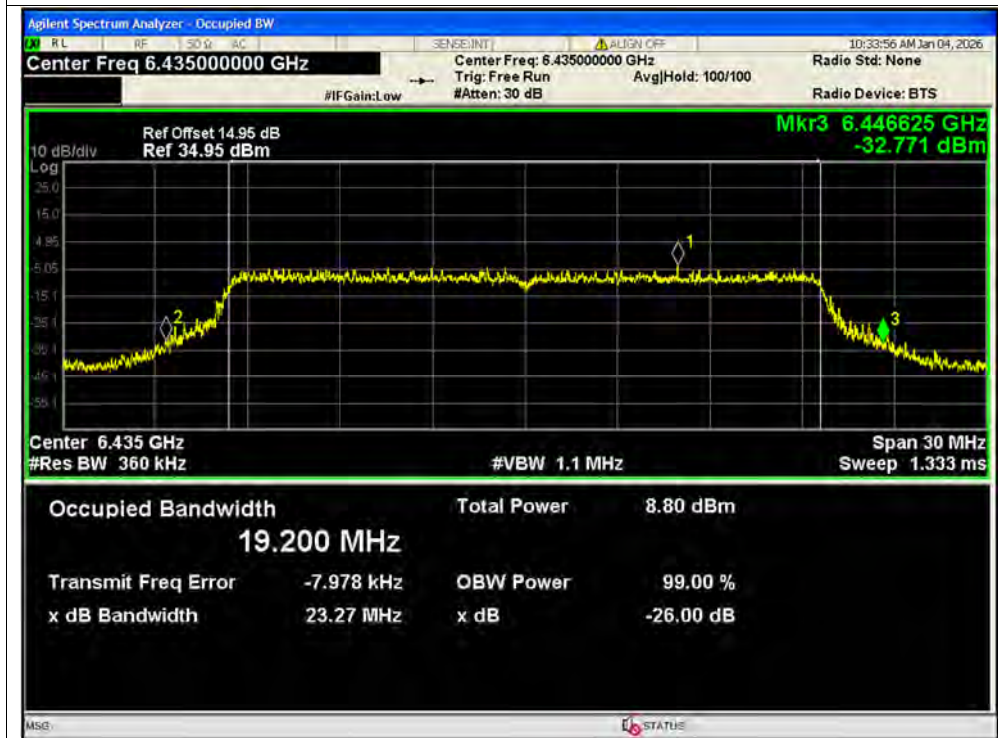


-26dB Bandwidth NVNT ax20 6435MHz Ant2 MIMO

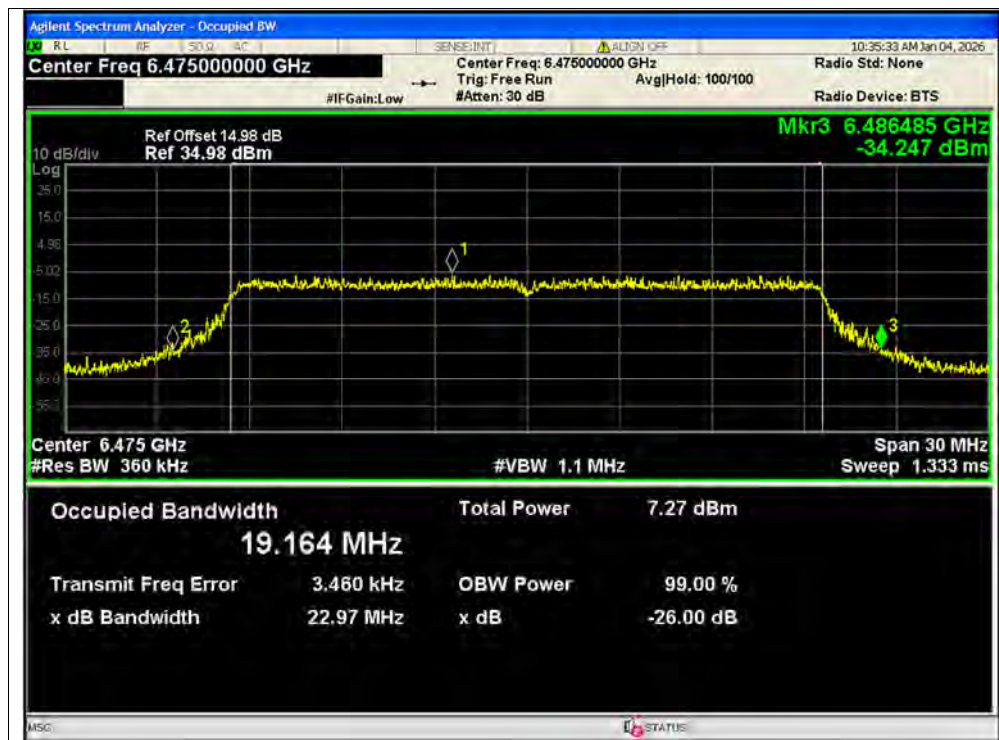


-26dB Bandwidth NVNT ax20 6475MHz Ant1 MIMO




-26dB Bandwidth NVNT ax20 6475MHz Ant2 MIMO

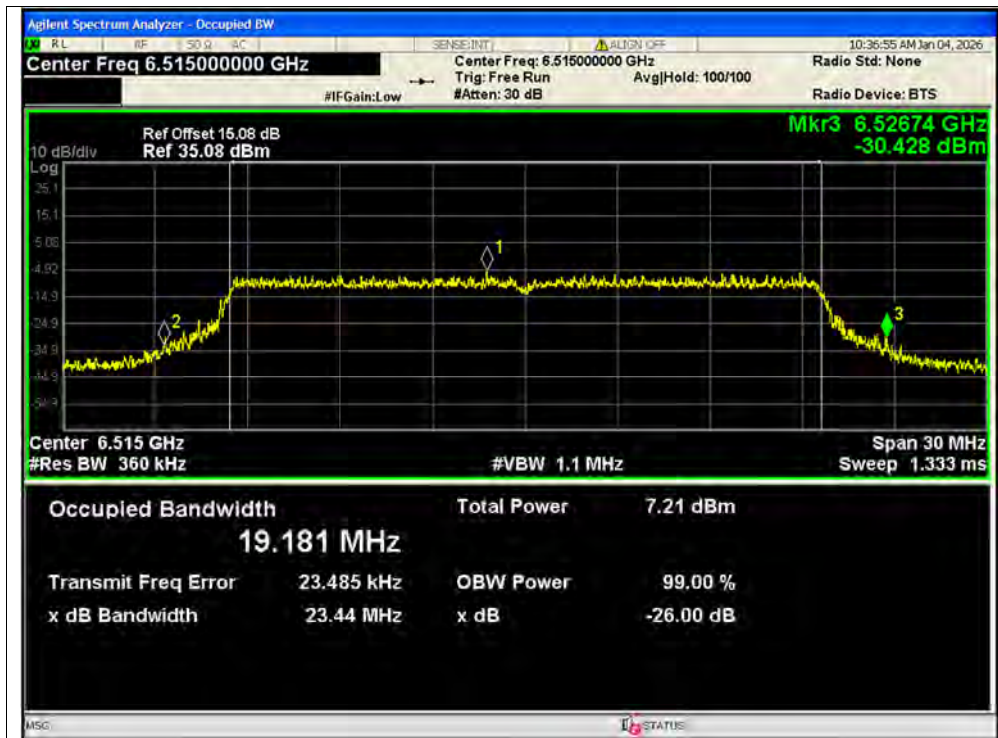


-26dB Bandwidth NVNT ax20 6515MHz Ant1 MIMO

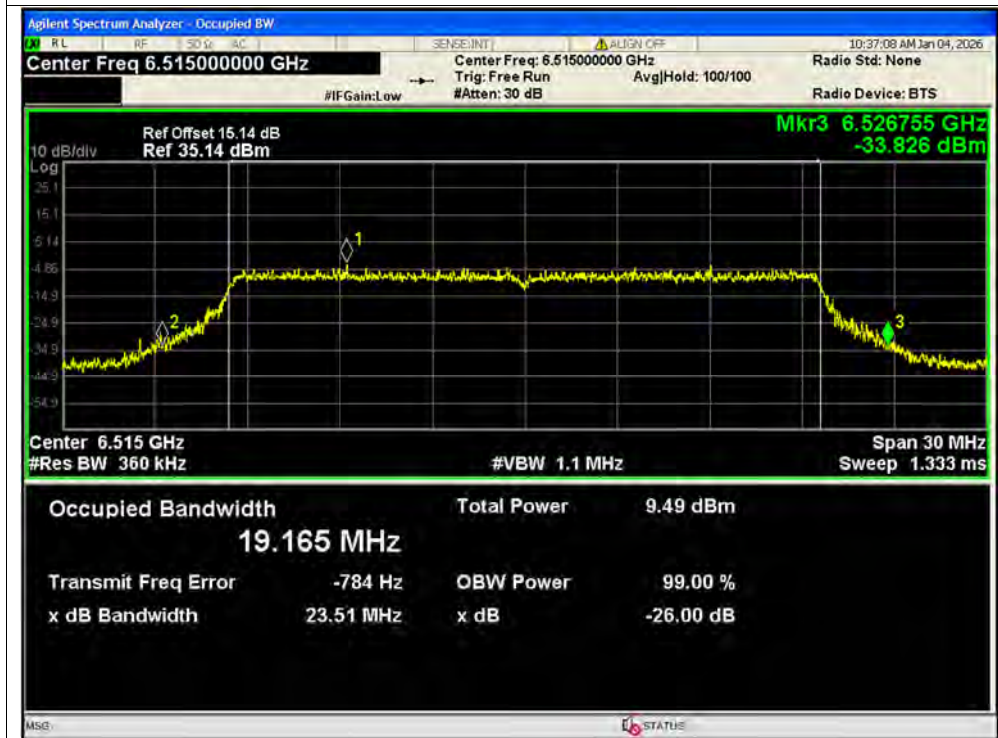


-26dB Bandwidth NVNT ax20 6515MHz Ant2 MIMO

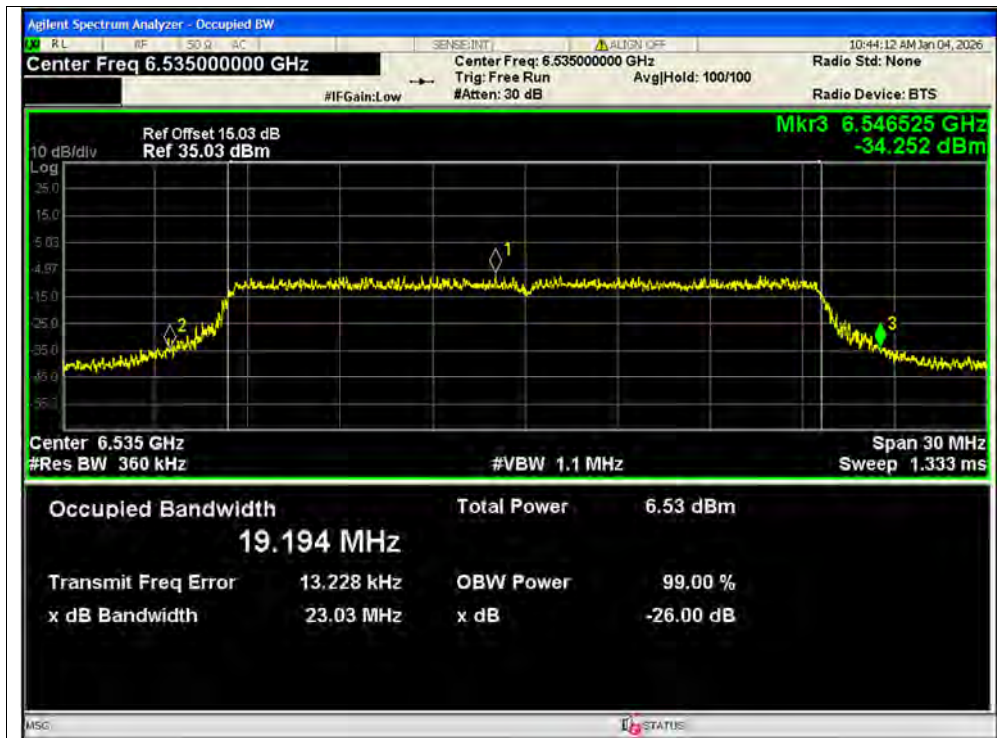


-26dB Bandwidth NVNT ax20 6535MHz Ant1 MIMO

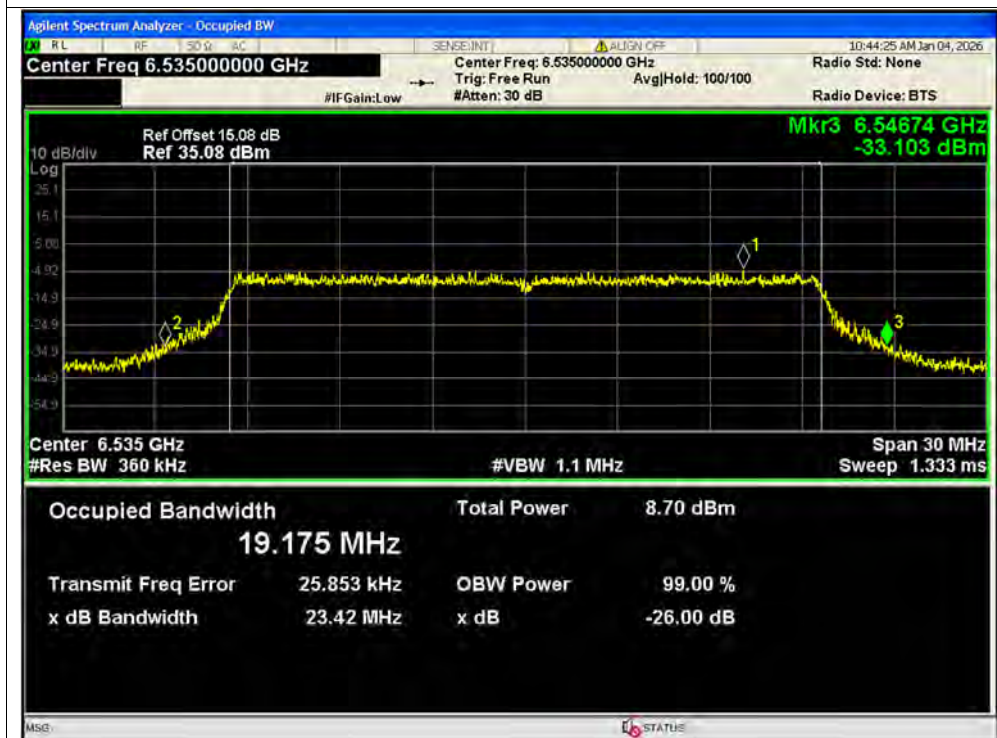


-26dB Bandwidth NVNT ax20 6535MHz Ant2 MIMO

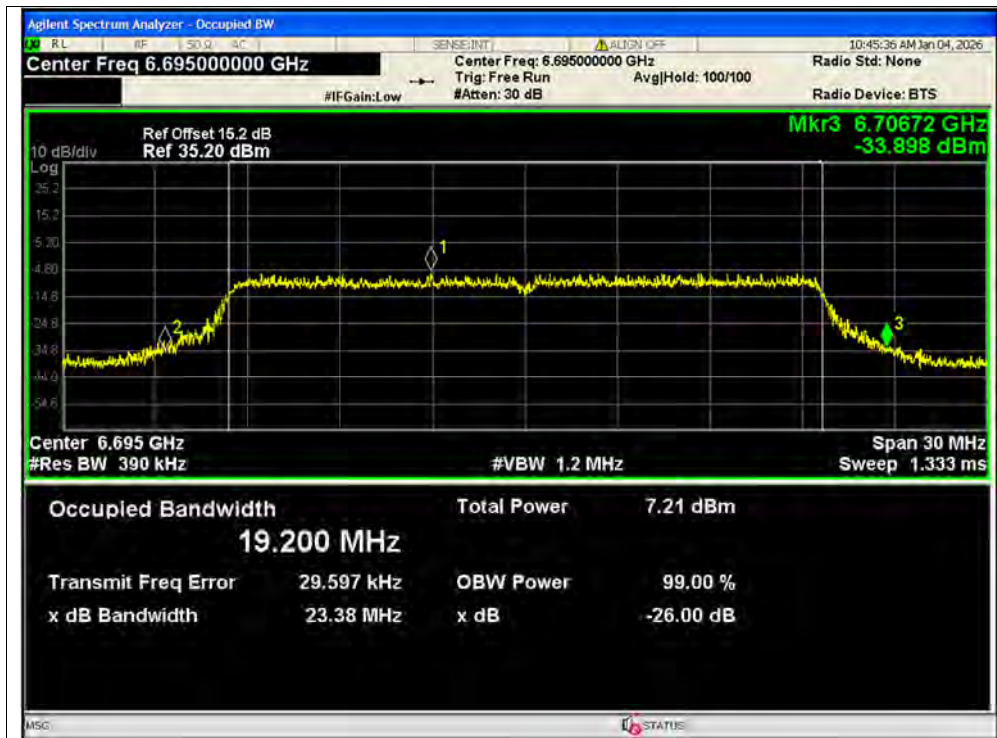


-26dB Bandwidth NVNT ax20 6695MHz Ant1 MIMO

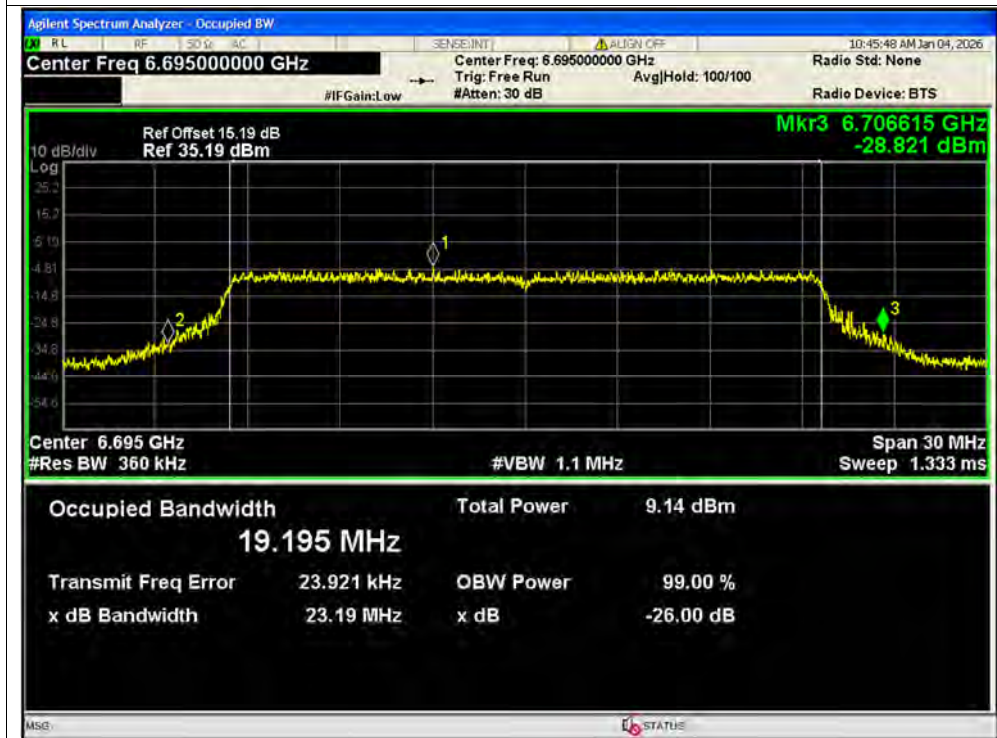


-26dB Bandwidth NVNT ax20 6695MHz Ant2 MIMO

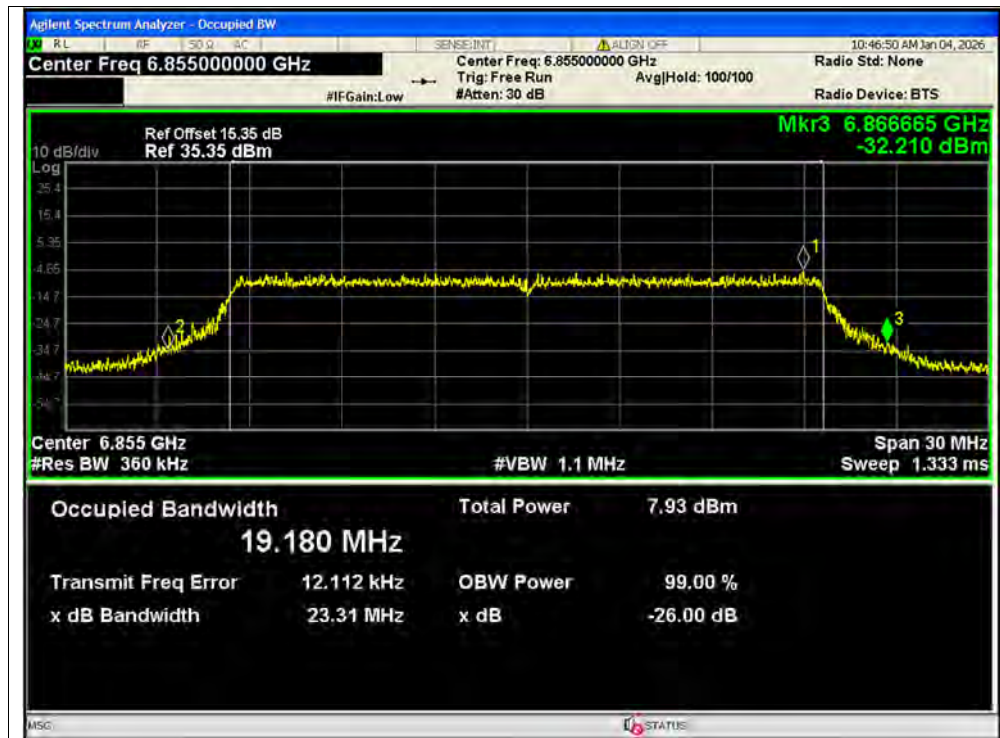

-26dB Bandwidth NVNT ax20 6855MHz Ant1 MIMO

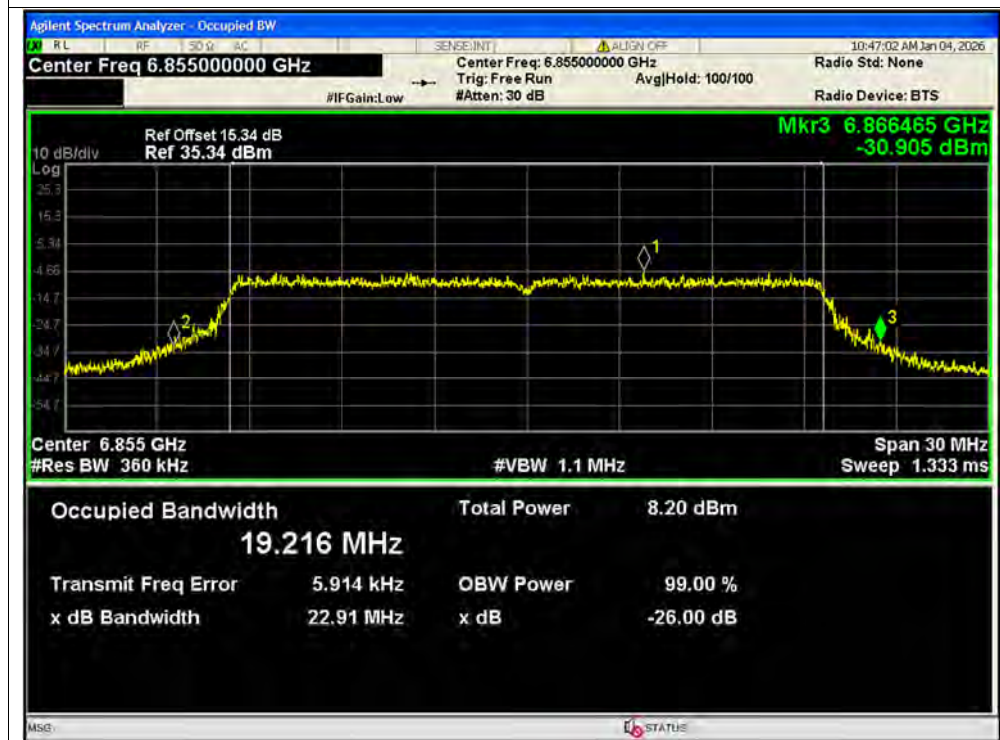


-26dB Bandwidth NVNT ax20 6855MHz Ant2 MIMO

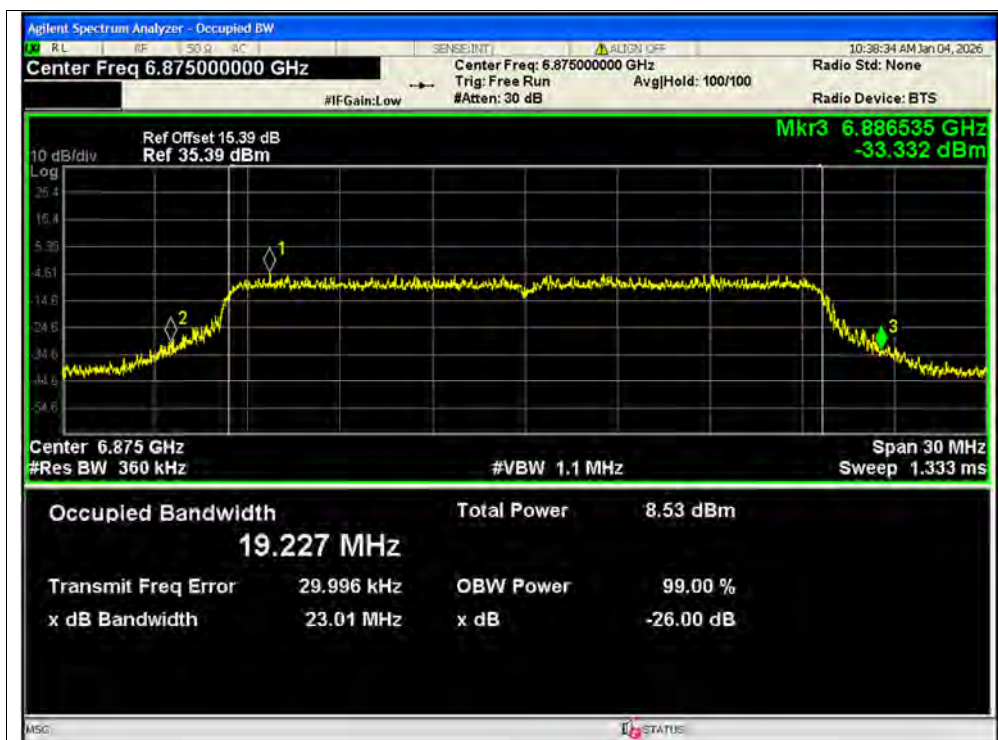


-26dB Bandwidth NVNT ax20 6875MHz Ant1 MIMO



-26dB Bandwidth NVNT ax20 6875MHz Ant2 MIMO

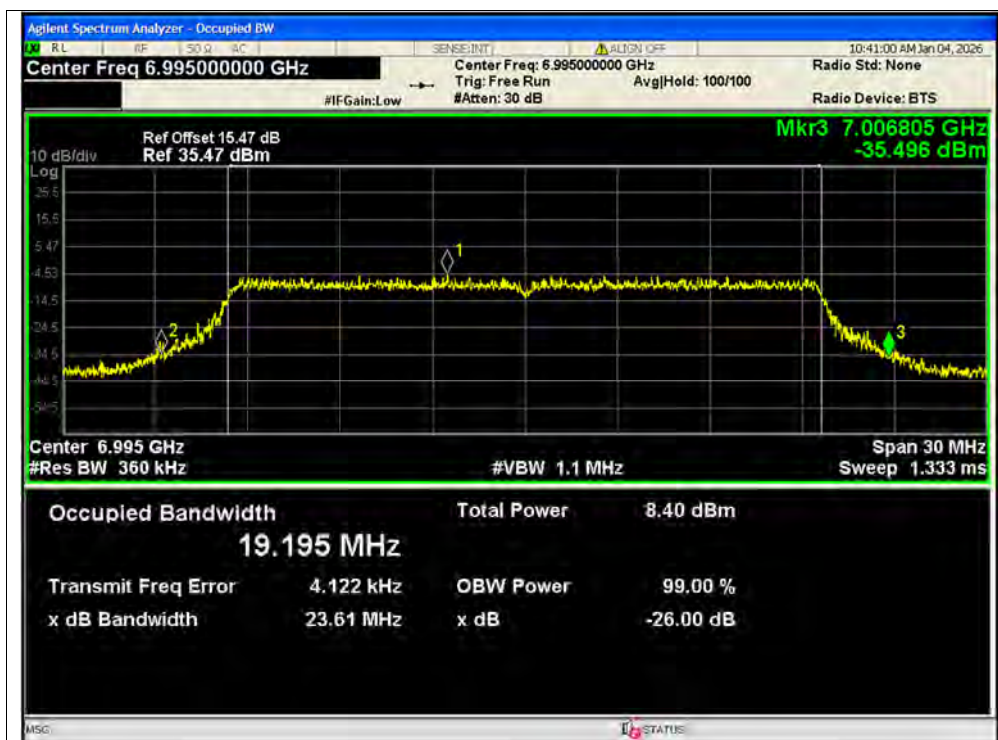

-26dB Bandwidth NVNT ax20 6995MHz Ant1 MIMO

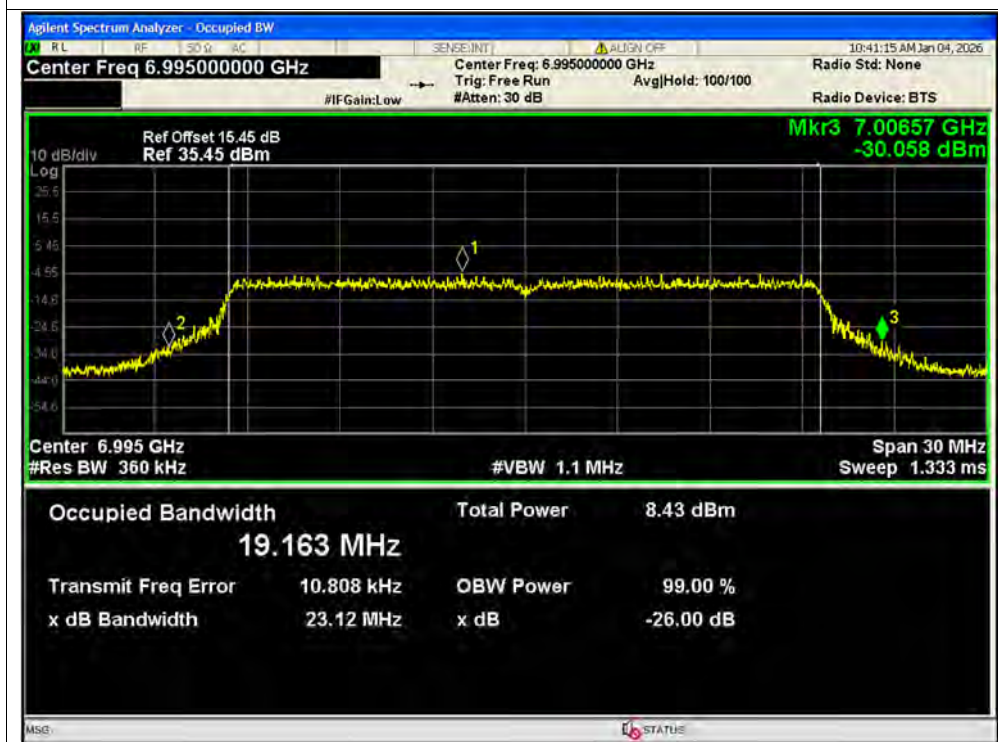


-26dB Bandwidth NVNT ax20 6995MHz Ant2 MIMO



-26dB Bandwidth NVNT ax20 7115MHz Ant1 MIMO




-26dB Bandwidth NVNT ax20 7115MHz Ant2 MIMO

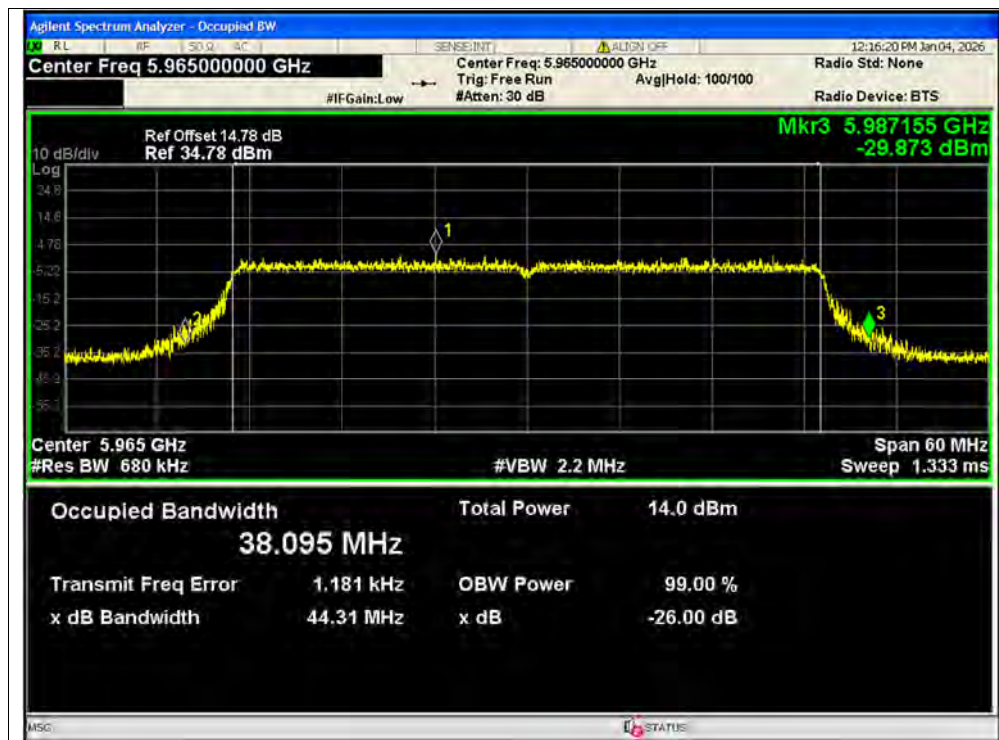

-26dB Bandwidth NVNT ax40 5965MHz Ant1 SISO




-26dB Bandwidth NVNT ax40 6205MHz Ant1 SISO

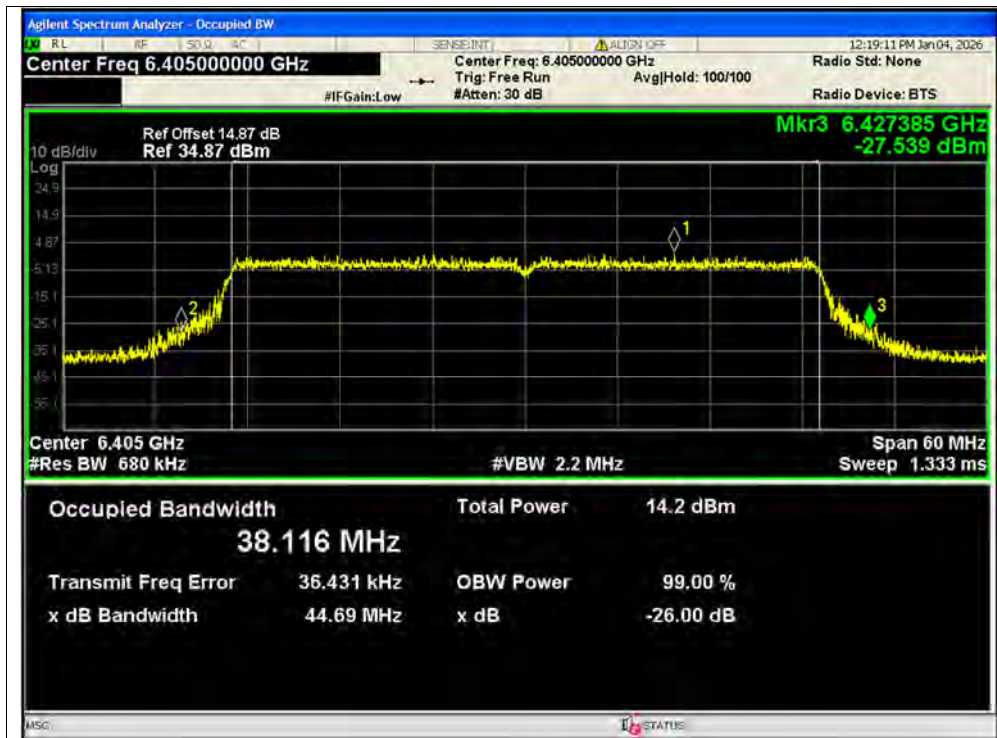


-26dB Bandwidth NVNT ax40 6405MHz Ant1 SISO




-26dB Bandwidth NVNT ax40 6445MHz Ant1 SISO

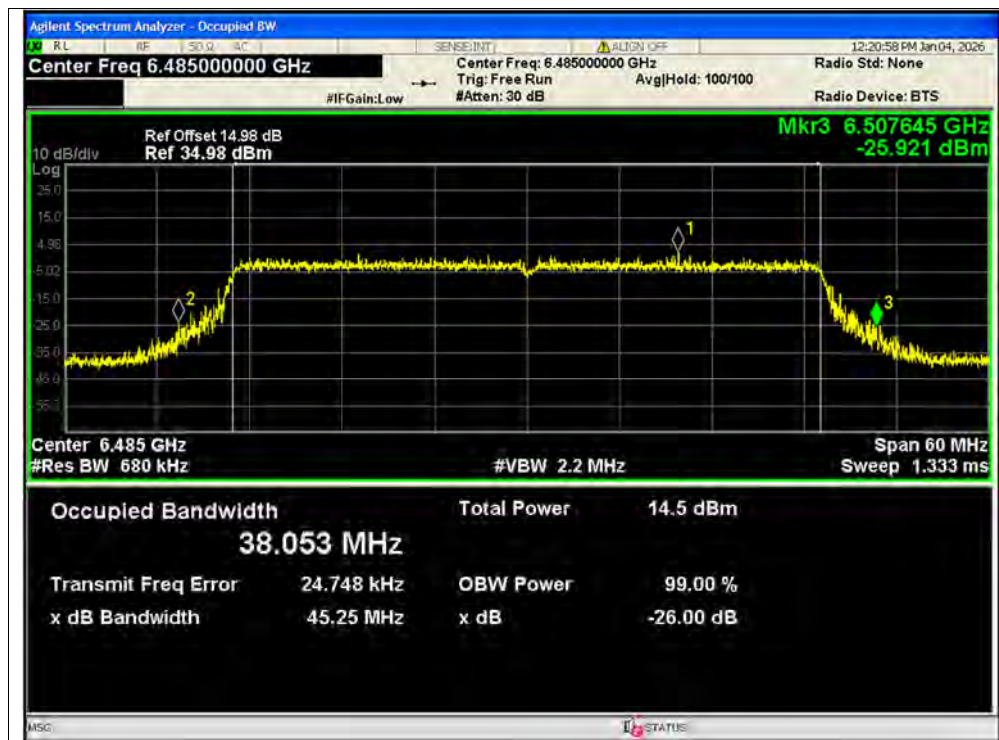

-26dB Bandwidth NVNT ax40 6485MHz Ant1 SISO

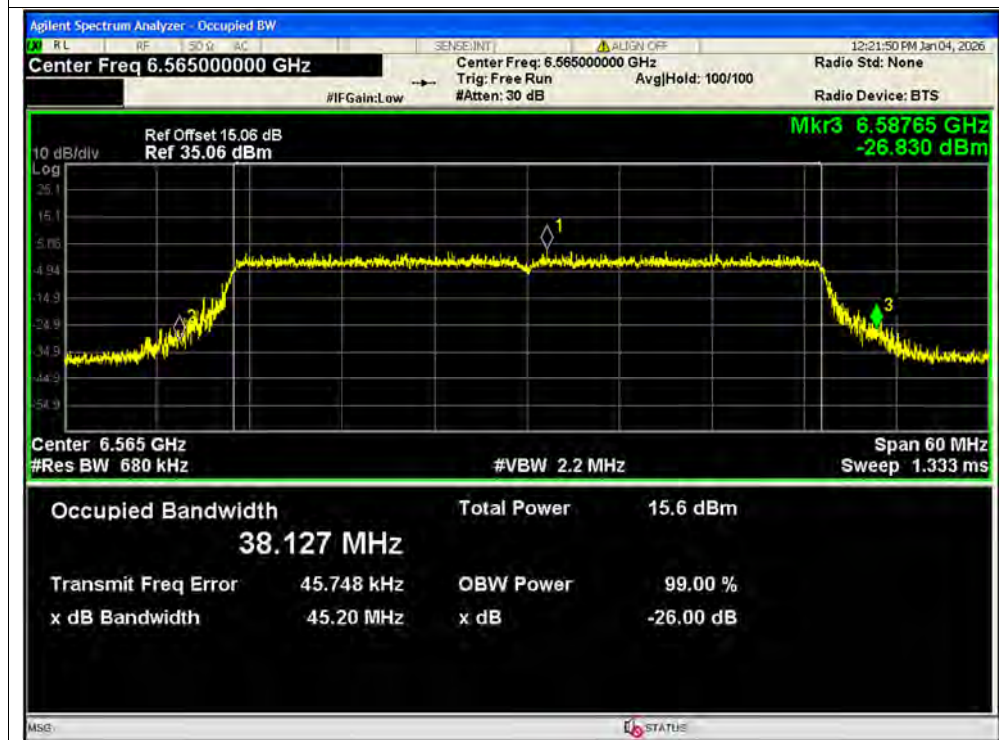


-26dB Bandwidth NVNT ax40 6565MHz Ant1 SISO

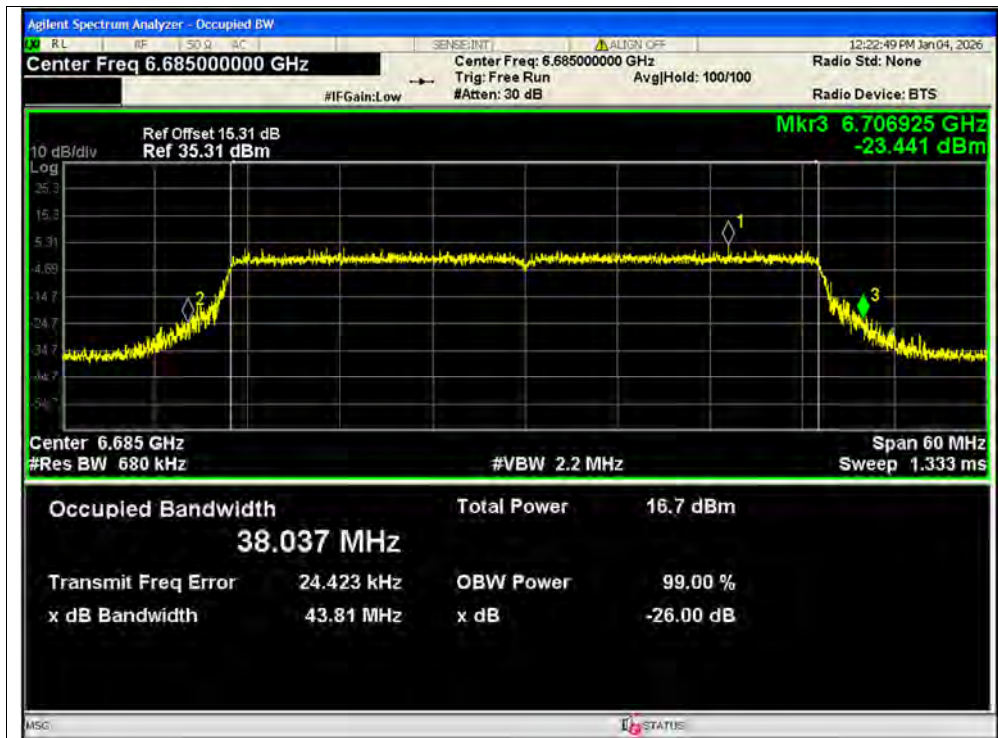

-26dB Bandwidth NVNT ax40 6685MHz Ant1 SISO




-26dB Bandwidth NVNT ax40 6845MHz Ant1 SISO

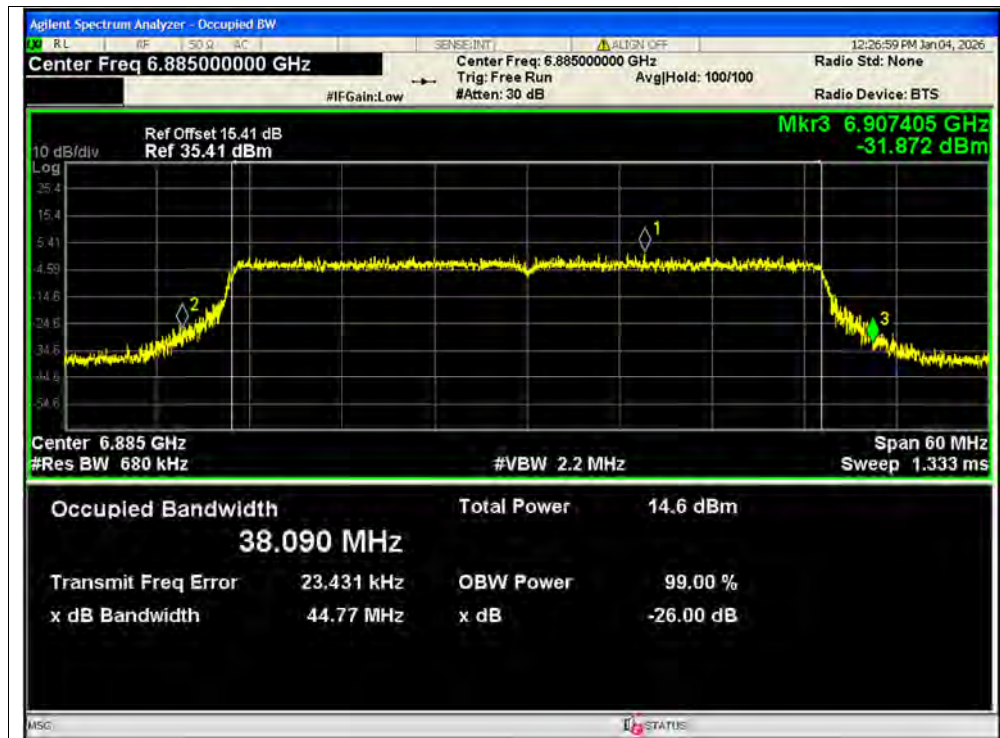

-26dB Bandwidth NVNT ax40 6885MHz Ant1 SISO



-26dB Bandwidth NVNT ax40 6965MHz Ant1 SISO

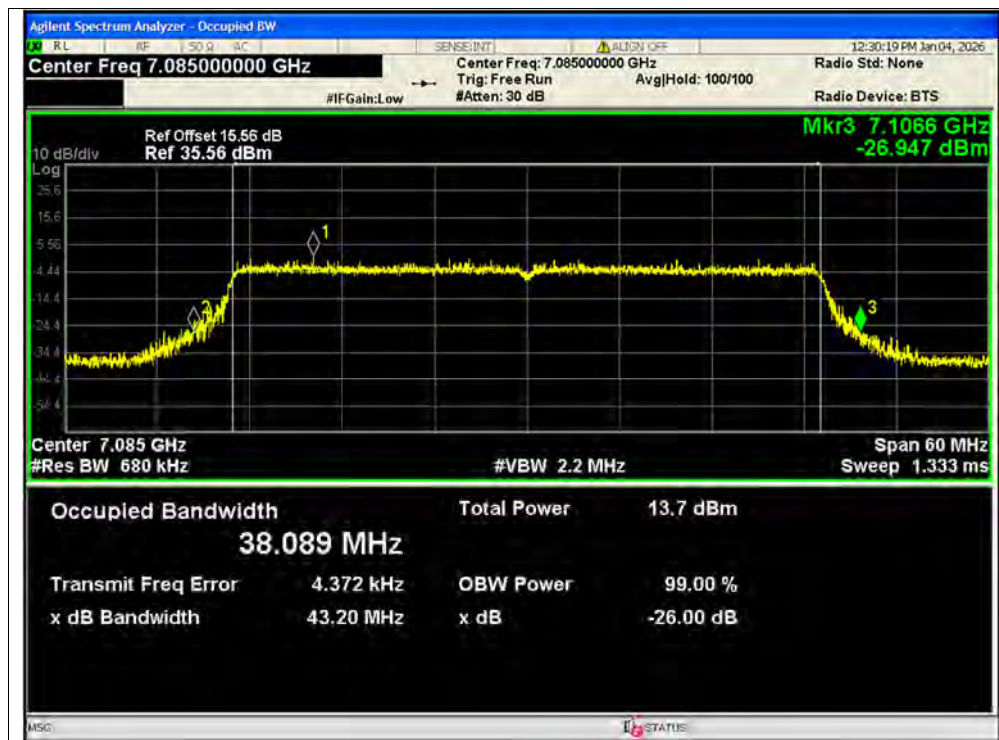


-26dB Bandwidth NVNT ax40 7085MHz Ant1 SISO




-26dB Bandwidth NVNT ax40 5965MHz Ant2 SISO



-26dB Bandwidth NVNT ax40 6205MHz Ant2 SISO

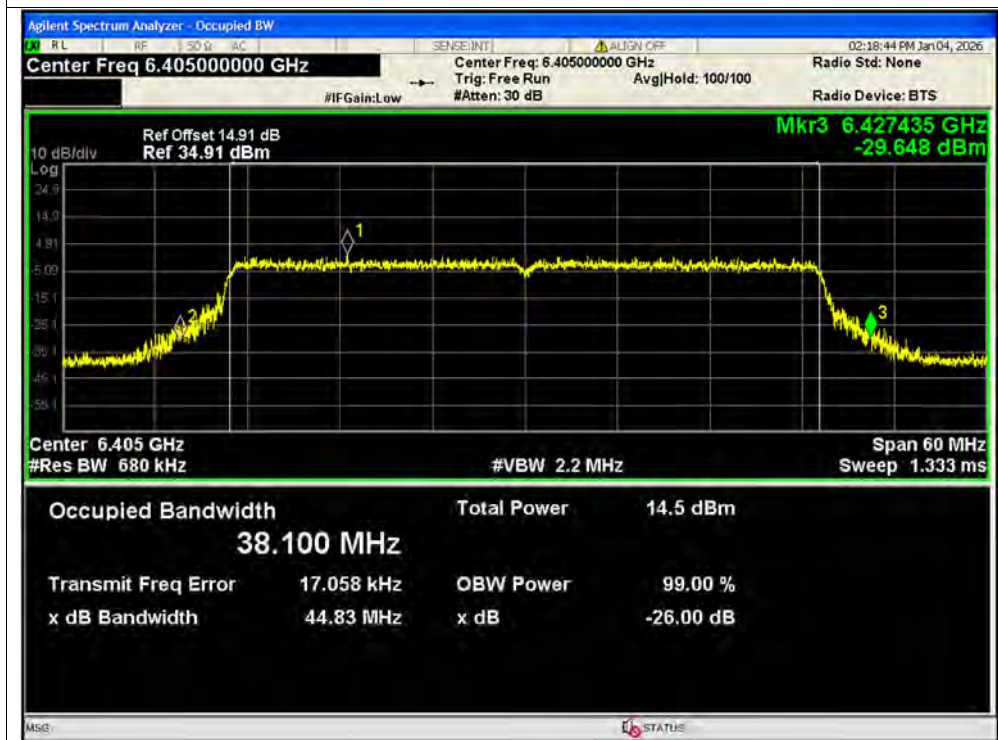

-26dB Bandwidth NVNT ax40 6405MHz Ant2 SISO

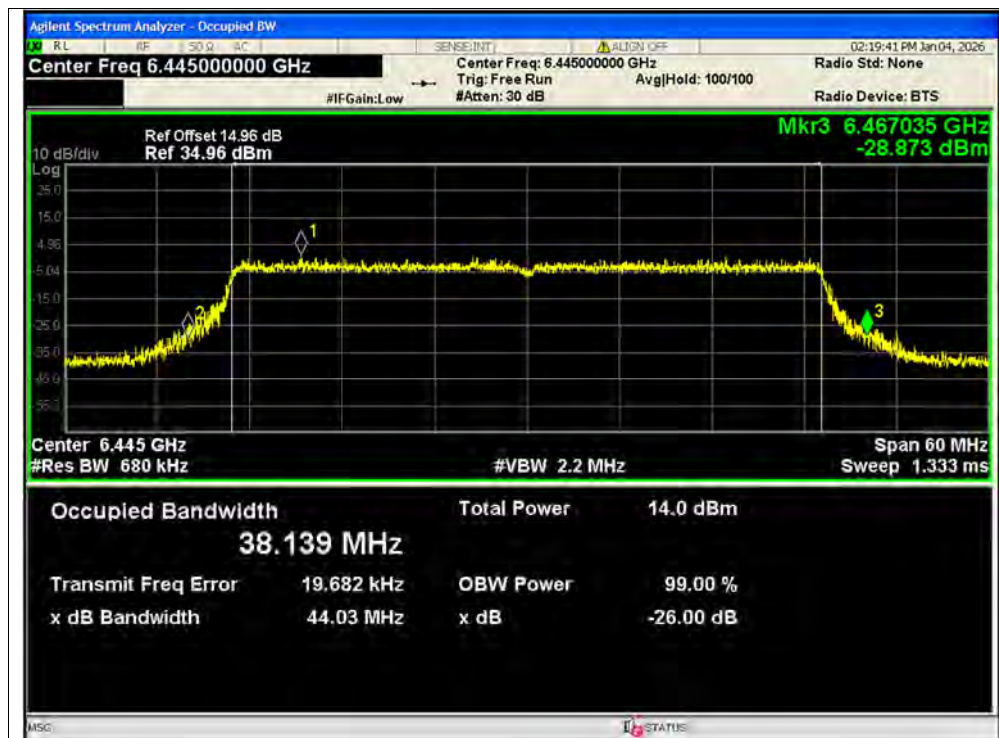


-26dB Bandwidth NVNT ax40 6445MHz Ant2 SISO



-26dB Bandwidth NVNT ax40 6485MHz Ant2 SISO




-26dB Bandwidth NVNT ax40 6565MHz Ant2 SISO

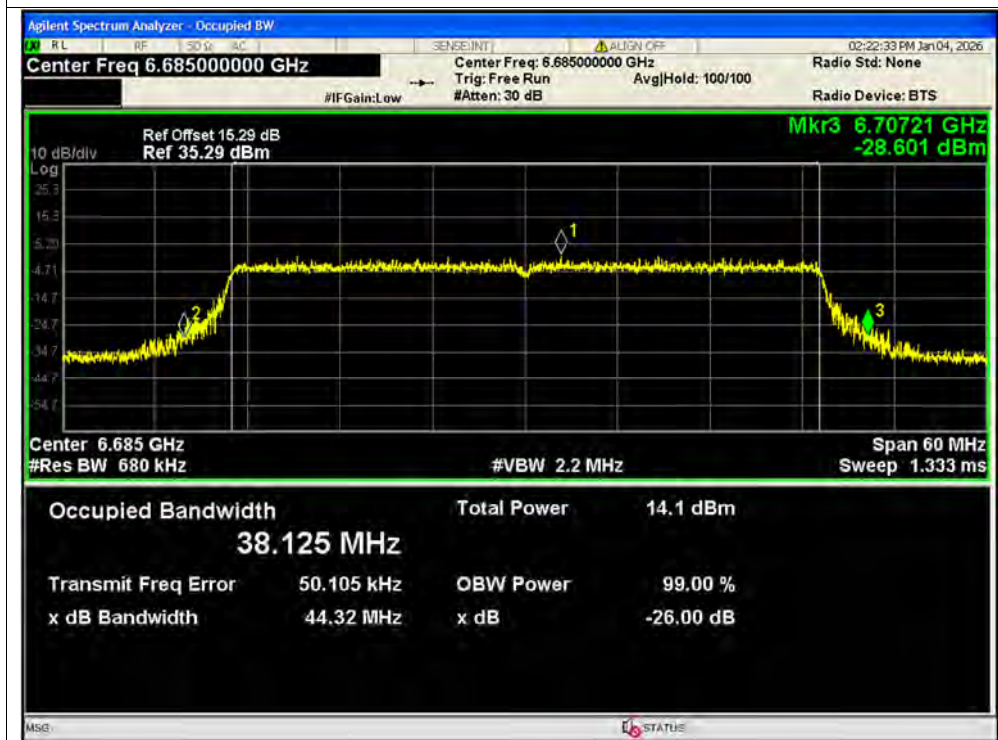


-26dB Bandwidth NVNT ax40 6685MHz Ant2 SISO



-26dB Bandwidth NVNT ax40 6845MHz Ant2 SISO

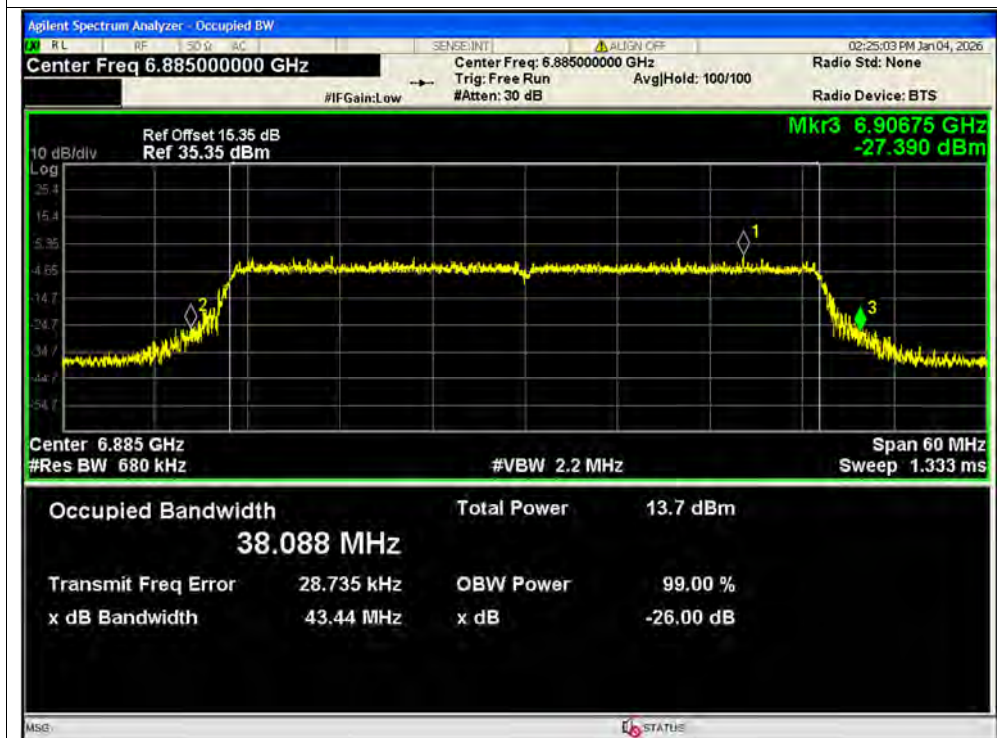


-26dB Bandwidth NVNT ax40 6885MHz Ant2 SISO

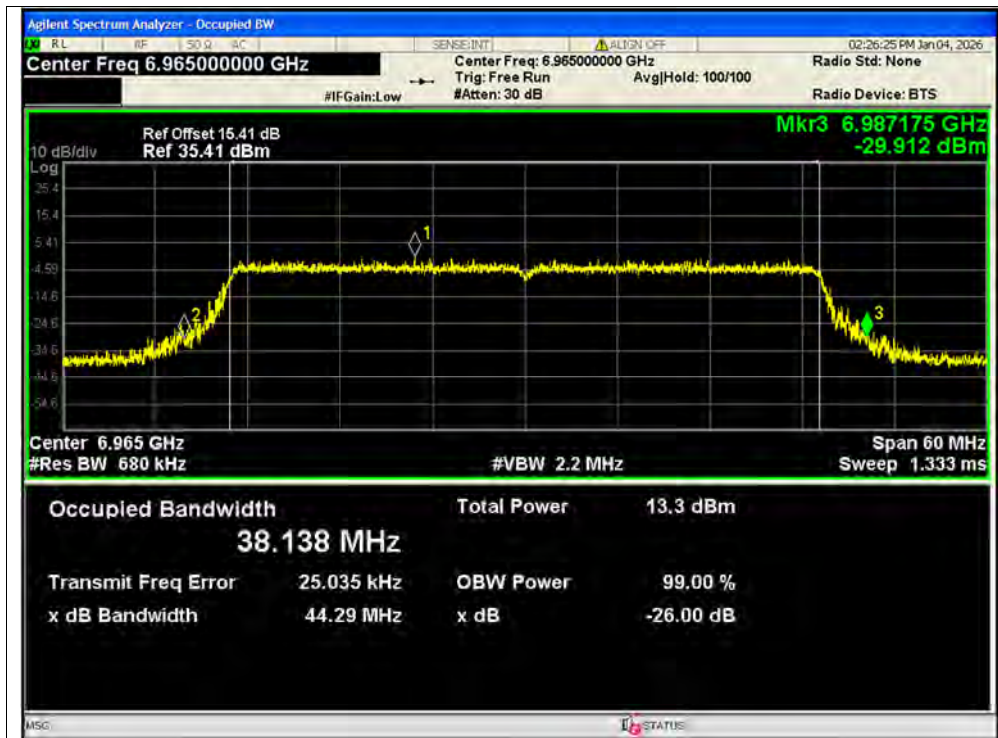


-26dB Bandwidth NVNT ax40 6965MHz Ant2 SISO



-26dB Bandwidth NVNT ax40 7085MHz Ant2 SISO

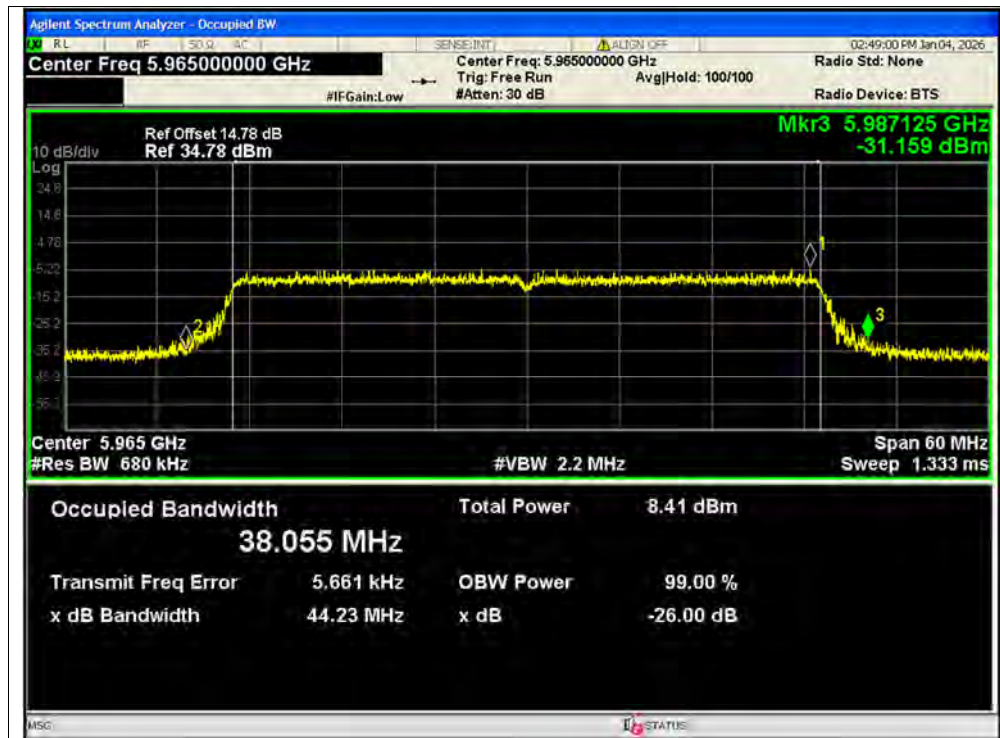


-26dB Bandwidth NVNT ax40 5965MHz Ant1 MIMO

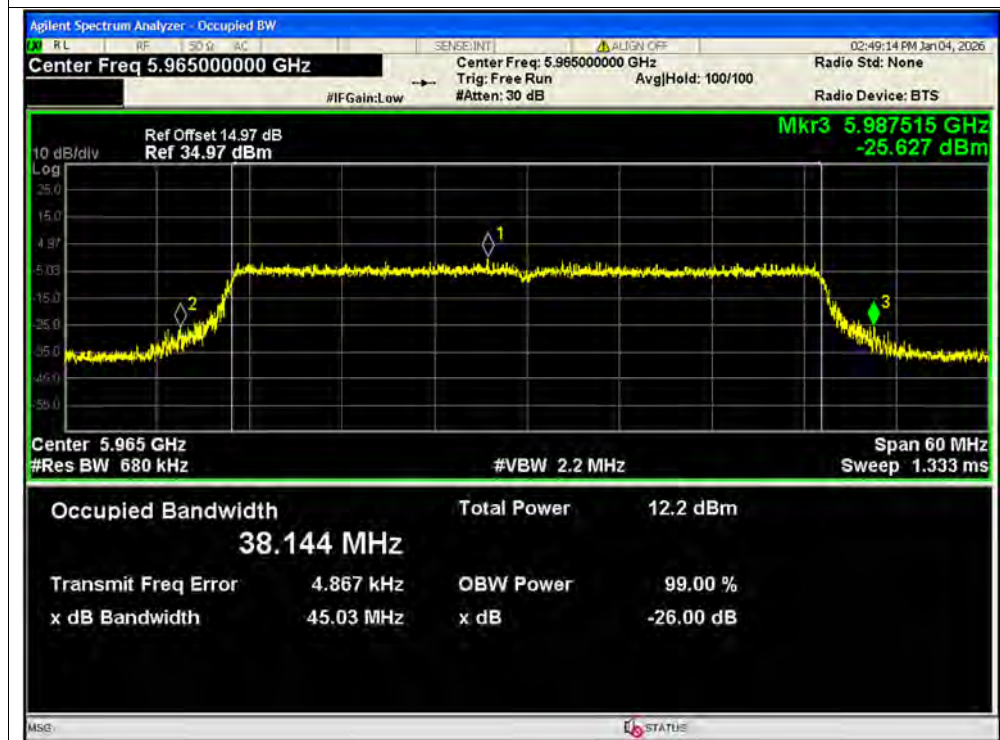


-26dB Bandwidth NVNT ax40 5965MHz Ant2 MIMO




-26dB Bandwidth NVNT ax40 6205MHz Ant1 MIMO

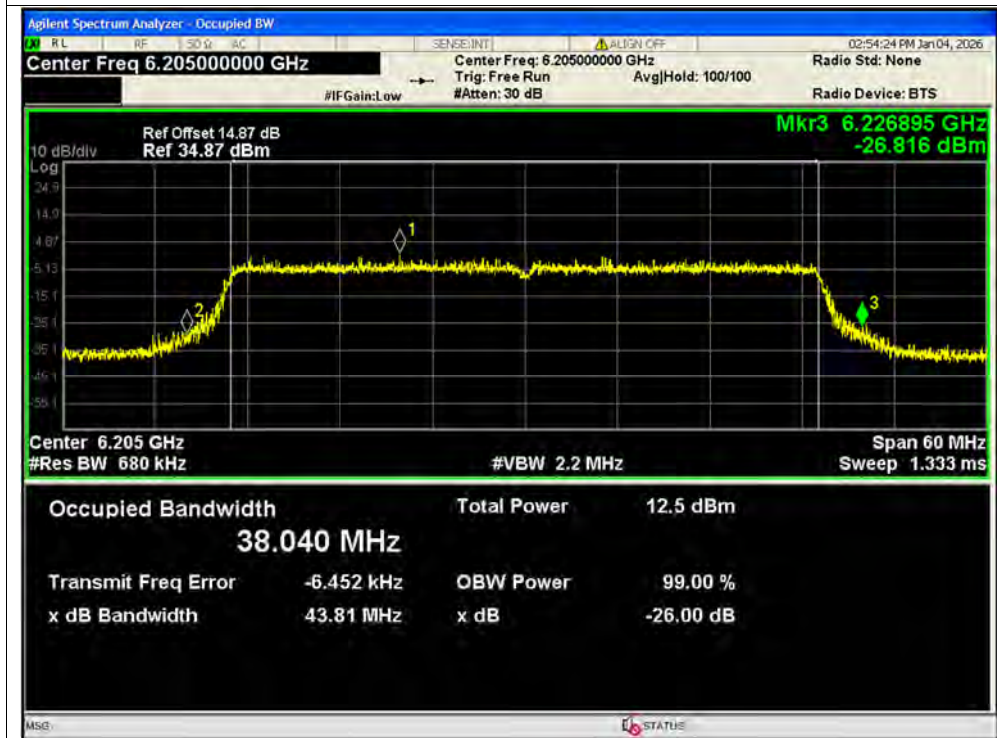


-26dB Bandwidth NVNT ax40 6205MHz Ant2 MIMO

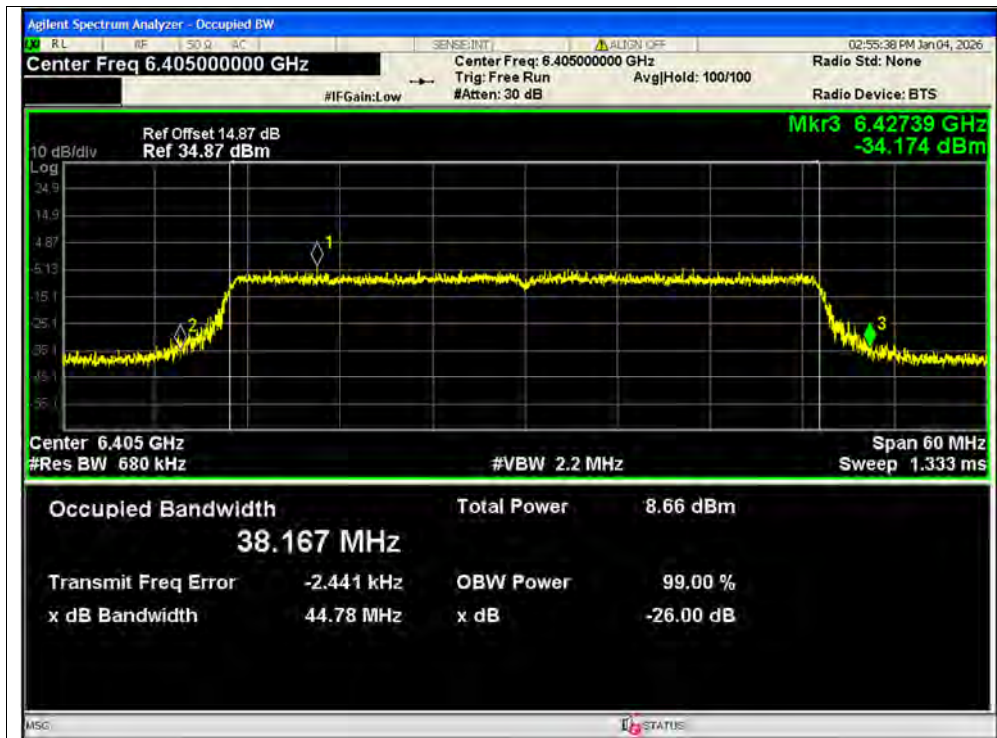


-26dB Bandwidth NVNT ax40 6405MHz Ant1 MIMO

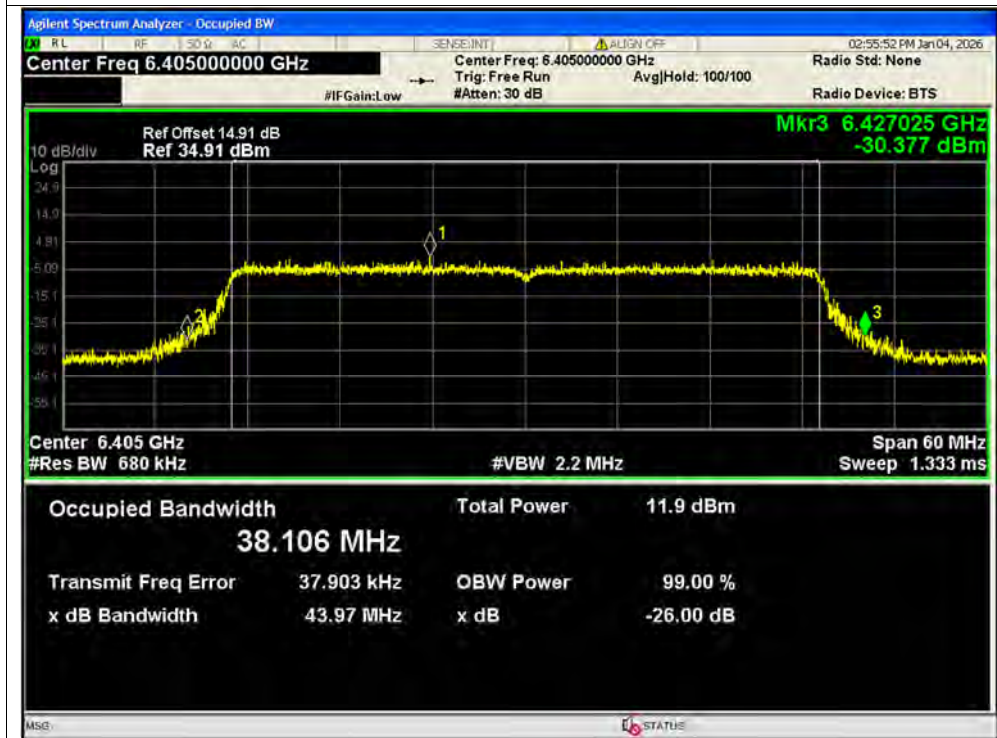

-26dB Bandwidth NVNT ax40 6405MHz Ant2 MIMO

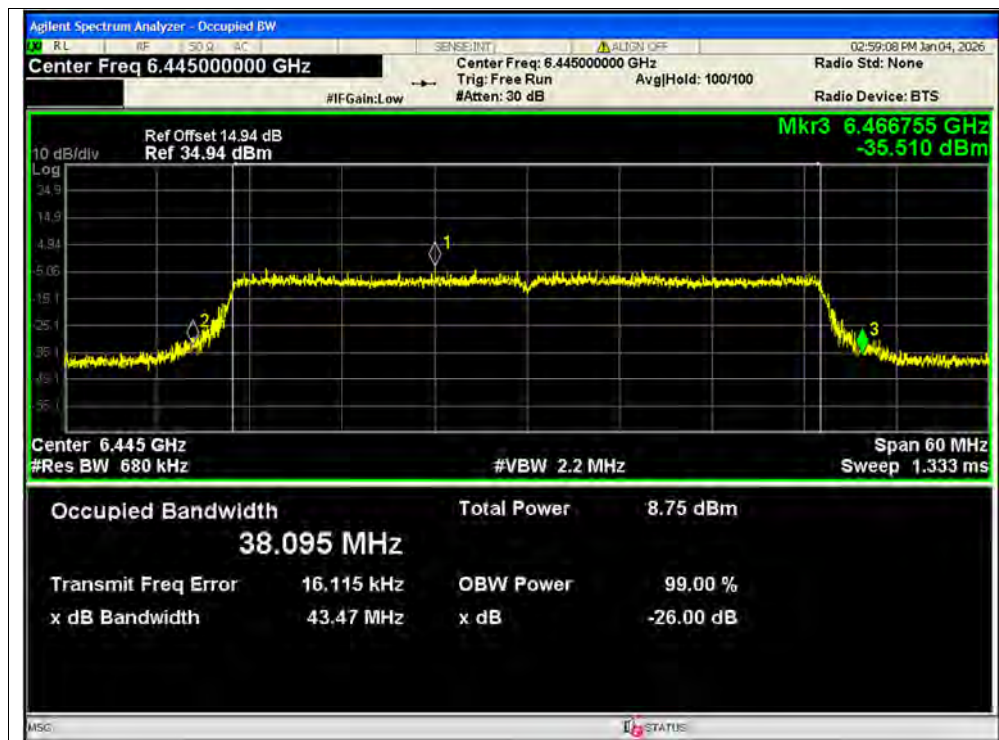


-26dB Bandwidth NVNT ax40 6445MHz Ant1 MIMO

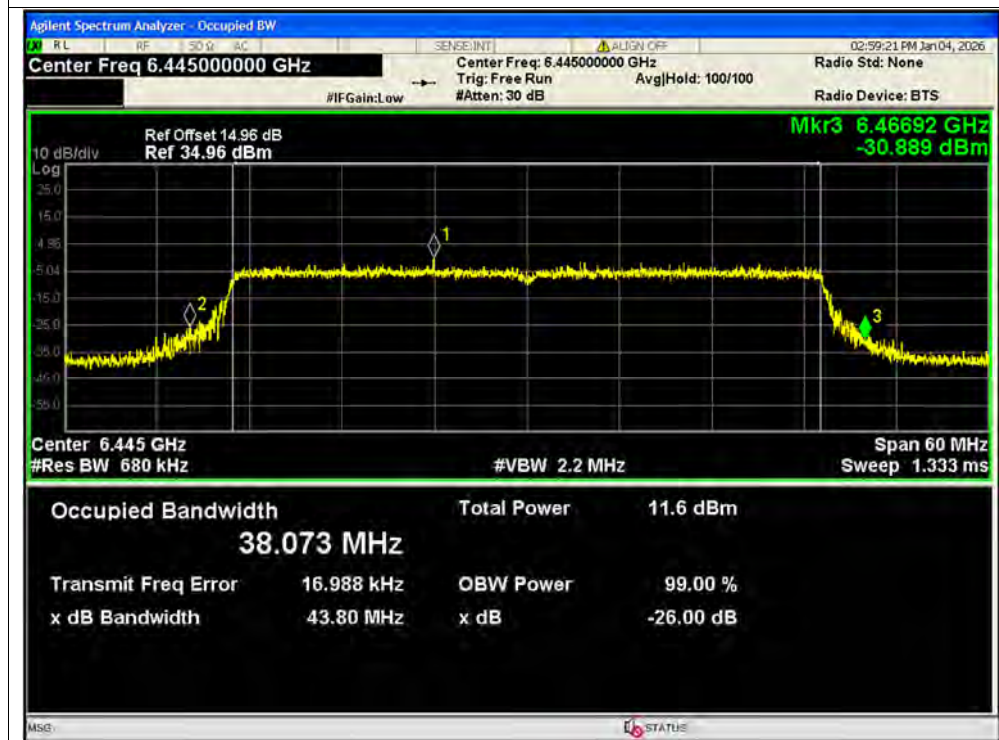

-26dB Bandwidth NVNT ax40 6445MHz Ant2 MIMO



-26dB Bandwidth NVNT ax40 6485MHz Ant1 MIMO

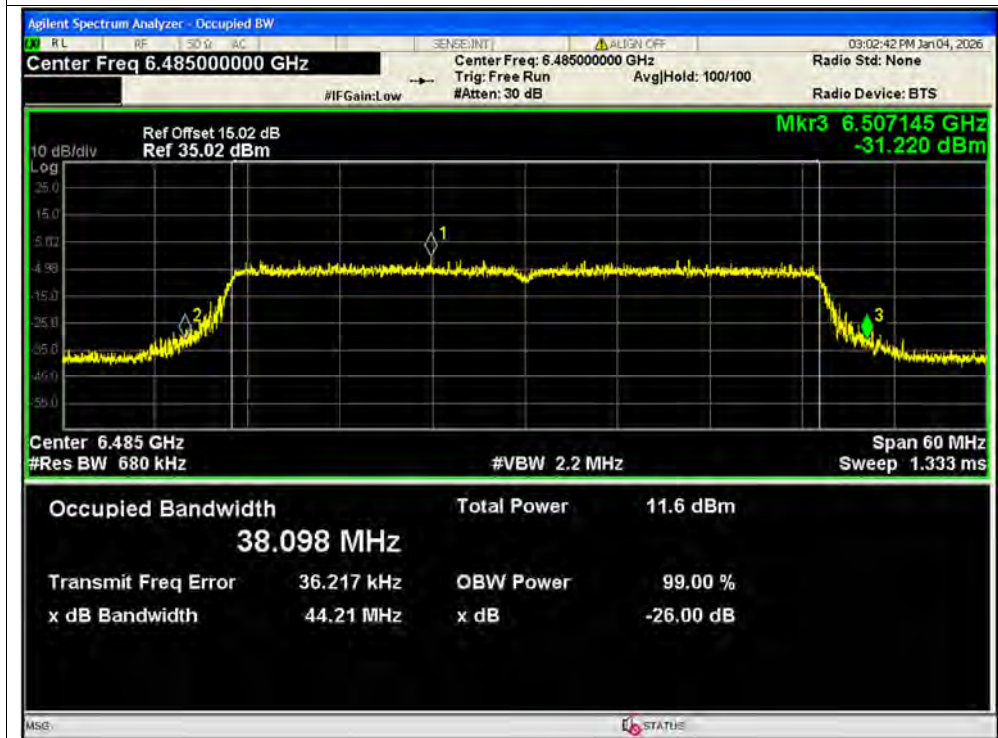


-26dB Bandwidth NVNT ax40 6485MHz Ant2 MIMO



-26dB Bandwidth NVNT ax40 6565MHz Ant1 MIMO



-26dB Bandwidth NVNT ax40 6565MHz Ant2 MIMO

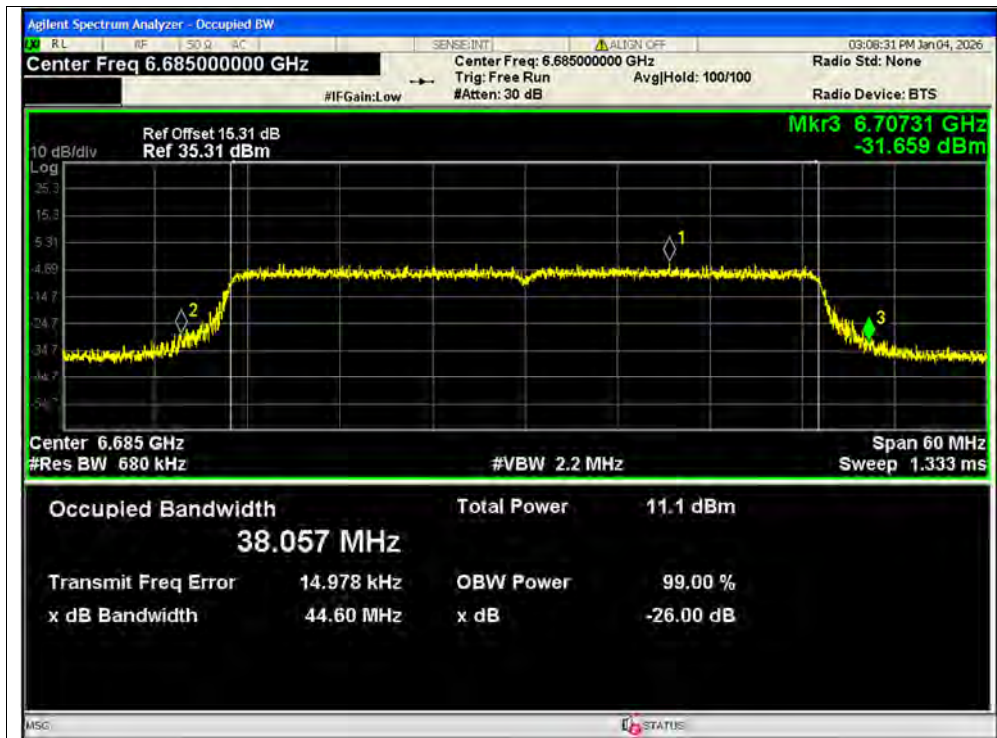


-26dB Bandwidth NVNT ax40 6685MHz Ant1 MIMO




-26dB Bandwidth NVNT ax40 6685MHz Ant2 MIMO




-26dB Bandwidth NVNT ax40 6845MHz Ant1 MIMO

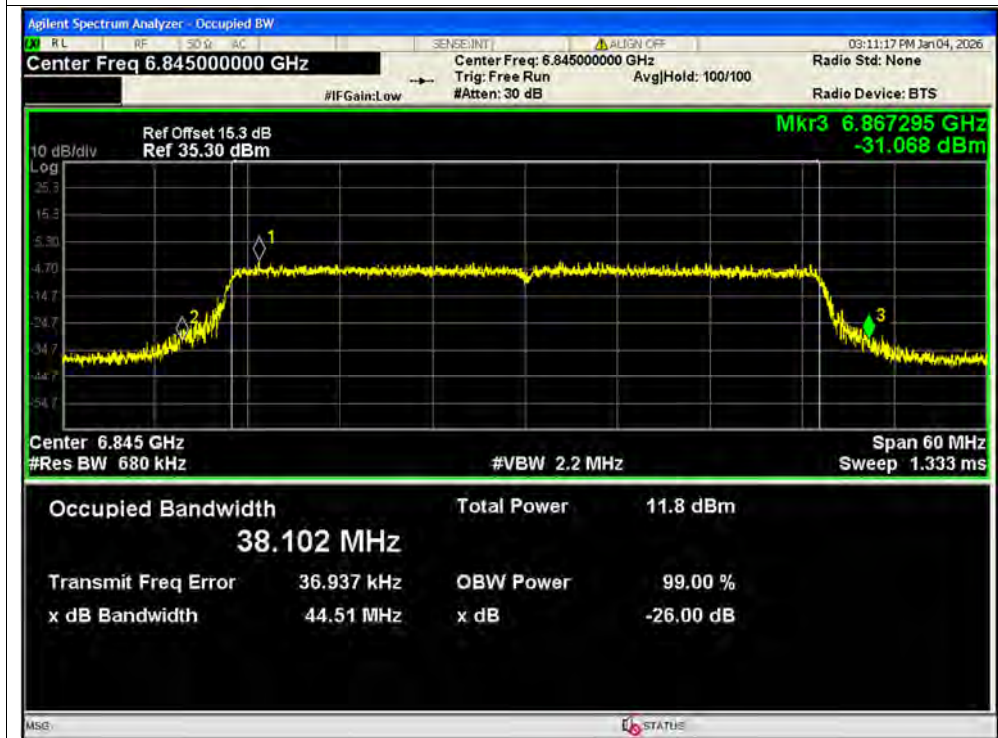


-26dB Bandwidth NVNT ax40 6845MHz Ant2 MIMO

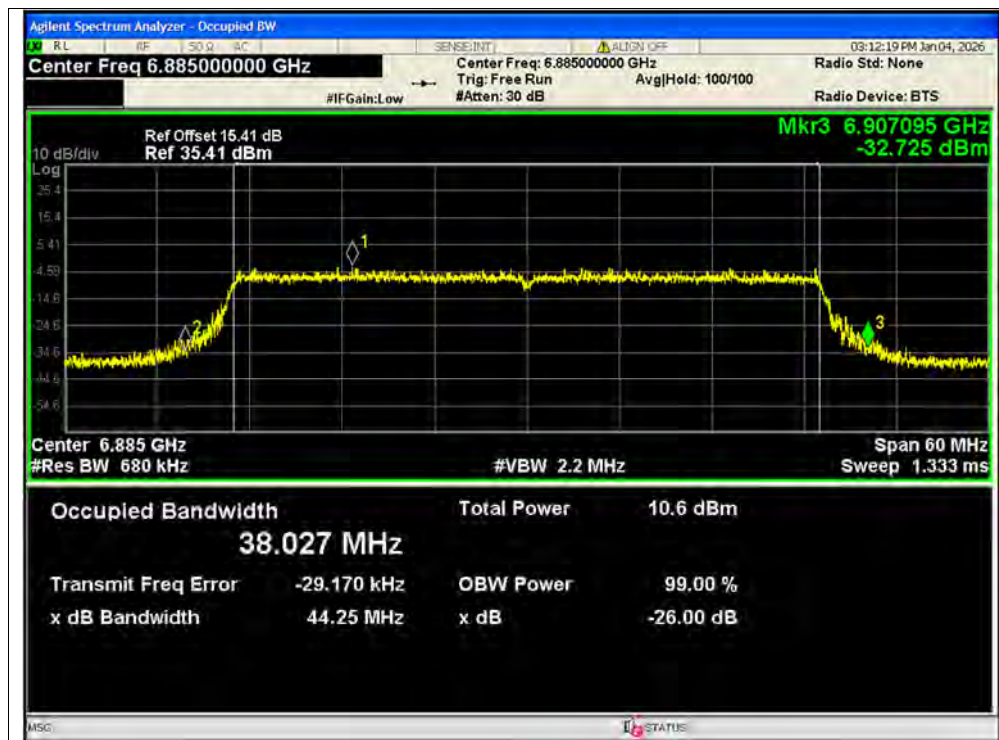

-26dB Bandwidth NVNT ax40 6885MHz Ant1 MIMO

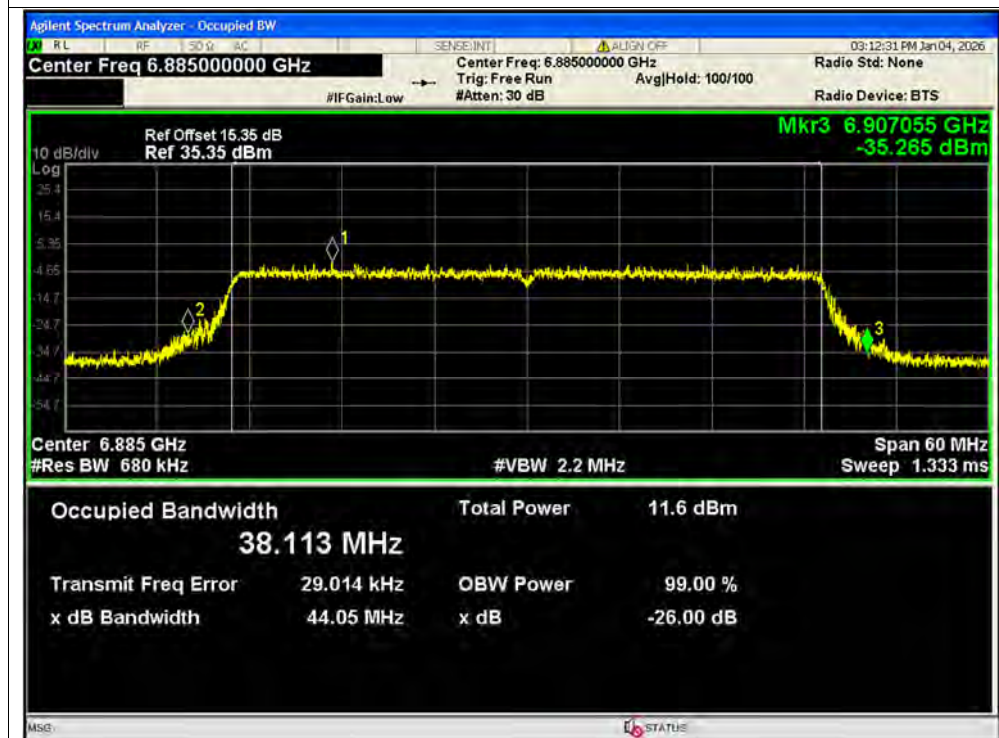


-26dB Bandwidth NVNT ax40 6885MHz Ant2 MIMO

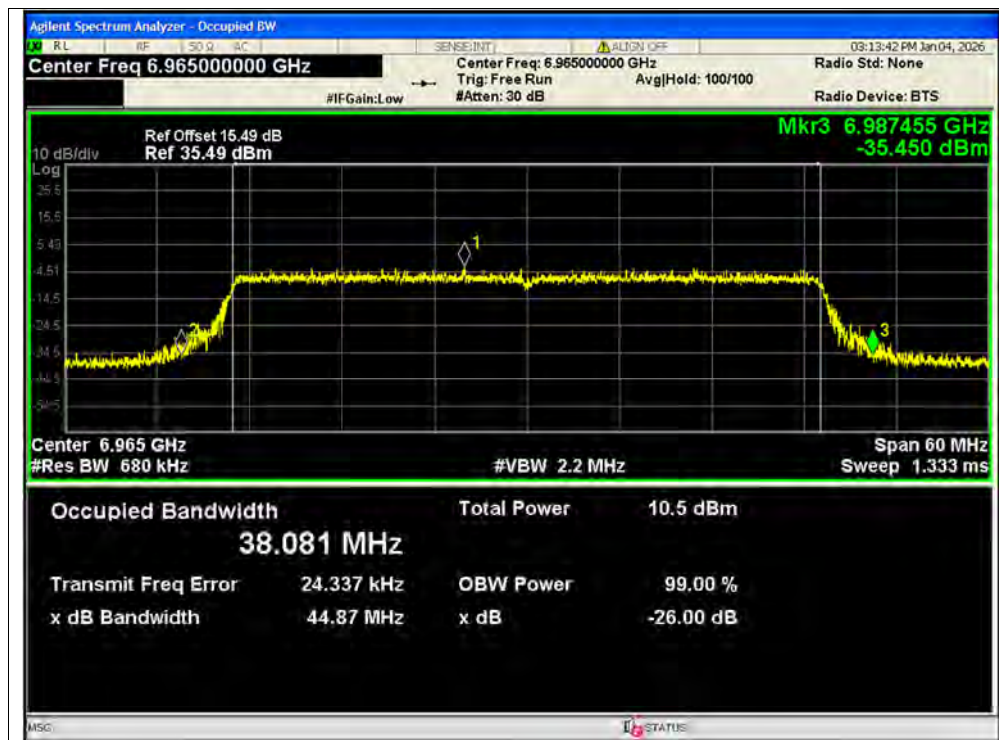


-26dB Bandwidth NVNT ax40 6965MHz Ant1 MIMO




-26dB Bandwidth NVNT ax40 6965MHz Ant2 MIMO

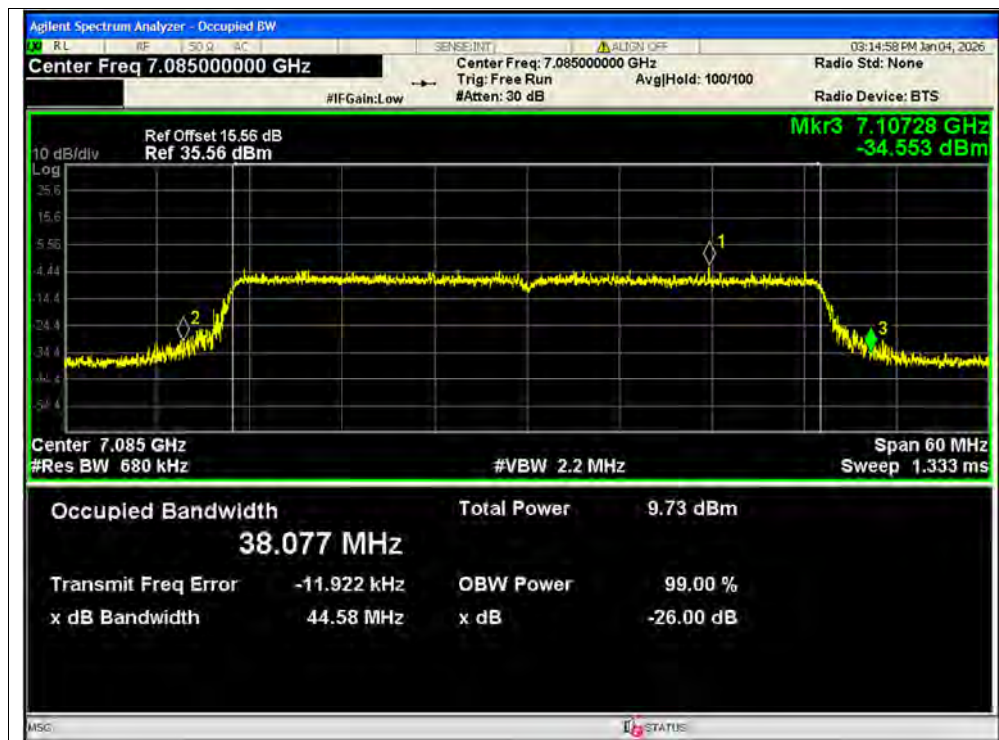


-26dB Bandwidth NVNT ax40 7085MHz Ant1 MIMO

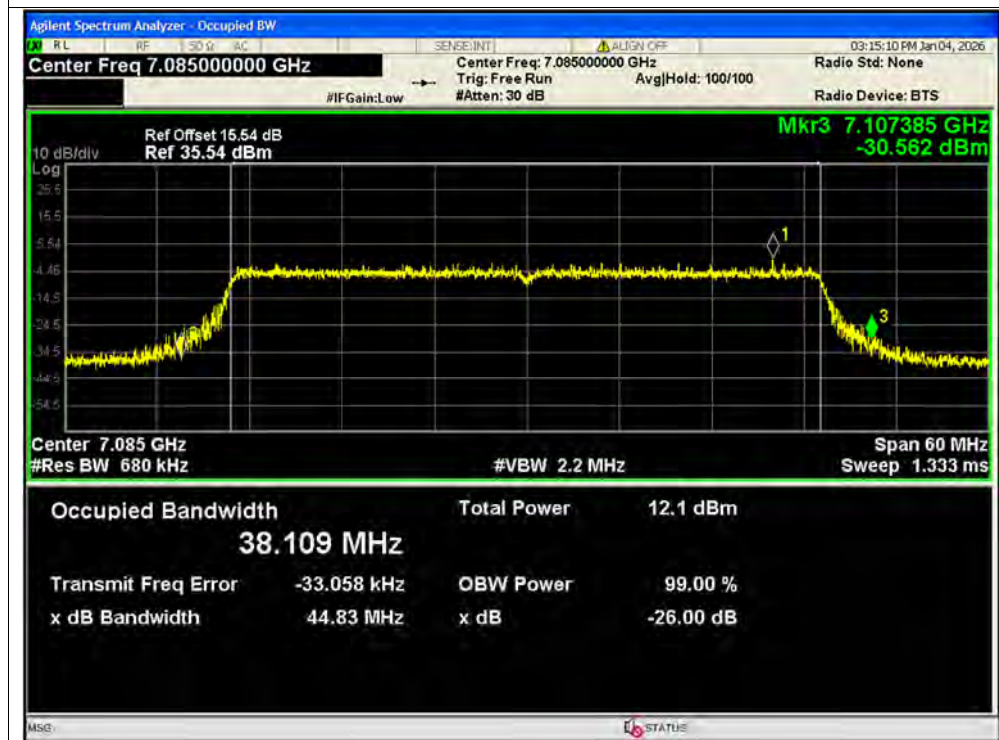


-26dB Bandwidth NVNT ax40 7085MHz Ant2 MIMO

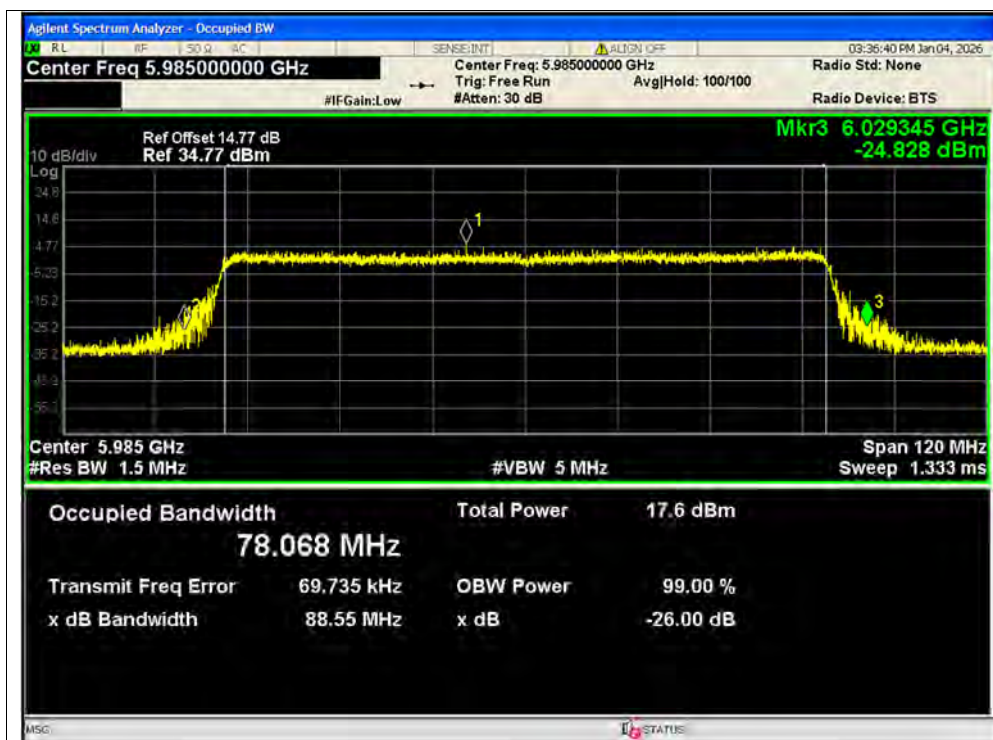


-26dB Bandwidth NVNT ax80 5985MHz Ant1 SISO

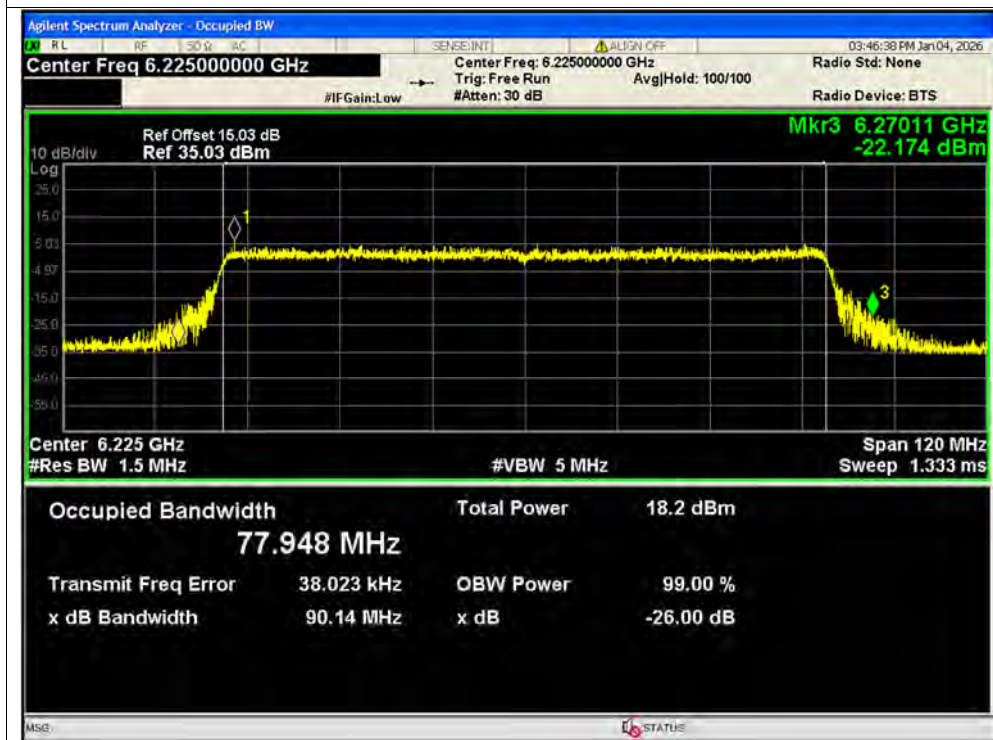


-26dB Bandwidth NVNT ax80 6225MHz Ant1 SISO

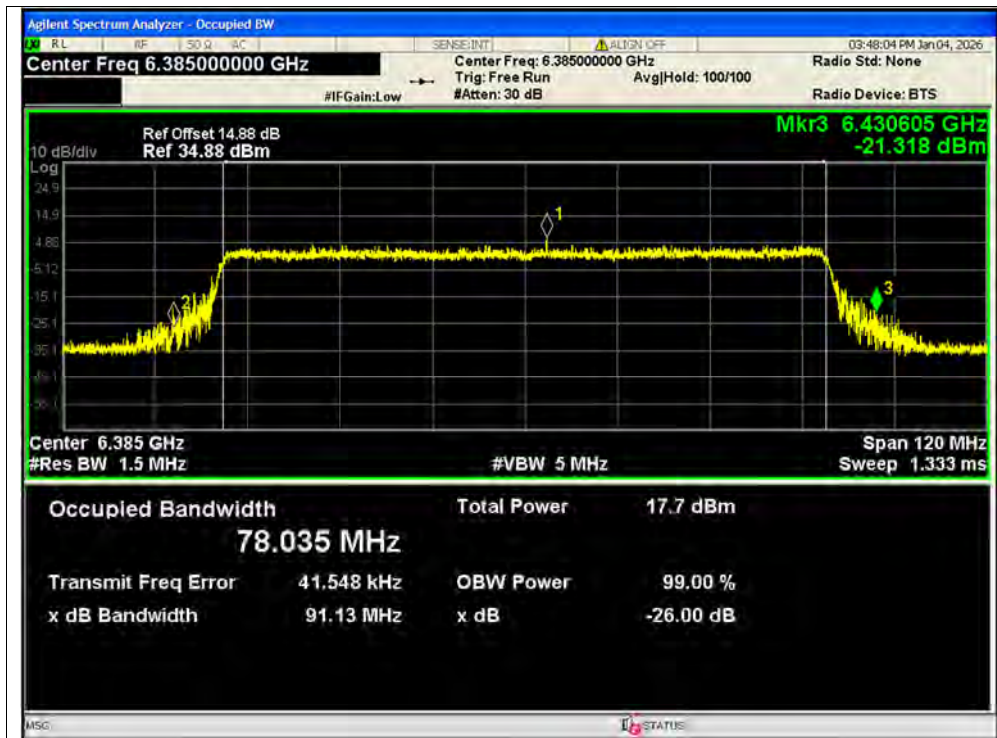


-26dB Bandwidth NVNT ax80 6385MHz Ant1 SISO

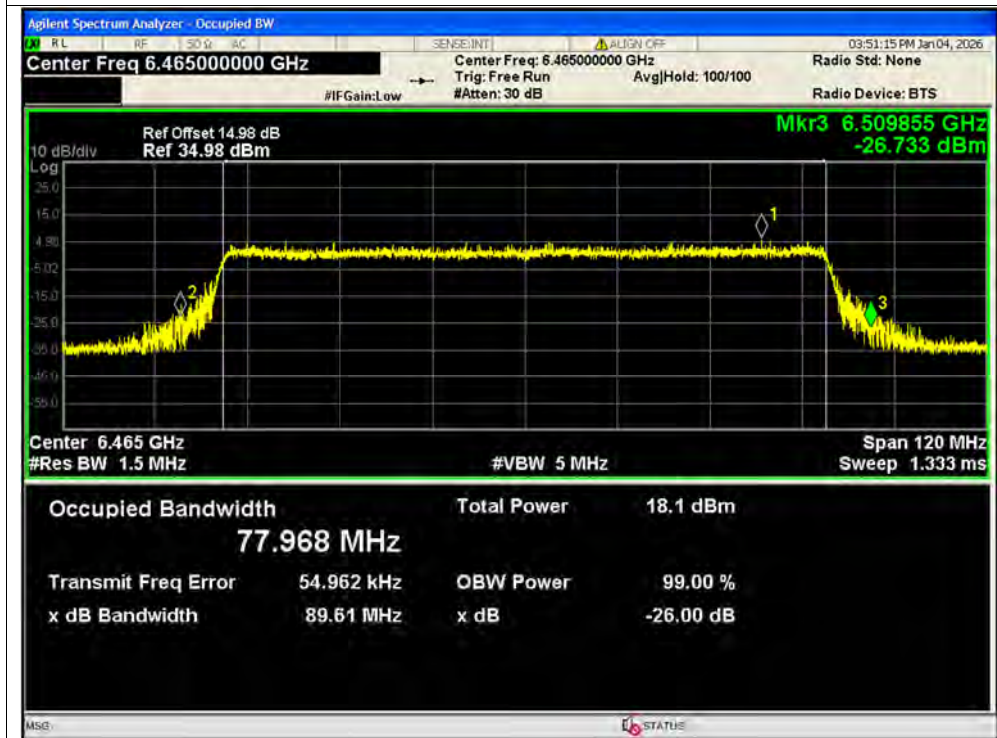


-26dB Bandwidth NVNT ax80 6465MHz Ant1 SISO

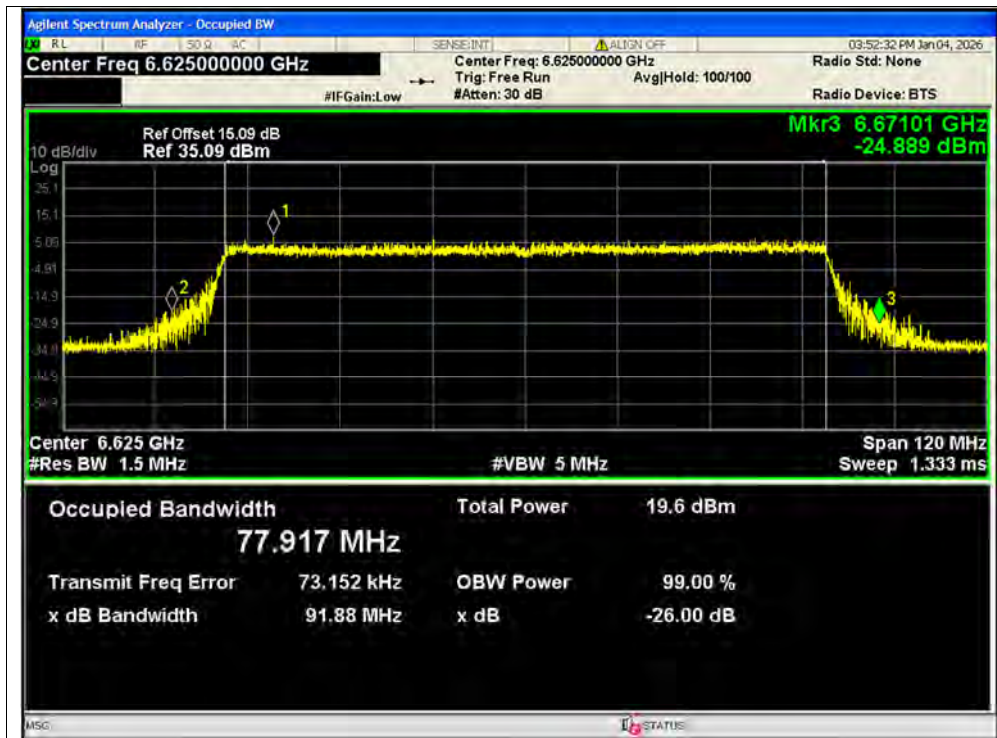


-26dB Bandwidth NVNT ax80 6625MHz Ant1 SISO

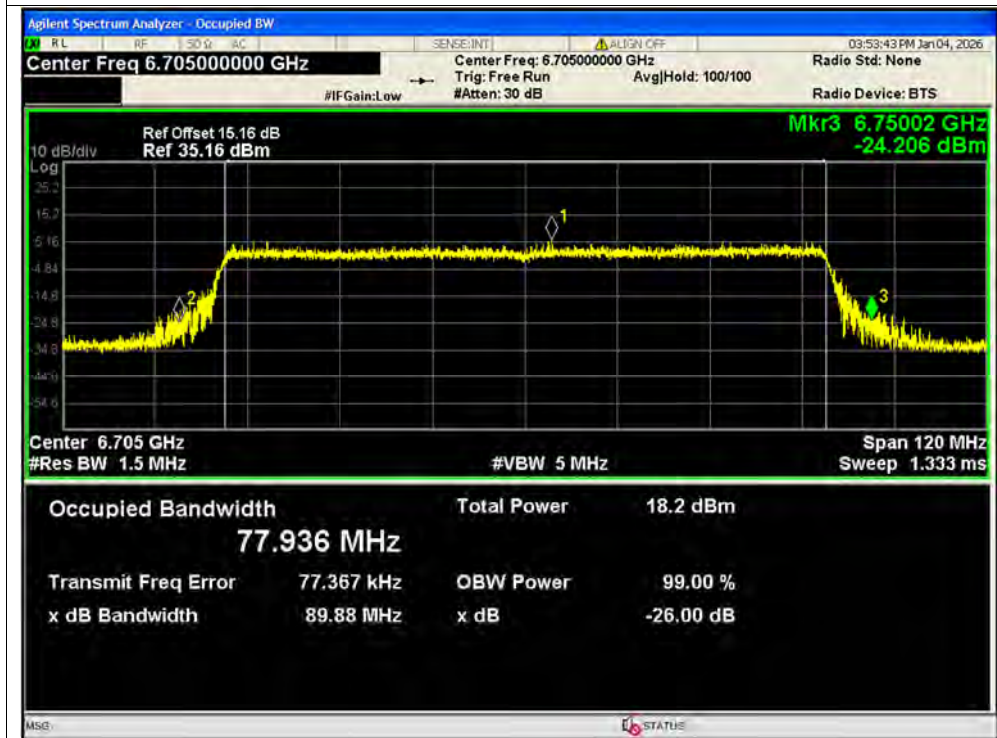

-26dB Bandwidth NVNT ax80 6705MHz Ant1 SISO

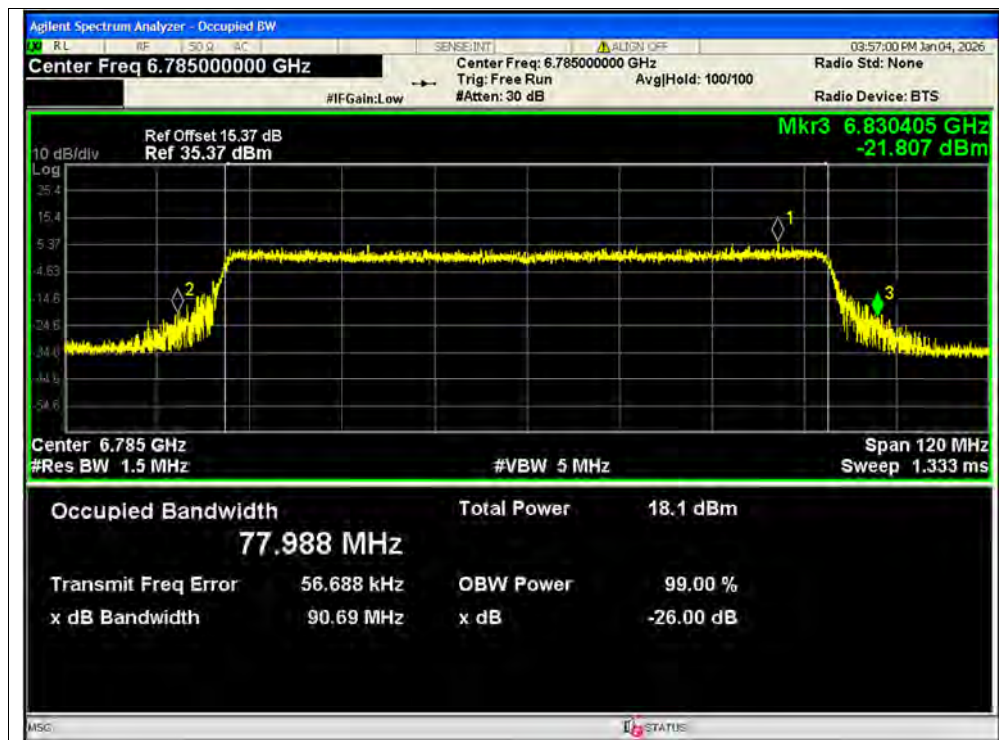

-26dB Bandwidth NVNT ax80 6785MHz Ant1 SISO

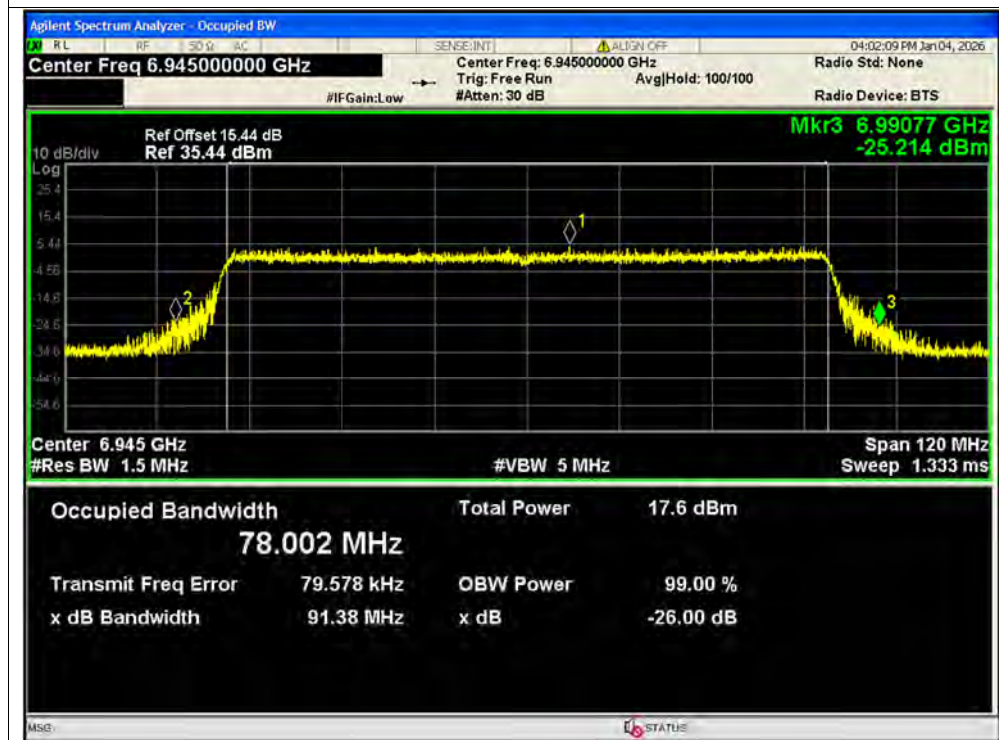


-26dB Bandwidth NVNT ax80 6945MHz Ant1 SISO




-26dB Bandwidth NVNT ax80 7025MHz Ant1 SISO




-26dB Bandwidth NVNT ax80 5985MHz Ant2 SISO

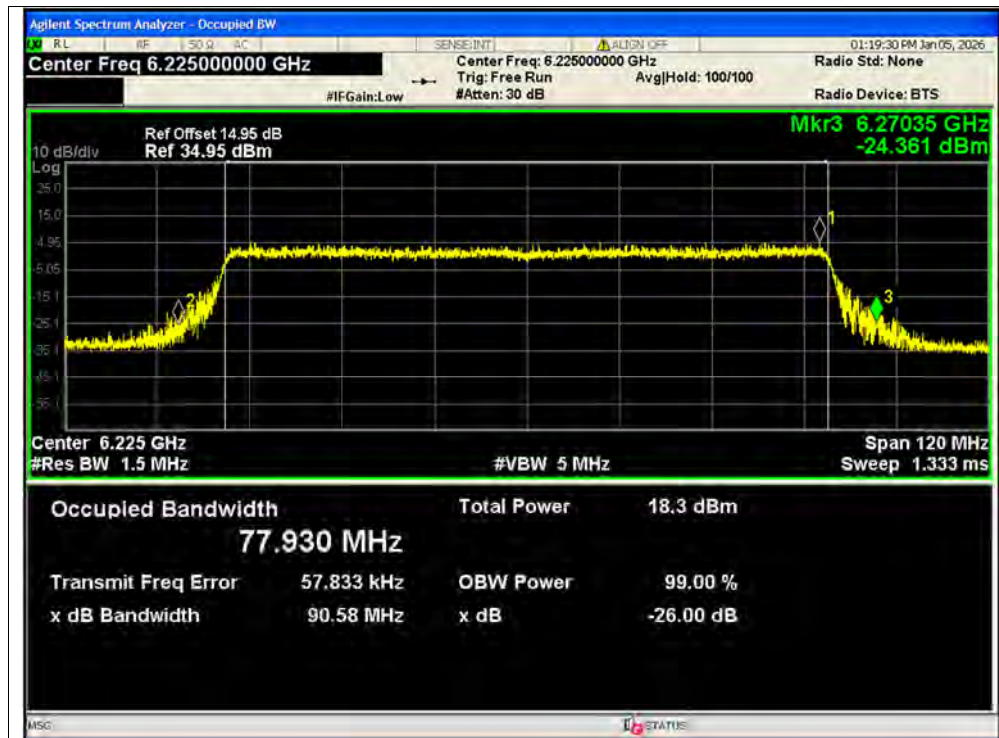


-26dB Bandwidth NVNT ax80 6225MHz Ant2 SISO

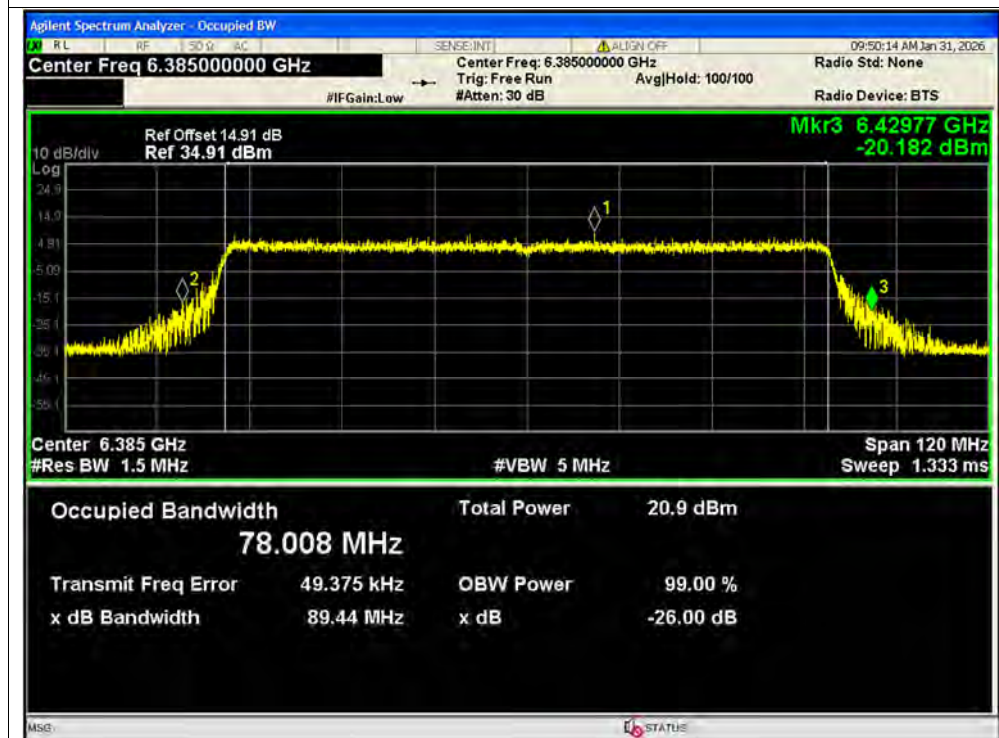


-26dB Bandwidth NVNT ax80 6385MHz Ant2 SISO

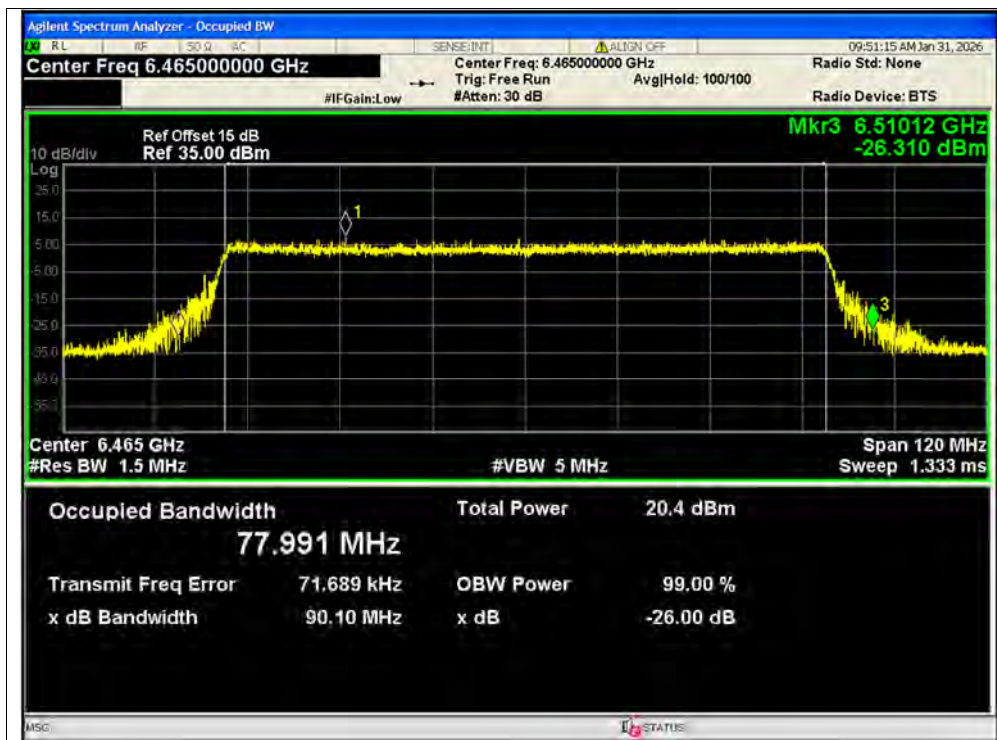


-26dB Bandwidth NVNT ax80 6465MHz Ant2 SISO

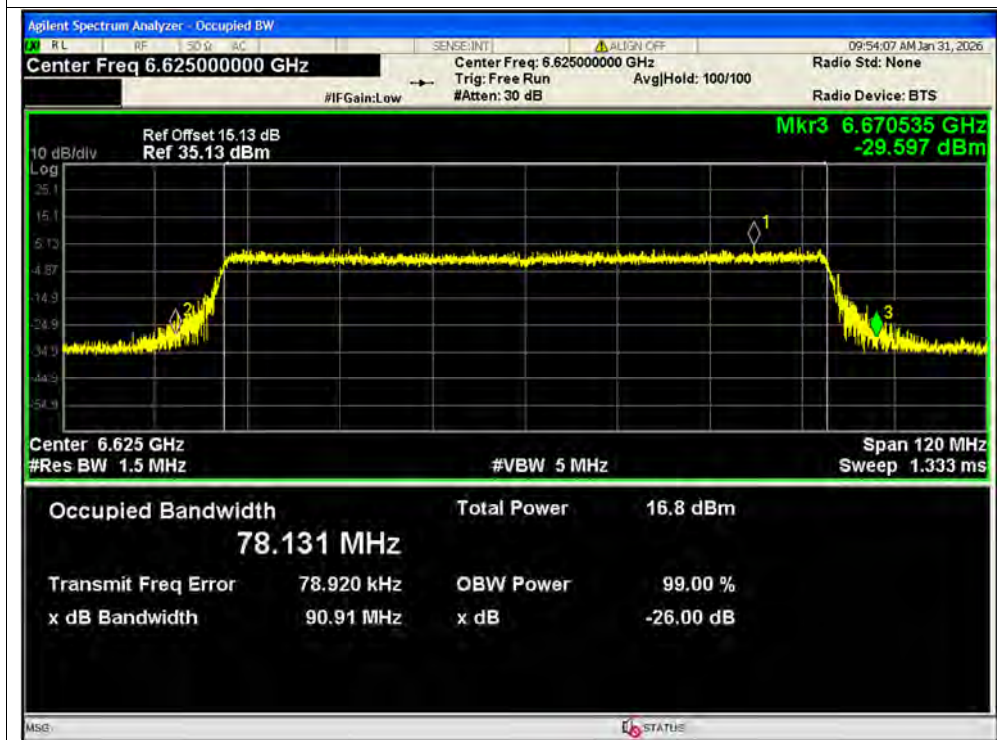


-26dB Bandwidth NVNT ax80 6625MHz Ant2 SISO

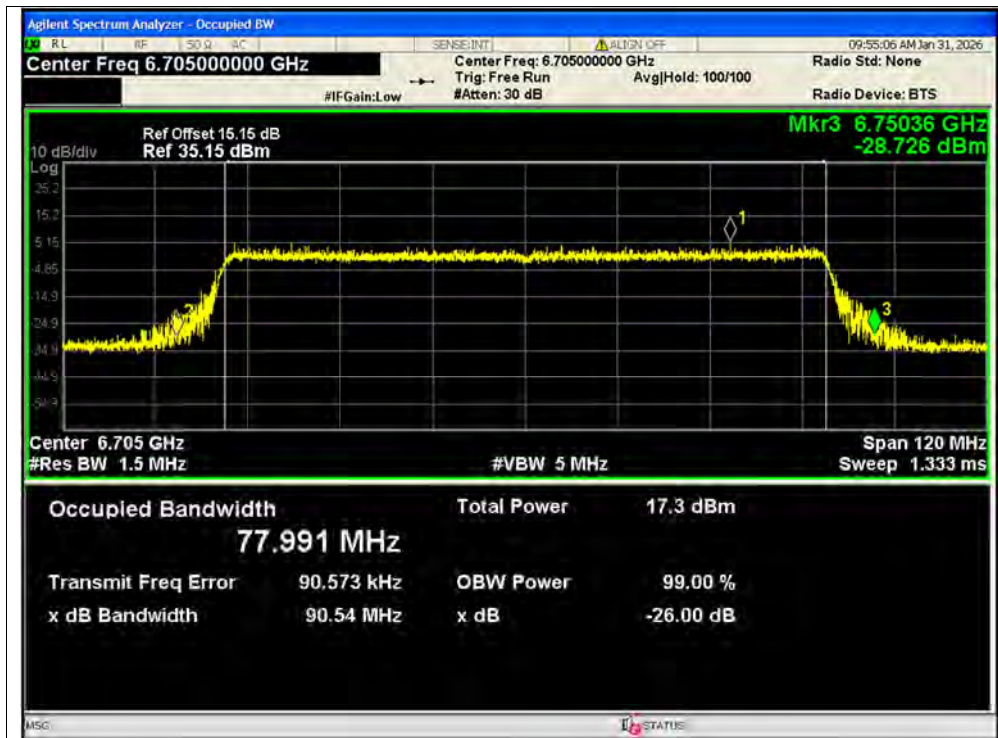


-26dB Bandwidth NVNT ax80 6705MHz Ant2 SISO

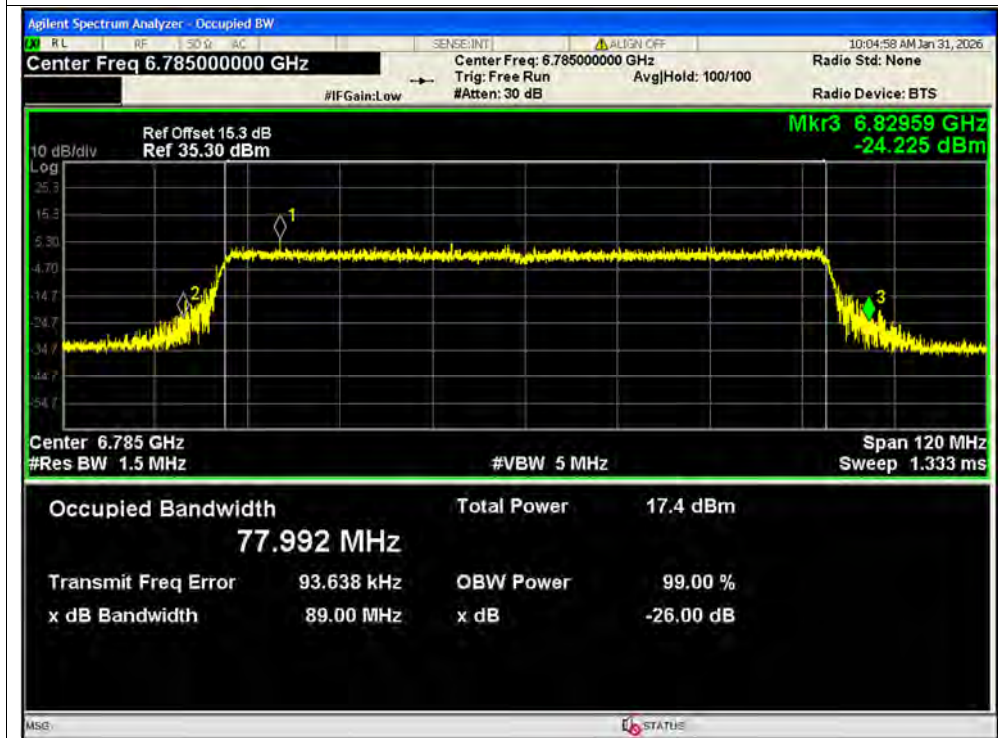


-26dB Bandwidth NVNT ax80 6785MHz Ant2 SISO

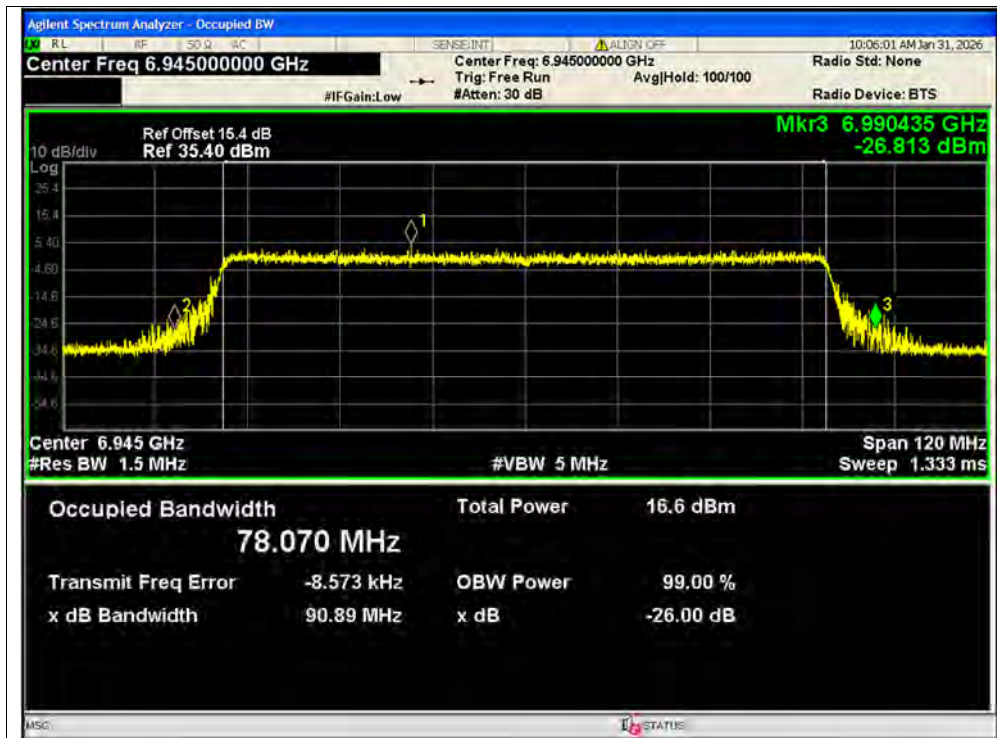


-26dB Bandwidth NVNT ax80 6945MHz Ant2 SISO

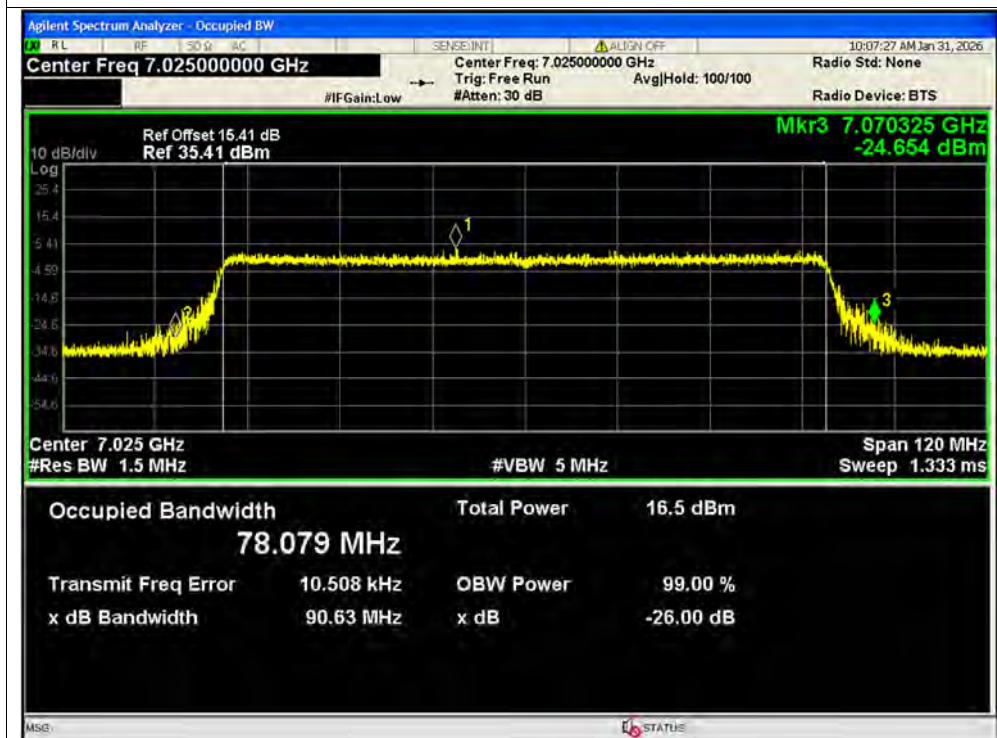


-26dB Bandwidth NVNT ax80 7025MHz Ant2 SISO

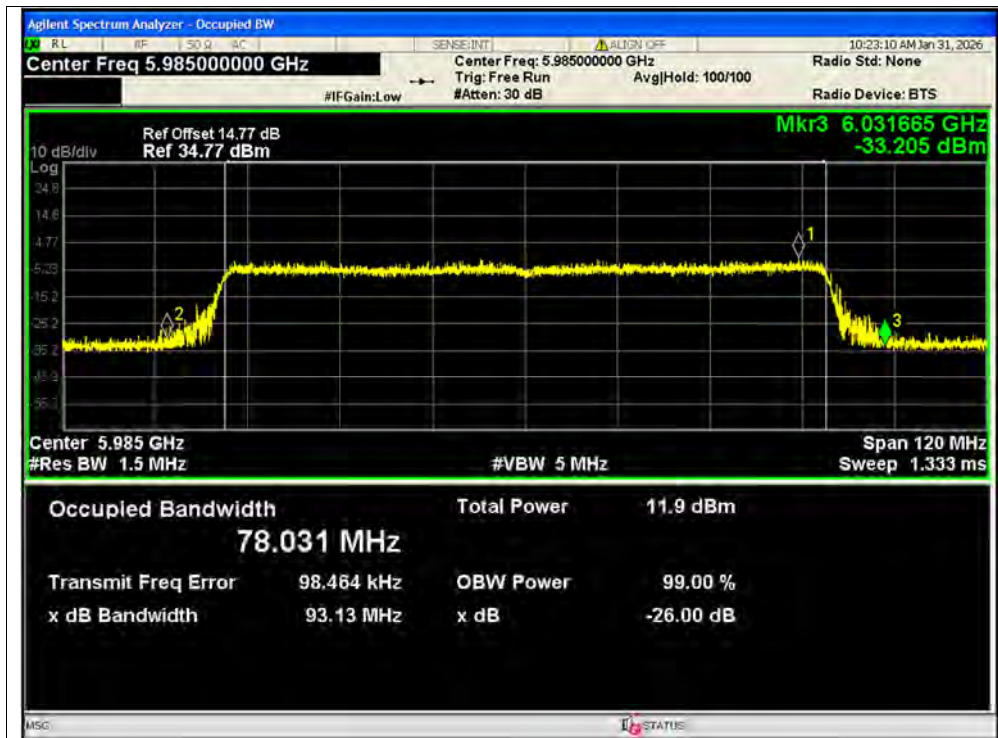


-26dB Bandwidth NVNT ax80 5985MHz Ant1 MIMO

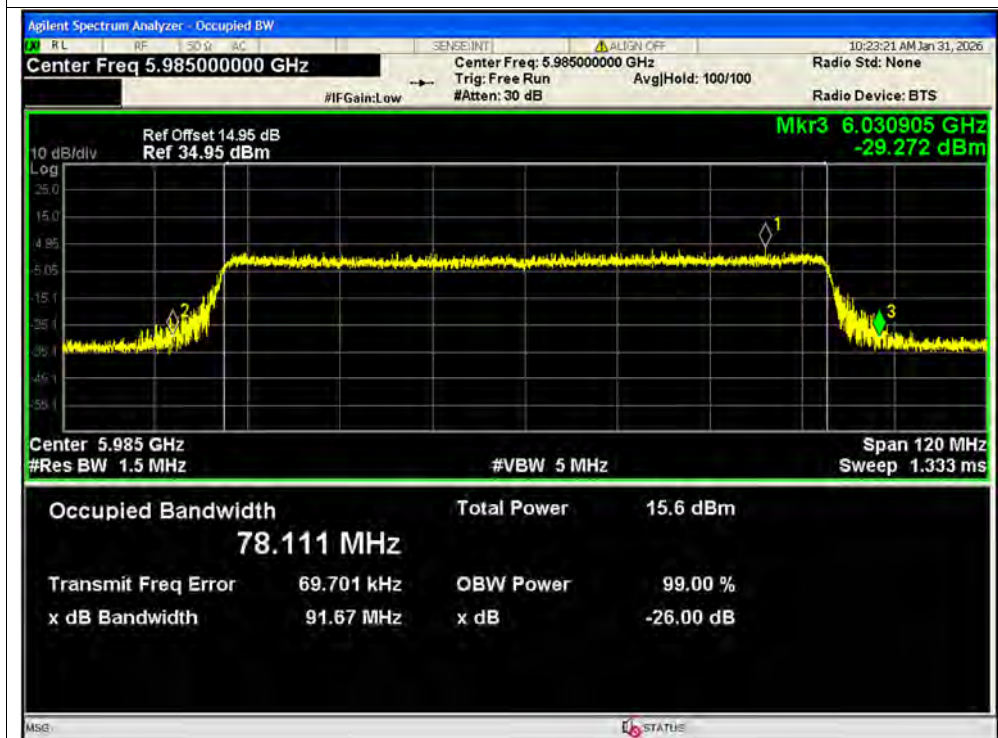


-26dB Bandwidth NVNT ax80 5985MHz Ant2 MIMO

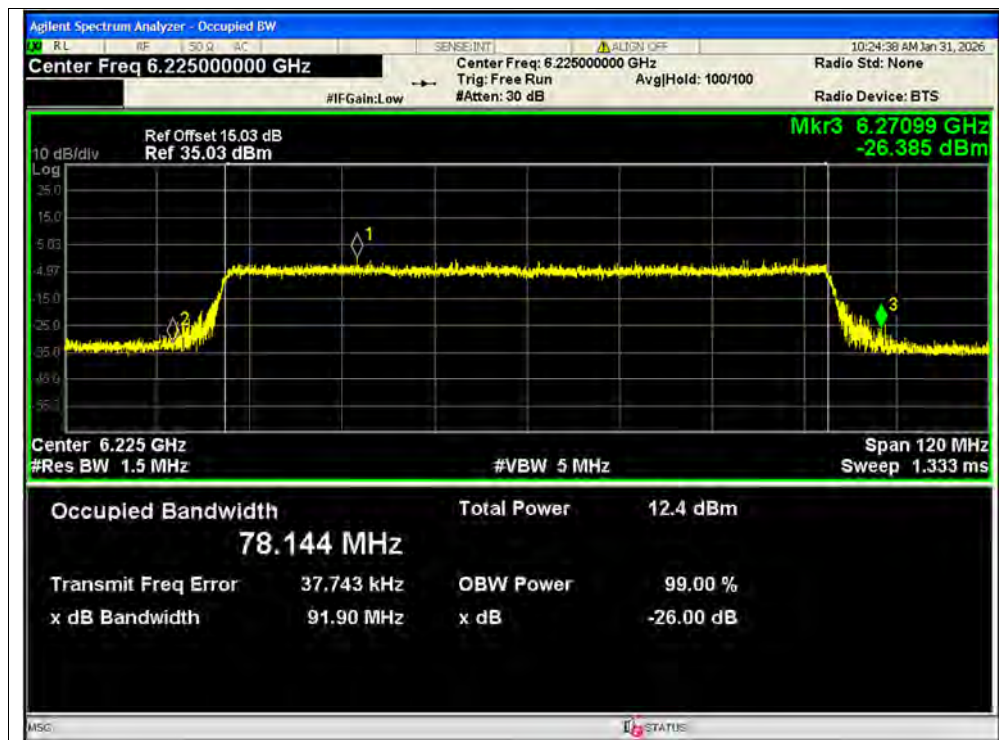


-26dB Bandwidth NVNT ax80 6225MHz Ant1 MIMO

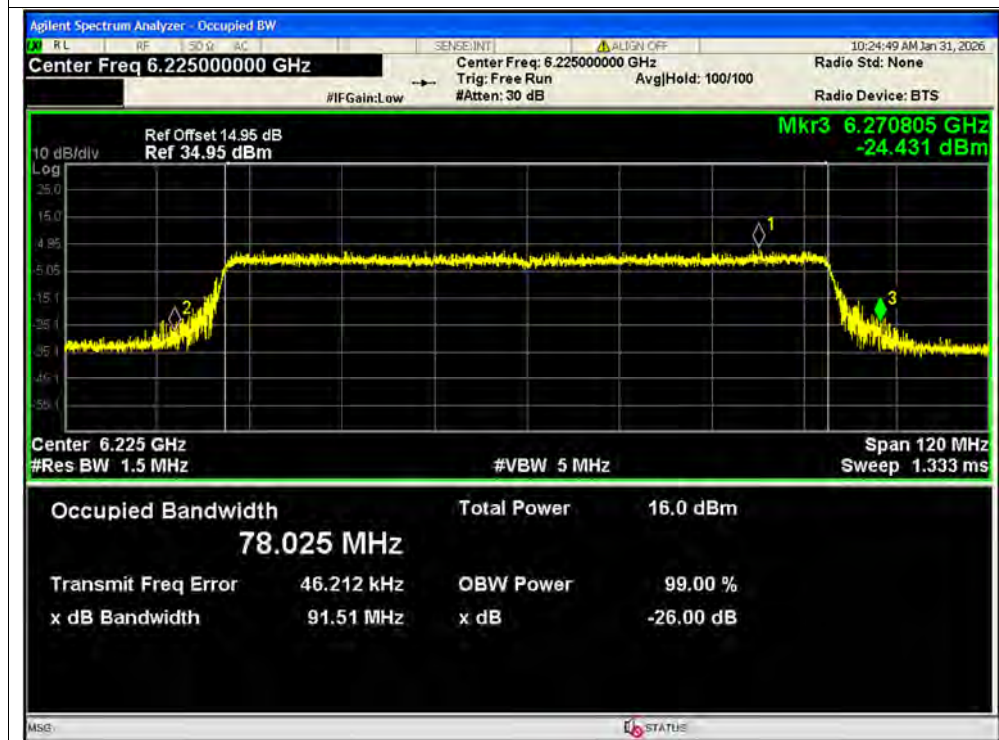


-26dB Bandwidth NVNT ax80 6225MHz Ant2 MIMO

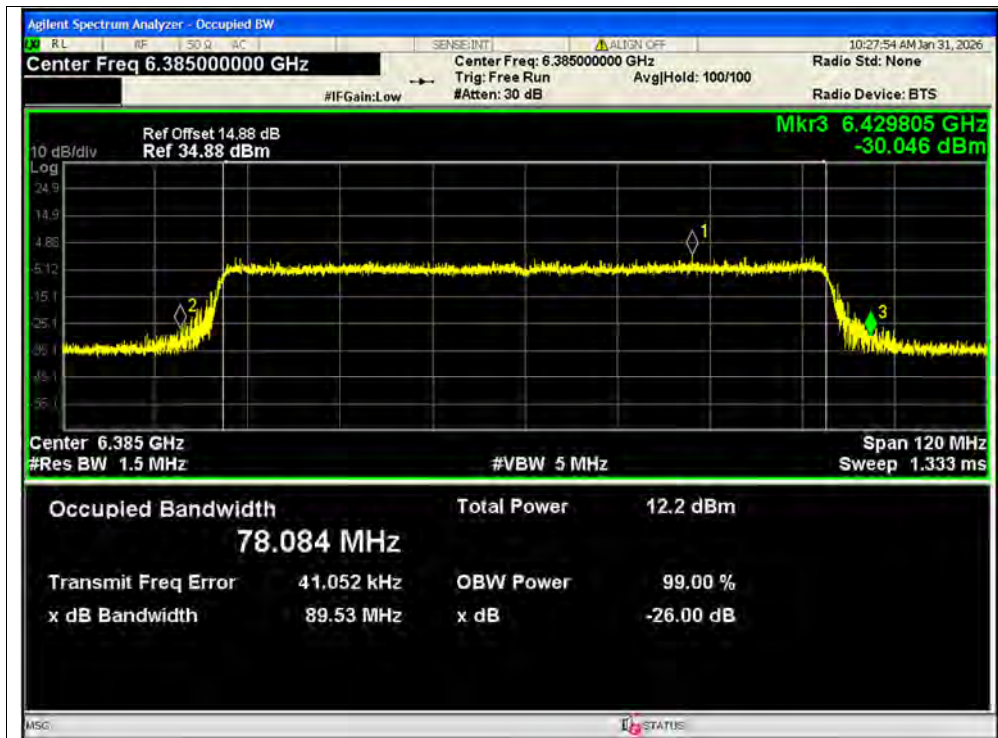


-26dB Bandwidth NVNT ax80 6385MHz Ant1 MIMO

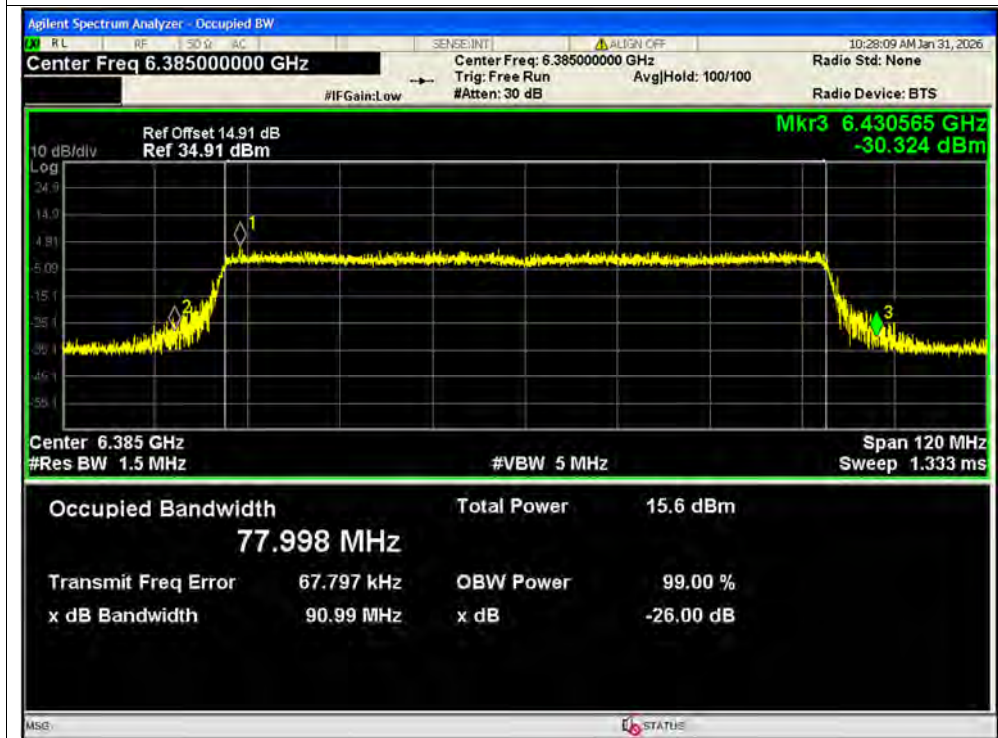


-26dB Bandwidth NVNT ax80 6385MHz Ant2 MIMO

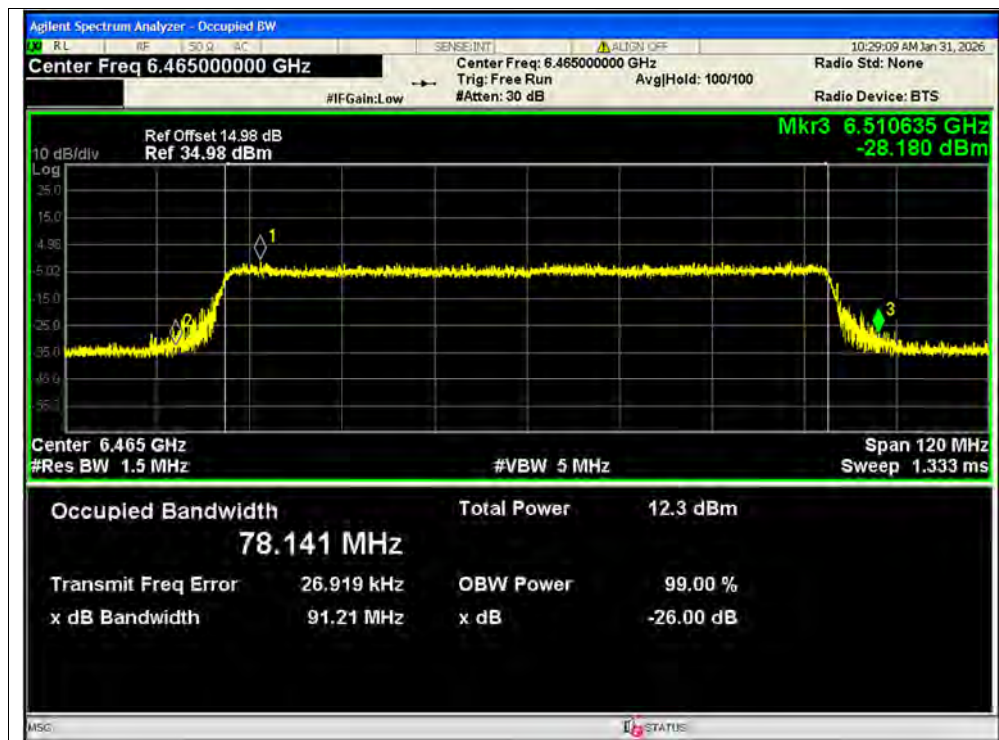

-26dB Bandwidth NVNT ax80 6465MHz Ant1 MIMO

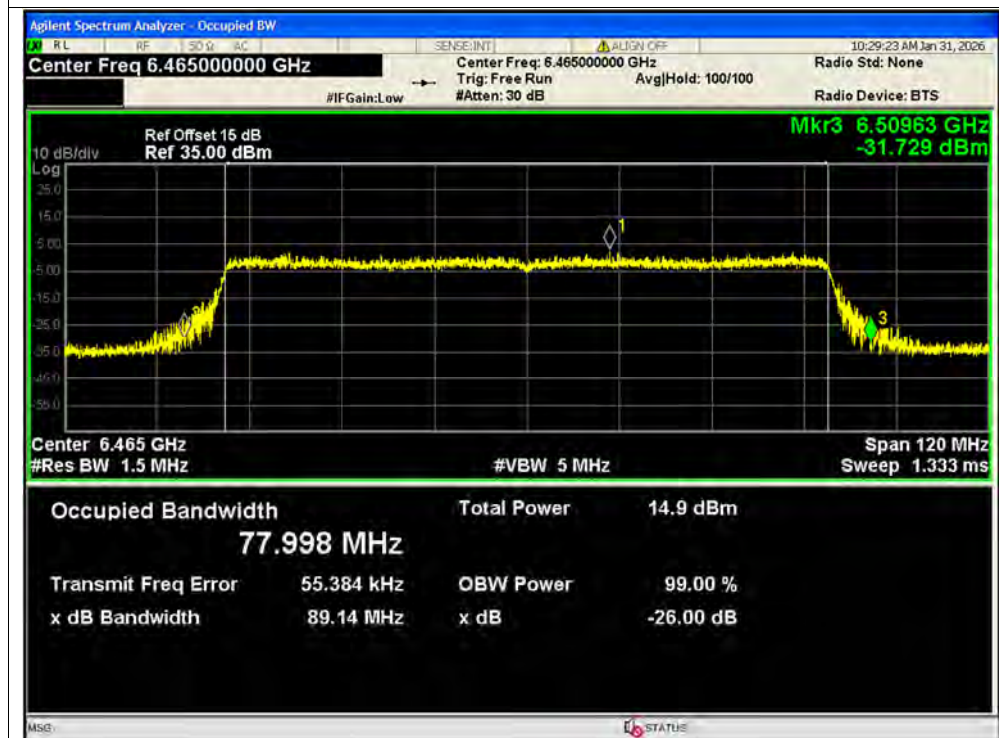


-26dB Bandwidth NVNT ax80 6465MHz Ant2 MIMO

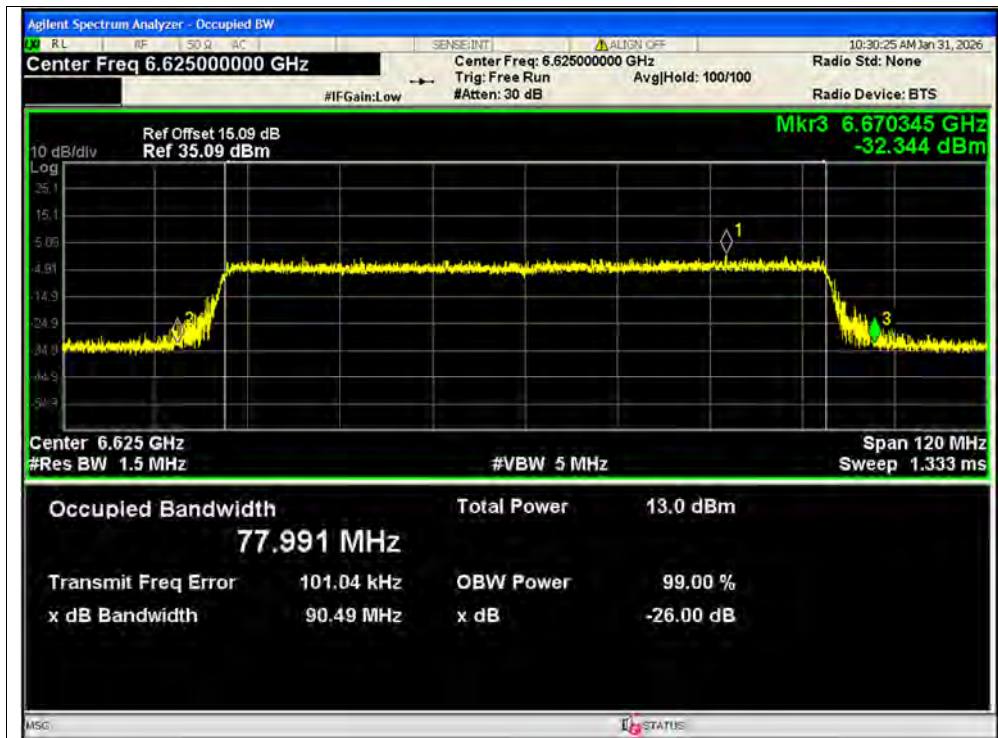


-26dB Bandwidth NVNT ax80 6625MHz Ant1 MIMO




-26dB Bandwidth NVNT ax80 6625MHz Ant2 MIMO

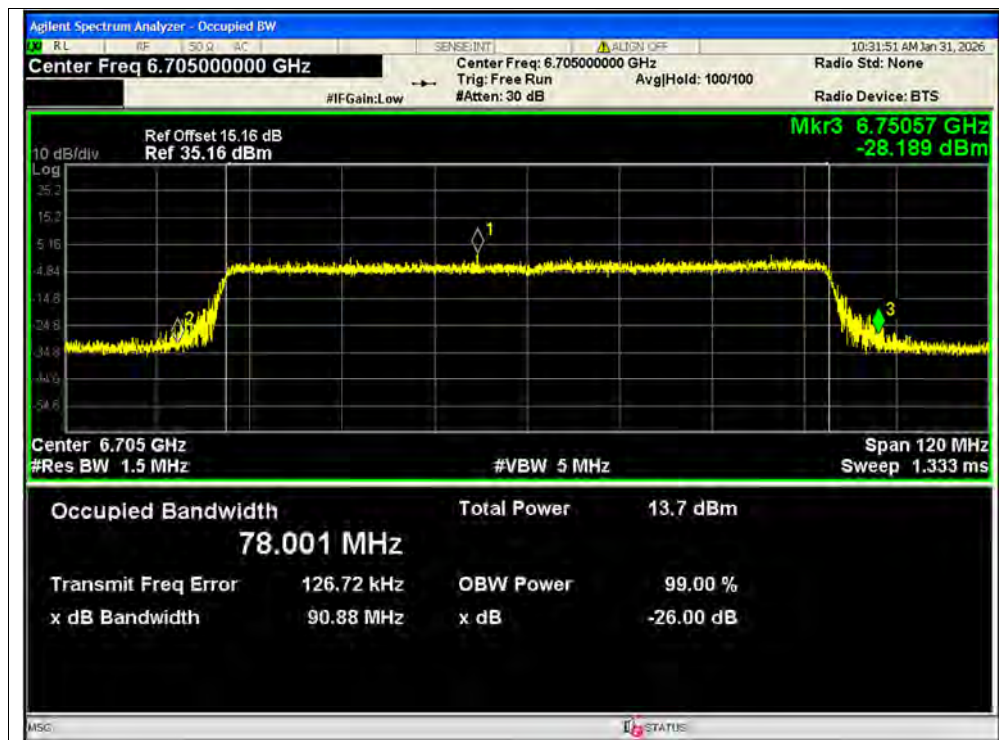


-26dB Bandwidth NVNT ax80 6705MHz Ant1 MIMO

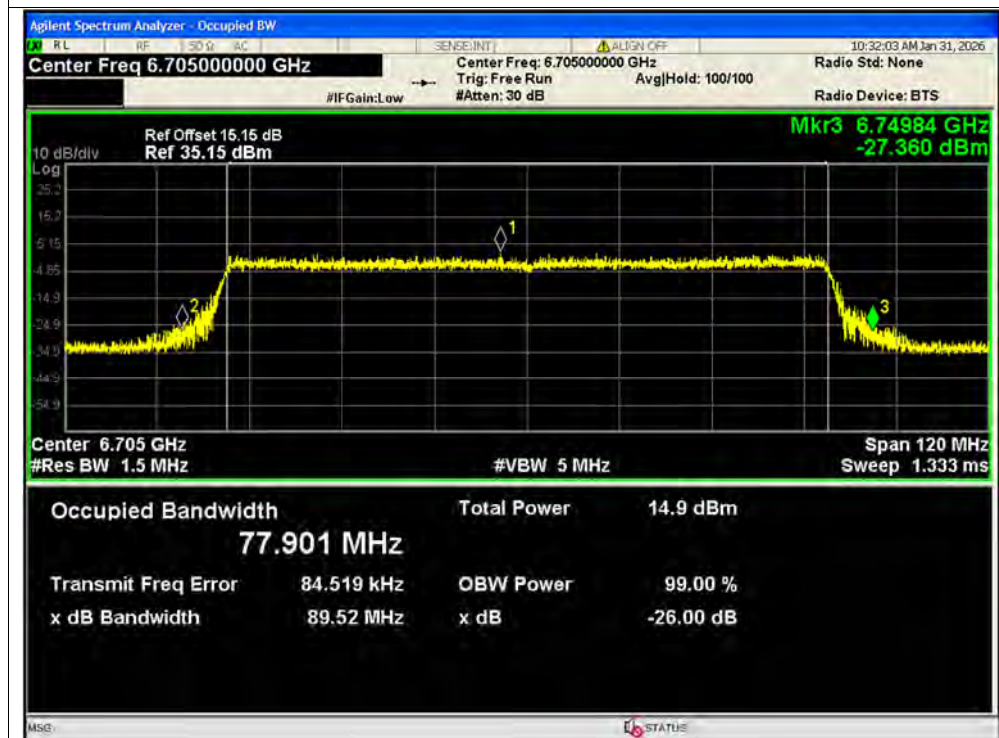


-26dB Bandwidth NVNT ax80 6705MHz Ant2 MIMO

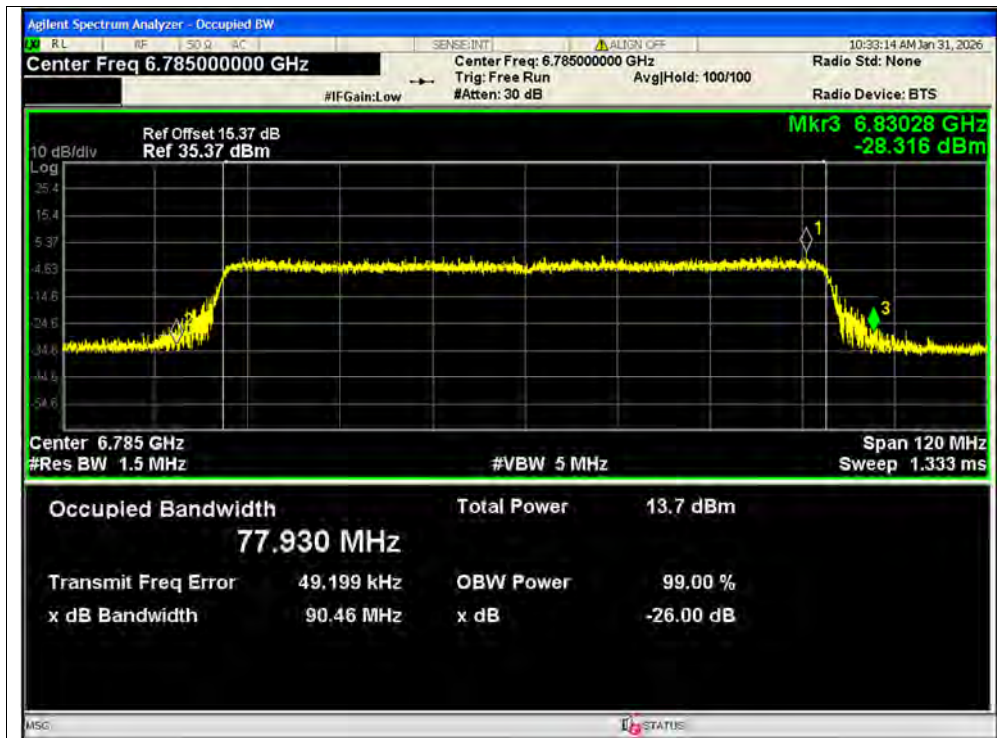


-26dB Bandwidth NVNT ax80 6785MHz Ant1 MIMO

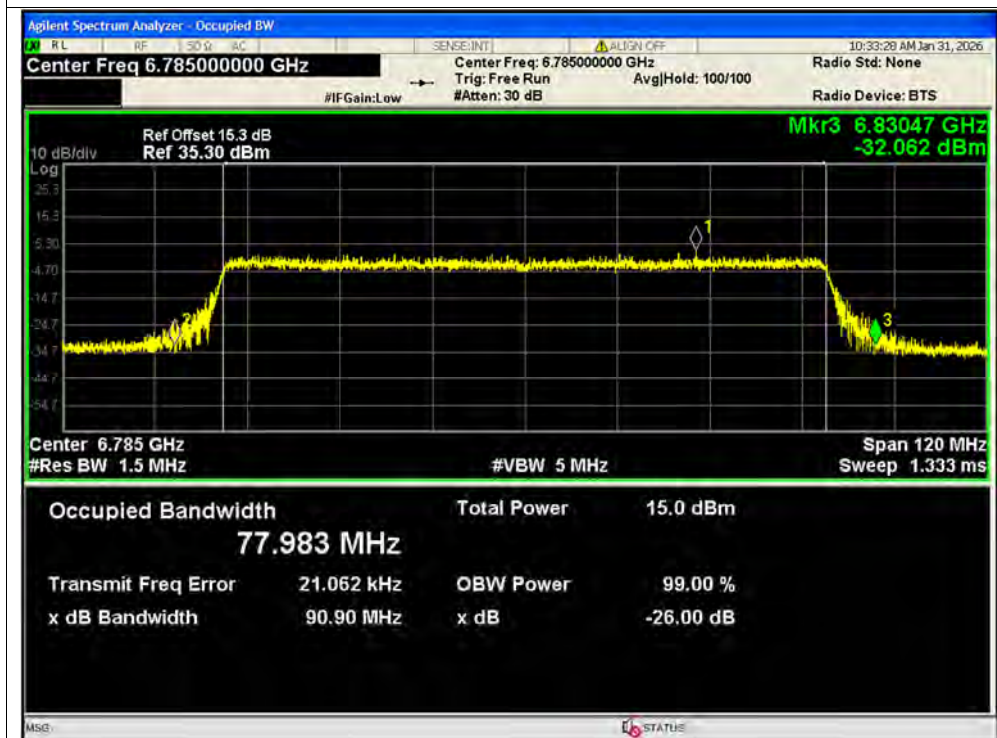


-26dB Bandwidth NVNT ax80 6785MHz Ant2 MIMO

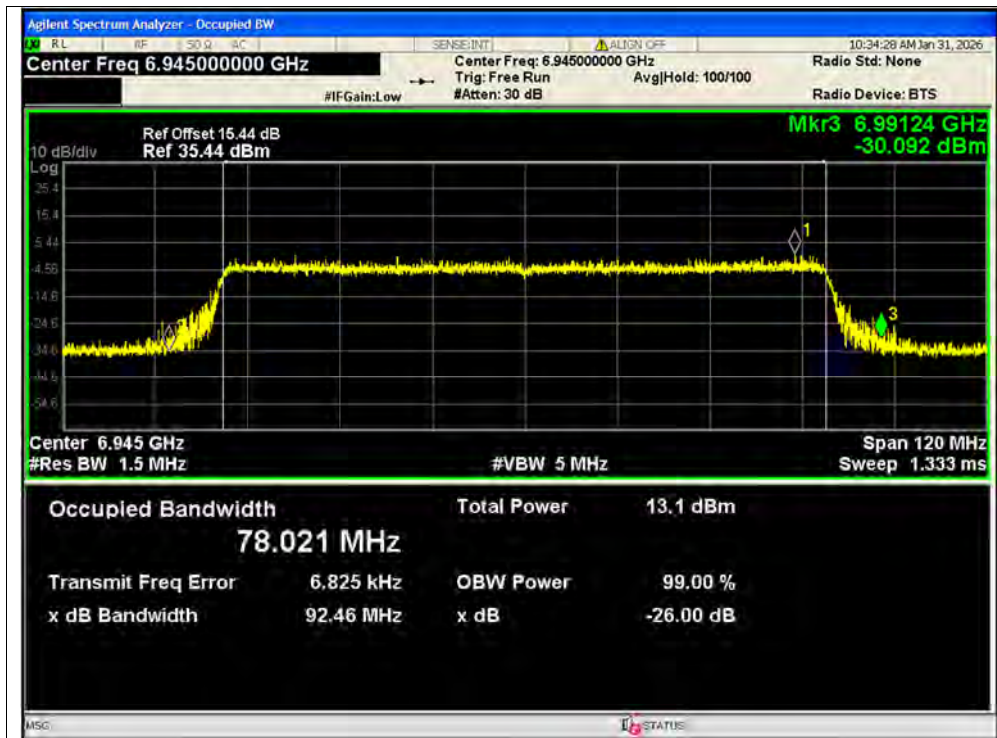


-26dB Bandwidth NVNT ax80 6945MHz Ant1 MIMO

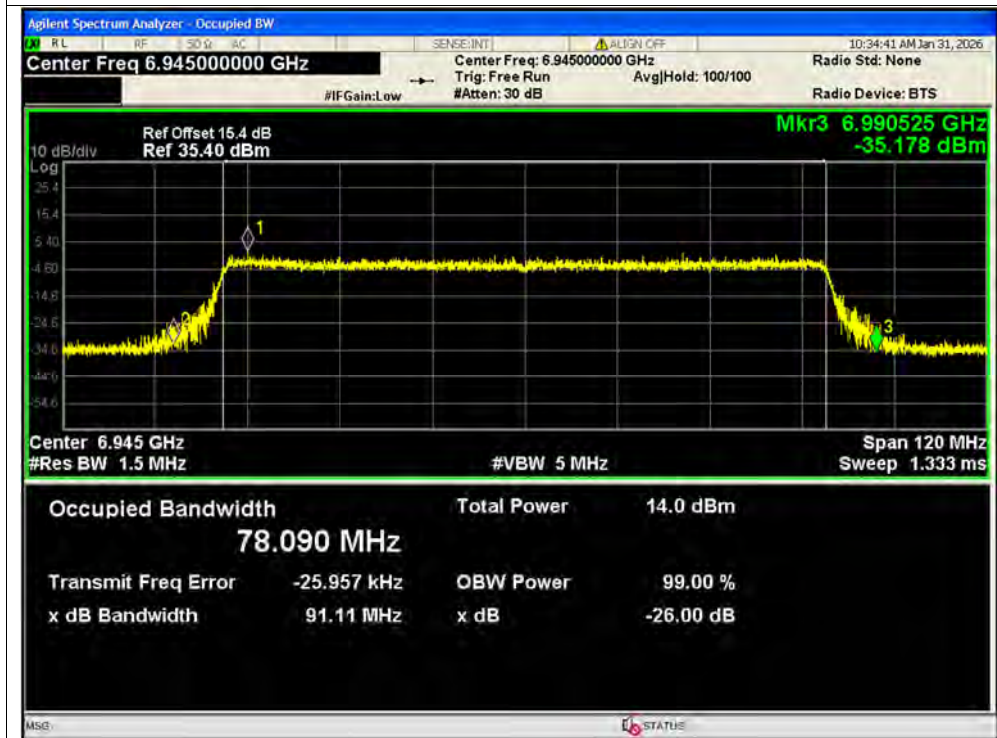


-26dB Bandwidth NVNT ax80 6945MHz Ant2 MIMO

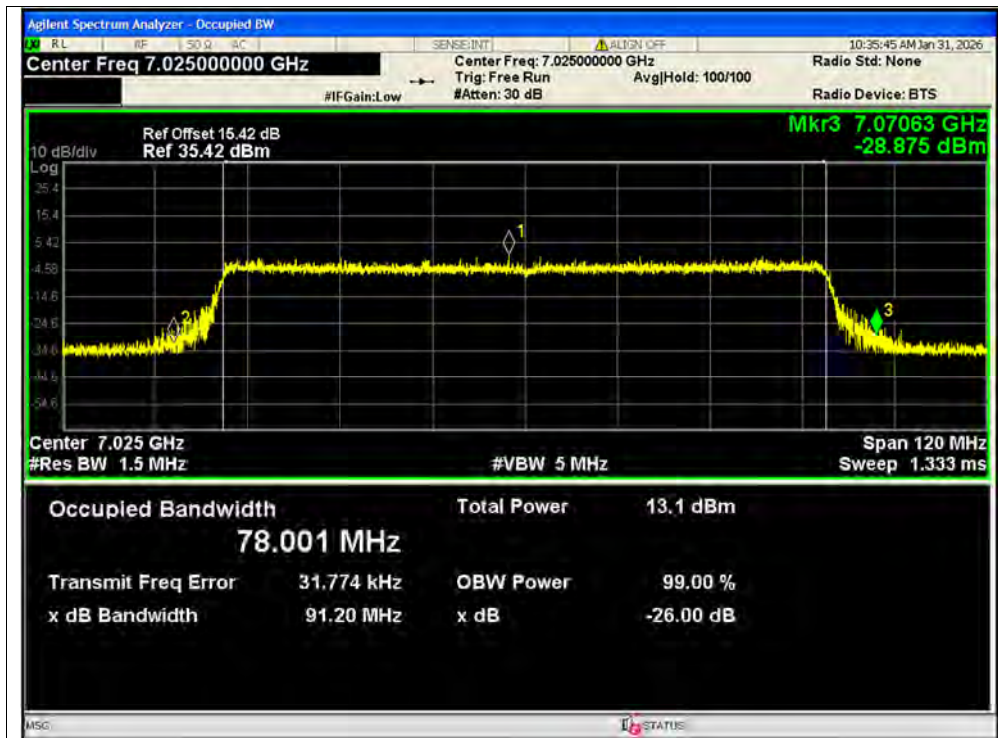


-26dB Bandwidth NVNT ax80 7025MHz Ant1 MIMO

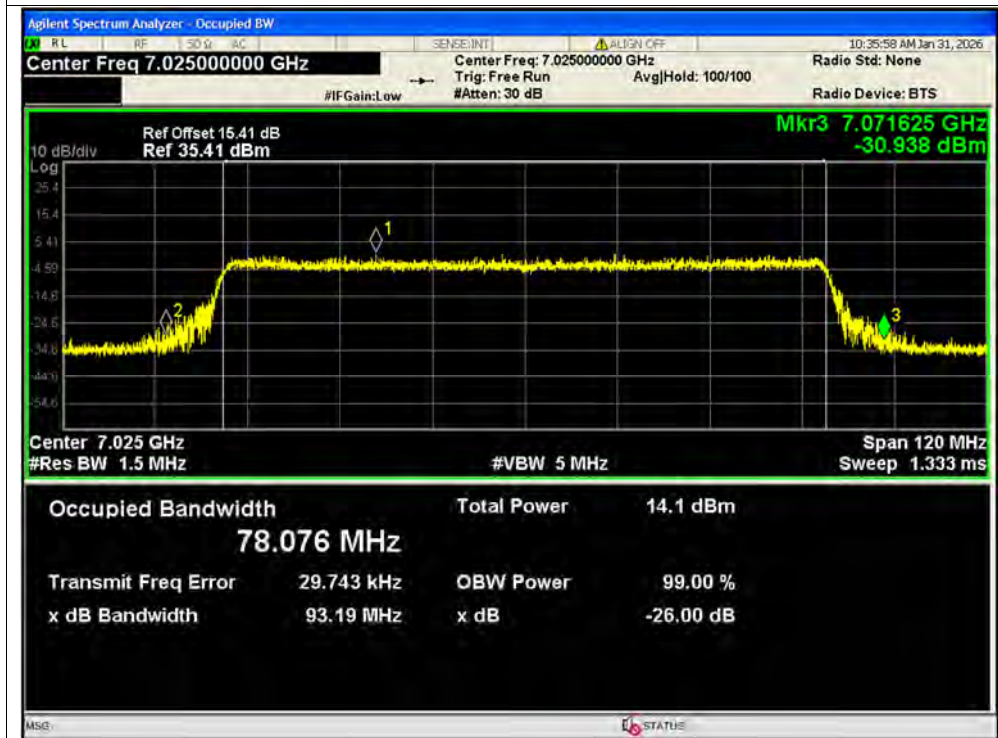


-26dB Bandwidth NVNT ax80 7025MHz Ant2 MIMO

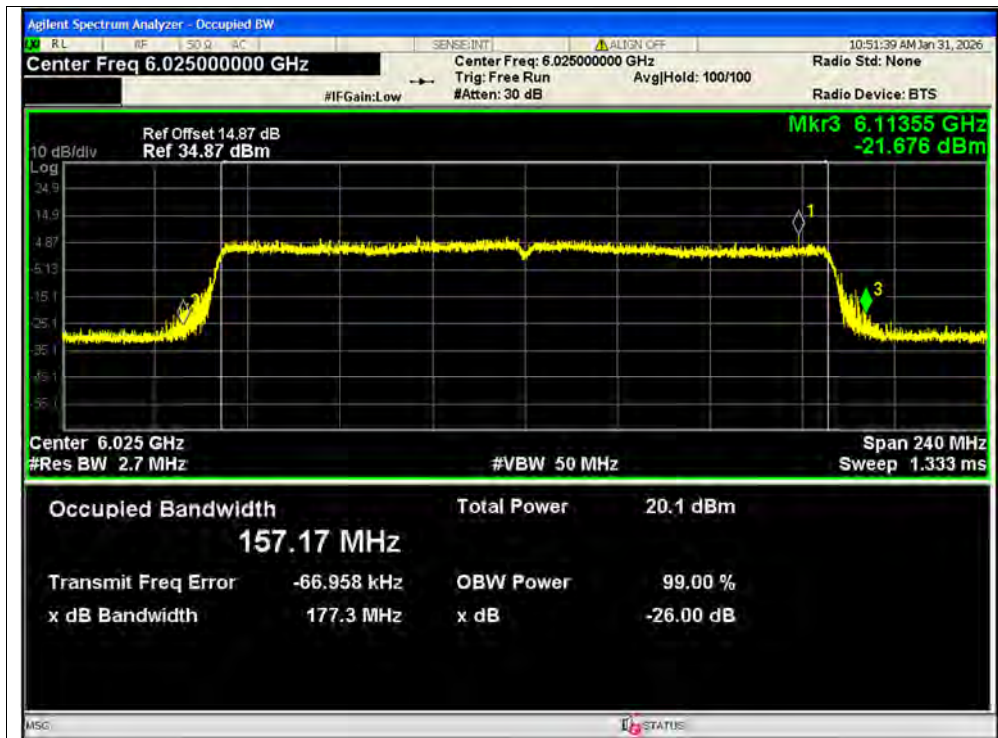


-26dB Bandwidth NVNT ax160 6025MHz Ant1 SISO

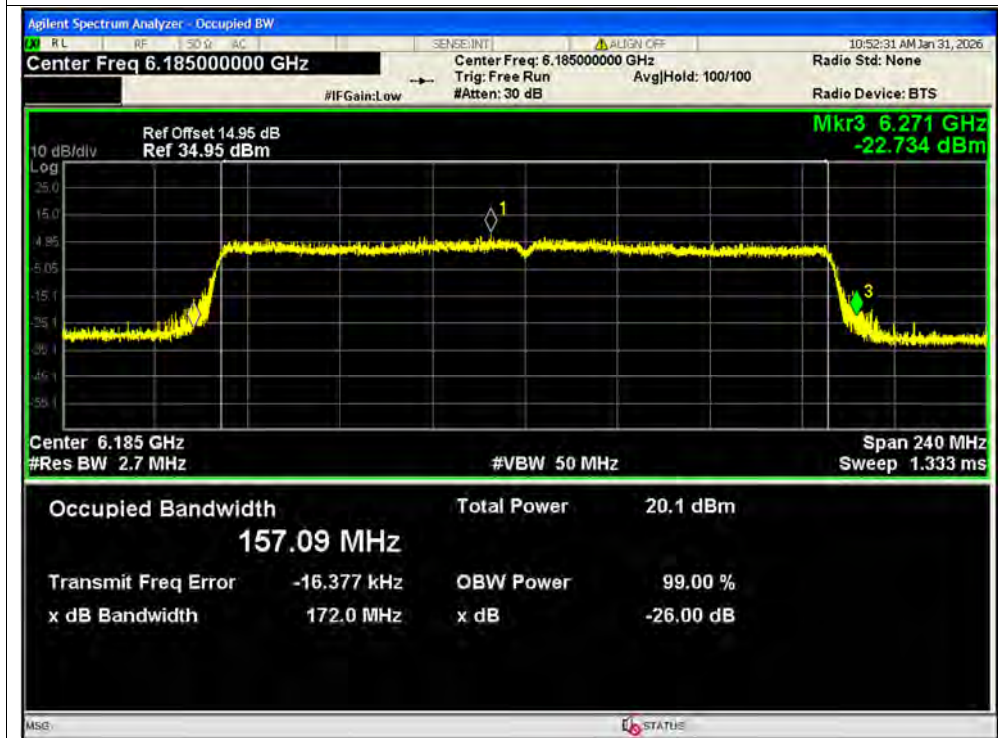


-26dB Bandwidth NVNT ax160 6185MHz Ant1 SISO

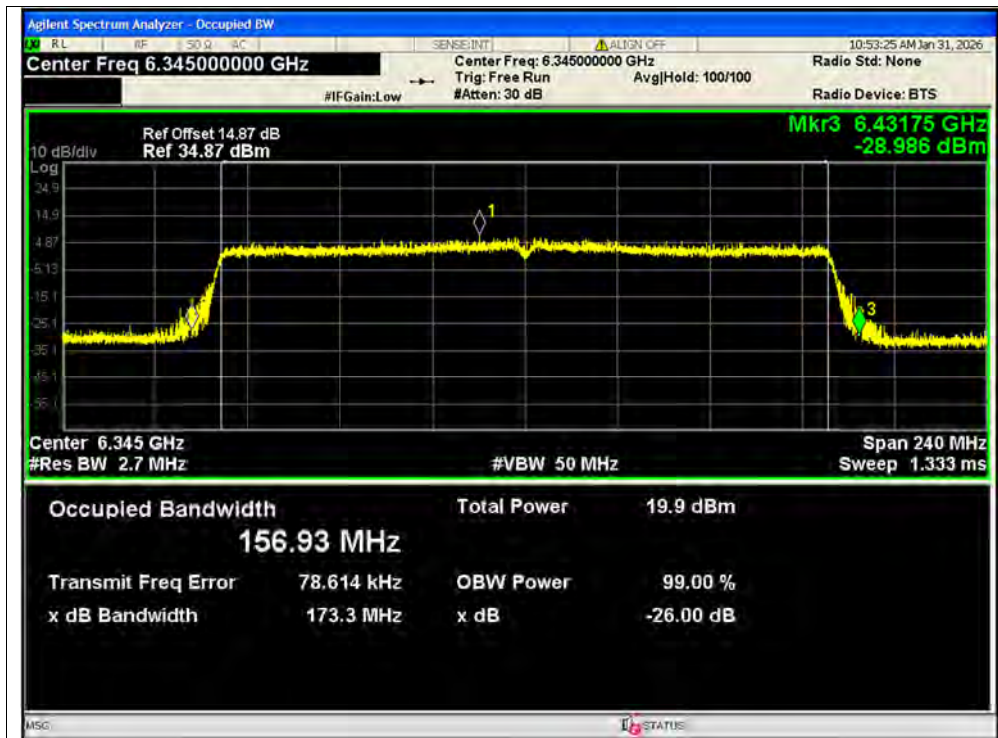


-26dB Bandwidth NVNT ax160 6345MHz Ant1 SISO

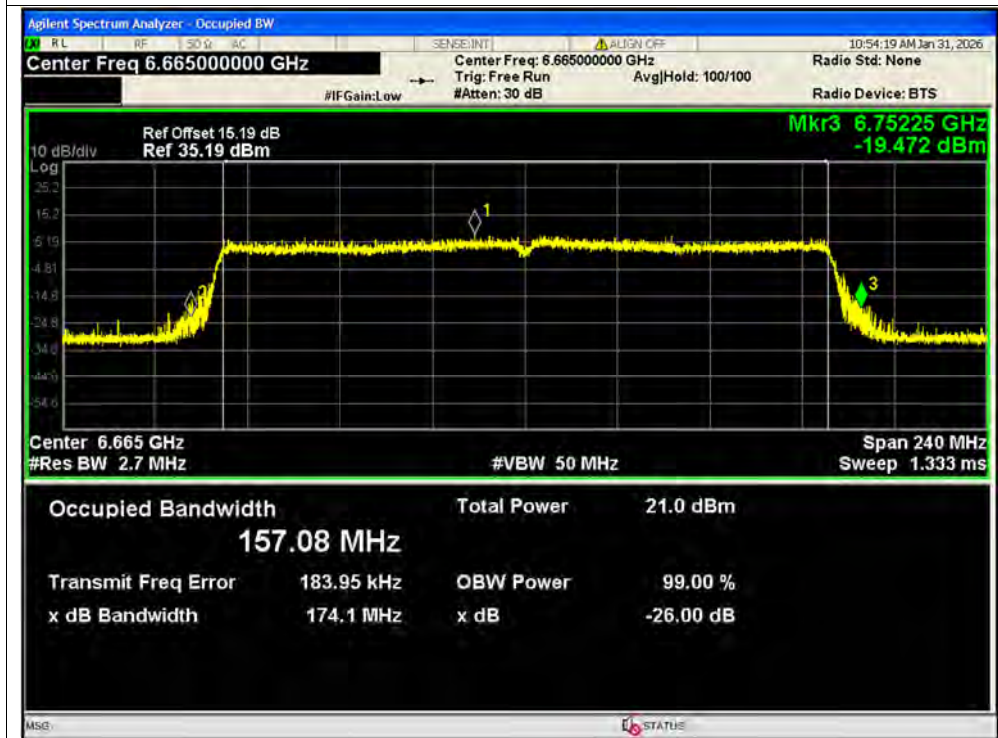


-26dB Bandwidth NVNT ax160 6665MHz Ant1 SISO

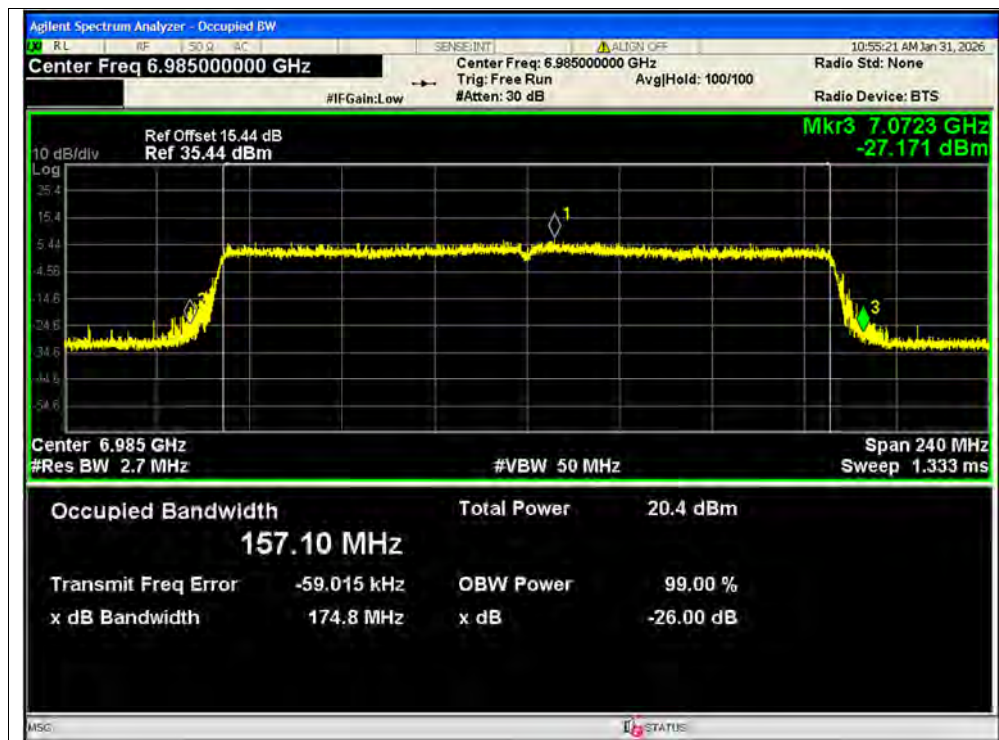


-26dB Bandwidth NVNT ax160 6985MHz Ant1 SISO

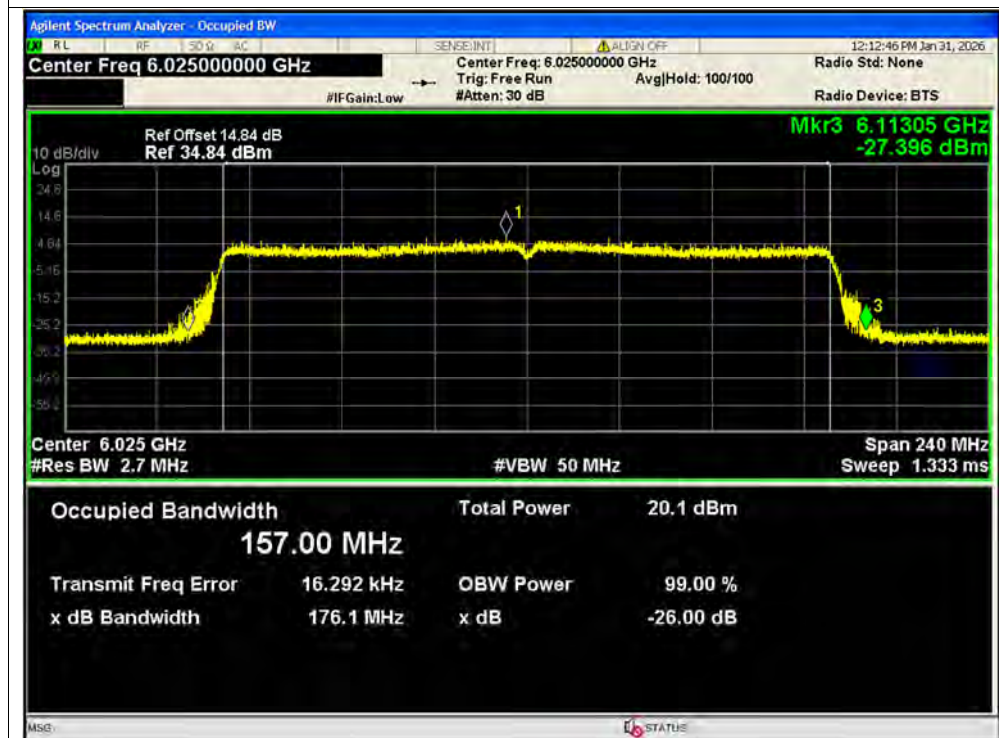


-26dB Bandwidth NVNT ax160 6025MHz Ant2 SISO

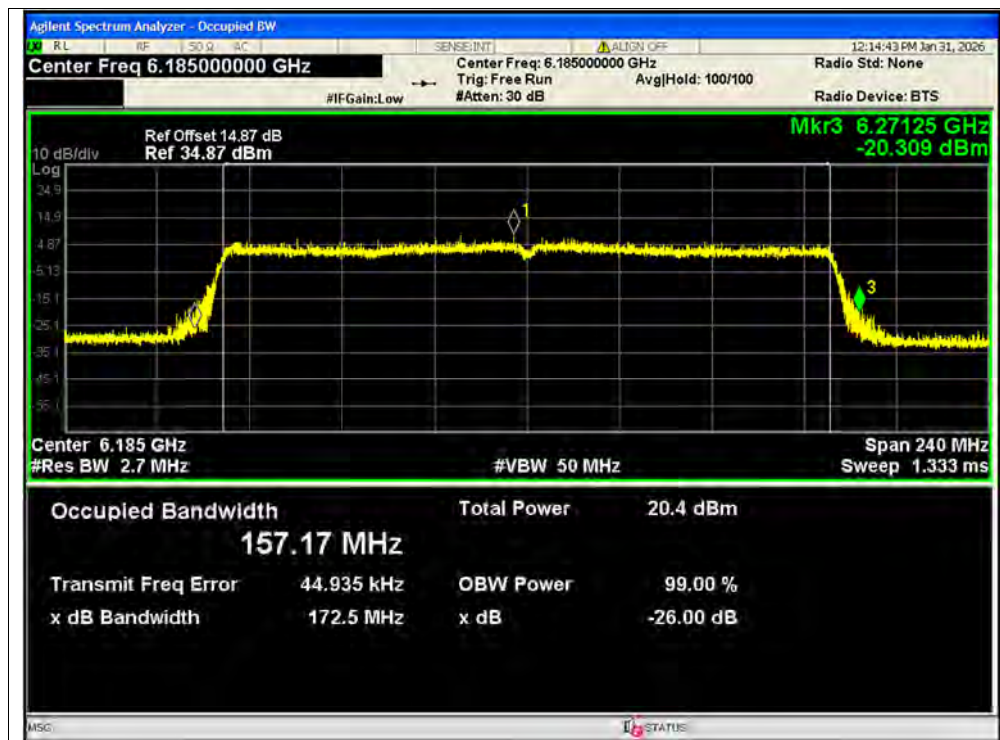


-26dB Bandwidth NVNT ax160 6185MHz Ant2 SISO

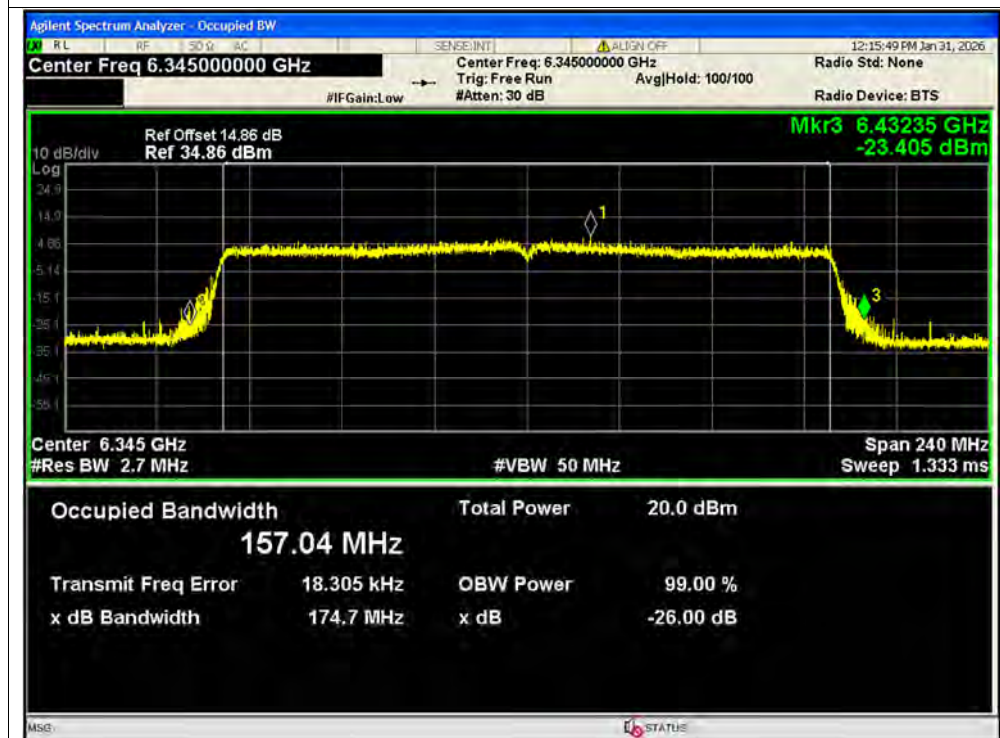


-26dB Bandwidth NVNT ax160 6345MHz Ant2 SISO

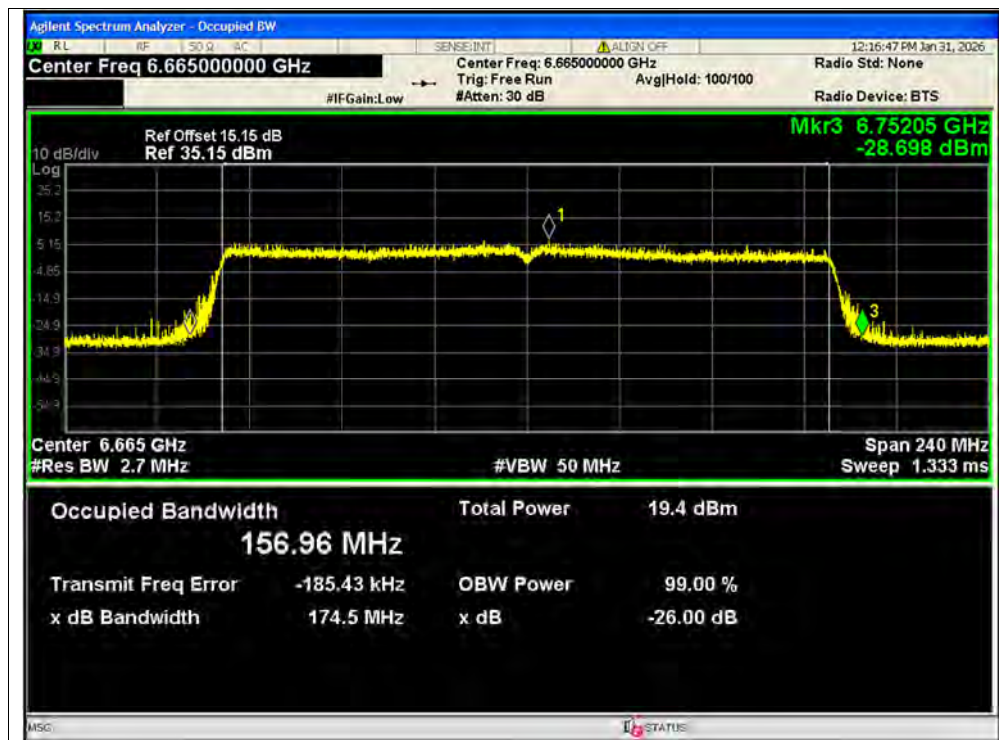


-26dB Bandwidth NVNT ax160 6665MHz Ant2 SISO

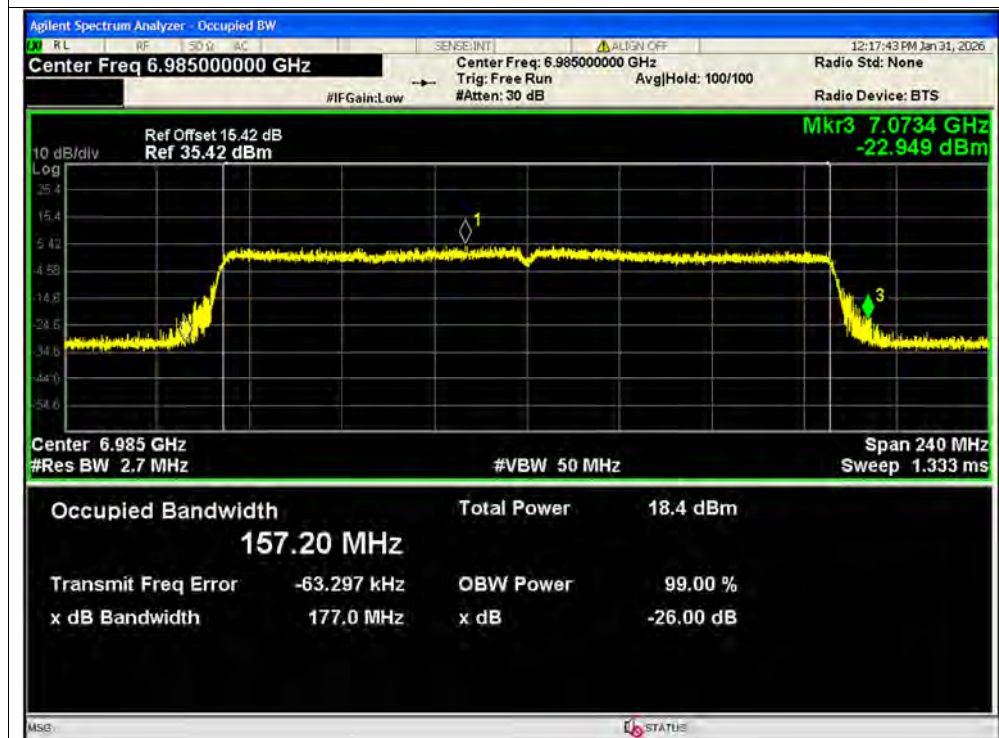


-26dB Bandwidth NVNT ax160 6985MHz Ant2 SISO

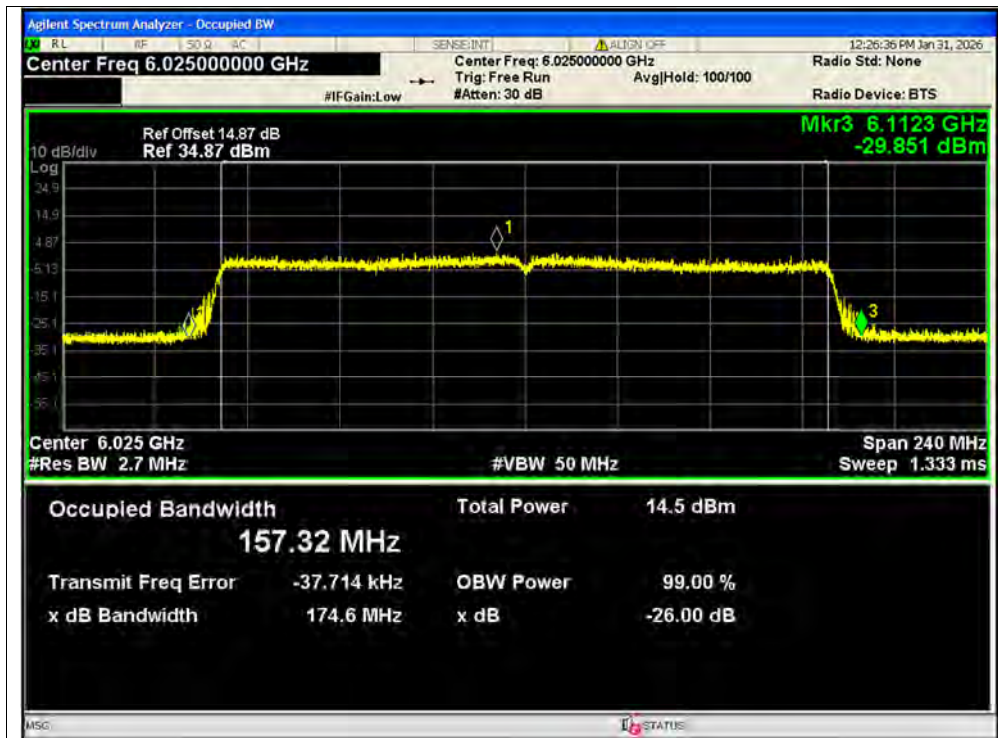


-26dB Bandwidth NVNT ax160 6025MHz Ant1 MIMO

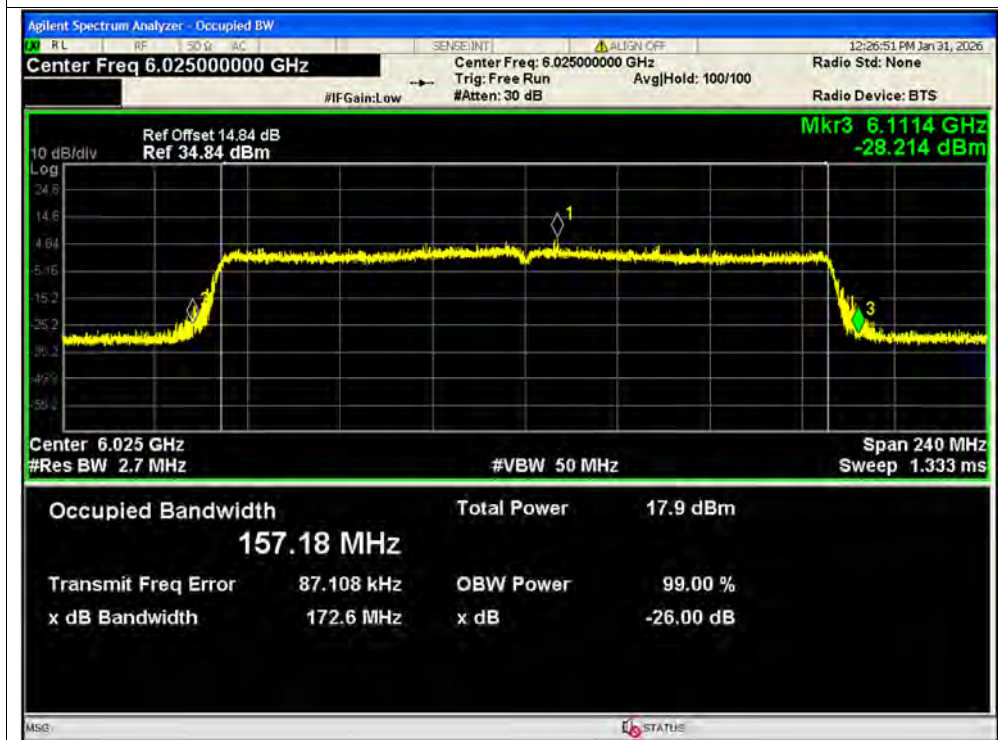


-26dB Bandwidth NVNT ax160 6025MHz Ant2 MIMO

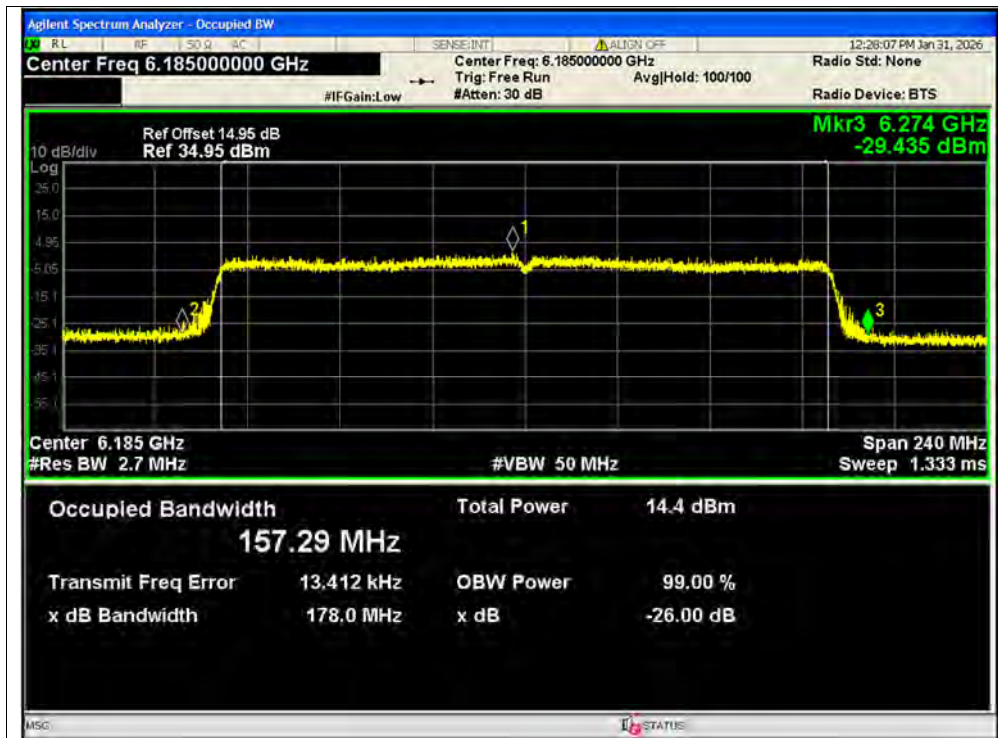

-26dB Bandwidth NVNT ax160 6185MHz Ant1 MIMO

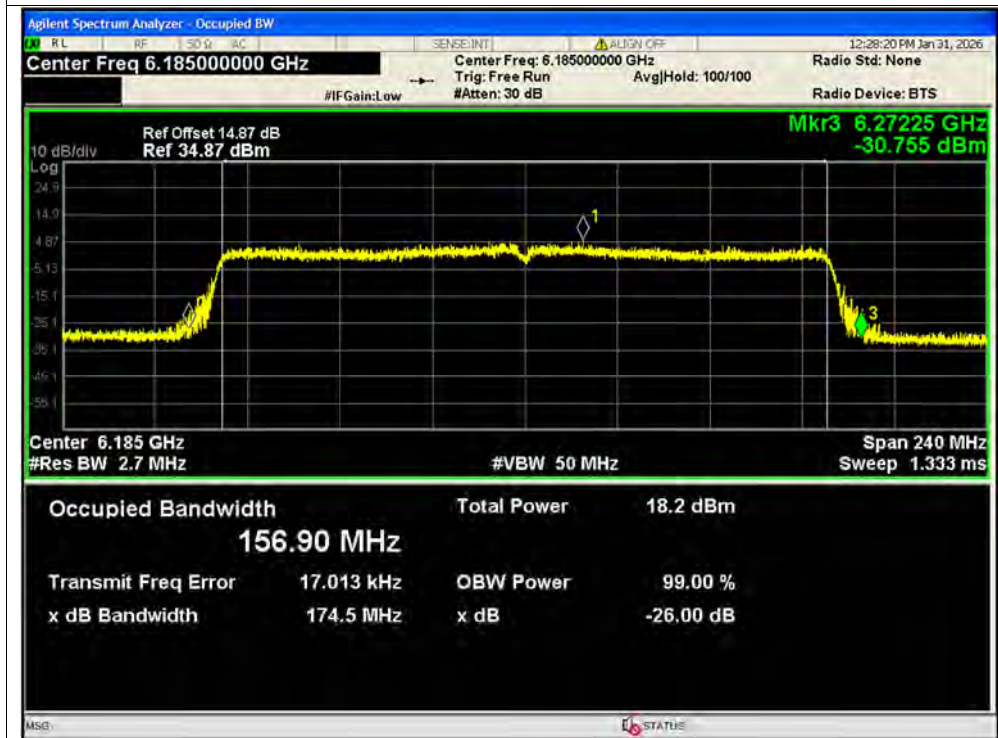


-26dB Bandwidth NVNT ax160 6185MHz Ant2 MIMO

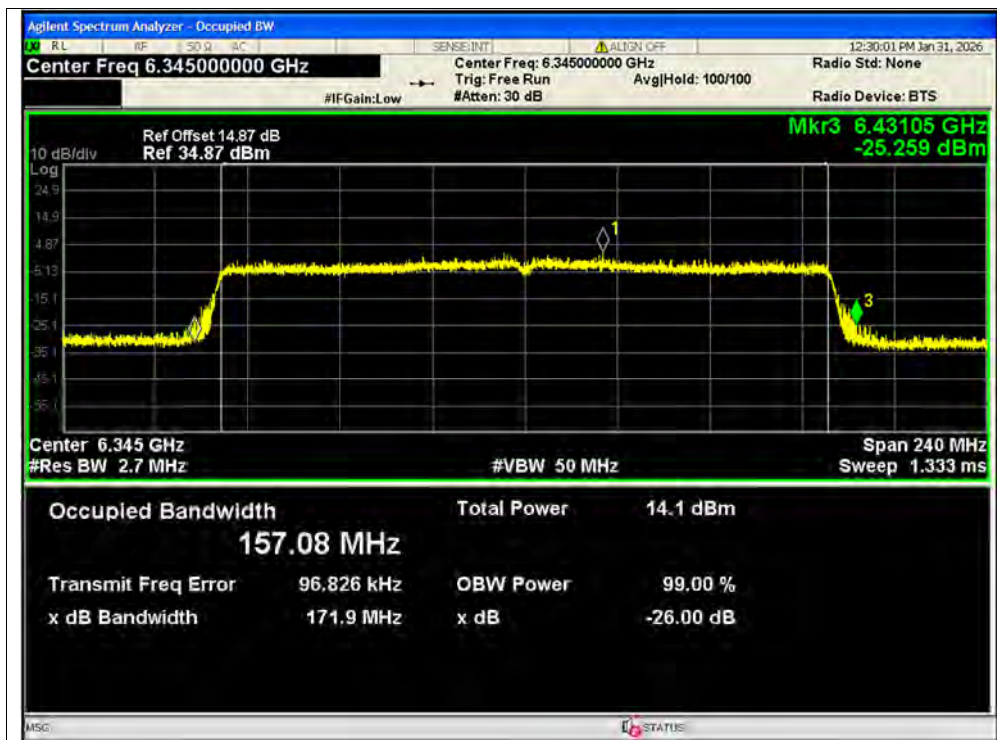


-26dB Bandwidth NVNT ax160 6345MHz Ant1 MIMO




-26dB Bandwidth NVNT ax160 6345MHz Ant2 MIMO

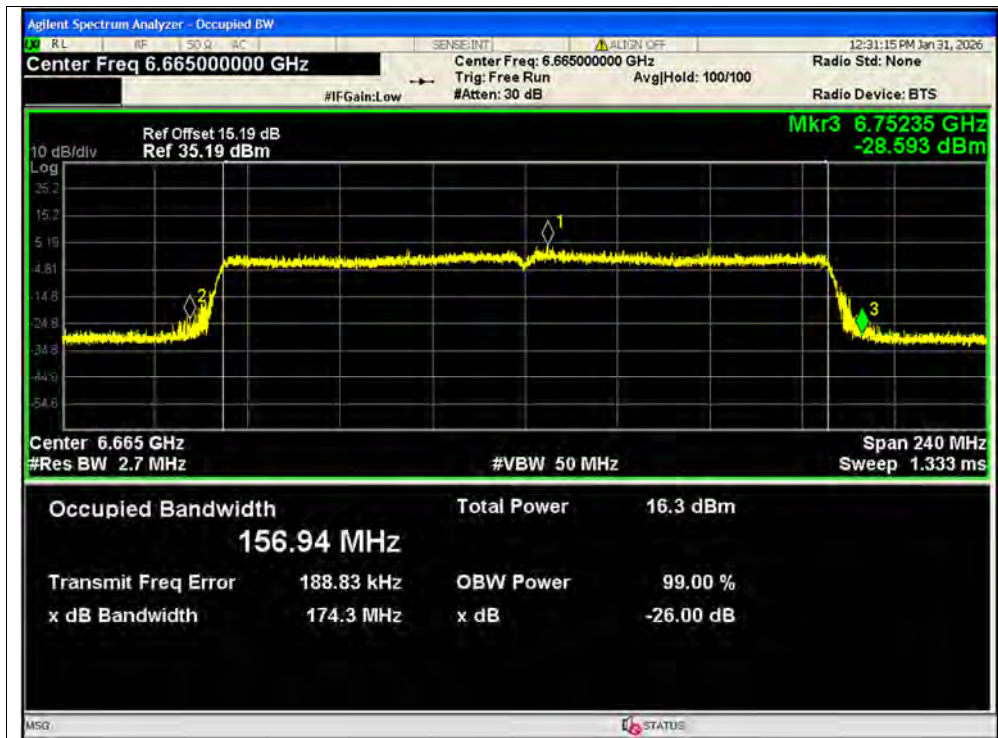


-26dB Bandwidth NVNT ax160 6665MHz Ant1 MIMO

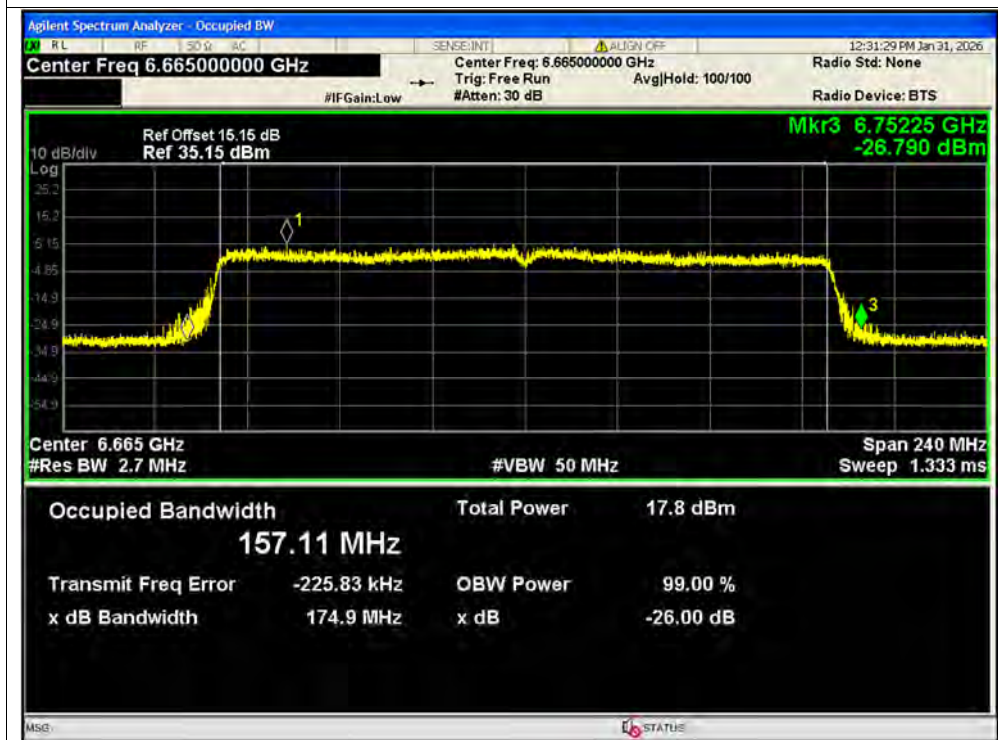

-26dB Bandwidth NVNT ax160 6665MHz Ant2 MIMO

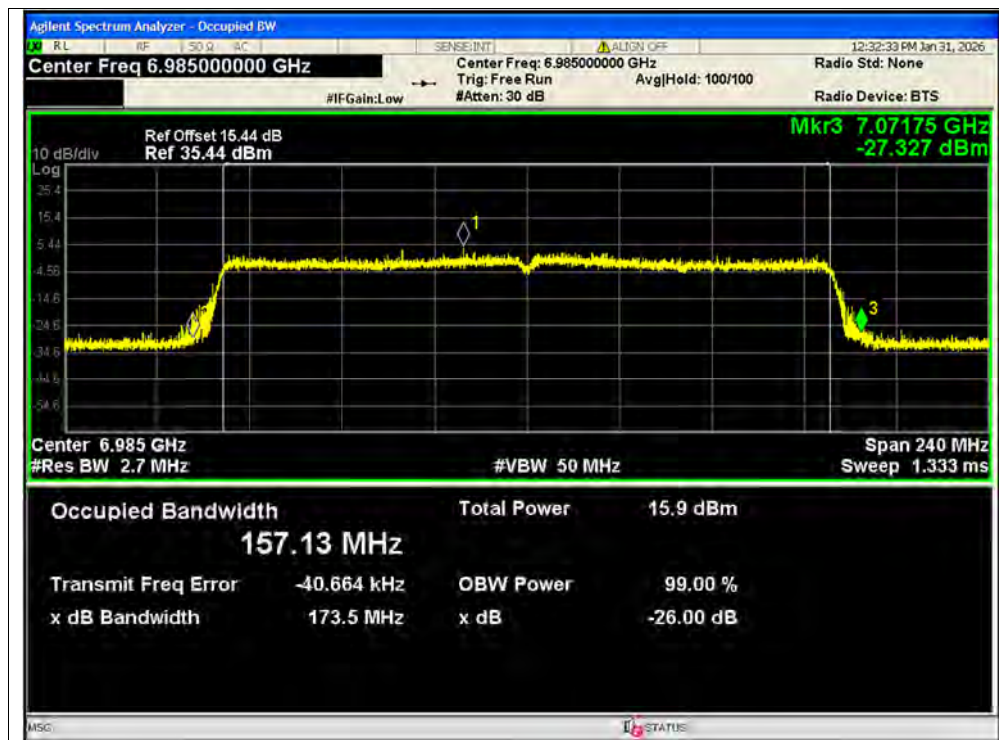

-26dB Bandwidth NVNT ax160 6985MHz Ant1 MIMO

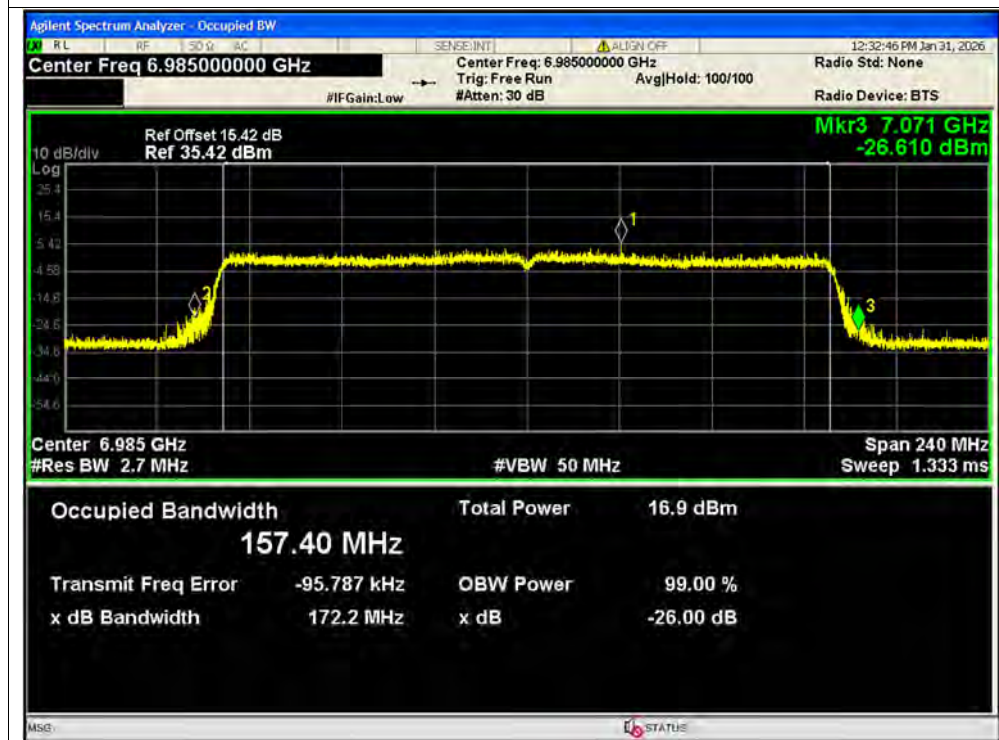

-26dB Bandwidth NVNT ax160 6985MHz Ant2 MIMO