



FCC TEST REPORT

FCC ID:WWE-2IHPP1059

Applicant: Lifeworks Technology Group LLC

Address: 530 7th Ave. 21st Fl. New York, United States 10018

Manufacturer: Versogo Tech (shenzhen) Co., Ltd

Address: Floor 3, Building 3rd, Xialingpai Industrial Zone, Dalang Street, Longhua District, Shenzhen City, Guangdong

EUT: Power bank

Trade Mark: iHome

Model Number: 2IHPP1059-SIL-BR
2IHPP1059-BLU-BR, 2IHPP1059-WHT-BR, 2IHPP1059-PLA-BR

Date of Receipt: Jan. 05, 2026

Test Date: Jan. 05, 2026 to Jan. 13, 2026

Date of Report: Jan. 14, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC CFR Title 47 Part 15 Subpart C

Test Result: Pass

Report Number: DLE-260114011R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

**TABLE OF CONTENTS**

1. VERSION	3
2. TEST SUMMARY	4
2.1 TEST FACILITY	5
2.2 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 Test mode	7
3.3 Block Diagram of EUT Configuration	8
3.4 Test Conditions	9
3.5 Description Of Support Units (Conducted Mode)	9
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. CONDUCTED EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION Limits	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 Test Result	13
5. RADIATED EMISSION MEASUREMENT	15
5.1 Radiated Emission Limits	15
5.2 Anechoic Chamber Test Setup Diagram	16
5.3 Test Procedure	16
5.4 DEVIATION FROM TEST STANDARD	16
5.5 Test Result	17
6. BANDWIDTH TEST	21
7. ANTENNA REQUIREMENT	23
8. TEST SETUP PHOTO	24
9. EUT CONSTRUCTIONAL DETAILS	24

**1. VERSION**

Report No.	Version	Description	Approved
DLE-260114011R	Rev.01	Initial issue of report	Jan. 14, 2026

**2. TEST SUMMARY**

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF conducted Spurious Emission	U=2.2dB
7	RF Occupied Bandwidth	U=1.8MHz
8	humidity uncertainty	U=5.3%
-	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Power bank
Model No.:	2IHPP1059-SIL-BR
Serial No.:	2IHPP1059-BLU-BR,2IHPP1059-WHT-BR,2IHPP1059-PLA-BR
Model Difference:	All the model are the same circuit , only the model name and colour are different.
Hardware version:	N/A
Software version:	N/A
Operation Frequency:	115kHz-205kHz
Modulation type:	ASK
Antenna Type:	loop coil antenna
Antenna gain:	0dBi
Ratings:	USB-C Input: 5V ---2A USB-C Output 5V ---2A USB-A Output 5V ---2A Wireless Output: 5W
Battery Capacity:	3.7V, 5000mAh, 18.5Wh
Test description:	Phone Battery > 98%, =50% and < 1% are tested, and the worst is < 1%.

NOTE 1: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

NOTE 2: The EUT's all information provided by client.



3.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

a. EUT mode of adapter input + wireless charge output:

Test Modes:	Test Coil:	Description:
Mode 1	ANT 1	AC/DC Adapter (5V/2A) + EUT + Phone (Battery Status: <1%)
Mode 2		AC/DC Adapter (5V/2A) + EUT + Phone (Battery Status: 50%)
Mode 3		AC/DC Adapter (5V/2A) + EUT + Phone (Battery Status: >98%)

b. EUT mode of wireless charge output:


Test Modes:	Test Coil:	Description:
Mode 1a	ANT 1	EUT + Phone (Battery Status: <1%)
Mode 2a		EUT + Phone (Battery Status: 50%)
Mode 3a		EUT + Phone (Battery Status: >98%)




3.3 Block Diagram of EUT Configuration

Conducted Emission


Conducted Emission

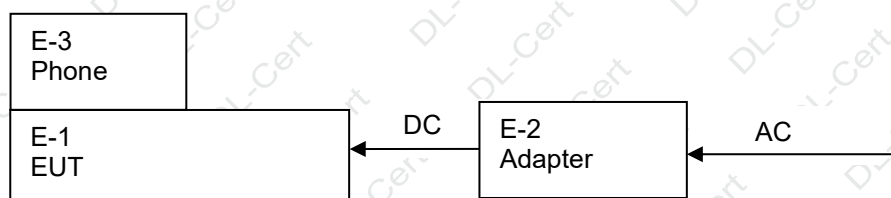

Radiated Emission

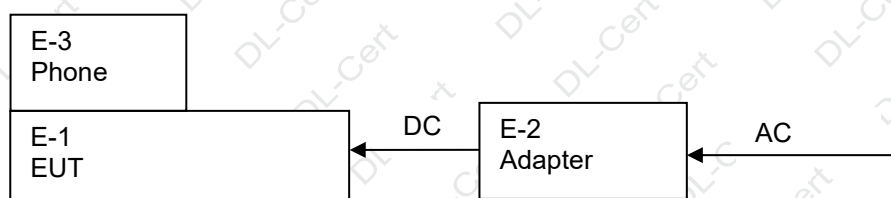

B:





3.4 Test Conditions

Temperature: 23~26°C

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Power bank	iHome	2IHPP1059-SIL-BR	N/A	EUT
E2	AC/DC Adapter	N/A	X569	N/A	Auxiliary
E3	Phone	Apple	iPhone XR	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct.25,2025	Oct.24,2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct.25,2025	Oct.24,2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct.27,2025	Oct.26,2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct.27,2025	Oct.26,2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct.25,2025	Oct.24,2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct.25,2025	Oct.24,2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct.25,2025	Oct.24,2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct.25,2025	Oct.24,2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct.25,2025	Oct.24,2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct.25,2025	Oct.24,2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct.25,2025	Oct.24,2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct.25,2025	Oct.24,2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct.25,2025	Oct.24,2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct.25,2025	Oct.24,2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct.25,2025	Oct.24,2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct.25,2025	Oct.24,2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov.05,2023	Nov.04,2026
2	EMI Receiver	R&S	ESR	101421	Oct.25,2025	Oct.24,2026
3	LISN	R&S	ENV216	102417	Oct.25,2025	Oct.24,2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct.25,2025	Oct.24,2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

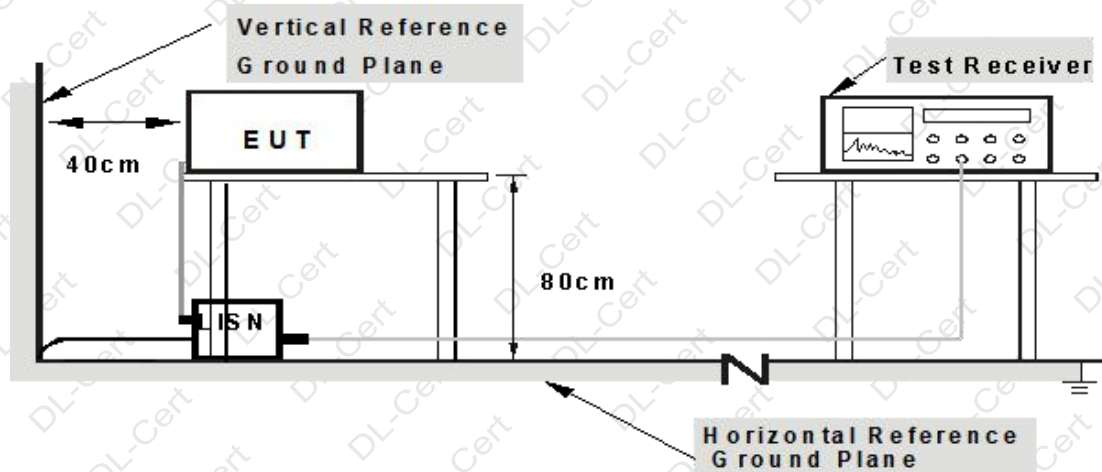

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

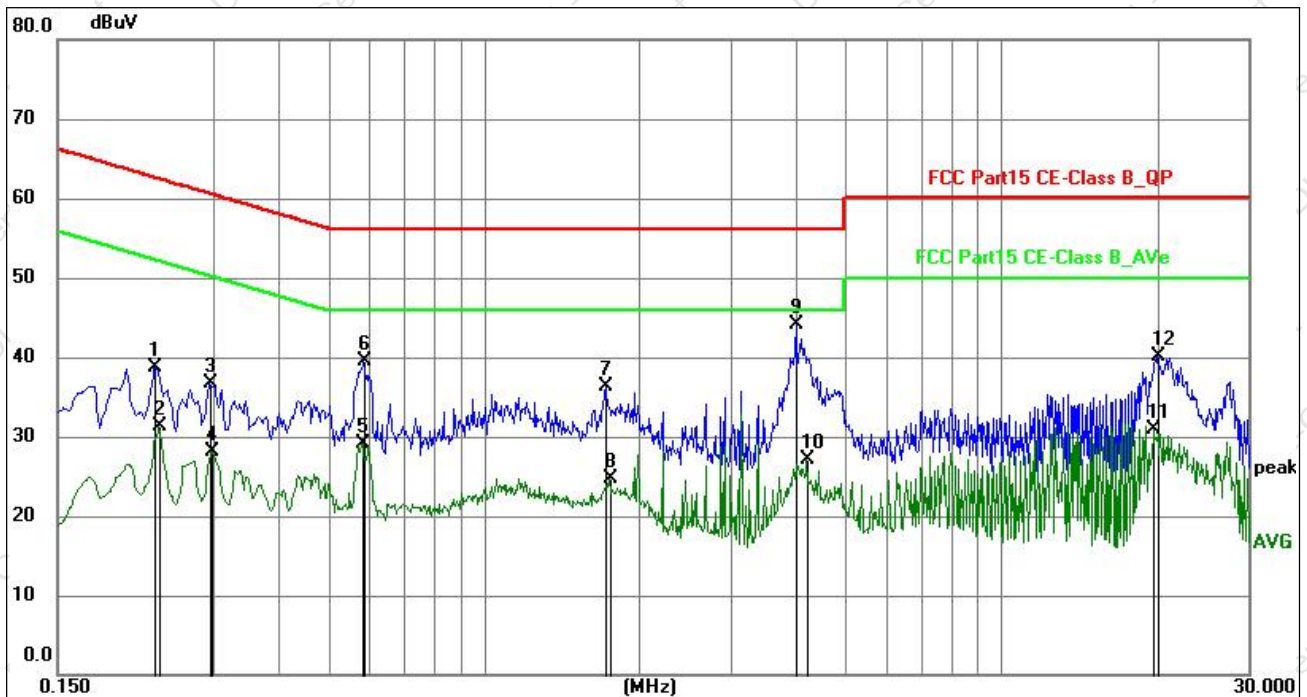


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2310	19.14	19.66	38.80	62.41	-23.61	QP	P	
2	0.2355	11.61	19.66	31.27	52.25	-20.98	AVG	P	
3	0.2940	16.98	19.65	36.63	60.41	-23.78	QP	P	
4	0.2985	8.41	19.65	28.06	50.28	-22.22	AVG	P	
5	0.5819	9.50	19.63	29.13	46.00	-16.87	AVG	P	
6	0.5864	19.95	19.63	39.58	56.00	-16.42	QP	P	
7	1.7249	16.66	19.67	36.33	56.00	-19.67	QP	P	
8	1.7519	5.01	19.67	24.68	46.00	-21.32	AVG	P	
9	4.0200	24.41	19.71	44.12	56.00	-11.88	QP	P	
10	4.2045	7.47	19.71	27.18	46.00	-18.82	AVG	P	
11	19.7385	11.15	19.80	30.95	50.00	-19.05	AVG	P	
12	19.9770	20.28	19.80	40.08	60.00	-19.92	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

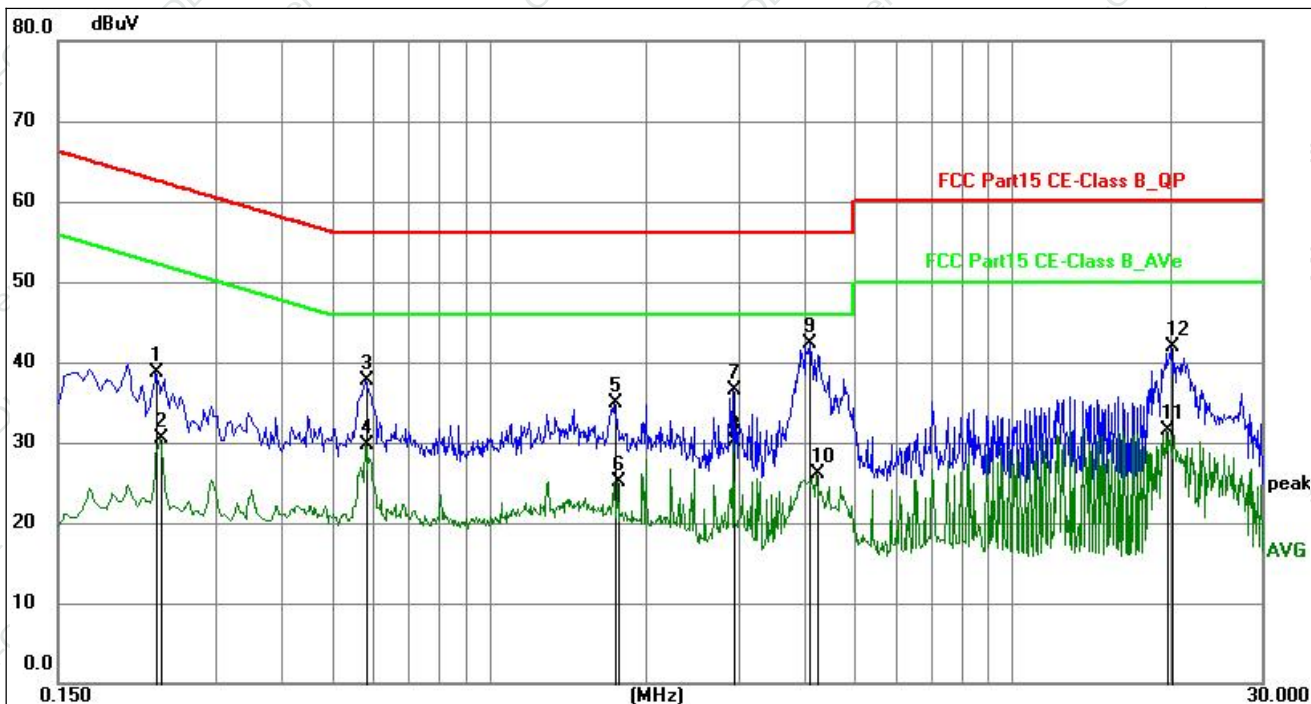

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2310	19.16	19.64	38.80	62.41	-23.61	QP	P	
2	0.2355	10.87	19.64	30.51	52.25	-21.74	AVG	P	
3	0.5819	18.00	19.62	37.62	56.00	-18.38	QP	P	
4	0.5819	10.18	19.62	29.80	46.00	-16.20	AVG	P	
5	1.7384	15.17	19.66	34.83	56.00	-21.17	QP	P	
6	1.7654	5.46	19.66	25.12	46.00	-20.88	AVG	P	
7	2.9445	16.90	19.67	36.57	56.00	-19.43	QP	P	
8	2.9445	10.50	19.67	30.17	46.00	-15.83	AVG	P	
9	4.1100	22.54	19.69	42.23	56.00	-13.77	QP	P	
10	4.2360	6.45	19.69	26.14	46.00	-19.86	AVG	P	
11	19.7655	11.83	19.77	31.60	50.00	-18.40	AVG	P	
12	20.2290	22.07	19.77	41.84	60.00	-18.16	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lism factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.

**5. RADIATED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits**Limits for frequency below 30MHz**


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	$2400/F(\text{kHz})$	300	Quasi-peak Value
0.490-1.705	$24000/F(\text{kHz})$	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

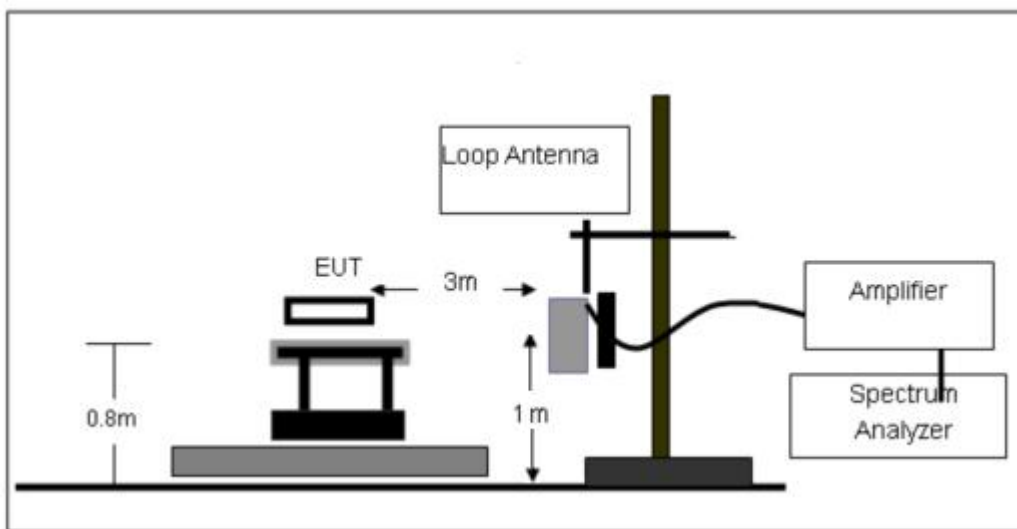

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

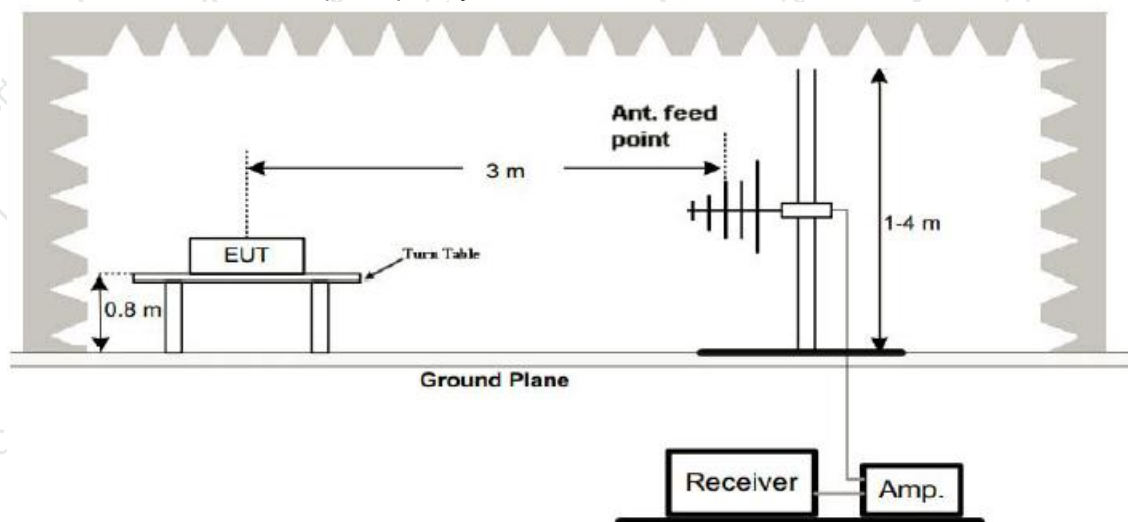

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation



5.5 Test Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	DC 3.7V	Simultaneously:	Mode 1a

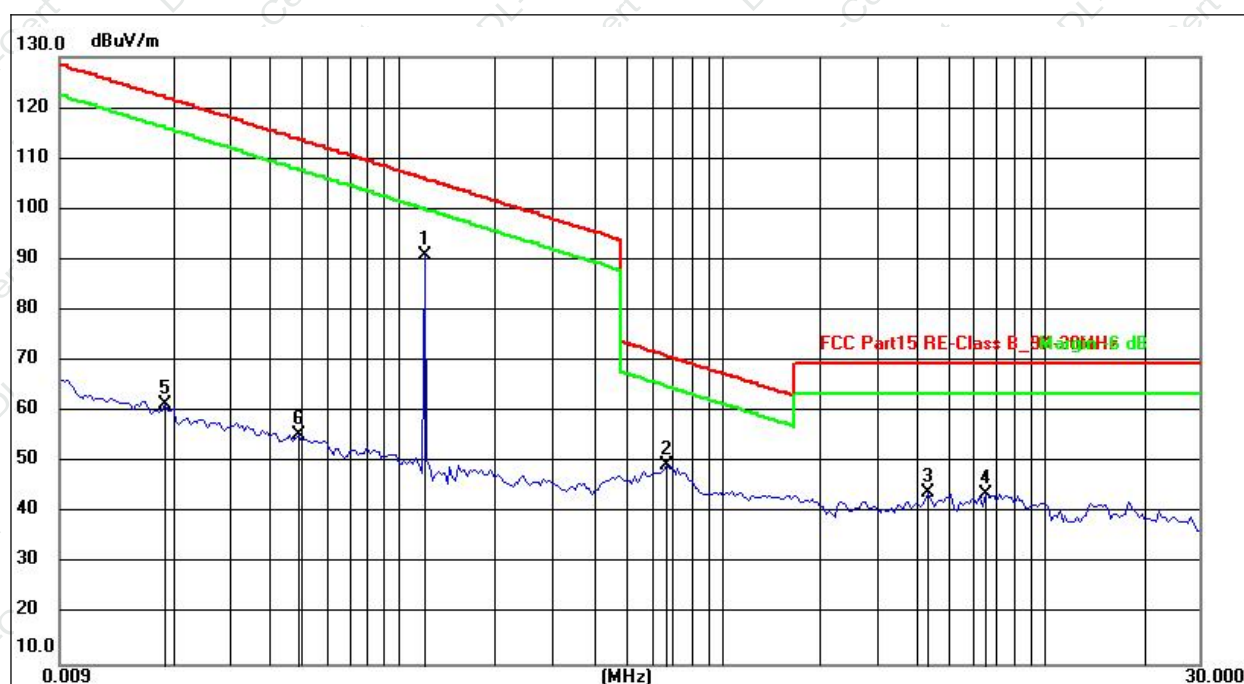


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1200	71.04	19.88	90.92	106.02	-15.10	peak
2	0.6763	29.10	20.36	49.46	71.00	-21.54	peak
3	4.3695	24.47	19.52	43.99	69.54	-25.55	peak
4	6.5551	24.56	19.32	43.88	69.54	-25.66	peak
5	0.0189	41.06	20.46	61.52	122.08	-60.56	peak
6	0.0492	35.63	19.77	55.40	113.77	-58.37	peak

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 3.7V	Test Mode :	Mode 1a

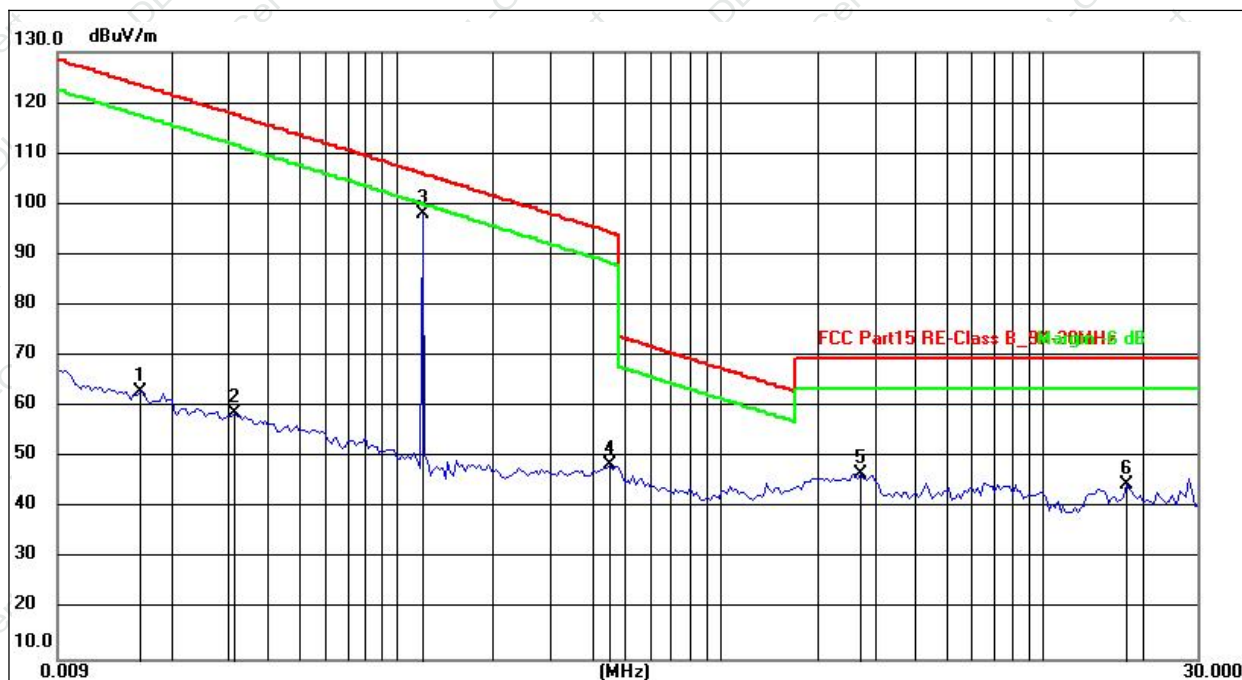

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0160	42.57	20.49	63.06	123.52	-60.46	peak
2	0.0316	38.57	20.18	58.75	117.61	-58.86	peak
3	0.1200	78.04	19.88	97.92	106.02	-8.10	peak
4	0.4600	28.42	20.19	48.61	94.35	-45.74	peak
5	2.7406	27.01	19.69	46.70	69.54	-22.84	peak
6	18.0685	26.14	18.61	44.75	69.54	-24.79	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.



30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V From Adapter AC 120V/60Hz	Test Mode:	Mode 1a

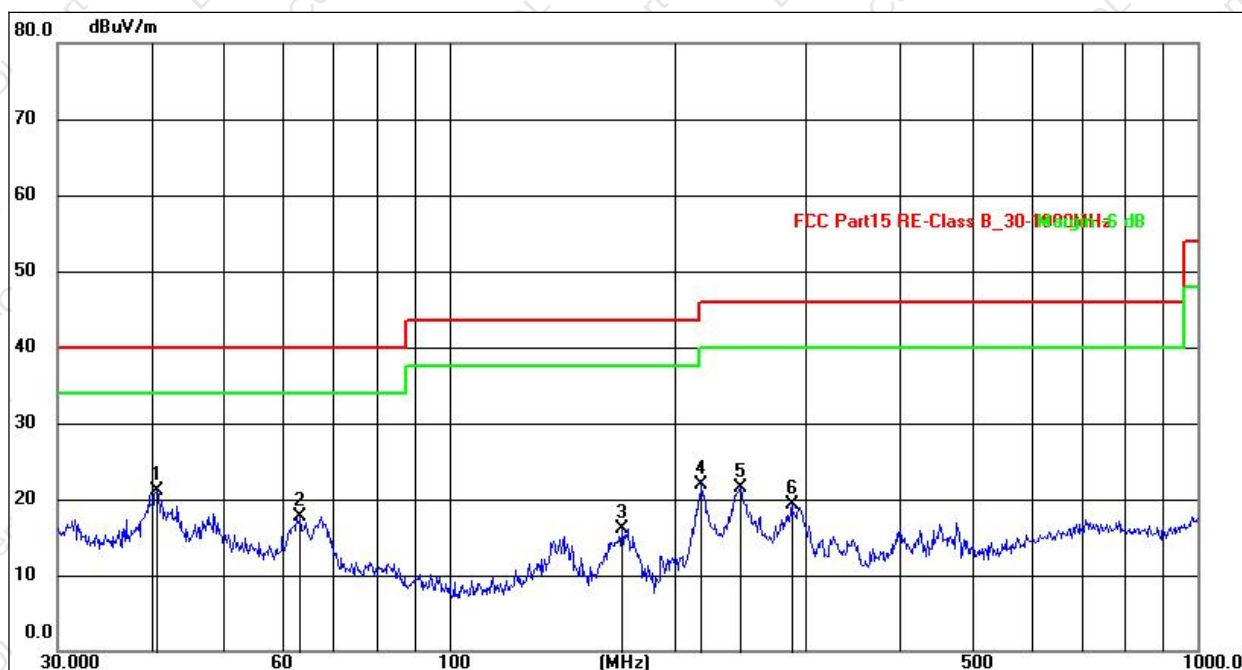


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.7016	36.46	-15.38	21.08	40.00	-18.92	QP
2	63.3132	34.28	-16.49	17.79	40.00	-22.21	QP
3	170.1947	35.87	-19.73	16.14	43.50	-27.36	QP
4	217.5443	43.14	-21.32	21.82	46.00	-24.18	QP
5	245.0900	41.44	-19.88	21.56	46.00	-24.44	QP
6	286.9823	38.93	-19.65	19.28	46.00	-26.72	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1a recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V From Adapter AC 120V/60Hz	Test Mode:	Mode 1a

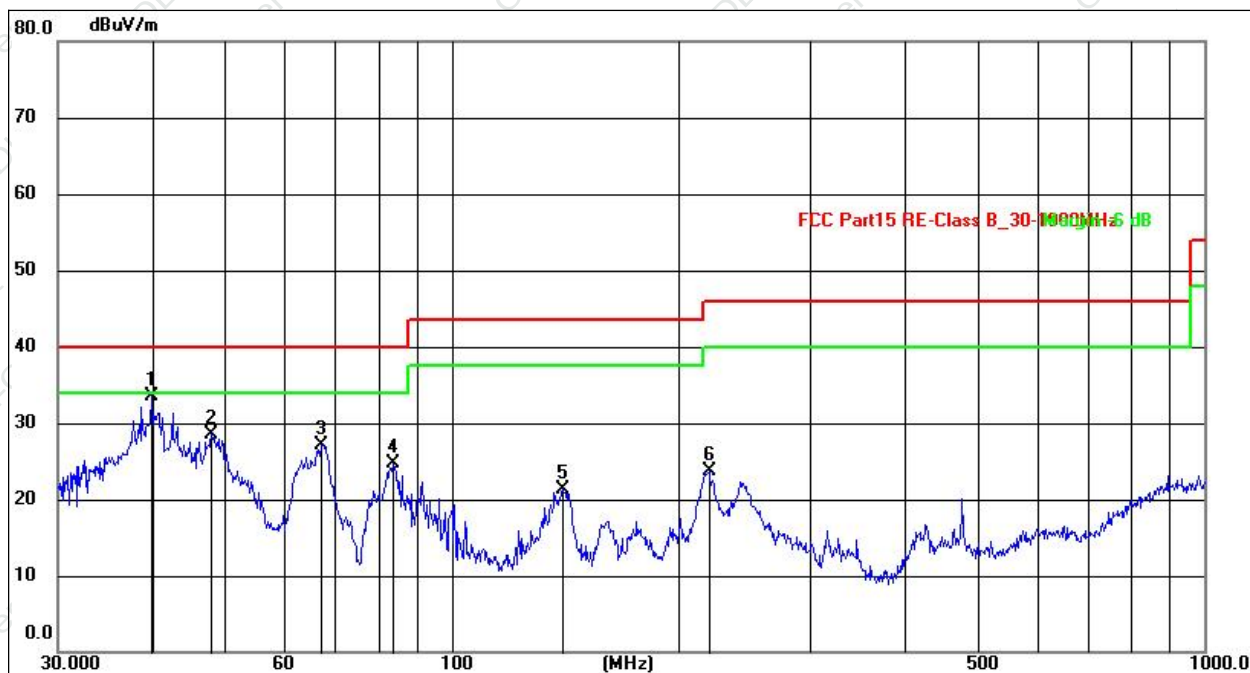

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.9942	51.51	-18.10	33.41	40.00	-6.59	QP
2	47.9940	46.98	-18.49	28.49	40.00	-11.51	QP
3	67.2021	47.62	-20.46	27.16	40.00	-12.84	QP
4	83.5221	48.00	-23.24	24.76	40.00	-15.24	QP
5	140.3420	44.55	-23.15	21.40	43.50	-22.10	QP
6	219.8448	47.46	-23.82	23.64	46.00	-22.36	QP

Remarks:


- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1a recorded.



6. BANDWIDTH TEST

1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP

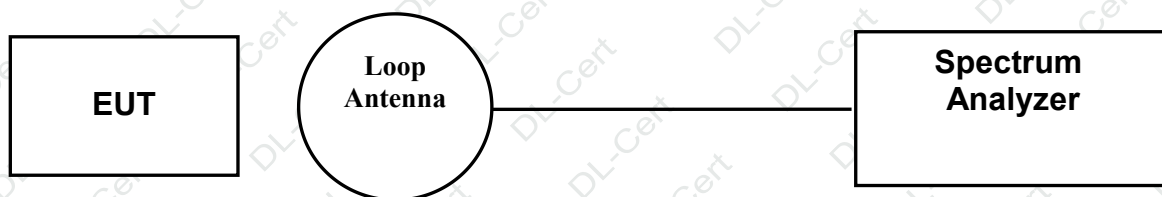



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Test Coil	Frequency (KHz)	20dB bandwidth (KHz)	Result
Phone	120	2.726	Pass

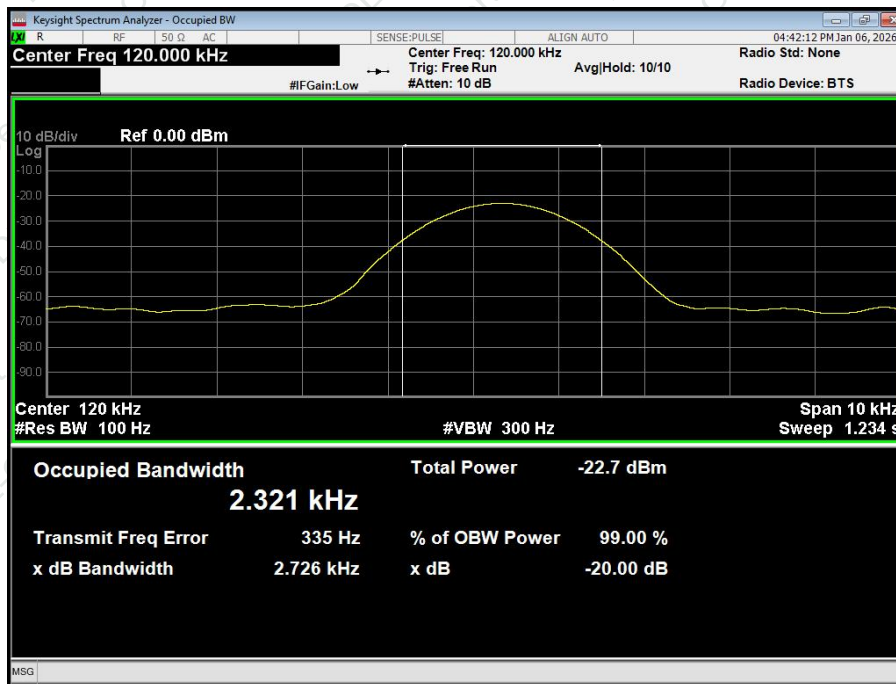



7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is loop coil antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****