FCC Radio Test Report

FCC ID: XMR2019SC650TNA

This report concerns: Original Grant

Project No.	:	2001H013
Equipment	:	Smart Module
Brand Name	:	QUECTEL
Test Model	:	SC650T-NA
Series Model	:	N/A
Applicant	:	Quectel Wireless Solutions Co., Ltd.
Address	:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233.
Manufacturer	:	Quectel Wireless Solutions Co., Ltd.
Address	:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233.
Date of Receipt	:	Jan. 15, 2020
Date of Test	:	Jan. 15, 2020~Feb. 27, 2020
Issued Date	:	Mar. 16, 2020
Report Version	:	R00
Test Sample	:	Engineering Sample No.: SH2020011452
Standard(s)	:	FCC Part15, Subpart C (15.247) ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Iscaa Min

Prepared by : Iscaa Min

Krain. Wu

Approved by : Krain Wu

Certificate # 5123. 03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China
TEL: +86-021-61765666
Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 5

1 . SUMMARY OF TEST RESULTS 6

1.1 TEST FACILITY 7

1.2 MEASUREMENT UNCERTAINTY 7

1.3 TEST ENVIRONMENT CONDITIONS 7

2 . GENERAL INFORMATION 8

2.1 GENERAL DESCRIPTION OF EUT 8

2.2 DESCRIPTION OF TEST MODES 10

2.3 PARAMETERS OF TEST SOFTWARE 11

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 11

2.5 SUPPORT UNITS 11

3 . AC POWER LINE CONDUCTED EMISSIONS TEST 12

3.1 LIMIT 12

3.2 TEST PROCEDURE 12

3.3 DEVIATION FROM TEST STANDARD 12

3.4 TEST SETUP 13

3.5 EUT OPERATING CONDITIONS 13

3.6 TEST RESULTS 13

4 . RADIATED EMISSION TEST 14

4.1 LIMIT 14

4.2 TEST PROCEDURE 15

4.3 DEVIATION FROM TEST STANDARD 15

4.4 TEST SETUP 16

4.5 EUT OPERATING CONDITIONS 18

4.6 TEST RESULT - 30 MHZ TO 1000 MHZ 18

4.7 TEST RESULT - ABOVE 1000 MHZ 18

5 . BANDWIDTH TEST 19

5.1 LIMIT 19

5.2 TEST PROCEDURE 19

5.3 DEVIATION FROM STANDARD 19

5.4 TEST SETUP 19

5.5 EUT OPERATION CONDITIONS 19

5.6 TEST RESULTS 19

Table of Contents Page

6 . MAXIMUM OUTPUT POWER 20

6.1 LIMIT 20

6.2 TEST PROCEDURE 20

6.3 DEVIATION FROM STANDARD 20

6.4 TEST SETUP 20

6.5 EUT OPERATION CONDITIONS 20

6.6 TEST RESULTS 20

7 . CONDUCTED SPURIOUS EMISSION 21

7.1 LIMIT 21

7.2 TEST PROCEDURE 21

7.3 DEVIATION FROM STANDARD 21

7.4 TEST SETUP 21

7.5 EUT OPERATION CONDITIONS 21

7.6 TEST RESULTS 21

8 . POWER SPECTRAL DENSITY TEST 22

8.1 LIMIT 22

8.2 TEST PROCEDURE 22

8.3 DEVIATION FROM STANDARD 22

8.4 TEST SETUP 22

8.5 EUT OPERATION CONDITIONS 22

8.6 TEST RESULTS 22

9 . MEASUREMENT INSTRUMENTS LIST 23

10 . EUT TEST PHOTO 25

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS 28

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ 31

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ 34

APPENDIX D - BANDWIDTH 45

APPENDIX E - MAXIMUM OUTPUT POWER 47

APPENDIX F - CONDUCTED SPURIOUS EMISSION 49

APPENDIX G - POWER SPECTRAL DENSITY 51

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Mar. 16, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	**Test Item**	**Test Result**	**Judgment**	**Remark**
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	------
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	------
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	------
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	------
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	------
15.247(e)	Power Spectral Density	APPENDIX H	PASS	------
15.203	Antenna Requirement	------	PASS	------

Note:

(1) “N/A” denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China
BTL's Test Firm Registration Number for FCC: 476765
BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	18°C	56%	DC 3.8V	Forest Li
Radiated Emissions-30 MHz to 1GHz	18°C	40%	DC 3.8V	Forest Li
Radiated Emissions-Above 1000 MHz	21°C	40%	DC 3.8V	Forest Li
Bandwidth	23°C	59%	DC 3.8V	Forest Li
Maximum Output Power & e.i.r.p.	23°C	59%	DC 3.8V	Forest Li
Conducted Spurious Emission	23°C	59%	DC 3.8V	Forest Li
Power Spectral Density	23°C	59%	DC 3.8V	Forest Li

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Module
Brand Name	QUECTEL
Test Model	SC650T-NA
Series Model	N/A
Model Difference(s)	N/A
Software Version	SC650TNAPAR05A03
Hardware Version	R1.0
Power Source	DC power supply.
Power Rating	DC 3.8V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK
Bit Rate of Transmitter	1Mbps
Max. Output Power	3.21 dBm (0.0021 W) For 1Mbps
Max. e.i.r.p.	8.59 dBm (0.0072 W) For 1Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Saintenna	SAA31092A	Dipole	IPEX	5.38

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2440MHz_CH19_1Mbps
Mode 3	TX 2480MHz_CH39_1Mbps

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX 2402MHz_CH00_1Mbps

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX 2402MHz_CH00_1Mbps

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2440MHz_CH19_1Mbps
Mode 3	TX 2480MHz_CH39_1Mbps

Conducted test	
Final Test Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2440MHz_CH19_1Mbps
Mode 3	TX 2480MHz_CH39_1Mbps

Note:

(1) The measurements are performed at the high, middle, low available channels.

(2) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

(3) The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software	QRCT		
Frequency (MHz)	2402	2440	2480
Parameters(1Mbps)	default	default	default

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

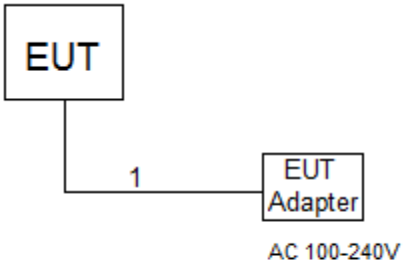

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model/Type No.	Series No.
1	Adapter	-	YHSW-050100U/T	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	N/A	N/A	1m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

(1) The tighter limit applies at the band edges.
(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

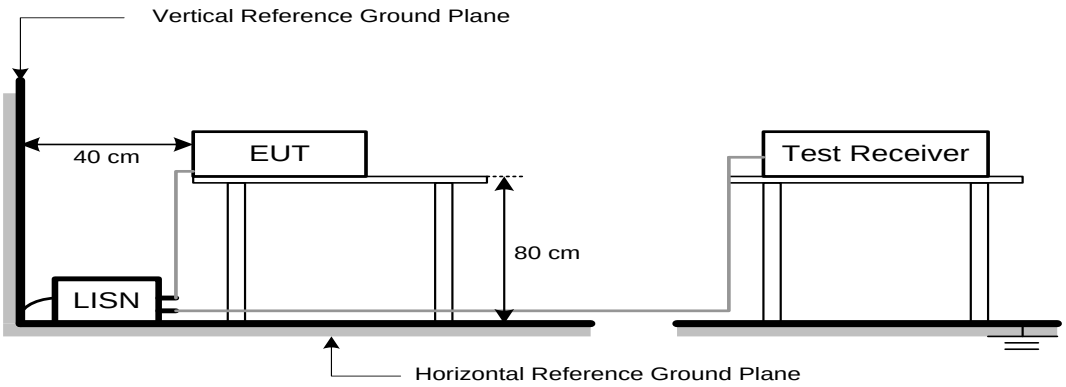

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSION TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for PK value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1 GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1 GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

9 kHz-30 MHz

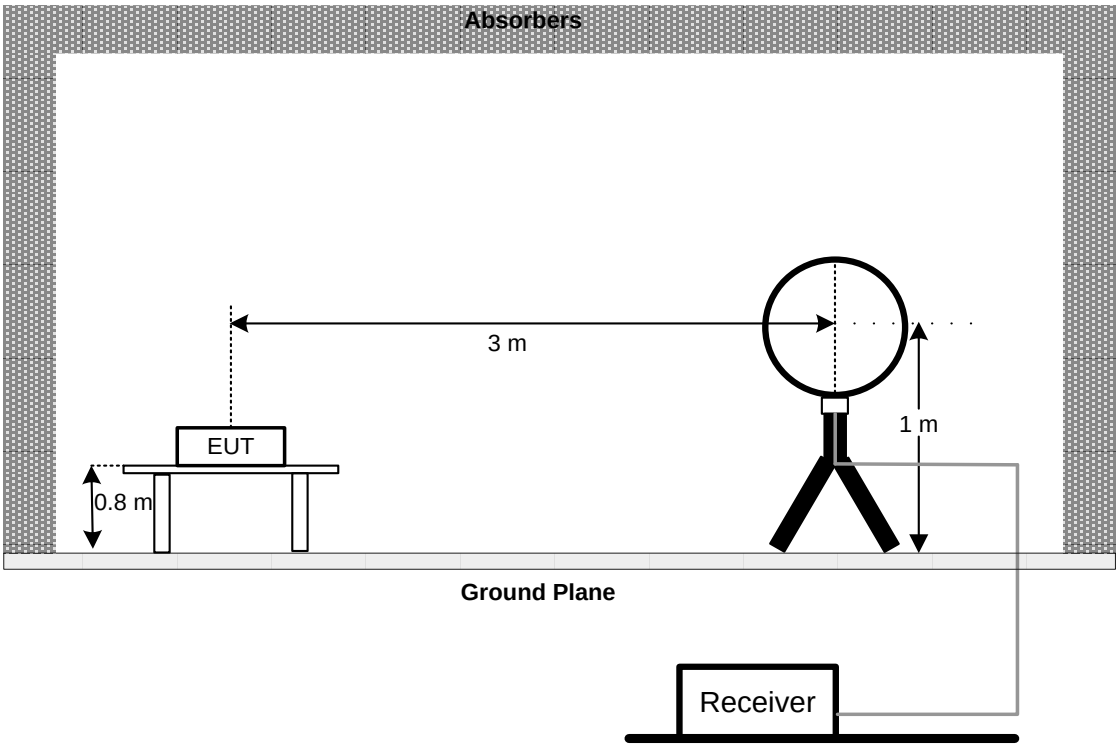

30 MHz to 1 GHz

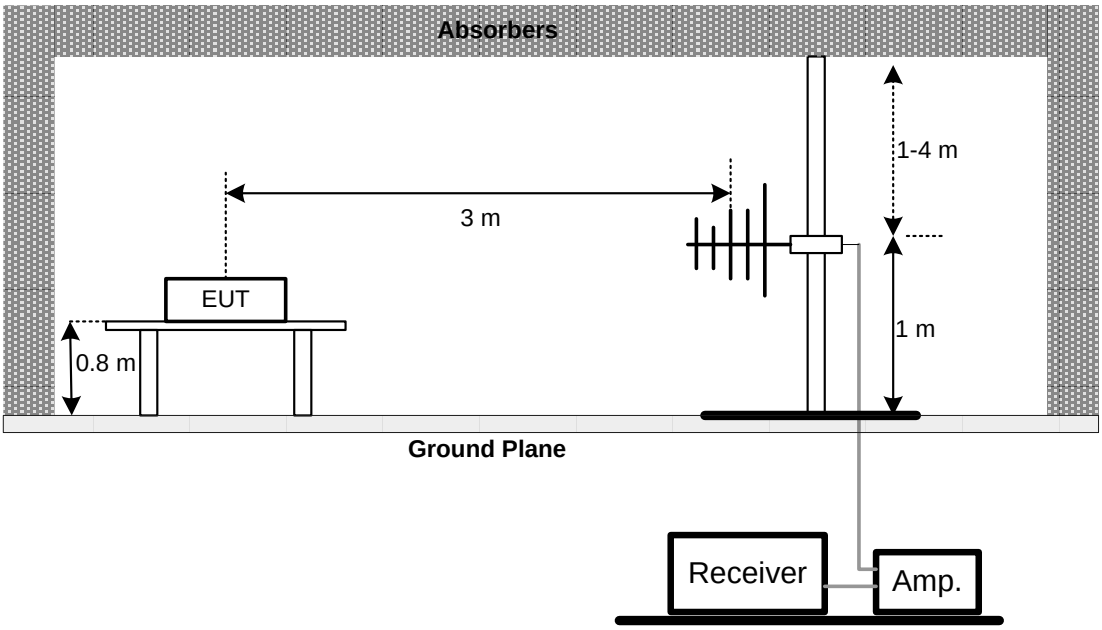

Above 1 GHz

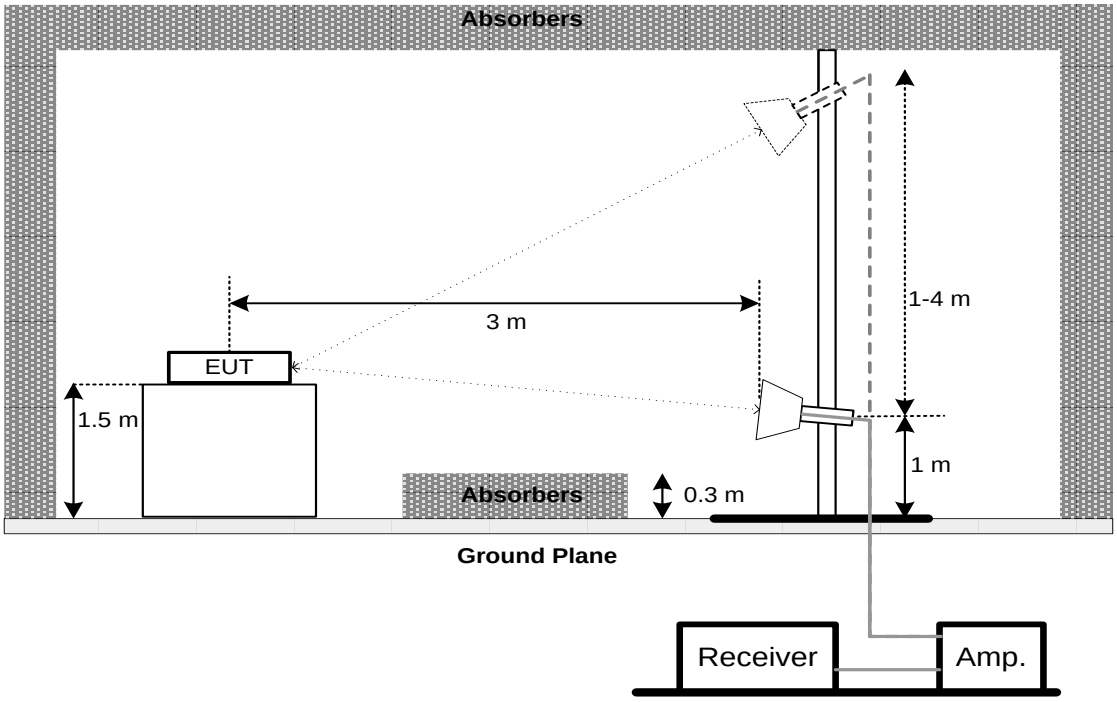
Absorbers
3 m
1-4 m
EUT
1.5 m
1 m
Absorbers
0.3 m
Ground Plane
Receiver
Amp.

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX C.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	Bandwidth	>= 500 kHz (6 dB bandwidth)

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting : RBW= 100 kHz, VBW=300 kHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 watt or 30 dBm

6.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. The maximum conducted output power was performed in accordance with method 11.9.1.1 (for peak power) or 11.9.2.2 (for AVG power) of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting : RBW= 100 kHz, VBW=300 kHz, Sweep time = 10 ms.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 29, 2020
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	Test Cable	emci	EMCRG400-BM-NM-10000	170628	Apr. 17, 2020
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 29, 2020
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 29, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 29, 2020
2	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 29, 2020
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 29, 2020
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
9	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Mar. 29, 2020
10	Pre-Amplifier	emci	EMC184045SE	980409	Mar. 29, 2020
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 29, 2020
12	Test Cable	emci	EMC102-KM-KM-800	170654	Apr. 17, 2020
13	Test Cable	emci	Super Reliable-40G-SS11-7000	W0030860001	Apr. 17, 2020
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Antenna Conducted Spurious Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Remark: “N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Emissions Test Photos

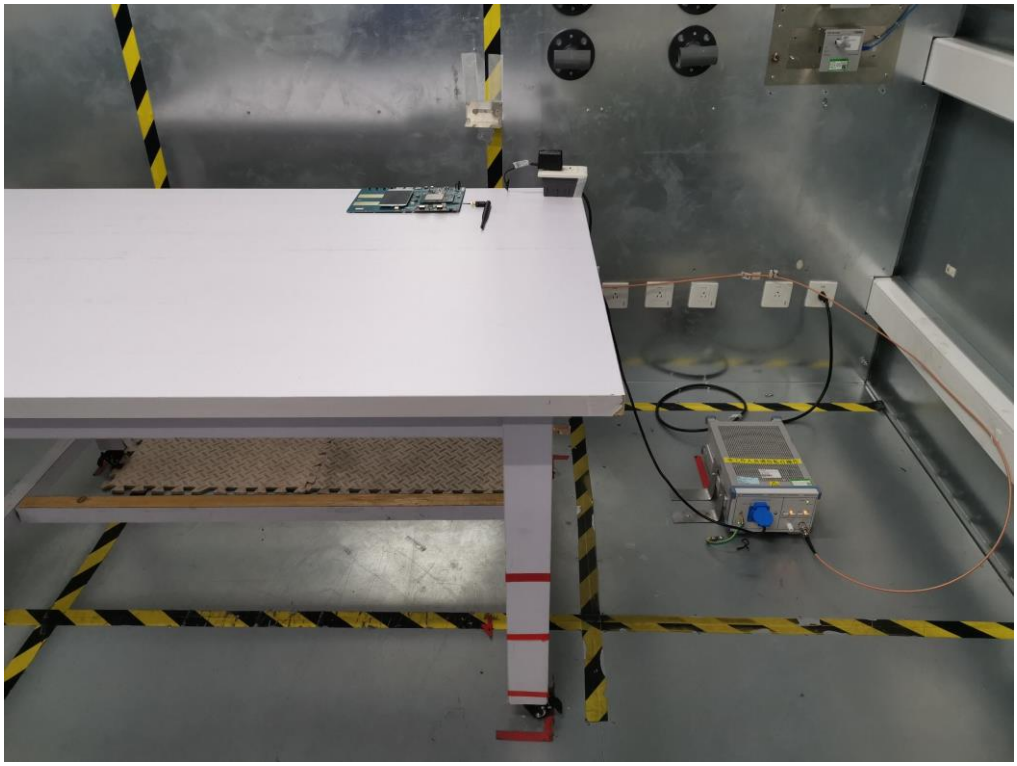

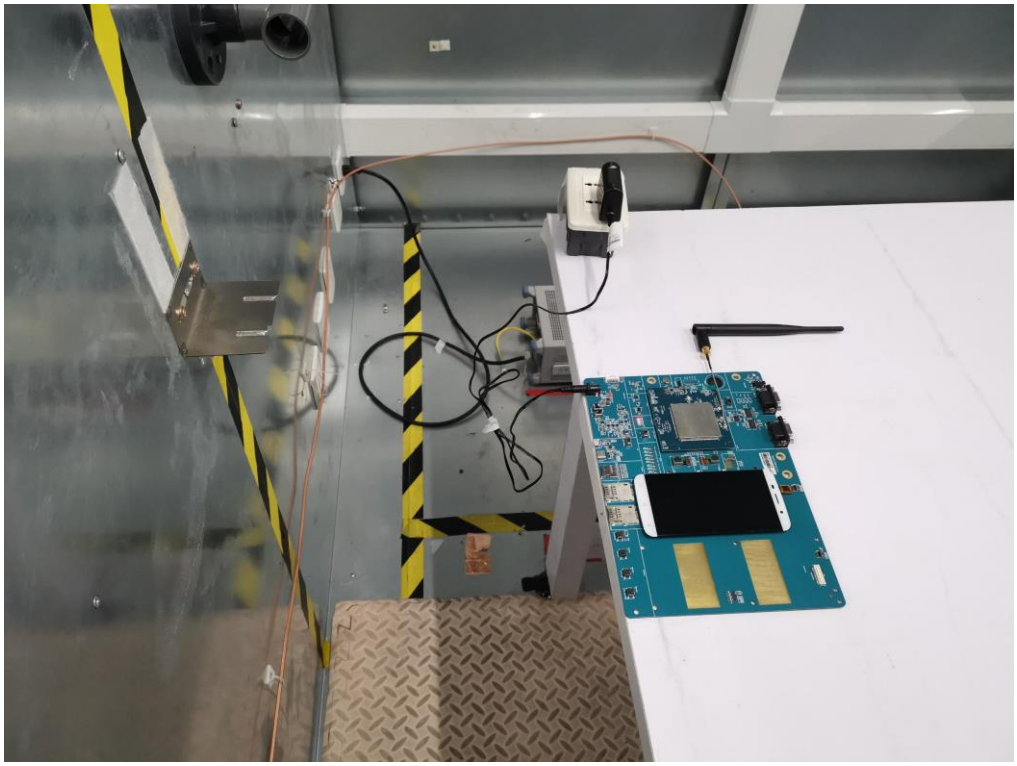

Radiated Emissions Test Photos

30 MHz to 1000 MHz

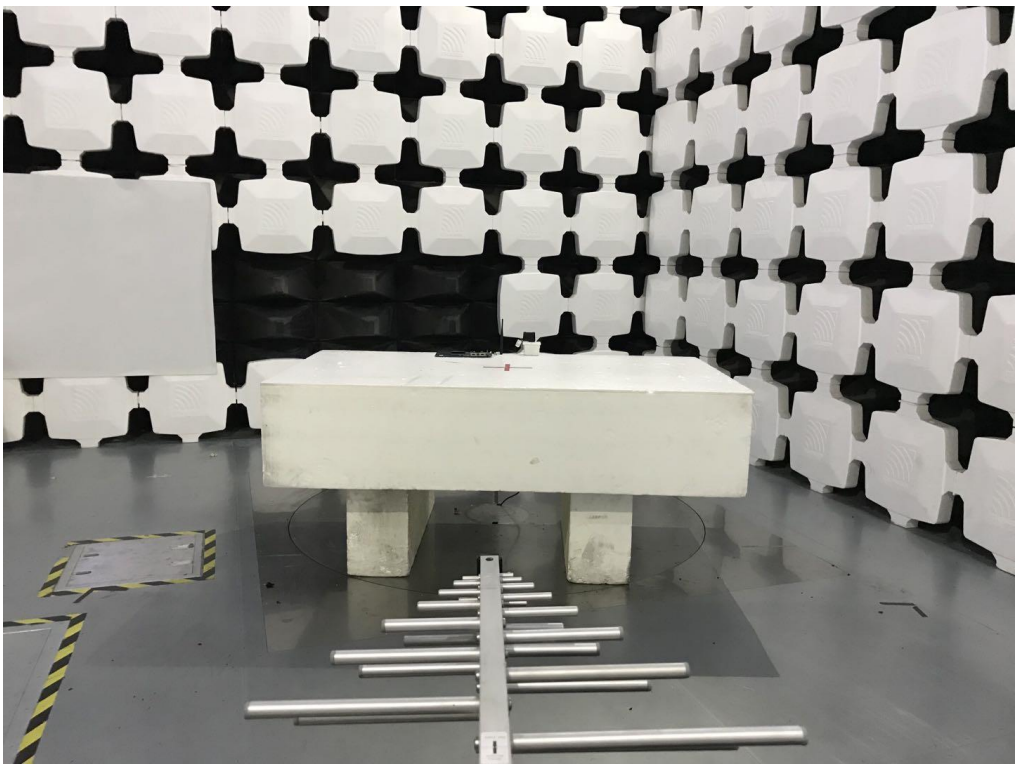

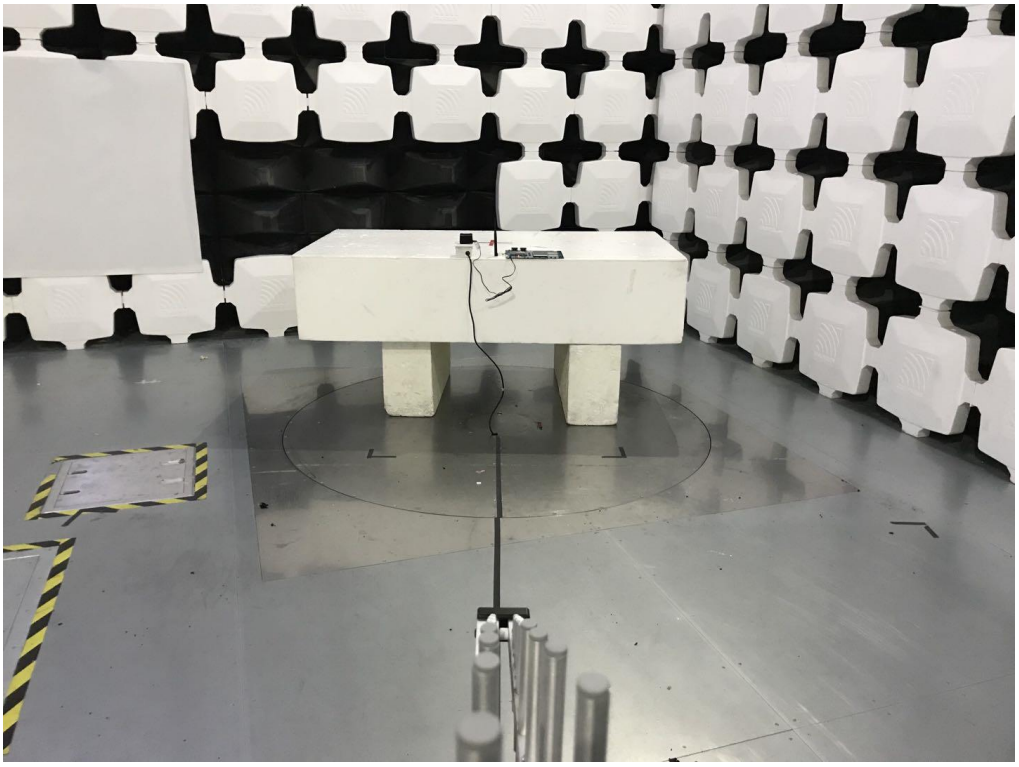

Radiated Emissions Test Photos

Above 1 GHz

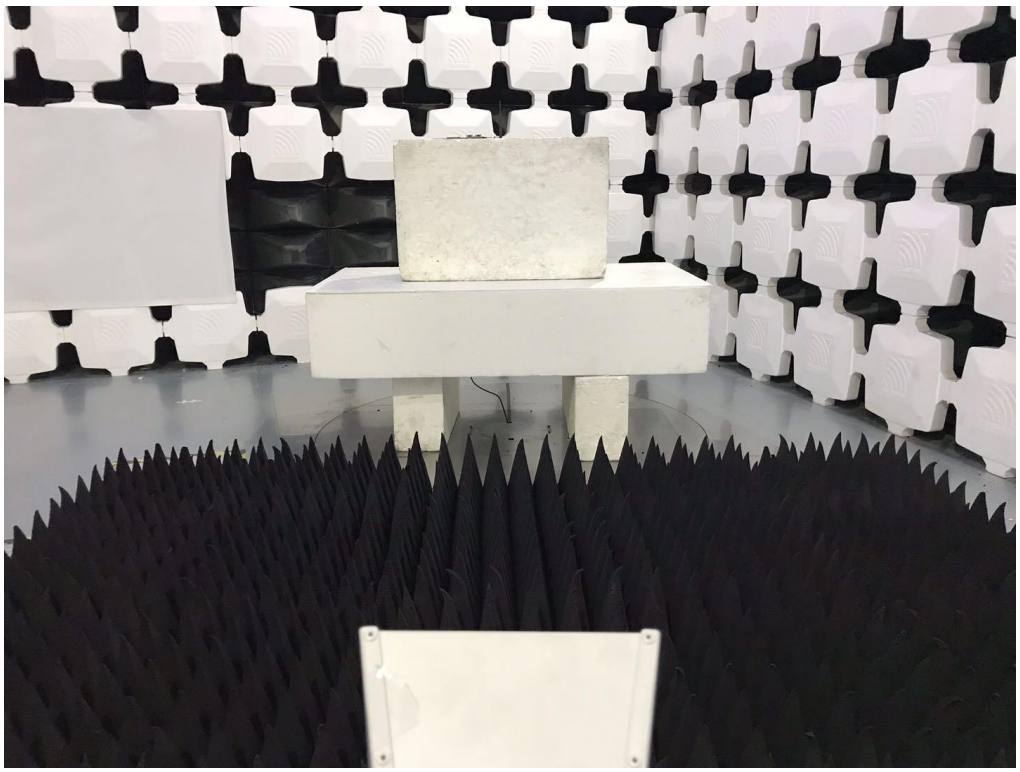

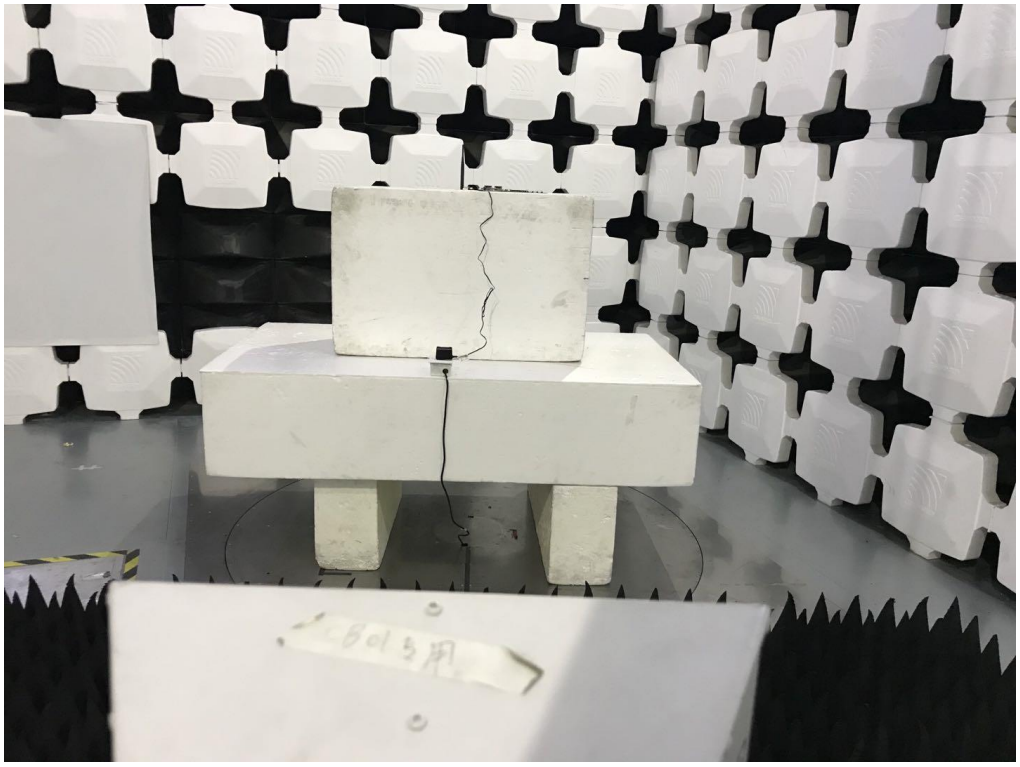

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode:	TX 2402MHz_CH00_1Mbps

Line

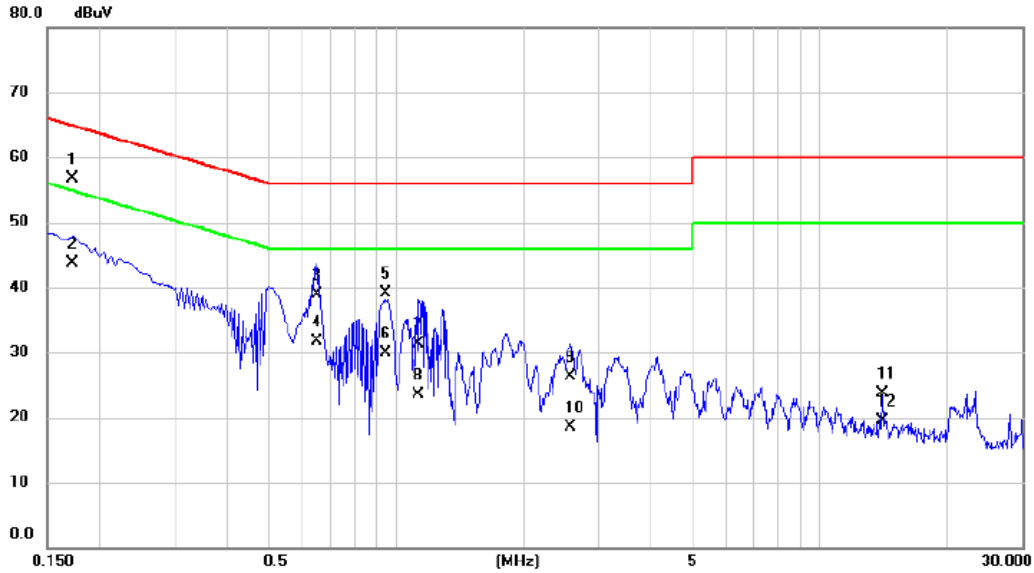

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1725	46.90	9.75	56.65	64.84	-8.19	QP	
2		0.1725	33.90	9.75	43.65	54.84	-11.19	AVG	
3		0.6495	29.10	9.86	38.96	56.00	-17.04	QP	
4		0.6495	21.90	9.86	31.76	46.00	-14.24	AVG	
5		0.9465	29.30	9.76	39.06	56.00	-16.94	QP	
6		0.9465	20.10	9.76	29.86	46.00	-16.14	AVG	
7		1.1310	21.60	9.75	31.35	56.00	-24.65	QP	
8		1.1310	13.80	9.75	23.55	46.00	-22.45	AVG	
9		2.5845	16.40	9.83	26.23	56.00	-29.77	QP	
10		2.5845	8.70	9.83	18.53	46.00	-27.47	AVG	
11		14.0010	13.60	10.19	23.79	60.00	-36.21	QP	
12		14.0010	9.40	10.19	19.59	50.00	-30.41	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402MHz_CH00_1Mbps

Neutral

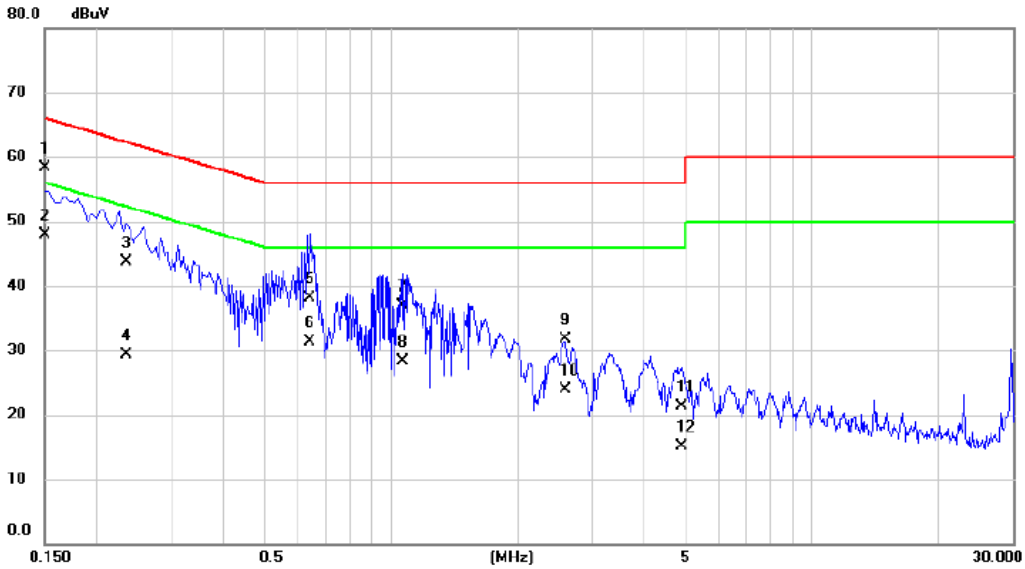

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1507	48.60	9.61	58.21	65.96	-7.75	QP	
2		0.1507	38.30	9.61	47.91	55.96	-8.05	AVG	
3		0.2355	34.00	9.63	43.63	62.25	-18.62	QP	
4		0.2355	19.70	9.63	29.33	52.25	-22.92	AVG	
5		0.6404	28.40	9.71	38.11	56.00	-17.89	QP	
6		0.6404	21.50	9.71	31.21	46.00	-14.79	AVG	
7		1.0680	27.10	9.72	36.82	56.00	-19.18	QP	
8		1.0680	18.50	9.72	28.22	46.00	-17.78	AVG	
9		2.5980	21.90	9.82	31.72	56.00	-24.28	QP	
10		2.5980	14.10	9.82	23.92	46.00	-22.08	AVG	
11		4.8930	11.30	9.94	21.24	56.00	-34.76	QP	
12		4.8930	5.10	9.94	15.04	46.00	-30.96	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode:	TX Mode Channel 00 _1Mbps

Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		35.8200	49.74	-17.08	32.66	40.00	-7.34	peak	
2	*	62.0100	52.68	-18.11	34.57	40.00	-5.43	peak	
3		62.0100	39.12	-18.11	21.01	40.00	-18.99	peak	
4		148.3400	47.82	-14.94	32.88	43.50	-10.62	peak	
5		408.3000	37.86	-13.54	24.32	46.00	-21.68	peak	
6		548.9500	42.64	-11.27	31.37	46.00	-14.63	peak	
7		941.3150	36.83	-5.19	31.64	46.00	-14.36	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 00 _1Mbps

Horizontal

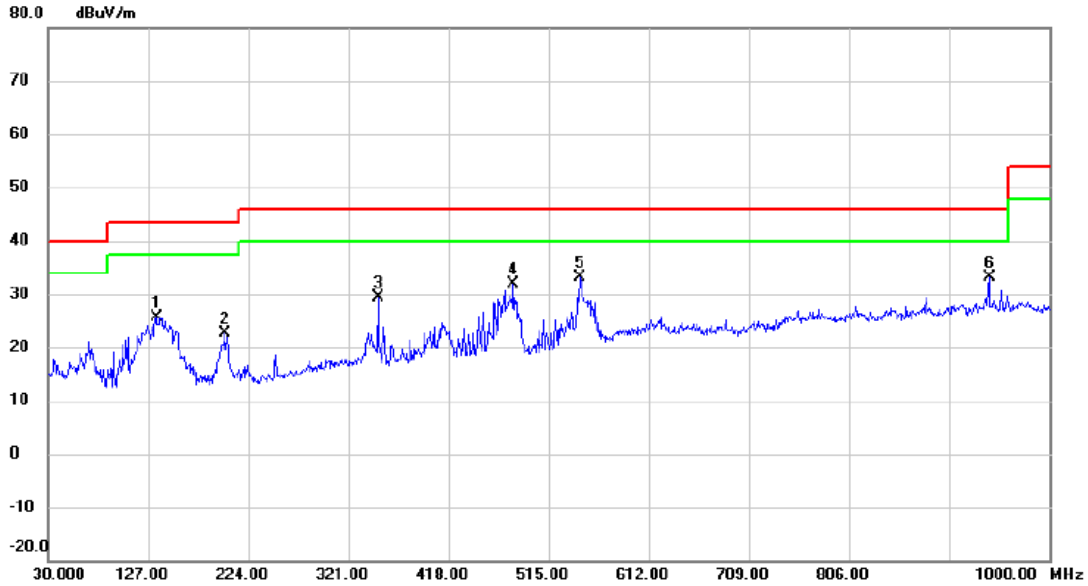

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		134.7600	41.91	-16.32	25.59	43.50	-17.91	peak	
2		201.6900	41.47	-18.83	22.64	43.50	-20.86	peak	
3		349.6150	43.02	-13.72	29.30	46.00	-16.70	peak	
4		481.0500	44.73	-12.82	31.91	46.00	-14.09	peak	
5	*	545.5550	44.45	-11.37	33.08	46.00	-12.92	peak	
6		941.8000	38.21	-5.19	33.02	46.00	-12.98	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode :	TX 2402 MHz _CH00_1Mbps

Vertical

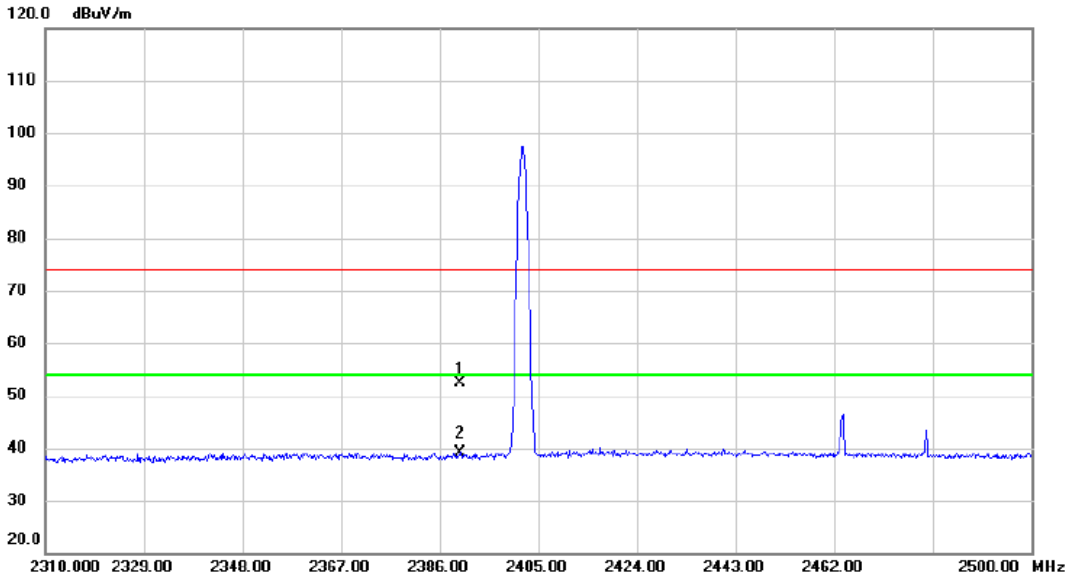

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	20.11	32.39	52.50	74.00	-21.50	peak	
2	*	2390.000	6.86	32.39	39.25	54.00	-14.75	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2402 MHz _CH00_1Mbps

Vertical

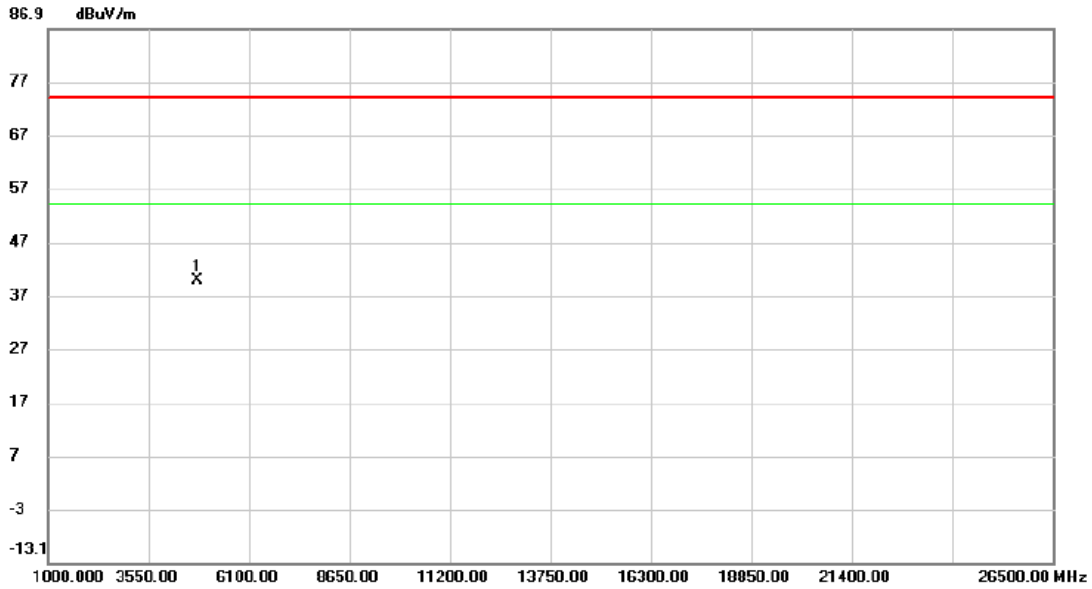

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.000	49.66	-9.77	39.89	74.00	-34.11	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2402 MHz _CH00_1Mbps

Horizontal

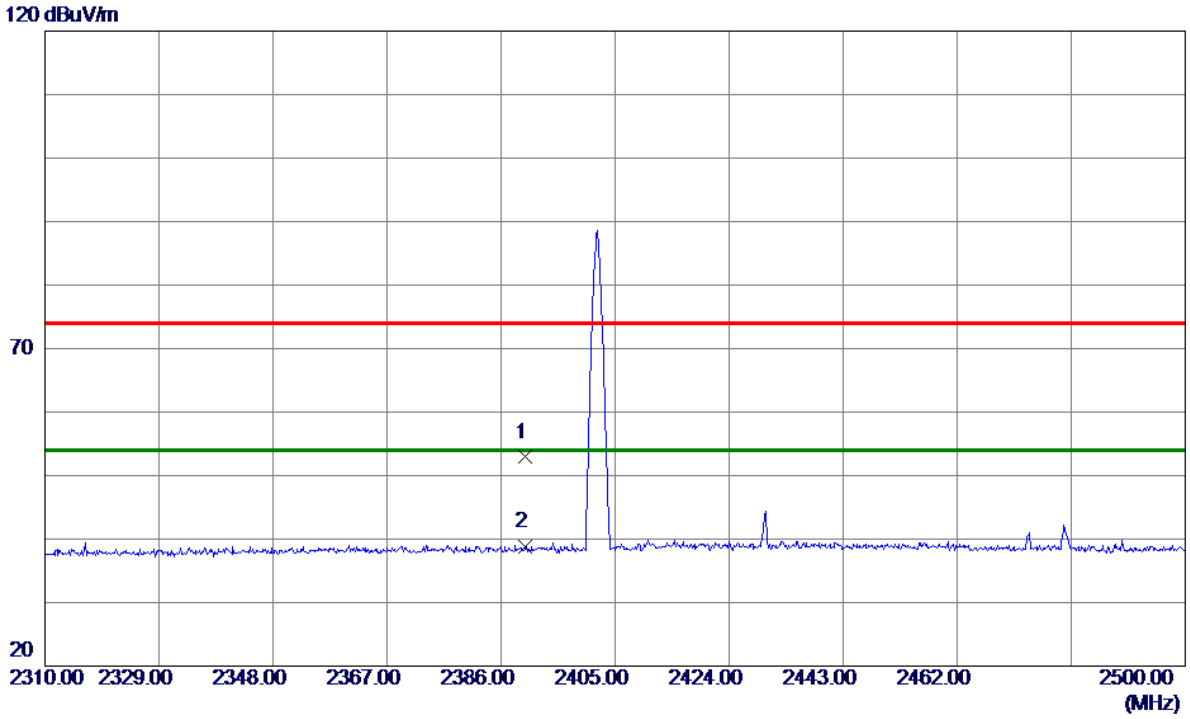

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	20.51	32.39	52.90	74.00	-21.10	Peak	
2 *	2390.0000	6.32	32.39	38.71	54.00	-15.29	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2402 MHz _CH00_1Mbps

Horizontal

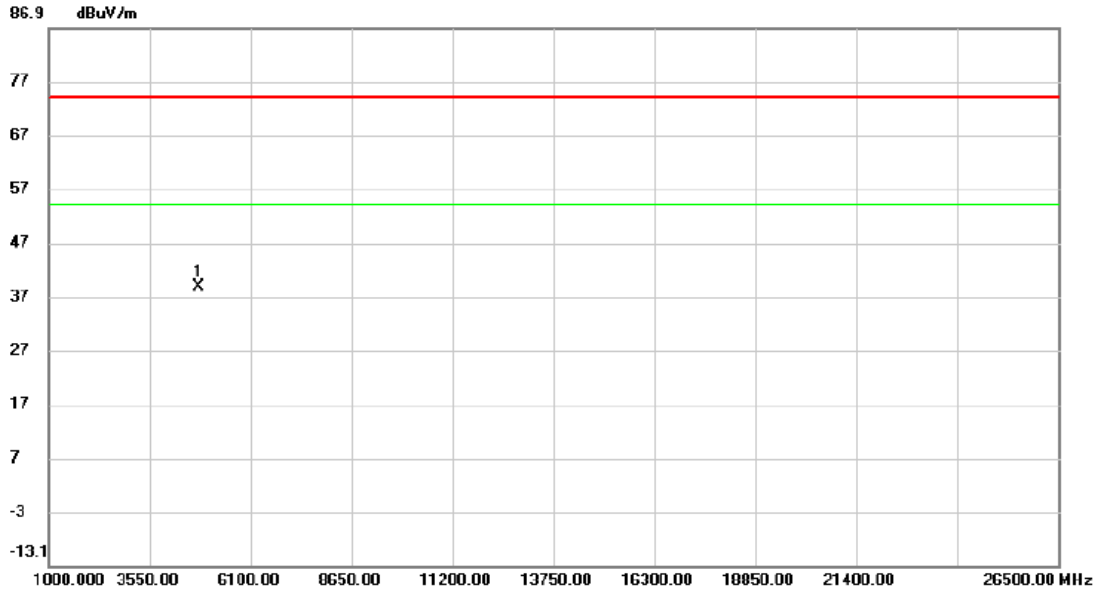

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.000	48.55	-9.77	38.78	74.00	-35.22	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2440 MHz _CH19_1Mbps

Vertical

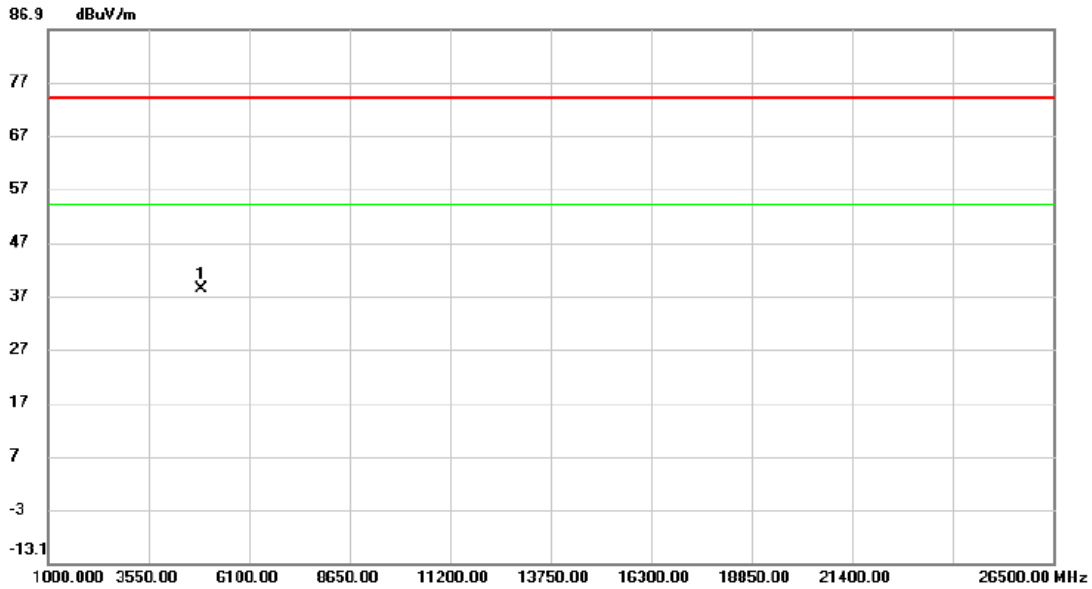

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4880.000	47.82	-9.48	38.34	74.00	-35.66	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2440 MHz _CH19_1Mbps

Horizontal

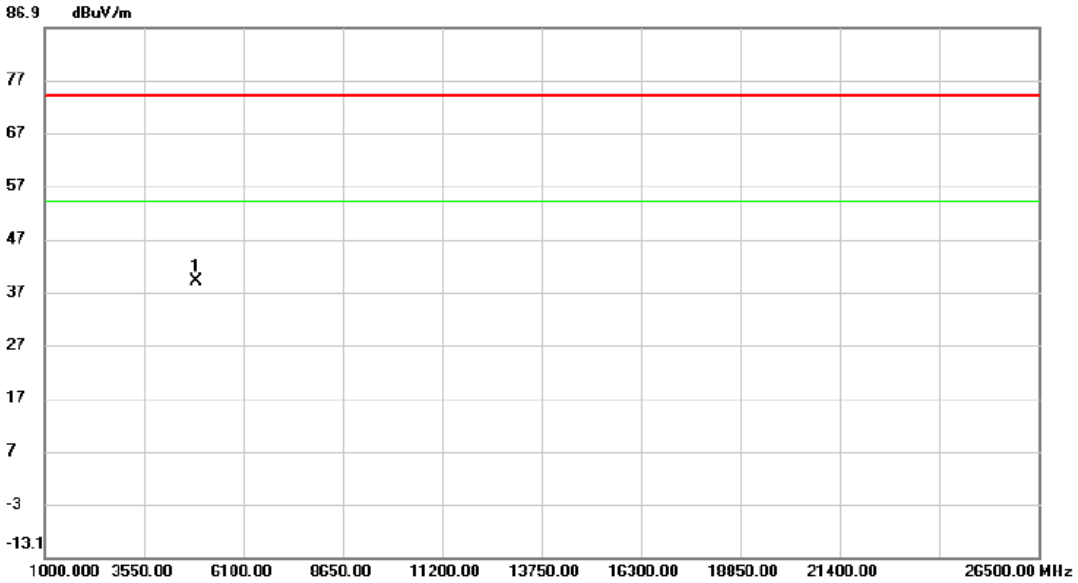

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4880.000	48.52	-9.48	39.04	74.00	-34.96	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2480 MHz _CH39_1Mbps

Vertical

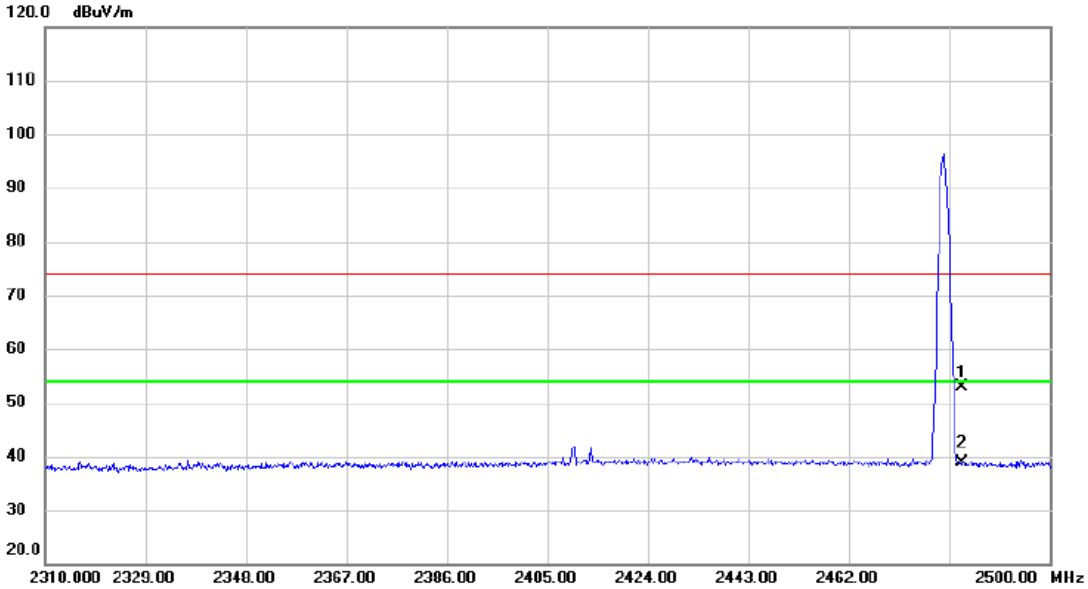

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	20.14	32.66	52.80	74.00	-21.20	peak	
2	*	2483.500	6.27	32.66	38.93	54.00	-15.07	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2480 MHz _CH39_1Mbps

Vertical

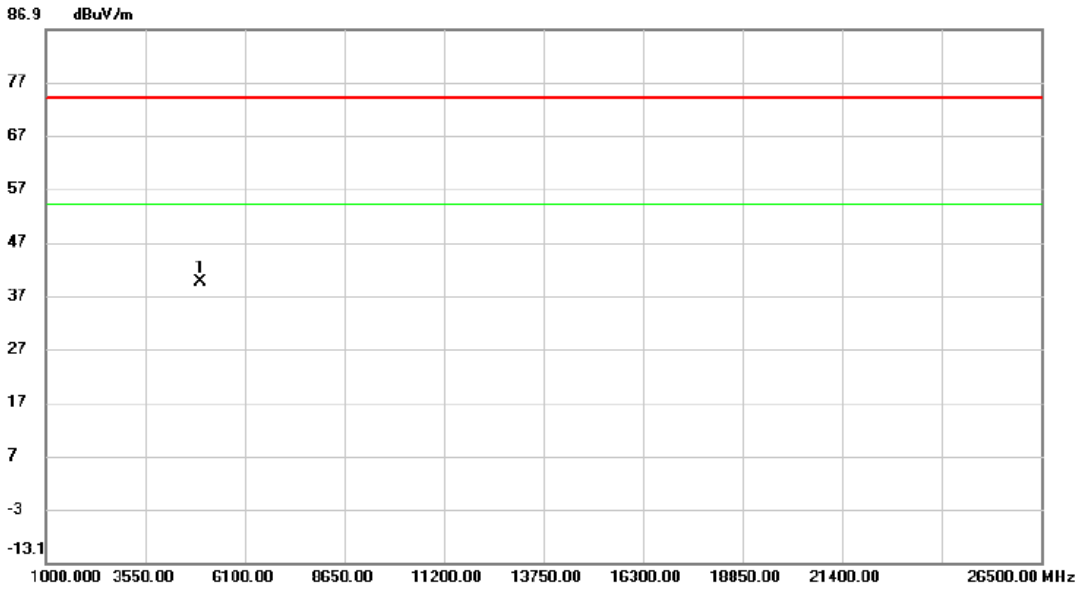

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.000	48.64	-9.17	39.47	74.00	-34.53	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2480 MHz _CH39_1Mbps

Horizontal

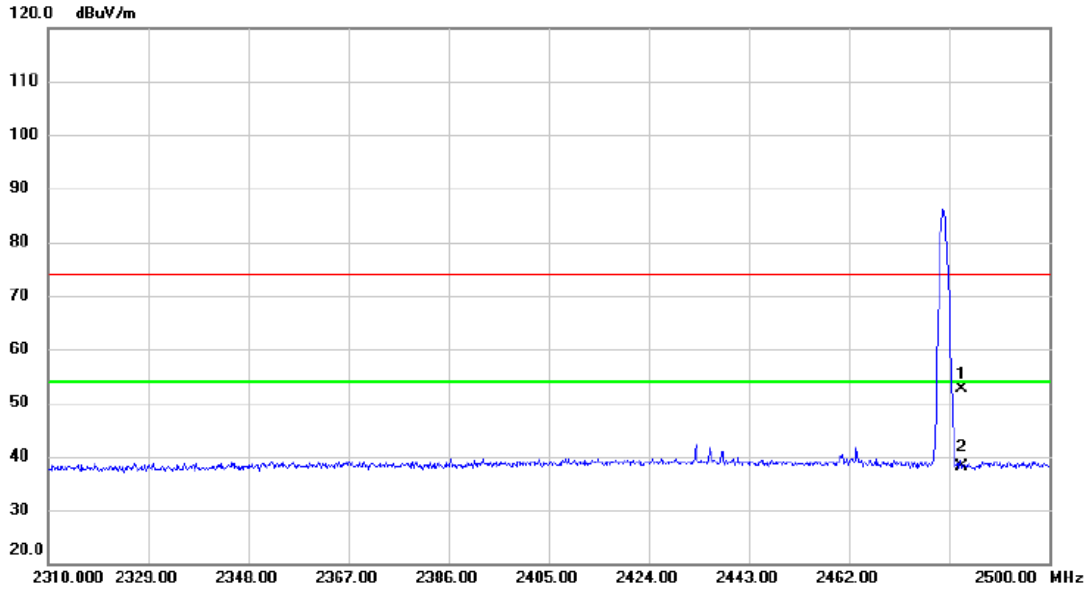

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	19.98	32.66	52.64	74.00	-21.36	peak	
2	*	2483.500	5.52	32.66	38.18	54.00	-15.82	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode :	TX 2480 MHz _CH39_1Mbps

Horizontal

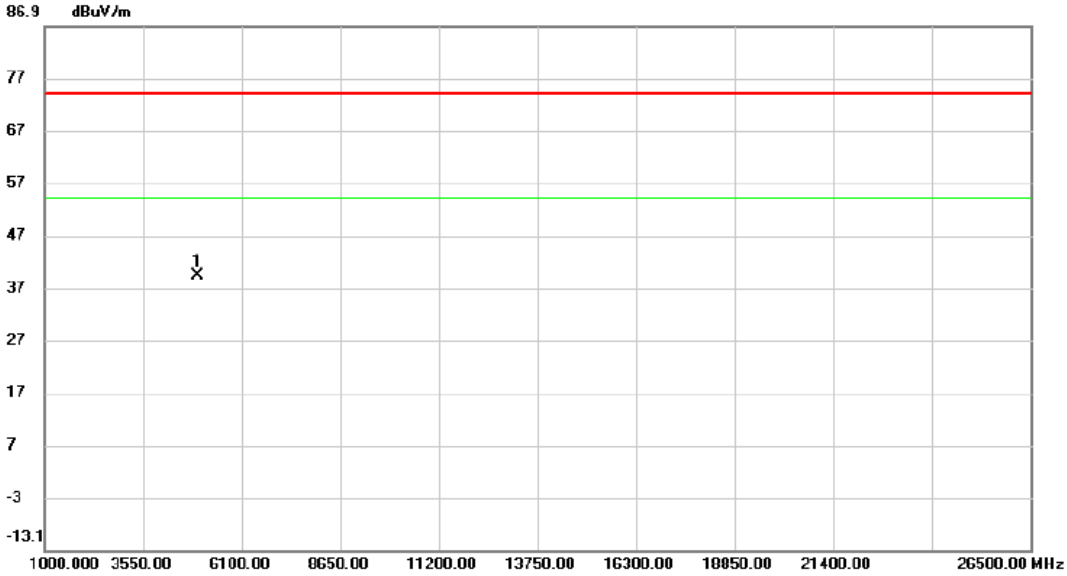

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4960.000	48.55	-9.17	39.38	74.00	-34.62	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode:	CH00, CH19 , CH39 - 1Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Test Result
00	2402	0.676	1.080	500	Pass
19	2440	0.682	1.080	500	Pass
39	2480	0.666	1.080	500	Pass

CH00

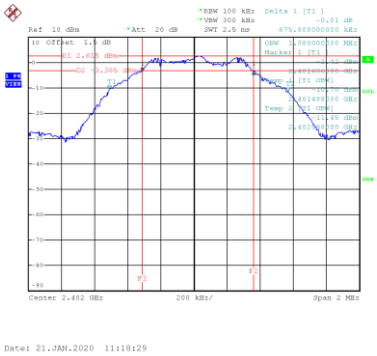

Date: 21.JAN.2020 11:18:29

CH19

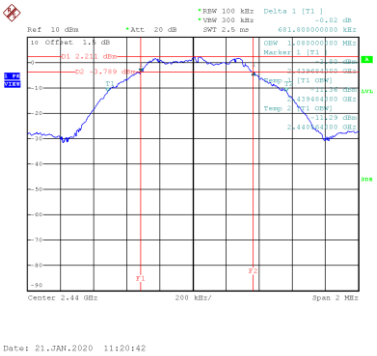

Date: 21.JAN.2020 11:20:42

CH39

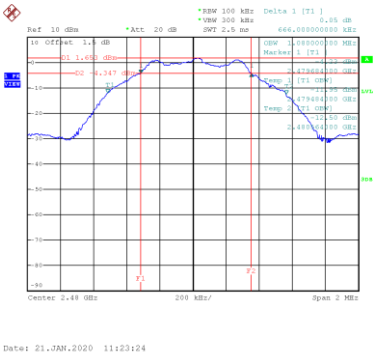

Date: 21.JAN.2020 11:23:24

APPENDIX E - MAXIMUM OUTPUT POWER

Test Mode :	CH00, CH19 , CH39 - 1Mbps

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.21	0.0021	30.00	1.00	Pass
2440	2.88	0.0019	30.00	1.00	Pass
2480	2.29	0.0017	30.00	1.00	Pass

APPENDIX F - CONDUCTED SPURIOUS EMISSION

Test Mode :	CH00, CH19 , CH39 - 1Mbps

Bandedge CH00 (Lower)

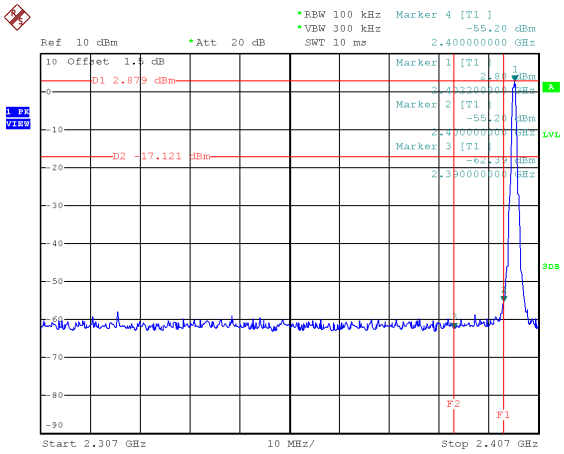

Date: 21.JAN.2020 11:18:37

Bandedge CH39 (Upper)

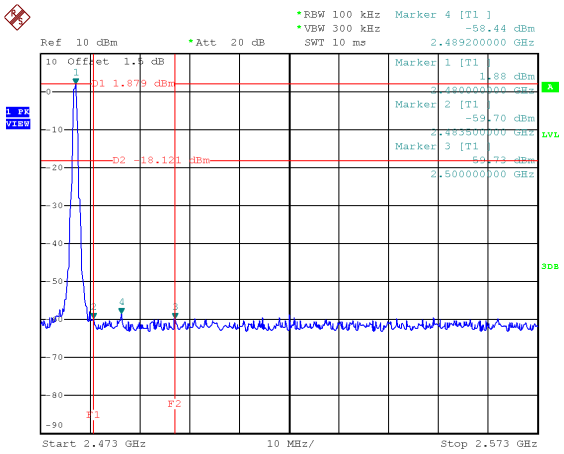

Date: 21.JAN.2020 11:23:31

CH00 – 10th Harmonic of the fundamental frequency

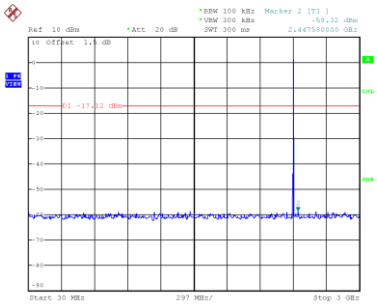

Date: 21.JAN.2020 11:18:50

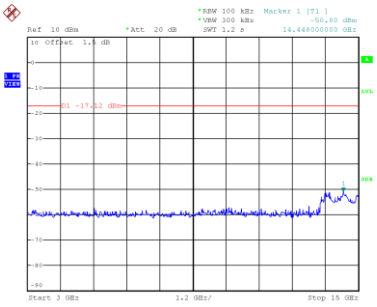

Date: 21.JAN.2020 11:18:57

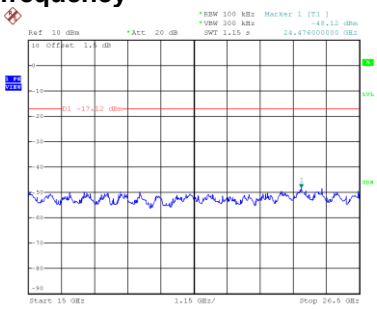

Date: 21.JAN.2020 11:19:04

CH19 – 10th Harmonic of the fundamental frequency

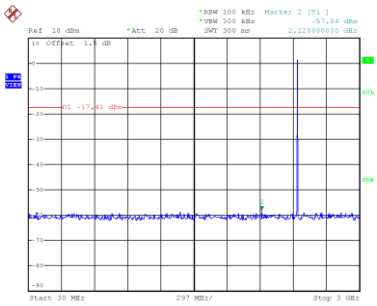

Date: 21.JAN.2020 11:21:03

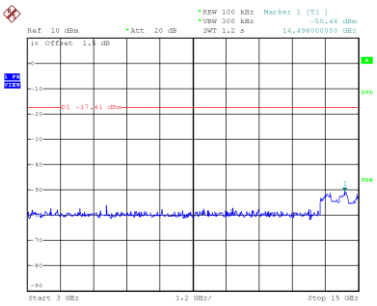

Date: 21.JAN.2020 11:21:10

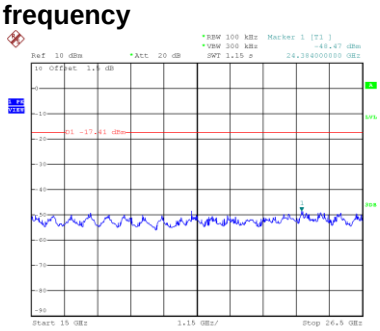

Date: 21.JAN.2020 11:21:17

CH39 – 10th Harmonic of the fundamental frequency

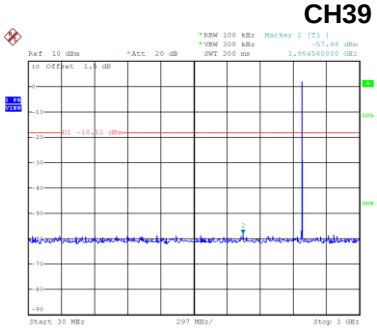

Date: 21.JAN.2020 11:23:44

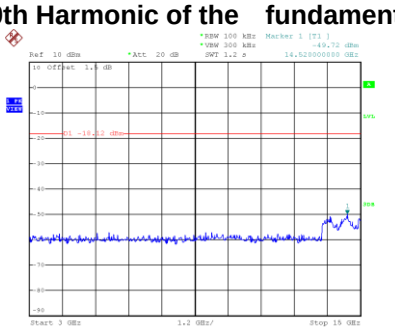

Date: 21.JAN.2020 11:23:52

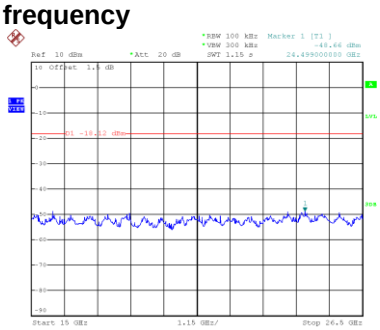

Date: 21.JAN.2020 11:23:59

APPENDIX G - POWER SPECTRAL DENSITY

Test Mode:	CH00, CH19 , CH39 - 1Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-12.62	8.00	Pass
19	2440	-12.94	8.00	Pass
39	2480	-13.57	8.00	Pass

CH00

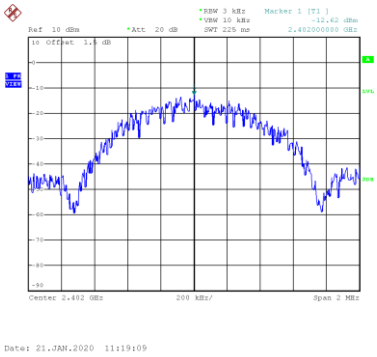

CH19

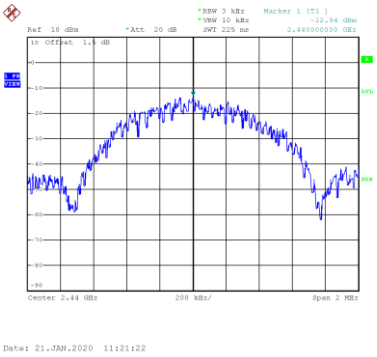

CH39

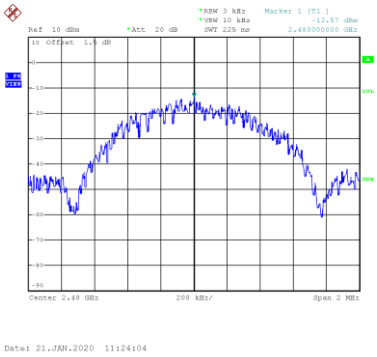

End of Test Report.