


Site	WZ-AC2	Test Date	2026-01-20
Temperature	23.6 °C	Humidity	33.1%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 3DH5 at 2480 MHz		

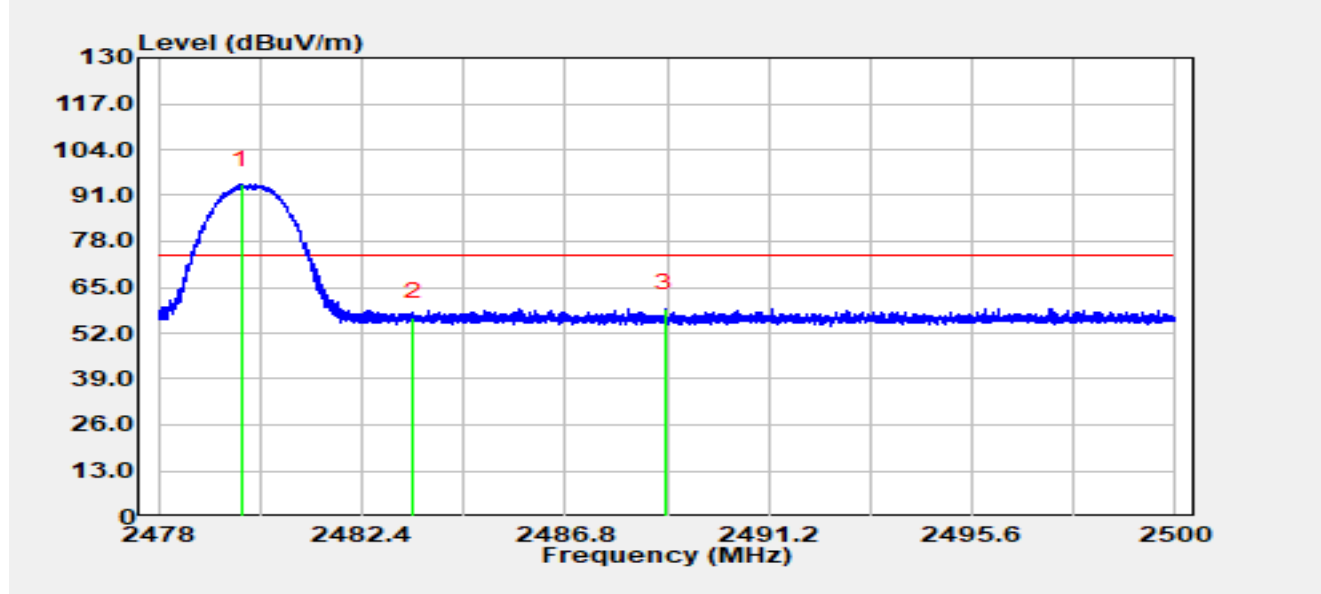


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.78	61.38	32.77	94.16	N/A	N/A	Peak
2		2483.50	23.66	32.77	56.43	-17.57	74.00	Peak
3	*	2488.97	26.23	32.76	58.99	-15.01	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-20
Temperature	23.6 °C	Humidity	33.1%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 3DH5 at 2480 MHz		

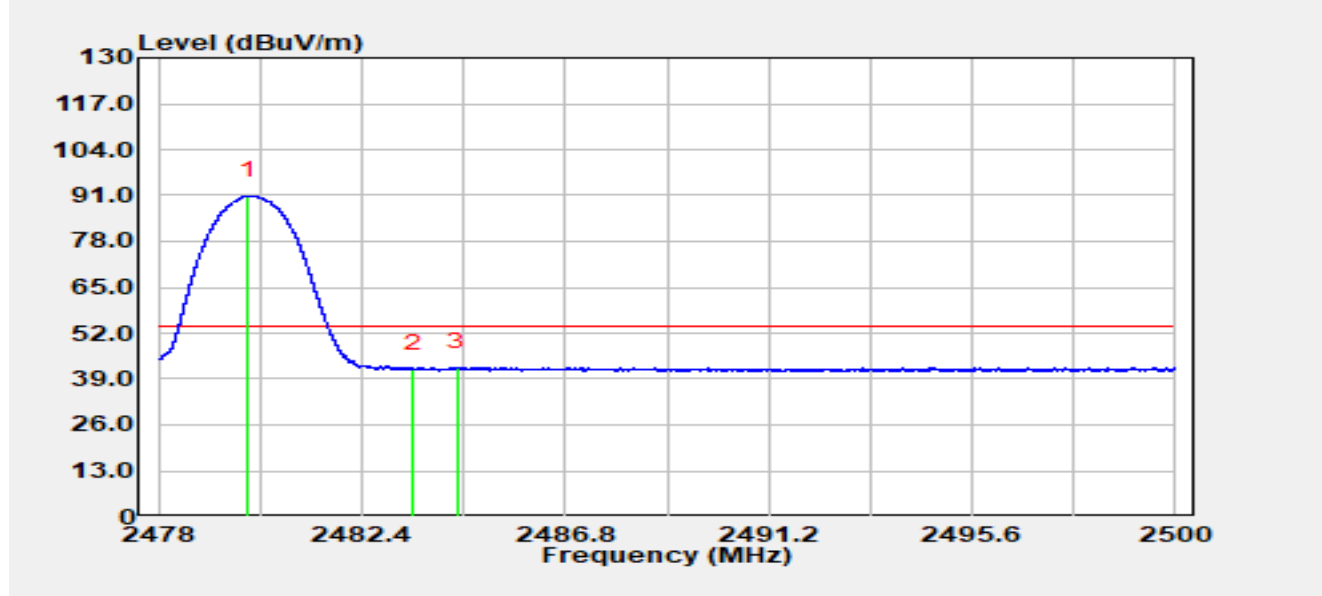


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.95	58.07	32.77	90.84	N/A	N/A	Average
2		2483.50	9.02	32.77	41.79	-12.21	54.00	Average
3	*	2484.46	9.63	32.77	42.40	-11.60	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-20
Temperature	23.6 °C	Humidity	33.1%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 3DH5 at 2480 MHz		

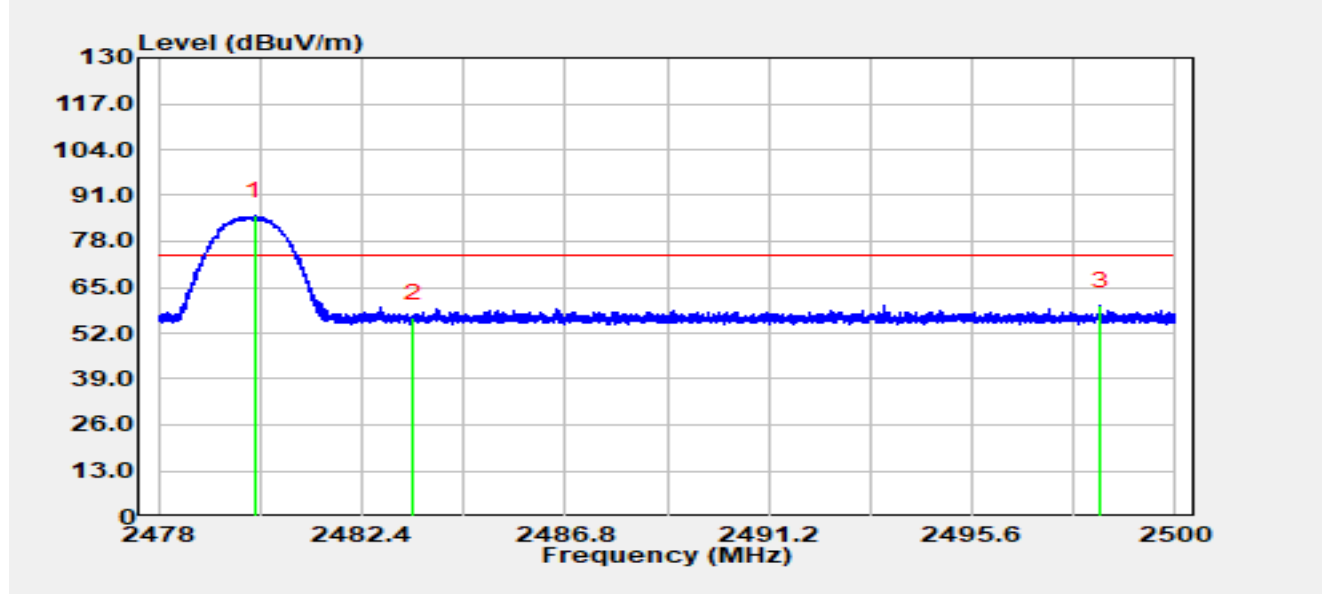


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.07	52.35	32.77	85.12	N/A	N/A	Peak
2		2483.50	23.53	32.77	56.30	-17.70	74.00	Peak
3	*	2498.37	27.07	32.77	59.84	-14.16	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2026-01-20
Temperature	23.6 °C	Humidity	33.1%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 3DH5 at 2480 MHz		

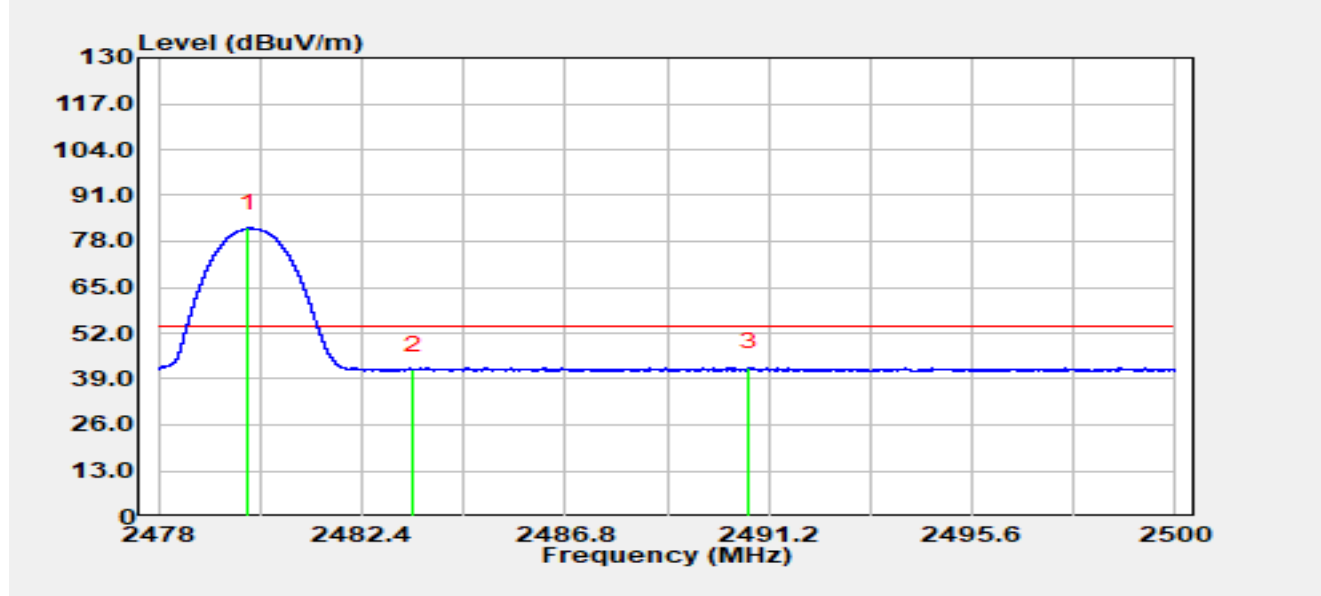


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.93	48.93	32.77	81.70	N/A	N/A	Average
2		2483.50	8.86	32.77	41.62	-12.38	54.00	Average
3	*	2490.78	9.58	32.76	42.34	-11.66	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.11 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2026-01-15
Temperature	19.2 °C	Humidity	37.7%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 3DH5 at 2402 MHz		

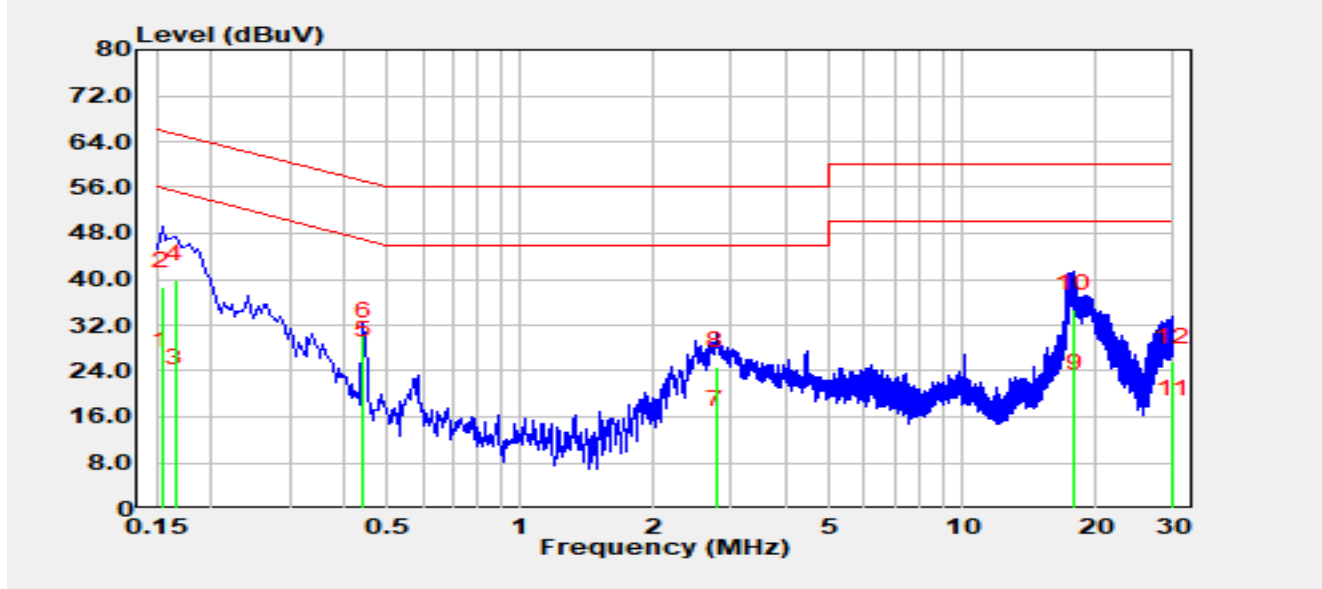


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	15.30	9.67	24.97	-30.81	55.78	Average
2		0.15	29.00	9.67	38.67	-27.11	65.78	QP
3		0.17	12.20	9.67	21.87	-33.28	55.16	Average
4		0.17	30.30	9.67	39.97	-25.18	65.16	QP
5	*	0.44	16.80	9.77	26.57	-20.45	47.02	Average
6		0.44	20.30	9.77	30.07	-26.95	57.02	QP
7		2.78	4.60	10.06	14.66	-31.34	46.00	Average
8		2.78	14.70	10.06	24.76	-31.24	56.00	QP
9		17.91	10.50	10.52	21.02	-28.98	50.00	Average
10		17.91	24.30	10.52	34.82	-25.18	60.00	QP
11		29.91	5.70	10.83	16.53	-33.47	50.00	Average
12		29.91	14.70	10.83	25.53	-34.47	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2026-01-15
Temperature	19.2 °C	Humidity	37.7%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 3DH5 at 2402 MHz		

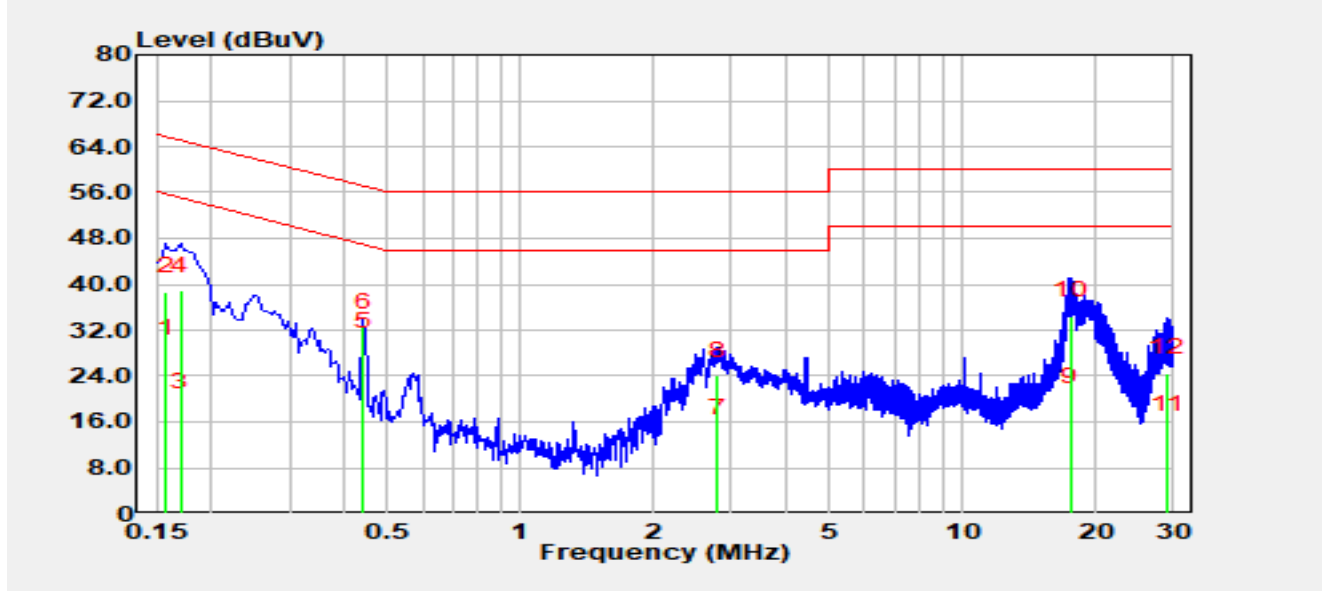

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.16	18.00	9.79	27.79	-27.78	55.57	Average
2		0.16	28.90	9.79	38.69	-26.88	65.57	QP
3		0.17	8.90	9.80	18.70	-36.26	54.96	Average
4		0.17	29.10	9.80	38.90	-26.06	64.96	QP
5	*	0.44	19.10	9.88	28.98	-18.04	47.02	Average
6		0.44	22.70	9.88	32.58	-24.44	57.02	QP
7		2.79	3.90	10.16	14.06	-31.94	46.00	Average
8		2.79	13.90	10.16	24.06	-31.94	56.00	QP
9		17.52	8.80	10.63	19.43	-30.57	50.00	Average
10		17.52	23.80	10.63	34.43	-25.57	60.00	QP
11		29.19	3.80	10.95	14.75	-35.25	50.00	Average
12		29.19	13.60	10.95	24.55	-35.45	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1044112-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1044112-UE" file.

_____ The End _____