



RF TEST REPORT

FCC ID: 2AXXQHNR2306

Test Report No.....: RF250901013-01-004

Product(s) Name.....: Tri-Band AP Router

Model(s).....: HNR2306P, HNR2306A

Trade Mark.....: HUMAX Networks Inc.

Applicant.....: Humax Networks, INC

Address.....: 216, Hwangsaеul-ro, Bundang-gu, Seongnam-si, South Korea
13595

Receipt Date.....: 2025.09.26

Test Date.....: 2025.09.27~2025.10.27

Issued Date.....: 2025.11.03

Standards.....: 47 CFR FCC Part 15, Subpart E(Section 15.407);
ANSI C63.10:2013

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Basic Description of Equipment Under Test.....	5
1.4 Working Frequencies.....	6
2. Summary of Test Results	7
2.1 Summary of Test Items	7
2.2 Standards or specification	7
2.3 Test Instruments.....	8
2.4 Test Mode.....	9
2.5 Test Condition	9
2.6 Duty Cycle of Test Signal	10
2.7 Measurement Uncertainty	16
2.8 Test Location	16
2.9 Deviation from Standards	16
3. Test Procedure And Results	17
3.1 26dB & 99% Bandwidth Measurement.....	17
3.1.1 Limit	17
3.1.2 Test Procedure	17
3.1.3 Test Setup.....	17
3.1.4 Test Setup.....	18
3.1.5 Test Result.....	18
3.2 Transmitter power.....	409
3.2.1 Limit	409
3.2.2 Test Procedure	409
3.2.3 Test Setup.....	409
3.2.4 Table of Parameters of Text Software Setting	410
3.2.5 Test Result.....	414

3.3	Power Spectral Density Measurement	436
3.3.1	Limit	436
3.3.2	Test Procedure	436
3.3.3	Test Setting.....	436
3.3.4	Test Setup.....	436
3.3.5	Result.....	437
3.4	In-Band Emission Measurement	654
3.4.1	Test Limit	654
3.4.2	Test Procedure	654
3.4.3	Test Setting.....	654
3.4.6	The Result.....	656
3.5	Frequency Stability Measurement.....	851
3.5.1	Limit	851
3.5.2	Test Procedure	851
3.5.3	Test Setup.....	851
3.5.4	The Result.....	852
3.6	Contention Based Protocol Measurement.....	956
3.6.1	Test Limit	956
3.6.2	Test Procedure	956
3.6.3	Test Setting.....	956
3.6.4	Test Setup.....	957
3.6.5	Test Result.....	958
3.7	Radiated Spurious Emission Measurement	964
3.7.1	Test Limit	964
3.7.2	Test Procedure	964
3.7.3	Test Setting.....	965
3.7.4	Test Setup.....	966
3.7.5	Test Result.....	967
3.8	AC Conducted Emissions Measurement.....	1085
2.8.1	Test Limit	1085
2.8.2	Test Setup.....	1085
2.8.3	Test Result.....	1086

History of this test report

Original Report Issue Date: 2025.11.03

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Humax Networks, INC

216, Hwangsaеul-ro, Bundang-gu, Seongnam-si, South Korea 13595

1.2 Manufacturer

Humax Networks, INC

216, Hwangsaеul-ro, Bundang-gu, Seongnam-si, South Korea 13595

1.3 Basic Description of Equipment Under Test

Test sample no.	POC250901013-S001	
Product(s) Name	Tri-Band AP Router	
Test Model	HNR2306P	
Model Name	HNR2306P, HNR2306A	
Model difference	the model difference is: HNR2306P with VoIP port, HNR2306A without VoIP	
Trade Mark	HUMAX Networks Inc.	
Power Supply	DC 12V from adapter	
Adapter information	Model: NBS24N120200VU Input: 100-240V~, 50/60Hz, 0.6A Output: 12.0V===2.0A	
Operate temperature	0℃-40℃	
EUT Stage	○ Product Unit	● Final-Sample
Frequency Range	For 802.11ax-HE20: 5955 ~ 7115MHz For 802.11ax-HE40: 5965 ~ 7085MHz For 802.11ax-HE80: 5985 ~ 7025MHz For 802.11ax-HE160: 5985 ~ 7025MHz For 802.11be-HE20: 5955 ~ 7115MHz For 802.11be -HE40: 5965 ~ 7085MHz For 802.11be -HE80: 5985 ~ 7025MHz For 802.11be -HE160: 5985 ~ 7025MHz For 802.11be -HE320: 5985 ~ 7025MHz	
Max power	IEEE 802.11be320: 28.37dBm(0.687W)	
Modulation	OFDMA	
Data Rate (Mbps)	IEEE 802.11ax mode : up to 4803.9 IEEE 802.11be mode : up to 11529.6	
Antenna type	PCB device	
Antenna gain	Ant1: 5.01 dBi, Ant2: 5.54 dBi, Ant3:3.59 dBi, Ant4: 5.15 dBi	
Directional gain	Uncorrelated:1.28dBi(from the antenna report) Correlated:5.70dBi(from the antenna report)	

1.4 Working Frequencies

802.11a, 802.11ax-HE20, 802.11be-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	5955 MHz	05	5975 MHz	09	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	233	7115 MHz	--	--

802.11ax-HE40, 802.11be-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80, 802.11be-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
07	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160, 802.11be-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

802.11be-HE320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	129	6585 MHz
159	6745 MHz	191	6905 MHz	--	--

2. Summary of Test Results

2.1 Summary of Test Items

FCC Section(s)	Test project	Test method	Verdict
15.407(a)	26dB & 99% Bandwidth	Conducted	Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(a)(5)	Transmitter power		Pass
15.407(a)(5)	Peak Power Spectral Density (E.I.R.P)		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(g)	Frequency Stability		Pass
15.407(b)(6) 15.205 15.209	Unwanted Emissions	Radiated	Pass
15.207	AC Conducted Emissions	Line Conducted	Pass
15.203	Antenna Requirements	/	Note4

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode, and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- For AC Power Conducted Emission and Radiated Emission below 1GHz, Only the worst-case scenario of HNR2306P was recorded.
- The EUT have 4 PCB antennas arrangement which was permanently attached.
- EUT supports one configuration only in 802.11ax, 802.11be full RU mode.

2.2 Standards or specification

47 CFR FCC Part 15, Subpart E

KDB 662911 D01 Multiple Transmitter Output v02r01

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB987594 D01 U-NII 6GHz General Requirements v03r01

KDB 414788 D01 Radiated Test Site v01r01

ANSI C63.10:2013

2.3 Test Instruments

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2026/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2026/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2025/2/21	2026/2/20
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9021B	MY60080169	JLE050	2025/3/1	2026/2/28
2	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2025/3/1	2026/2/28
3	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2025/3/1	2026/2/28
4	VXG Signal Generator	Keysight	M9384B	MY61270787	JLE051	2025/6/10	2026/6/09
5	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2025/3/1	2026/2/28
6	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K5 0-116064-Dt	JLE054	2025/3/1	2026/2/28
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

2.4 Test Mode

The EUT was supplied by and it was run in TX mode that was controlled by Master provided RF testing program. The worst case test result was showed in the report.

Mode 1: Transmit by 802.11ax-HE20 MIMO(MCS0)
Mode 2: Transmit by 802.11ax-HE40 MIMO(MCS0)
Mode 3: Transmit by 802.11ax-HE80 MIMO(MCS0)
Mode 4: Transmit by 802.11ax-HE160 MIMO (MCS0)
Mode 5: Transmit by 802.11be-HE20MIMO (MCS0)
Mode 6: Transmit by 802.11be-HE40 MIMO(MCS0)
Mode 7: Transmit by 802.11be-HE80 MIMO(MCS0)
Mode 8: Transmit by 802.11be-HE160 MIMO (MCS0)
Mode 9: Transmit by 802.11be-HE320 MIMO (MCS0)

Note: For 802.11ax, 802.11be mode only support full RU mode.

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
26dB & 99% Bandwidth	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
In-Band Emission	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
Contention-Based Protocol	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
Frequency Stability	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
Transmitter power	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
Peak Power Spectral Density	23.4~25.3°C, 51~59% RH	DC 12V	Freedom Zhuo
Unwanted Emissions	23.8-24.6°C, 51-57% RH	AC 120V/60Hz	Lemon He
AC Conducted Emissions	23.8°C, 52% RH	AC 120V/60Hz	Keith Huang

Note: Adapter supply voltage AC 120V/60Hz.

The applicant declare the operating environment of EUT as below:

Normal conditions: DC 12V, 0~40°C

2.6 Duty Cycle of Test Signal

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

All the duty factor of other test mode have been considered.


TestMode	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11AX20MIMO	5955	1.50	1.53	98.04
11AX40MIMO	5965	0.78	0.82	95.12
11AX80MIMO	5985	0.40	0.44	90.91
11AX160MIMO	6025	0.24	0.28	85.71
11BE20MIMO	5955	1.49	1.52	98.03
11BE40MIMO	5965	0.78	0.81	96.30
11BE80MIMO	5985	0.41	0.44	93.18
11BE160MIMO	6025	0.24	0.27	88.89
11BE320MIMO	6105	0.16	0.19	84.21




NTNV-11AX20MIMO -5955

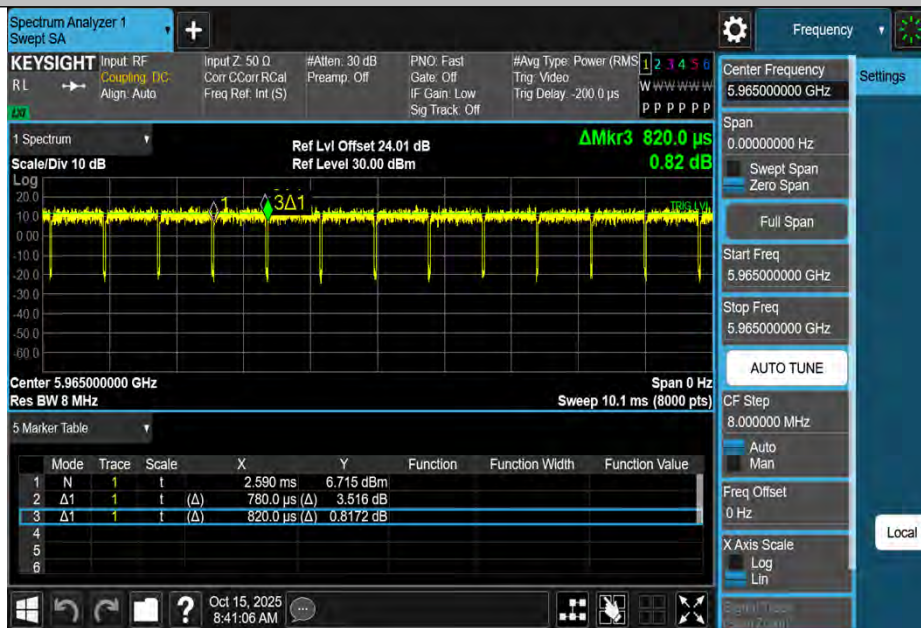


NTNV-11AX40MIMO -5965

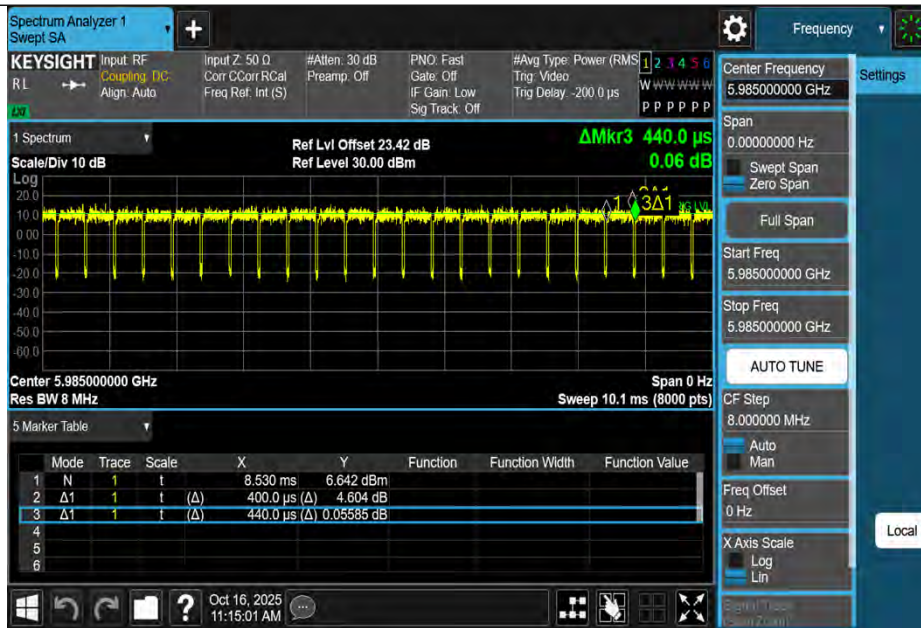


NTNV-11AX80MIMO -5985

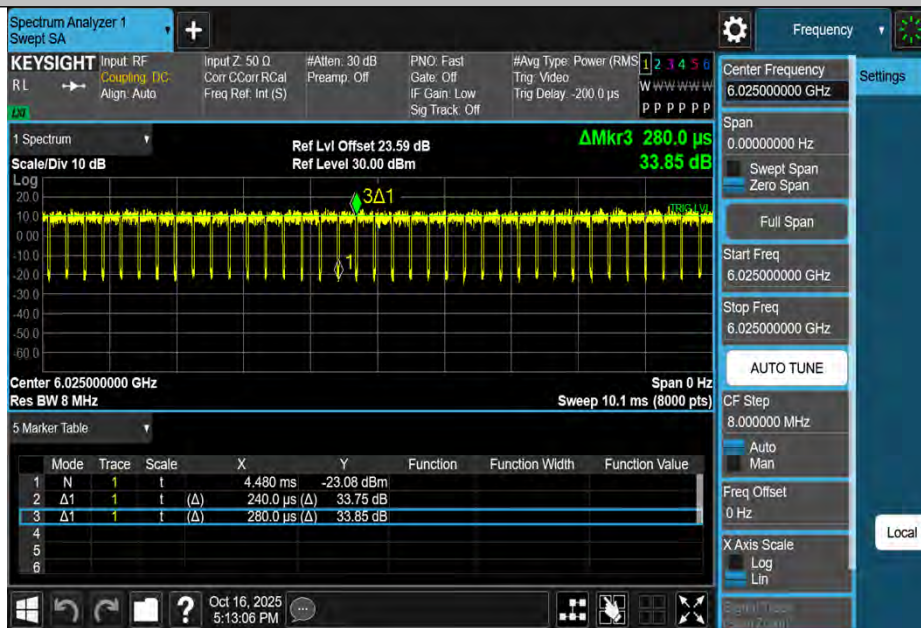


NTNV-11AX160MIMO -6025

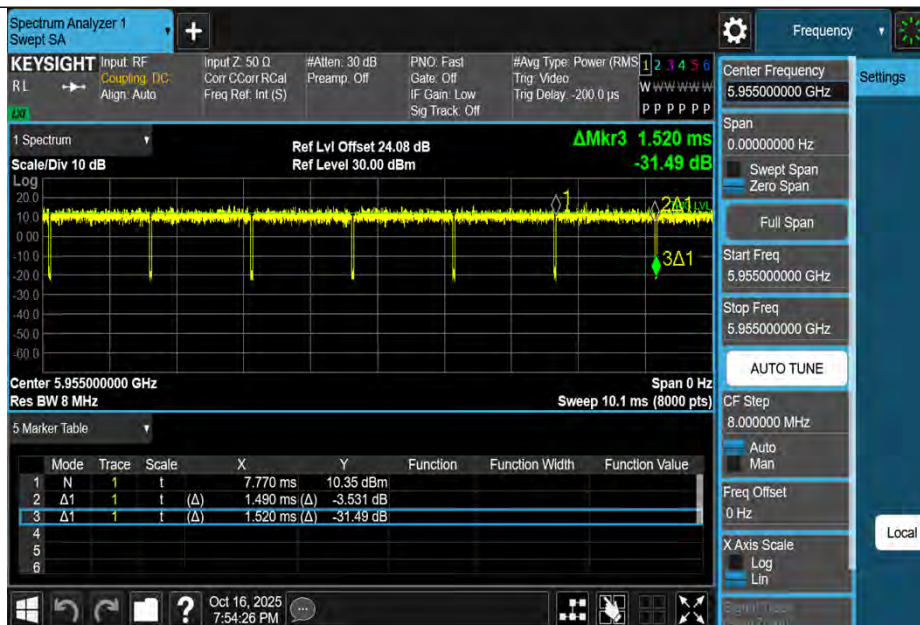


NTNV-11BE20MIMO -5955

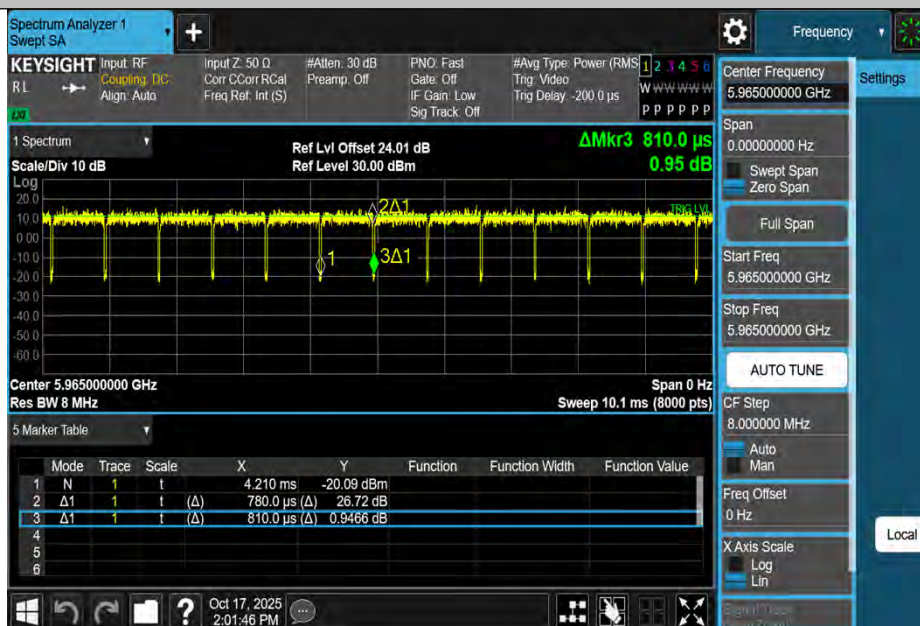


NTNV-11BE40MIMO -5965

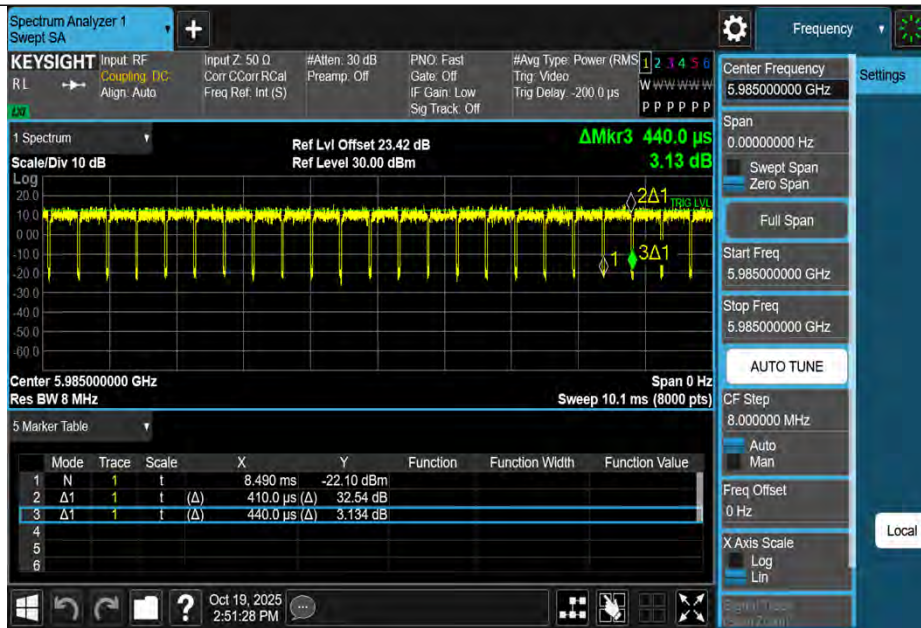

NTNV-11BE80MIMO -5985

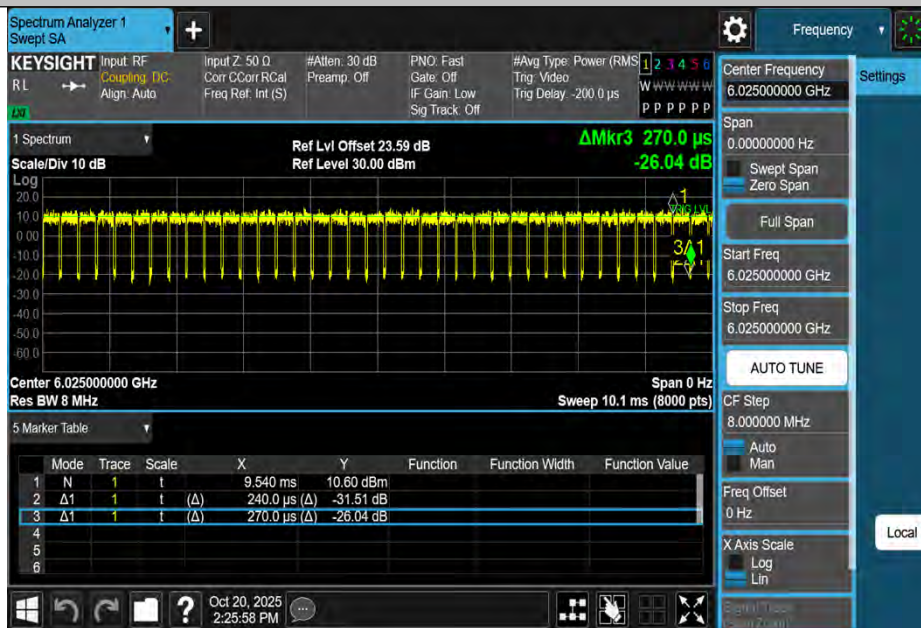

NTNV-11BE160MIMO -6025

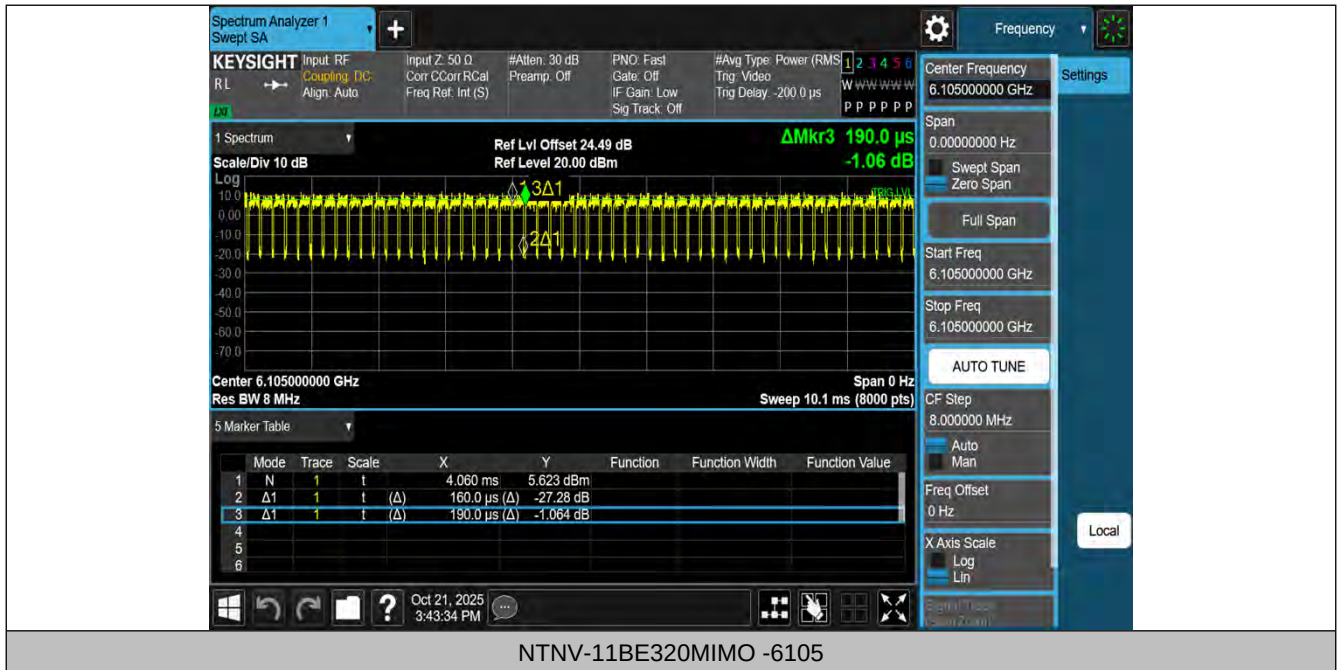

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
Power Spectral Density	$\pm 0.243\text{dB}$
Conducted Spurious Emission	$\pm 0.743\text{dB}$
RF power conducted	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01
Telephone:	0755-26024411

2.9 Deviation from Standards

No.	Equipment	Model	Manufacturer	Series No
1	PC	M4500T	Thinkpad	M032004854IT
2	Notebook	L450	Think	/
3	Notebook	L450	Think	/

3. Test Procedure And Results

3.1 26dB & 99% Bandwidth Measurement

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

3.1.3 Test Setup


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
 2. RBW = approximately 1% of the emission bandwidth.
 3. VBW > RBW
 4. Detector = Peak.
 5. Trace mode = max hold.
 6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
- Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq$ 3 RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

3.1.4 Test Setup

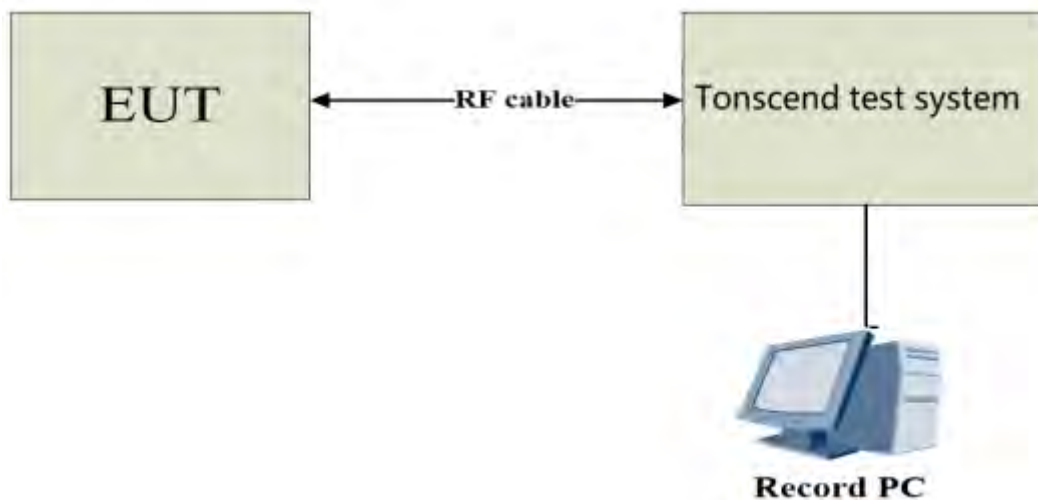

3.1.5 Test Result

Emission Bandwidth

Test Mode	Antenna	Frequency [MHz]	26db BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	5955	21.360	5944.440	5965.800	---	---
11AX20MIMO	Ant2	5955	21.080	5944.600	5965.680	---	---
11AX20MIMO	Ant3	5955	21.320	5944.400	5965.720	---	---
11AX20MIMO	Ant4	5955	21.440	5944.360	5965.800	---	---
11AX20MIMO	Ant1	6175	21.480	6164.280	6185.760	---	---
11AX20MIMO	Ant2	6175	21.480	6164.400	6185.880	---	---
11AX20MIMO	Ant3	6175	21.840	6164.280	6186.120	---	---
11AX20MIMO	Ant4	6175	21.480	6164.320	6185.800	---	---
11AX20MIMO	Ant1	6415	21.440	6404.240	6425.680	---	---
11AX20MIMO	Ant2	6415	21.520	6404.280	6425.800	---	---
11AX20MIMO	Ant3	6415	21.720	6404.160	6425.880	---	---
11AX20MIMO	Ant4	6415	21.360	6404.200	6425.560	---	---
11AX20MIMO	Ant1	6435	21.080	6424.680	6445.760	---	---
11AX20MIMO	Ant2	6435	21.560	6424.400	6445.960	---	---
11AX20MIMO	Ant3	6435	21.640	6424.120	6445.760	---	---
11AX20MIMO	Ant4	6435	21.800	6424.160	6445.960	---	---
11AX20MIMO	Ant1	6475	21.640	6464.160	6485.800	---	---
11AX20MIMO	Ant2	6475	21.360	6464.320	6485.680	---	---
11AX20MIMO	Ant3	6475	21.600	6464.120	6485.720	---	---
11AX20MIMO	Ant4	6475	21.280	6464.400	6485.680	---	---
11AX20MIMO	Ant1	6515	22.160	6503.760	6525.920	---	---
11AX20MIMO	Ant2	6515	21.600	6504.240	6525.840	---	---

11AX20MIMO	Ant3	6515	21.280	6504.400	6525.680	---	---
11AX20MIMO	Ant4	6515	21.400	6504.400	6525.800	---	---
11AX20MIMO	Ant1	6535	21.160	6524.440	6545.600	---	---
11AX20MIMO	Ant2	6535	21.680	6524.200	6545.880	---	---
11AX20MIMO	Ant3	6535	21.440	6524.400	6545.840	---	---
11AX20MIMO	Ant4	6535	21.480	6524.400	6545.880	---	---
11AX20MIMO	Ant1	6695	21.160	6684.360	6705.520	---	---
11AX20MIMO	Ant2	6695	21.560	6684.400	6705.960	---	---
11AX20MIMO	Ant3	6695	21.640	6684.240	6705.880	---	---
11AX20MIMO	Ant4	6695	21.360	6684.400	6705.760	---	---
11AX20MIMO	Ant1	6855	21.480	6844.440	6865.920	---	---
11AX20MIMO	Ant2	6855	21.320	6844.440	6865.760	---	---
11AX20MIMO	Ant3	6855	21.520	6844.480	6866.000	---	---
11AX20MIMO	Ant4	6855	21.440	6844.400	6865.840	---	---
11AX20MIMO	Ant1	6875	21.560	6864.240	6885.800	---	---
11AX20MIMO	Ant2	6875	21.200	6864.440	6885.640	---	---
11AX20MIMO	Ant3	6875	21.800	6864.240	6886.040	---	---
11AX20MIMO	Ant4	6875	21.360	6864.400	6885.760	---	---
11AX20MIMO	Ant1	6895	21.240	6884.440	6905.680	---	---
11AX20MIMO	Ant2	6895	21.720	6884.320	6906.040	---	---
11AX20MIMO	Ant3	6895	21.760	6884.000	6905.760	---	---
11AX20MIMO	Ant4	6895	21.440	6884.400	6905.840	---	---
11AX20MIMO	Ant1	6995	21.640	6984.240	7005.880	---	---
11AX20MIMO	Ant2	6995	22.080	6983.880	7005.960	---	---
11AX20MIMO	Ant3	6995	21.480	6984.440	7005.920	---	---
11AX20MIMO	Ant4	6995	21.880	6984.200	7006.080	---	---
11AX20MIMO	Ant1	7115	21.760	7103.960	7125.720	---	---
11AX20MIMO	Ant2	7115	21.640	7104.360	7126.000	---	---
11AX20MIMO	Ant3	7115	21.640	7104.280	7125.920	---	---
11AX20MIMO	Ant4	7115	21.720	7104.280	7126.000	---	---
11AX40MIMO	Ant4	5965	40.640	5944.840	5985.480	---	---
11AX40MIMO	Ant1	5965	40.400	5944.840	5985.240	---	---
11AX40MIMO	Ant2	5965	39.920	5945.240	5985.160	---	---
11AX40MIMO	Ant3	5965	39.840	5945.400	5985.240	---	---
11AX40MIMO	Ant1	6165	39.840	6145.000	6184.840	---	---
11AX40MIMO	Ant2	6165	40.400	6145.080	6185.480	---	---
11AX40MIMO	Ant3	6165	40.480	6145.000	6185.480	---	---
11AX40MIMO	Ant4	6165	40.080	6145.000	6185.080	---	---
11AX40MIMO	Ant1	6405	40.560	6384.600	6425.160	---	---
11AX40MIMO	Ant2	6405	40.320	6384.760	6425.080	---	---
11AX40MIMO	Ant3	6405	40.480	6384.600	6425.080	---	---
11AX40MIMO	Ant4	6405	40.320	6384.680	6425.000	---	---
11AX40MIMO	Ant1	6445	40.080	6425.160	6465.240	---	---

11AX40MIMO	Ant2	6445	40.000	6425.080	6465.080	---	---
11AX40MIMO	Ant3	6445	40.160	6425.000	6465.160	---	---
11AX40MIMO	Ant4	6445	40.160	6424.920	6465.080	---	---
11AX40MIMO	Ant1	6485	40.400	6464.840	6505.240	---	---
11AX40MIMO	Ant2	6485	40.800	6464.520	6505.320	---	---
11AX40MIMO	Ant3	6485	39.920	6465.080	6505.000	---	---
11AX40MIMO	Ant4	6485	40.320	6465.000	6505.320	---	---
11AX40MIMO	Ant1	6525	39.920	6505.160	6545.080	---	---
11AX40MIMO	Ant2	6525	41.040	6504.600	6545.640	---	---
11AX40MIMO	Ant3	6525	40.000	6505.000	6545.000	---	---
11AX40MIMO	Ant4	6525	40.160	6505.000	6545.160	---	---
11AX40MIMO	Ant1	6565	40.160	6545.000	6585.160	---	---
11AX40MIMO	Ant2	6565	40.000	6545.000	6585.000	---	---
11AX40MIMO	Ant3	6565	40.640	6544.520	6585.160	---	---
11AX40MIMO	Ant4	6565	40.320	6545.000	6585.320	---	---
11AX40MIMO	Ant1	6685	40.560	6664.760	6705.320	---	---
11AX40MIMO	Ant2	6685	39.920	6665.160	6705.080	---	---
11AX40MIMO	Ant3	6685	40.320	6665.000	6705.320	---	---
11AX40MIMO	Ant4	6685	40.240	6665.000	6705.240	---	---
11AX40MIMO	Ant1	6845	40.160	6825.080	6865.240	---	---
11AX40MIMO	Ant2	6845	40.480	6824.840	6865.320	---	---
11AX40MIMO	Ant3	6845	40.240	6824.920	6865.160	---	---
11AX40MIMO	Ant4	6845	40.320	6825.000	6865.320	---	---
11AX40MIMO	Ant1	6885	40.240	6865.000	6905.240	---	---
11AX40MIMO	Ant2	6885	40.240	6865.000	6905.240	---	---
11AX40MIMO	Ant3	6885	40.160	6865.000	6905.160	---	---
11AX40MIMO	Ant4	6885	40.160	6865.080	6905.240	---	---
11AX40MIMO	Ant1	6925	40.400	6904.840	6945.240	---	---
11AX40MIMO	Ant2	6925	39.920	6905.000	6944.920	---	---
11AX40MIMO	Ant3	6925	40.400	6905.000	6945.400	---	---
11AX40MIMO	Ant4	6925	40.320	6905.000	6945.320	---	---
11AX40MIMO	Ant1	6965	40.320	6944.840	6985.160	---	---
11AX40MIMO	Ant2	6965	40.080	6945.000	6985.080	---	---
11AX40MIMO	Ant3	6965	40.400	6944.920	6985.320	---	---
11AX40MIMO	Ant4	6965	40.400	6945.080	6985.480	---	---
11AX40MIMO	Ant1	7085	40.800	7064.440	7105.240	---	---
11AX40MIMO	Ant2	7085	40.240	7064.840	7105.080	---	---
11AX40MIMO	Ant3	7085	40.080	7064.920	7105.000	---	---
11AX40MIMO	Ant4	7085	40.320	7064.760	7105.080	---	---
11AX80MIMO	Ant1	5985	81.920	5944.680	6026.600	---	---
11AX80MIMO	Ant2	5985	82.080	5944.360	6026.440	---	---
11AX80MIMO	Ant3	5985	81.600	5944.360	6025.960	---	---
11AX80MIMO	Ant4	5985	80.640	5945.000	6025.640	---	---

11AX80MIMO	Ant1	6145	81.280	6104.680	6185.960	---	---
11AX80MIMO	Ant2	6145	81.440	6104.360	6185.800	---	---
11AX80MIMO	Ant3	6145	82.080	6104.360	6186.440	---	---
11AX80MIMO	Ant4	6145	80.800	6104.520	6185.320	---	---
11AX80MIMO	Ant1	6385	81.440	6344.680	6426.120	---	---
11AX80MIMO	Ant2	6385	80.960	6344.520	6425.480	---	---
11AX80MIMO	Ant3	6385	80.480	6344.840	6425.320	---	---
11AX80MIMO	Ant4	6385	80.800	6344.520	6425.320	---	---
11AX80MIMO	Ant1	6465	80.800	6424.840	6505.640	---	---
11AX80MIMO	Ant2	6465	81.280	6424.360	6505.640	---	---
11AX80MIMO	Ant3	6465	81.760	6424.200	6505.960	---	---
11AX80MIMO	Ant4	6465	81.440	6424.360	6505.800	---	---
11AX80MIMO	Ant1	6545	80.960	6504.360	6585.320	---	---
11AX80MIMO	Ant2	6545	80.800	6504.680	6585.480	---	---
11AX80MIMO	Ant3	6545	80.480	6504.840	6585.320	---	---
11AX80MIMO	Ant4	6545	81.440	6504.520	6585.960	---	---
11AX80MIMO	Ant1	6625	81.760	6584.200	6665.960	---	---
11AX80MIMO	Ant2	6625	82.080	6584.040	6666.120	---	---
11AX80MIMO	Ant3	6625	80.960	6584.520	6665.480	---	---
11AX80MIMO	Ant4	6625	81.760	6584.040	6665.800	---	---
11AX80MIMO	Ant1	6705	81.600	6664.200	6745.800	---	---
11AX80MIMO	Ant2	6705	81.760	6664.360	6746.120	---	---
11AX80MIMO	Ant3	6705	82.080	6664.040	6746.120	---	---
11AX80MIMO	Ant4	6705	80.960	6664.520	6745.480	---	---
11AX80MIMO	Ant1	6785	81.600	6744.520	6826.120	---	---
11AX80MIMO	Ant2	6785	81.920	6743.720	6825.640	---	---
11AX80MIMO	Ant3	6785	80.480	6745.000	6825.480	---	---
11AX80MIMO	Ant4	6785	81.280	6744.520	6825.800	---	---
11AX80MIMO	Ant1	6865	81.600	6824.520	6906.120	---	---
11AX80MIMO	Ant2	6865	82.240	6824.520	6906.760	---	---
11AX80MIMO	Ant3	6865	81.120	6824.680	6905.800	---	---
11AX80MIMO	Ant4	6865	80.800	6824.840	6905.640	---	---
11AX80MIMO	Ant1	6945	81.440	6904.520	6985.960	---	---
11AX80MIMO	Ant2	6945	81.760	6904.200	6985.960	---	---
11AX80MIMO	Ant3	6945	81.600	6904.520	6986.120	---	---
11AX80MIMO	Ant4	6945	81.600	6904.520	6986.120	---	---
11AX80MIMO	Ant1	7025	80.960	6984.520	7065.480	---	---
11AX80MIMO	Ant2	7025	81.600	6984.360	7065.960	---	---
11AX80MIMO	Ant3	7025	81.280	6984.040	7065.320	---	---
11AX80MIMO	Ant4	7025	81.280	6984.200	7065.480	---	---
11AX160MIMO	Ant1	6025	162.880	5943.720	6106.600	---	---
11AX160MIMO	Ant2	6025	163.840	5943.400	6107.240	---	---
11AX160MIMO	Ant3	6025	164.160	5943.400	6107.560	---	---

11AX160MIMO	Ant4	6025	163.200	5943.720	6106.920	---	---
11AX160MIMO	Ant1	6185	163.520	6103.720	6267.240	---	---
11AX160MIMO	Ant2	6185	163.200	6104.360	6267.560	---	---
11AX160MIMO	Ant3	6185	162.560	6104.040	6266.600	---	---
11AX160MIMO	Ant4	6185	162.880	6103.720	6266.600	---	---
11AX160MIMO	Ant1	6345	162.880	6264.040	6426.920	---	---
11AX160MIMO	Ant2	6345	161.600	6264.360	6425.960	---	---
11AX160MIMO	Ant3	6345	163.200	6263.400	6426.600	---	---
11AX160MIMO	Ant4	6345	163.520	6263.400	6426.920	---	---
11AX160MIMO	Ant1	6505	162.880	6424.040	6586.920	---	---
11AX160MIMO	Ant2	6505	162.560	6424.040	6586.600	---	---
11AX160MIMO	Ant3	6505	162.880	6423.720	6586.600	---	---
11AX160MIMO	Ant4	6505	163.520	6423.400	6586.920	---	---
11AX160MIMO	Ant1	6665	164.160	6582.760	6746.920	---	---
11AX160MIMO	Ant2	6665	164.160	6583.080	6747.240	---	---
11AX160MIMO	Ant3	6665	163.200	6583.400	6746.600	---	---
11AX160MIMO	Ant4	6665	162.880	6583.400	6746.280	---	---
11AX160MIMO	Ant1	6825	162.880	6743.400	6906.280	---	---
11AX160MIMO	Ant2	6825	164.480	6741.800	6906.280	---	---
11AX160MIMO	Ant3	6825	164.160	6743.080	6907.240	---	---
11AX160MIMO	Ant4	6825	163.200	6743.400	6906.600	---	---
11AX160MIMO	Ant1	6985	163.840	6902.760	7066.600	---	---
11AX160MIMO	Ant2	6985	162.880	6903.720	7066.600	---	---
11AX160MIMO	Ant3	6985	163.840	6902.760	7066.600	---	---
11AX160MIMO	Ant4	6985	164.800	6901.800	7066.600	---	---
11BE20MIMO	Ant1	5955	21.520	5944.440	5965.960	---	---
11BE20MIMO	Ant2	5955	21.520	5944.120	5965.640	---	---
11BE20MIMO	Ant3	5955	21.680	5944.080	5965.760	---	---
11BE20MIMO	Ant4	5955	21.560	5944.160	5965.720	---	---
11BE20MIMO	Ant1	6175	21.440	6164.360	6185.800	---	---
11BE20MIMO	Ant2	6175	21.560	6164.360	6185.920	---	---
11BE20MIMO	Ant3	6175	21.240	6164.400	6185.640	---	---
11BE20MIMO	Ant4	6175	21.680	6164.280	6185.960	---	---
11BE20MIMO	Ant1	6415	21.440	6404.280	6425.720	---	---
11BE20MIMO	Ant2	6415	21.280	6404.560	6425.840	---	---
11BE20MIMO	Ant3	6415	21.400	6404.320	6425.720	---	---
11BE20MIMO	Ant4	6415	21.560	6404.280	6425.840	---	---
11BE20MIMO	Ant1	6435	21.560	6424.240	6445.800	---	---
11BE20MIMO	Ant2	6435	21.600	6424.240	6445.840	---	---
11BE20MIMO	Ant3	6435	21.360	6424.360	6445.720	---	---
11BE20MIMO	Ant4	6435	21.520	6424.480	6446.000	---	---
11BE20MIMO	Ant1	6475	21.160	6464.640	6485.800	---	---
11BE20MIMO	Ant2	6475	21.160	6464.560	6485.720	---	---

11BE20MIMO	Ant3	6475	21.400	6464.480	6485.880	---	---
11BE20MIMO	Ant4	6475	21.720	6464.160	6485.880	---	---
11BE20MIMO	Ant1	6515	21.320	6504.320	6525.640	---	---
11BE20MIMO	Ant2	6515	21.600	6504.280	6525.880	---	---
11BE20MIMO	Ant3	6515	21.520	6504.400	6525.920	---	---
11BE20MIMO	Ant4	6515	21.600	6504.320	6525.920	---	---
11BE20MIMO	Ant1	6535	21.480	6524.240	6545.720	---	---
11BE20MIMO	Ant2	6535	21.280	6524.560	6545.840	---	---
11BE20MIMO	Ant3	6535	21.480	6524.280	6545.760	---	---
11BE20MIMO	Ant4	6535	21.400	6524.440	6545.840	---	---
11BE20MIMO	Ant1	6695	21.560	6684.360	6705.920	---	---
11BE20MIMO	Ant2	6695	21.800	6684.040	6705.840	---	---
11BE20MIMO	Ant3	6695	21.560	6684.360	6705.920	---	---
11BE20MIMO	Ant4	6695	21.520	6684.280	6705.800	---	---
11BE20MIMO	Ant1	6855	21.600	6844.360	6865.960	---	---
11BE20MIMO	Ant2	6855	21.400	6844.320	6865.720	---	---
11BE20MIMO	Ant3	6855	21.480	6844.400	6865.880	---	---
11BE20MIMO	Ant4	6855	21.720	6844.200	6865.920	---	---
11BE20MIMO	Ant1	6875	21.200	6864.600	6885.800	---	---
11BE20MIMO	Ant2	6875	21.520	6864.320	6885.840	---	---
11BE20MIMO	Ant3	6875	21.960	6863.960	6885.920	---	---
11BE20MIMO	Ant4	6875	21.320	6864.320	6885.640	---	---
11BE20MIMO	Ant1	6895	21.720	6884.200	6905.920	---	---
11BE20MIMO	Ant2	6895	21.520	6884.280	6905.800	---	---
11BE20MIMO	Ant3	6895	21.760	6884.160	6905.920	---	---
11BE20MIMO	Ant4	6895	21.200	6884.440	6905.640	---	---
11BE20MIMO	Ant1	6995	21.480	6984.320	7005.800	---	---
11BE20MIMO	Ant2	6995	21.640	6984.240	7005.880	---	---
11BE20MIMO	Ant3	6995	21.760	6984.360	7006.120	---	---
11BE20MIMO	Ant4	6995	21.440	6984.360	7005.800	---	---
11BE20MIMO	Ant1	7115	21.840	7104.120	7125.960	---	---
11BE20MIMO	Ant2	7115	21.520	7104.360	7125.880	---	---
11BE20MIMO	Ant3	7115	21.240	7104.480	7125.720	---	---
11BE20MIMO	Ant4	7115	22.040	7104.000	7126.040	---	---
11BE40MIMO	Ant1	5965	40.960	5944.360	5985.320	---	---
11BE40MIMO	Ant2	5965	40.160	5945.080	5985.240	---	---
11BE40MIMO	Ant3	5965	40.400	5944.840	5985.240	---	---
11BE40MIMO	Ant4	5965	40.240	5945.080	5985.320	---	---
11BE40MIMO	Ant1	6165	40.400	6144.760	6185.160	---	---
11BE40MIMO	Ant2	6165	40.240	6145.000	6185.240	---	---
11BE40MIMO	Ant3	6165	40.480	6144.680	6185.160	---	---
11BE40MIMO	Ant4	6165	40.080	6144.920	6185.000	---	---
11BE40MIMO	Ant1	6405	40.560	6384.600	6425.160	---	---

11BE40MIMO	Ant2	6405	40.000	6385.000	6425.000	---	---
11BE40MIMO	Ant3	6405	40.640	6384.680	6425.320	---	---
11BE40MIMO	Ant4	6405	40.400	6384.840	6425.240	---	---
11BE40MIMO	Ant1	6445	40.320	6425.160	6465.480	---	---
11BE40MIMO	Ant2	6445	39.920	6425.080	6465.000	---	---
11BE40MIMO	Ant3	6445	40.400	6424.840	6465.240	---	---
11BE40MIMO	Ant4	6445	39.680	6425.240	6464.920	---	---
11BE40MIMO	Ant1	6485	40.480	6465.080	6505.560	---	---
11BE40MIMO	Ant2	6485	40.160	6464.760	6504.920	---	---
11BE40MIMO	Ant3	6485	40.480	6464.840	6505.320	---	---
11BE40MIMO	Ant4	6485	40.640	6464.440	6505.080	---	---
11BE40MIMO	Ant1	6525	40.800	6504.360	6545.160	---	---
11BE40MIMO	Ant2	6525	40.800	6504.760	6545.560	---	---
11BE40MIMO	Ant3	6525	40.320	6504.840	6545.160	---	---
11BE40MIMO	Ant4	6525	40.400	6505.000	6545.400	---	---
11BE40MIMO	Ant1	6565	40.800	6544.920	6585.720	---	---
11BE40MIMO	Ant2	6565	40.080	6545.000	6585.080	---	---
11BE40MIMO	Ant3	6565	40.000	6545.160	6585.160	---	---
11BE40MIMO	Ant4	6565	40.320	6544.920	6585.240	---	---
11BE40MIMO	Ant1	6685	40.720	6664.440	6705.160	---	---
11BE40MIMO	Ant2	6685	40.240	6665.000	6705.240	---	---
11BE40MIMO	Ant3	6685	40.640	6664.680	6705.320	---	---
11BE40MIMO	Ant4	6685	40.240	6664.920	6705.160	---	---
11BE40MIMO	Ant1	6845	40.640	6824.600	6865.240	---	---
11BE40MIMO	Ant2	6845	40.160	6825.160	6865.320	---	---
11BE40MIMO	Ant3	6845	40.240	6825.080	6865.320	---	---
11BE40MIMO	Ant4	6845	40.160	6825.000	6865.160	---	---
11BE40MIMO	Ant1	6885	40.160	6865.000	6905.160	---	---
11BE40MIMO	Ant2	6885	40.160	6865.000	6905.160	---	---
11BE40MIMO	Ant3	6885	40.160	6864.840	6905.000	---	---
11BE40MIMO	Ant4	6885	40.080	6865.080	6905.160	---	---
11BE40MIMO	Ant1	6925	40.720	6904.840	6945.560	---	---
11BE40MIMO	Ant2	6925	40.400	6904.680	6945.080	---	---
11BE40MIMO	Ant3	6925	40.240	6905.000	6945.240	---	---
11BE40MIMO	Ant4	6925	39.760	6905.240	6945.000	---	---
11BE40MIMO	Ant1	6965	40.400	6944.920	6985.320	---	---
11BE40MIMO	Ant2	6965	40.400	6944.680	6985.080	---	---
11BE40MIMO	Ant3	6965	40.240	6945.080	6985.320	---	---
11BE40MIMO	Ant4	6965	40.720	6944.760	6985.480	---	---
11BE40MIMO	Ant1	7085	40.240	7064.760	7105.000	---	---
11BE40MIMO	Ant2	7085	40.640	7064.680	7105.320	---	---
11BE40MIMO	Ant3	7085	40.640	7064.520	7105.160	---	---
11BE40MIMO	Ant4	7085	40.080	7064.760	7104.840	---	---

11BE80MIMO	Ant1	5985	80.640	5944.680	6025.320	---	---
11BE80MIMO	Ant2	5985	81.440	5944.360	6025.800	---	---
11BE80MIMO	Ant3	5985	81.120	5944.360	6025.480	---	---
11BE80MIMO	Ant4	5985	82.240	5944.200	6026.440	---	---
11BE80MIMO	Ant1	6145	81.920	6104.200	6186.120	---	---
11BE80MIMO	Ant2	6145	81.440	6104.360	6185.800	---	---
11BE80MIMO	Ant3	6145	81.120	6104.520	6185.640	---	---
11BE80MIMO	Ant4	6145	81.920	6104.520	6186.440	---	---
11BE80MIMO	Ant1	6385	81.760	6344.040	6425.800	---	---
11BE80MIMO	Ant2	6385	81.440	6344.200	6425.640	---	---
11BE80MIMO	Ant3	6385	80.800	6344.520	6425.320	---	---
11BE80MIMO	Ant4	6385	80.960	6344.680	6425.640	---	---
11BE80MIMO	Ant1	6465	81.920	6424.040	6505.960	---	---
11BE80MIMO	Ant2	6465	81.760	6424.040	6505.800	---	---
11BE80MIMO	Ant3	6465	81.440	6424.200	6505.640	---	---
11BE80MIMO	Ant4	6465	81.440	6424.680	6506.120	---	---
11BE80MIMO	Ant1	6545	81.120	6504.680	6585.800	---	---
11BE80MIMO	Ant2	6545	81.920	6504.200	6586.120	---	---
11BE80MIMO	Ant3	6545	81.120	6504.520	6585.640	---	---
11BE80MIMO	Ant4	6545	81.120	6504.040	6585.160	---	---
11BE80MIMO	Ant1	6625	81.120	6584.360	6665.480	---	---
11BE80MIMO	Ant2	6625	81.440	6583.880	6665.320	---	---
11BE80MIMO	Ant3	6625	80.640	6584.840	6665.480	---	---
11BE80MIMO	Ant4	6625	82.240	6583.720	6665.960	---	---
11BE80MIMO	Ant1	6705	81.120	6664.520	6745.640	---	---
11BE80MIMO	Ant2	6705	81.440	6664.360	6745.800	---	---
11BE80MIMO	Ant3	6705	81.440	6664.200	6745.640	---	---
11BE80MIMO	Ant4	6705	81.440	6664.360	6745.800	---	---
11BE80MIMO	Ant1	6785	81.440	6744.680	6826.120	---	---
11BE80MIMO	Ant2	6785	81.280	6744.520	6825.800	---	---
11BE80MIMO	Ant3	6785	81.120	6744.200	6825.320	---	---
11BE80MIMO	Ant4	6785	81.920	6744.200	6826.120	---	---
11BE80MIMO	Ant1	6865	82.400	6824.040	6906.440	---	---
11BE80MIMO	Ant2	6865	81.280	6824.680	6905.960	---	---
11BE80MIMO	Ant3	6865	81.440	6824.360	6905.800	---	---
11BE80MIMO	Ant4	6865	81.280	6824.200	6905.480	---	---
11BE80MIMO	Ant1	6945	82.400	6904.200	6986.600	---	---
11BE80MIMO	Ant2	6945	81.120	6904.360	6985.480	---	---
11BE80MIMO	Ant3	6945	81.120	6904.360	6985.480	---	---
11BE80MIMO	Ant4	6945	81.760	6903.880	6985.640	---	---
11BE80MIMO	Ant1	7025	81.760	6984.200	7065.960	---	---
11BE80MIMO	Ant2	7025	81.280	6984.680	7065.960	---	---
11BE80MIMO	Ant3	7025	81.280	6984.200	7065.480	---	---

11BE80MIMO	Ant4	7025	81.440	6984.360	7065.800	---	---
11BE160MIMO	Ant1	6025	164.160	5943.720	6107.880	---	---
11BE160MIMO	Ant2	6025	163.520	5943.720	6107.240	---	---
11BE160MIMO	Ant3	6025	163.840	5943.400	6107.240	---	---
11BE160MIMO	Ant4	6025	162.560	5943.400	6105.960	---	---
11BE160MIMO	Ant1	6185	163.840	6103.720	6267.560	---	---
11BE160MIMO	Ant2	6185	162.880	6103.400	6266.280	---	---
11BE160MIMO	Ant3	6185	163.520	6103.400	6266.920	---	---
11BE160MIMO	Ant4	6185	162.880	6104.040	6266.920	---	---
11BE160MIMO	Ant1	6345	162.560	6263.400	6425.960	---	---
11BE160MIMO	Ant2	6345	162.560	6263.400	6425.960	---	---
11BE160MIMO	Ant3	6345	163.200	6263.720	6426.920	---	---
11BE160MIMO	Ant4	6345	163.520	6263.400	6426.920	---	---
11BE160MIMO	Ant1	6505	163.520	6422.760	6586.280	---	---
11BE160MIMO	Ant2	6505	164.480	6422.440	6586.920	---	---
11BE160MIMO	Ant3	6505	163.520	6423.080	6586.600	---	---
11BE160MIMO	Ant4	6505	164.160	6422.760	6586.920	---	---
11BE160MIMO	Ant1	6665	163.520	6583.400	6746.920	---	---
11BE160MIMO	Ant2	6665	163.200	6582.760	6745.960	---	---
11BE160MIMO	Ant3	6665	164.160	6583.080	6747.240	---	---
11BE160MIMO	Ant4	6665	165.760	6582.120	6747.880	---	---
11BE160MIMO	Ant1	6825	164.160	6742.440	6906.600	---	---
11BE160MIMO	Ant2	6825	164.160	6743.080	6907.240	---	---
11BE160MIMO	Ant3	6825	164.480	6742.440	6906.920	---	---
11BE160MIMO	Ant4	6825	163.200	6743.400	6906.600	---	---
11BE160MIMO	Ant1	6985	162.560	6903.400	7065.960	---	---
11BE160MIMO	Ant2	6985	164.480	6902.760	7067.240	---	---
11BE160MIMO	Ant3	6985	164.160	6903.080	7067.240	---	---
11BE160MIMO	Ant4	6985	163.840	6902.760	7066.600	---	---
11BE320MIMO	Ant1	6105	327.040	5942.440	6269.480	---	---
11BE320MIMO	Ant2	6105	323.200	5943.720	6266.920	---	---
11BE320MIMO	Ant3	6105	323.200	5943.720	6266.920	---	---
11BE320MIMO	Ant4	6105	323.840	5943.720	6267.560	---	---
11BE320MIMO	Ant1	6265	323.840	6103.080	6426.920	---	---
11BE320MIMO	Ant2	6265	324.480	6103.080	6427.560	---	---
11BE320MIMO	Ant3	6265	323.840	6103.080	6426.920	---	---
11BE320MIMO	Ant4	6265	323.200	6103.720	6426.920	---	---
11BE320MIMO	Ant1	6585	323.840	6422.440	6746.280	---	---
11BE320MIMO	Ant2	6585	323.840	6423.080	6746.920	---	---
11BE320MIMO	Ant3	6585	323.840	6423.080	6746.920	---	---
11BE320MIMO	Ant4	6585	325.120	6423.080	6748.200	---	---
11BE320MIMO	Ant1	6745	324.480	6582.440	6906.920	---	---
11BE320MIMO	Ant2	6745	323.200	6583.720	6906.920	---	---

11BE320MIMO	Ant3	6745	323.840	6582.440	6906.280	---	---
11BE320MIMO	Ant4	6745	324.480	6583.080	6907.560	---	---
11BE320MIMO	Ant1	6905	324.480	6742.440	7066.920	---	---
11BE320MIMO	Ant2	6905	324.480	6743.080	7067.560	---	---
11BE320MIMO	Ant3	6905	324.480	6742.440	7066.920	---	---
11BE320MIMO	Ant4	6905	325.120	6741.800	7066.920	---	---

Test Graphs



11AX20MIMO-Ant1-5955



11AX20MIMO-Ant2-5955



11AX20MIMO-Ant3-5955



11AX20MIMO-Ant4-5955



11AX20MIMO-Ant1-6175



11AX20MIMO-Ant2-6175



11AX20MIMO-Ant3-6175



11AX20MIMO-Ant4-6175



11AX20MIMO-Ant1-6415



11AX20MIMO-Ant2-6415



11AX20MIMO-Ant3-6415



11AX20MIMO-Ant4-6415



11AX20MIMO-Ant1-6435



11AX20MIMO-Ant2-6435



11AX20MIMO-Ant3-6435



11AX20MIMO-Ant4-6435



11AX20MIMO-Ant1-6475



11AX20MIMO-Ant2-6475



11AX20MIMO-Ant3-6475



11AX20MIMO-Ant4-6475



11AX20MIMO-Ant1-6515



11AX20MIMO-Ant2-6515





11AX20MIMO-Ant1-6535



11AX20MIMO-Ant2-6535



11AX20MIMO-Ant3-6535



11AX20MIMO-Ant4-6535



11AX20MIMO-Ant1-6695



11AX20MIMO-Ant2-6695



11AX20MIMO-Ant3-6695



11AX20MIMO-Ant4-6695





11AX20MIMO-Ant3-6855



11AX20MIMO-Ant4-6855



11AX20MIMO-Ant1-6875




11AX20MIMO-Ant2-6875





11AX20MIMO-Ant1-6895

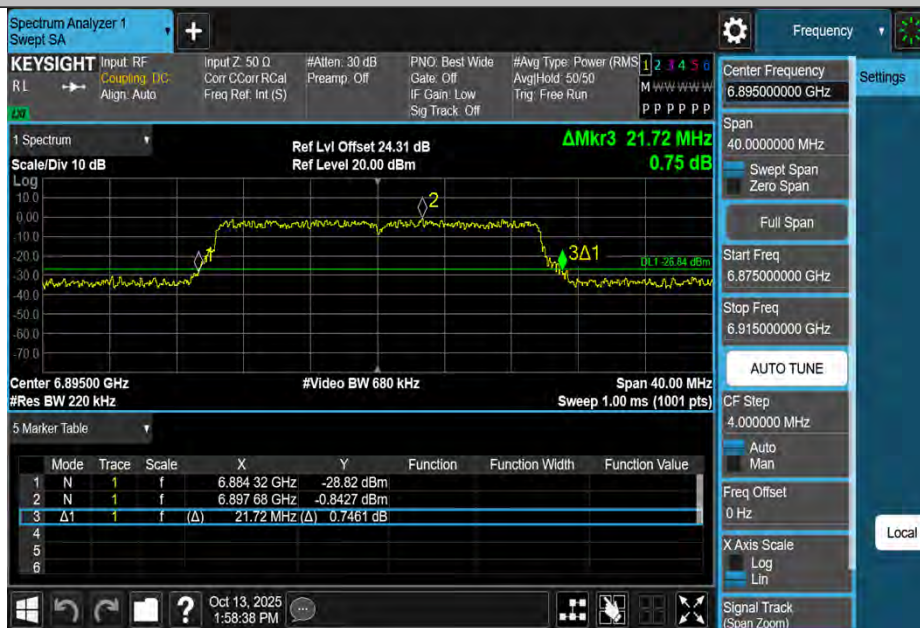

11AX20MIMO-Ant2-6895




11AX20MIMO-Ant3-6895



11AX20MIMO-Ant4-6895



11AX20MIMO-Ant1-6995

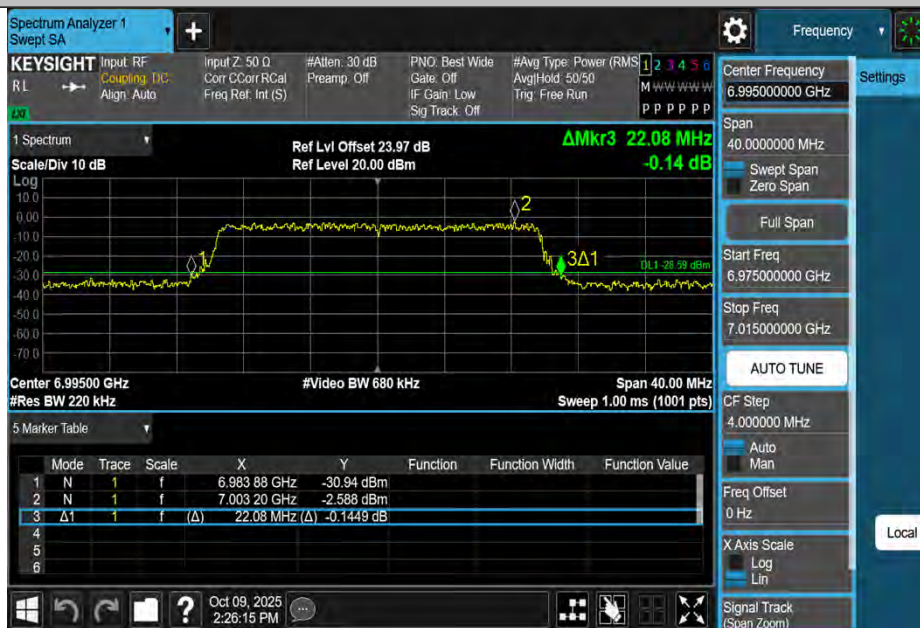

11AX20MIMO-Ant2-6995



11AX20MIMO-Ant3-6995



11AX20MIMO-Ant4-6995



11AX20MIMO-Ant1-7115



11AX20MIMO-Ant2-7115



11AX20MIMO-Ant3-7115



11AX20MIMO-Ant4-7115



11AX40MIMO-Ant4-5965




11AX40MIMO-Ant1-5965



11AX40MIMO-Ant2-5965



11AX40MIMO-Ant3-5965

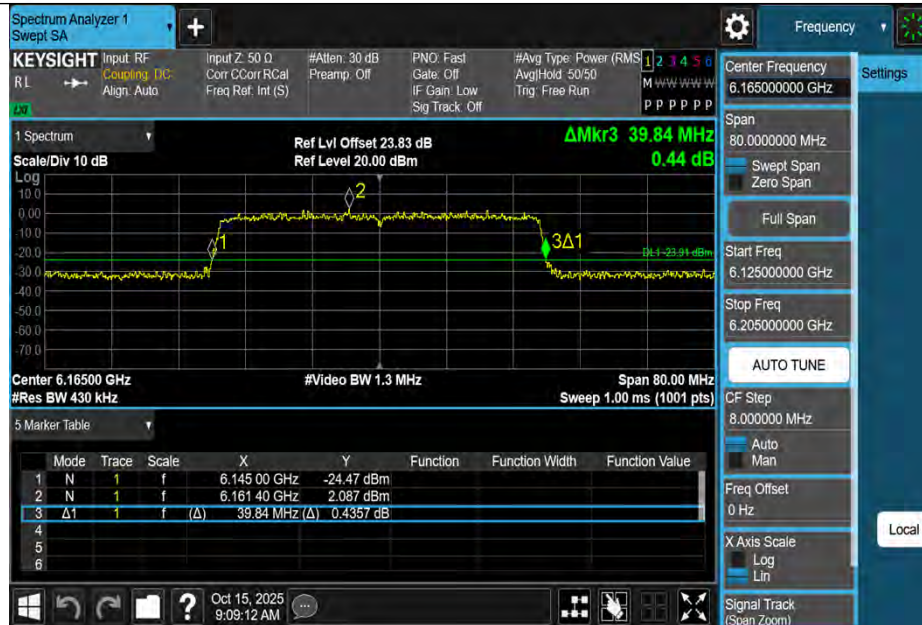

11AX40MIMO-Ant1-6165



11AX40MIMO-Ant2-6165



11AX40MIMO-Ant3-6165



11AX40MIMO-Ant4-6165



11AX40MIMO-Ant1-6405



11AX40MIMO-Ant2-6405



11AX40MIMO-Ant3-6405



11AX40MIMO-Ant4-6405



11AX40MIMO-Ant1-6445



11AX40MIMO-Ant2-6445



11AX40MIMO-Ant3-6445



11AX40MIMO-Ant4-6445



11AX40MIMO-Ant1-6485



11AX40MIMO-Ant2-6485



11AX40MIMO-Ant3-6485



11AX40MIMO-Ant4-6485



11AX40MIMO-Ant1-6525



11AX40MIMO-Ant2-6525



11AX40MIMO-Ant3-6525



11AX40MIMO-Ant4-6525



11AX40MIMO-Ant1-6565



11AX40MIMO-Ant2-6565



11AX40MIMO-Ant3-6565



11AX40MIMO-Ant4-6565



11AX40MIMO-Ant1-6685



11AX40MIMO-Ant2-6685



11AX40MIMO-Ant3-6685



11AX40MIMO-Ant4-6685



11AX40MIMO-Ant1-6845



11AX40MIMO-Ant2-6845




11AX40MIMO-Ant3-6845



11AX40MIMO-Ant4-6845



11AX40MIMO-Ant1-6885

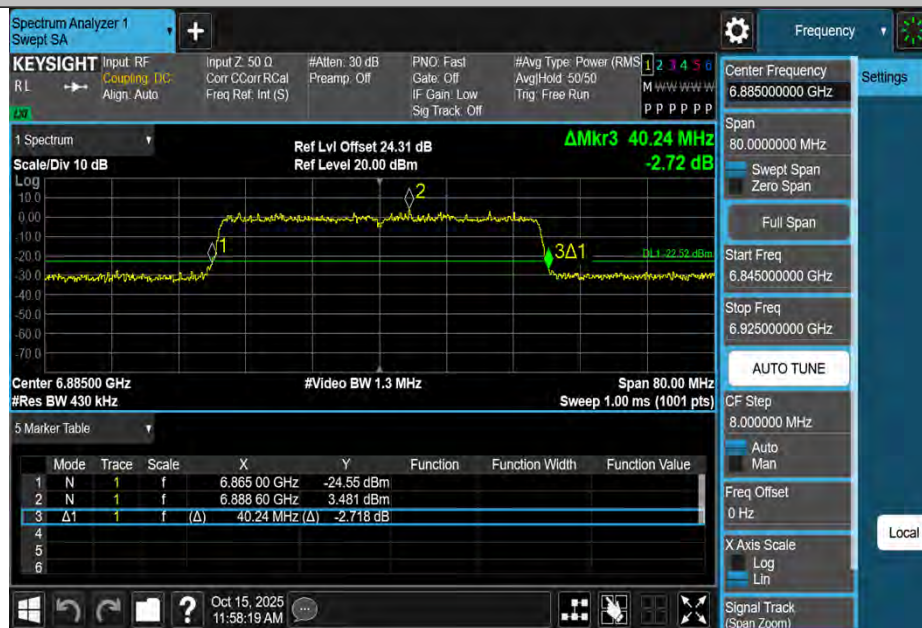

11AX40MIMO-Ant2-6885



11AX40MIMO-Ant3-6885



11AX40MIMO-Ant4-6885



11AX40MIMO-Ant1-6925



11AX40MIMO-Ant2-6925



11AX40MIMO-Ant3-6925



11AX40MIMO-Ant4-6925



11AX40MIMO-Ant1-6965



11AX40MIMO-Ant2-6965



11AX40MIMO-Ant3-6965



11AX40MIMO-Ant4-6965



11AX40MIMO-Ant1-7085



11AX40MIMO-Ant2-7085



11AX40MIMO-Ant3-7085



11AX40MIMO-Ant4-7085



11AX80MIMO-Ant1-5985



11AX80MIMO-Ant2-5985



11AX80MIMO-Ant3-5985



11AX80MIMO-Ant4-5985