

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2604U27448E-EM-00A
FCC ID: YZZGRP2615PRO

Test Standard (s)

FCC Rules and Regulations Part 15 Subpart B Class B

Sample Description

Product Name: Carrier-Grade HD IP Phone
Model No.: GRP2615 Pro
Trade Mark: GRANDSTREAM
Received Date: 2026-06-17
Report Date: 2026-08-06

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Lucy Song

Lucy Song
Engineer

Approved By:

Bob Liao

Bob Liao
Supervisor

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked "#" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming)

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	5
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
CONDUCTED EMISSIONS.....	11
APPLICABLE STANDARD.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	12
CALCULATION	12
TEST DATA	12
RADIATED EMISSIONS	21
APPLICABLE STANDARD.....	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CALCULATION	22
TEST DATA	23
EXHIBIT A-EUT PHOTOGRAPHS	48
EXHIBIT B-TEST SETUP PHOTOGRAPHS	49

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2604U27448E-EM-00A	Original Report	2026-08-06

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Carrier-Grade HD IP Phone
Tested Model	GRP2615 Pro
Voltage Range [#]	DC 5V from adapter or DC 48V from POE
Adapter 1 Information [#]	Model:DCT12W050200US-A2 Input:100-240 V~ 50/60Hz 0.3A Max Output:5.0V $\overline{\text{---}}$ 2.0A
Adapter 2 Information [#]	Model: GQ12-050200-AU Input: 100-240V~ 50/60Hz 0.4A max Output: 5.0V $\overline{\text{---}}$ 2.0A
Adapter 3 Information [#]	Model: GLH0502000 Input: 100-240V~ 50/60Hz 0.5A max Output: 5.0V $\overline{\text{---}}$ 2.0A 10.0W
Note: The EUT powered by adapter or POE.	

Highest Operating Frequency	The EUT's highest operating frequency is <u>5825</u> MHz [#] , the radiated emission measurement shall be made up to <u>29.125</u> GHz.
Sample Serial Number	3OJN-2 (Assigned by BACL, Shenzhen, Guangming)
Sample/EUT Status	Good condition

Objective

This report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15B, Class B device.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
AC Power Lines Conducted Emissions		2.7 dB($k=2$, 95% level of confidence)
Emissions, Radiated	30MHz-1GHz	4.3 dB($k=2$, 95% level of confidence)
	1GHz-18GHz	4.9 dB($k=2$, 95% level of confidence)
	18GHz-26.5GHz	5.2 dB($k=2$, 95% level of confidence)
	26.5GHz-40GHz	4.6 dB($k=2$, 95% level of confidence)
Temperature		1 °C
Humidity		2 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test Mode 1: Talking+ Power by adapter (DCT12W050200US-A2)

Test Mode 2: Talking+ Power by adapter (GQ12-050200-AU)

Test Mode 3: Talking+ Power by adapter (GLH0502000)

Test Mode 4: Talking+ Power by POE

Test Voltage: AC 120V 60Hz

EUT Exercise Software

No exercise software.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Kingston	U disk*2	64G	Unknown
Snom	Headset	A100D	100D4342013597
GRANDSTREAM	Cordless Handset	BTH11R	Unknown
GRANDSTREAM	IP phone	GXV3480	33C03DC22A
GRANDSTREAM	PoE [#]	GS-POE60W-MG	Unknown
DELL	PC	LATITUDE E7450	FKLWV32
AVAYA	Earphone	6408D+	Unknown


Note[#]: The PoE was provided by the applicant for testing.

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Non-Detachable DC Cable	1.5	Adapter	EUT
Unshielded Detachable AC Cable	1.2	AC Mains	PoE
Unshielded Detachable RJ45 Cable	1.5	PoE [#]	EUT
Unshielded Detachable RJ45 Cable	10.0	PC	EUT
Unshielded Detachable RJ45 Cable	10.0	EUT	IP phone
Unshielded Detachable RJ45 Cable	10.0	PoE [#]	IP phone
Unshielded Non-Detachable audio Cable	1.2	Headset	EUT
Unshielded Non-Detachable audio Cable	2	Earphone	EUT

Block Diagram of Test Setup

For Conducted Emission: Test Mode 1&2&3

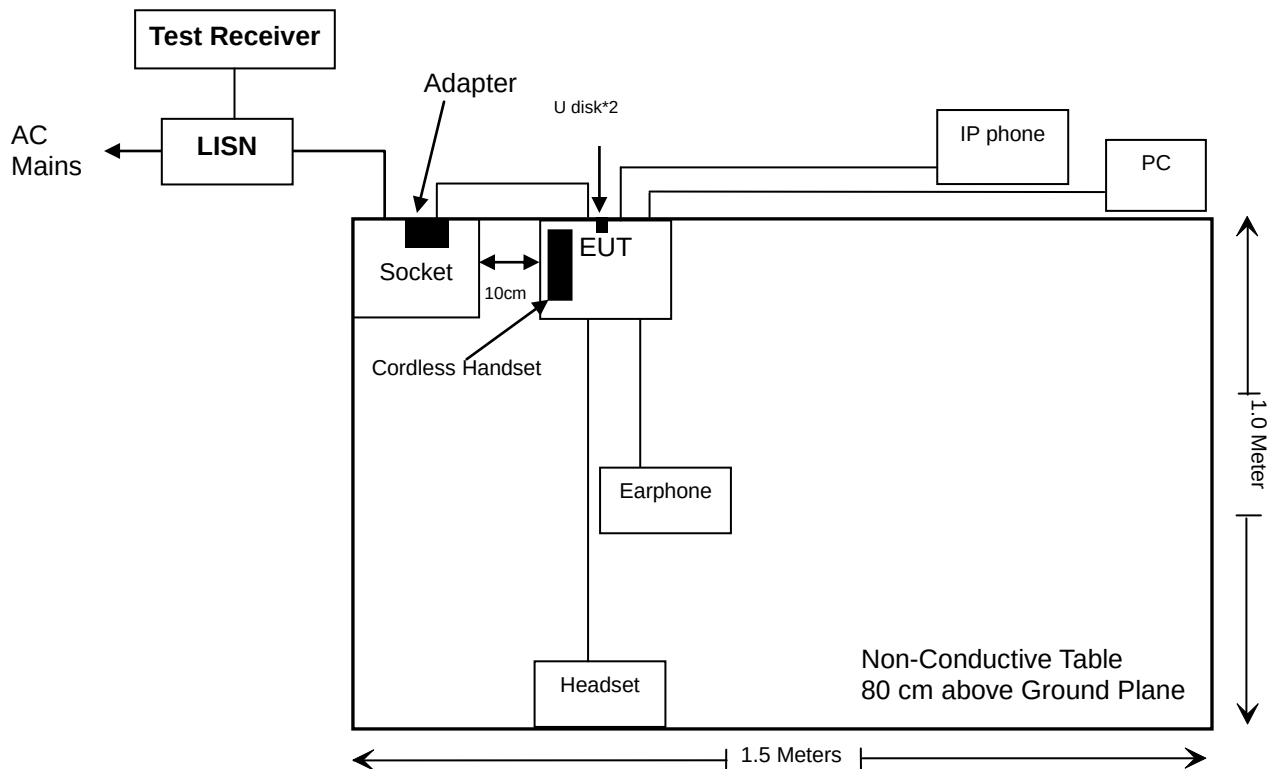


Test Mode 4

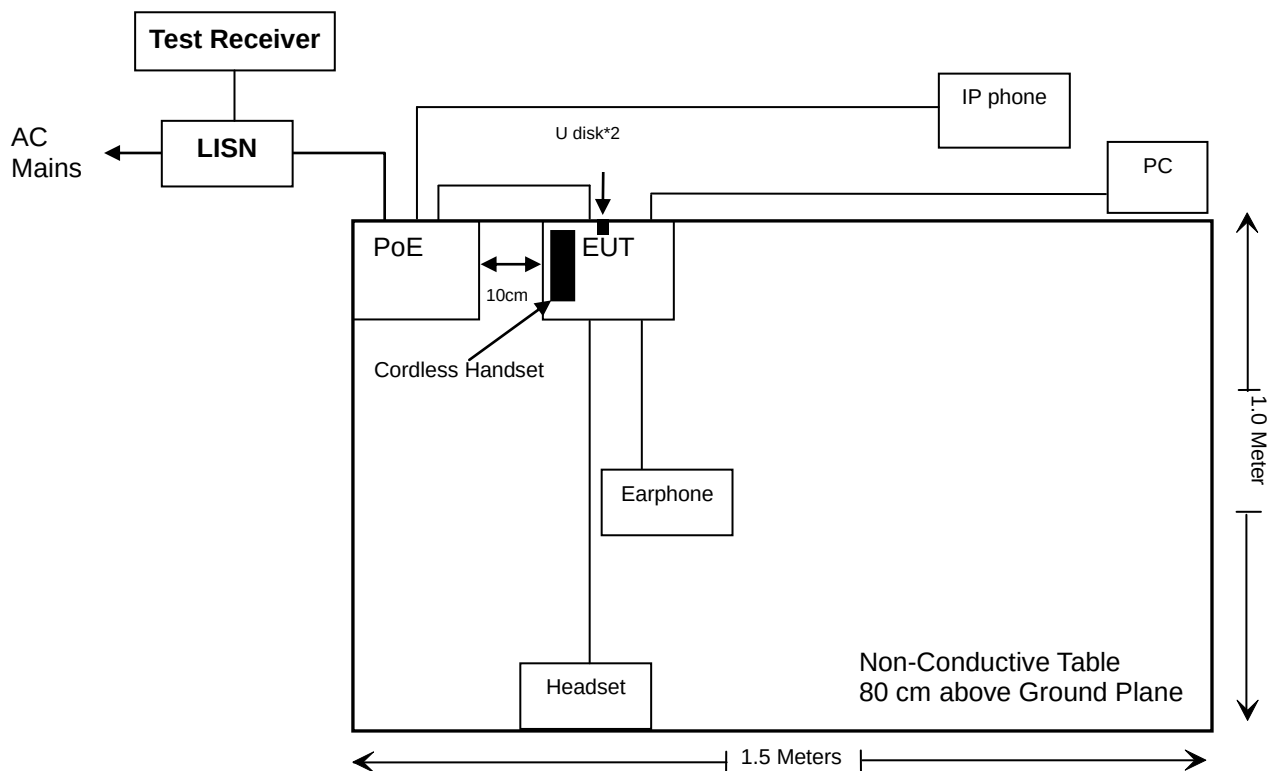


For Radiated Emission:

Test Mode 1&2&3

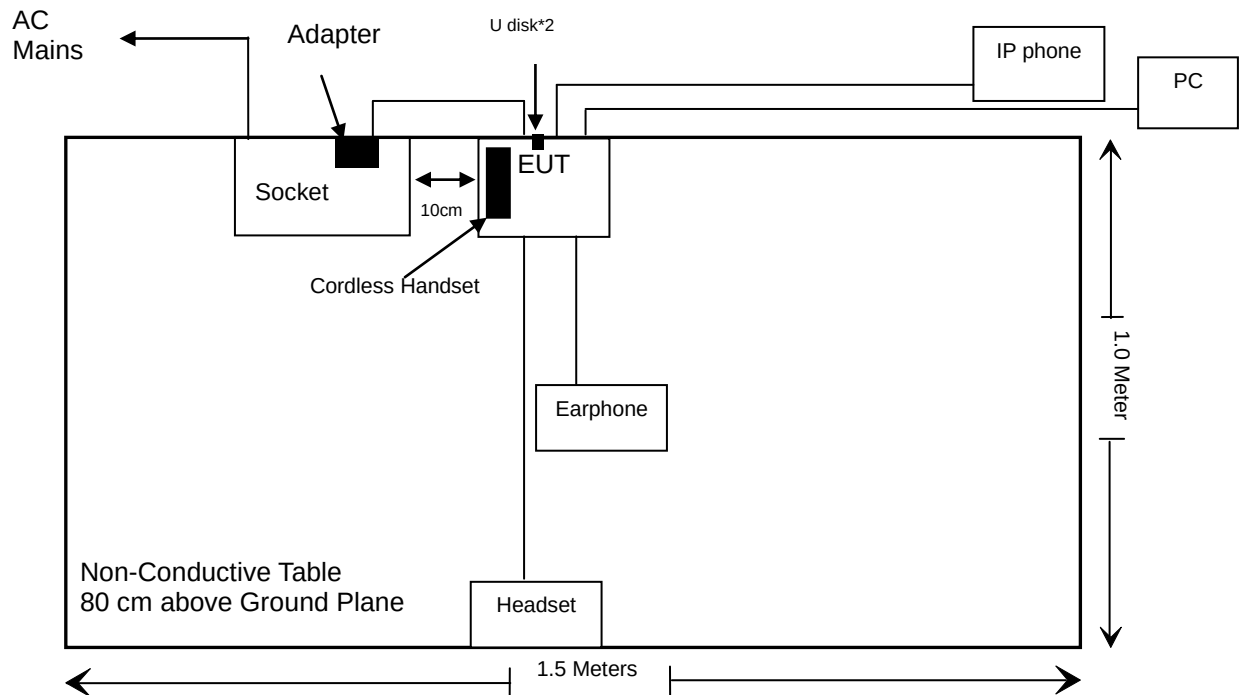

Test Mode 4

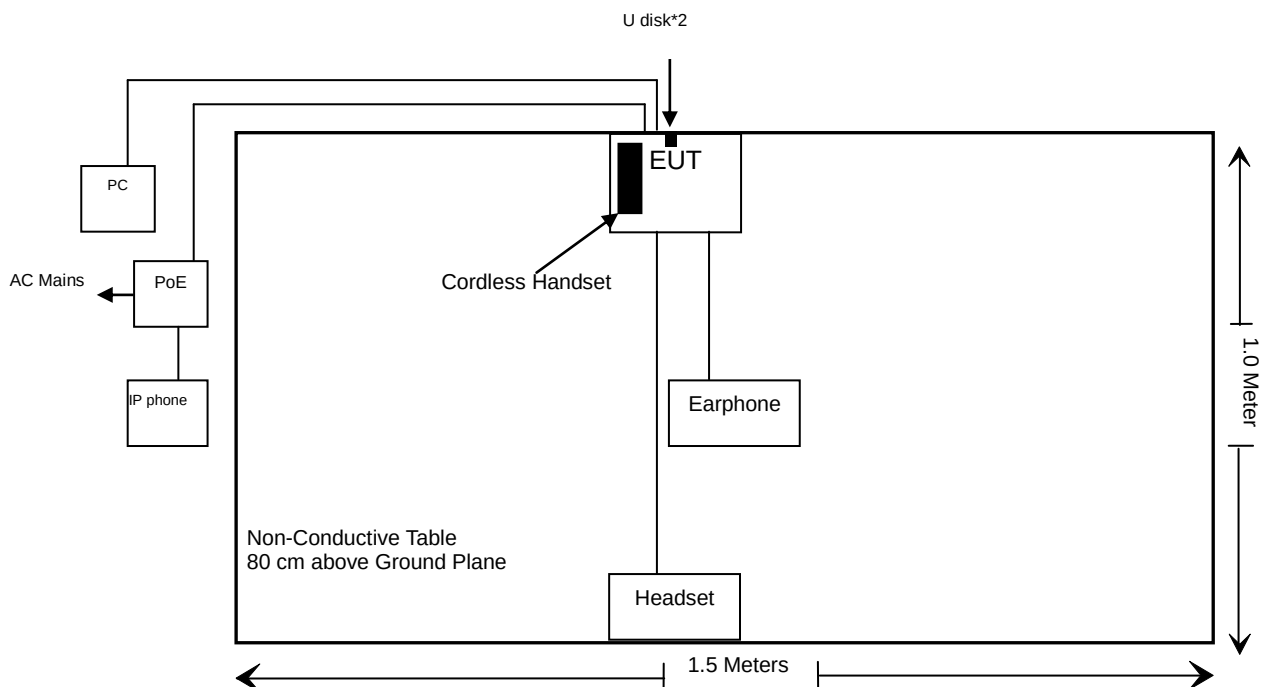

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2026/05/07	2027/05/06
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2026/05/07	2027/05/06
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2026/05/07	2027/05/06
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.17	N0350	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
Radiated Emission Test (Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2026/05/07	2027/05/06
SONOMA INSTRUMENT	Amplifier	310N	186131	2026/01/20	2027/01/19
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.13	N300	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.14	N800	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
Radiated Emission Test (Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101948	2026/05/07	2027/05/06
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2026/05/07	2027/05/06
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2026/05/07	2027/05/06
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2026/01/20	2027/01/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2026/01/29	2029/01/30
Unknown	RF Coaxial Cable	No.10	N050	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.11	N1000	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.19	N500	2026/05/07	2027/05/06
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A 1840	4012521	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.15	N600	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.16	N650	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

CONDUCTED EMISSIONS

Applicable Standard

FCC§15.107

EUT Setup

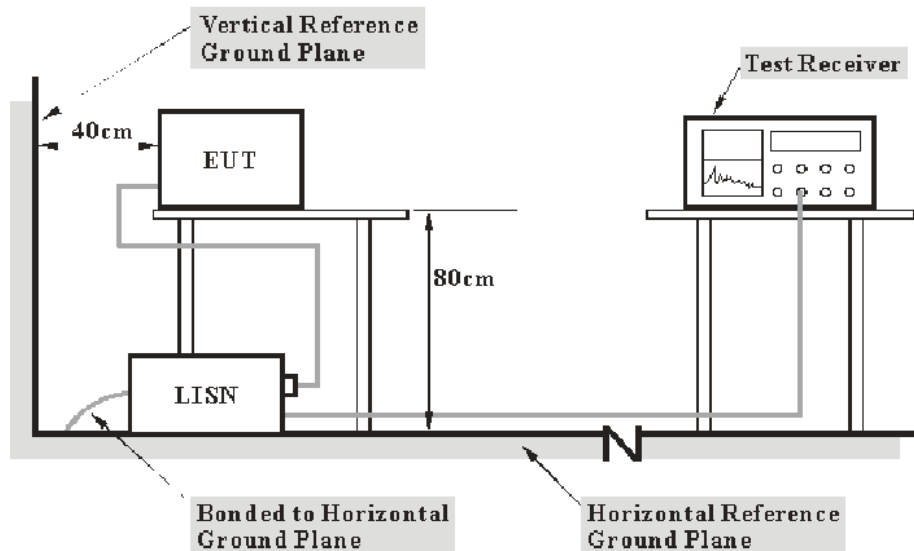

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data


Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	48 %
ATM Pressure:	100.1 kPa
Test Engineer:	Homelander Dai
Test Date:	2026-07-07
EUT Operation Mode:	Test Mode 1&2&3&4
Investigated Frequency Range:	150kHz to 30MHz

Test Result: Compliance. Please refer to following data.

Test Mode 1


AC 120V 60Hz, Line:

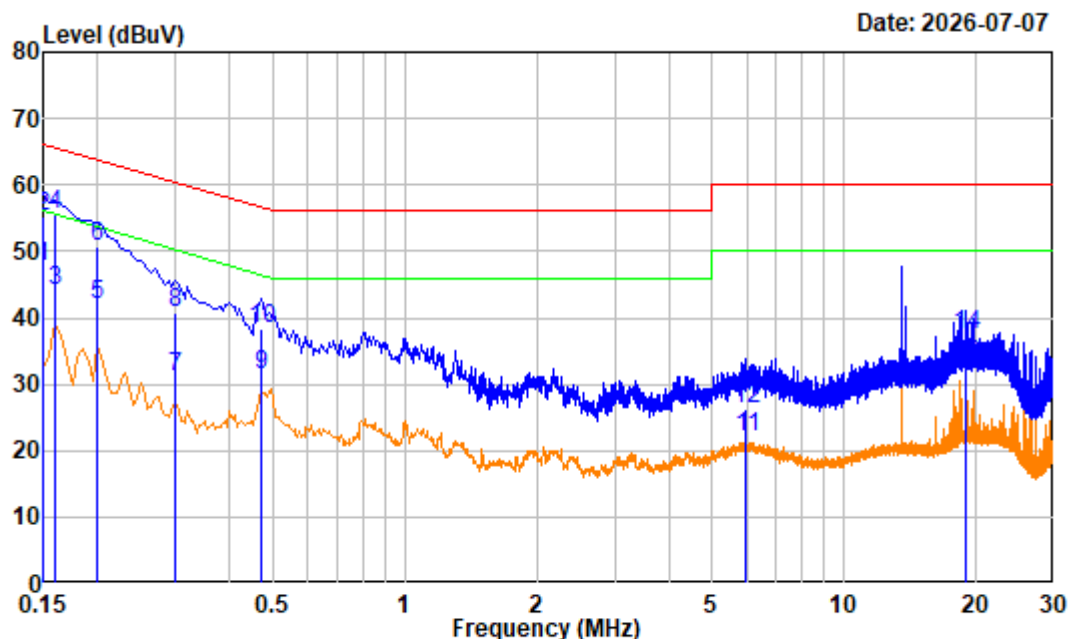

Site : Shielding Room
 Condition : Line
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 1
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	19.80	28.01	47.81	56.00	-8.19	Average
2	0.150	19.80	35.46	55.26	66.00	-10.74	QP
3	0.160	19.71	24.42	44.13	55.46	-11.33	Average
4	0.160	19.71	35.98	55.69	65.46	-9.77	QP
5	0.200	19.40	22.55	41.95	53.61	-11.66	Average
6	0.200	19.40	31.17	50.57	63.61	-13.04	QP
7	0.300	19.45	11.70	31.15	50.24	-19.09	Average
8	0.300	19.45	21.40	40.85	60.24	-19.39	QP
9	0.470	19.51	11.79	31.30	46.51	-15.21	Average
10	0.470	19.51	18.75	38.26	56.51	-18.25	QP
11	5.985	20.70	1.30	22.00	50.00	-28.00	Average
12	5.985	20.70	5.70	26.40	60.00	-33.60	QP
13	18.915	20.06	12.83	32.89	50.00	-17.11	Average
14	18.915	20.06	17.51	37.57	60.00	-22.43	QP

AC 120V 60Hz, Neutral:

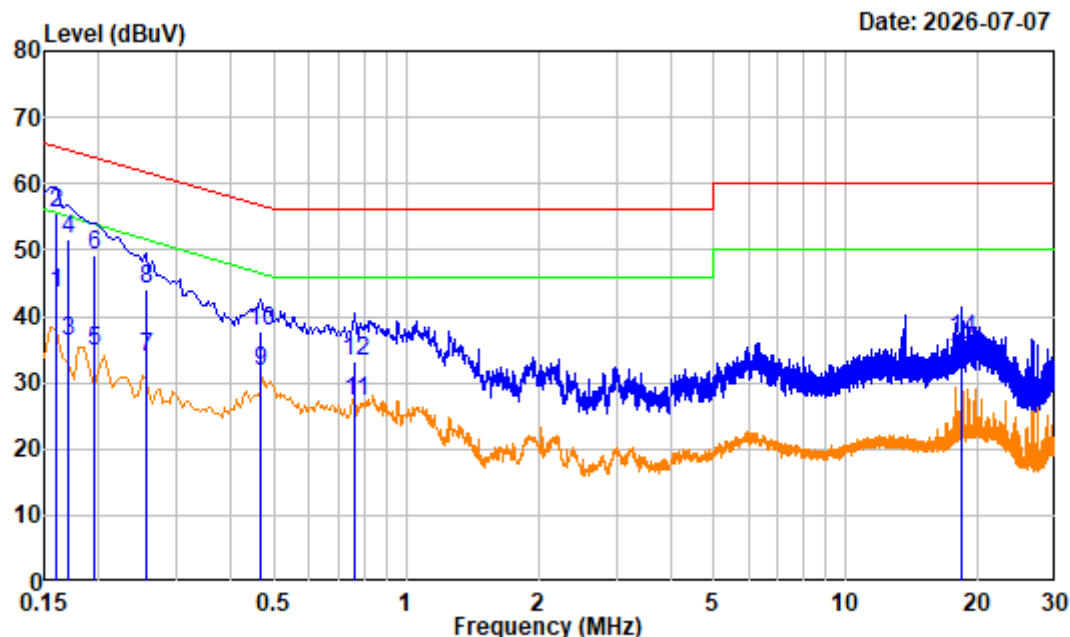


Site : Shielding Room
 Condition : neutral
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 1
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	19.96	23.41	43.37	55.46	-12.09	Average
2	0.160	19.96	35.61	55.57	65.46	-9.89	QP
3	0.170	19.91	16.32	36.23	54.96	-18.73	Average
4	0.170	19.91	31.68	51.59	64.96	-13.37	QP
5	0.195	19.82	14.93	34.75	53.82	-19.07	Average
6	0.195	19.82	29.29	49.11	63.82	-14.71	QP
7	0.255	19.78	14.11	33.89	51.59	-17.70	Average
8	0.255	19.78	24.21	43.99	61.59	-17.60	QP
9	0.465	19.73	11.95	31.68	46.60	-14.92	Average
10	0.465	19.73	18.09	37.82	56.60	-18.78	QP
11	0.765	20.67	6.36	27.03	46.00	-18.97	Average
12	0.765	20.67	12.42	33.09	56.00	-22.91	QP
13	18.245	20.03	13.62	33.65	50.00	-16.35	Average
14	18.245	20.03	16.65	36.68	60.00	-23.32	QP

Test Mode 2


AC 120V 60Hz, Line:

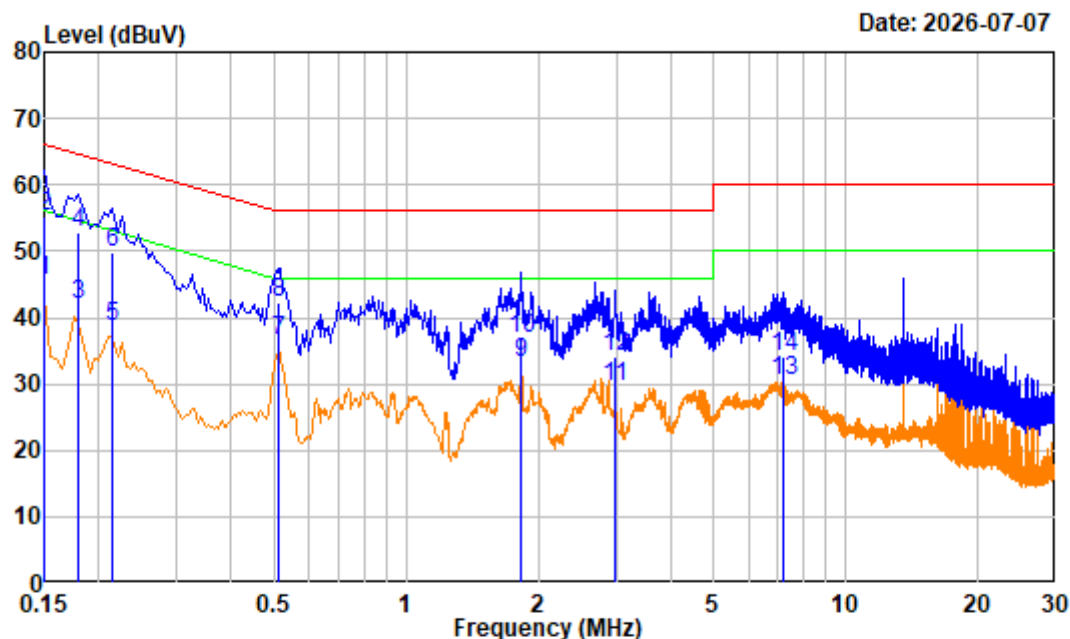

Site : Shielding Room
 Condition : Line
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 2
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	19.80	25.74	45.54	56.00	-10.46	Average
2	0.150	19.80	35.56	55.36	66.00	-10.64	QP
3	0.180	19.55	22.53	42.08	54.49	-12.41	Average
4	0.180	19.55	33.38	52.93	64.49	-11.56	QP
5	0.215	19.42	19.25	38.67	53.01	-14.34	Average
6	0.215	19.42	30.41	49.83	63.01	-13.18	QP
7	0.510	19.58	16.94	36.52	46.00	-9.48	Average
8	0.510	19.58	22.64	42.22	56.00	-13.78	QP
9	1.815	20.61	12.63	33.24	46.00	-12.76	Average
10	1.815	20.61	16.36	36.97	56.00	-19.03	QP
11	2.980	20.62	8.86	29.48	46.00	-16.52	Average
12	2.980	20.62	13.37	33.99	56.00	-22.01	QP
13	7.195	20.68	9.68	30.36	50.00	-19.64	Average
14	7.195	20.68	13.53	34.21	60.00	-25.79	QP

AC 120V 60Hz, Neutral:

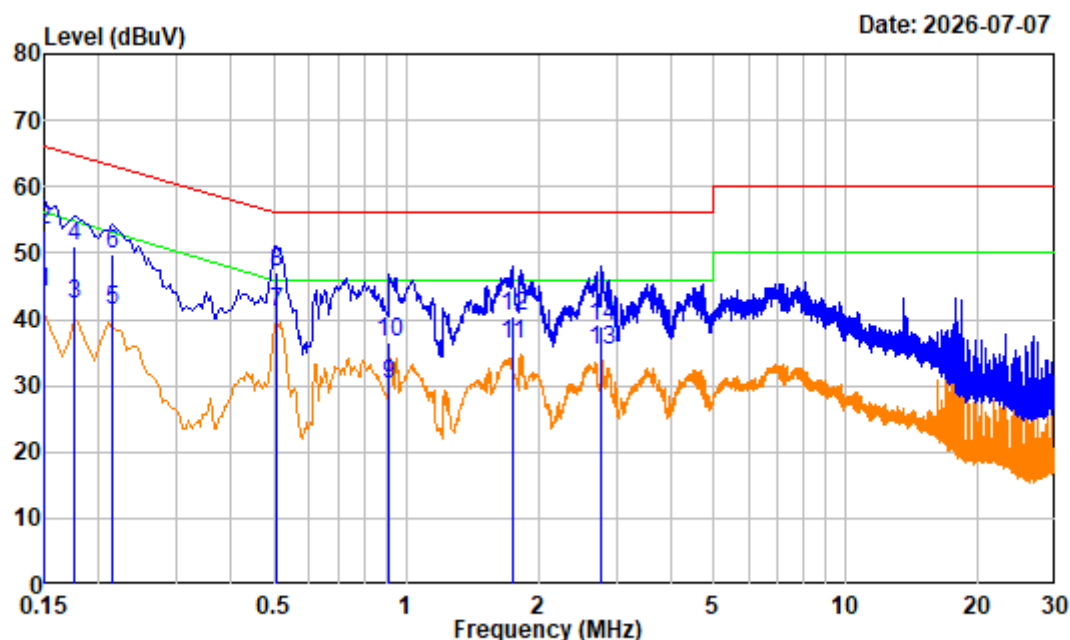

Site : Shielding Room
 Condition : neutral
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 2
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	20.00	24.04	44.04	56.00	-11.96	Average
2	0.150	20.00	33.41	53.41	66.00	-12.59	QP
3	0.175	19.89	22.45	42.34	54.72	-12.38	Average
4	0.175	19.89	31.11	51.00	64.72	-13.72	QP
5	0.215	19.80	21.68	41.48	53.01	-11.53	Average
6	0.215	19.80	30.02	49.82	63.01	-13.19	QP
7	0.505	19.75	21.16	40.91	46.00	-5.09	Average
8	0.505	19.75	27.30	47.05	56.00	-8.95	QP
9	0.915	20.51	9.67	30.18	46.00	-15.82	Average
10	0.915	20.51	15.94	36.45	56.00	-19.55	QP
11	1.740	20.42	15.80	36.22	46.00	-9.78	Average
12	1.740	20.42	20.04	40.46	56.00	-15.54	QP
13	2.770	20.33	15.12	35.45	46.00	-10.55	Average
14	2.770	20.33	18.65	38.98	56.00	-17.02	QP

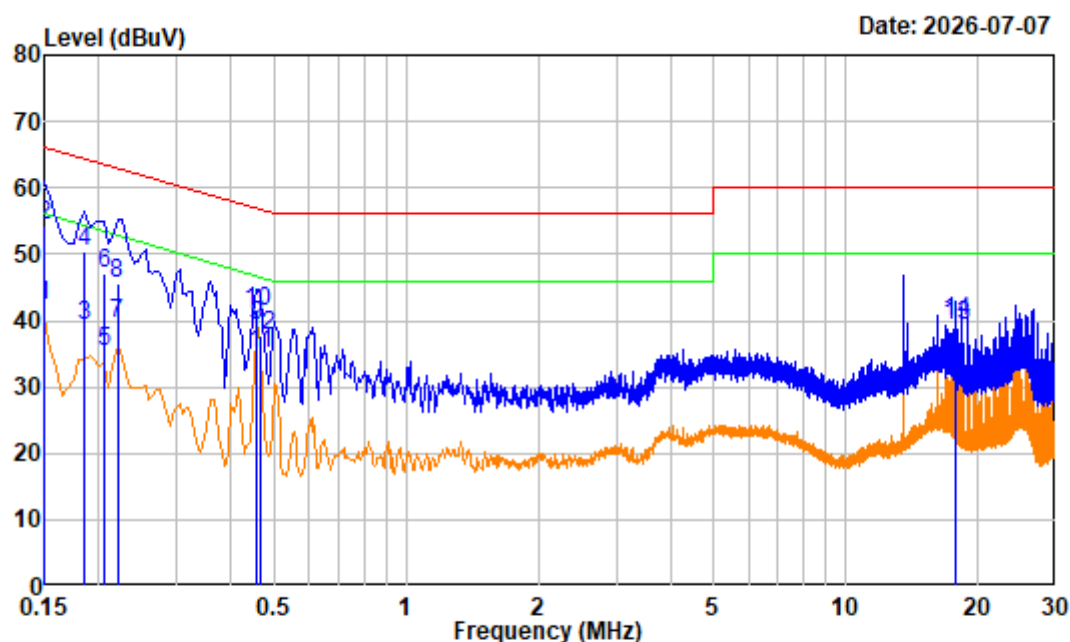Test Mode 3**AC 120V 60Hz, Line:**

Site : Shielding Room
 Condition : Line
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 3
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	19.80	22.35	42.15	56.00	-13.85	Average
2	0.150	19.80	34.47	54.27	66.00	-11.73	QP
3	0.185	19.51	19.68	39.19	54.26	-15.07	Average
4	0.185	19.51	31.04	50.55	64.26	-13.71	QP
5	0.205	19.41	15.86	35.27	53.41	-18.14	Average
6	0.205	19.41	27.62	47.03	63.41	-16.38	QP
7	0.220	19.42	20.21	39.63	52.82	-13.19	Average
8	0.220	19.42	26.10	45.52	62.82	-17.30	QP
9	0.455	19.51	19.70	39.21	46.78	-7.57	Average
10	0.455	19.51	21.81	41.32	56.78	-15.46	QP
11	0.465	19.51	15.58	35.09	46.60	-11.51	Average
12	0.465	19.51	18.17	37.68	56.60	-18.92	QP
13	17.695	20.24	18.88	39.12	50.00	-10.88	Average
14	17.695	20.24	19.75	39.99	60.00	-20.01	QP

AC 120V 60Hz, Neutral:

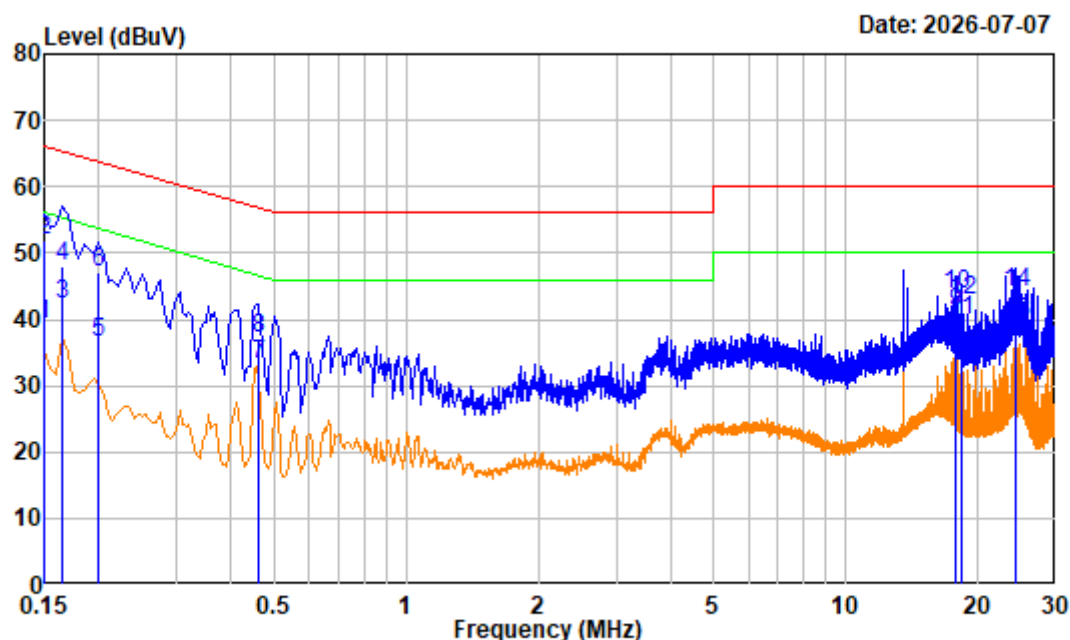


Site : Shielding Room
 Condition : neutral
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 3
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	20.00	19.27	39.27	56.00	-16.73	Average
2	0.150	20.00	32.03	52.03	66.00	-13.97	QP
3	0.165	19.93	22.29	42.22	55.21	-12.99	Average
4	0.165	19.93	27.92	47.85	65.21	-17.36	QP
5	0.200	19.80	16.69	36.49	53.61	-17.12	Average
6	0.200	19.80	27.38	47.18	63.61	-16.43	QP
7	0.460	19.73	13.44	33.17	46.69	-13.52	Average
8	0.460	19.73	17.27	37.00	56.69	-19.69	QP
9	17.695	20.04	21.04	41.08	50.00	-8.92	Average
10	17.695	20.04	23.76	43.80	60.00	-16.20	QP
11	18.245	20.03	19.80	39.83	50.00	-10.17	Average
12	18.245	20.03	22.72	42.75	60.00	-17.25	QP
13	24.350	19.91	19.64	39.55	50.00	-10.45	Average
14	24.350	19.91	24.22	44.13	60.00	-15.87	QP

Test Mode 4


AC 120V 60Hz, Line:

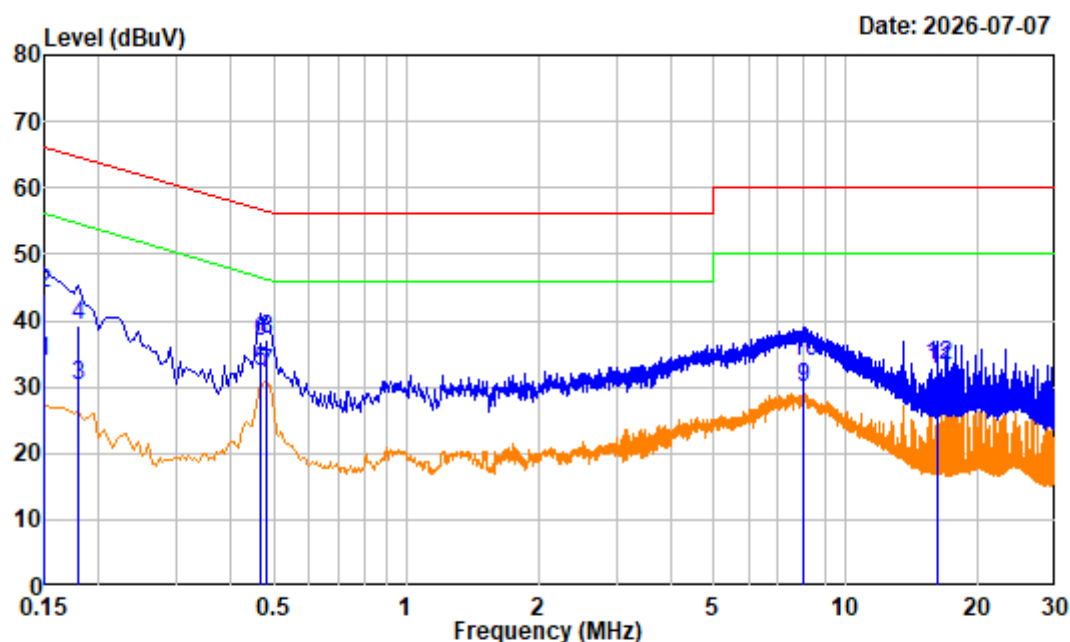

Site : Shielding Room
 Condition : Line
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 4
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	19.80	14.10	33.90	56.00	-22.10	Average
2	0.150	19.80	24.42	44.22	66.00	-21.78	QP
3	0.180	19.55	10.56	30.11	54.49	-24.38	Average
4	0.180	19.55	19.55	39.10	64.49	-25.39	QP
5	0.465	19.51	12.67	32.18	46.60	-14.42	Average
6	0.465	19.51	17.45	36.96	56.60	-19.64	QP
7	0.480	19.52	12.62	32.14	46.34	-14.20	Average
8	0.480	19.52	17.71	37.23	56.34	-19.11	QP
9	7.975	20.45	9.30	29.75	50.00	-20.25	Average
10	7.975	20.45	13.34	33.79	60.00	-26.21	QP
11	16.230	20.47	12.00	32.47	50.00	-17.53	Average
12	16.230	20.47	12.81	33.28	60.00	-26.72	QP

AC 120V 60Hz, Neutral:

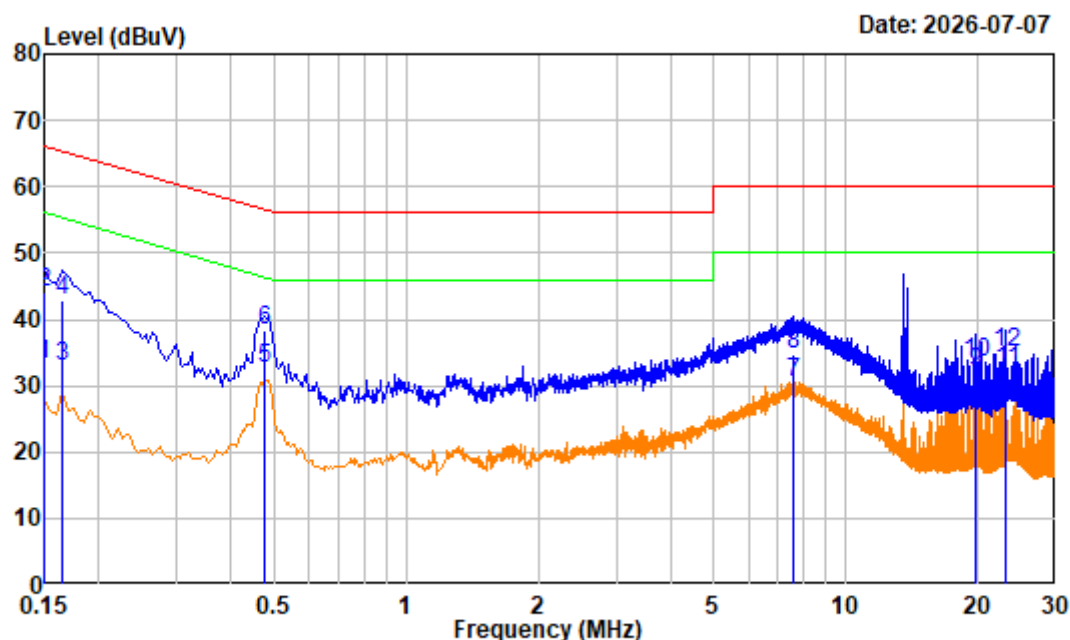

Site : Shielding Room
 Condition : neutral
 Job No. : 2604U27448E-EM
 Test Mode : Test Mode 4
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	20.00	13.13	33.13	56.00	-22.87	Average
2	0.150	20.00	24.08	44.08	66.00	-21.92	QP
3	0.165	19.93	13.09	33.02	55.21	-22.19	Average
4	0.165	19.93	22.85	42.78	65.21	-22.43	QP
5	0.475	19.73	12.87	32.60	46.43	-13.83	Average
6	0.475	19.73	18.61	38.34	56.43	-18.09	QP
7	7.560	20.56	10.02	30.58	50.00	-19.42	Average
8	7.560	20.56	14.09	34.65	60.00	-25.35	QP
9	19.710	20.01	11.95	31.96	50.00	-18.04	Average
10	19.710	20.01	13.38	33.39	60.00	-26.61	QP
11	23.130	19.94	12.26	32.20	50.00	-17.80	Average
12	23.130	19.94	15.12	35.06	60.00	-24.94	QP


RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup

30MHz - 1GHz:

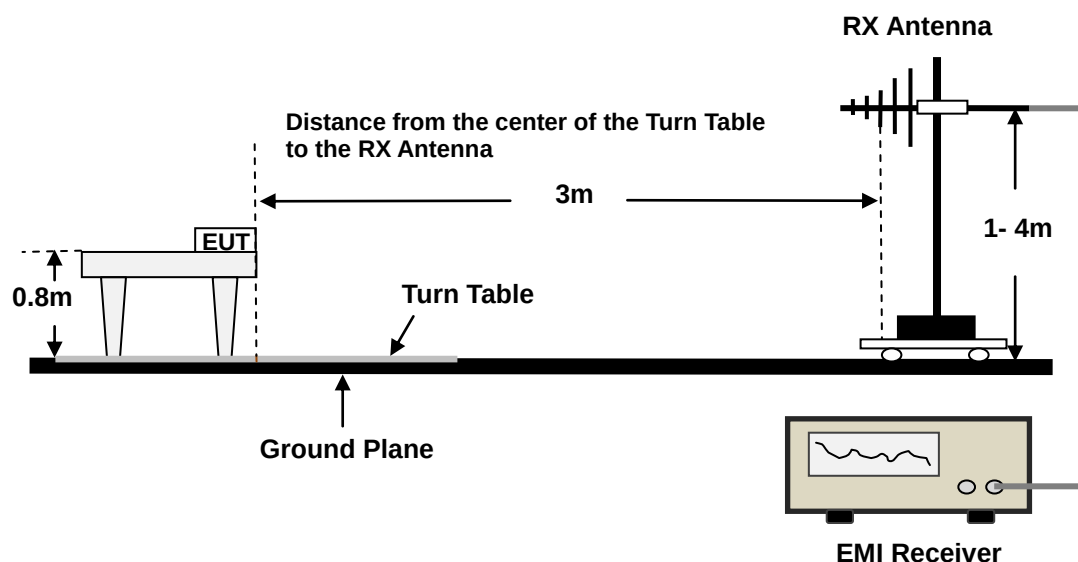

Above 1GHz:

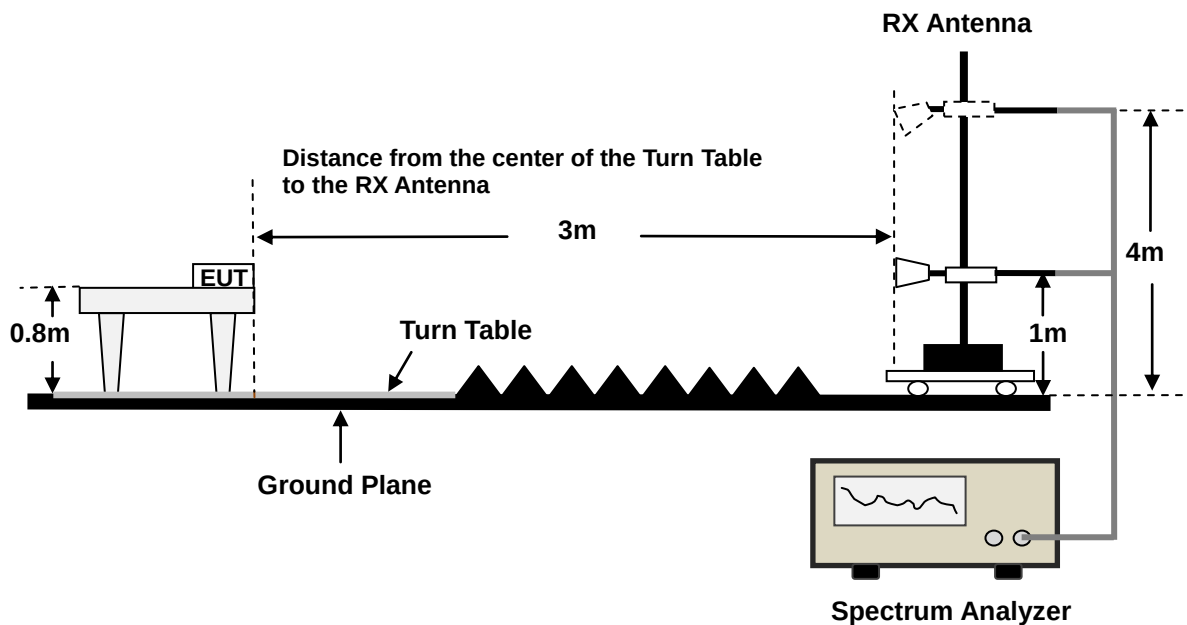

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 30 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
30 MHz - 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP
Above 1GHz	PK	1 MHz	3 MHz	/	PK
	AV	1 MHz	5 kHz	/	PK

Note 1: For below 1GHz testing, if the maximized peak measured value complies with the limit, then it is unnecessary to perform QP measurement.

Note 2: For above 1GHz testing, the peak value is low than AV limit, then the result is unnecessary to perform Peak/AV measurement.

Note 3: Other emissions which were more than 20dB below to the limit or on noise floor level was not recorded.

Required highest measurement frequency for radiated emissions:

Highest frequency generated or used in the device or on which the device operates or tunes(MHz) (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$


$$\text{Level} = \text{Reading} + \text{Factor}$$

Test Data

Environmental Conditions

Temperature:	23.8 °C	25.2 °C
Relative Humidity:	52 %	56 %
ATM Pressure:	100.1kPa	100.1 kPa
Test Engineer:	Jayden Luo	Max Tao
Test Date:	2026-07-31	2026-07-06
EUT Operation Mode:	Test Mode 1&2&3&4	Test Mode 1&2&3&4
Investigated Frequency Range:	Below 1GHz	Above 1GHz


Test Result: Compliance, please refer to the following data.

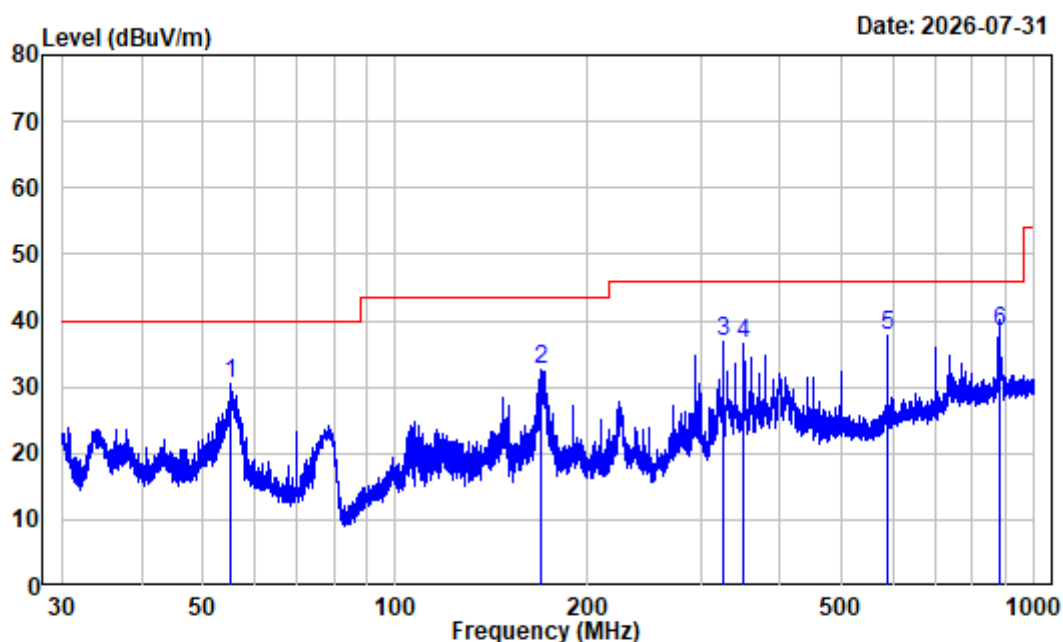Test Mode 1**Below 1GHz****Horizontal**

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604U27448E-EM Tester: Jayden Luo
 Test Mode : Test Mode 1
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.197	-10.69	41.27	30.58	40.00	-9.42	Peak
2	169.228	-13.72	46.20	32.48	43.50	-11.02	Peak
3	325.453	-8.04	44.99	36.95	46.00	-9.05	Peak
4	350.016	-6.74	43.18	36.44	46.00	-9.56	Peak
5	589.939	-2.35	40.12	37.77	46.00	-8.23	Peak
6	884.741	1.60	36.77	38.37	46.00	-7.63	QP

Vertical

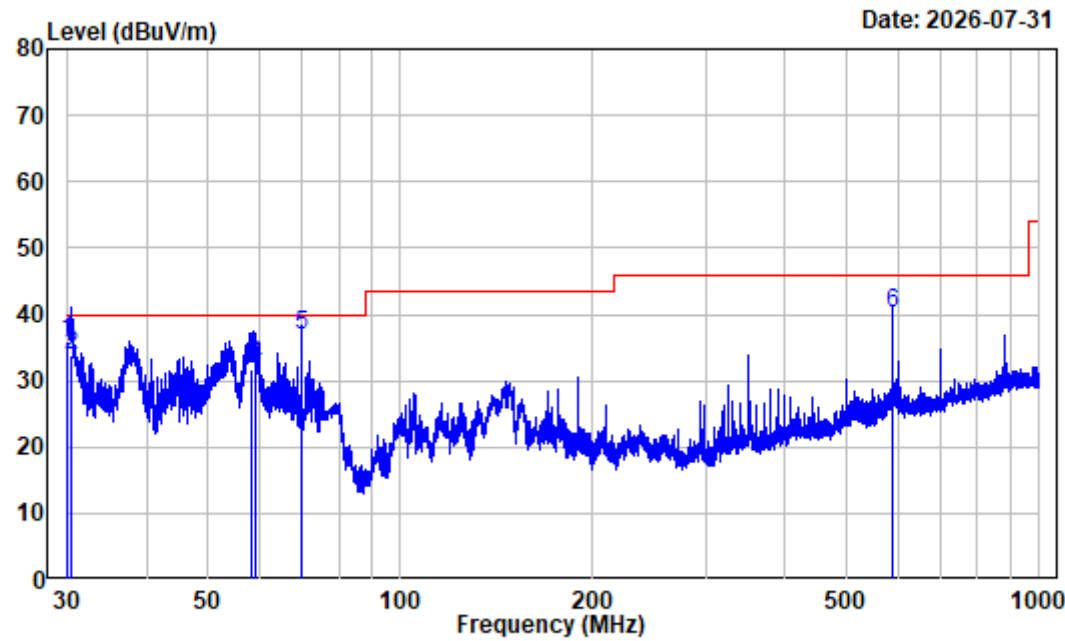

Site : chamber

Condition : 3m VERTICAL

Job No. : 2604U27448E-EM Tester: Jayden Luo


Test Mode : Test Mode 1

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.026	-11.75	47.81	36.06	40.00	-3.94	QP
2	30.571	-11.86	45.57	33.71	40.00	-6.29	QP
3	58.254	-10.21	41.80	31.59	40.00	-8.41	QP
4	59.155	-10.19	42.45	32.26	40.00	-7.74	QP
5	69.999	-14.67	51.42	36.75	40.00	-3.25	QP
6	589.939	-2.35	42.54	40.19	46.00	-5.81	QP

1-18GHz


Horizontal

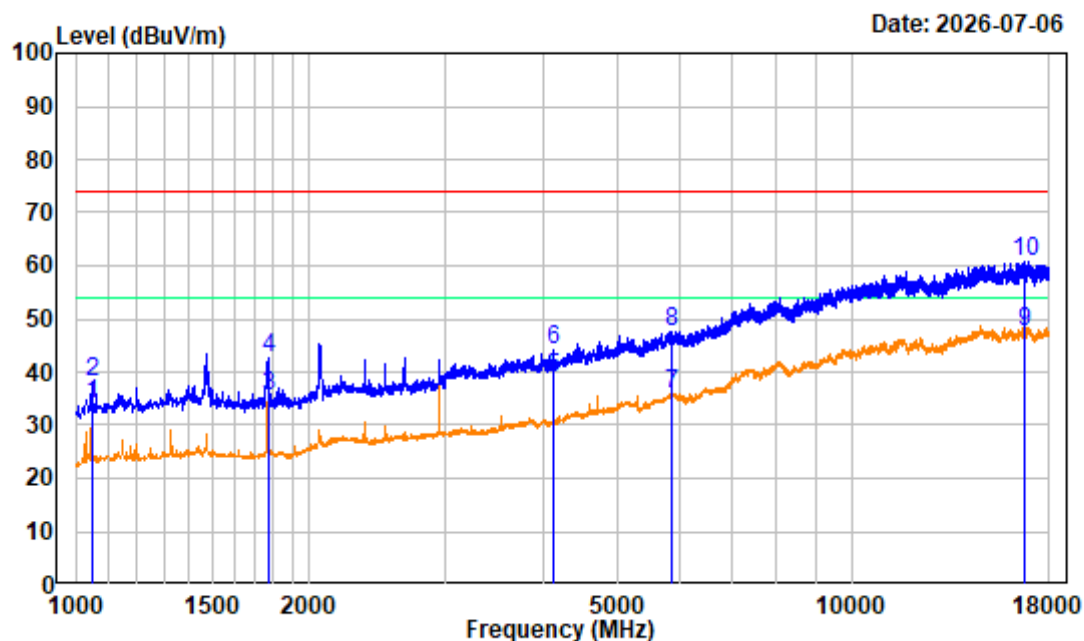

Site : chamber
 Condition : 3m HORIZONTAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 1
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	47.97	34.09	54.00	-19.91	Average
2	1048.875	-13.88	51.92	38.04	74.00	-35.96	Peak
3	1769.250	-13.18	48.48	35.30	54.00	-18.70	Average
4	1769.250	-13.18	55.74	42.56	74.00	-31.44	Peak
5	4128.000	-8.31	47.07	38.76	54.00	-15.24	Average
6	4128.000	-8.31	52.50	44.19	74.00	-29.81	Peak
7	5868.375	-5.24	41.12	35.88	54.00	-18.12	Average
8	5868.375	-5.24	52.97	47.73	74.00	-26.27	Peak
9	16699.500	7.04	40.66	47.70	54.00	-6.30	Average
10	16699.500	7.04	53.64	60.68	74.00	-13.32	Peak

Vertical

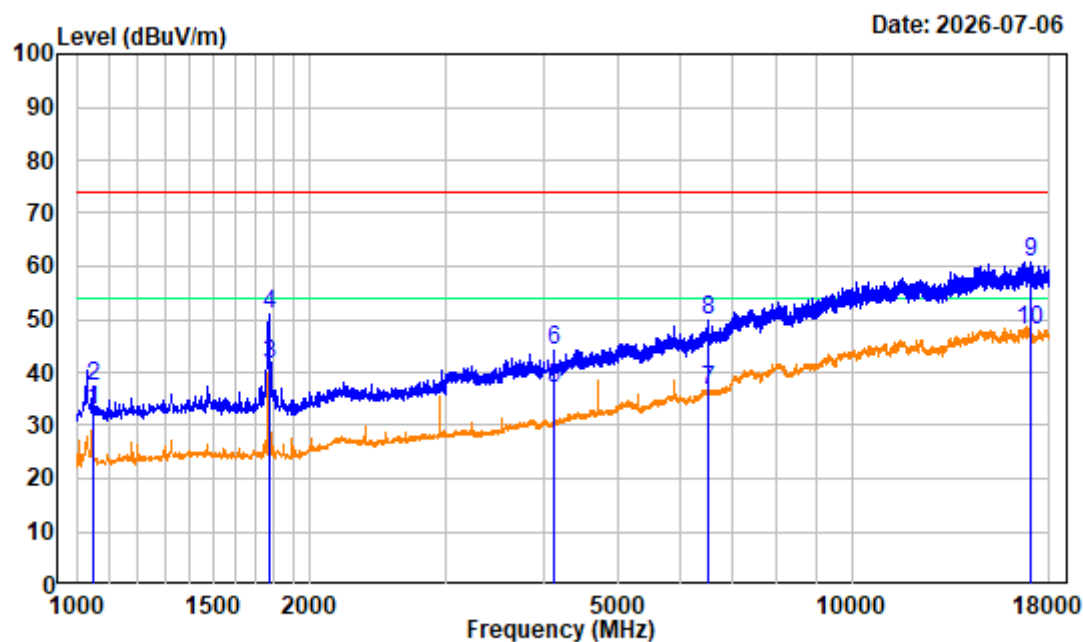


Site : chamber
 Condition : 3m VERTICAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 1
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	46.77	32.89	54.00	-21.11	Average
2	1048.875	-13.88	51.28	37.40	74.00	-36.60	Peak
3	1769.250	-13.18	54.55	41.37	54.00	-12.63	Average
4	1769.250	-13.18	64.20	51.02	74.00	-22.98	Peak
5	4128.000	-8.31	45.21	36.90	54.00	-17.10	Average
6	4128.000	-8.31	52.31	44.00	74.00	-30.00	Peak
7	6529.250	-4.18	40.91	36.73	54.00	-17.27	Average
8	6529.250	-4.18	53.96	49.78	74.00	-24.22	Peak
9	16986.380	7.65	53.17	60.82	74.00	-13.18	Peak
10	16986.380	7.65	40.11	47.76	54.00	-6.24	Average

Above 18GHz


Horizontal

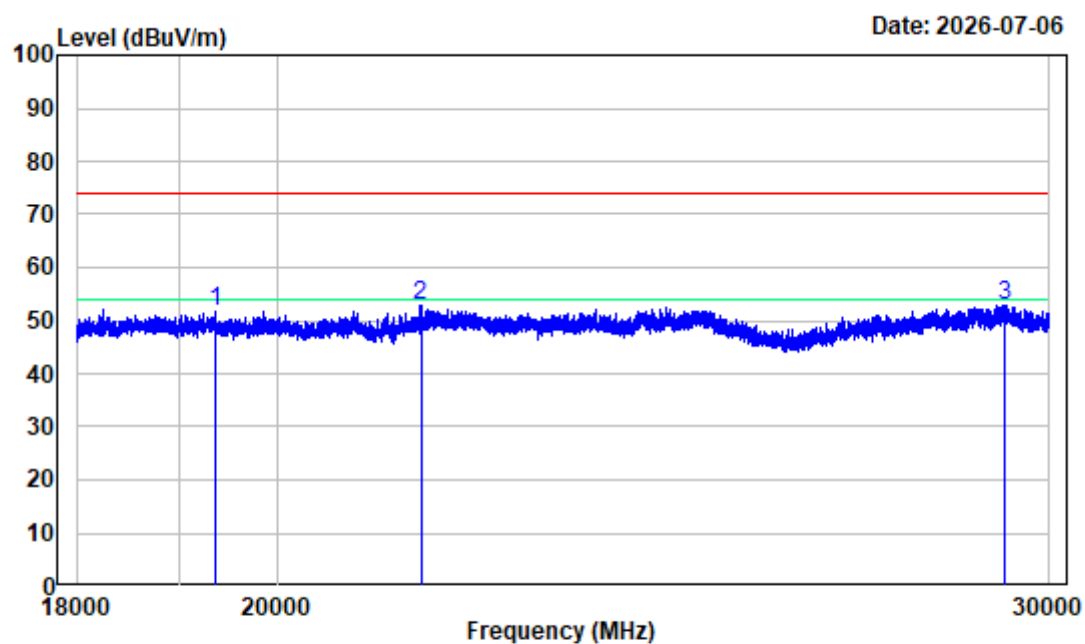

Site : chamber
Condition : 3m HORIZONTAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 1
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	19360.500	-2.61	54.28	51.67	74.00 -22.33 Peak
2	21565.500	1.02	51.93	52.95	74.00 -21.05 Peak
3	29308.500	4.89	48.03	52.92	74.00 -21.08 Peak

Vertical

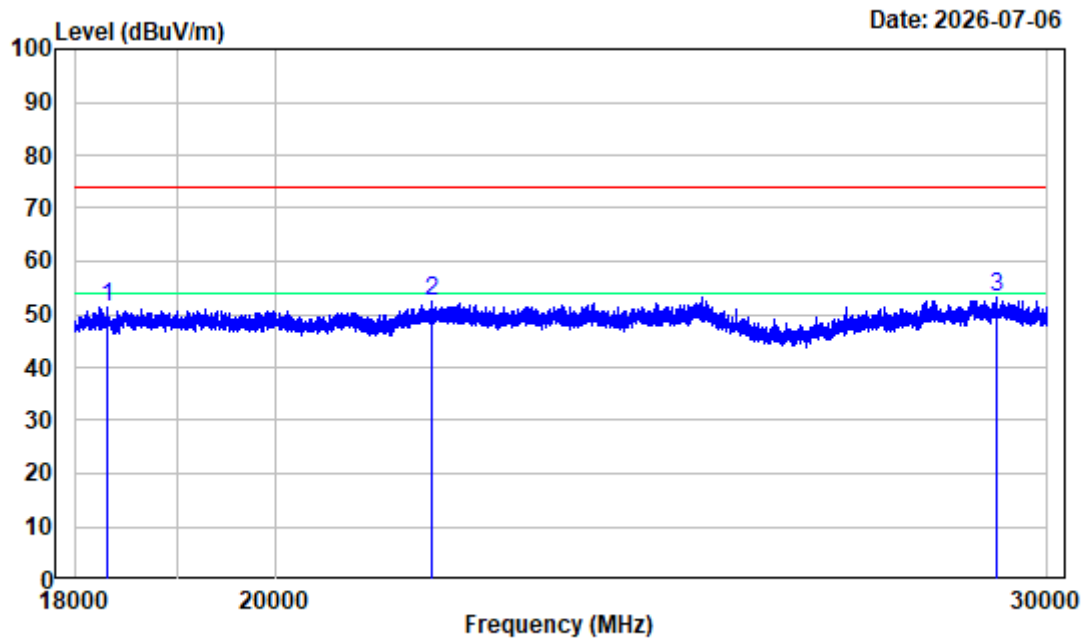


Site : chamber
Condition : 3m VERTICAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 1
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 18303.000	-3.89	55.34	51.45	74.00	-22.55	Peak
2 21724.500	1.32	51.20	52.52	74.00	-21.48	Peak
3 29199.000	4.92	48.35	53.27	74.00	-20.73	Peak

Test Mode 2

Below 1GHz


Horizontal

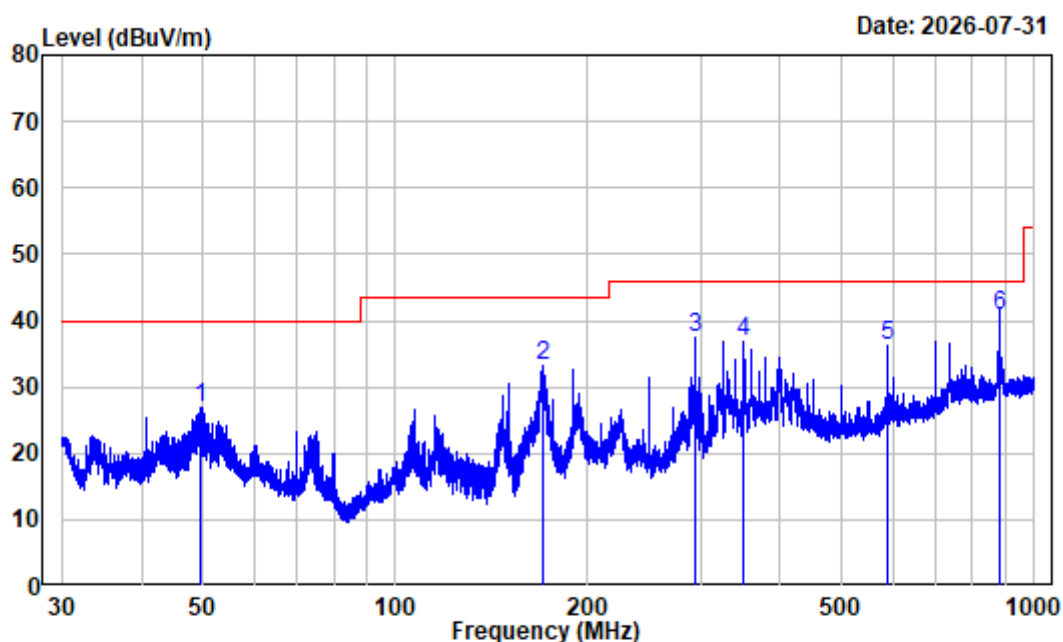

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604U27448E-EM Tester: Jayden Luo
 Test Mode : Test Mode 2
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.511	-9.88	36.74	26.86	40.00	-13.14	Peak
2	170.046	-13.63	46.85	33.22	43.50	-10.28	Peak
3	295.018	-8.84	46.42	37.58	46.00	-8.42	Peak
4	350.016	-6.74	43.58	36.84	46.00	-9.16	Peak
5	589.939	-2.35	38.44	36.09	46.00	-9.91	Peak
6	884.734	1.60	39.05	40.65	46.00	-5.35	QP

Vertical

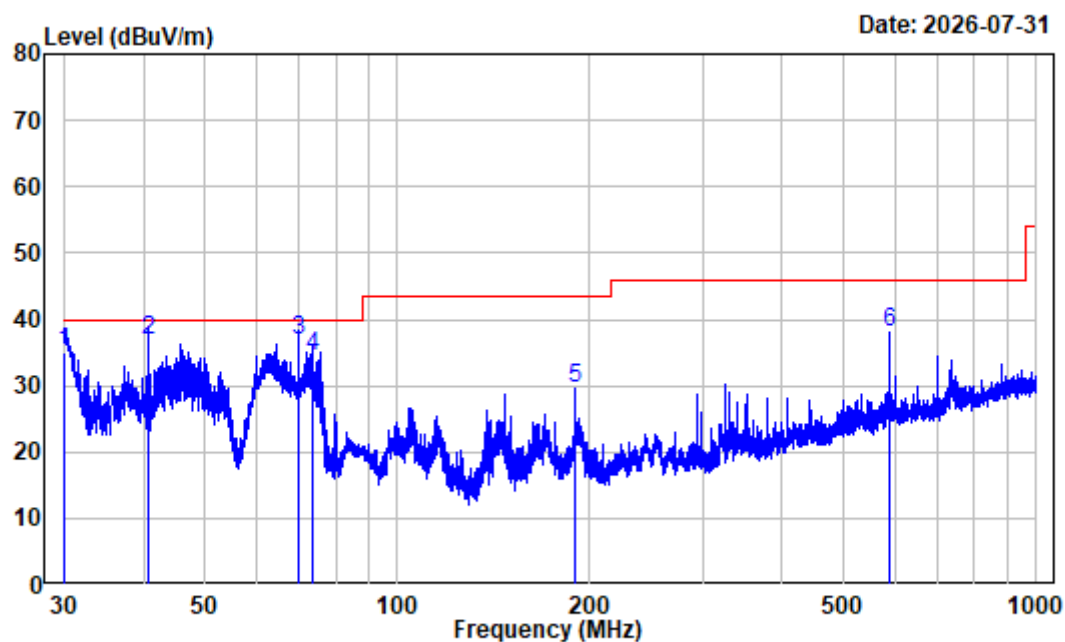


Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2604U27448E-EM Tester: Jayden Luo
 Test Mode : Test Mode 2
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.013	-11.74	46.78	35.04	40.00	-4.96	QP
2	40.677	-10.43	47.37	36.94	40.00	-3.06	QP
3	69.998	-14.67	51.64	36.97	40.00	-3.03	QP
4	73.424	-15.69	49.97	34.28	40.00	-5.72	QP
5	190.072	-10.33	39.98	29.65	43.50	-13.85	Peak
6	589.939	-2.35	40.40	38.05	46.00	-7.95	Peak

1-18GHz


Horizontal

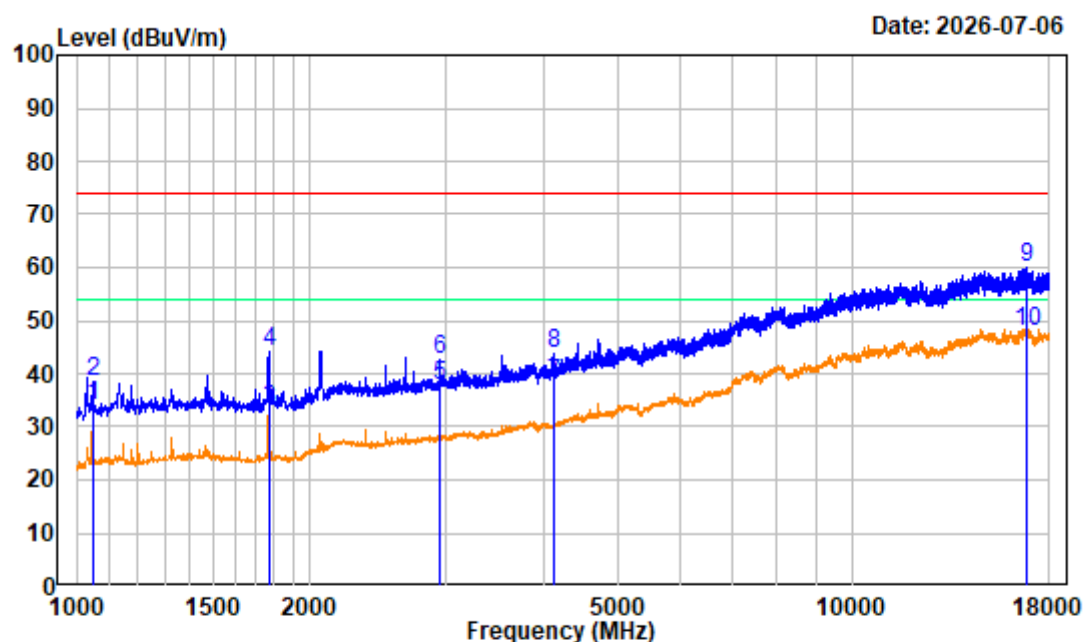

Site : chamber
 Condition : 3m HORIZONTAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 2
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	47.72	33.84	54.00	-20.16	Average
2	1048.875	-13.88	52.56	38.68	74.00	-35.32	Peak
3	1769.250	-13.18	46.42	33.24	54.00	-20.76	Average
4	1769.250	-13.18	57.43	44.25	74.00	-29.75	Peak
5	2948.625	-9.75	47.58	37.83	54.00	-16.17	Average
6	2948.625	-9.75	52.27	42.52	74.00	-31.48	Peak
7	4128.000	-8.31	46.25	37.94	54.00	-16.06	Average
8	4128.000	-8.31	52.16	43.85	74.00	-30.15	Peak
9	16850.380	7.86	52.30	60.16	74.00	-13.84	Peak
10	16850.380	7.86	39.94	47.80	54.00	-6.20	Average

Vertical

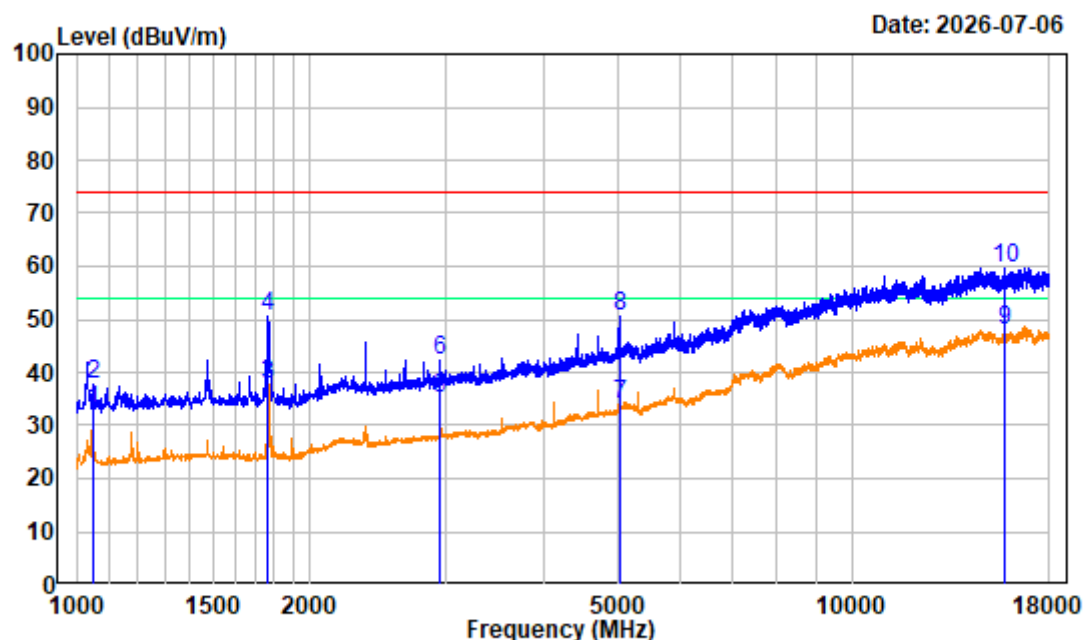


Site : chamber
 Condition : 3m VERTICAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 2
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	46.72	32.84	54.00	-21.16	Average
2	1048.875	-13.88	51.74	37.86	74.00	-36.14	Peak
3	1767.125	-13.18	50.92	37.74	54.00	-16.26	Average
4	1767.125	-13.18	63.58	50.40	74.00	-23.60	Peak
5	2948.625	-9.75	44.87	35.12	54.00	-18.88	Average
6	2948.625	-9.75	51.87	42.12	74.00	-31.88	Peak
7	5014.125	-6.32	40.33	34.01	54.00	-19.99	Average
8	5014.125	-6.32	56.81	50.49	74.00	-23.51	Peak
9	15743.250	6.18	41.65	47.83	54.00	-6.17	Average
10	15743.250	6.18	53.40	59.58	74.00	-14.42	Peak

Above 18GHz


Horizontal

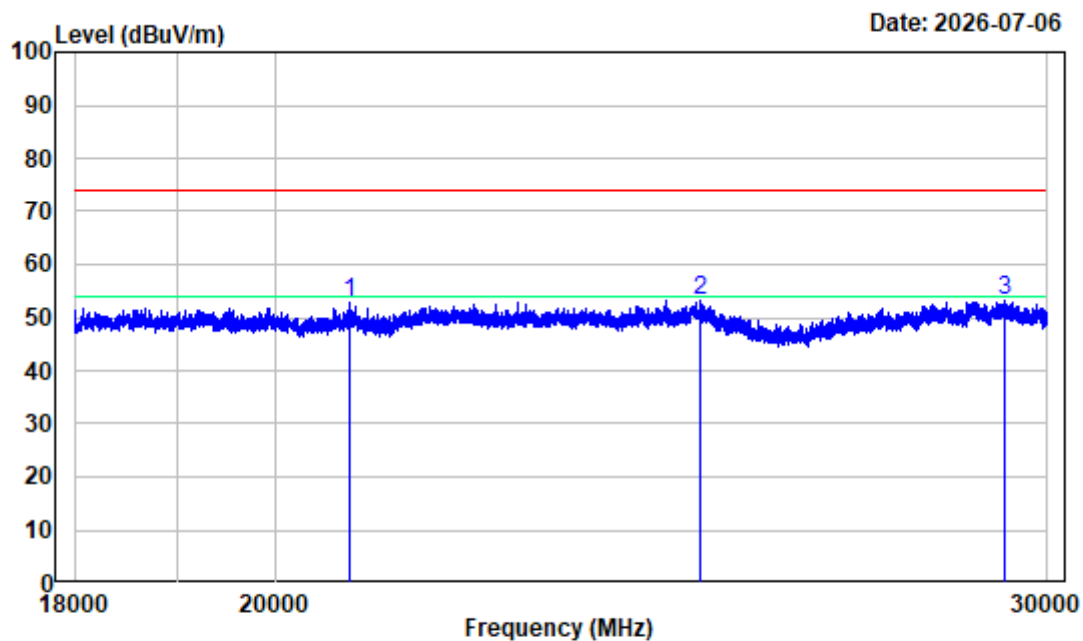

Site : chamber
Condition : 3m HORIZONTAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 2
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz


Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 20787.000	-0.53	53.25	52.72	74.00	-21.28	Peak
2 25011.000	5.37	48.00	53.37	74.00	-20.63	Peak
3 29338.500	4.89	48.41	53.30	74.00	-20.70	Peak

Vertical

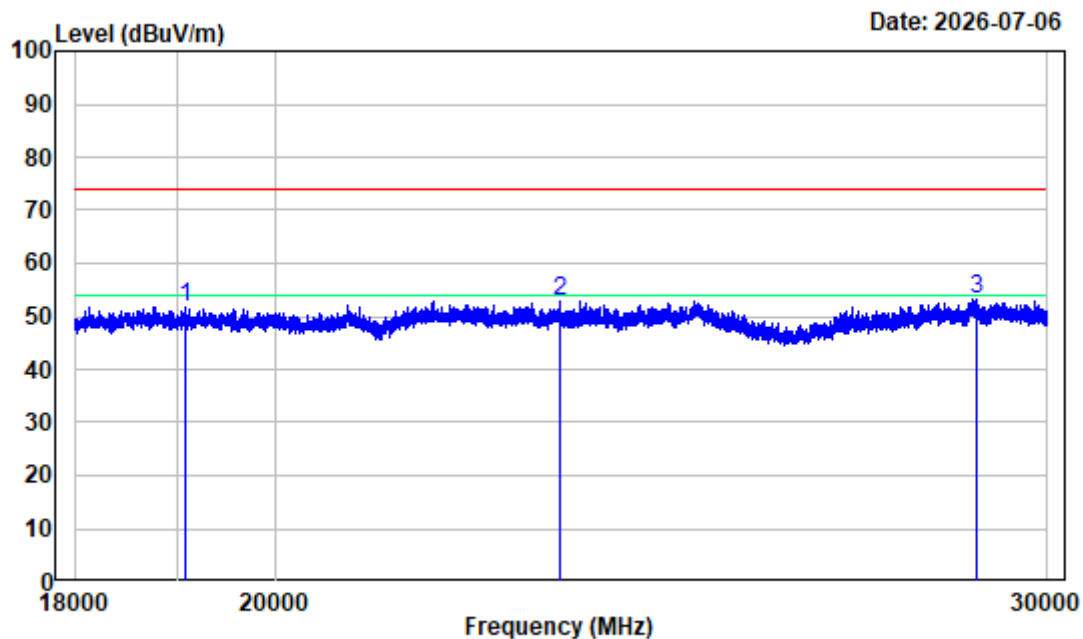

Site : chamber
Condition : 3m VERTICAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 2
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19078.500	-2.78	54.62	51.84	74.00	-22.16	Peak
2	23215.500	2.87	50.05	52.92	74.00	-21.08	Peak
3	28911.000	4.94	48.23	53.17	74.00	-20.83	Peak

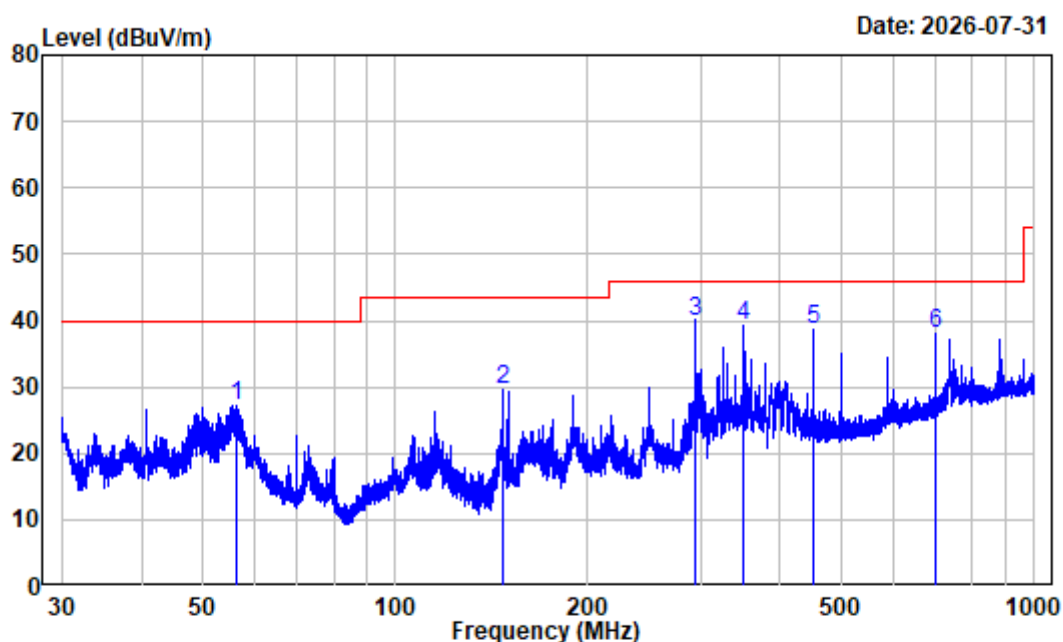Test Mode 3**Below 1GHz****Horizontal**

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604U27448E-EM Tester: Jayden Luo
 Test Mode : Test Mode 3
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	56.469	-10.48	37.63	27.15	40.00	-12.85	Peak
2	147.468	-14.79	44.40	29.61	43.50	-13.89	Peak
3	294.888	-8.84	48.65	39.81	46.00	-6.19	QP
4	350.016	-6.74	45.89	39.15	46.00	-6.85	Peak
5	450.147	-4.85	43.40	38.55	46.00	-7.45	Peak
6	700.225	-1.03	38.97	37.94	46.00	-8.06	Peak

Vertical

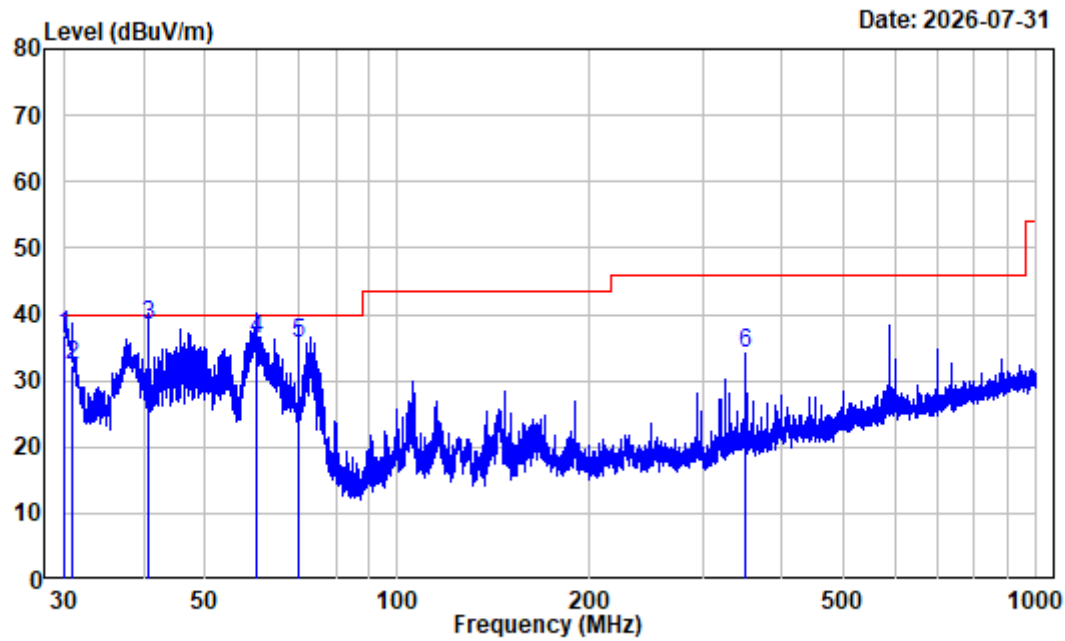


Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2604U27448E-EM Tester: Jayden Luo
 Test Mode : Test Mode 3
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.026	-11.75	48.68	36.93	40.00	-3.07	QP
2	30.881	-11.92	44.23	32.31	40.00	-7.69	QP
3	40.683	-10.43	48.71	38.28	40.00	-1.72	QP
4	60.016	-10.47	46.70	36.23	40.00	-3.77	QP
5	69.988	-14.66	50.40	35.74	40.00	-4.26	QP
6	350.016	-6.74	40.87	34.13	46.00	-11.87	Peak

1-18GHz


Horizontal

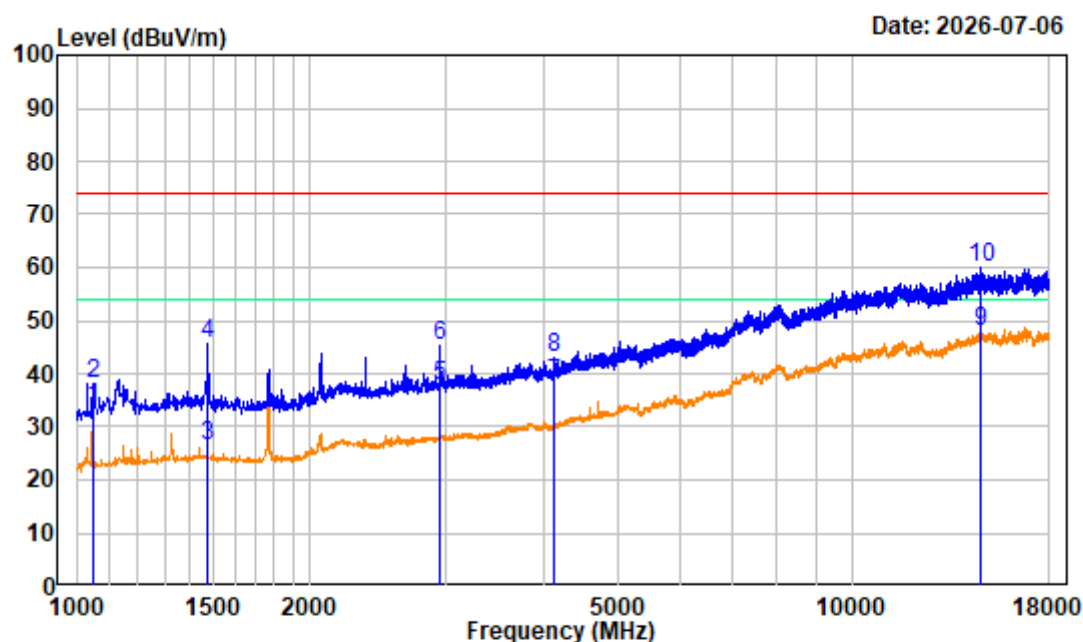

Site : chamber
 Condition : 3m HORIZONTAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 3
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	47.48	33.60	54.00	-20.40	Average
2	1048.875	-13.88	51.96	38.08	74.00	-35.92	Peak
3	1473.875	-12.61	38.96	26.35	54.00	-27.65	Average
4	1473.875	-12.61	58.13	45.52	74.00	-28.48	Peak
5	2948.625	-9.75	47.43	37.68	54.00	-16.32	Average
6	2948.625	-9.75	54.95	45.20	74.00	-28.80	Peak
7	4128.000	-8.31	46.24	37.93	54.00	-16.07	Average
8	4128.000	-8.31	51.43	43.12	74.00	-30.88	Peak
9	14680.750	7.19	40.58	47.77	54.00	-6.23	Average
10	14680.750	7.19	52.81	60.00	74.00	-14.00	Peak

Vertical

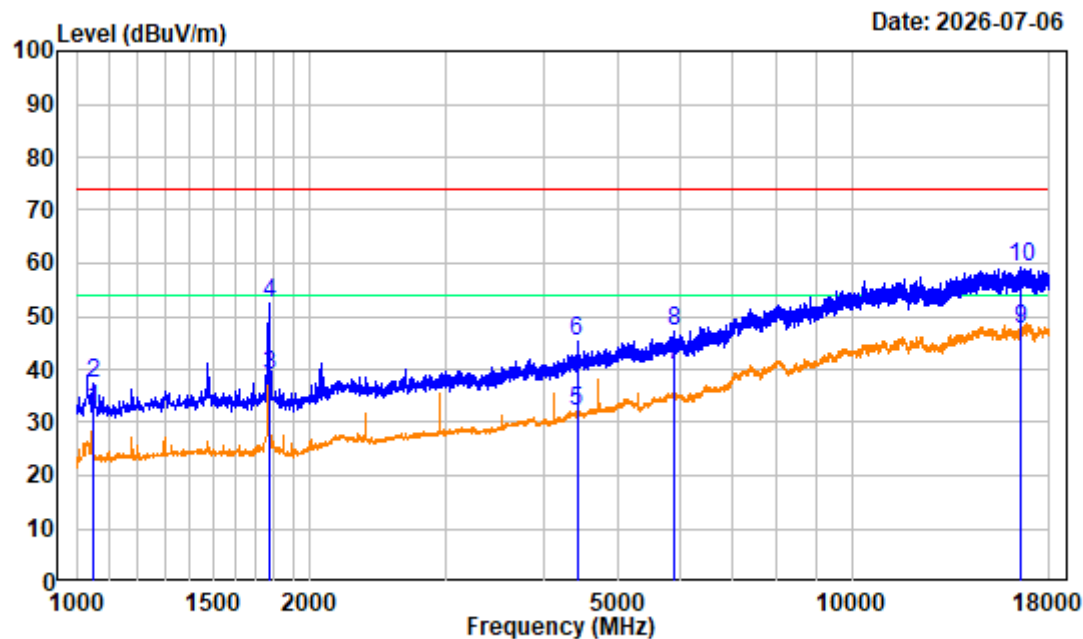


Site : chamber
 Condition : 3m VERTICAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 3
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	46.31	32.43	54.00	-21.57	Average
2	1048.875	-13.88	51.10	37.22	74.00	-36.78	Peak
3	1769.250	-13.18	51.97	38.79	54.00	-15.21	Average
4	1769.250	-13.18	65.48	52.30	74.00	-21.70	Peak
5	4423.375	-7.59	39.65	32.06	54.00	-21.94	Average
6	4423.375	-7.59	52.72	45.13	74.00	-28.87	Peak
7	5898.125	-5.01	45.90	40.89	54.00	-13.11	Average
8	5898.125	-5.01	52.29	47.28	74.00	-26.72	Peak
9	16521.000	6.39	41.05	47.44	54.00	-6.56	Average
10	16521.000	6.39	52.69	59.08	74.00	-14.92	Peak

Above 18GHz


Horizontal

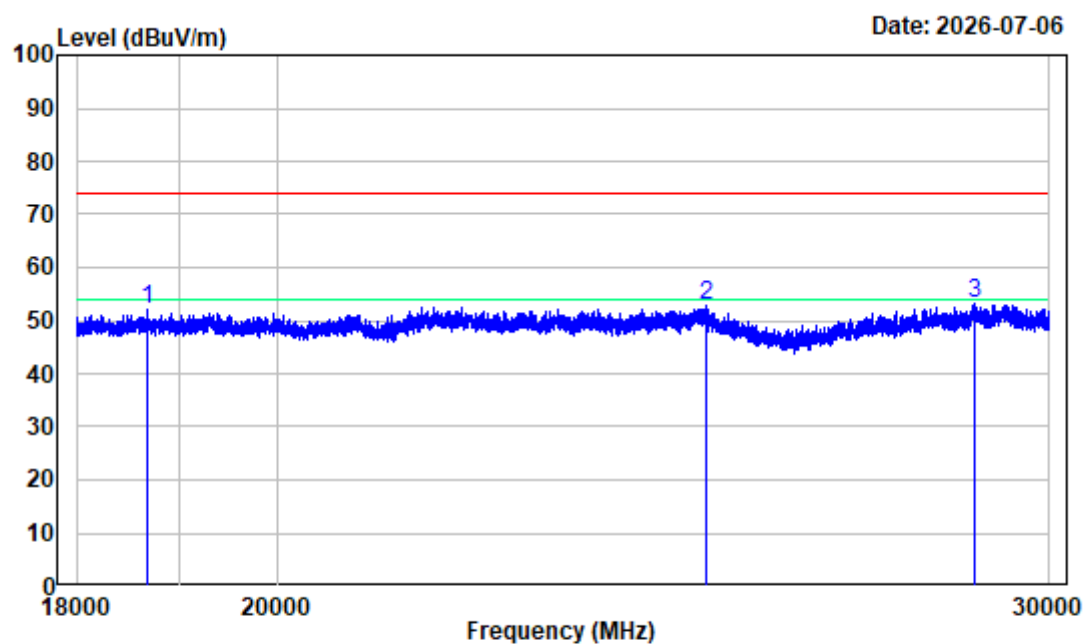

Site : chamber
Condition : 3m HORIZONTAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 3
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 18675.000	-3.38	55.33	51.95	74.00	-22.05	Peak
2 25050.000	5.21	47.54	52.75	74.00	-21.25	Peak
3 28855.500	4.92	48.16	53.08	74.00	-20.92	Peak

Vertical

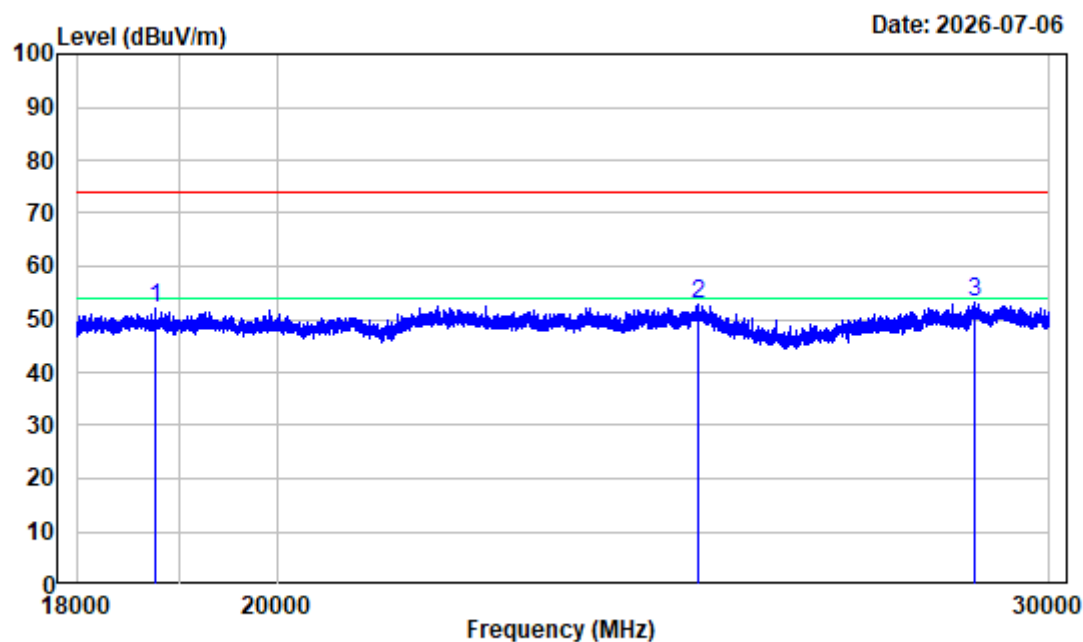


Site : chamber
Condition : 3m VERTICAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 3
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

		Read	Limit	Over	Remark	
Freq	Factor	Level	Level	Line		Limit
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 18765.000	-3.22	55.44	52.22	74.00	-21.78	Peak
2 24942.000	5.29	47.71	53.00	74.00	-21.00	Peak
3 28840.500	4.92	48.12	53.04	74.00	-20.96	Peak

Test Mode 4

Below 1GHz


Horizontal

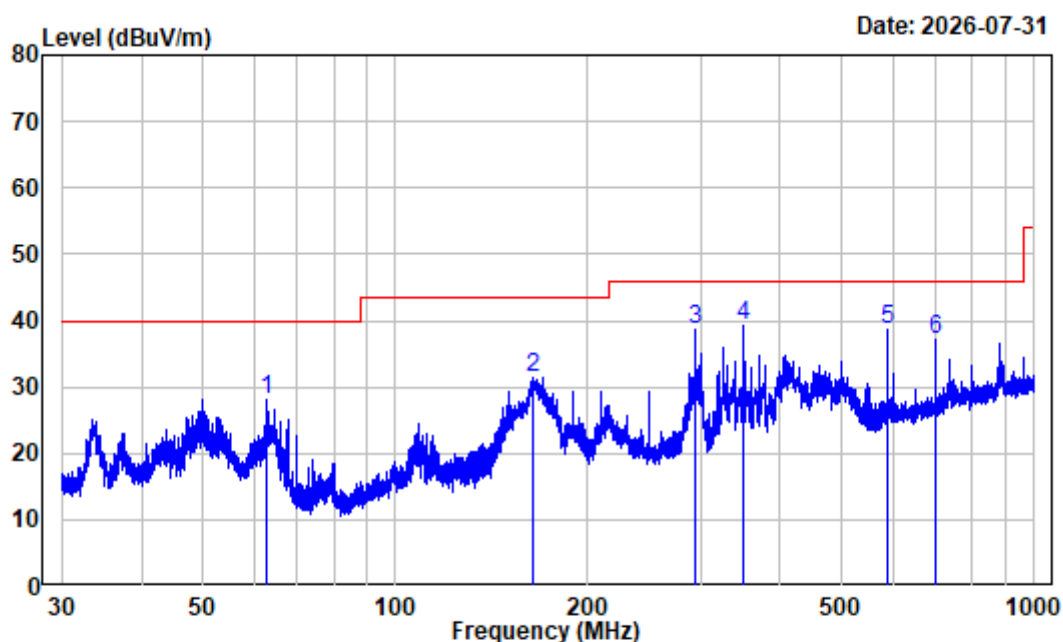

Site : chamber
Condition : 3m HORIZONTAL
Job No. : 2604U27448E-EM Tester: Jayden Luo
Test Mode : Test Mode 4
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	62.843	-11.53	39.58	28.05	40.00	-11.95	Peak
2	163.755	-13.86	45.12	31.26	43.50	-12.24	Peak
3	294.888	-8.84	47.51	38.67	46.00	-7.33	Peak
4	350.016	-6.74	45.97	39.23	46.00	-6.77	Peak
5	589.939	-2.35	41.03	38.68	46.00	-7.32	Peak
6	700.225	-1.03	38.14	37.11	46.00	-8.89	Peak

Vertical

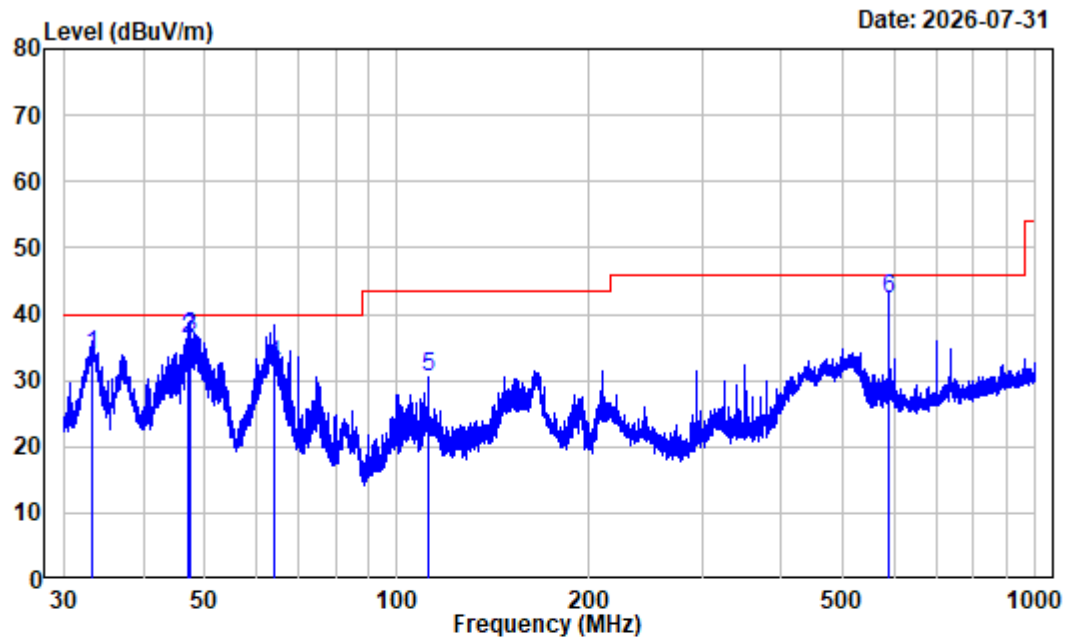


Site : chamber
Condition : 3m VERTICAL
Job No. : 2604U27448E-EM Tester: Jayden Luo
Test Mode : Test Mode 4
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.328	-11.87	45.69	33.82	40.00	-6.18	QP
2	46.969	-9.87	45.97	36.10	40.00	-3.90	QP
3	47.485	-9.84	46.27	36.43	40.00	-3.57	QP
4	64.005	-12.09	44.38	32.29	40.00	-7.71	QP
5	112.081	-11.89	42.28	30.39	43.50	-13.11	Peak
6	589.830	-2.36	44.67	42.31	46.00	-3.69	QP

1-18GHz


Horizontal

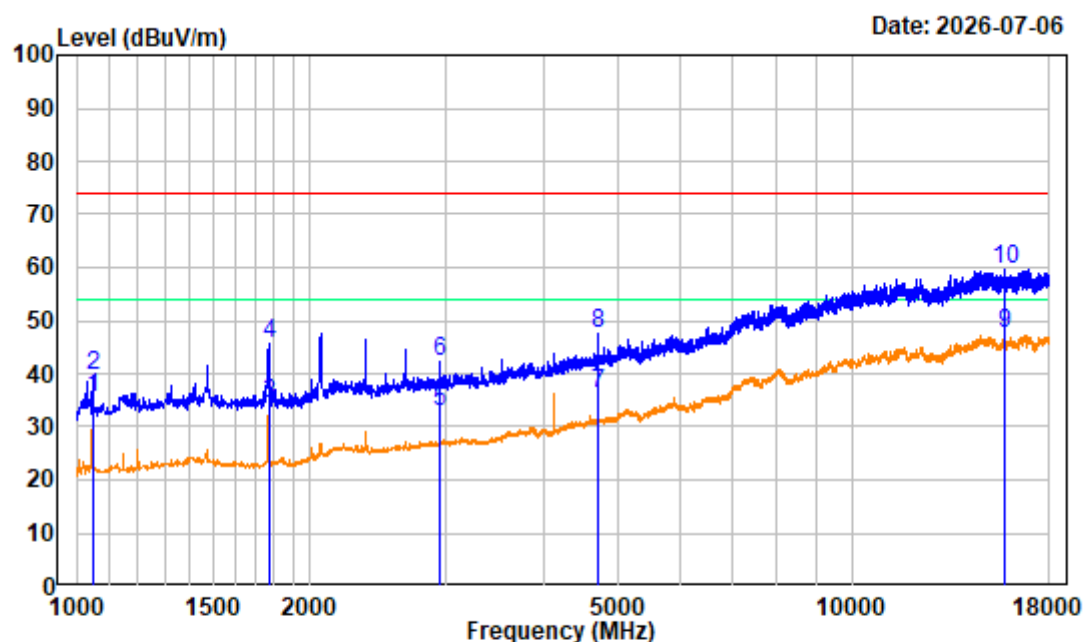

Site : chamber
 Condition : 3m HORIZONTAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 4
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	49.33	35.45	54.00	-18.55	Average
2	1048.875	-13.88	53.51	39.63	74.00	-34.37	Peak
3	1769.250	-13.18	47.35	34.17	54.00	-19.83	Average
4	1769.250	-13.18	58.92	45.74	74.00	-28.26	Peak
5	2948.625	-9.75	42.74	32.99	54.00	-21.01	Average
6	2948.625	-9.75	52.13	42.38	74.00	-31.62	Peak
7	4718.750	-6.98	43.31	36.33	54.00	-17.67	Average
8	4718.750	-6.98	54.60	47.62	74.00	-26.38	Peak
9	15764.500	6.21	41.29	47.50	54.00	-6.50	Average
10	15764.500	6.21	53.34	59.55	74.00	-14.45	Peak

Vertical

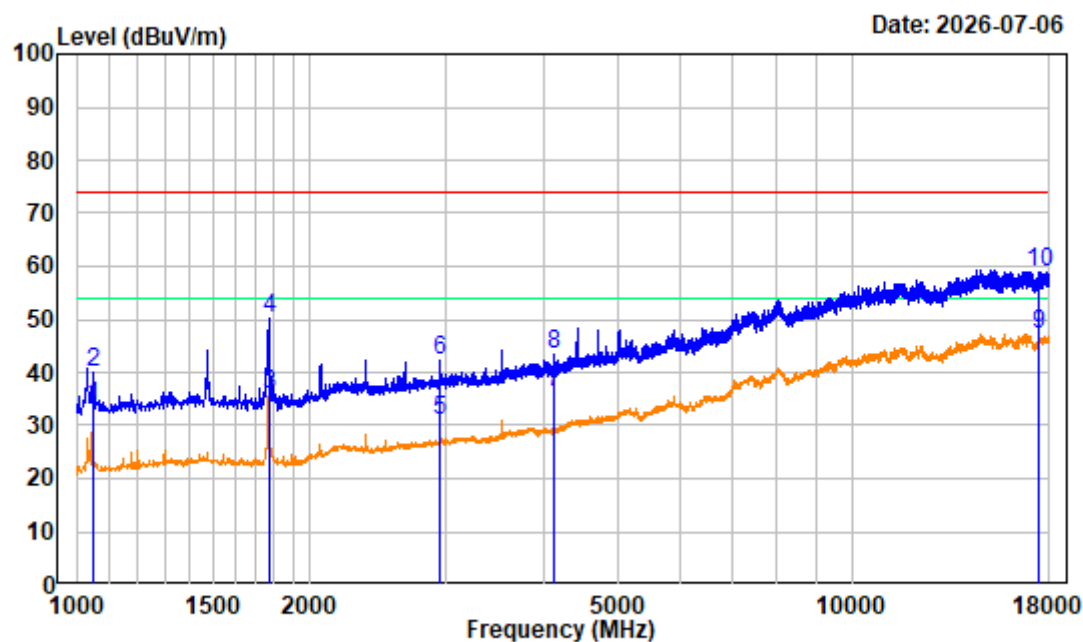


Site : chamber
 Condition : 3m VERTICAL
 Project No. : 2604U27448E-EM
 Test Mode : Test Mode 4
 Tester : Max Tao
 Receiver Setting: Peak:RBW:1MHz VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1048.875	-13.88	47.35	33.47	54.00	-20.53	Average
2	1048.875	-13.88	53.76	39.88	74.00	-34.12	Peak
3	1769.250	-13.18	49.02	35.84	54.00	-18.16	Average
4	1769.250	-13.18	63.35	50.17	74.00	-23.83	Peak
5	2948.625	-9.75	40.77	31.02	54.00	-22.98	Average
6	2948.625	-9.75	52.13	42.38	74.00	-31.62	Peak
7	4128.000	-8.31	44.70	36.39	54.00	-17.61	Average
8	4128.000	-8.31	51.54	43.23	74.00	-30.77	Peak
9	17447.500	7.31	39.94	47.25	54.00	-6.75	Average
10	17447.500	7.31	51.73	59.04	74.00	-14.96	Peak

Above 18GHz


Horizontal

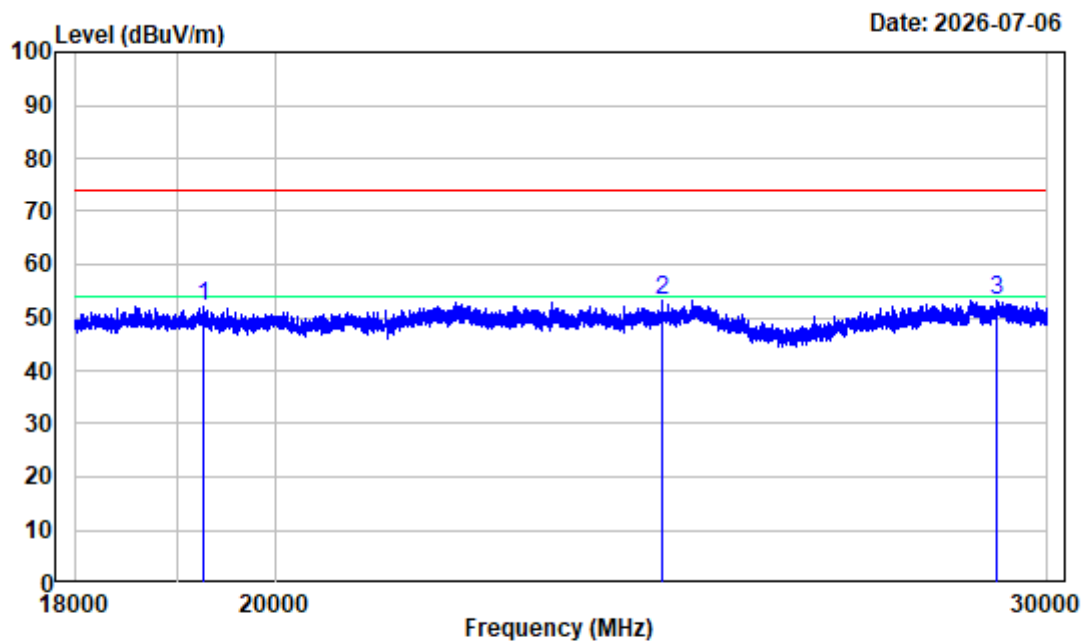

Site : chamber
Condition : 3m HORIZONTAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 4
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19254.000	-2.67	54.75	52.08	74.00	-21.92	Peak
2	24514.500	4.37	48.98	53.35	74.00	-20.65	Peak
3	29215.500	4.92	48.28	53.20	74.00	-20.80	Peak

Vertical

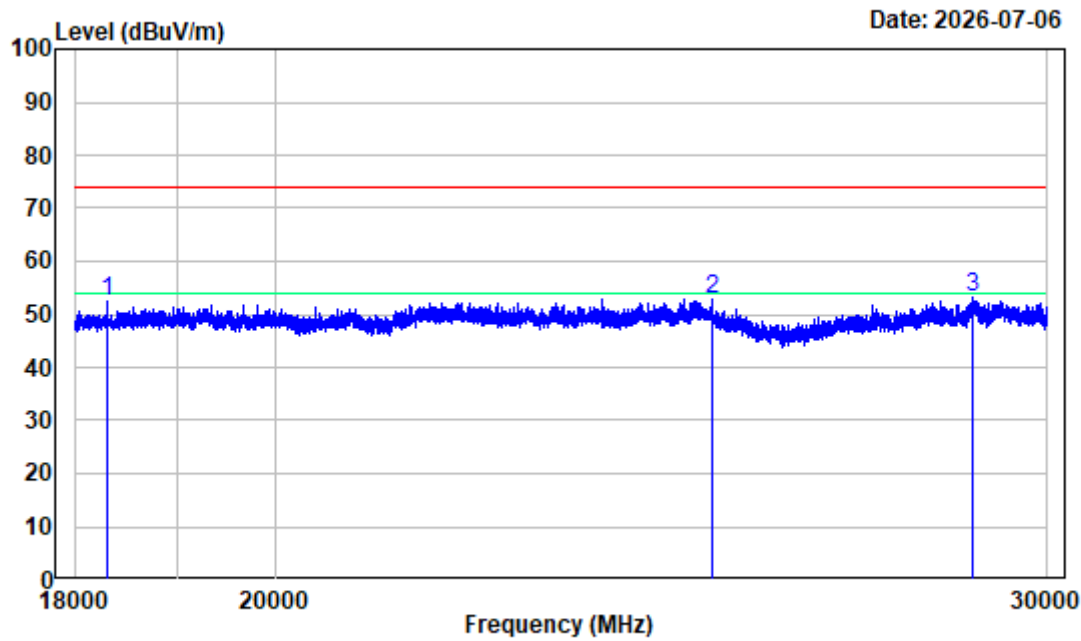

Site : chamber
Condition : 3m VERTICAL
Project No. : 2604U27448E-EM
Test Mode : Test Mode 4
Tester : Max Tao
Receiver Setting: Peak:RBW:1MHz VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 18306.000	-3.88	56.18	52.30	74.00	-21.70	Peak
2 25167.000	4.73	48.16	52.89	74.00	-21.11	Peak
3 28846.500	4.92	48.40	53.32	74.00	-20.68	Peak

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2604U27448E-RF EUT External Photos and Attachment No.2 2604U27448E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.3 2604U27448E-EM Test Photos.

******* END OF REPORT *******