TEST REPORT

Applicant Name:	Grandstream Networks, Inc.
Address:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number:	2401Y27848E-EM-00
FCC ID:	YZZGWN7062E

Test Standard (s)

FCC Part 15, Subpart B (Class B)

Sample Description

Product Type:	Wi-Fi 6 Router
Model No.:	GWN7062E
Multiple Model(s) No.:	N/A
Trade Mark:	GRANDSTREAM
Date Received:	2024/10/30
Issue Date:	2025/02/05

Test Result:	Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Carl Lu

Carl Lu
EMC Engineer

Approved By:

Moon Liu

Moon Liu
EMC Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **3**

GENERAL INFORMATION **4**

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
OBJECTIVE 4
MEASUREMENT UNCERTAINTY 5
TEST FACILITY 5

SYSTEM TEST CONFIGURATION **6**

DESCRIPTION OF TEST CONFIGURATION 6
EUT EXERCISE SOFTWARE 6
EQUIPMENT MODIFICATIONS 6
SUPPORT EQUIPMENT LIST AND DETAILS 6
EXTERNAL I/O CABLE 6
BLOCK DIAGRAM OF TEST SETUP 7

SUMMARY OF TEST RESULTS **8**

TEST EQUIPMENT LIST **9**

FCC §15.107 - AC LINE CONDUCTED EMISSIONS **10**

APPLICABLE STANDARD 10
EUT SETUP 10
EMI TEST RECEIVER SETUP 10
TEST PROCEDURE 11
LEVEL & OVER LIMIT CALCULATION 11
TEST DATA 11

FCC §15.109 - RADIATED EMISSIONS **18**

APPLICABLE STANDARD 18
EUT SETUP 18
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP 19
TEST PROCEDURE 19
LEVEL & OVER LIMIT CALCULATION 20
TEST DATA 20

EUT PHOTOGRAPHS **45**

TEST SETUP PHOTOGRAPHS **46**

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y27848E-EM-00	Original Report	2025/02/05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wi-Fi 6 Router
Tested Model	GWN7062E
Multiple Model(s)	N/A
Voltage Range	DC 5V from adapter
Highest operating frequency#	5895MHz (Provided by the applicant)
Equipment Class	Class B
Sample number	GWN7062E: 2TPG-1 Adapter (GQ24-050300-AU): 2TPG-11 Adapter (DCT18W050300US-A0): 2TPG-13 Adapter (TS-A015-050300A2): 2TPG-12 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: DCT18W050300US-A0 Input: 100-240V~50/60Hz, 0.7A max Output: 5.0V, 3.0A Adapter 2 Model: GQ24-050300-AU Input: 100-240V~50/60Hz, 1.0A Max Output: 5.0V, 3.0A Adapter 3 Model: TS-A015-050300A2 Input: 100-240V~50/60Hz, 0.6A Output: 5.0V, 3.0A, 15.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz	Vertical	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Horizontal	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Vertical	5.73dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	5.34dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	5.40dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	5.64dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test Mode 1: Data transmitting+ Adapter (GQ24-050300-AU)

Test Mode 2: Data transmitting + Adapter (DCT18W050300US-A0)

Test Mode 3: Data transmitting + Adapter (TS-A015-050300A2)

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC1	Latitude E6520	DL0ZCS1
DELL	PC2	Latitude E5430	JG3NLV1
TP-link	Dummy load	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded un-detachable AC cable	1.2	Socket	LISN/Mains
Unshielded un-detachable DC cable	1.2	EUT	Adapter
Unshielded detachable RJ45 cable	10.0	EUT	PC1
Unshielded detachable RJ45 cable	10.0	EUT	PC2
Unshielded detachable RJ45 cable	1.0	EUT	Dummy load

Block Diagram of Test Setup

For Conducted Emission:

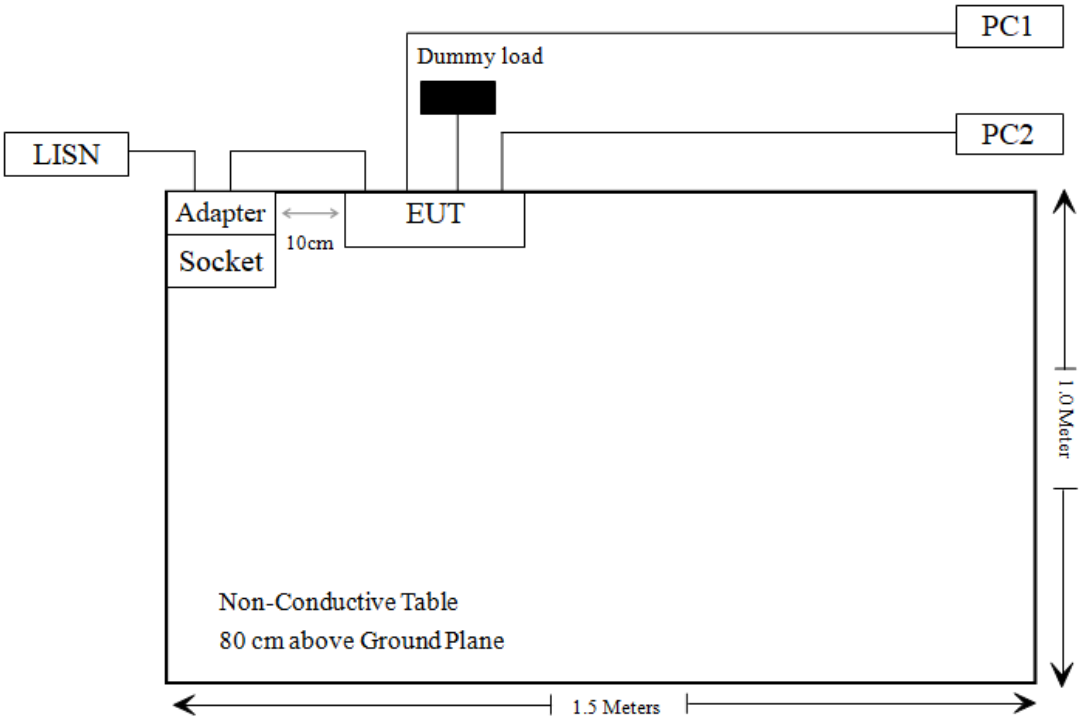

For Radiated Emission:

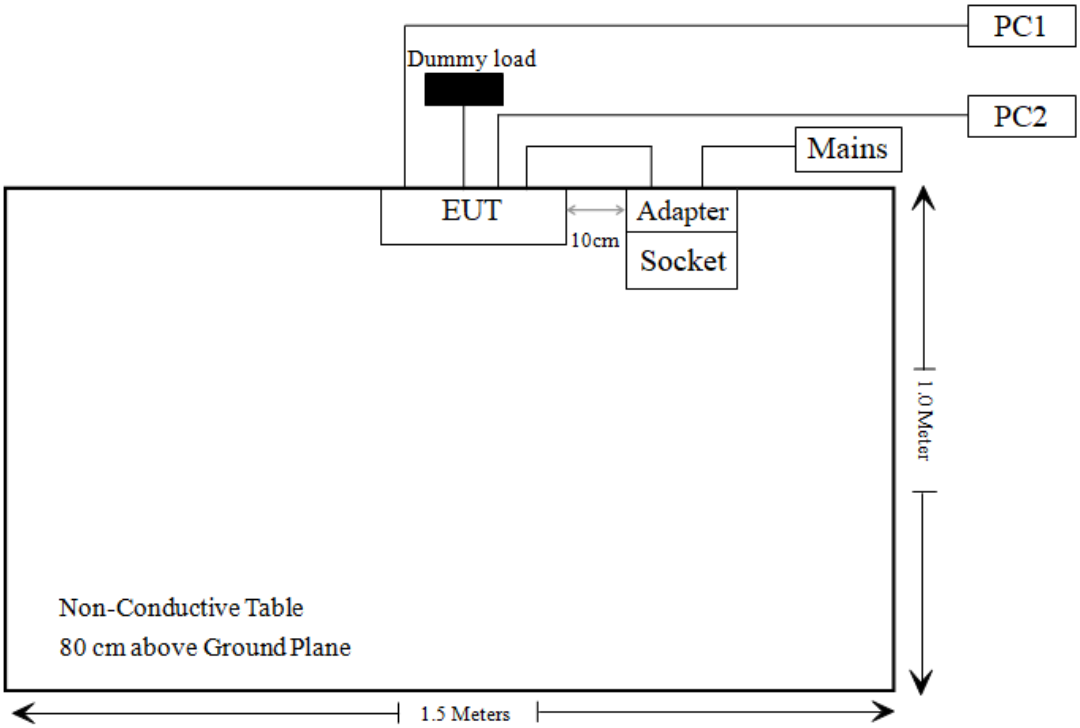

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2024/06/27	2025/06/26
SNSD	5G Band Reject filter	BSF5150-5850MN-0899-004	5G filter	2024/06/27	2025/06/26
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

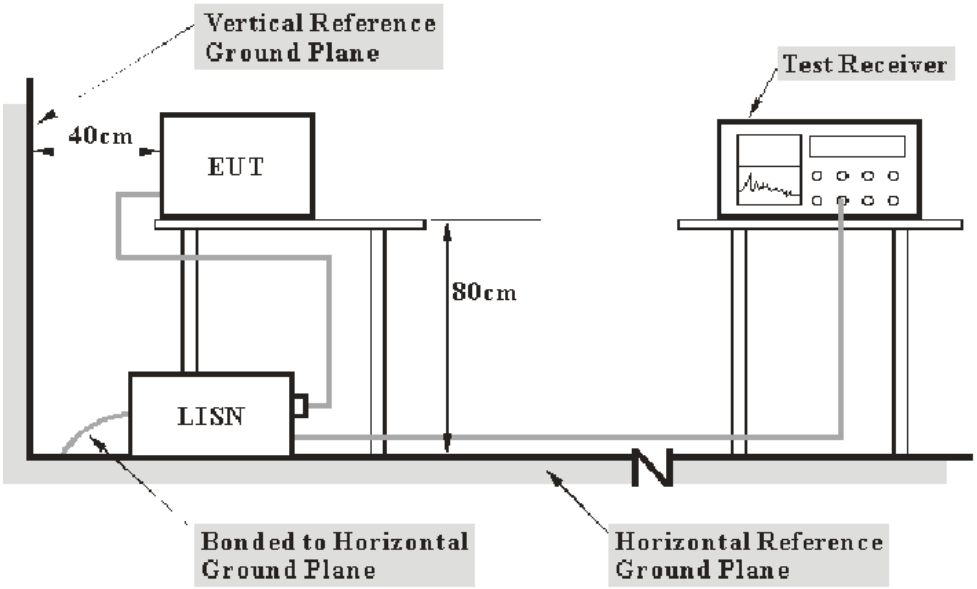

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

Level (dBuV) =Read Level (dBuV) +LISN Factor +Cable Loss

The "**Over limit**" column of the following data tables indicates the degree of compliance with the applicable limit.

Over Limit (dB) =Level (dBuV) -Limit Line (dBuV)

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	26 ℃
Relative Humidity:	65 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-11-18.

Test Mode 1

AC 120V/60 Hz, Line

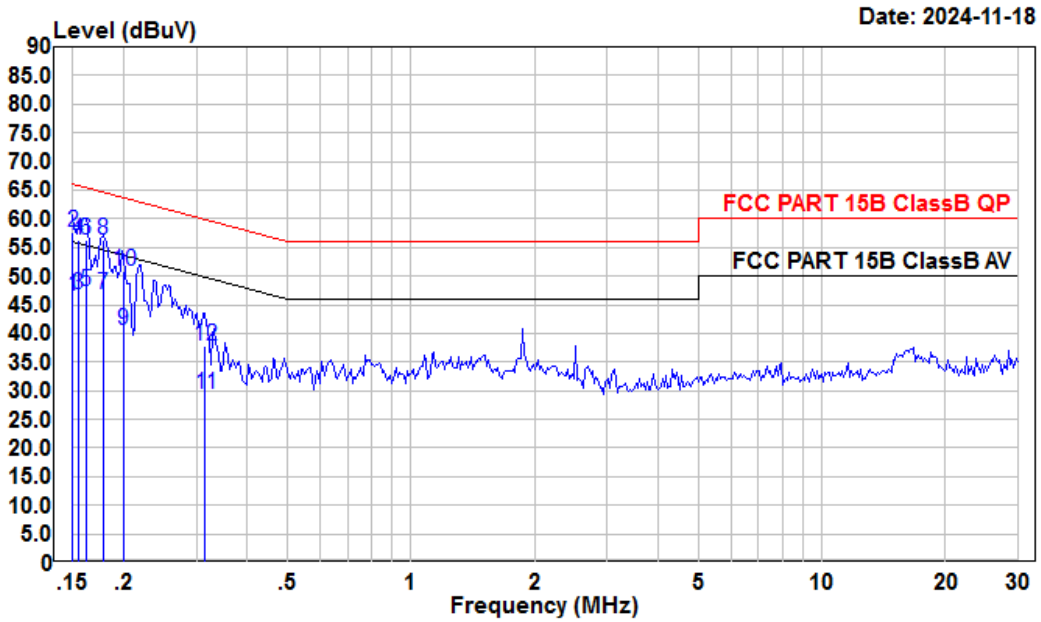

Condition: Line
Project : 2401Y27848E-EM
test Mode: Mode1
tester : Macy.shi

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	25.50	46.53	10.90	10.13	56.00	-9.47	Average
2	0.150	36.60	57.63	10.90	10.13	66.00	-8.37	QP
3	0.155	25.90	46.91	10.89	10.12	55.74	-8.83	Average
4	0.155	35.30	56.31	10.89	10.12	65.74	-9.43	QP
5	0.162	26.31	47.29	10.87	10.11	55.38	-8.09	Average
6	0.162	35.43	56.41	10.87	10.11	65.38	-8.97	QP
7	0.178	25.90	46.84	10.84	10.10	54.59	-7.75	Average
8	0.178	35.30	56.24	10.84	10.10	64.59	-8.35	QP
9	0.200	19.52	40.41	10.80	10.09	53.62	-13.21	Average
10	0.200	30.09	50.98	10.80	10.09	63.62	-12.64	QP
11	0.315	8.65	29.41	10.65	10.11	49.84	-20.43	Average
12	0.315	17.14	37.90	10.65	10.11	59.84	-21.94	QP

AC 120V/60 Hz, Neutral

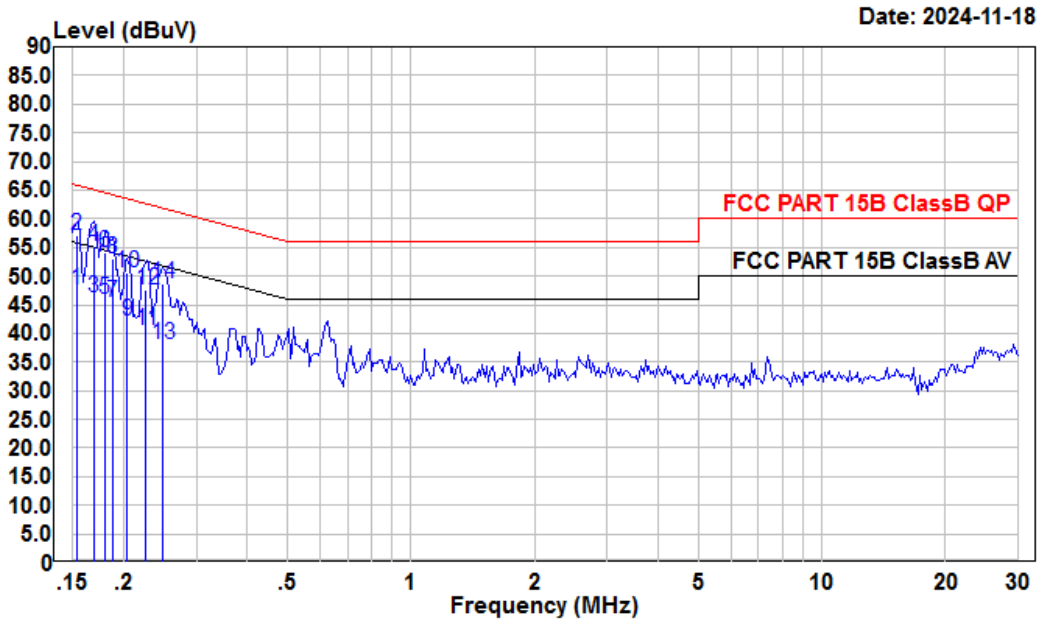

Condition: Neutral
Project : 2401Y27848E-EM
test Mode: Mode1
tester : Macy.shi

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	26.89	47.61	10.59	10.13	55.82	-8.21	Average
2	0.153	36.39	57.11	10.59	10.13	65.82	-8.71	QP
3	0.169	25.71	46.33	10.52	10.10	55.03	-8.70	Average
4	0.169	34.60	55.22	10.52	10.10	65.03	-9.81	QP
5	0.180	25.50	46.07	10.47	10.10	54.50	-8.43	Average
6	0.180	33.50	54.07	10.47	10.10	64.50	-10.43	QP
7	0.187	25.00	45.54	10.45	10.09	54.15	-8.61	Average
8	0.187	32.40	52.94	10.45	10.09	64.15	-11.21	QP
9	0.204	21.62	42.12	10.41	10.09	53.45	-11.33	Average
10	0.204	30.16	50.66	10.41	10.09	63.45	-12.79	QP
11	0.227	20.01	40.53	10.44	10.08	52.57	-12.04	Average
12	0.227	27.21	47.73	10.44	10.08	62.57	-14.84	QP
13	0.249	17.50	38.05	10.47	10.08	51.78	-13.73	Average
14	0.249	28.20	48.75	10.47	10.08	61.78	-13.03	QP

Test Mode 2

AC 120V/60 Hz, Line

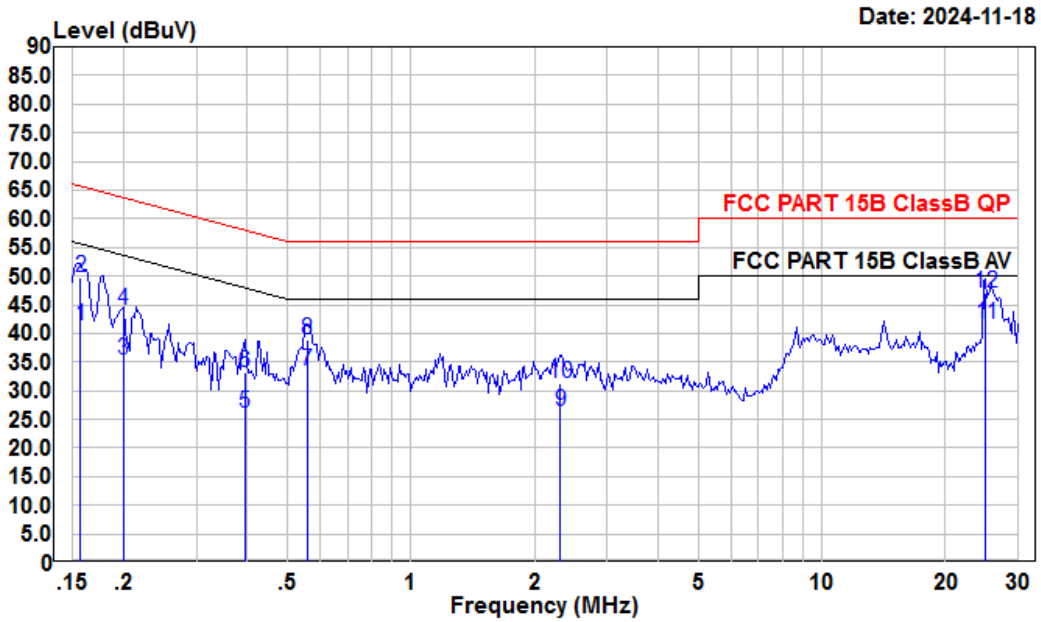

Condition: Line
Project : 2401Y27848E-EM
test Mode: Mode2
tester : Macy.shi

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	20.39	41.40	10.89	10.12	55.65	-14.25	Average
2	0.156	28.63	49.64	10.89	10.12	65.65	-16.01	QP
3	0.200	14.50	35.39	10.80	10.09	53.62	-18.23	Average
4	0.200	23.06	43.95	10.80	10.09	63.62	-19.67	QP
5	0.393	5.42	26.10	10.58	10.10	47.99	-21.89	Average
6	0.393	12.43	33.11	10.58	10.10	57.99	-24.88	QP
7	0.558	12.78	33.41	10.50	10.13	46.00	-12.59	Average
8	0.558	18.30	38.93	10.50	10.13	56.00	-17.07	QP
9	2.309	5.54	26.26	10.54	10.18	46.00	-19.74	Average
10	2.309	10.53	31.25	10.54	10.18	56.00	-24.75	QP
11	25.055	20.72	41.59	10.68	10.19	50.00	-8.41	Average
12	25.055	26.29	47.16	10.68	10.19	60.00	-12.84	QP

AC 120V/60 Hz, Neutral

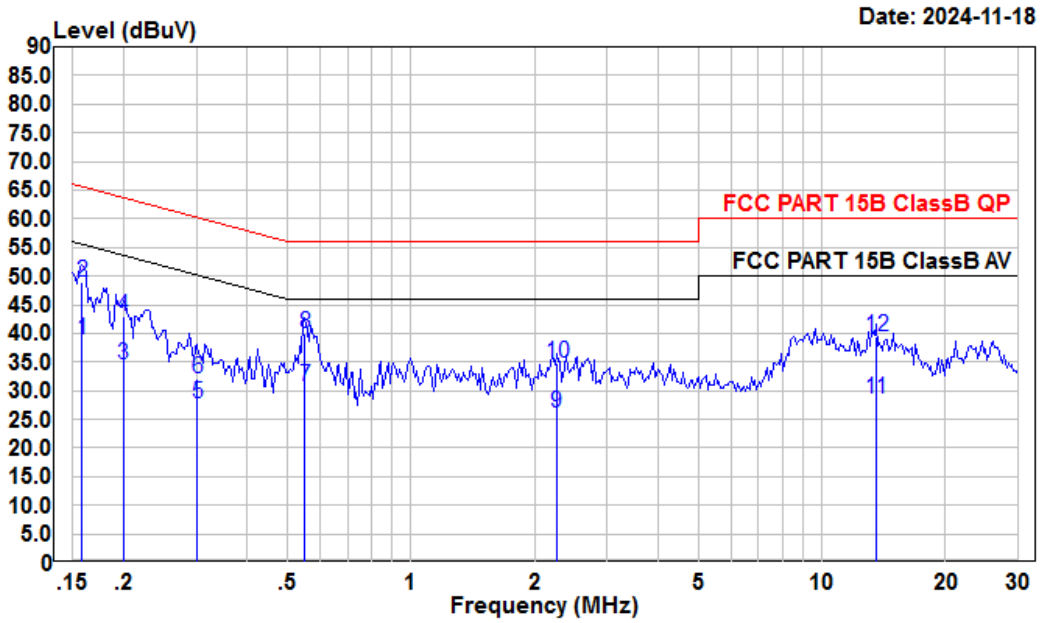

Condition: Neutral
Project : 2401Y27848E-EM
test Mode: Mode2
tester : Macy.shi

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	18.28	38.96	10.56	10.12	55.56	-16.60	Average
2	0.158	28.31	48.99	10.56	10.12	65.56	-16.57	QP
3	0.200	13.97	34.46	10.40	10.09	53.62	-19.16	Average
4	0.200	22.36	42.85	10.40	10.09	63.62	-20.77	QP
5	0.302	7.12	27.76	10.53	10.11	50.19	-22.43	Average
6	0.302	11.58	32.22	10.53	10.11	60.19	-27.97	QP
7	0.552	9.87	30.70	10.70	10.13	46.00	-15.30	Average
8	0.552	19.04	39.87	10.70	10.13	56.00	-16.13	QP
9	2.261	5.57	26.15	10.40	10.18	46.00	-19.85	Average
10	2.261	14.13	34.71	10.40	10.18	56.00	-21.29	QP
11	13.551	7.66	28.68	10.80	10.22	50.00	-21.32	Average
12	13.551	18.42	39.44	10.80	10.22	60.00	-20.56	QP

Test Mode 3

AC 120V/60 Hz, Line

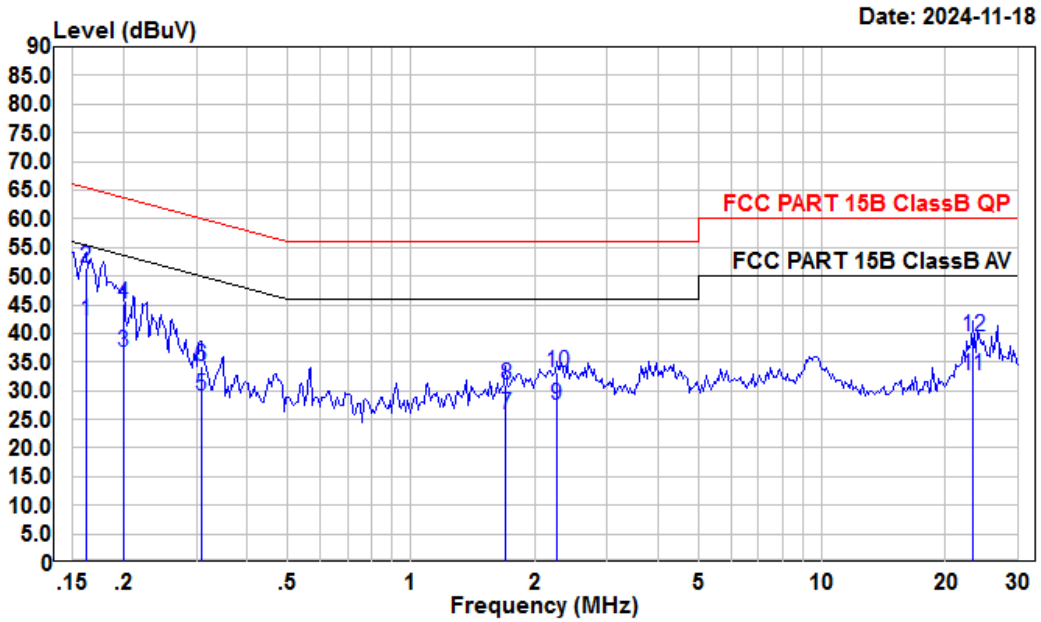

Condition: Line
Project : 2401Y27848E-EM
test Mode: Mode3
tester : Macy.shi

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.162	21.22	42.20	10.87	10.11	55.38	-13.18	Average
2	0.162	30.36	51.34	10.87	10.11	65.38	-14.04	QP
3	0.200	15.95	36.84	10.80	10.09	53.62	-16.78	Average
4	0.200	24.21	45.10	10.80	10.09	63.62	-18.52	QP
5	0.308	8.33	29.10	10.66	10.11	50.02	-20.92	Average
6	0.308	13.55	34.32	10.66	10.11	60.02	-25.70	QP
7	1.698	5.00	25.72	10.55	10.17	46.00	-20.28	Average
8	1.698	10.23	30.95	10.55	10.17	56.00	-25.05	QP
9	2.261	6.79	27.52	10.55	10.18	46.00	-18.48	Average
10	2.261	12.32	33.05	10.55	10.18	56.00	-22.95	QP
11	23.263	11.72	32.65	10.75	10.18	50.00	-17.35	Average
12	23.263	18.39	39.32	10.75	10.18	60.00	-20.68	QP

AC 120V/60 Hz, Neutral

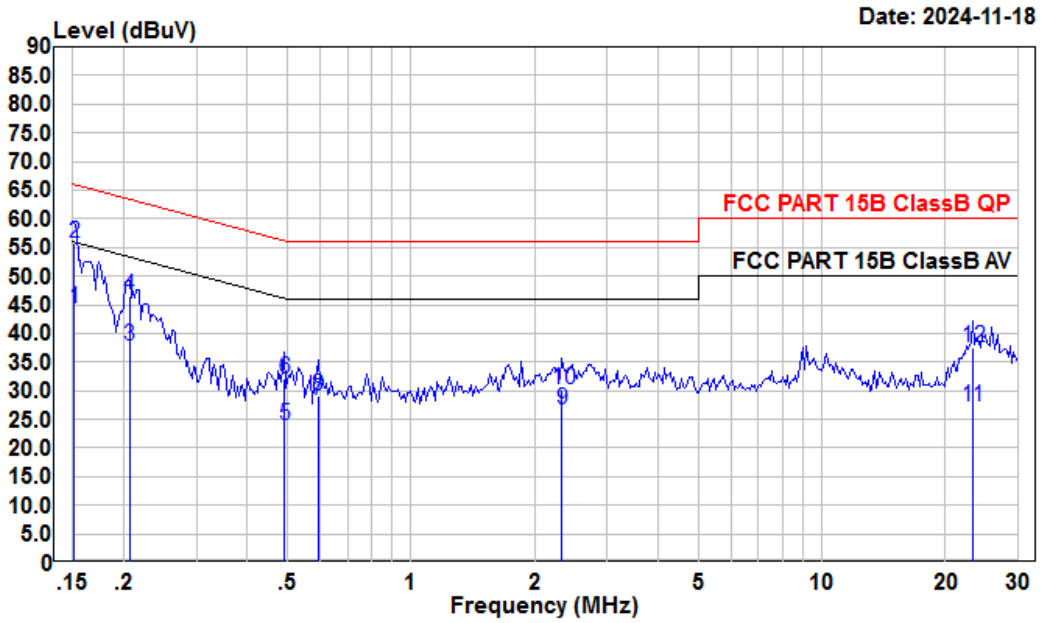

Condition: Neutral
Project : 2401Y27848E-EM
test Mode: Mode3
tester : Macy.shi

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	23.52	44.24	10.59	10.13	55.91	-11.67	Average
2	0.152	34.97	55.69	10.59	10.13	65.91	-10.22	QP
3	0.206	17.24	37.74	10.41	10.09	53.36	-15.62	Average
4	0.206	26.01	46.51	10.41	10.09	63.36	-16.85	QP
5	0.492	3.07	23.90	10.69	10.14	46.14	-22.24	Average
6	0.492	11.39	32.22	10.69	10.14	56.14	-23.92	QP
7	0.595	7.38	28.20	10.70	10.12	46.00	-17.80	Average
8	0.595	8.40	29.22	10.70	10.12	56.00	-26.78	QP
9	2.334	6.15	26.73	10.40	10.18	46.00	-19.27	Average
10	2.334	9.60	30.18	10.40	10.18	56.00	-25.82	QP
11	23.263	6.35	27.16	10.63	10.18	50.00	-22.84	Average
12	23.263	16.75	37.56	10.63	10.18	60.00	-22.44	QP

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109

EUT Setup

Below 1GHz for Radiated Emissions

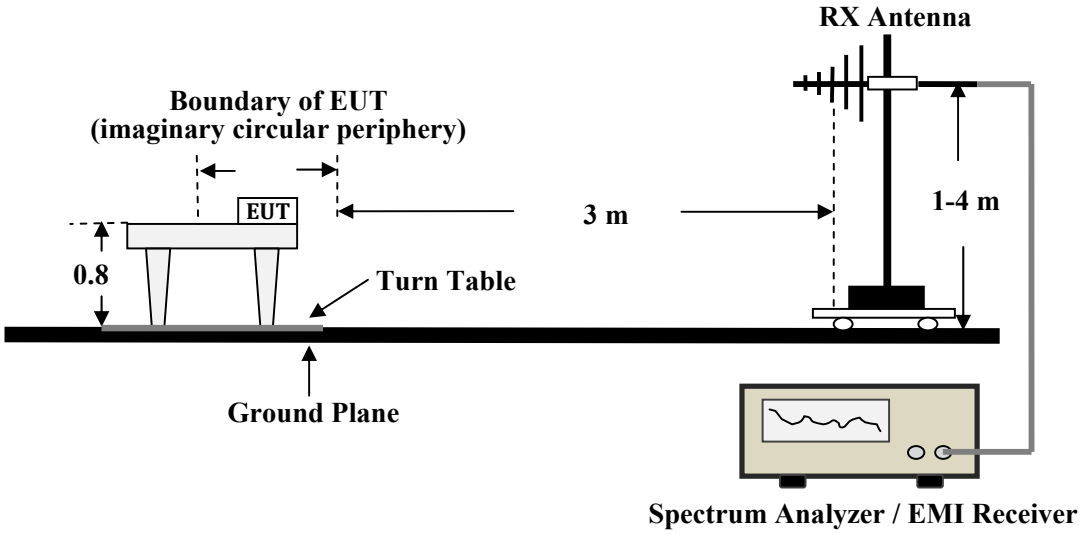

Above 1GHz for Radiated Emissions

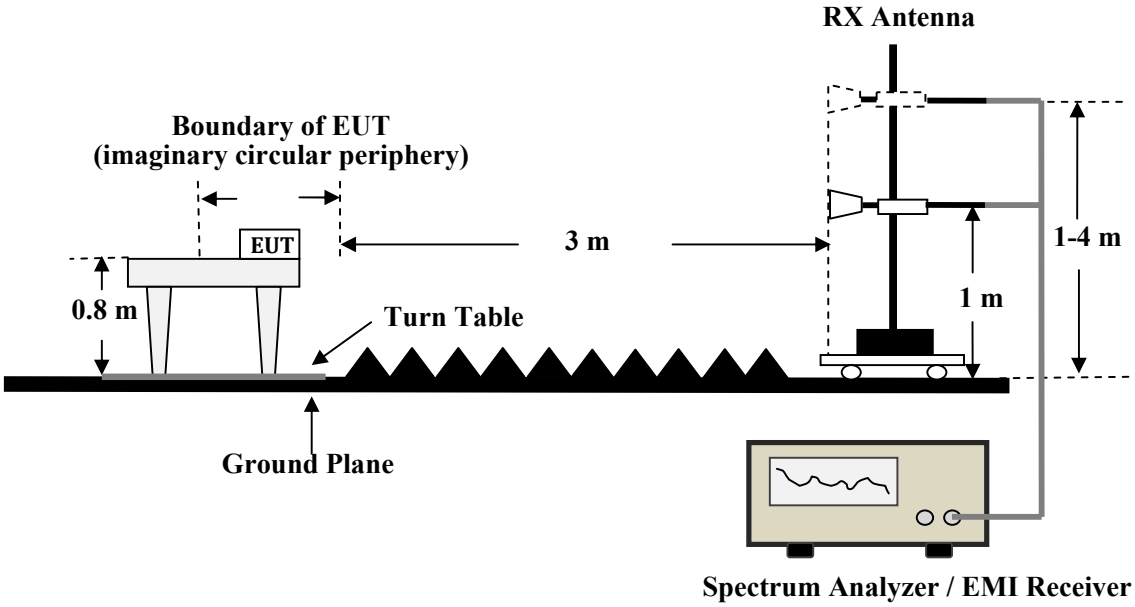

Radiated Emissions Setup Configuration

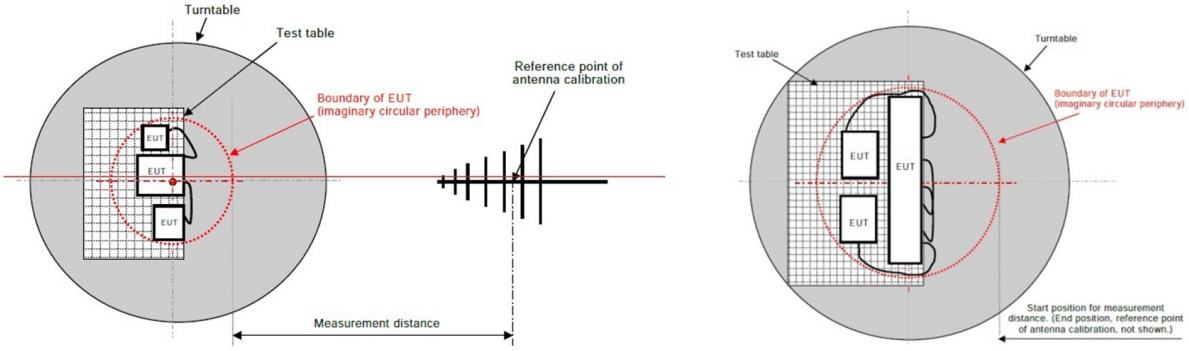

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

Level = Read Level + Factor

The "Over limit" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:

Over limit = Level– Limit

Test Data

Environmental Conditions

Temperature:	25~26 ℃
Relative Humidity:	51~55 %
ATM Pressure:	101~101.2 kPa

The testing was performed by Anson Su on 2024-11-14 for below 1GHz and Dylan Yang on 2024-11-22 for above 1GHz.

Test Mode 1

30 MHz~1 GHz

Horizontal

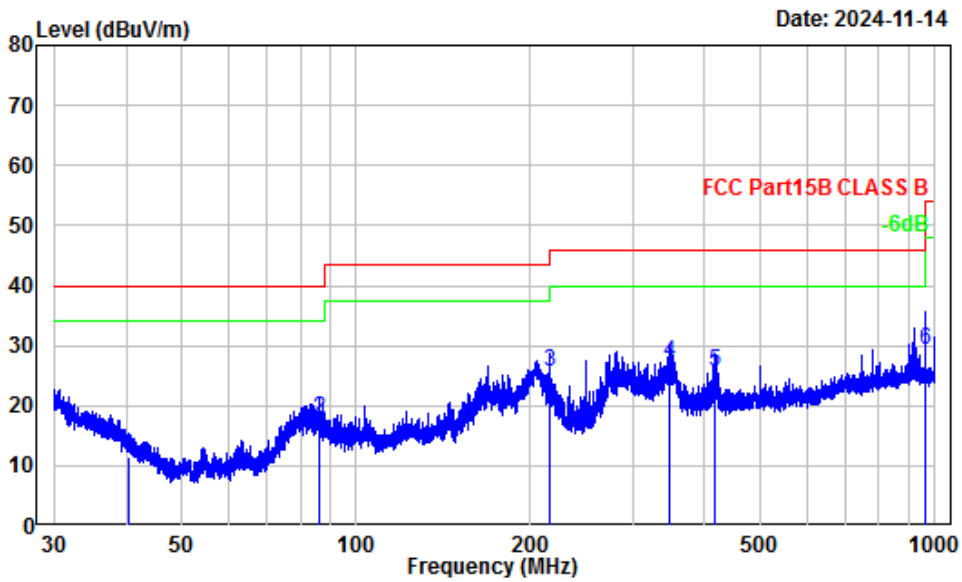

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.56	-12.76	24.27	11.51	40.00	-28.49	QP
2	86.12	-18.08	36.01	17.93	40.00	-22.07	QP
3	215.83	-14.20	39.86	25.66	43.50	-17.84	QP
4	347.57	-10.22	37.27	27.05	46.00	-18.95	QP
5	416.73	-7.99	33.80	25.81	46.00	-20.19	QP
6	960.06	-0.86	30.29	29.43	54.00	-24.57	QP

Vertical

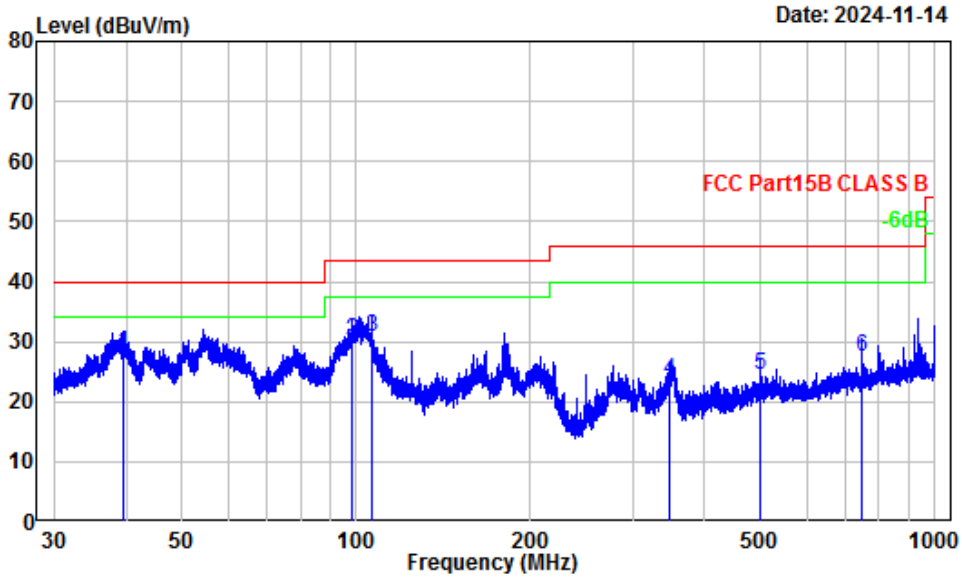

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.45	-11.99	40.00	28.01	40.00	-11.99	QP
2	98.57	-16.34	46.39	30.05	43.50	-13.45	QP
3	106.11	-14.09	44.99	30.90	43.50	-12.60	QP
4	347.72	-10.22	33.64	23.42	46.00	-22.58	QP
5	500.08	-5.76	30.08	24.32	46.00	-21.68	QP
6	750.11	-2.88	30.36	27.48	46.00	-18.52	QP

1 ~ 6 GHz

Horizontal

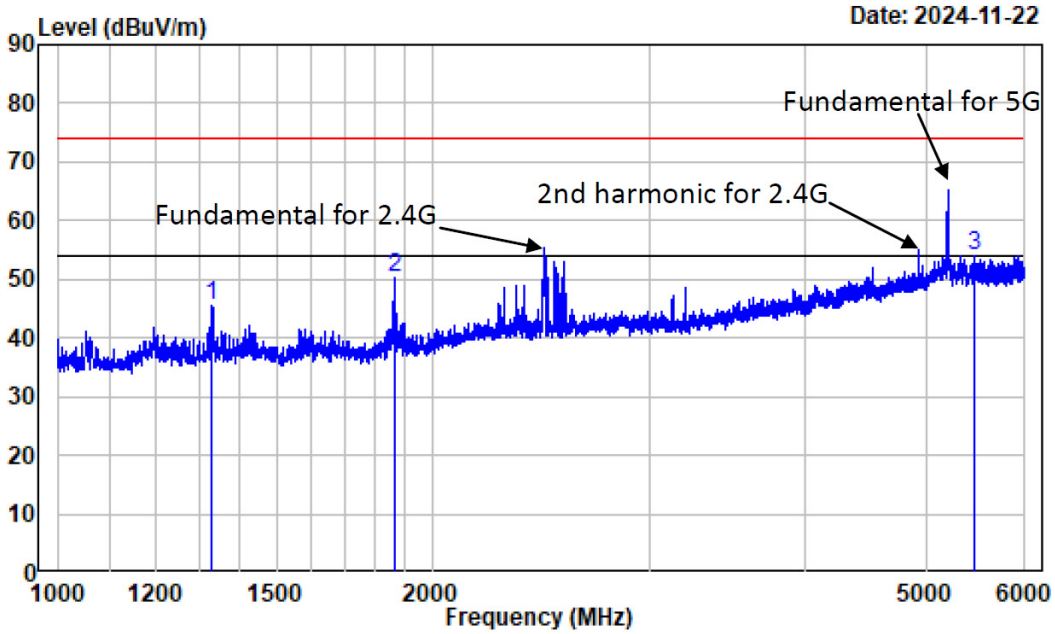

Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1331.917	-7.28	52.68	45.40	74.00	-28.60	Peak
2	1866.358	-6.30	56.68	50.38	74.00	-23.62	Peak
3	5466.183	3.06	50.83	53.89	74.00	-20.11	Peak

Vertical

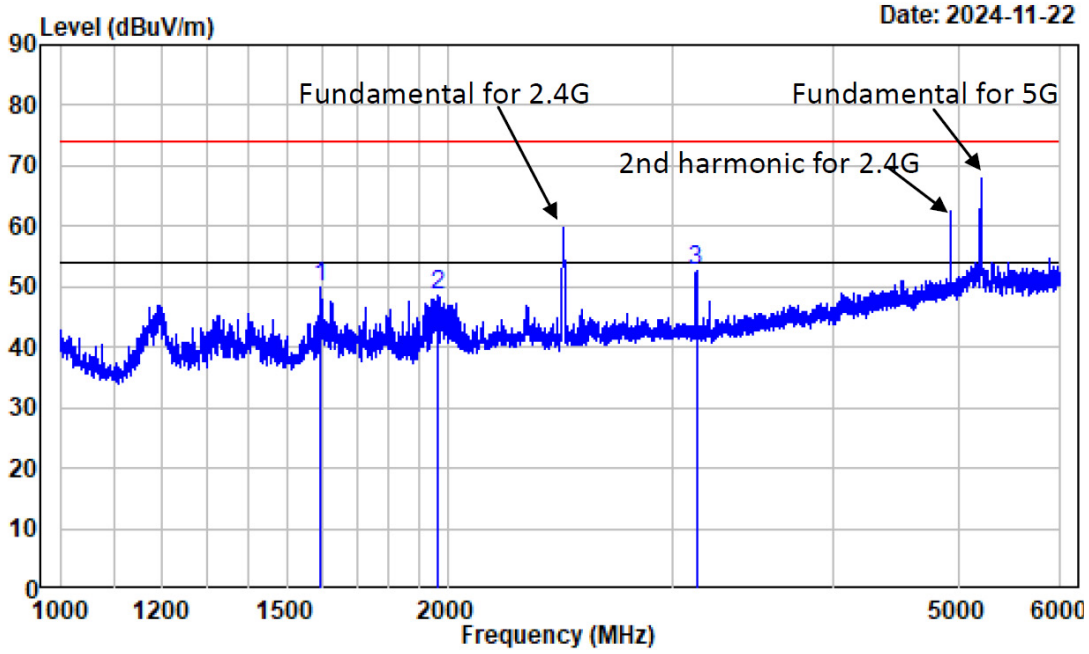

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1594.449	-7.17	57.17	50.00	74.00	-24.00	Peak
2	1967.621	-5.50	53.94	48.44	74.00	-25.56	Peak
3	3125.266	-2.60	55.07	52.47	74.00	-21.53	Peak

6 ~ 18 GHz

Horizontal

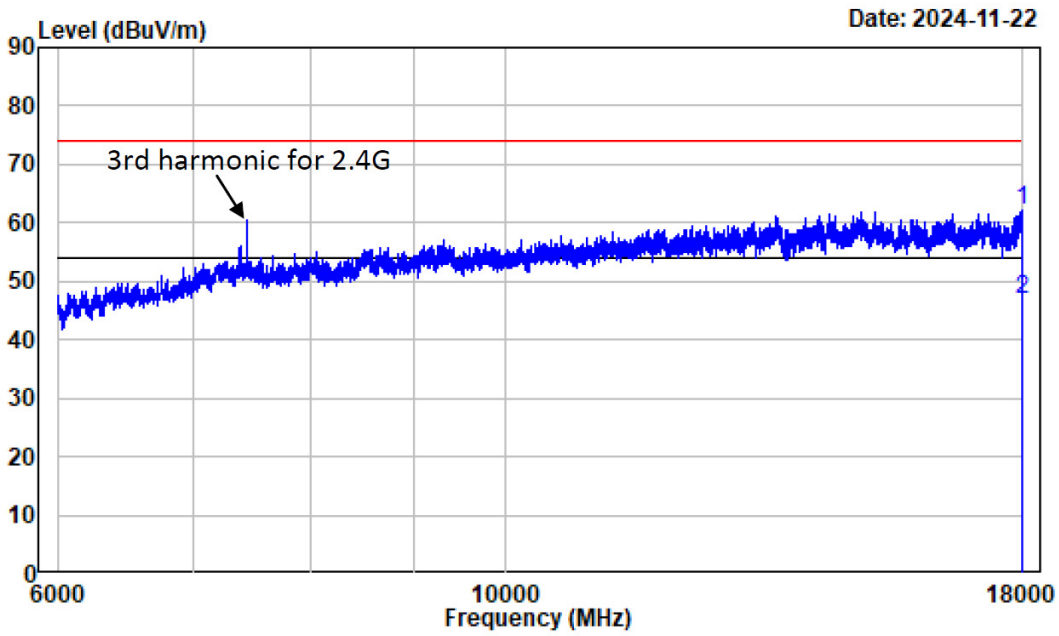


```
Site           : chamber B
Condition      : Horizontal
Project Number: 2401Y27848E-EM
Test Mode      : Mode1
Tester         : Dylan Yang
```

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17979.000	24.46	37.53	61.99	74.00	-12.01	Peak
2	17979.000	24.46	22.42	46.88	54.00	-7.12	Average

Vertical

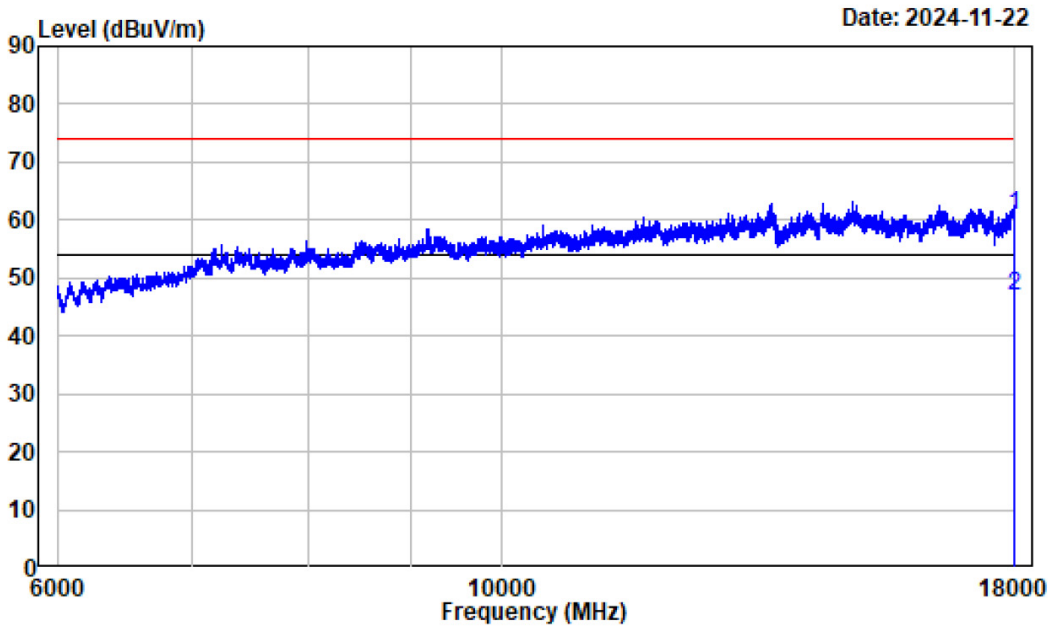

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.000	24.56	36.12	60.68	74.00	-13.32	Peak
2	17991.000	24.56	22.16	46.72	54.00	-7.28	Average

18 ~ 30 GHz

Horizontal

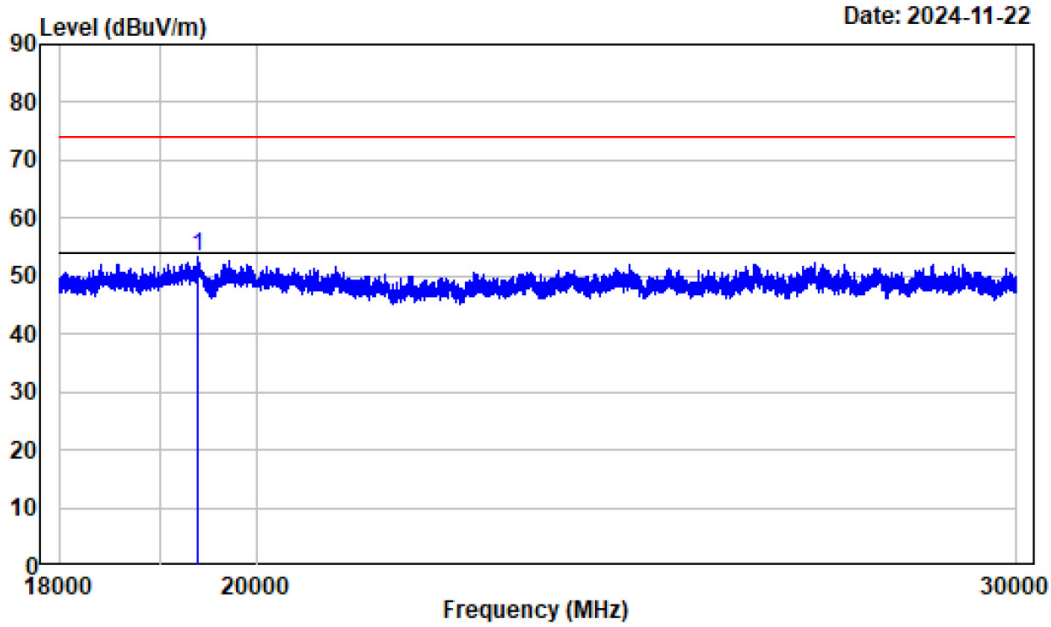


```
Site           : chamber B
Condition      : Horizontal
Project Number: 2401Y27848E-EM
Test Mode      : Mode1
Tester         : Dylan Yang
```

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19377.170	15.12	38.04	53.16	74.00	-20.84	Peak

Vertical

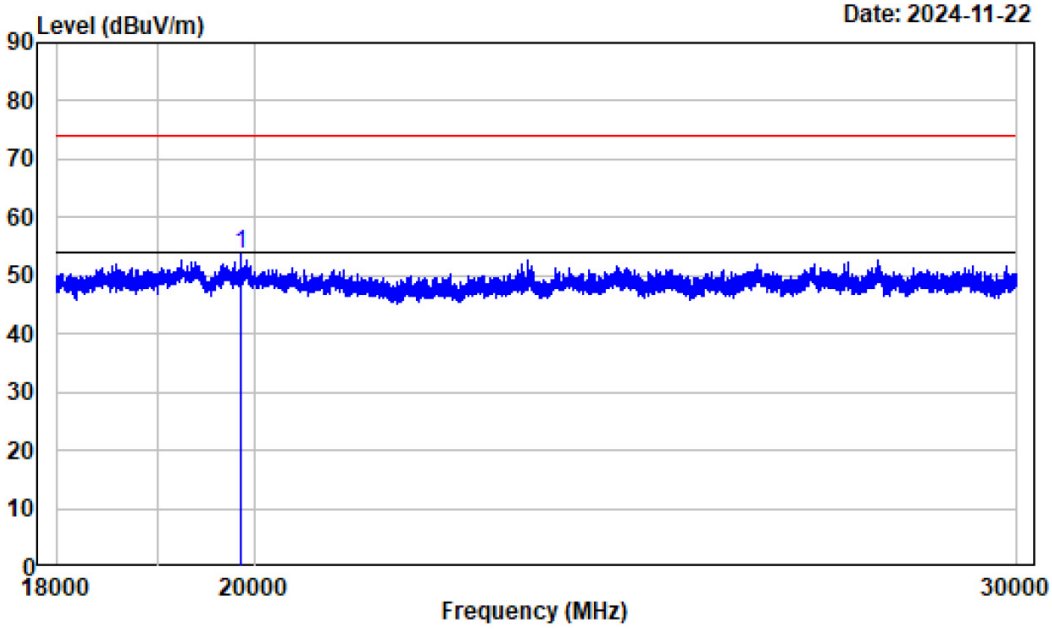

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode1
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19848.230	15.39	38.19	53.58	74.00	-20.42	Peak

Test Mode 2

30 MHz~1 GHz

Horizontal

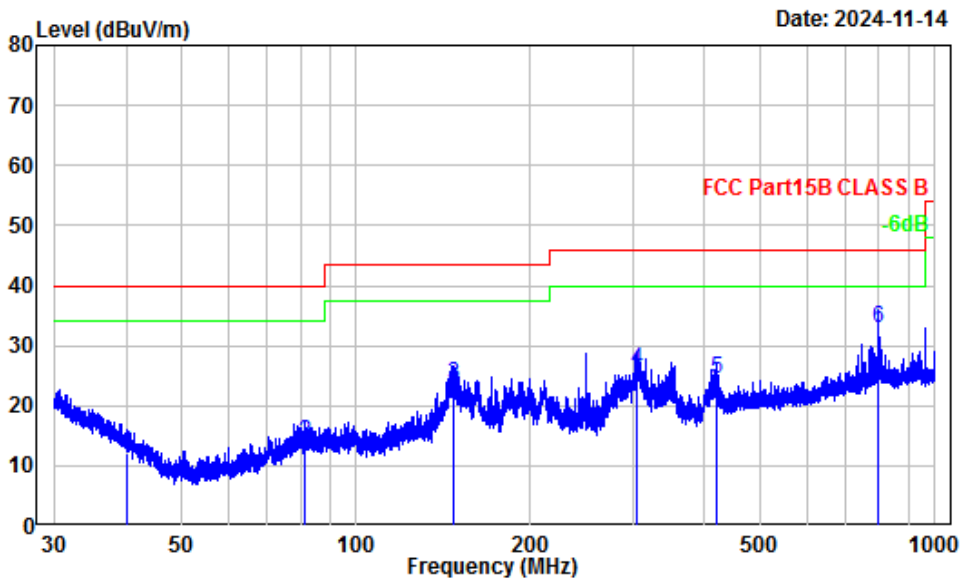

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode2
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.12	-12.45	24.52	12.07	40.00	-27.93	QP
2	81.50	-17.99	31.96	13.97	40.00	-26.03	QP
3	146.76	-12.27	35.83	23.56	43.50	-19.94	QP
4	305.95	-11.07	37.03	25.96	46.00	-20.04	QP
5	419.29	-7.95	32.32	24.37	46.00	-21.63	QP
6	799.68	-2.15	35.04	32.89	46.00	-13.11	QP

Vertical

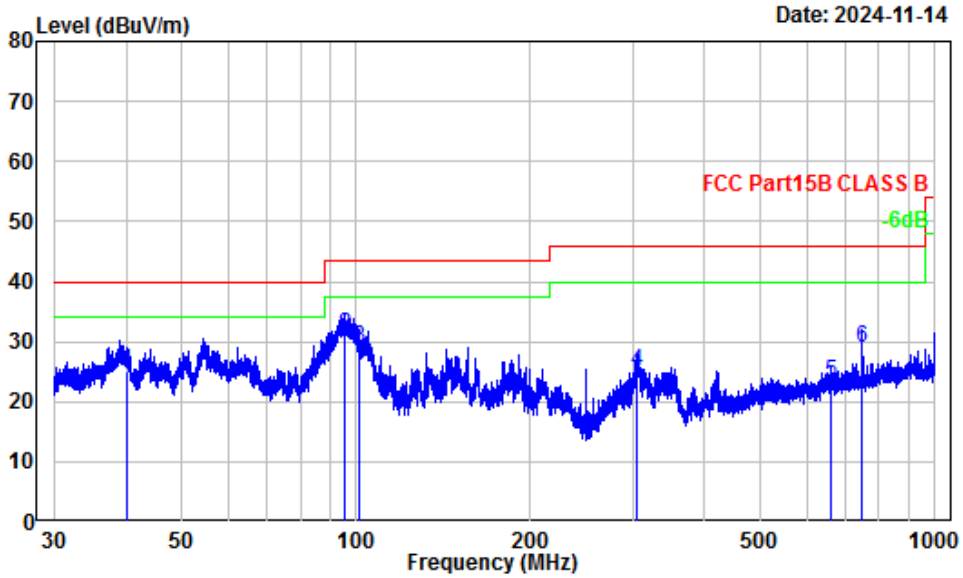

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode2
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.05	-12.40	37.35	24.95	40.00	-15.05	QP
2	95.72	-17.11	48.27	31.16	43.50	-12.34	QP
3	101.02	-15.67	44.51	28.84	43.50	-14.66	QP
4	306.22	-11.07	36.23	25.16	46.00	-20.84	QP
5	662.89	-3.92	27.03	23.11	46.00	-22.89	QP
6	750.11	-2.88	31.86	28.98	46.00	-17.02	QP

1 ~ 6 GHz

Horizontal

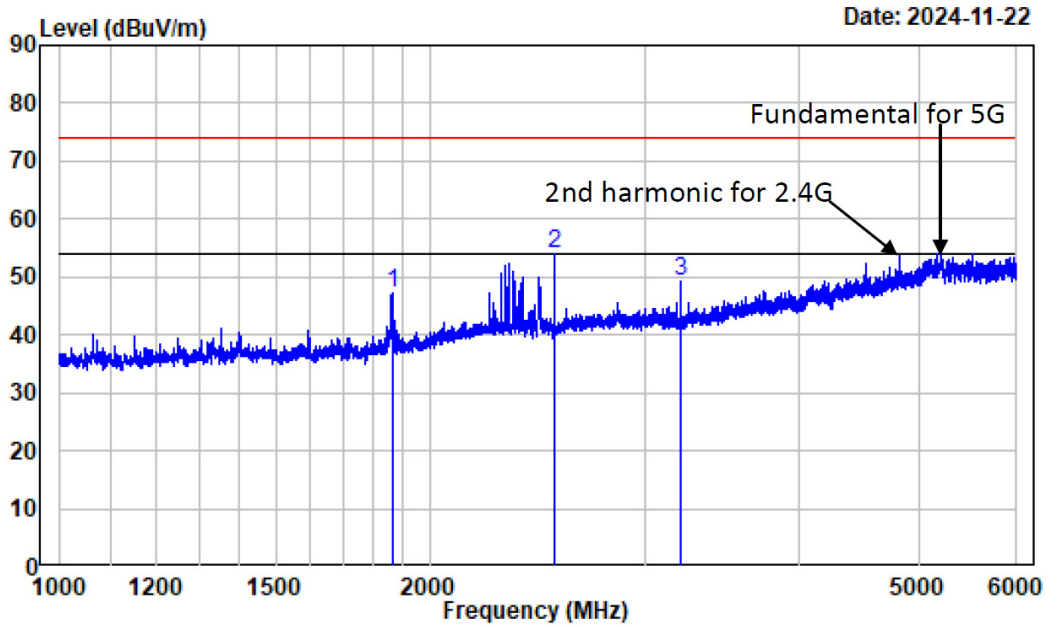

Site : chamber B
Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode2
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1866.358	-6.30	53.64	47.34	74.00	-26.66	Peak
2	2525.191	-3.18	57.08	53.90	74.00	-20.10	Peak
3	3197.775	-2.80	51.93	49.13	74.00	-24.87	Peak

Vertical

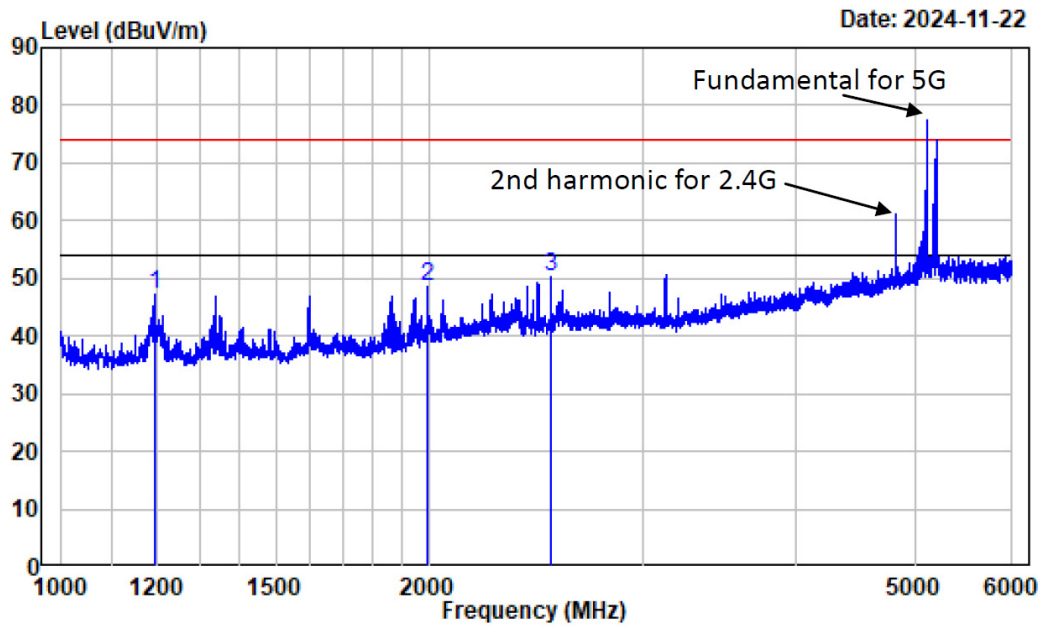

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode2
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1195.024	-8.10	55.46	47.36	74.00	-26.64	Peak
2	1996.375	-5.16	53.87	48.71	74.00	-25.29	Peak
3	2520.190	-3.17	53.46	50.29	74.00	-23.71	Peak

6 ~ 18 GHz

Horizontal

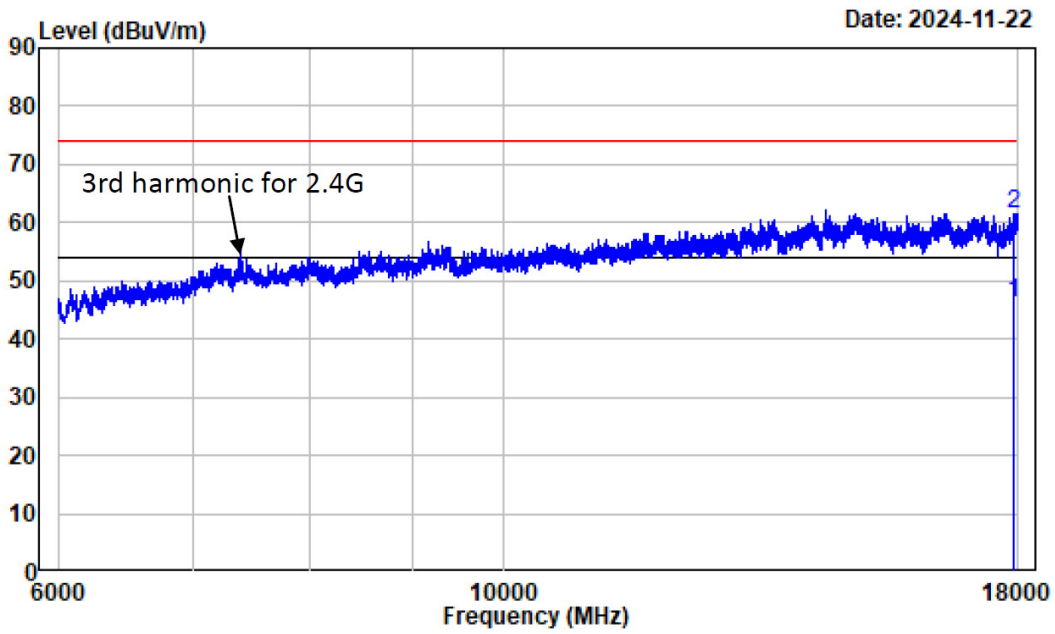


```
Site           : chamber B
Condition      : Horizontal
Project Number: 2401Y27848E-EM
Test Mode      : Mode2
Tester         : Dylan Yang
```

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17926.490	24.10	22.18	46.28	54.00	-7.72	Average
2	17926.490	24.10	37.52	61.62	74.00	-12.38	Peak

Vertical

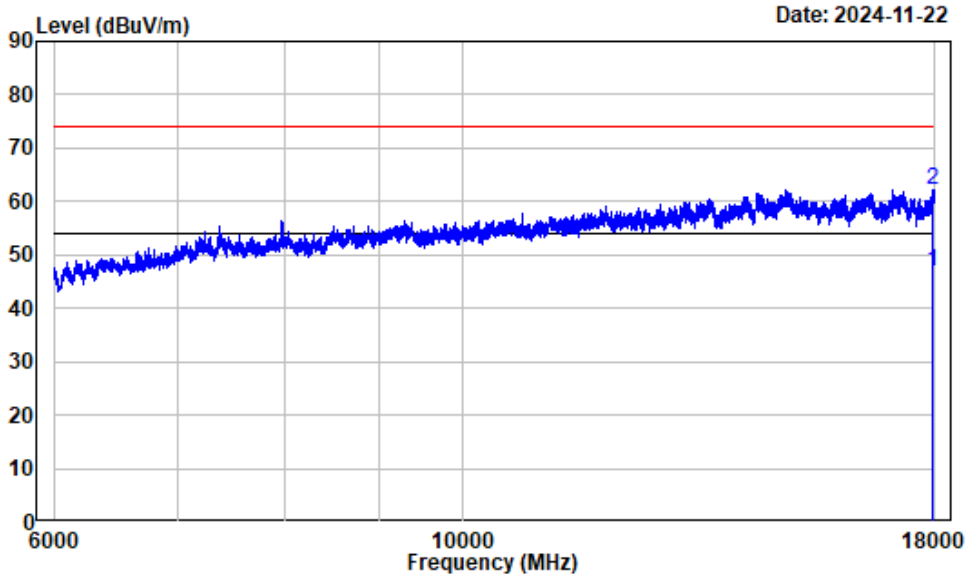

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode2
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17956.490	24.32	22.47	46.79	54.00	-7.21	Average
2	17956.490	24.32	37.86	62.18	74.00	-11.82	Peak

18 ~ 30 GHz

Horizontal

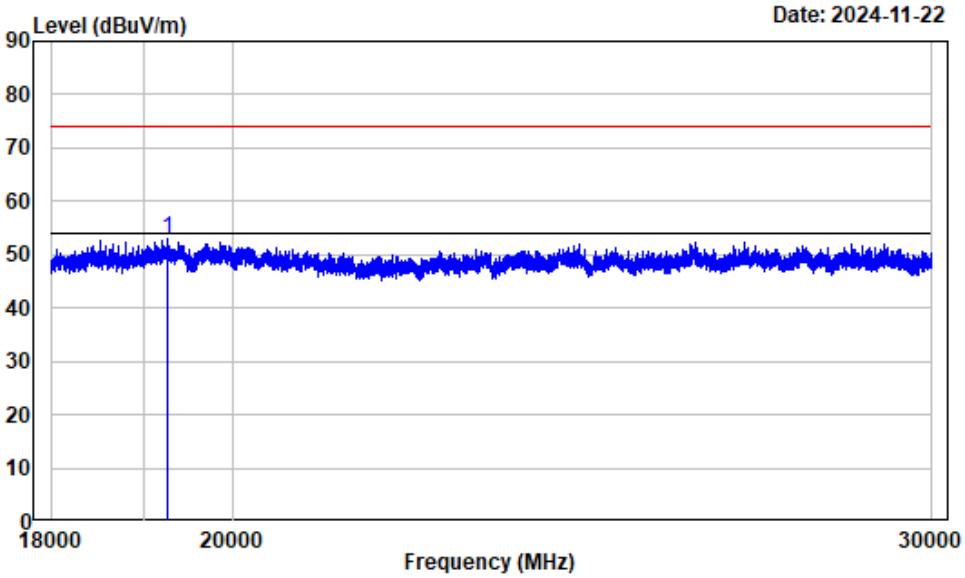

Site : chamber B
Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode 2
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19252.660	15.25	37.82	53.07	74.00	-20.93	Peak

Vertical

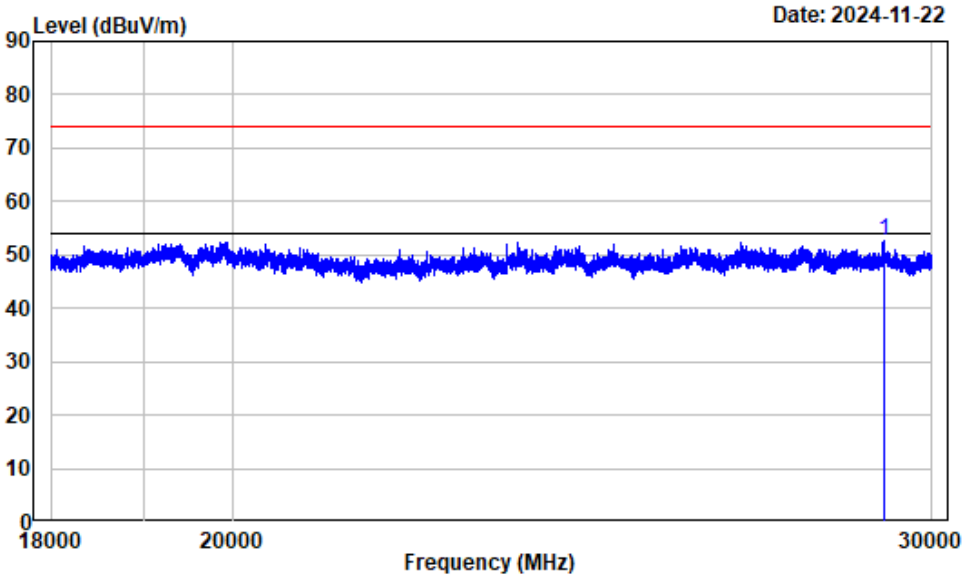

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode 2
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	29194.400	17.66	34.83	52.49	74.00	-21.51	Peak

Test Mode 3

30 MHz~1 GHz

Horizontal

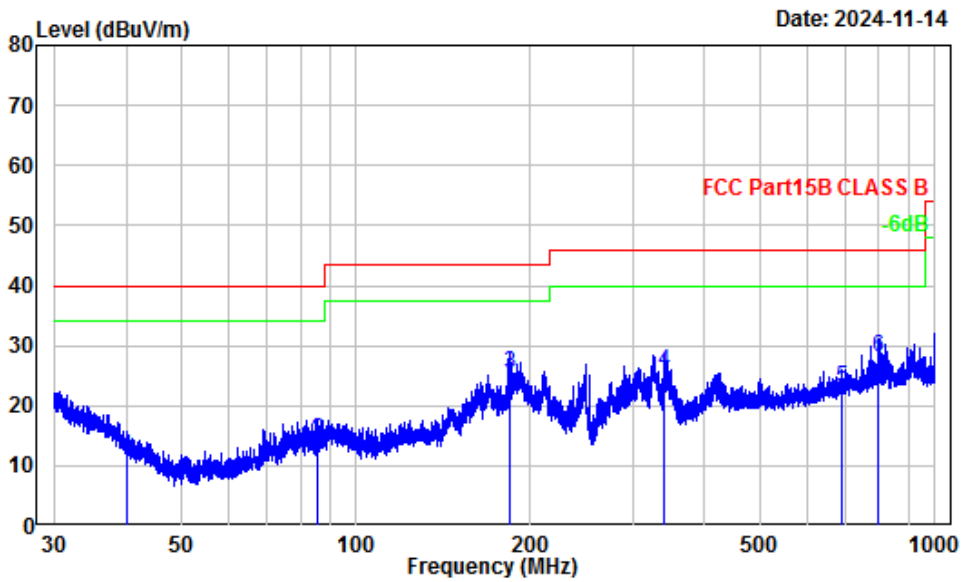

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.19	-12.50	24.10	11.60	40.00	-28.40	QP
2	85.49	-18.08	32.25	14.17	40.00	-25.83	QP
3	184.33	-13.95	39.40	25.45	43.50	-18.05	QP
4	341.23	-10.38	35.92	25.54	46.00	-20.46	QP
5	689.26	-3.67	26.73	23.06	46.00	-22.94	QP
6	800.38	-2.14	30.18	28.04	46.00	-17.96	QP

Vertical

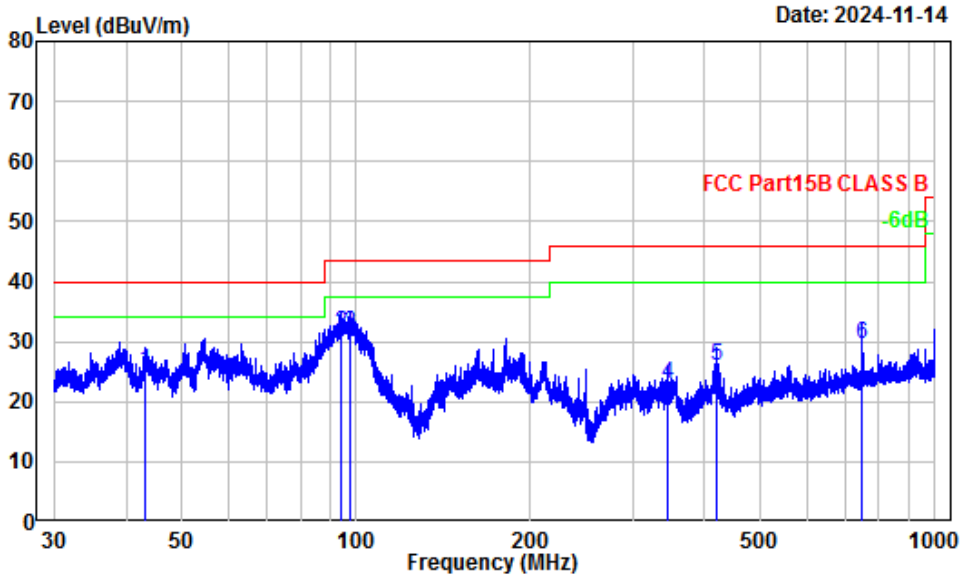

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.16	-14.68	39.71	25.03	40.00	-14.97	QP
2	94.02	-17.54	48.91	31.37	43.50	-12.13	QP
3	97.80	-16.56	48.08	31.52	43.50	-11.98	QP
4	344.54	-10.30	33.32	23.02	46.00	-22.98	QP
5	419.66	-7.96	33.94	25.98	46.00	-20.02	QP
6	750.11	-2.88	32.60	29.72	46.00	-16.28	QP

1 ~ 6 GHz

Horizontal

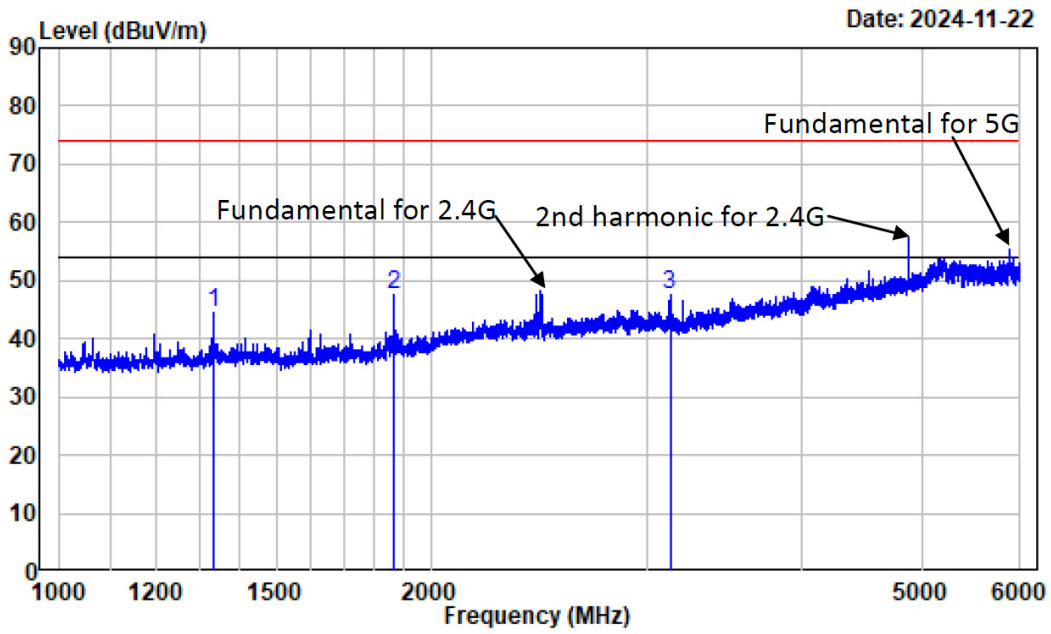

Site : chamber B
Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1333.792	-7.27	51.62	44.35	74.00	-29.65	Peak
2	1866.358	-6.30	53.95	47.65	74.00	-26.35	Peak
3	3125.266	-2.60	50.05	47.45	74.00	-26.55	Peak

Vertical

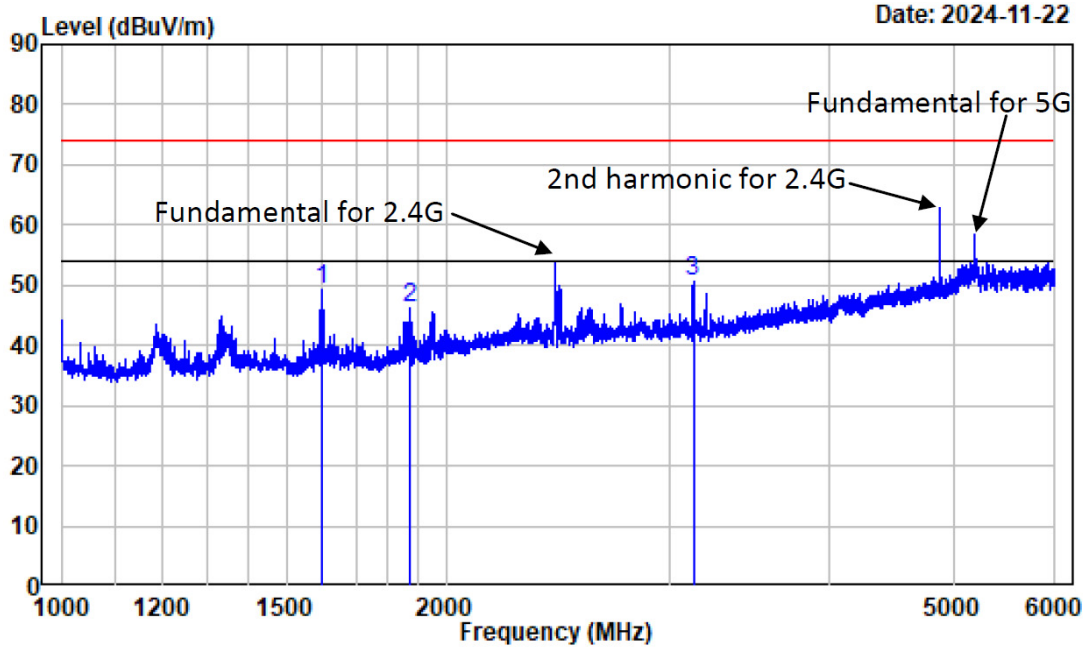

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1597.575	-7.19	56.27	49.08	74.00	-24.92	Peak
2	1873.234	-6.28	52.34	46.06	74.00	-27.94	Peak
3	3125.266	-2.60	53.12	50.52	74.00	-23.48	Peak

6 ~ 18 GHz

Horizontal

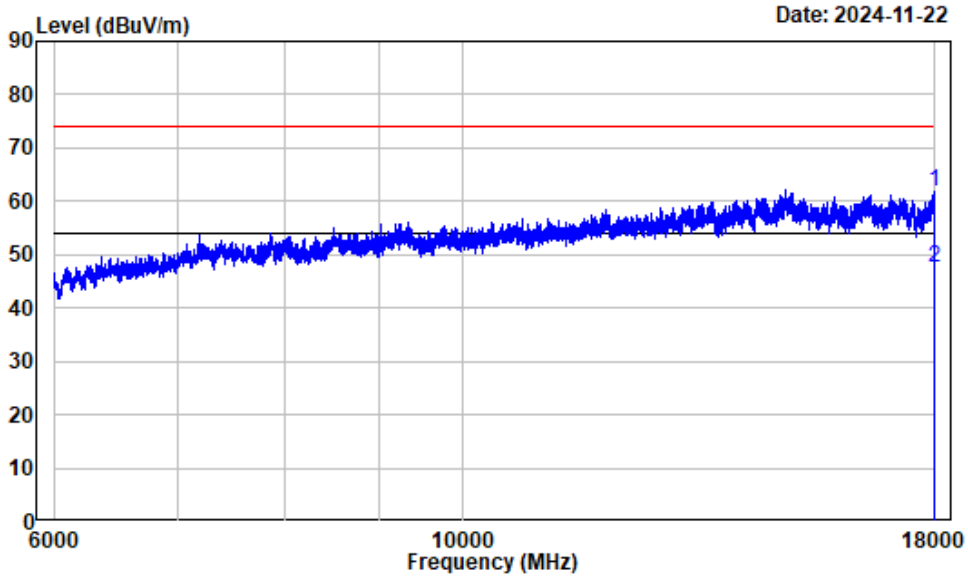

Site : chamber B
Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.000	24.56	37.12	61.68	74.00	-12.32	Peak
2	17991.000	24.56	22.96	47.52	54.00	-6.48	Average

Vertical

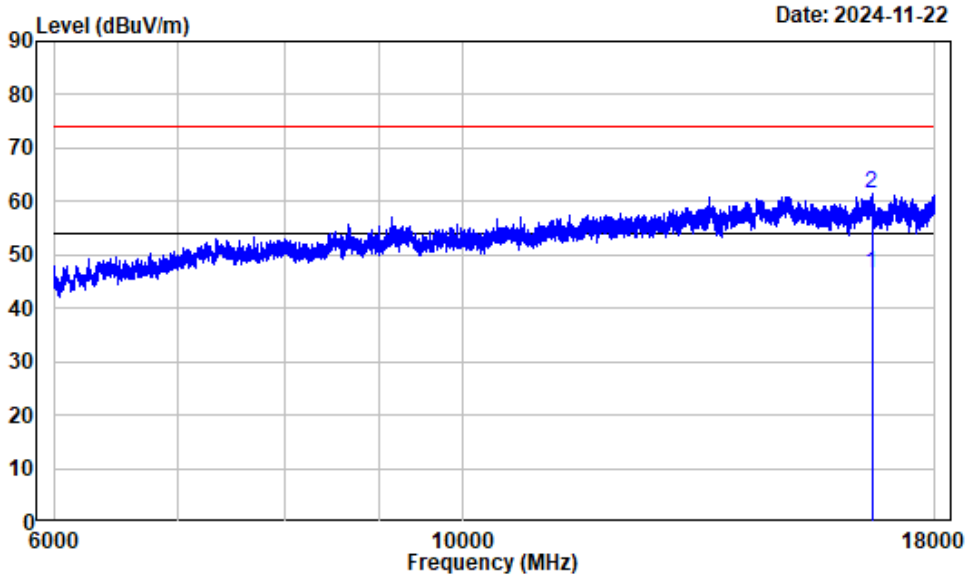

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	16637.830	16.28	30.29	46.57	54.00	-7.43	Average
2	16637.830	16.28	45.18	61.46	74.00	-12.54	Peak

18 ~ 30 GHz

Horizontal

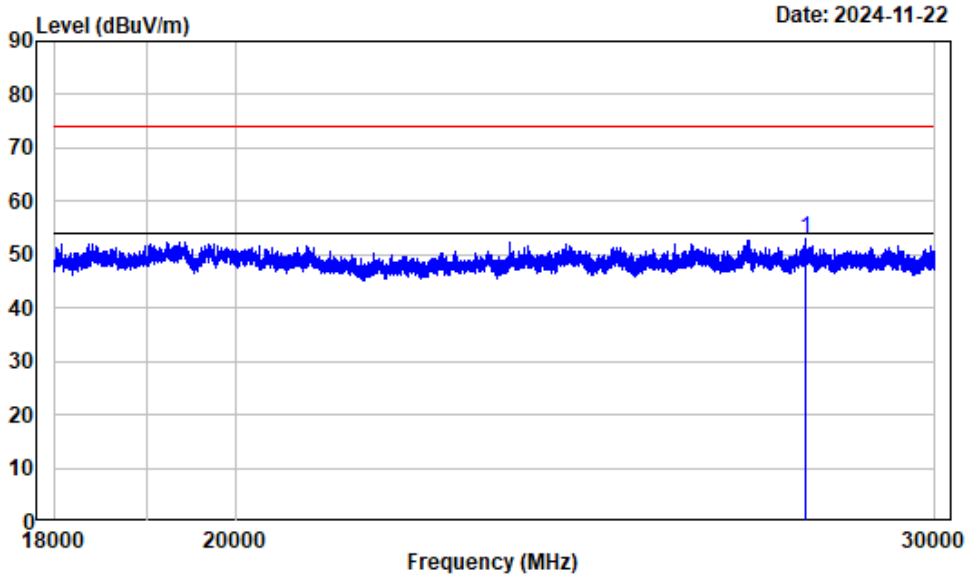

Site : chamber B
Condition : Horizontal
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	27841.230	18.12	34.71	52.83	74.00	-21.17	Peak

Vertical

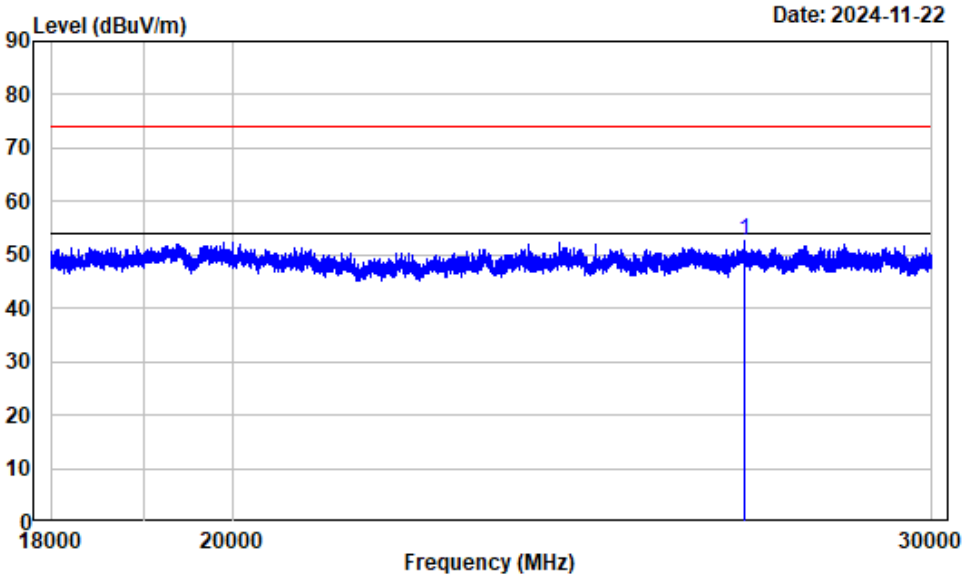

Site : chamber B
Condition : Vertical
Project Number: 2401Y27848E-EM
Test Mode : Mode3
Tester : Dylan Yang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	26903.610	18.09	34.72	52.81	74.00	-21.19	Peak

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y27848E-RF External photo and 2401Y27848E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y27848E-EM Test Setup photo.

******* END OF REPORT *******