

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2601U03240E-EM-00
FCC ID: YZZGWN7703P

Test Standard (s)

FCC Part 15, Subpart B (Class A)

Sample Description

Product Type: 24 Unmanaged Gigabit Port and 2 SFP Port Switch with 24 PoE+
Model No.: GWN7703P
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2026/06/22
Issue Date: 2026/08/20

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Haiguo Li

Haiguo Li
EMC Engineer

Approved By:

Moon Liu

Moon Liu
EMC Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.107 - AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	12
LEVEL & OVER LIMIT CALCULATION	12
TEST DATA	12
FCC §15.109 - RADIATED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
LEVEL & OVER LIMIT CALCULATION	19
TEST DATA	19
EUT PHOTOGRAPHS	28
TEST SETUP PHOTOGRAPHS	29

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601U03240E-EM-00	Original Report	2026/08/20

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Voltage Range	AC 100-240V 50/60Hz
Highest operating frequency [#]	200 MHz (Provided by the applicant)
Equipment Class	Class A
Sample number	3OCM-1: One set of PYW power supply switch 3OCM-3: Grounding wire 3OCM-13: One set of AOYUAN power supply switch 3OCM-15: Grounding wire 3OCM-21: US Standard Power Cord (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~1000MHz	Horizontal	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz	Vertical	6.28dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	6.18dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	6.62dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	6.66dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No.: CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test Mode1: Data communication & full load (24 Unmanaged Gigabit Port and 2 SFP Port Switch with 24 PoE+ GWN7703P, PYW power supply)

Test Mode2: Data communication & full load (24 Unmanaged Gigabit Port and 2 SFP Port Switch with 24 PoE+ GWN7703P, AOYUAN power supply)

Note:

Brief description of the EUT and its surrounding operational conditions:

- 1, The casing of the EUT is grounded.
- 2, 22 Gigabit Ports are connected to LOAD, 2 SFP Ports are connected to Gigabit Managed Switch ES220GP via optical modules.
- 3, PC1, PC2 are connected to EUT, by having the IPs in the same subnet, ping each other's IPs to maintain smooth communication. The total power of the EUT is 250 watts.

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	SOCKET	/	/
DELL	PC1	Latitude E7270	1JH13G2
DELL	PC2	Latitude E6520	DL0ZCS1
N/A	LOAD	N/A	/
TP-link	Gigabit Managed Switch	ES220GP	/
TP-link	Fiber Module*4PCS	N/A	/

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded un-detachable AC cable	1.0	SOCKET	LISN
Unshielded detachable AC cable	1.2	EUT	SOCKET
Unshielded detachable fiber cable*2	2.0	Fiber module	Fiber module
Unshielded detachable RJ45 cable	3.0	EUT	PC1
Unshielded detachable RJ45 cable	3.0	EUT	PC2
Unshielded detachable RJ45 cable*22	3.0	EUT	LOAD
Unshielded detachable DC cable	1.5	EUT	GND
Unshielded detachable AC cable	1.5	EUT	Mains

Block Diagram of Test Setup

Conducted emission

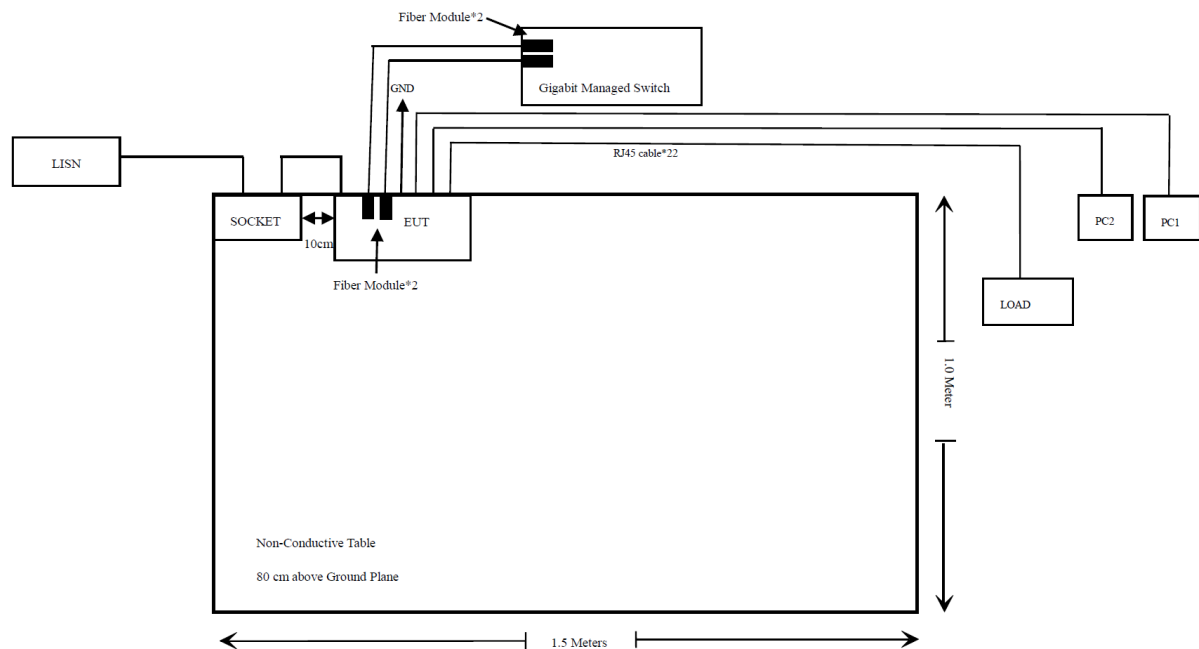

Radio emission

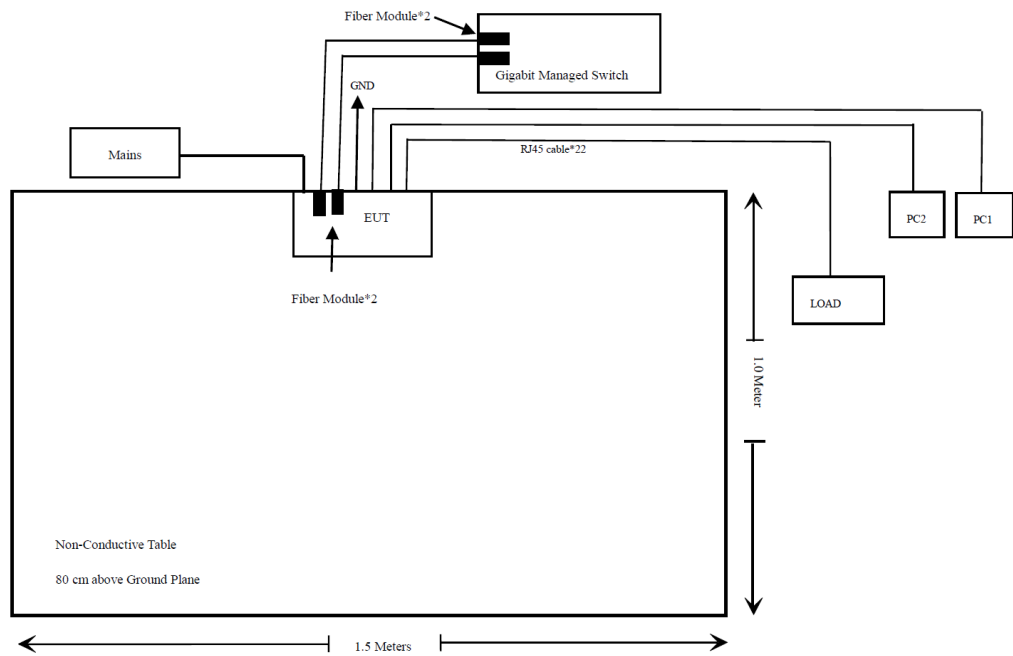

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2026/06/26	2029/06/25
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2026/07/03	2029/07/02
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2026/07/15	2027/07/14
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2026/07/06	2029/07/05


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

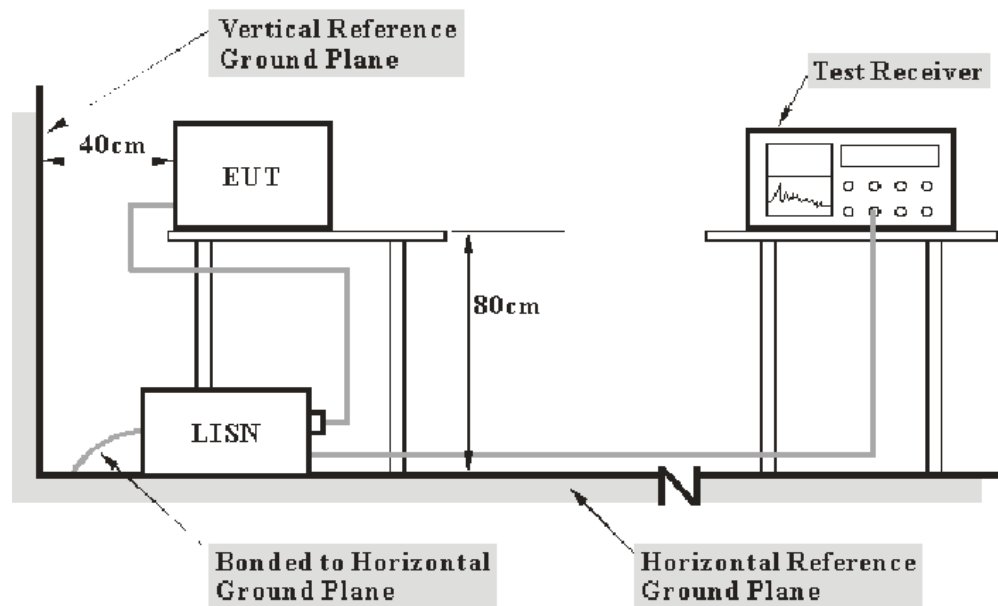

- Note:** 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$


Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa

The testing was performed by Macy Shi on 2026-07-05.

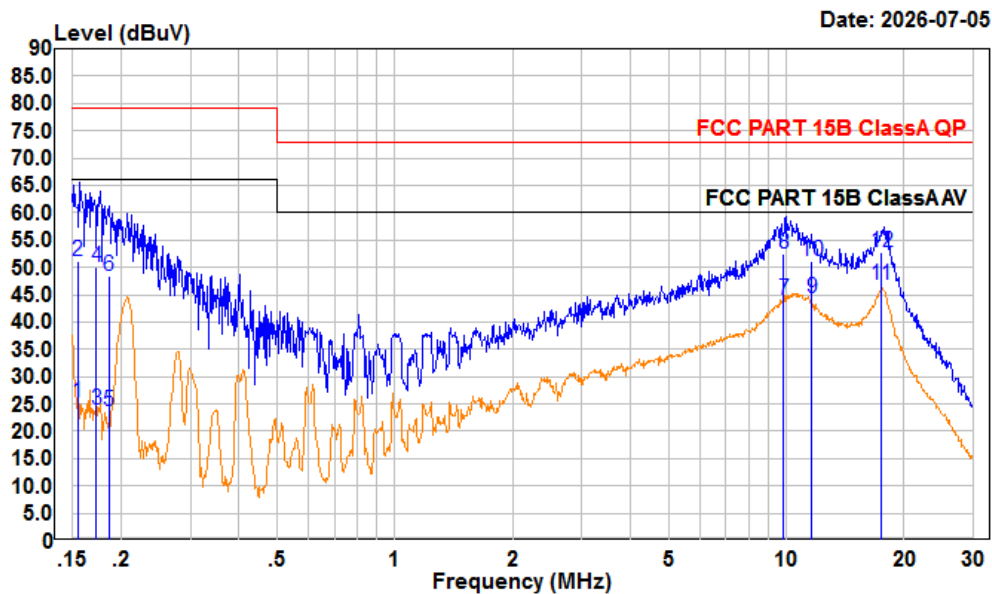*Test Model:***AC 120V/60 Hz, Line**

Condition: Line


Project : 2601U03240E-EM

test Mode: mode 1

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.155	5.56	25.28	9.70	10.02	66.00	-40.72	Average
2	0.155	31.36	51.08	9.70	10.02	79.00	-27.92	QP
3	0.173	4.21	23.93	9.70	10.02	66.00	-42.07	Average
4	0.173	30.29	50.01	9.70	10.02	79.00	-28.99	QP
5	0.186	3.80	23.53	9.70	10.03	66.00	-42.47	Average
6	0.186	28.55	48.28	9.70	10.03	79.00	-30.72	QP
7	9.861	23.80	44.03	9.90	10.33	60.00	-15.97	Average
8	9.861	32.39	52.62	9.90	10.33	73.00	-20.38	QP
9	11.608	24.09	44.34	9.90	10.35	60.00	-15.66	Average
10	11.608	30.86	51.11	9.90	10.35	73.00	-21.89	QP
11	17.470	26.37	46.67	9.90	10.40	60.00	-13.33	Average
12	17.470	32.57	52.87	9.90	10.40	73.00	-20.13	QP

AC 120V/60 Hz, Neutral

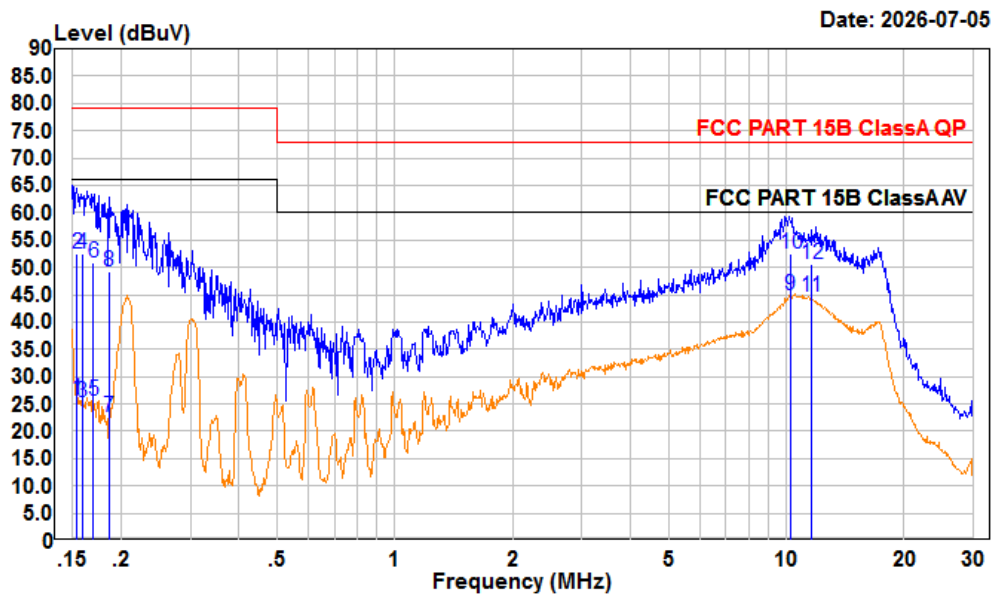


Condition: neutral

Project : 2601U03240E-EM

test Mode: mode 1

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.154	6.17	25.79	9.60	10.02	66.00	-40.21	Average
2	0.154	32.88	52.50	9.60	10.02	79.00	-26.50	QP
3	0.159	5.76	25.38	9.60	10.02	66.00	-40.62	Average
4	0.159	32.83	52.45	9.60	10.02	79.00	-26.55	QP
5	0.170	5.93	25.55	9.60	10.02	66.00	-40.45	Average
6	0.170	31.23	50.85	9.60	10.02	79.00	-28.15	QP
7	0.186	3.04	22.67	9.60	10.03	66.00	-43.33	Average
8	0.186	29.69	49.32	9.60	10.03	79.00	-29.68	QP
9	10.232	24.75	44.78	9.70	10.33	60.00	-15.22	Average
10	10.232	32.59	52.62	9.70	10.33	73.00	-20.38	QP
11	11.562	24.43	44.48	9.70	10.35	60.00	-15.52	Average
12	11.562	30.51	50.56	9.70	10.35	73.00	-22.44	QP

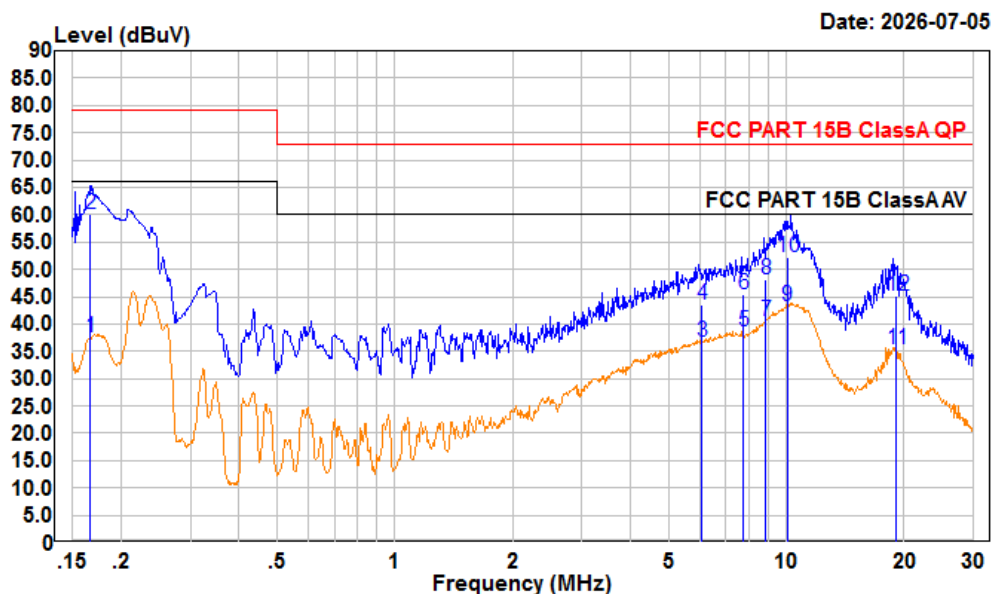*Test Mode2:***AC 120V/60 Hz, Line**

Condition: Line


Project : 2601U03240E-EM

test Mode: mode 2

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.167	17.84	37.56	9.70	10.02	66.00	-28.44	Average
2	0.167	40.33	60.05	9.70	10.02	79.00	-18.95	QP
3	6.086	16.54	36.70	9.90	10.26	60.00	-23.30	Average
4	6.086	23.28	43.44	9.90	10.26	73.00	-29.56	QP
5	7.785	18.33	38.52	9.90	10.29	60.00	-21.48	Average
6	7.785	25.35	45.54	9.90	10.29	73.00	-27.46	QP
7	8.877	20.36	40.57	9.90	10.31	60.00	-19.43	Average
8	8.877	27.94	48.15	9.90	10.31	73.00	-24.85	QP
9	10.044	23.05	43.28	9.90	10.33	60.00	-16.72	Average
10	10.044	31.97	52.20	9.90	10.33	73.00	-20.80	QP
11	19.147	14.91	35.23	9.90	10.42	60.00	-24.77	Average
12	19.147	24.77	45.09	9.90	10.42	73.00	-27.91	QP

AC 120V/60 Hz, Neutral

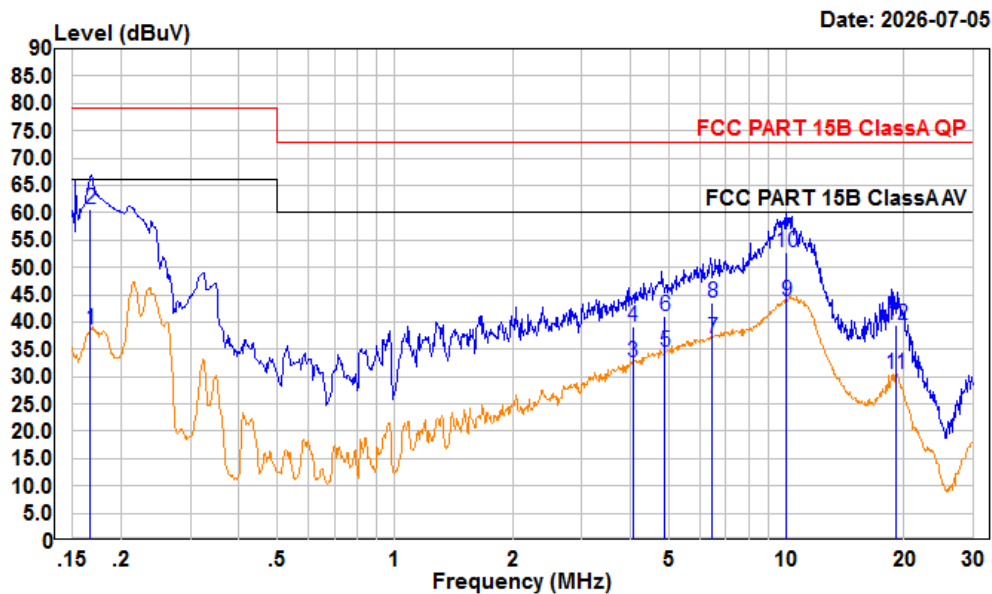

Condition: neutral

Project : 2601U03240E-EM

test Mode: mode 2

tester : Macy.shi Setting:RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.167	18.95	38.57	9.60	10.02	66.00	-27.43	Average
2	0.167	41.10	60.72	9.60	10.02	79.00	-18.28	QP
3	4.058	12.91	32.72	9.60	10.21	60.00	-27.28	Average
4	4.058	19.38	39.19	9.60	10.21	73.00	-33.81	QP
5	4.885	14.77	34.64	9.64	10.23	60.00	-25.36	Average
6	4.885	21.19	41.06	9.64	10.23	73.00	-31.94	QP
7	6.478	17.04	37.00	9.69	10.27	60.00	-23.00	Average
8	6.478	23.55	43.51	9.69	10.27	73.00	-29.49	QP
9	10.016	23.78	43.81	9.70	10.33	60.00	-16.19	Average
10	10.016	32.83	52.86	9.70	10.33	73.00	-20.14	QP
11	19.023	10.38	30.50	9.70	10.42	60.00	-29.50	Average
12	19.023	19.36	39.48	9.70	10.42	73.00	-33.52	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup


Below 1GHz for Radiated Emissions

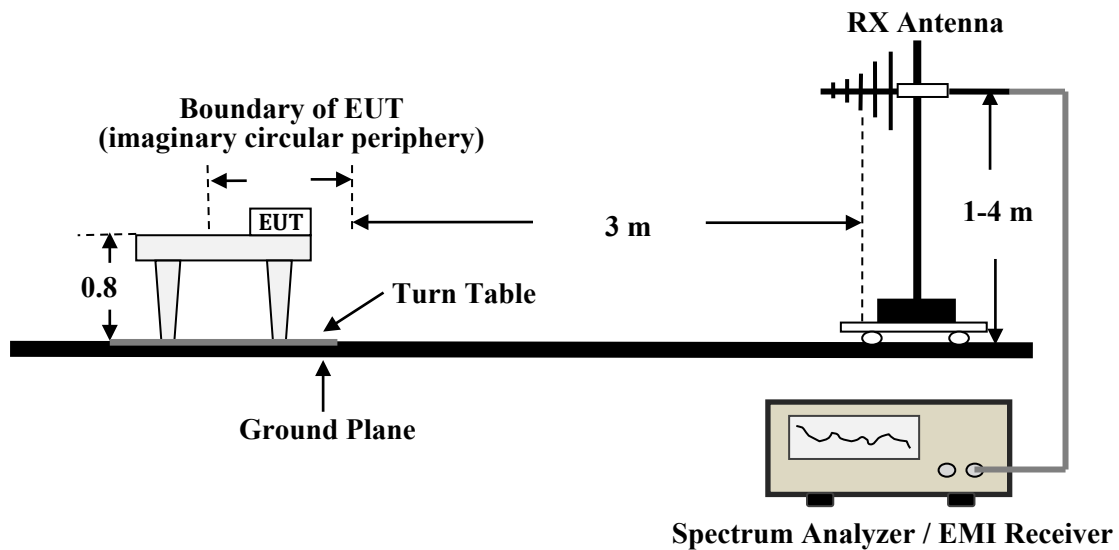

Above 1GHz for Radiated Emissions

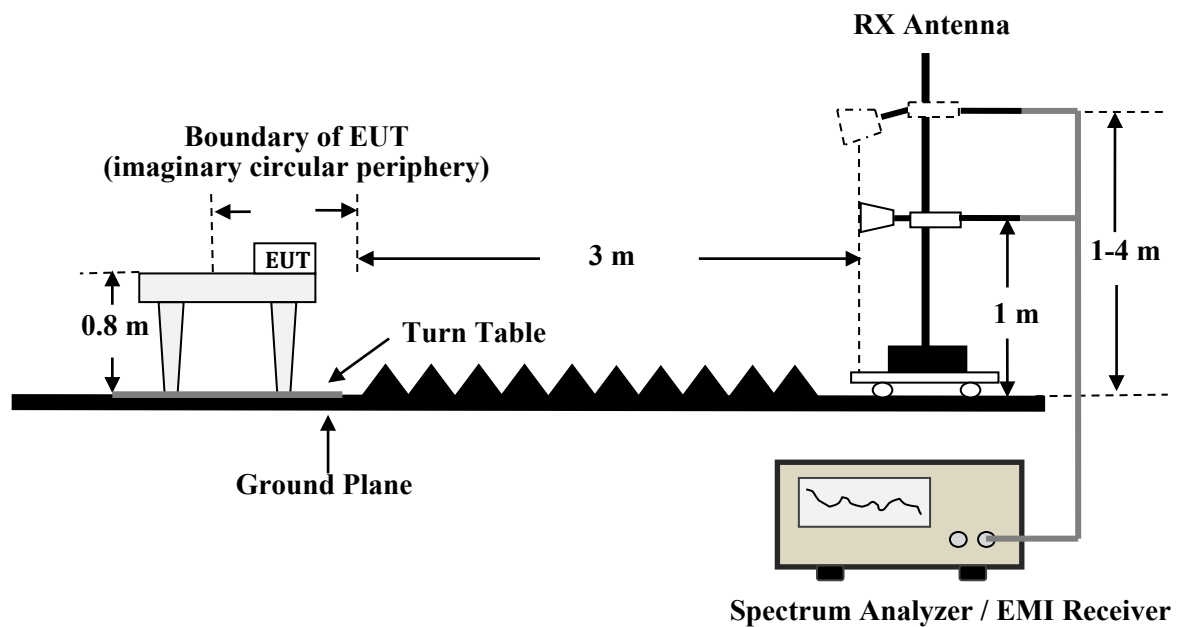

Radiated Emissions Setup Configuration

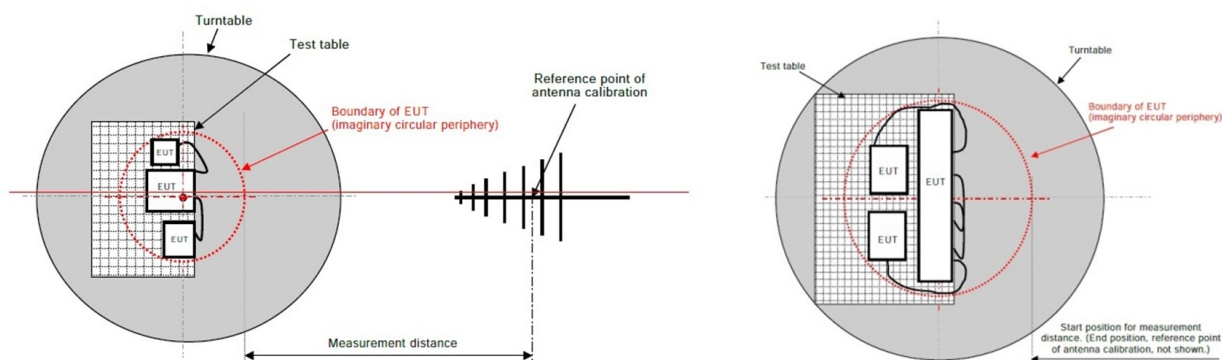

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	500 kHz	/	PK
	/	/	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the emission level of the EUT in Peak mode was 6dB lower than the limit specified, Peak values of EUT will be reported. Otherwise, the emission will be repeated by using the Quasi-Peak method and reported for frequency range below 1GHz.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class A. The equation for Over Limit calculation is as follows:


$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions

Temperature:	22.1~22.9 °C
Relative Humidity:	43~56 %
ATM Pressure:	100~101.6 kPa


The testing was performed by Alex Yan on 2026-07-17 for below 1GHz and Leon Guo on 2026-07-18 for above 1GHz.

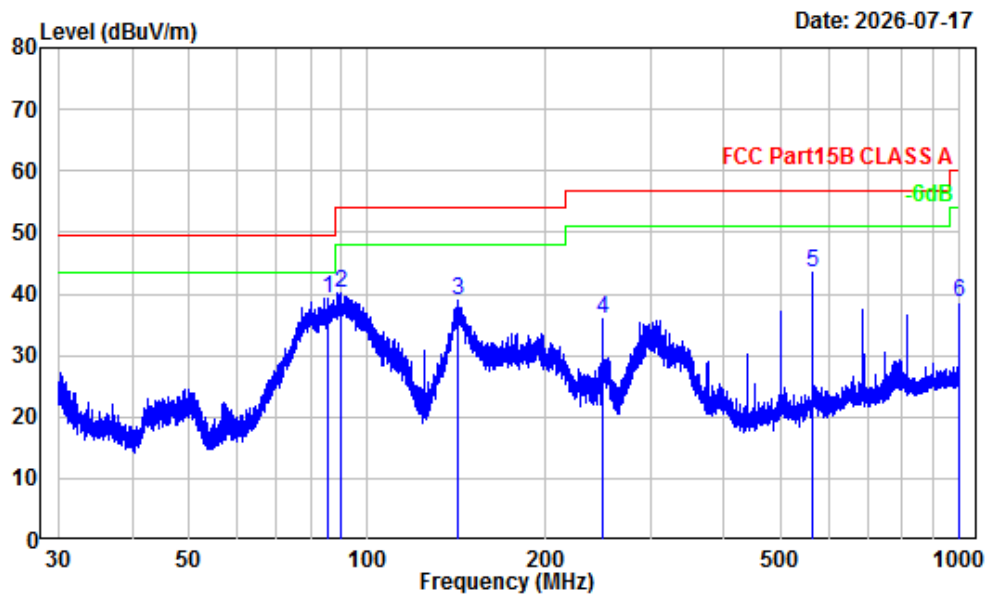*Test Model:***30 MHz~1 GHz****Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601U03240E-EM
Test Mode : Mode1
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex Yan

	Freq Factor		Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	85.41	-18.00	57.22	39.22	49.54	-10.32 Peak
2	90.38	-17.85	58.13	40.28	53.98	-13.70 Peak
3	141.64	-11.90	50.75	38.85	53.98	-15.13 Peak
4	249.97	-13.06	49.07	36.01	56.90	-20.89 Peak
5	562.66	-5.25	48.85	43.60	56.90	-13.30 Peak
6	1000.00	0.63	38.04	38.67	60.00	-21.33 Peak

Vertical

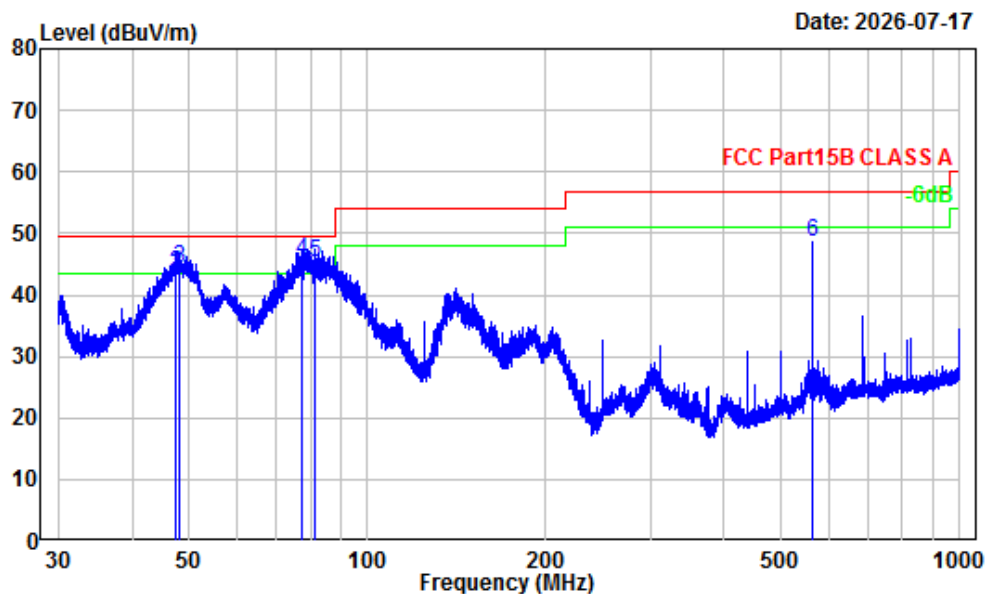


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601U03240E-EM
Test Mode : Mode1
Detector: Peak RBW/VBW: 120/500kHz
Detector: QP RBW/VBW : 120kHz
Tester : Alex Yan

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.45	-16.96	60.56	43.60	49.54	-5.94	QP
2	47.45	-16.96	60.56	43.60	49.54	-5.94	QP
3	48.02	-17.20	61.61	44.41	49.54	-5.13	QP
4	77.46	-17.75	63.29	45.54	49.54	-4.00	QP
5	81.46	-17.94	63.31	45.37	49.54	-4.17	QP
6	562.66	-5.25	53.85	48.60	56.90	-8.30	Peak

1 ~ 5 GHz


Horizontal

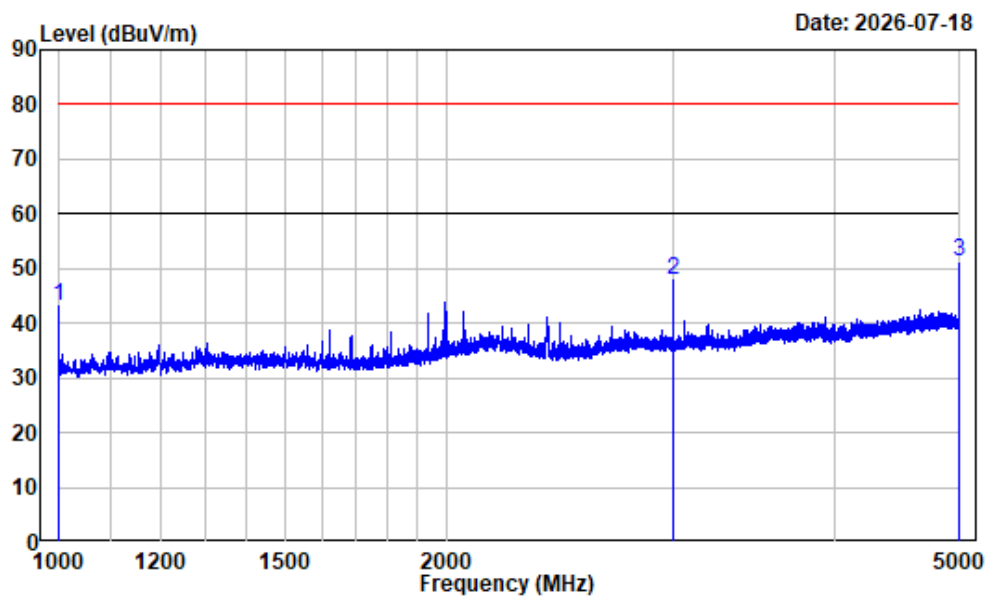

Site : chamber B
Condition : Horizontal
Project Number : 2601U03240E-EM
Test mode : Mode 1
Tester : Leon Guo
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak


	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1000.000	-14.67	57.89	43.22	80.00	-36.78	Peak
2	3000.500	-9.95	57.91	47.96	80.00	-32.04	Peak
3	5000.000	-7.42	58.85	51.43	80.00	-28.57	Peak

Vertical

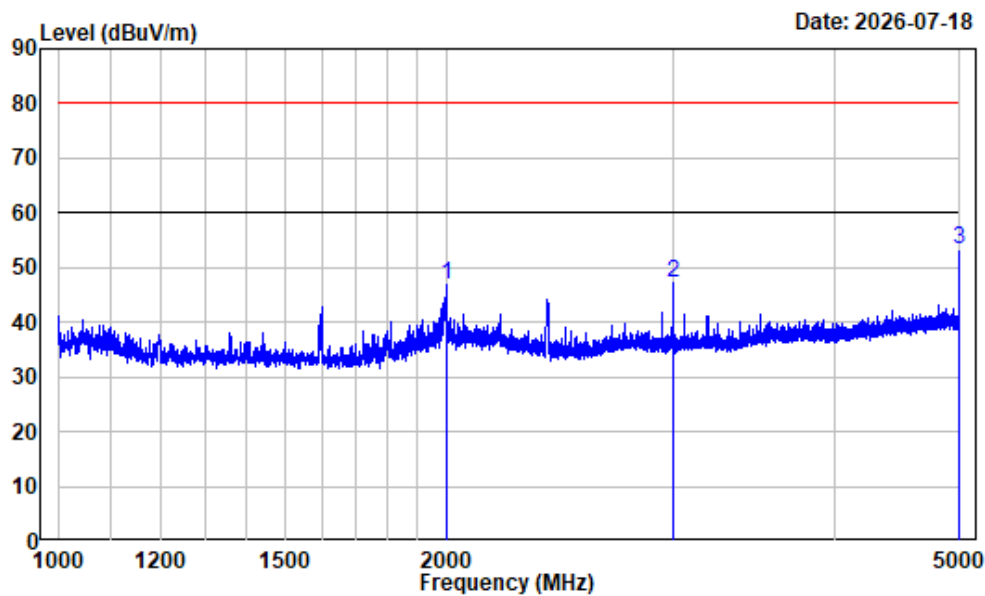

Site : chamber B
Condition : Vertical
Project Number : 2601U03240E-EM
Test mode : Mode 1
Tester : Leon Guo
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak


	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB	
1	1999.000	-11.42	58.15	46.73	80.00	-33.27	Peak
2	3000.000	-9.95	57.20	47.25	80.00	-32.75	Peak
3	5000.000	-7.42	60.64	53.22	80.00	-26.78	Peak

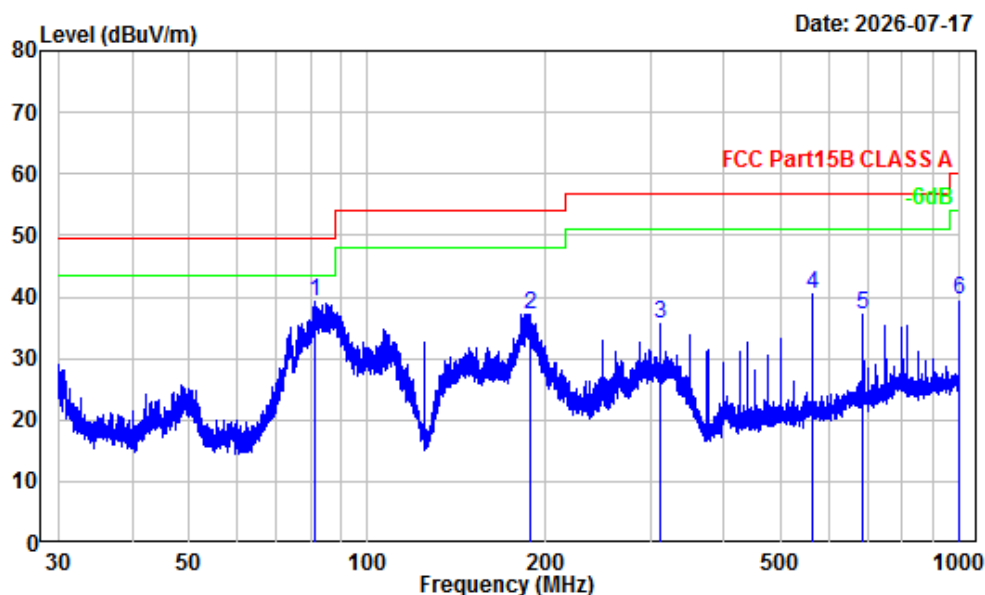*Test Mode2:***30 MHz~1 GHz****Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601U03240E-EM
Test Mode : Mode 2
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex Yan

	Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	81.21	-17.94	57.04	39.10	49.54	-10.44	Peak
2	187.67	-13.62	50.89	37.27	53.98	-16.71	Peak
3	312.59	-10.88	46.51	35.63	56.90	-21.27	Peak
4	562.66	-5.25	45.61	40.36	56.90	-16.54	Peak
5	687.75	-3.43	40.52	37.09	56.90	-19.81	Peak
6	1000.00	0.63	39.06	39.69	60.00	-20.31	Peak

Vertical

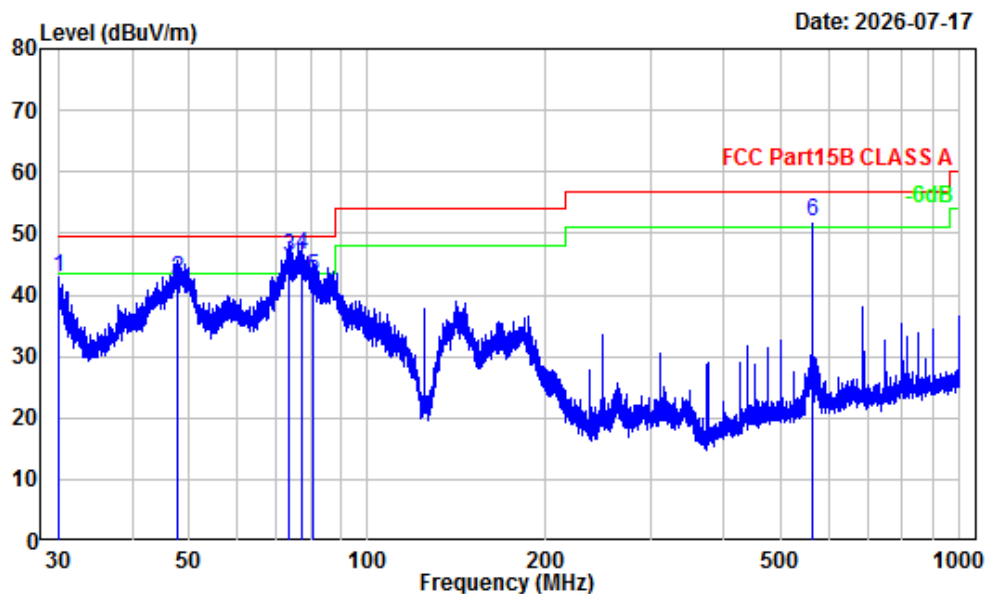


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601U03240E-EM
Test Mode : Mode 2
Detector: Peak RBW/VBW: 120/500kHz
Detector: QP RBW/VBW : 120kHz
Tester : Alex Yan

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.04	-5.77	48.69	42.92	49.54	-6.62	Peak
2	47.60	-17.02	59.54	42.52	49.54	-7.02	QP
3	73.65	-17.76	64.08	46.32	49.54	-3.22	QP
4	77.19	-17.75	64.10	46.35	49.54	-3.19	QP
5	80.82	-17.92	60.65	42.73	49.54	-6.81	QP
6	562.66	-5.25	57.13	51.88	56.90	-5.02	QP

1 ~ 5 GHz


Horizontal

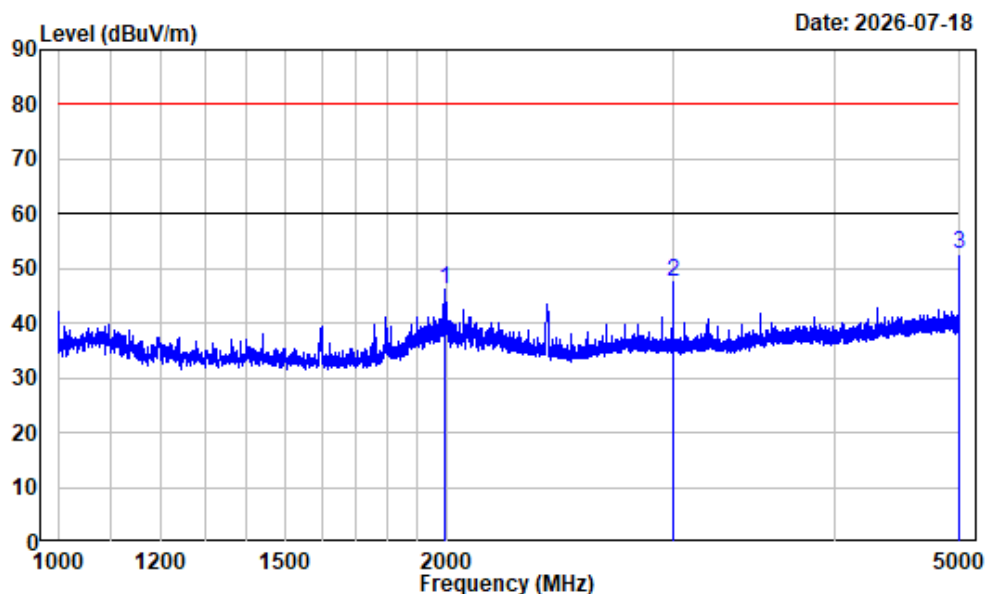

Site : chamber B
Condition : Horizontal
Project Number : 2601U03240E-EM
Test mode : Mode 2
Tester : Leon Guo
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1993.500	-11.50	57.53	46.03	80.00	-33.97	Peak
2	3000.500	-9.95	57.58	47.63	80.00	-32.37	Peak
3	5000.000	-7.42	60.03	52.61	80.00	-27.39	Peak

Vertical

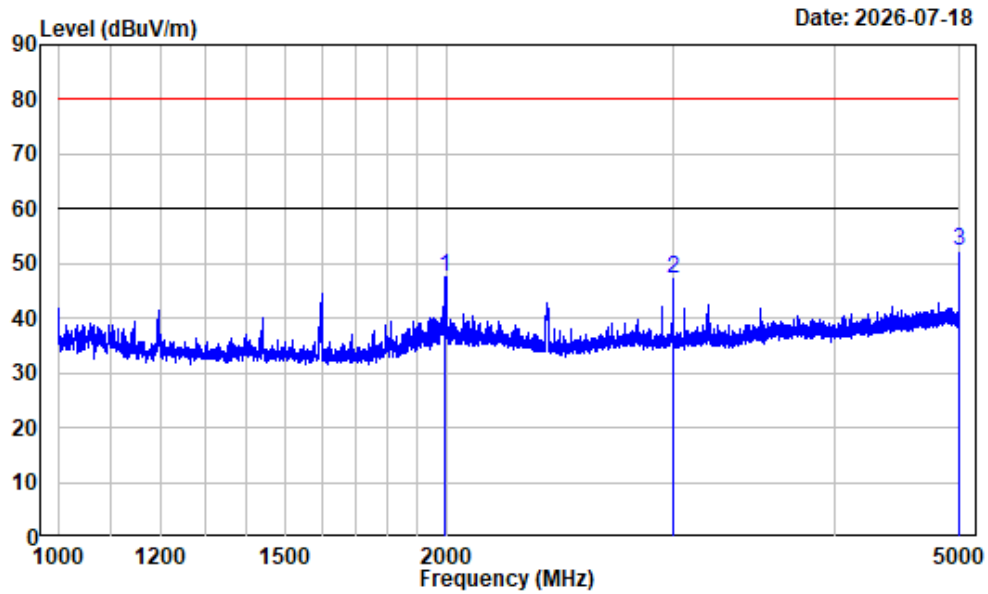

Site : chamber B
Condition : Vertical
Project Number : 2601U03240E-EM
Test mode : Mode 2
Tester : Leon Guo
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB	
1	1997.500	-11.44	58.92	47.48	80.00	-32.52	Peak
2	3000.500	-9.95	57.01	47.06	80.00	-32.94	Peak
3	5000.000	-7.42	59.69	52.27	80.00	-27.73	Peak

EUT PHOTOGRAPHS

Please refer to the attachment 2601U03240E-EM-EXP External photo and 2601U03240E-EM-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601U03240E-EM-TSP Test Setup photo.

******* END OF REPORT *******