

TEST REPORT

Applicant/Manufacturer: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: SZ1231219-76804E-EM-00
FCC ID: YZZGWN7803PV2

Test Standard (s)

FCC Part 15, Subpart B (Class A)

Sample Description

Product Type: Enterprise Layer 2+ Managed Network Switch
Model No.: GWN7803P
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2023/12/19
Report Date: 2024/01/29

Test Result:	Pass [▲]
--------------	-------------------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Joson Xiao

Joson Xiao
EMC Engineer

Approved By:

Alvin Huang

Alvin Huang
Lab Manager

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, Futian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.107 - AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
LEVEL & OVER LIMIT CALCULATION	11
TEST DATA	11
FCC §15.109 - RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
LEVEL & OVER LIMIT CALCULATION	18
TEST DATA	18
EUT PHOTOGRAPHS.....	27
TEST SETUP PHOTOGRAPHS	28

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1231219-76804E-EM-00	Original Report	2024/01/29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Enterprise Layer 2+ Managed Network Switch
Tested Model	GWN7803P
Multiple Model(s)	N/A
Voltage Range	AC 100-240V 50/60Hz 6A
Highest operating frequency [#]	500MHz (Provided by the applicant)
Equipment Class [#]	Class A
Sample number	2FI9-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz	Vertical	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Horizontal	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Vertical	5.05dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	5.35dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	5.44dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	5.16dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in normal condition.

Test Mode: Data transmitting+ full load

EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Grandstream	POE load unit	/	/
Sunlight	Adapter	F12US1200100A	/
DELL	PC1	Latitude E7270	1JH13G2
DELL	PC2	Latitude E5570	GNDLKC2

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-Shielded detachable AC cable	1.0	EUT	Mains
Un-Shielded detachable fiber cable*2	0.8	EUT	EUT
Un-Shielded detachable RJ45 cable*24	0.8	EUT	Poe load unit
Un-Shielded Un-detachable DC cable	1.2	Poe load unit	Adapter
Un-Shielded detachable RJ45 cable	8.0	Poe load unit	PC1
Un-Shielded detachable RJ45 cable	8.0	Poe load unit	PC2

Block Diagram of Test Setup

Radio emission

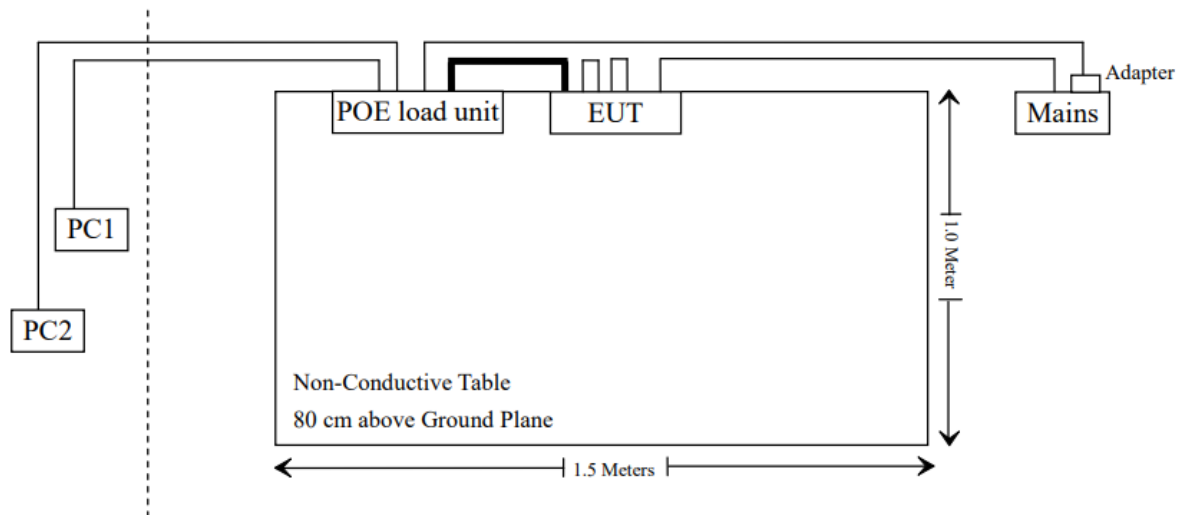

Conduction emission

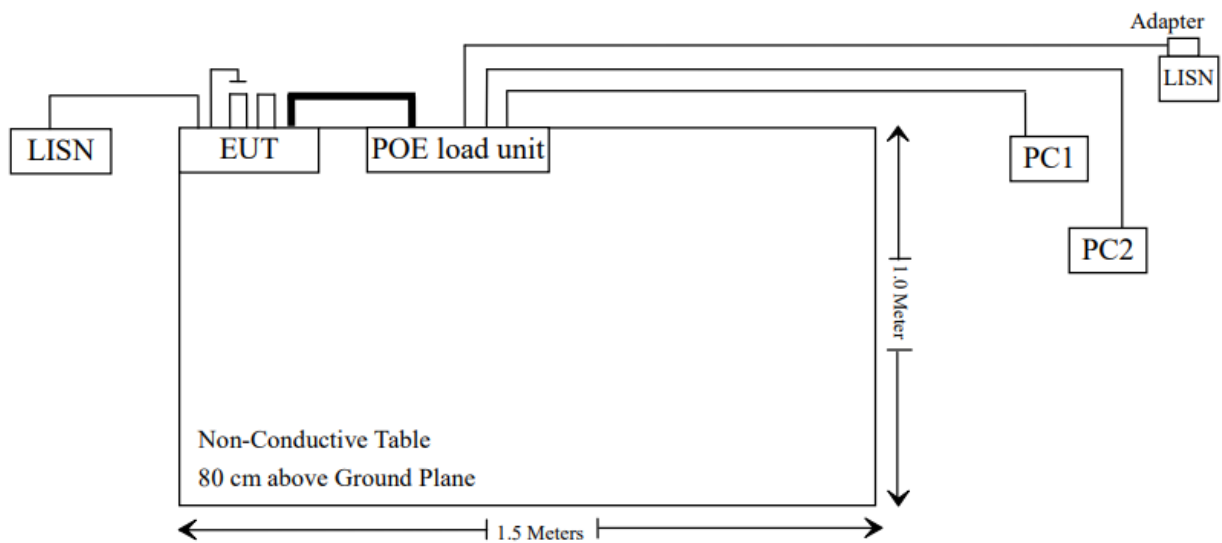

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
Audix	EMI Test software	E3	191218(V9)	NCR	NCR


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

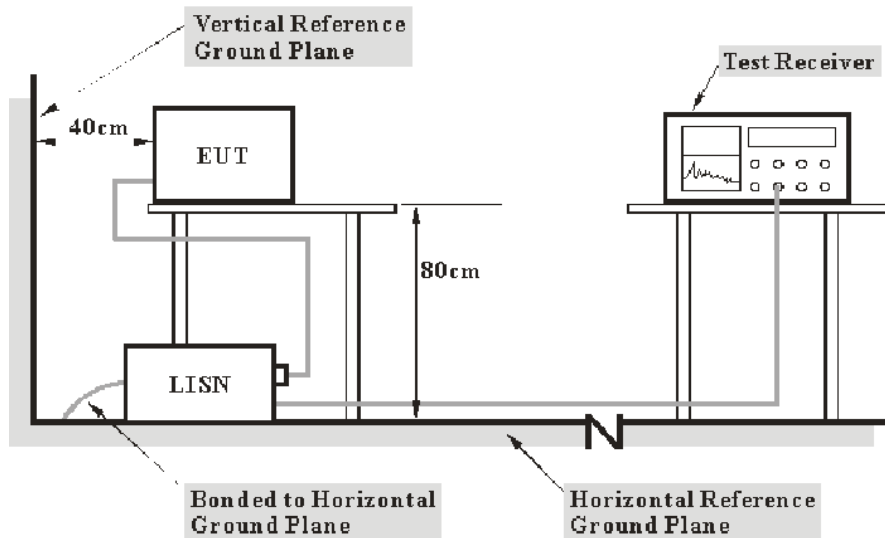

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi on 2024-01-18.

Test Mode: Data transmitting+ full load

For Build-in power 1 (D1602-F420S54-A)

AC 120V/60 Hz, Line

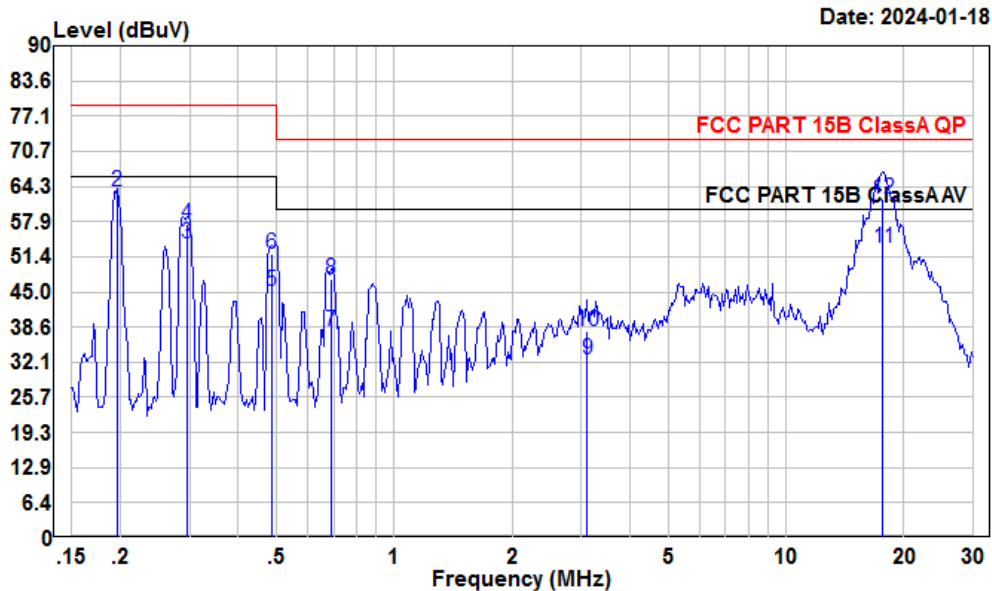

Condition: Line


Project : SZ1231219-76804E-EM

Test Mode: Data transmitting+ full load

Tester : Macy.shi

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.20	39.75	60.05	10.20	10.10	66.00	-5.95	Average
2	0.20	43.08	63.38	10.20	10.10	79.00	-15.62	QP
3	0.30	33.53	53.86	10.20	10.13	66.00	-12.14	Average
4	0.30	37.09	57.42	10.20	10.13	79.00	-21.58	QP
5	0.49	24.85	45.21	10.20	10.16	66.00	-20.79	Average
6	0.49	31.56	51.92	10.20	10.16	79.00	-27.08	QP
7	0.69	17.19	37.79	10.39	10.21	60.00	-22.21	Average
8	0.69	26.70	47.30	10.39	10.21	73.00	-25.70	QP
9	3.11	12.09	32.62	10.26	10.27	60.00	-27.38	Average
10	3.11	17.32	37.85	10.26	10.27	73.00	-35.15	QP
11	17.66	33.28	53.10	9.71	10.11	60.00	-6.90	Average
12	17.66	42.18	62.00	9.71	10.11	73.00	-11.00	QP

AC 120V/60 Hz, Neutral

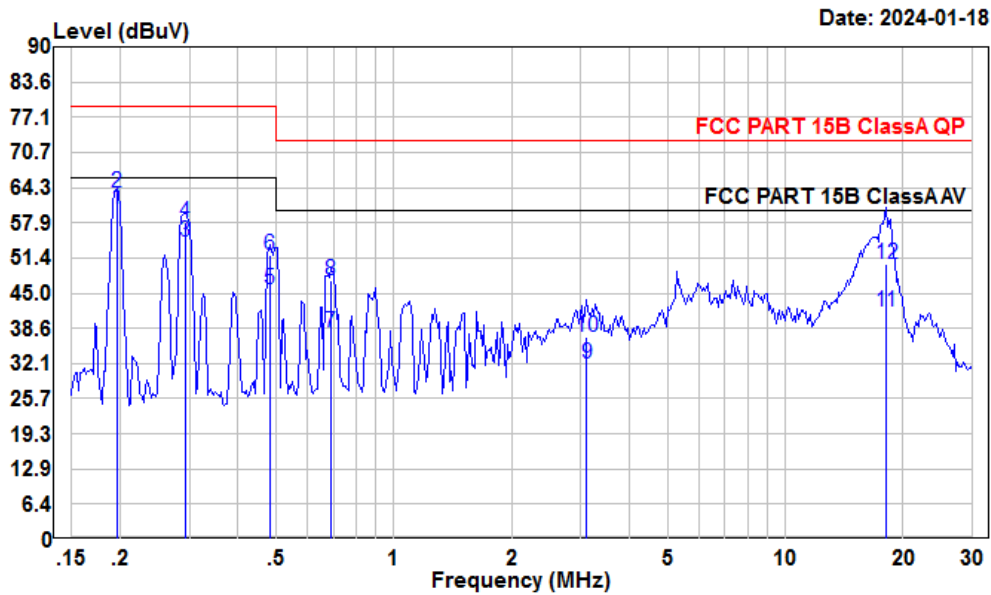


Condition: Neutral

Project : SZ1231219-76804E-EM

Test Mode: Data transmitting+ full load

Tester : Macy.shi

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.20	39.92	60.31	10.29	10.10	66.00	-5.69	Average
2	0.20	42.99	63.38	10.29	10.10	79.00	-15.62	QP
3	0.29	33.92	54.31	10.26	10.13	66.00	-11.69	Average
4	0.29	37.57	57.96	10.26	10.13	79.00	-21.04	QP
5	0.48	25.30	45.66	10.20	10.16	66.00	-20.34	Average
6	0.48	31.59	51.95	10.20	10.16	79.00	-27.05	QP
7	0.69	17.24	37.75	10.30	10.21	60.00	-22.25	Average
8	0.69	26.81	47.32	10.30	10.21	73.00	-25.68	QP
9	3.11	11.44	31.98	10.27	10.27	60.00	-28.02	Average
10	3.11	16.50	37.04	10.27	10.27	73.00	-35.96	QP
11	18.04	21.69	41.63	9.83	10.11	60.00	-18.37	Average
12	18.04	30.30	50.24	9.83	10.11	73.00	-22.76	QP

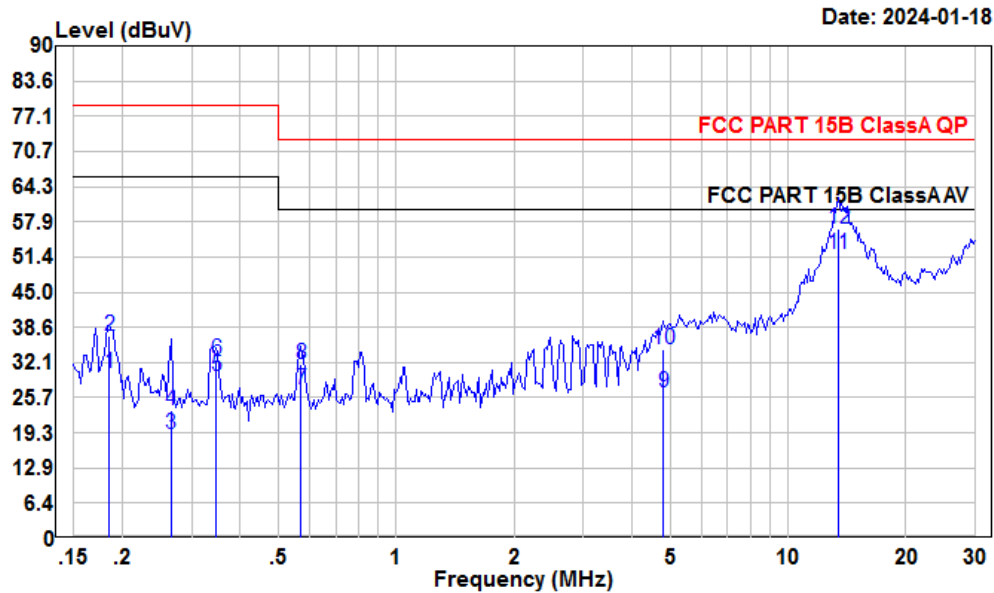*For Build-in power 2 (R0150)***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1231219-76804E-EM

Test Mode: Data transmitting+ full load

Tester : Macy.shi

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.19	9.98	30.30	10.20	10.12	66.00	-35.70	Average
2	0.19	16.67	36.99	10.20	10.12	79.00	-42.01	QP
3	0.27	-1.20	19.18	10.20	10.18	66.00	-46.82	Average
4	0.27	2.97	23.35	10.20	10.18	79.00	-55.65	QP
5	0.35	9.18	29.54	10.20	10.16	66.00	-36.46	Average
6	0.35	12.19	32.55	10.20	10.16	79.00	-46.45	QP
7	0.57	6.74	27.22	10.28	10.20	60.00	-32.78	Average
8	0.57	11.30	31.78	10.28	10.20	73.00	-41.22	QP
9	4.80	6.07	26.54	10.24	10.23	60.00	-33.46	Average
10	4.80	14.20	34.67	10.24	10.23	73.00	-38.33	QP
11	13.41	31.88	51.82	9.79	10.15	60.00	-8.18	Average
12	13.41	36.64	56.58	9.79	10.15	73.00	-16.42	QP

AC 120V/60 Hz, Neutral

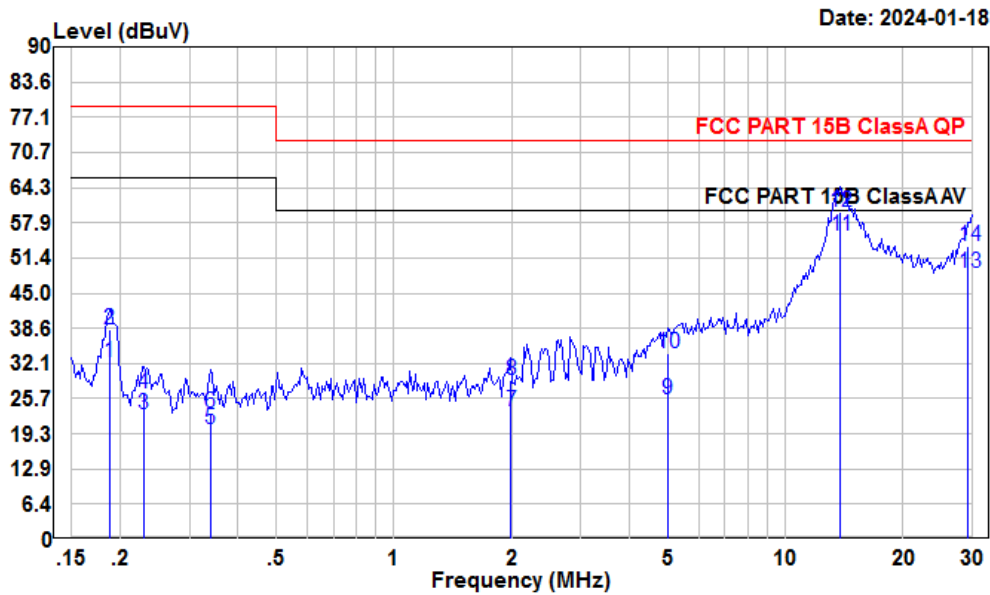

Condition: Neutral

Project : SZ1231219-76804E-EM

Test Mode: Data transmitting+ full load

Tester : Macy.shi

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.19	12.00	32.40	10.28	10.12	66.00	-33.60	Average
2	0.19	18.04	38.44	10.28	10.12	79.00	-40.56	QP
3	0.23	2.38	22.83	10.29	10.16	66.00	-43.17	Average
4	0.23	6.17	26.62	10.29	10.16	79.00	-52.38	QP
5	0.34	-0.38	20.01	10.24	10.15	66.00	-45.99	Average
6	0.34	2.60	22.99	10.24	10.15	79.00	-56.01	QP
7	1.99	2.90	23.49	10.40	10.19	60.00	-36.51	Average
8	1.99	8.42	29.01	10.40	10.19	73.00	-43.99	QP
9	5.01	5.04	25.46	10.20	10.22	60.00	-34.54	Average
10	5.01	13.46	33.88	10.20	10.22	73.00	-39.12	QP
11	13.84	35.55	55.51	9.82	10.14	60.00	-4.49	Average
12	13.84	39.82	59.78	9.82	10.14	73.00	-13.22	QP
13	29.37	28.99	48.68	9.43	10.26	60.00	-11.32	Average
14	29.37	33.99	53.68	9.43	10.26	73.00	-19.32	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup


Below 1GHz for Radiated Emissions

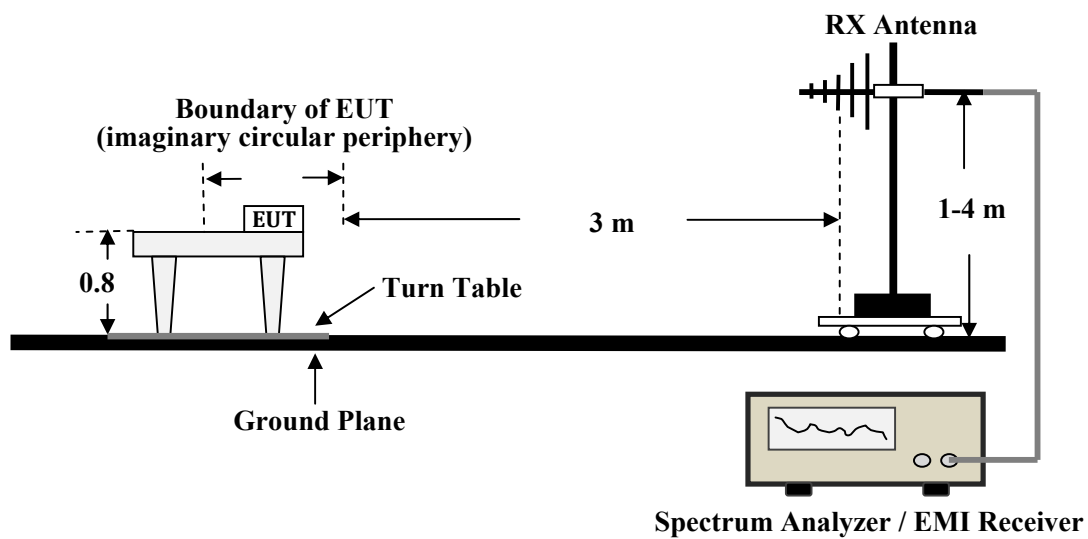

Above 1GHz for Radiated Emissions

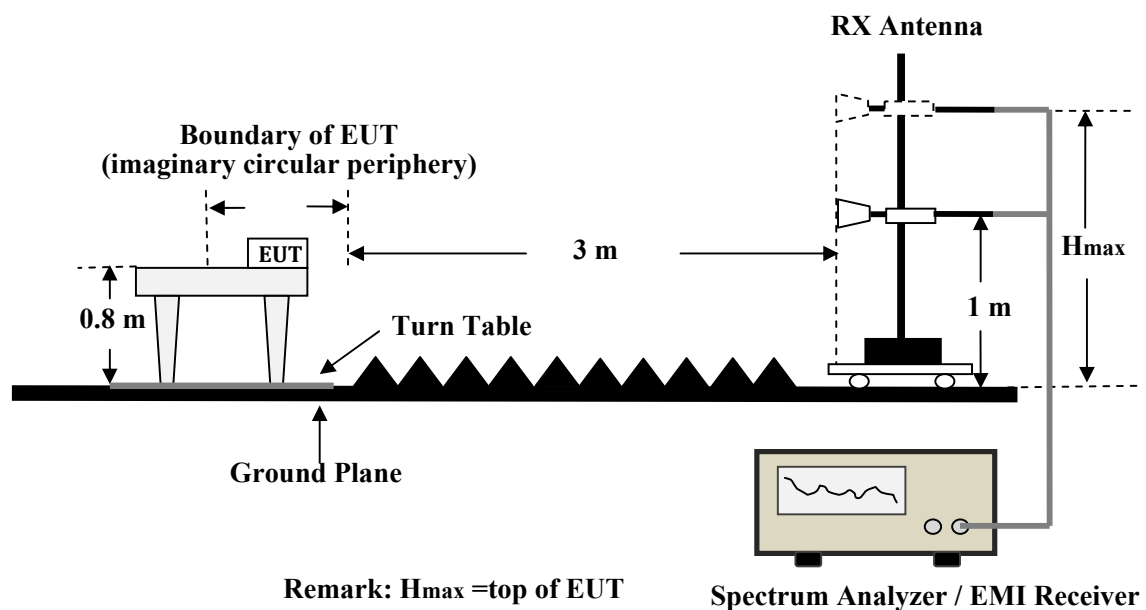

Radiated Emissions Setup Configuration

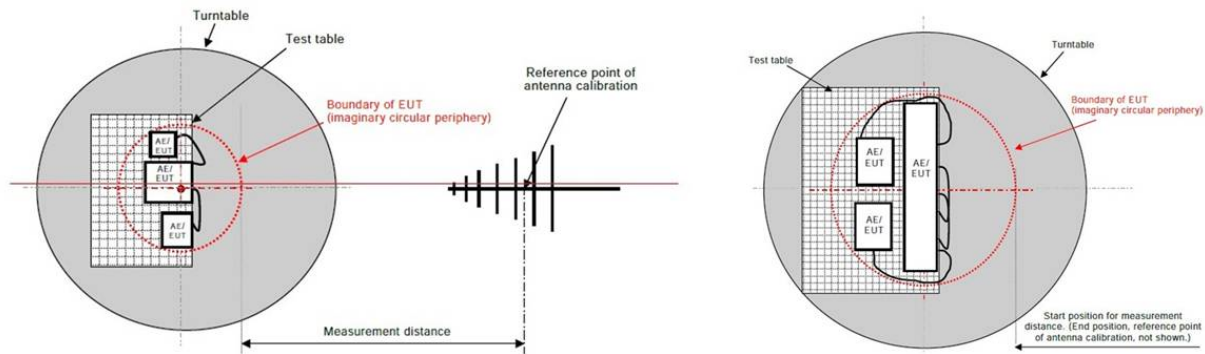

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class A. The equation for Over Limit calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions

Temperature:	25~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0~101.2 kPa


The testing was performed by Warren Huang on 2024-01-18 for below 1GHz and Dylan Yang on 2024-01-18 for above 1GHz.

Test Mode: Data transmitting+ full load

30 MHz~1 GHz

For Build-in power 1 (D1602-F420S54-A)


Horizontal

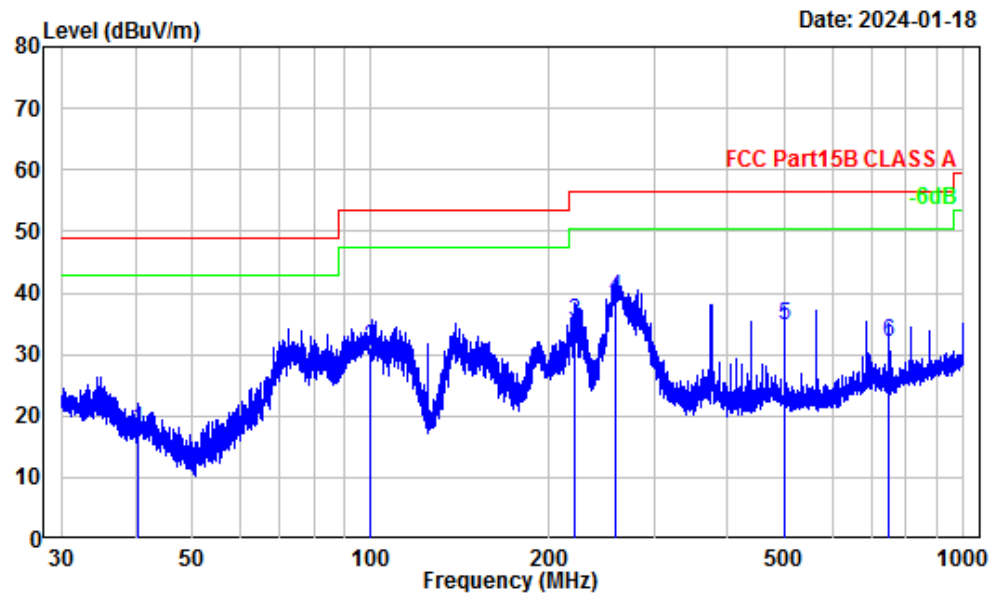

Site : chamber
Condition : 3m Horizontal
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Warren.huang

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.36	-10.62	28.56	17.94	49.00	-31.06	QP
2	99.92	-13.75	44.83	31.08	53.50	-22.42	QP
3	220.42	-11.37	46.56	35.19	56.40	-21.21	QP
4	259.23	-11.50	50.76	39.26	56.40	-17.14	QP
5	500.08	-5.05	39.88	34.83	56.40	-21.57	QP
6	750.11	-1.67	33.54	31.87	56.40	-24.53	QP

Vertical

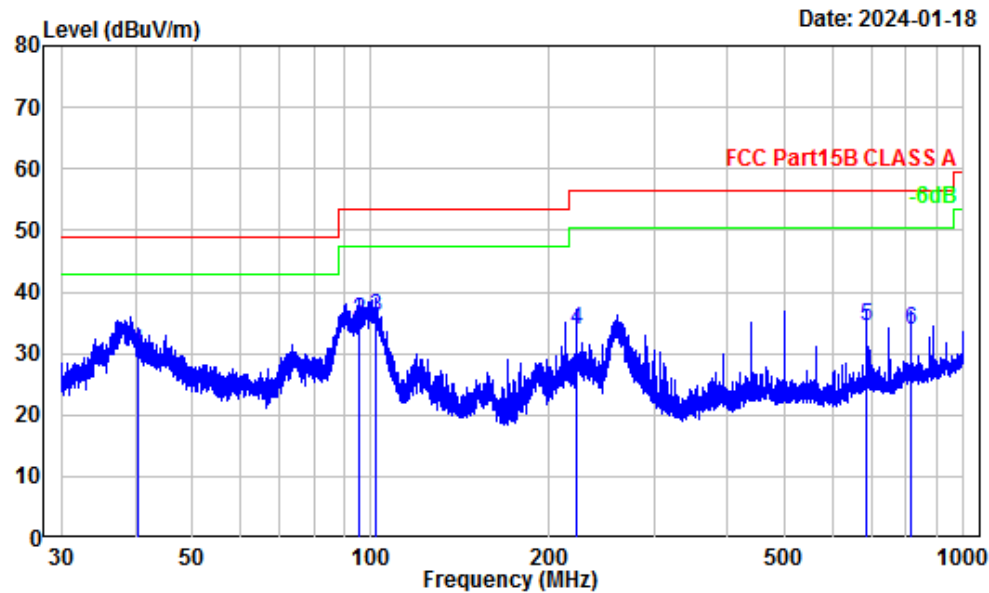


Site : chamber
Condition : 3m Vertical
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Warren.huang

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.29	-12.05	42.26	30.21	49.00	-18.79	QP
2	95.55	-16.18	51.53	35.35	53.50	-18.15	QP
3	101.60	-14.77	50.69	35.92	53.50	-17.58	QP
4	222.17	-12.24	46.17	33.93	56.40	-22.47	QP
5	687.75	-2.14	36.42	34.28	56.40	-22.12	QP
6	812.76	-0.51	34.27	33.76	56.40	-22.64	QP

1~2 GHz


Horizontal

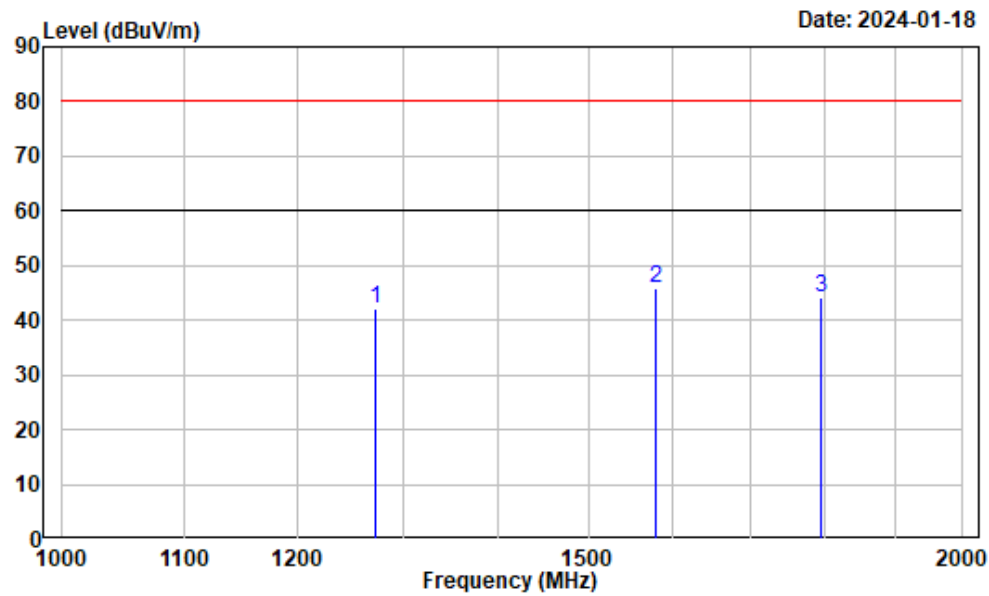

Site : chamber
Condition : Horizontal
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Dylan.yang

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1273.125	-7.46	49.45	41.99	80.00	-38.01	Peak
2	1579.375	-7.11	52.90	45.79	80.00	-34.21	Peak
3	1794.375	-6.38	50.58	44.20	80.00	-35.80	Peak

Vertical

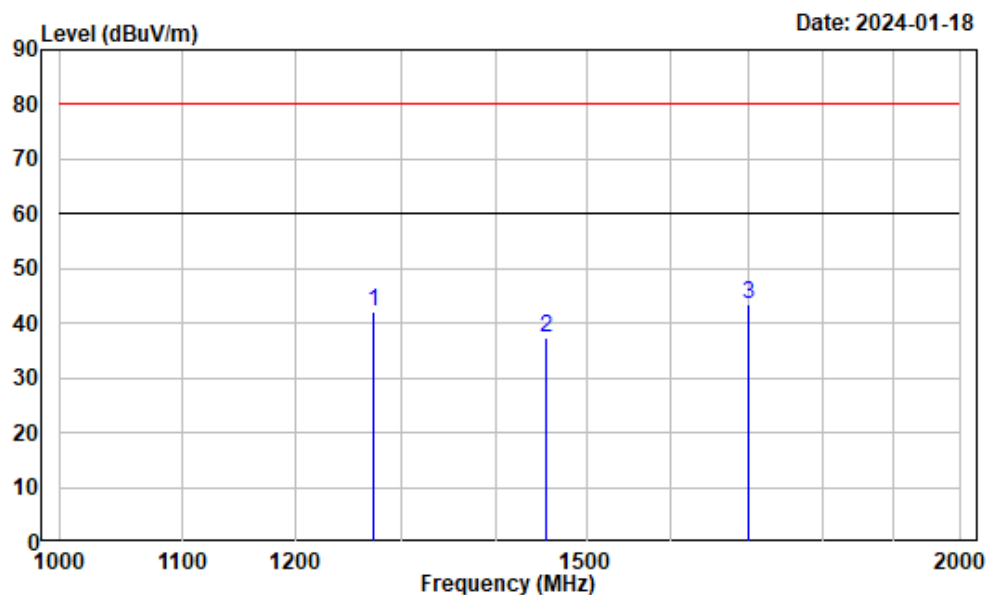


Site : chamber
Condition : Vertical
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Dylan.yang

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1273.125	-7.46	49.45	41.99	80.00	-38.01	Peak
2	1453.750	-7.03	44.40	37.37	80.00	-42.63	Peak
3	1698.750	-6.63	50.06	43.43	80.00	-36.57	Peak

For Build-in power 2 (R0150)


Horizontal

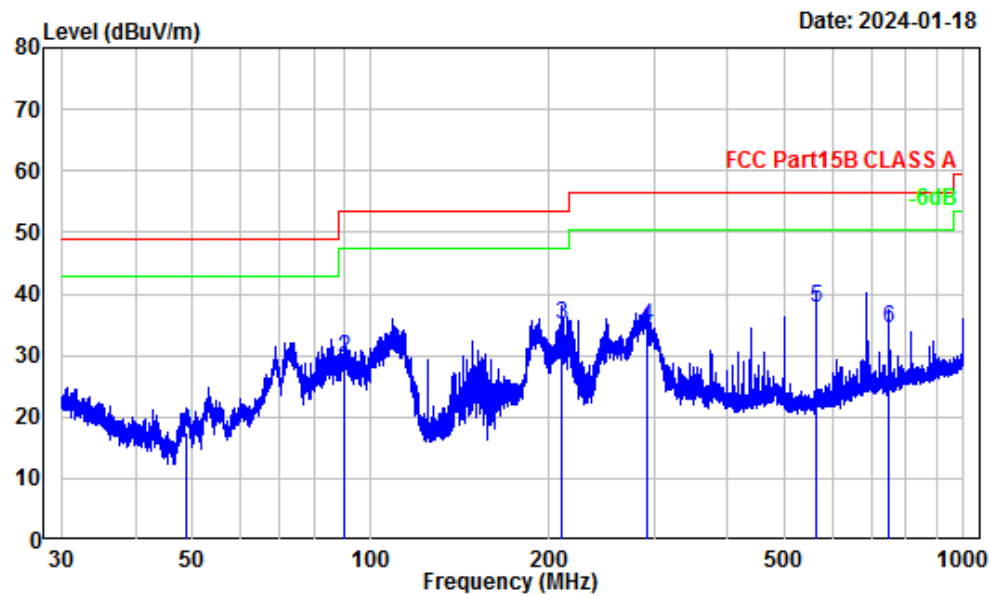

Site : chamber
Condition : 3m Horizontal
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Warren.huang

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	48.91	-15.99	33.48	17.49	49.00	-31.51	QP
2	90.30	-16.48	46.01	29.53	53.50	-23.97	QP
3	210.05	-11.19	46.15	34.96	53.50	-18.54	QP
4	292.31	-10.25	44.96	34.71	56.40	-21.69	QP
5	562.66	-4.55	42.17	37.62	56.40	-18.78	QP
6	750.11	-1.67	36.08	34.41	56.40	-21.99	QP

Vertical

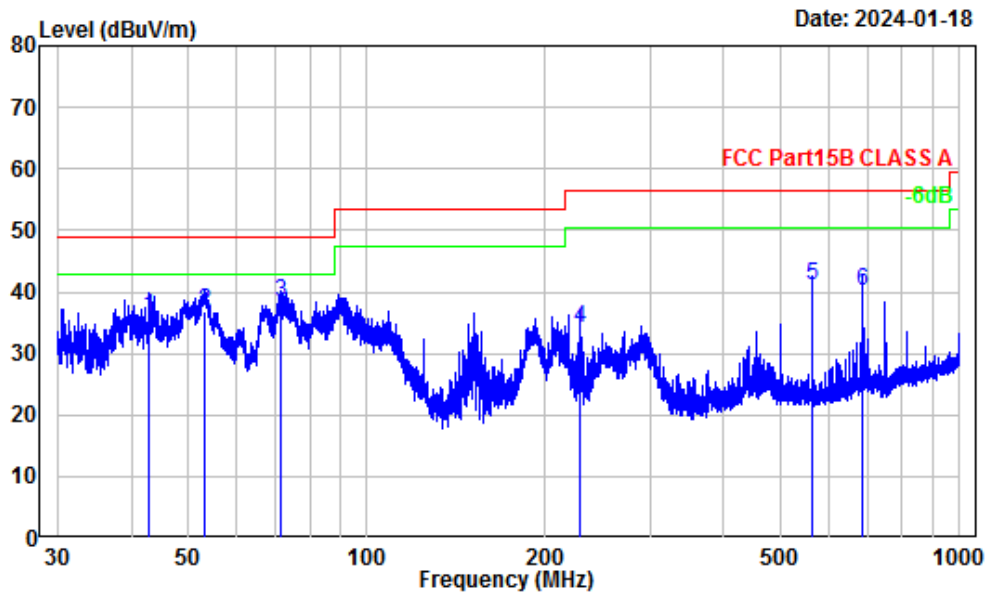


Site : chamber
Condition : 3m Vertical
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Warren.huang

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.88	-13.52	49.40	35.88	49.00	-13.12	QP
2	53.34	-17.51	54.46	36.95	49.00	-12.05	QP
3	71.61	-17.29	55.60	38.31	49.00	-10.69	QP
4	228.09	-12.24	46.30	34.06	56.40	-22.34	QP
5	562.66	-4.77	45.80	41.03	56.40	-15.37	QP
6	687.75	-2.14	42.24	40.10	56.40	-16.30	QP

1~2 GHz


Horizontal

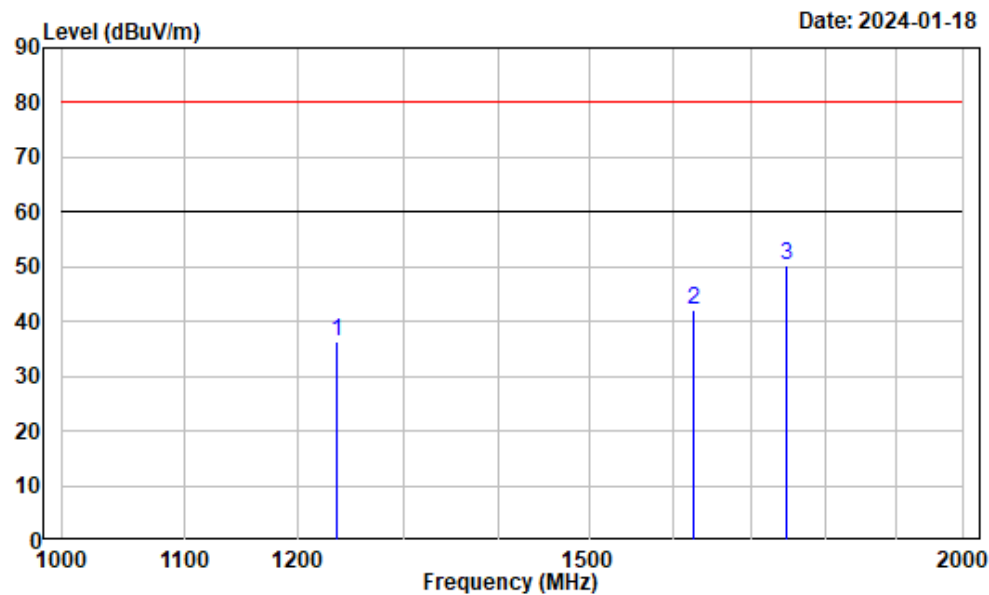

Site : chamber
Condition : Horizontal
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Dylan.yang

	Freq	Factor	Read		Limit	Remark	Over
			Level	Level	Line		Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	1236.250	-7.69	44.08	36.39	80.00	Peak	-43.61
2	1625.000	-7.00	49.02	42.02	80.00	Peak	-37.98
3	1746.250	-6.55	56.80	50.25	80.00	Peak	-29.75

Vertical

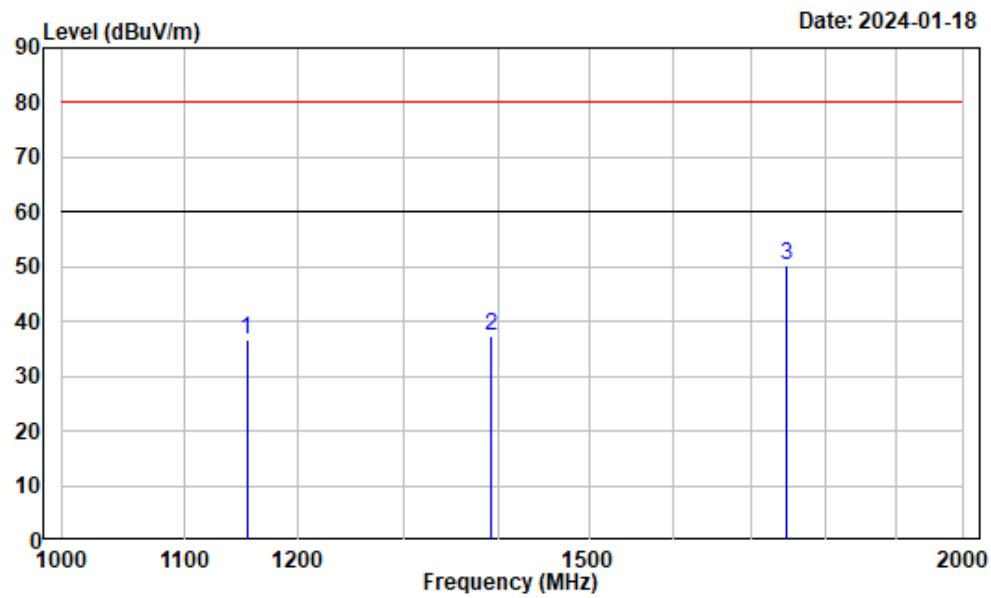

Site : chamber
Condition : Vertical
Project Number: SZ1231219-76804E-EM
Test Mode : Data transmitting+ full load
Tester : Dylan.yang

		Read		Limit	Remark	Over
Freq	Factor	Level	Level	Line		Limit
MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	1153.125	-8.22	44.89	36.67	80.00 Peak	-43.33
2	1390.625	-7.02	44.41	37.39	80.00 Peak	-42.61
3	1746.250	-6.55	56.80	50.25	80.00 Peak	-29.75

EUT PHOTOGRAPHS

Please refer to the attachment SZ1231219-76804E-EM External photo and SZ1231219-76804E-EM Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1231219-76804E-EM Test Setup photo.

******* END OF REPORT *******