



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: Shenzhen Creality 3D Technology Co.,LTD

Product Name: WIFI Antenna

Product Model:

Part Number: LJF02-24021808-R0A

Write By : Huxuwen

Issued Date: 2024-02-18

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2024/02/18	
V1.1	Support WIFI 5G data	2024/05/11	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	8

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	>40%
Impedance	50Ohm
Polarization	Linear
Gain	≤2.39dB
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(Black),LJWF29A
Cable Type	Φ1.13mm,L300mm,gray
Connector Type	IPX1
Dimension	43.0*11.5mm
C. Environmental	
Operation Temperature	- 30 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- | | |
|----------------------------------|---------------------|
| 1.Network Analyzers | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT |
| 3.Communications Test Set | Agilent 8960 |
| 4.3D Chamber Test System | |

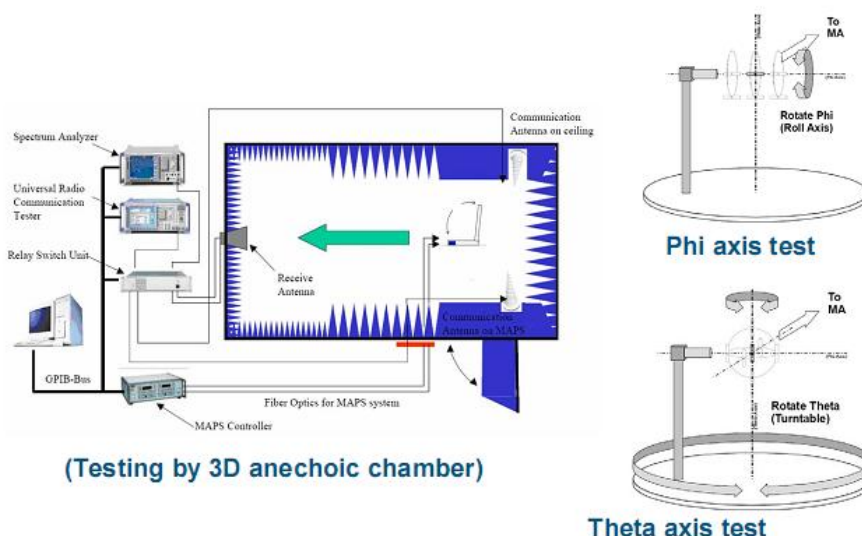


图 1 Test topology

5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

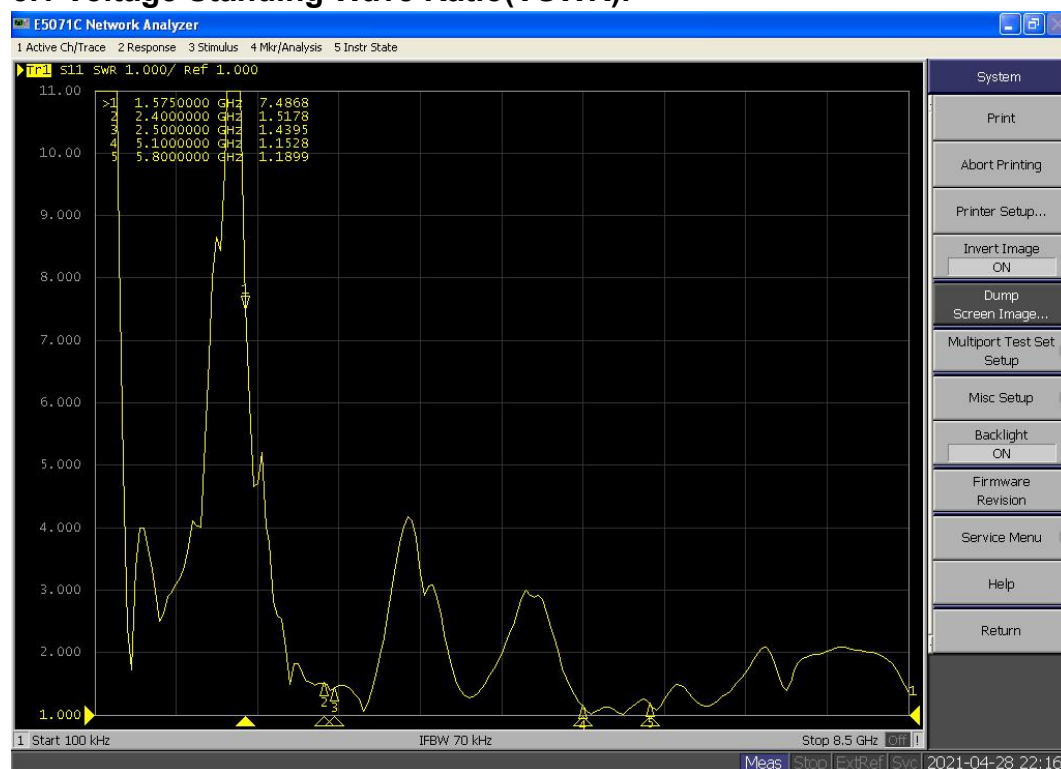



图 2 VSWR


5.2 Efficient and gain(estimating conducted by Lejin in Jan,2021,using 3D drawing document that provided by Crealty.)

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi(%)	58.62	51.84	56.47	55.07	54.54	53.06	51.80	52.38	53.21	52.77	50.64
	Gain(dBi)	1.96	1.87	1.74	1.67	1.94	1.40	1.72	1.89	1.90	1.37	0.96

Passive	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Test WIFI 5G	Effi(%)	53.64	53.19	50.30	52.06	54.00	51.62	51.36	53.09	52.82	51.62	51.30	51.70	52.90	52.86	50.46
	Gain(dBi)	4.09	3.75	3.52	3.85	3.95	3.18	3.75	3.82	3.83	3.62	3.55	3.90	4.09	4.55	4.46

5.3 Radiation pattern.

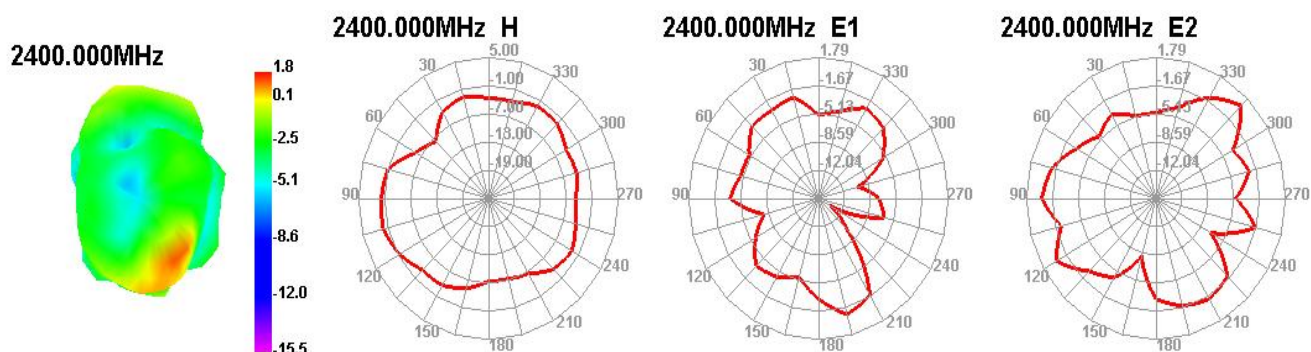

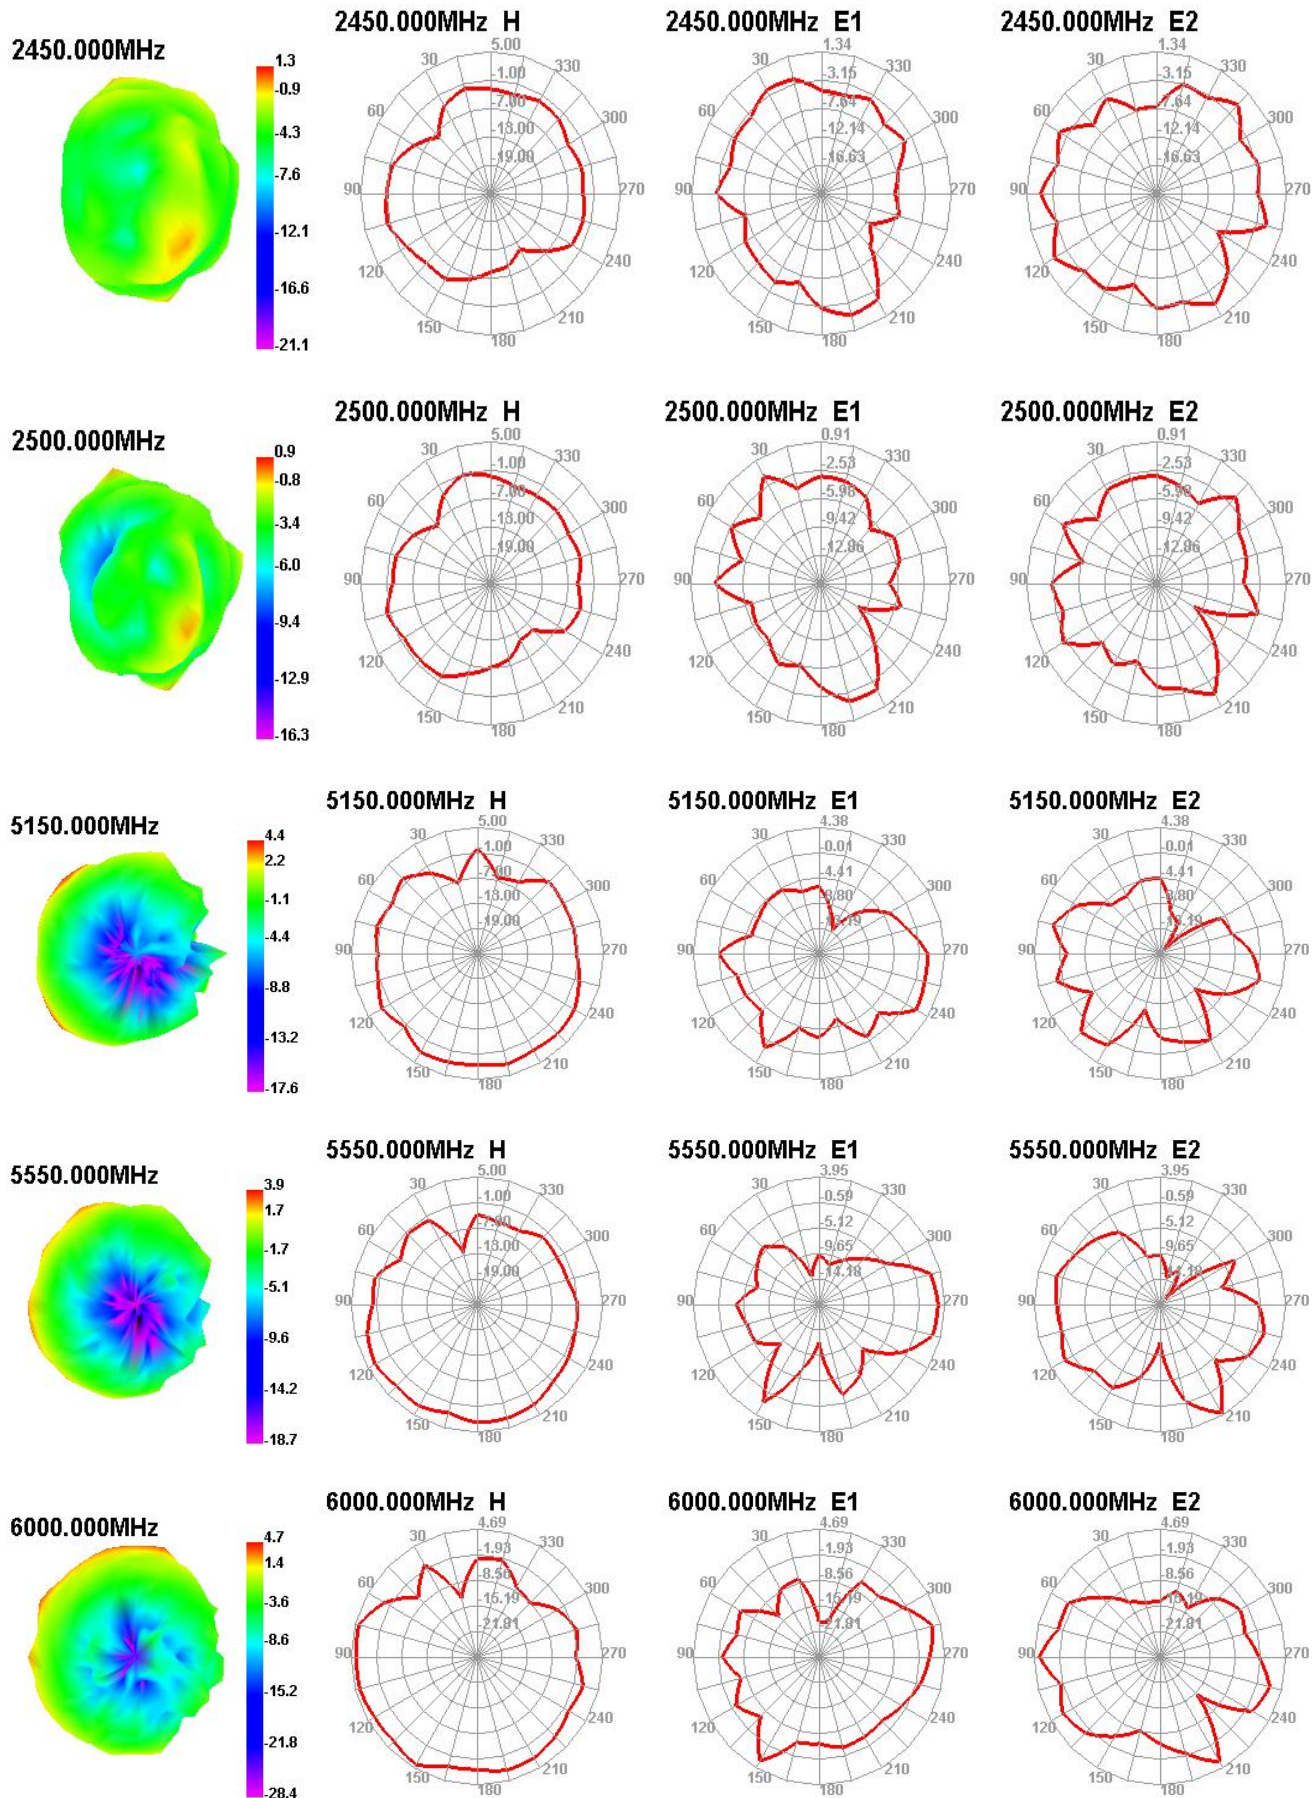




6. Reliability Test





Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type(omitted)

8. Product Drawing



背胶手撕位

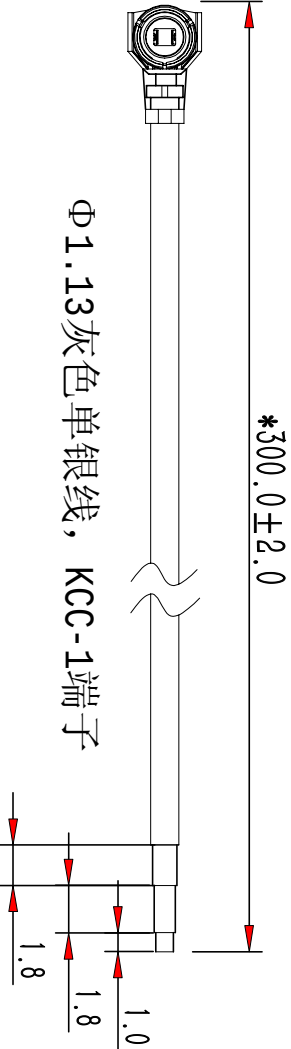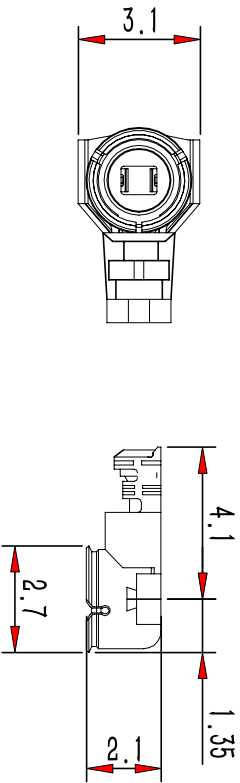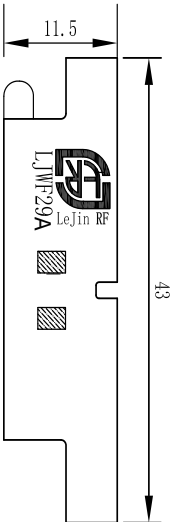

Remark:





- 1.FPC material:Electrolytic copper.
- 2.Backing in behind:3M300LSE.
- 3.Tolerance: Cutting die:±0.1mm;Circuit on FPC:±0.05mm； others are ±0.05mm.
- 4.ROHS:(Pb,Hg,Cr+6,PBBs,PBDEs),<1000ppm; Cd,<100ppm.

 SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

D		5		6		7		8	
Rev	A	New drawing	Description	Date	Remark	Location		Treatment	
						0~10		Third Angle	
						±0.05		0.02	
						10~18		±0.10	
						±0.10		0.03	
Rev	A	New drawing	Description	Date	Remark	18~30		±0.12	
						±0.12		0.02	
						30~40		±0.15	
						±0.15		0.04	
						40~		±0.20	
Rev	A	New drawing	Description	Date	Remark	Angle		±0.5°	
						Treatment		LJF02-24021808-R0A	
						Unit		mm	
						Scale		FIT	
						Rev		A	



背胶手撕位

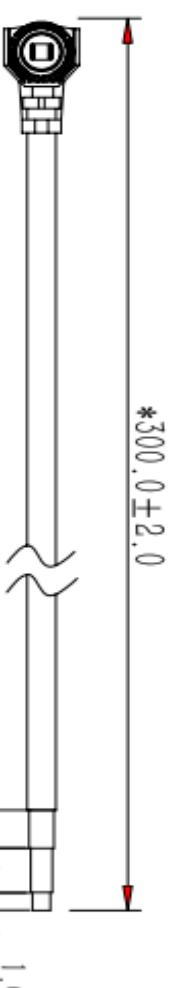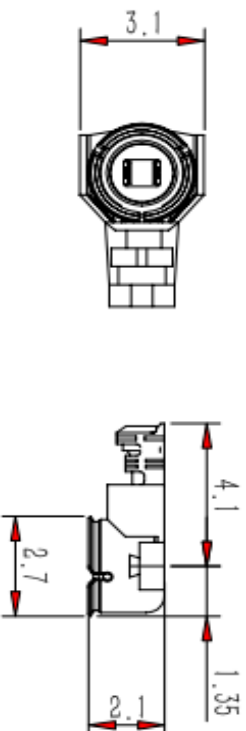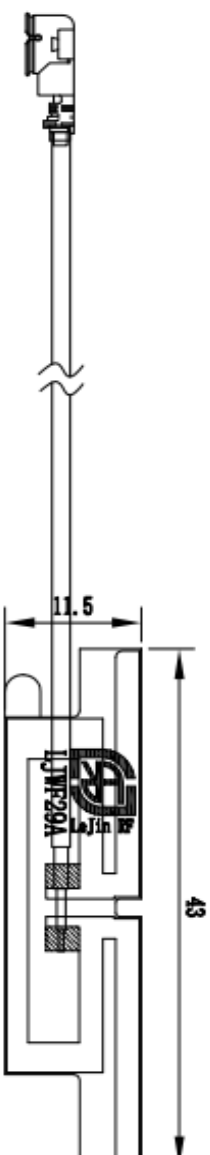

Φ1.13灰色单银线, KCC-1端子

Remark:

- 1.FPC material:Electrolytic copper.
- 2.Backing in behind:3M300LSE.
- 3.Tolerance: Cutting die:±0.1mm;Circuit on FPC:±0.05mm; others are ±0.05mm.
- 4.ROHS:(Pb,Hg,Cr+6,PBBs,PBDEs),<1000ppm; Cd,<100ppm.



SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

Third Angle	Project	Creality 3D	Date	2018-08-09
0~10	±0.05	0.02	Part Name	
10~18	±0.10	0.03	Part No.	
18~30	±0.12	0.02	Material	
30~40	±0.15	0.04		
40~	±0.20	Angle ±0.5°		

A	New drawing								
---	-------------	--	--	--	--	--	--	--	--