

Technical specification


- Input voltage :3V(2x AAA)
- Transmitting frequency:433.92Mhz
- Transmitting power: 10 Milliwatt
- Operatingtemperature:-5°C~50 °C
- Transmssion distance:
outside: 200 meters
inside(between two walls):35 meters

Function instruction

WR08-15CHis 15-channel emitter . One number of screen means one control channel. Press "channel choose" button P1- (numberdescending) or P1+ (number increasing) to change the channel. On the analogy of this.loose finger when the screen shows the suitable channel that you select effective channel. If screen number show "o" that means all channels if effective (group controlstate).




Notice: Emitter couldn't be exposed to moisture and striked, so as not to affect life, When you use emitter, if found emission distance obviously short or less sensitive, please change another same new battery, Please have batteries for recycling. Caution: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.



Do not dispose of in general waste.
Please recycle batteries and damaged electrical products appropriately.

WR08-01CH WR08-15CH
Emitter specification A-03 September 2025

Type specification

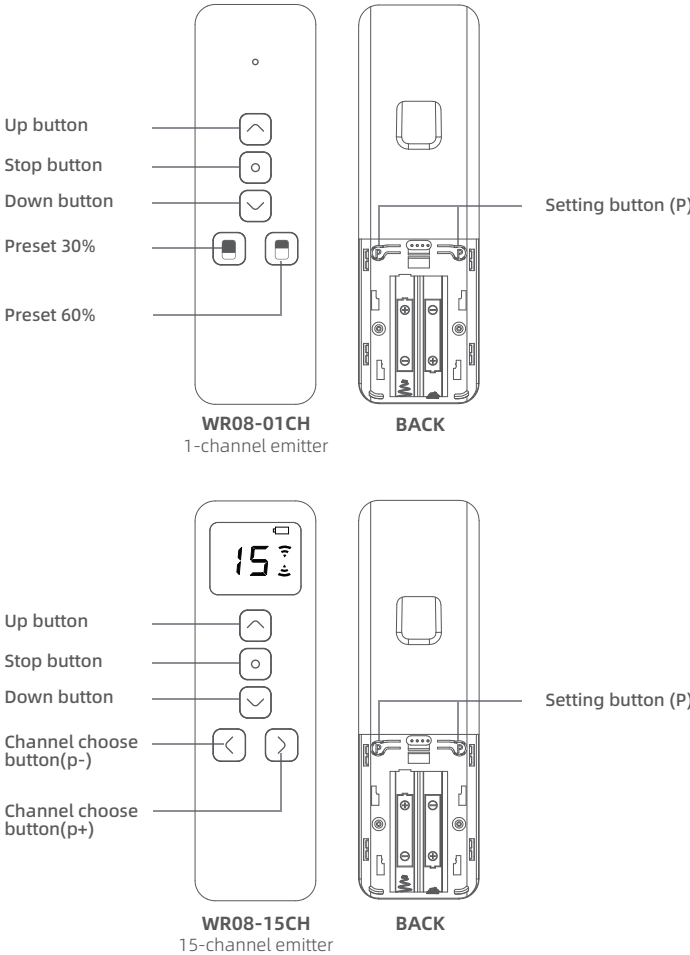


Type specification

WR08-01CH (1-Channel Remote)

Press & HOLD Programming button on motor head, the motor jog once.

Within 10 sec of activating pairing mode, Press & Hold STOP (2 sec), motor jog twice, pairing is successful!




WR08-15CH (15-Channel Remote)

Press the "P-" or "P+" button, select the channel to be paired in 1~15 (0 channel controls all channels at the same time, cannot be paired individually).

Press & HOLD Programming button on motor head, the motor jog once.

Within 10 sec of activating pairing mode, Press & Hold STOP (2 sec), motor jog twice, pairing is successful!

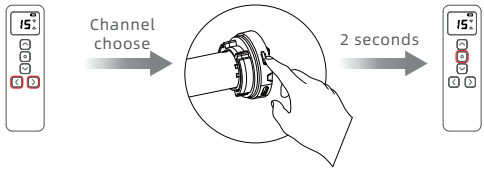


The valid channels selection

* Available for 15-channel remotes only. *

⚠ In the setting state, press the up or down button you can quit quickly, if you want to change the valid channels, reset it.


(P1+button+ P1-button)x1 Press P1+button and P1- button, at the same time, hold on Press P1+button or P1-button, selecting the channel(channel 1 to channel 15) you need

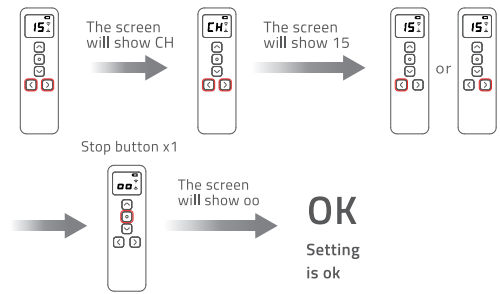

Combination button lock/unlock status

* Available for 15-channel remotes only. *

- ① Factory default is the combination button unlock status, repeated operation can be cycle switching.
- ② the combination button is locked, the combination button is invalid, and the combination button is pressed without sending code, and there is no icon display; in the unlock state, the combination button is pressed with an icon flashing indication.
- ③ The button is locked and only affects the emitter code.

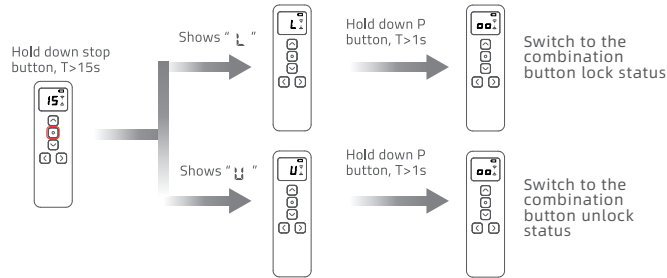

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

CE

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 20mm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna. This device in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test suites have been carried out.

1. CAUTION : RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS
2. The product shall only be connected to a USB interface of version USB 2.0
3. Adapter shall be installed near the equipment and shall be easily accessible.
4. The plug considered as disconnect device of adapter accessible.
5. The device complies with RF specifications when the device used at 20mm from your body