





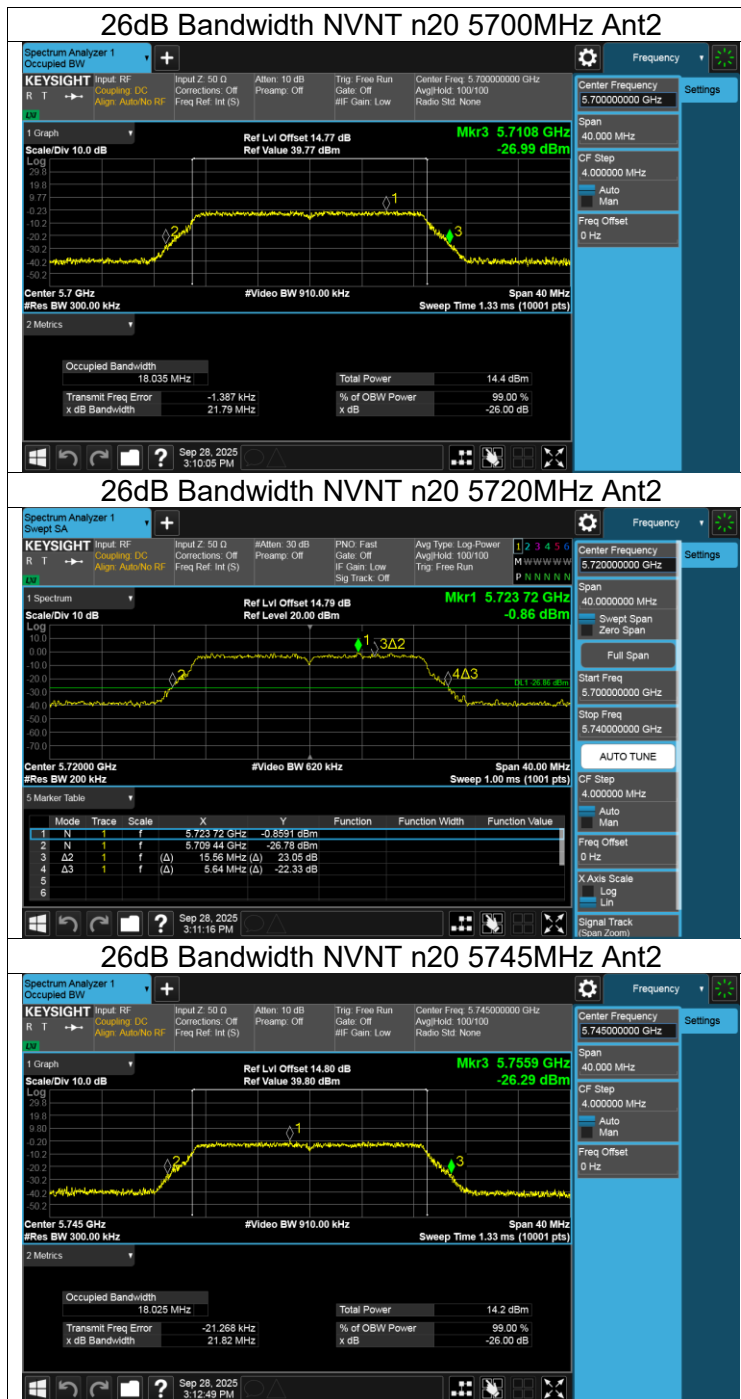


## Appendix D2: Occupied Channel Bandwidth


| Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|------|-----------------|---------|---------------|
| a    | 5180            | Ant2    | 16.672        |
| a    | 5200            | Ant2    | 16.652        |
| a    | 5240            | Ant2    | 16.688        |
| a    | 5260            | Ant2    | 16.653        |
| a    | 5280            | Ant2    | 16.666        |
| a    | 5320            | Ant2    | 16.673        |
| a    | 5500            | Ant2    | 16.694        |
| a    | 5580            | Ant2    | 16.688        |
| a    | 5700            | Ant2    | 16.671        |
| a    | 5720 Low        | Ant2    | 13.344        |
| a    | 5720 High       | Ant2    | 3.344         |
| a    | 5745            | Ant2    | 16.69         |
| a    | 5785            | Ant2    | 16.707        |
| a    | 5825            | Ant2    | 16.703        |
| n20  | 5180            | Ant2    | 17.829        |
| n20  | 5200            | Ant2    | 17.793        |
| n20  | 5240            | Ant2    | 17.802        |
| n20  | 5260            | Ant2    | 17.811        |
| n20  | 5280            | Ant2    | 17.804        |
| n20  | 5320            | Ant2    | 17.845        |
| n20  | 5500            | Ant2    | 17.789        |
| n20  | 5580            | Ant2    | 17.854        |
| n20  | 5700            | Ant2    | 17.814        |
| n20  | 5720 Low        | Ant2    | 13.925        |
| n20  | 5720 High       | Ant2    | 3.925         |
| n20  | 5745            | Ant2    | 17.839        |
| n20  | 5785            | Ant2    | 17.822        |
| n20  | 5825            | Ant2    | 17.819        |

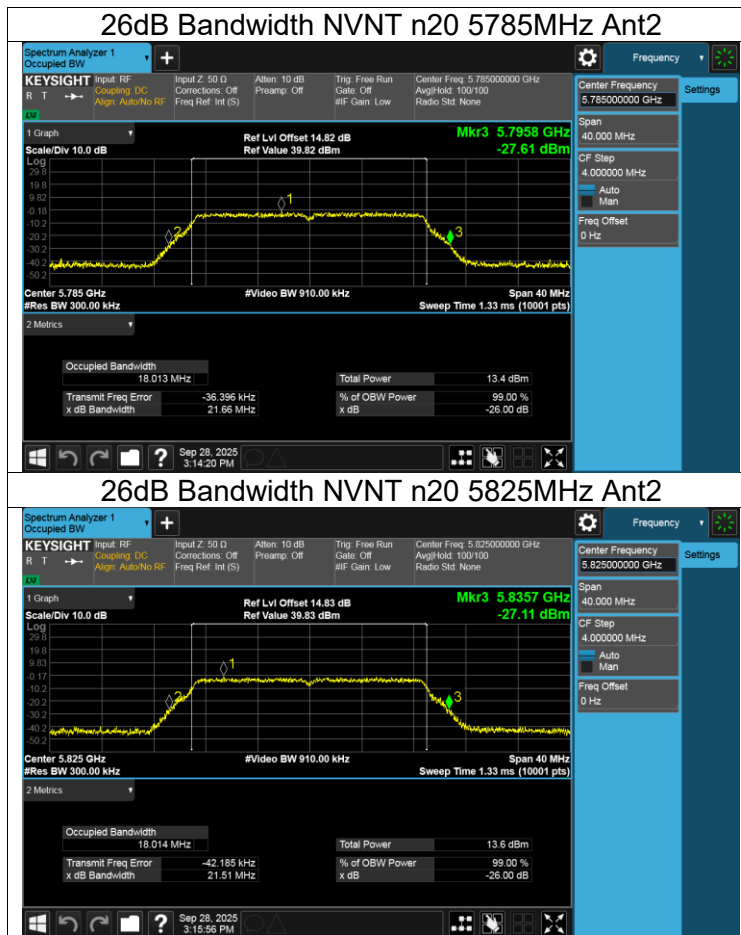

### OBW NVNT a 5260MHz Ant2

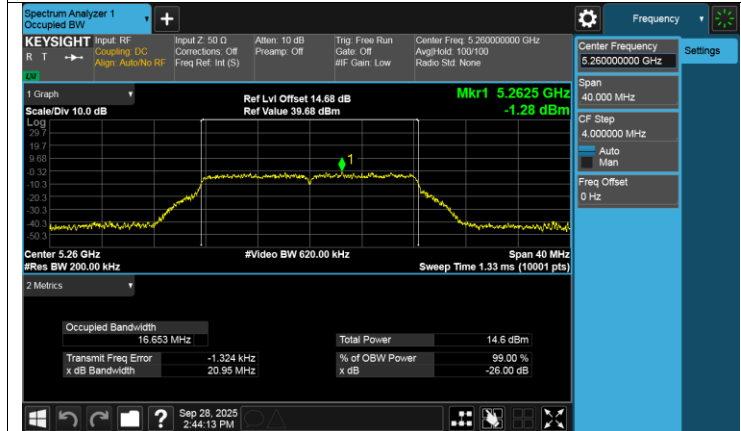

### OBW NVNT a 5280MHz Ant2

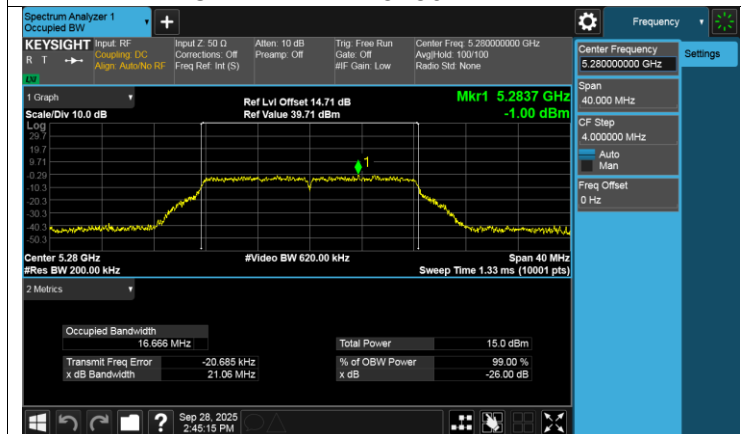

### OBW NVNT a 5320MHz Ant2


















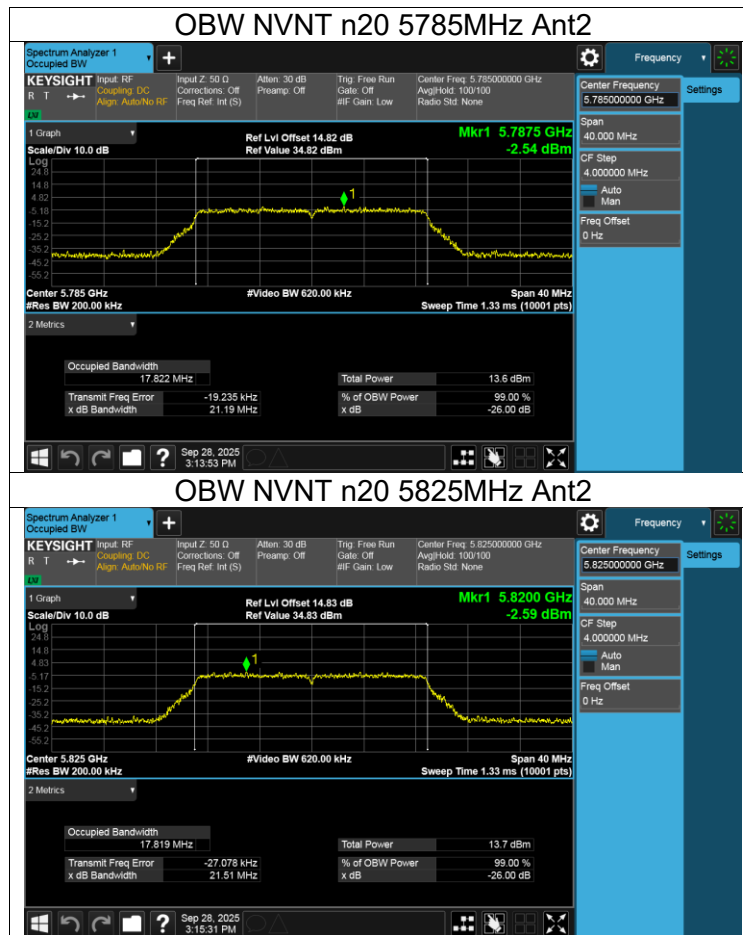


## Appendix E2: 6dB Bandwidth

| Mode | Frequency (MHz) | Antenna | 6dB Bandwidth (MHz) | Limit 6dB Bandwidth (MHz) | Verdict |
|------|-----------------|---------|---------------------|---------------------------|---------|
| a    | 5720            | Ant2    | 3.04                | $\geq 0.5$                | Pass    |
| a    | 5745            | Ant2    | 16.344              | $\geq 0.5$                | Pass    |
| a    | 5785            | Ant2    | 16.376              | $\geq 0.5$                | Pass    |
| a    | 5825            | Ant2    | 16.344              | $\geq 0.5$                | Pass    |
| n20  | 5720            | Ant2    | 3.28                | $\geq 0.5$                | Pass    |
| n20  | 5745            | Ant2    | 17.547              | $\geq 0.5$                | Pass    |
| n20  | 5785            | Ant2    | 17.581              | $\geq 0.5$                | Pass    |
| n20  | 5825            | Ant2    | 17.577              | $\geq 0.5$                | Pass    |

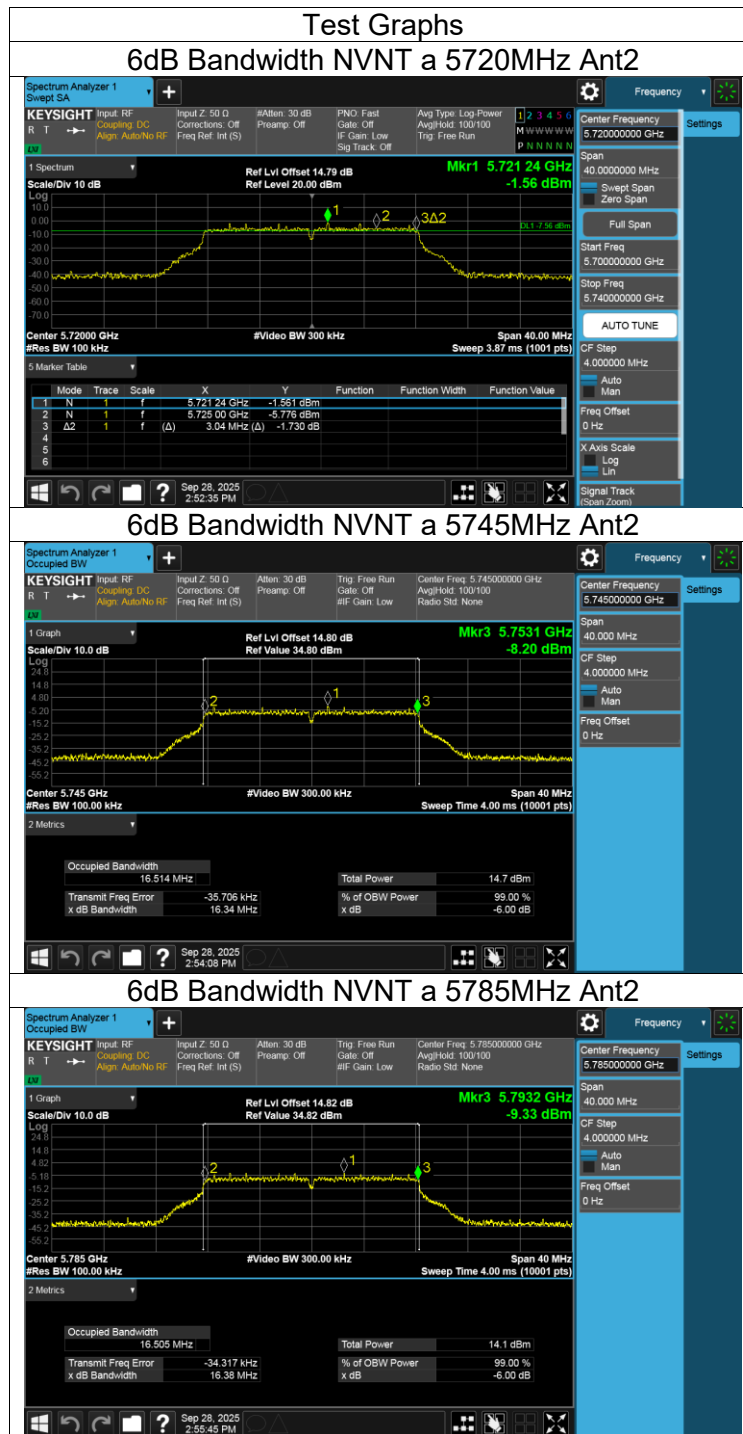

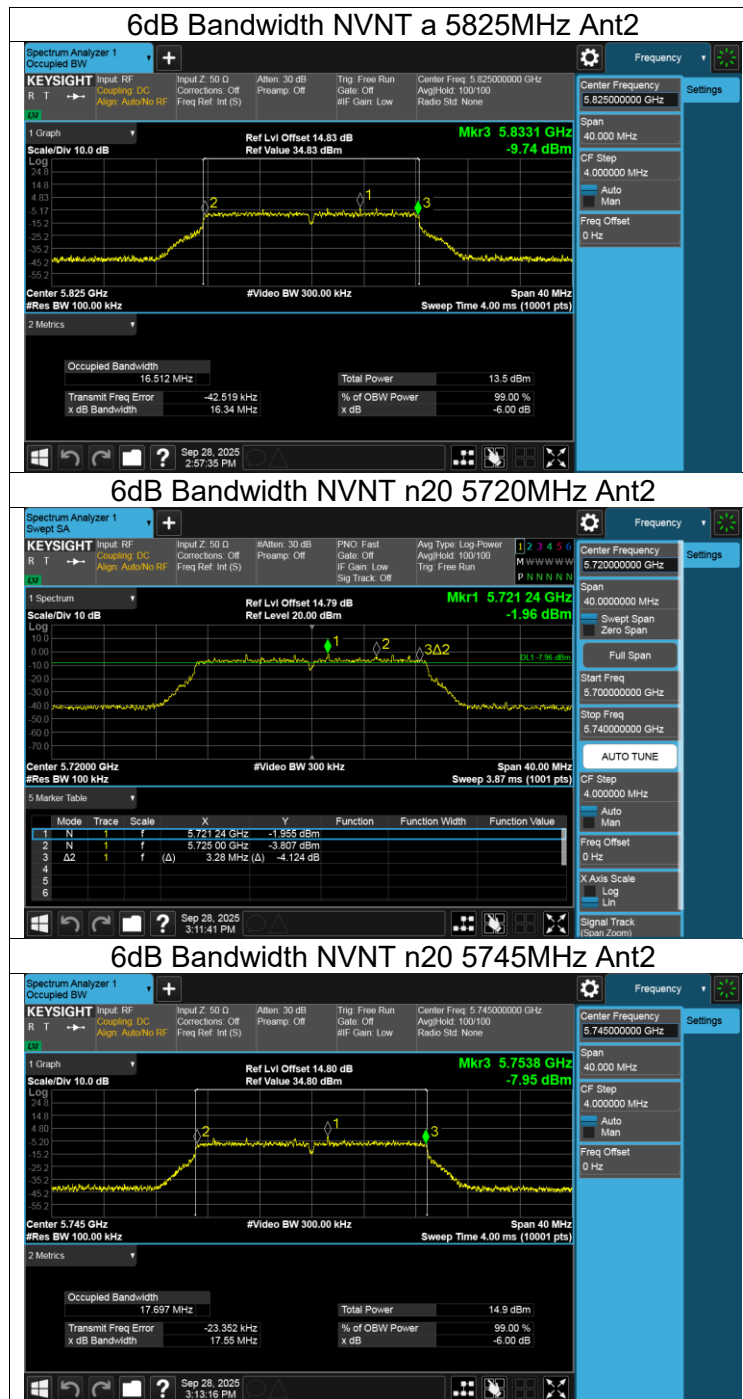


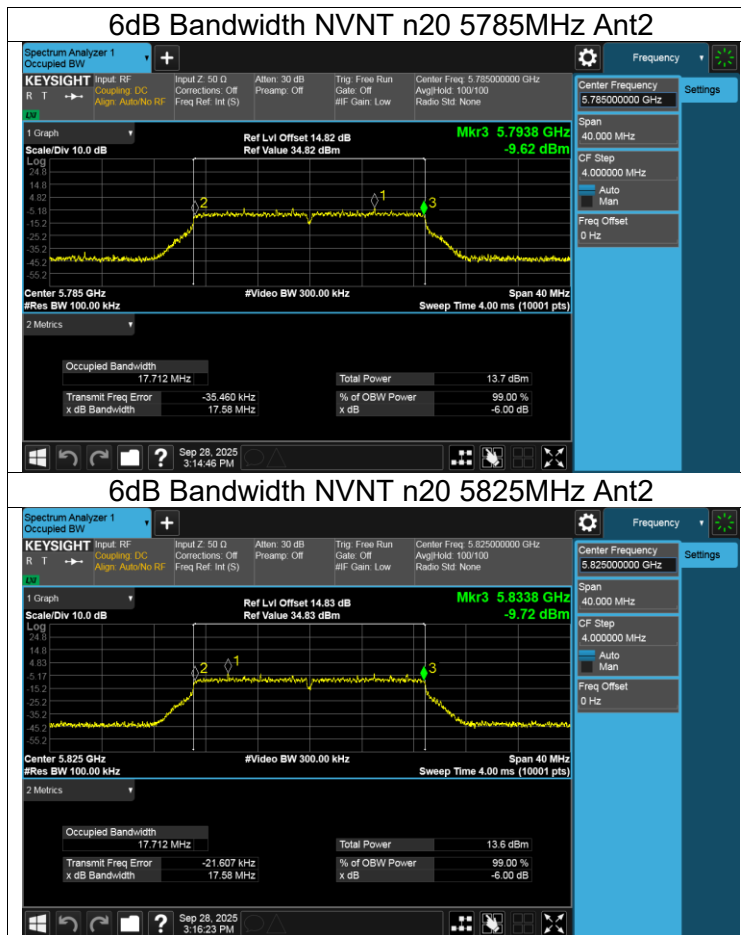


## Appendix F2: Maximum Power Spectral Density Level


| Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| a    | 5180            | Ant2    | 1.93                | 0.31             | 2.24            | 10.9        | Pass    |
| a    | 5200            | Ant2    | 1.85                | 0.31             | 2.16            | 10.9        | Pass    |
| a    | 5240            | Ant2    | 2.13                | 0.31             | 2.44            | 10.9        | Pass    |
| a    | 5260            | Ant2    | 4.26                | 0.31             | 4.57            | 10.9        | Pass    |
| a    | 5280            | Ant2    | 4.39                | 0.31             | 4.7             | 10.9        | Pass    |
| a    | 5320            | Ant2    | 4.88                | 0.31             | 5.19            | 10.9        | Pass    |
| a    | 5500            | Ant2    | 2.2                 | 0.31             | 2.51            | 10.9        | Pass    |
| a    | 5580            | Ant2    | 3.29                | 0.31             | 3.6             | 10.9        | Pass    |
| a    | 5700            | Ant2    | 2.99                | 0.31             | 3.3             | 10.9        | Pass    |
| a    | 5720 Low        | Ant2    | 2.48                | 0.31             | 2.79            | 10.9        | Pass    |
| a    | 5720 High       | Ant2    | -0.39               | 0.31             | -0.08           | 29.9        | Pass    |
| a    | 5745            | Ant2    | 0.87                | 0.31             | 1.18            | 29.9        | Pass    |
| a    | 5785            | Ant2    | 0.61                | 0.31             | 0.92            | 29.9        | Pass    |
| a    | 5825            | Ant2    | 0.84                | 0.31             | 1.15            | 29.9        | Pass    |
| n20  | 5180            | Ant2    | -0.07               | 0.33             | 0.26            | 10.9        | Pass    |
| n20  | 5200            | Ant2    | 0.02                | 0.33             | 0.35            | 10.9        | Pass    |
| n20  | 5240            | Ant2    | 1                   | 0.33             | 1.33            | 10.9        | Pass    |
| n20  | 5260            | Ant2    | 2.76                | 0.33             | 3.09            | 10.9        | Pass    |
| n20  | 5280            | Ant2    | 2.87                | 0.33             | 3.2             | 10.9        | Pass    |
| n20  | 5320            | Ant2    | 3.47                | 0.33             | 3.8             | 10.9        | Pass    |
| n20  | 5500            | Ant2    | 0.61                | 0.33             | 0.94            | 10.9        | Pass    |
| n20  | 5580            | Ant2    | 2.19                | 0.33             | 2.52            | 10.9        | Pass    |
| n20  | 5700            | Ant2    | 1.71                | 0.33             | 2.04            | 10.9        | Pass    |
| n20  | 5720 Low        | Ant2    | 1.37                | 0.33             | 1.7             | 10.9        | Pass    |
| n20  | 5720 High       | Ant2    | -1.29               | 0.33             | -0.96           | 29.9        | Pass    |
| n20  | 5745            | Ant2    | 0.47                | 0.33             | 0.8             | 29.9        | Pass    |
| n20  | 5785            | Ant2    | 0.31                | 0.33             | 0.64            | 29.9        | Pass    |
| n20  | 5825            | Ant2    | 0.38                | 0.33             | 0.71            | 29.9        | Pass    |

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

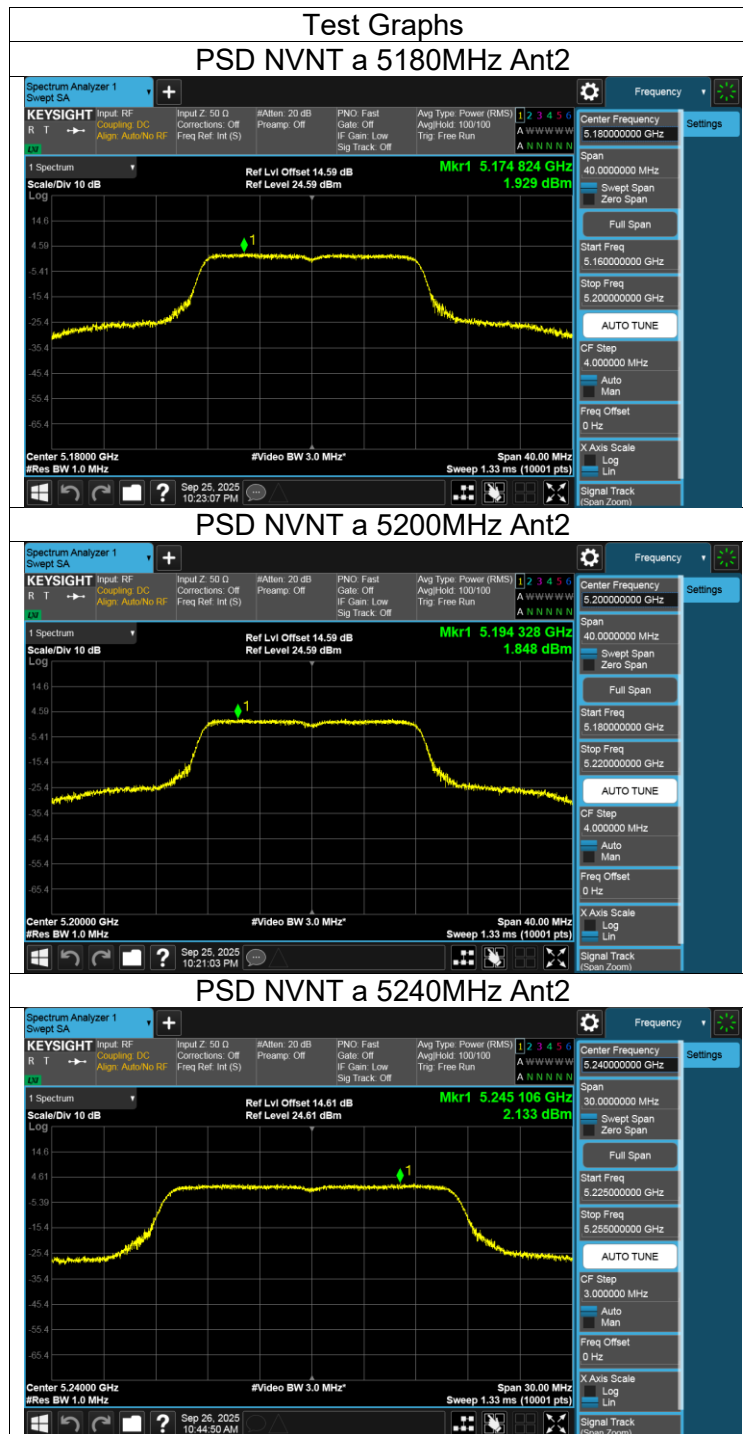


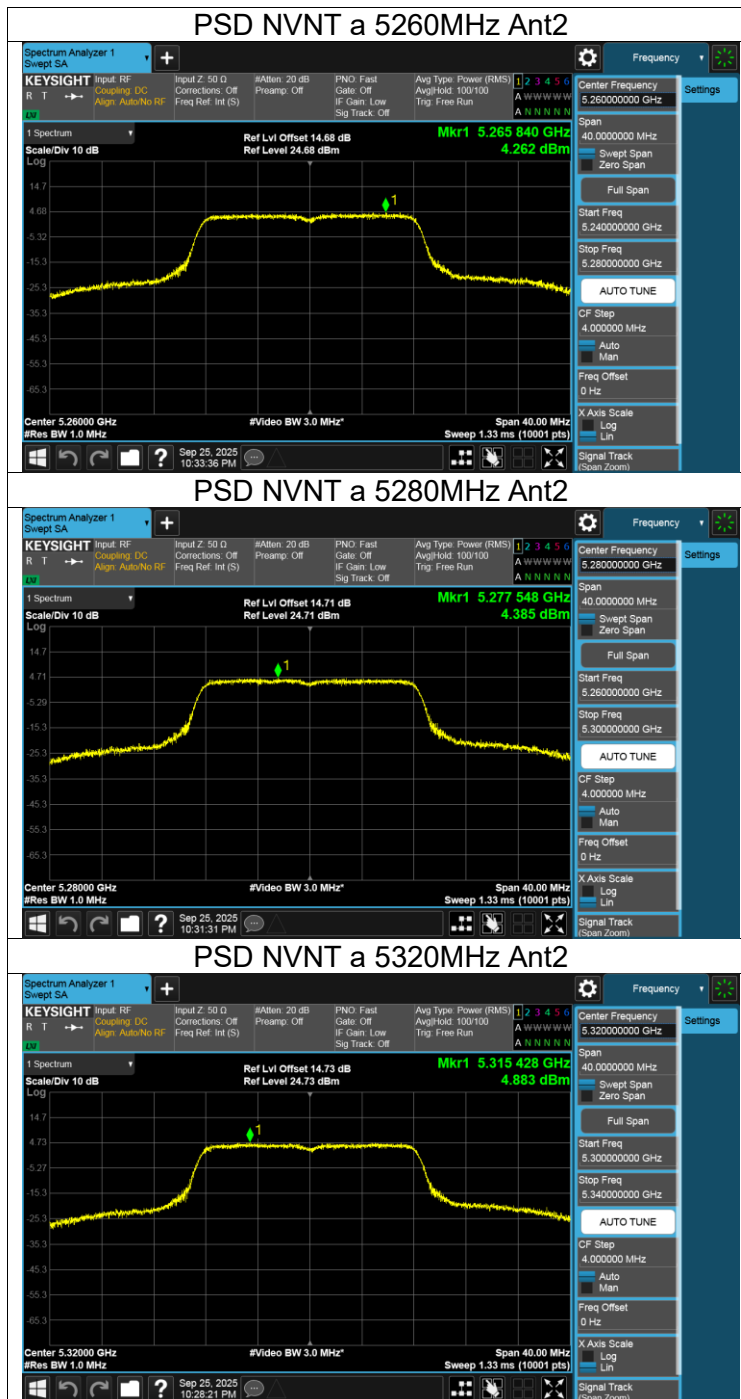

### PSD NVNT a 5500MHz Ant2

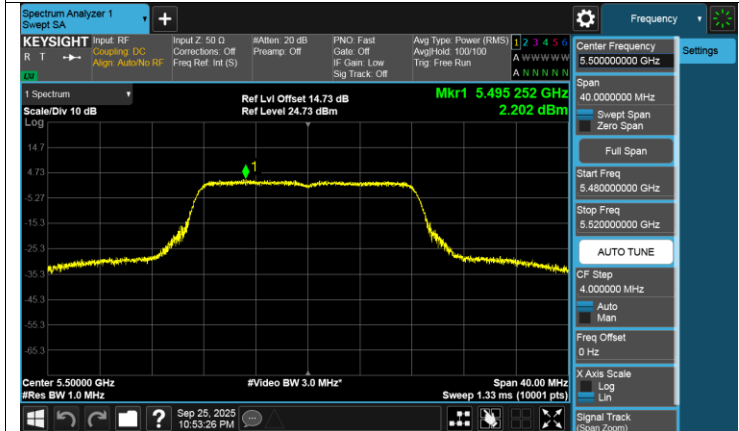

### PSD NVNT a 5580MHz Ant2

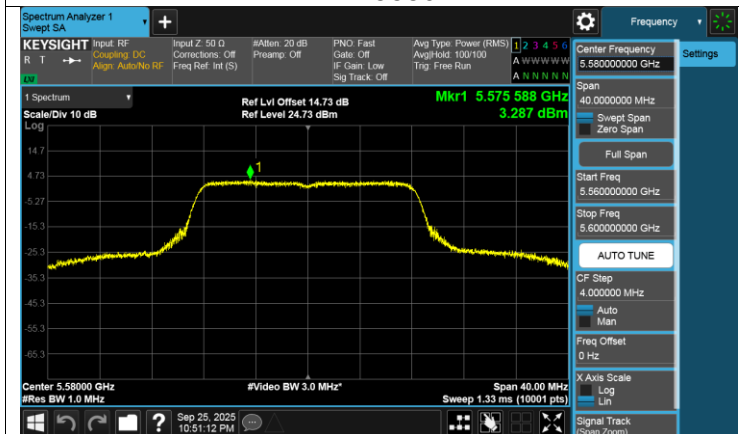

### PSD NVNT a 5700MHz Ant2





