

F1200

Portable Power Station

User Manual



Hi dear, thank you very much for purchasing and experiencing the F1200 portable power station. Before operating this product, please carefully read the user manual for proper operation.

According to the transportation requirements of the international customs for battery products, the battery level of this product is only less than 30% when it leaves the factory. Please fully charge the product after unpacking it to start the experience tour of F1200 .



Precautions For Use

1. Please avoid long-term storage and use of this product in environments with high temperature and humidity or direct sunlight to avoid shortened battery life and other failures. The product should not be close to the fire source, otherwise it may cause a major fire or accident.
2. This product must not be disassembled or modified. Improper operation may cause product malfunction or even fire.
3. Be careful not to drop the product.
4. Please store or use this product out of the reach of children, otherwise the product may be dropped or collided and cause bodily injury to children.
5. Please use our original accessories, and we will not guarantee the defective products caused by the use of non-original accessories.
6. Please directly plug in the wall socket to charge the product, do not use extension cords or cable taps, otherwise there is a risk of damage to the extension cords and cable taps or even a fire; If the extension socket is plugged in to charge this product, please do not connect other electrical appliances to this socket, otherwise the household meter may trip.
7. When the product is not in use or idle, please turn it off and unplug the power cable. If it needs to be idle for a long time, please consume the product from a fully charged state to an uncharged state, then recharge it to about 50% of the battery level and store it. In order to prolong the life of the product, please take three months as a cycle, operate and keep it in this way.
8. If the product reaches scrap conditions, please discard or recycle the product in accordance with local laws.

Contents

■ Packing List	01
■ Product Introduction	01
■ Button Function Introduction	02
■ Introduction of Display Interface	05
■ Troubleshooting Sheet	06
■ UPS Mode	07
■ Connection of Solar Panels	08
■ Car Charging	09
■ Product Parameter	10
■ Battery Specifications	10
■ Connecting to APP	11
■ Warranty Card	12
■ Disclaimer	13

Packing List



Portable Power Station



AC Charging Cable



User Manual



Car Charging Cable



Solar Charging Cable



Accessories Bag


Product Introduction

This product is a portable power device with a built-in battery pack with charge/discharge function. It includes both AC output interface and DC output interface such as USB output, cigarette lighter output, DC output, etc. It also has functions such as display, interface control, protection, and alarm. Moreover, this product can be charged by mains AC, solar panels and vehicle charging.


The following are the main features of this product:

- Equipped with LiFePO4 battery, the battery capacity is as high as 1024Wh, and the safety level is extremely high.
- 1200W pure sine wave AC output can meet almost all daily electronic equipment and small household appliances.
- Two-way fast charging technology is adopted to fully charge the product in about 1.2 hours.
- A great variety of output interfaces such as USB-A, Type-C PD3.0, cigarette lighter output, etc., meet many different application scenarios.



- In UPS mode, the switchover time is less than 10ms which is truly seamless switching.
- Multiple protection mechanisms such as battery, circuit, structure, etc., guarantee the product safety.

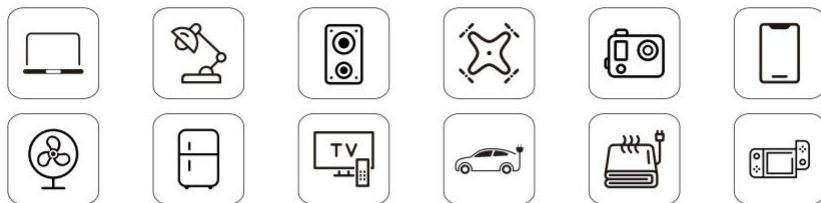

Button Function Introduction

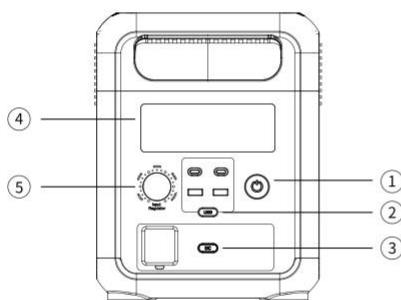

- ① Power ON/OFF Button
- ② USB ON/OFF Button
- ③ DC ON/OFF Button
- ④ LCD Screen
- ⑤ Input Power Knob



- ⑥ Cooling Air Duct
- ⑦ AC Switch (manually switch to 50/60Hz)
- ⑧ Solar Input Port (for solar panel)
- ⑨ AC Input
- ⑩ Overload Protection Button
- ⑪ LED Light Button (switch to different mode)

① Power ON/OFF Button

Instructions: Press and hold the power button for 3S to wake up the system, turn on the LCD display, and press and hold again for 3S to turn it off.

② USB ON/OFF Button

Instructions: Short press the USB button to turn on the USB output port, and short press again to turn it off.

 USB-A X2 18W max	 TYPE-C X1 PD-100W	 TYPE-C X1 PD-20W
--	---	--

③ DC ON/OFF Button

Instructions: Short press the DC button to turn on the DC output port, and short press it again to turn it off.

 Cigarette port X1 12V/10A

④ LCD Screen

Display the product's battery level and usage status tips.

⑤ Input Power Knob

When the product is connected to the AC mains for charging, the power is adjusted according to the actual input voltage. The clockwise rotation increases the input power, and the counterclockwise rotation decreases the input power. It is worth noting that charging this product at low power is beneficial for extending battery life.

⑥ Cooling Suction/Exhaust Port

When the product reaches the temperature threshold set by the system, the cooling fan will automatically run, accompanied by a certain fan noise (fan noise below 60dB is normal). Do not block the cooling suction/exhaust port during use of this product, and do not place any object within the range of 30CM.

⑦ AC Switch (AC output port, the sum of electrical load power should be $\leq 1200W$)

Tap the AC button to enable the AC output function. Since there may be differences in the AC output frequency in different regions, if you need to switch the frequency, the operations are as follows: Press and

hold the AC button for 3 seconds to enter the frequency switching mode, the 50Hz or 60Hz icon will flash on the display, short press the AC button again to select 50Hz or 60Hz; when the icon stops flashing and displays 50Hz or 60Hz, it indicates the switch is successful.

⑧ Solar Input Port

This interface supports solar panel input or car charger input. For details, please refer to "Solar Panel Connection" on page 8 of this manual and "Car Charging" on page 9.

⑨ AC Input

To charge the product by a household socket can achieve 1000W fast charging. It only takes about 1.2 hours to fully charge from 0 to 100%. When charging in this way, please pay attention to the following points:

※ Please directly plug in the wall socket to charge the product, do not use extension-cords or cable taps, otherwise there is a risk of damage to the extension cords and cable taps or even a fire.

※ If the extension socket is plugged in to charge this product, please do not connect other electrical appliances to this socket, otherwise the household meter may trip.

⑩ Overload Protection Button

When the power supply current is unstable due to lightning or other reasons, and there is a large current input at the AC Input, in order to protect the product, the overload protection function (safety circuit breaker) will activate and cut off the AC input port.


Please follow the sequence below to restore the AC input function:

- 1) Turn off the power button and unplug all ports.
- 2) After confirming that there is no abnormality in each part, turn on the power button.
- 3) Press the overload protection button, connect the AC Cable to restore the AC input.

⑪ Light Button

Instructions: Short press the Light Button, the LED lights are all on; short press again, the LED light enters the SOS mode, short press in turn, enter the strobe mode, and finally the LED light turns off (LED in any mode, long press the light button for ≥ 1 second, directly turn off the LED light).

Introduction of Display Interface

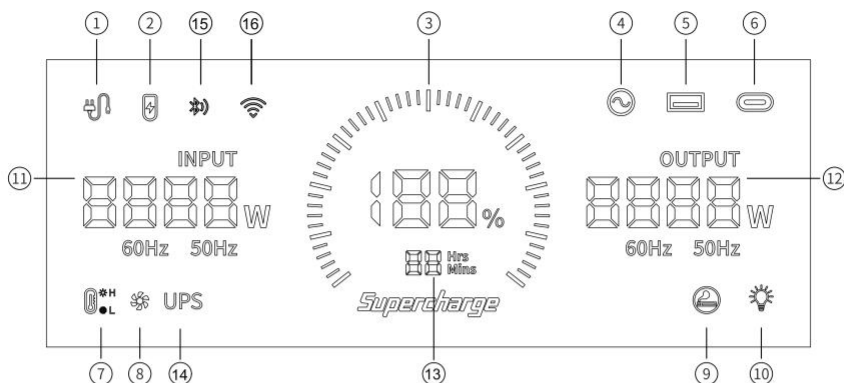

- | | | |
|-----------------------------------|------------------------|------------------------------|
| ① Connected to the AC Mains | ② XT60 Input | ③ Battery Level Percentage |
| ④ AC Output | ⑤ USB Output | ⑥ PD3.0 Output |
| ⑦ High/Low Temperature Protection | ⑧ Fan Status | ⑨ Cigar Lighter (12V) Output |
| ⑩ LED Light | ⑪ Input Power in Total | ⑫ Output Power in Total |
| ⑬ Charge time/Using Time | ⑭ UPS Mode | ⑮ Bluetooth |
| ⑯ WIFI | | |

Screen Display Description

Power display: When the product is in the charging state, the battery progress bar rotates continuously in the form of a clockwise marquee, and the battery level percentage gradually increases; when the product battery level is 0, the battery level percentage icon flashes.

Input and output status: When the product is working, the total input power, total output power and the cursor corresponding to the working area will be displayed on the screen.

Alarm prompt: See the following troubleshooting sheet for details.

Troubleshooting Sheet


Phenomenon	Cause	Processing method
 The above output icon flashes and beeps.	The output exceeds the standard and it's short-circuited.	Remove the load, and then short press the switch in the area corresponding to the icon to remove the alarm.
 The temperature warning icon flashes and beeps.	The temperature of the product is too high or too low.	Take the product out of the charging state, remove all loads, turn the power off, wait for the device to reach a suitable working temperature, then the alarm is removed.
 The icon of connecting to the AC mains flashes and the product cannot be charged.	The charging cable is poorly connected.	Verify the connection status of the cable and the power supply.
	The overload protection function is enabled.	1. Turn off the power button and unplug all ports. 2. After confirming that there is no abnormality in each part, turn on the power button. 3. Press the overload protection button, connect the AC line to restore the AC input.

UPS mode

● UPS Feature


This product has the function of backup uninterruptible power supply. The usage and operation precautions are as follows:

As shown in Pic 1 below, when the product is connected between the wall socket and the electrical appliance, and the power supply and AC switch of the product are in the ON state, the product enters the UPS working mode. The AC mains in the socket supplies power to the electrical appliance through the bypass circuit, and also charges the product.

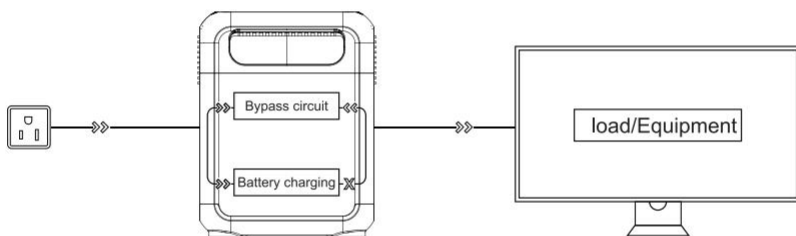

(Pic 1)

As shown in Pic 2 below, when the AC mains at the socket end is disconnected, the bypass output inside the product stops working, the product switches to a bidirectional inverter circuit within 10ms, and the circuit outputs supply power to the electrical appliance to ensure that the electrical appliance is uninterrupted and works normally during the process.

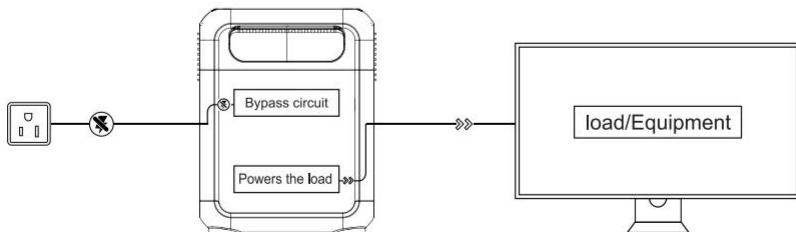

(Pic 2)

Connection of Solar Panels


Under the condition of light, this product can be connected to the solar panel and getting charged. The charging power is determined according to the conditions of light and weather.

In this charging mode, we support solar panel input within 200W, and the input voltage cannot exceed 50V, otherwise the product abnormality caused by it will not be covered by the warranty.

• We recommend the following two charging schemes:


Scheme one:

Portable Power Station Charging Area

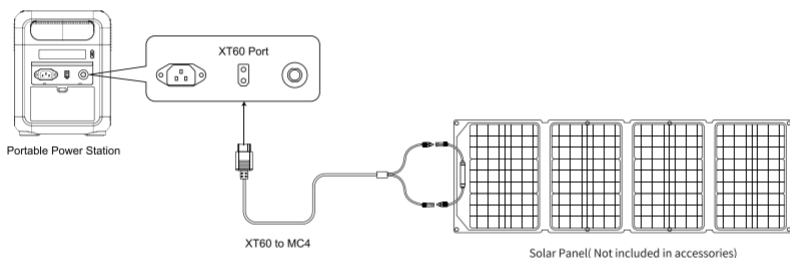

Scheme Two:

Portable Power Station Charging Area

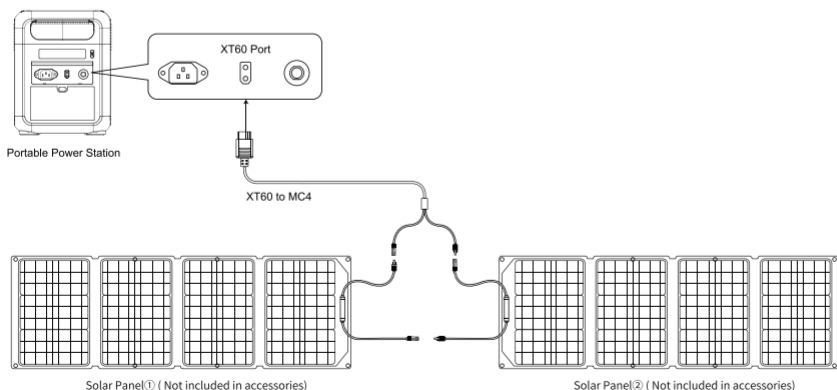


Car/Vehicle Charging

When the car is in the process of starting, connect the car charging port on the car and the product through the car charging cable to charge the product. The connection method is shown in the picture below:

This product supports 12V/24V car charger charging, please pay attention to the following two points when using this method to charge:

- ※ Please use it when the car started, otherwise the car battery may be exhausted.
- ※ Vehicle charging power is usually in the range of 90W-120W, and the charging time is long.

If fast charging is required, the AC mains charging is recommended.

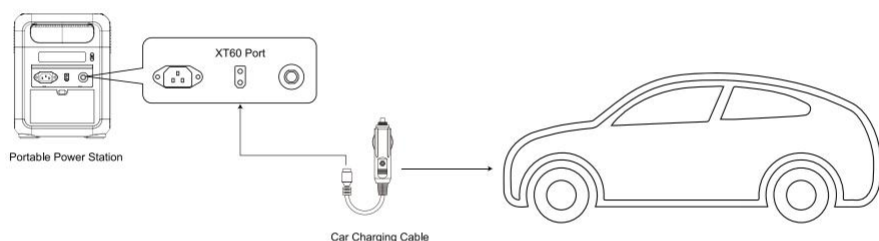

Product Specifications

Product Name	F1200 Portable Power Station
Dimension	L*W*H=324*205*264mm
Weight	11.5kg
Capacity	1024Wh
AC Charging	AC Mains Input, 1000W max
MPPT Input	11.5-50V 8A below 200W max
AC Output	50/60Hz (switchable), rated 1200W, pure sine wave with overload, short circuit protection
USB-A Output	QC3.0 18W max
Type-C ① Output	(PD20W) X1
Type-C ② Output	(PD100W)*1 Included PD3.0 protocol
Car Charging Output	12V/10A
Shutdown Current	<500uA
Working Temperature	-10~40°C
Environment Humidity	≤90%RH
Cycle Times	>4000 Times

Battery Specifications

Cell type	40135 LiFePo4
Rated voltage of single battery	3.2V
Rated capacity of single battery	20Ah
Rated voltage of battery pack	25.6V
Output voltage range of the battery pack	21-29V
Rated capacity of battery pack	1024Wh

APP Connection

Step 01




Bright EMS

Step 02



Add Device

Step 03



Use Bluetooth to search

WIFI Connection



Connect to the network

Warranty Card

Warranty Card	
Name	
Address	
Tel	
Mail	
Brand、 Order number	
Buying date	
Fill in the date	
What is the product failure	
Please fill in all the above items.	

This product provides a 24-month warranty service from the date of purchase

- If there is a quality problem within the range of normal use, we provide warranty service.
- After purchasing our company's products, please keep this product together with invoices and other items. When maintenance services are needed, please provide information according to our company's request.
- In the case where the warranty is damaged or altered, and no stamp of the sales store on the warranty, the warranty service may not be provided.
- Damage caused by use beyond the normal range of use is not covered by the warranty service.
- The content of the warranty scope shall be subject to the content recognized by the company.
- Even within the scope of the warranty, sometimes it will be exchanged for products with the same function. The shipping and repair fees for products outside the warranty range shall be paid by the customer.
- Sometimes the specifications and functions of the product will be updated without prior notice.

Disclaimer

Before use, please read the user manual of this product to ensure full understanding and correct use. After reading, keep the user manual properly for future reference. If you do not operate this product correctly, you could cause serious injury to yourself or others, or result in damage to the product and property. Once you use this product, you are deemed to have understood, recognized and accepted all terms and content of this document. Users undertake to be responsible for their own actions and all consequences arising therefrom. We are not responsible for all losses caused by the user's failure to use the product in accordance with the User Manual.

In compliance with the law, the company has the final right to interpret this document and all related documents of the product. If it is updated, revised or terminated without prior notice, please visit the our official website for the latest product information.

Manufacturer: Shenzhen Qichang Intelligent Technology Co., Ltd.

Address: Room 510, 5th Floor, Building 7, Yunli Smart Park, Bantian Street, Longgang District,
Shenzhen, GD CN

Technical service email: support@fossibot.com

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

ポータブル電源

取扱説明書



この度はポータブル電源F1200をお買い上げいただき、誠にありがとうございます。ご使用前に、是非本書をお読みの上、正しくご使用ください。



注意事項

1. 本製品バッテリーを長くご使用し、且つ他の故障を防ぐために、高温多湿、直射日光を避けて常温で保存してください。火気の近くで使用しないでください。
2. 本製品に分解や改造を施すと、故障になりやすく、さらに火事になる可能性があるので、必ずしないでください。
3. 落下や強い衝撃を与えないよう注意してください。
4. 小さなお子様の手の届かない安全な場所で、保管・使用ください。
5. 付属品は弊社製の純正品をご使用ください。他の製品によって不具合が発生する場合、保証の対象外となります。
6. 充電する際に、必ず壁コンセントでご使用ください。延長コードやテーブルタップを利用しないでください。延長コードやテーブルタップで充電する際に、その延長コードやテーブルタップの故障が発生、ひいては火事になる可能性もあります。本製品が充電中の壁コンセントに、他の電気製品を接続せずに使用してください。
7. 本製品が使用しない場合、電源をOFFにし、電源ケーブルも抜いてください。長期間に保管する場合、バッテリーをゼロまでに消耗し、再び、50%程度まで充電し、保管してください。本製品が長く使用するために、三ヶ月毎、前記の保管方法を行ってください。
8. 本製品が廃棄処分の条件になる場合、各自治体などが定める方法に基づいて、廃棄・回収してください。
9. 製品本体は輸送中の安全確保の為、30%程度の充電状態で梱包されています。製品を開封した後は、速やかに充電してからご使用ください。

目次

■ パッケージ内容明細	01
■ 製品概要	01
■ 各部の名称	02
■ ディスプレイ画面紹介	05
■ トラブルシューティングガイド	06
■ UPSモード	07
■ ソーラーパネルの接続	08
■ カーチャージャー	09
■ 製品仕様	10
■ バッテリー仕様	10
■ APP接続	11
■ 保証書	12
■ 免責事項	13

パッケージ内容明細



ポータブル電源



本体専用AC電源ケーブル



取扱説明書



シガーライターアダプター



MC4ソーラー充電ケーブル




ケーブル収納バッグ

製品概要


本製品には内蔵のバッテリーパックが搭載されており、充放電機能を備えたポータブル電源です。この製品はAC出力コネクタのほか、USB出力、シガーライター出力、DC出力などの複数の出力機能を備え、同時に表示、インターフェース制御、保護、およびアラームの機能が提供されています。また、この製品は、主電源、ソーラーパネル、自動車からも充電できます。

本製品の主な特徴は以下の通りです。



- 本製品は安全性が優れたリン酸鉄リチウム電池を採用します。本製品のバッテリー容量は1024Whです。
- 1200Wの純粋な正弦波出力で、デバイスと日常の小型家電製品に対応できます。
- 急速充電技術を使用し、製品は約 1.2時間でフル充電されます。
- USB-A、Type-C、PD3.0、シガライターソケットなど多様な出力端子が備えられるので、いろんな場合にも適用します。
- UPS（無停電電源装置）機能が搭載されます。切り替え時間は 10ms 未満で、重要設備に安定した電力を供給し続けることができます。
- バッテリー、回路、構造などにいずれも保護措置を設置するので、より安全性が高いです。

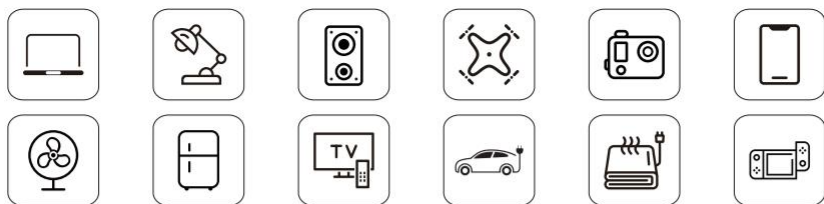

各部の名称

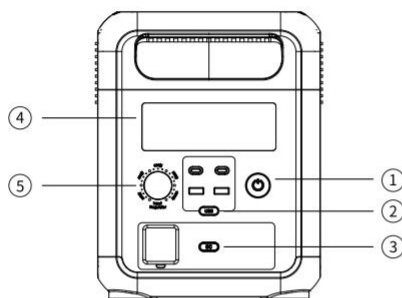

- ① 電源ボタン
- ② USBボタン
- ③ DCボタン
- ④ LCDディスプレイ
- ⑤ 入力パワー調整ボタン



- ⑥ 冷却ファン
- ⑦ ACポートボタン
(50/60Hz 手動切替えボタン)
- ⑧ ソーラーパネル入力
- ⑨ AC入力
- ⑩ 過負荷保護ボタン
- ⑪ Lightボタン(LEDライト)

① 電源ボタン

使用方法:電源ボタンを3秒間押し続けてシステムを起動し、LCDディスプレイをオンにして、もう一回3 秒間押し続けければ、閉じます。

② USBボタン

使用方法:USBボタンを短く押すと、USBパネル出力ポートが開き、もう一回短く押すと閉じます。

		
USB-A X2	TYPE-C X1	TYPE-C X1
18W max	PD-100W	PD-20W

③ DCボタン

使用方法: DCボタンを短く押すと、DCパネル出力ポートが開き、もう一度短く押すと閉じます。



④ LCDディスプレイ

本製品のバッテリー残量と使用状況のヒントを表示します。

⑤ 入力パワー調整ボタン

本製品を主電源によって充電する場合には、ボタンで入力電力を調整できます。時計回りに回転すると入力パワーが大きくなり、反時計回りに回転すると入力パワーが小さくなります。本製品を低電力で充電する場合には、バッテリーの使用寿命を延長できます。

⑥ 冷却ファン

本体の温度が一定の範囲を超えると、自動的に冷却ファンが稼働します(ファンの音量が60dB以下であれば正常です)。製品を使用中は、冷却の吸気および排気口を遮らないようにし、周囲に物を約30cm程度近づけないようにご注意ください。

⑦ ACポートボタン(AC出力ポートの電気負荷電力合計 $\leq$ 1200W)

ACポートボタンを押してACコンセントをON/OFFにします。ポートがONの状態ではACポートボタンを長押しすると、警告音が鳴りLCDパネルの「50/60Hz」表示が点滅します。ACポートボタンを押して周波数を切り替えると、数秒後に点滅表示が点灯に変わり設定が保存されます。当商品は毎回ACボタンを10回短く押すと、電圧が100Vと110Vの間に切り替えることができます。

⑧ ソーラーパネル入力

付属のMC4ソーラー充電ケーブル (MC4 to XT60)を使用してソーラーパネルを接続します。

1. ソーラーパネルの最大入力電力は200Wで、最大電圧は50Vです。
2. 最大電圧を超えるソーラーパネルを使用して発生した不具合は、保証対象外となる場合があります。

⑨ AC入力

壁コンセントによって製品を充電する場合には、1000Wの急速充電が可能で、フル充電するにはわずか1.2時間しかかかりません。この方法で充電する場合は、次の点に注意してください。

- ※ 壁コンセントで充電し、延長コードやケーブルタップの使用は避けてください。
- ※ 壁コンセントで本製品を充電する場合には、他の電気製品をそのコンセントに接続しないでください。家庭用メーターがトリップする可能性があります。

⑩ 過負荷保護ボタン

雷や電力供給装置の不安定によりAC入力に大電量が入力された場合、本体保護の為過負荷保護機能（ブレーカー）が動作しAC入力ポートが遮断されます。


※下記手順に従って本体のAC入力を復帰してください。

- 1) ブレーカーが動作すると、AC入力（充電）してもLCDネルの「Input」が0のままとなります。
- 2) 各部に異常が無いかを確認して、本体電源を入れます。
- 3) 過負荷保護解除ボタンを押し、AC入力を復帰させます。

⑪ Lightボタン(LEDライト)

使用方法:Lightボタンを短く押すと、LEDライトが点灯し、もう一回短く押すと、LEDライトがSOSモデルに入り、順番に短く押すと、ストロボモードになり、最後の LED 消灯(どのモードでも LED LIGHT ボタンを 1 秒以上押し続けると、LEDライトが直接消灯します。)

ディスプレイ画面紹介

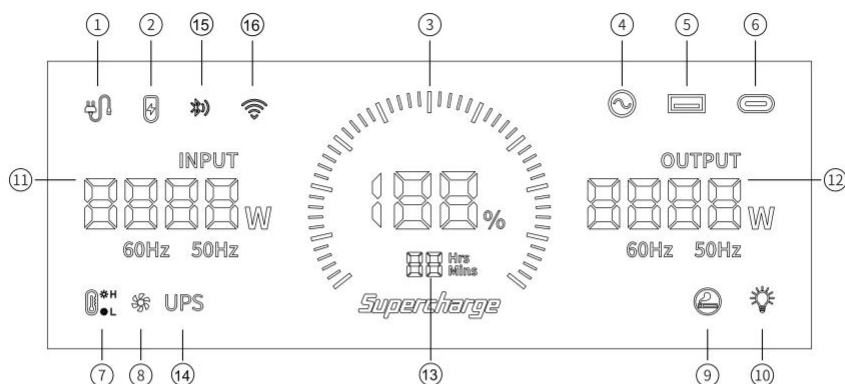

- | | | | |
|--------------------|-----------|-----------|----------|
| ① DC (12V) 出力 | ② XT60 入力 | ③ バッテリー残量 | ④ AC出力 |
| ⑤ USB出力 | ⑥ PD3.0出力 | ⑦ 高／低温保護 | ⑧ ファンの状態 |
| ⑨ シガーライター (12V) 出力 | ⑩ LEDライト | ⑪ 総入力電力 | ⑫ 総出力電力 |
| ⑬ 充電時間・残り使用時間 | ⑭ UPS機能 | ⑮ ブルートゥース | ⑯ WIFI |

パネル表示の内容表示に関するご注意

 このアイコンが点灯したら、通気口がふさがれていないか確認してください。

 このアイコンが点灯したら、本体の温度が適正範囲を超えています。本体の電源を切り、室内などで適正な温度になるまで置いてください。

 AC入力（充電）中にこのアイコンが点灯します。



出力中にこのアイコンが点灯します。

トラブルシューティングガイド


現象	原因	処理方法
 上記の出力アイコンのいずれかがビープ音とともに点滅します。	出力過大・短絡	負荷を取り除き、アイコンに対応する領域のスイッチを短く押すと、アラームが解除します。
 温度警告アイコンの点滅、ブザー	出力オーバーやショートによる	デバイスを全て外し、本体電源を切り、適正温度になるまでお待ちください
 充電できない	ケーブルの接続不良	ケーブルの接続状態、電源の通電を確認してください。
	過負荷保護機能が作動	1.電源ボタンを切り、すべてのポートのケーブルを抜きます。 2.各パーツに異常がないことを確認してから電源ボタンを入れます。 3.弾んだ過負荷保護ボタンを押し、AC入力回復させます。入力を回復させます。

UPSモード

● UPS機能


本製品は、10ms（ミリ秒）以内での自動電力供給を切り替えることが可能です。使用方法及び接続方法は以下となります。

図1に示すように、ご家庭のコンセントとデバイスの間に、フル充電状態の本製品を接続します。本製品の電源ボタンを押し、AC出力をONにします。この状態でご家庭のコンセントは本製品とデバイスを同時に給電することができます。接続先デバイスの定格出力は1200W以下に保つ必要があります。1200Wを超えると、過負荷により電力供給が自動的ストップします。

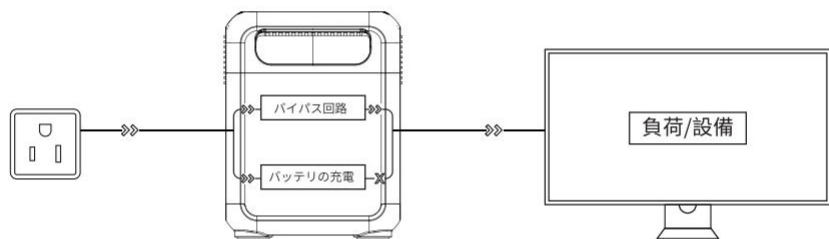

（図1）

図2に示すように、ACコンセントの電源が切断されると、本製品内部のバイパス出力が停止します。接続先デバイスの電源がONになっていると、停電時10ms以内に本製品からの電源供給に自動的に切り替わります。

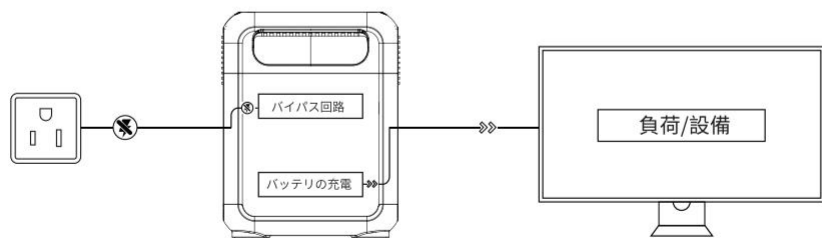

（図2）

ソーラーパネルの接続

弊社純正ソーラーパネル(別売)を接続して、電源のない場所でも本体を充電できます。充電電力は光や天候などの条件による影響されます。


この充電モードでは、200W以内のソーラーパネルの利用可能です。入力電圧が50Vを超えてはいけません。超えた場合による製品の異常は保証の対象外となります。

下記の二種類の充電方法をお勧めします。

● ソーラーパネル充電


1枚接続

本体側面入力ポート

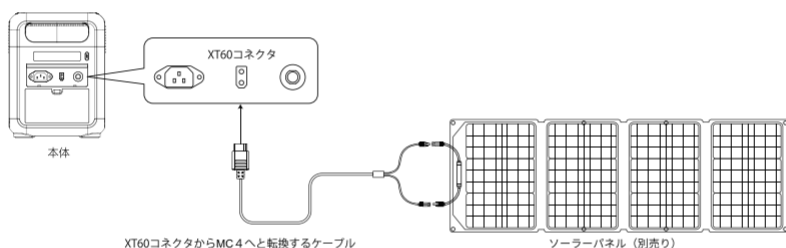

2枚直列接続

本体側面入力ポート

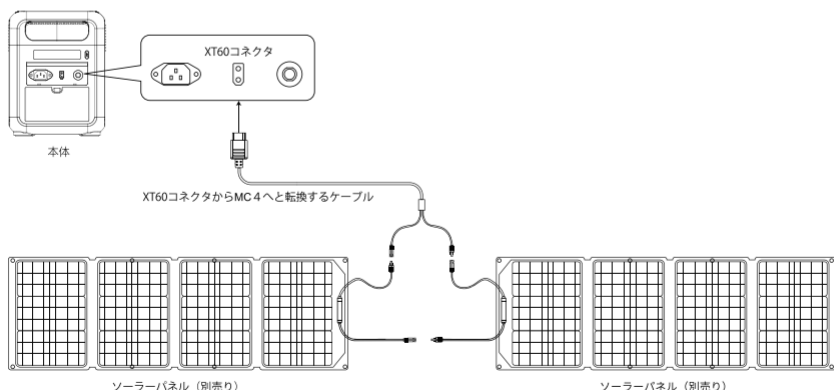


カーチャージャー

自動車の始動過程で、車内充電ポートと製品を自動車の充電ケーブルで接続して、製品を充電します。接続方法は図に示されています。

本製品は12Vカーチャージャー/24Vカーチャージャーの充電に対応しておりますが、この方法で充電する場合は以下の2点にご注意ください。

- ※ 自動車が始動した状態で行ってください。そうしないと、車のバッテリーが消耗する可能性があります。
- ※ ACCは通常90～120W程度の低電力なので、充電に時間がかかります。大容量の充電には、コンセントなどの安定した入力をお勧めします。

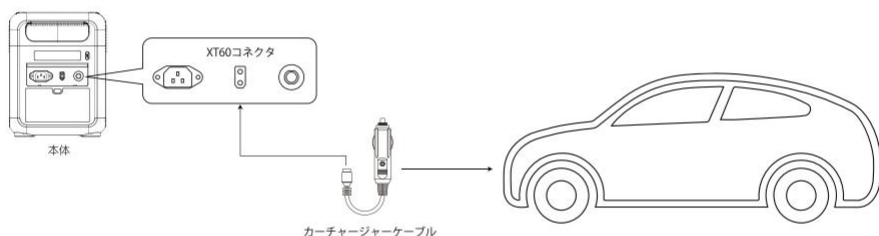

製品仕様

製品名称	F1200 ポータブル電源
製品サイズ	L*W*H=324*205*264mm
製品重量	11.5kg
バッテリー容量	1024Wh
AC充電	電源入力 1000W max
MPPT入力	11.5-50V 8A以下 200W max
AC出力	50/60Hz(切替可能)、定格出力1200W、純正弦波
USB-A 出力	QC3.0 18W max
Type-C ①出力	(PD20W) X1
Type-C ②出力	(PD3.0 100W) X1
カーチャージャー出力	12V/10A
シャットダウン電流	<500uA
動作温度	-10~40°C
環境湿度	≤90%RH
リサイクル充電	>4000 回

バッテリー仕様

種類	40135リン酸鉄リチウム電池
一つのバッテリー定格電圧	3.2V
一つのバッテリーの定格容量	20Ah
バッテリーバック定格電圧	25.6V
バッテリーバック出力電圧範囲	21-29V
バッテリーバック定格容量	1024Wh

APP接続

Step 01




スキャンコードダウン
ロードインストール

Step 02



デバイス追加

Step 03



検索するために
Bluetoothを使用

WIFI Connection

A mobile app screen titled 'Network configuration' with a note '*The device only supports 2.4G Wi-Fi'. It contains input fields for 'Wi-Fi Name' and 'Wi-Fi Password', a 'Submit' button, and a 'Set up later' link.

Connect to the network

保証書

保証書

製品モデル	
お名前	
ご住所	
お電話	
メール	
販売店名	
ご購入日	
上記全ての項目にご記入ください。	

本製品はご購入日から24ヶ月間の保証サービスを提供します。

- 通常の使用範囲で製品の品質に問題が発生した場合に保証を提供します。
- 製品の購入後本書とレシートなど購入履歴の分かる物を一緒に保管し、保証を受ける場合弊社のご依頼に応じてご提出ください。
- 保証書の破損・改造などの不正が認められる場合および、保証書に販売店印がない場合や購入履歴が確認できない場合は、保証対象とならない場合があります。
- 適切な使用範囲から逸れた状況での使用による損傷は保証されません。
- 保証の範囲は弊社が定めた内容に準拠します。
- 保証の範囲内と認められた場合でも、弊社が認める同等機能の製品への交換や、返金で対応する場合があります。
- 保証が適用され無い場合の送料を含む修理費用は、お客様の負担となる場合があります。
- 製品の仕様や機能は予告なしに変更される場合があります。

メーカー: 深セン啓昌インテリジェントテクノロジー株式会社

住所: 中国-深セン

技術サービスの電子メール: fossibotjp@fossibot.com

会社のウェブサイト: <https://www.fossibot.com>

免責事項

本製品を使用する前に、取扱説明書をよくお読みになり、完全に理解して正しくお使いください。お読みになった後、取扱説明書を通常に本製品と保管してください。誤動作によって、ご自身や他の人に重傷を負わせたり、製品や財産に損害を与える可能性があります。本製品を使用すると、取扱説明書に書かれているすべての条件と内容を理解、認識、同意したものと見なされます。使用者は、自分の行動とそこから生じるすべての結果に対して責任を負うことを約束します。弊社は、使用者が取扱説明書に従わない使用によって発生したすべての損失に責任を負いません。

法律に従って、弊社は取扱説明および製品のすべての関連文書を解釈する最終的な権利を有します。予告なしに更新、改訂、または終了する場合は、弊社公式サイトで最新の製品情報をご確認ください。



<https://jp.fossibot.com/>