# INR10
# In-cabin Vital Sign Detect Product Specification

<customer version>



Freetech Intelligent Systems Co., Ltd.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

Table of Contents

**1. General description ..... 2**
1.1 Introduction ..... 2
1.2 Terms and abbreviations ..... 3
**2. Radar system description ..... 3**
2.1 Functional principle ..... 3
*2.1.1 FMCW radar principle ..... 3*
*2.1.2 Angular determination by phase measurement method ..... 5*
2.2 System structure ..... 5
2.3 Mechanical structure ..... 6
*2.3.1 Radar exploded view ..... 6*
*2.3.2 Radar dimension ..... 7*
*2.3.3 Product materials ..... 8*
*2.3.4 Connector specification ..... 8*
*2.3.5 CAN communication terminal circuit design ..... 9*
2.4 Software architecture ..... 9
2.5 Algorithm structure ..... 10
*2.5.1 Signal Processing Module ..... 10*
*2.5.2 Data Processing Module ..... 11*
*2.5.3 Function Application Module ..... 11*
2.6 Radar characteristics ..... 11
*2.6.1 General characteristics ..... 11*
*2.6.2 Operational supply voltage ..... 12*
*2.6.3 Supplementary information ..... 12*
**3. System functions ..... 13**
**4. Mounting specification ..... 14**
4.1 Mounting position ..... 14
4.2 Mounting requirements ..... 15
4.3 Mounting tolerance ..... 15
4.4 Requirements for the covering ..... 15
*4.4.1 Requirements for single material ..... 15*
*4.4.2 Requirements for composite material ..... 16*
*4.4.3 Requirements for the shape and the position ..... 16*
**5. Design verification ..... 17**
5.1 Design standards ..... 17
5.2 DV test verification ..... 18
5.3 Performance test verification ..... 19

# 1. General description

## 1.1 Introduction

As an automotive compatible product, the In-cabin Vital Sign Detect System is focused on the Child Presence Detection and Rear Occupant Alert function. It helps to prevent children from being left in the car and to alert the driver when the rear seat belt is not securely fastened during driving.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

This document describes the product of Freetech Intelligent Systems Co., Ltd. (hereinafter referred to as Freetch), it includes the product specification, functional principle, product function, installation, system test, and calibration method.

## 1.2 Terms and abbreviations

| Abbreviation | Full name |
| --- | --- |
| AOP | Antenna on package |
| CAN | Controller Area Network |
| CPD | Child Presence Detection |
| SOD | Seat Occupancy Detection |
| HMI | Human Machine Interface |
| FMCW | Frequency Modulated Continuous Wave |
| dB | Decibel |
| dBm | Decibel milliwatts |
| dBsm | Decibel square meters |
| RCS | Radar Cross Section |
| KL30 | Battery is positive, hot at all times |
| KL15 | Ignition switch position #2 (on) |
| DV | Design Validation |

# 2. Radar system description

## 2.1 Functional principle

This chapter describes the principle of range, velocity, and angle detection of the frequency modulated continuous wave (FMCW) radar.

### 2.1.1 FMCW radar principle

Electromagnetic (EM) waves within frequency range between 300 MHz to 300 GHz are defined as microwaves. The propagation velocity of microwaves in the air is almost equal to the speed of light in vacuum, which is $3 \times 10^8 \mathrm{m/s}$. A radar system generally consists of transmitter-receiver module, transmitting and receiving antenna (TX-RX Antenna) and processing unit. Microwaves are radiated by the transmitting antenna, reflected by the target object, and received by the receiving antenna. During this process, the time delay of the microwave between TX and RX antenna can be measured, the distance between the target object and radar is then calculated. The measurement principle of the radial distance between radar antenna and object is shown in Figure 1. Assuming the distance between radar and object is R, the travel time of EM wave between transmitter and receiver is $t_d$, the travel distance of microwave from radar transmitter to the target object and reflected to radar receiver is thus 2R, the speed of light is c, $c = 3 \times 10^8 \mathrm{m/s}$; therefore, R is calculated by equation $R = \frac{1}{2} \cdot c \cdot t_d$.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.





Figure 1 Radar distance detecting principle

FMCW radar generates a saw-tooth wave form, see Figure 2. The radiated EM wave will be reflected/scattered by the target object, part of the EM wave will be captured by the receiving antenna of the radar. The received signal will be down-converted in the mixer with local oscillator (LO). For saw-tooth wave, frequency is linearly changing with time, so is the LO of the radar. Due to the delay $t_d$, the received signal has the frequency at time $t - t_d$ while the LO has the frequency at time $t$. In this way, after the mixer an intermediate frequency (IF) is obtained, the IF is equal to the difference between received frequency and LO. After LNA, filter, ADC and baseband processing, the distance of the target object can be extracted.

In addition, to obtain the radial velocity of the target object, the radar has to transmit the single sawtooth signal (Chirp) in a periodical way (frame). The radial velocity is calculated by in-time phase shift of the adjacent chirp signals. By equal interval sampling, the sampled data will be processed with FFT and the outcome is saved in the storage matrix (radar data cube). The processor combines all received chirp signals in one frame and sequentially performs FFT to each single chirp.

The combination of distance FFT and doppler/velocity FFT can be considered as a 2-D (two-dimensional) FFT processing of the digital sampling data in each frame. The 2-D FFT enables the simultaneous measurement of target distance and velocity.

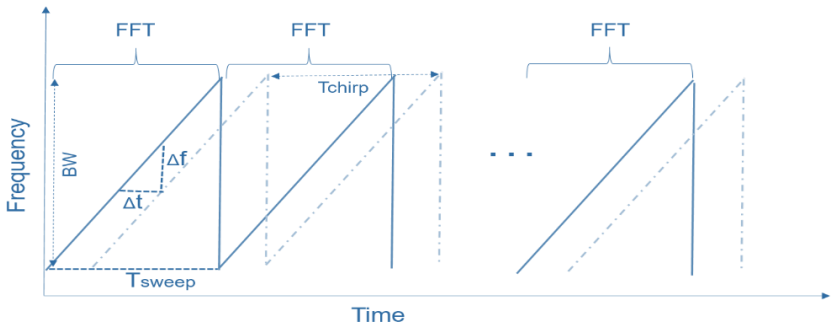



Figure 2 RF sawtooth wave

The correlation between distance and its resolution can be expressed by:

$$R = \frac{cT_{sweep}}{2BW} f_{IF} \qquad R_{res} = \frac{c}{2BW}$$

where $BW$ is the sweeping bandwidth, $T_{sweep}$ is the sweeping period, $f_{IF}$ is the IF frequency, $c$ is the speed of light.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

The correlation between velocity and its resolution can be expressed by:

$$V = \frac{c}{2f} f_d \qquad V_{res} = \frac{c}{2f \cdot N \cdot T_{chirp}}$$

where $c$ is the speed of light, $f_d$ is the doppler frequency, $f$ is the center frequency of the chirp, N is the number of chirps, $T_{chirp}$ is the period of the chirp.

### 2.1.2 Angular determination by phase measurement method

The phase measurement method is to use the phase difference among different receiving signals to calculate the angle of the target object. As shown in Figure 3, the angle between the radar and the target object is $\theta$, after reflection and transmission, the receiving wave can be considered as plane wave. Assuming the antenna spacing is $d$, due to the different transmitting distance $\Delta R$, there must be a phase difference between the two receiving signals at adjacent antenna, the phase difference $\Delta\varphi$ can be expressed by:

$$\Delta\varphi = \frac{2\pi}{\lambda}\Delta R = \frac{2\pi}{\lambda} d \sin\theta$$

where $\lambda$ is the wavelength. In this way, the angle of the object can be derived as:

$$\theta = \arcsin\left(\frac{\Delta\varphi\lambda}{2\pi d}\right)$$

In digital processing of radar system, the phase difference will be obtained by IQ data. Define $\varphi_1$, $\varphi_2$ as the phases of the two receiving signals, phase difference can be derived by:

$$\begin{cases} \varphi_1 = \arctan\dfrac{Q_1}{I_1} \\ \varphi_2 = \arctan\dfrac{Q_2}{I_2} \\ \Delta\varphi = \varphi_2 - \varphi_1 \end{cases}$$

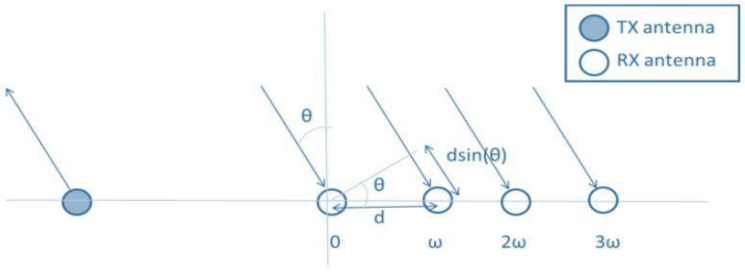



Figure 3 Angular determination by phase measurement method

## 2.2 System structure

See Figure 4 for system hardware structure.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

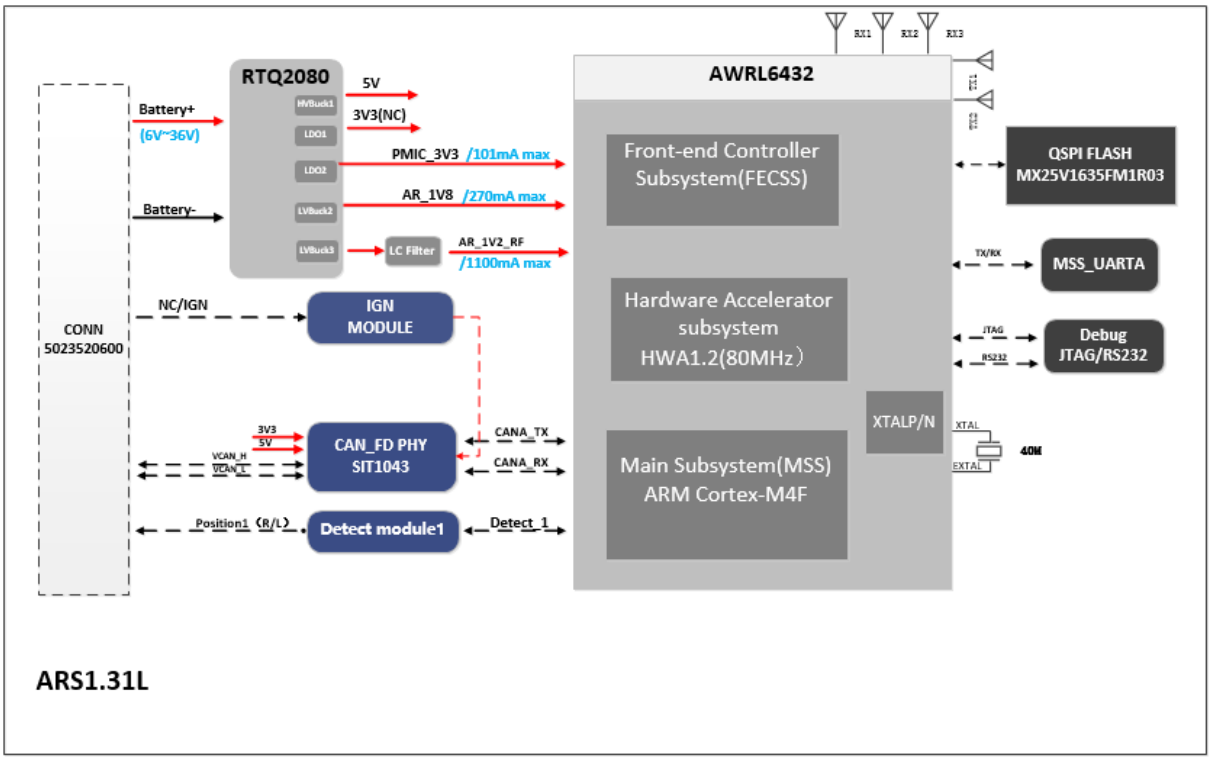



Figure 4 System hardware structure

Main module type:

| | |
| --- | --- |
| SOC | AWRL6432 |
| CAN | SIT1043QTK |
| PMIC | RTQ2080 |

## 2.3 Mechanical structure

### 2.3.1 Radar exploded view

The product offers a compact and assembling-friendly solution, with all components integrated in one PCBA and packaged in an automotive standard conformed radar housing. See Figure 5.

Considering the integration and layout of the radar in the cabin, the following two installation options are offered for the radar: 1) Fixing the radar from its back with screws; 2) Attaching the radar on a slot-type bracket.

Freetech also provides radar bracket design and sample making.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

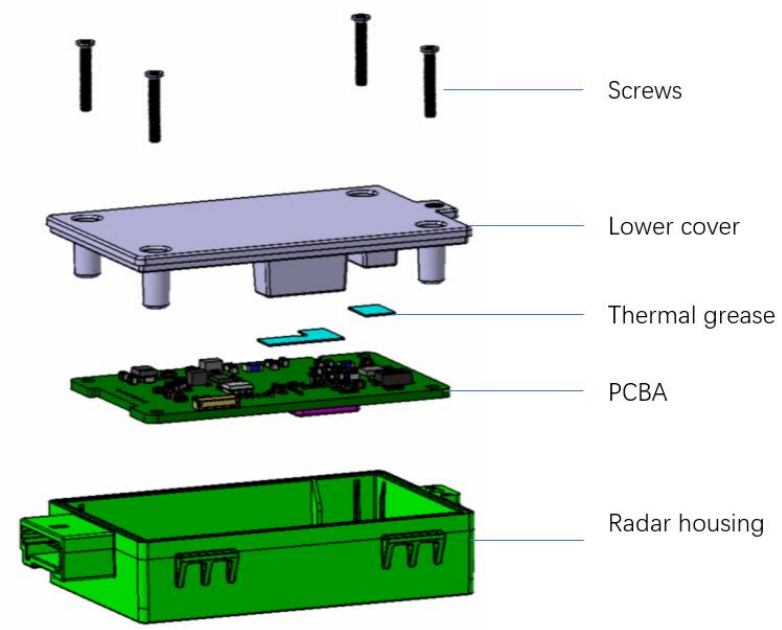



Figure 5 Radar structure

### 2.3.2 Radar dimension

The product is highly integrated with a compact design, which is easy to install and fit in the cabin. See Figure 6 for the dimension of radar housing.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

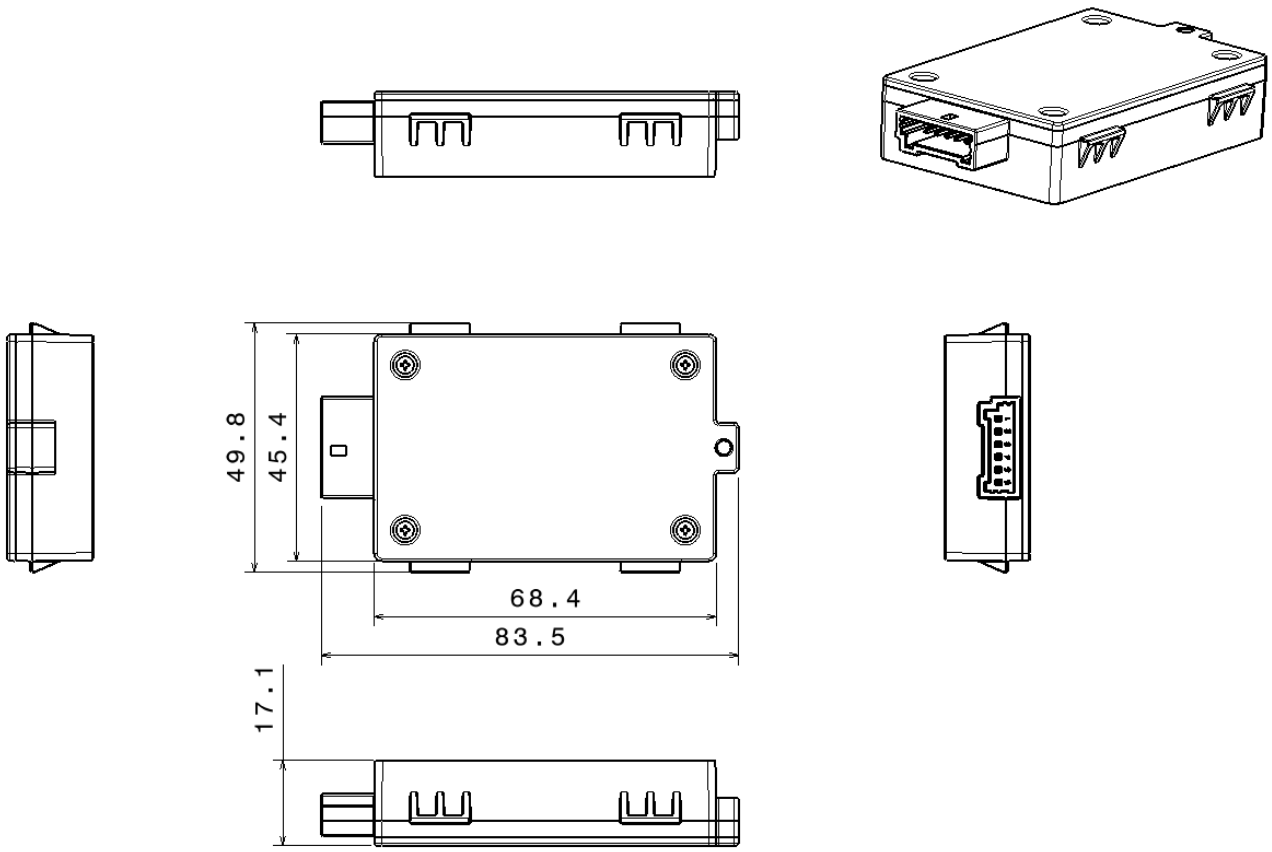



Figure 6 Radar 2D drawing

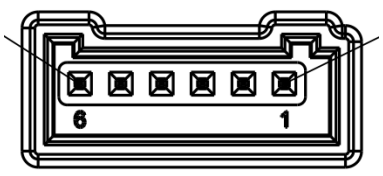
### 2.3.3 Product materials

| Name | Quantity | Material |
|---|---|---|
| Antenna case | 1 | PC |
| Nut | 4 | Copper |
| Thermal pad | 1 | thermal conductive silicone |
| Lower cover | 1 | ADC12 |
| Screw | 4 | 304 stainless steel |

### 2.3.4 Connector specification

The connector model is shown as follows:

| Connector | Model |
|---|---|
| Connector on the device | TE-936289-2 ,TE-928999-1 |
| Imperviousness | IP52 |




Radar pin definition:

| No. | Radar pin | Function description |
|---|---|---|

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| | | |
| --- | --- | --- |
| 1 | GND | Ground |
| 2 | VBAT | Power supply |
| 3 | CAN_L | CAN communication interface |
| 4 | CAN_H | CAN communication interface |
| 5 | NC | Reserved |
| 6 | POS-A | Position select |

### 2.3.5 CAN communication terminal circuit design

To match the CAN communication, the terminal circuit is designed as follows:

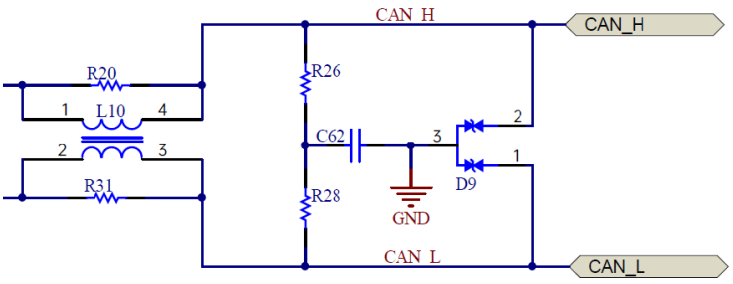



Figure 7 CAN communication terminal circuit

## 2.4 Software architecture

The software development created a complete set of process documents from customer requirements, system requirements, software & algorithm requirements, to software & hardware realization, and system tests, as well as a variety of test cases and test scenarios. The radar software is developed according to ASPICE Level2 requirements. By adopting the AutoSAR architecture, see Figure 8, the modular design realizes an agile development and facilities further maintenance and upgrade.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

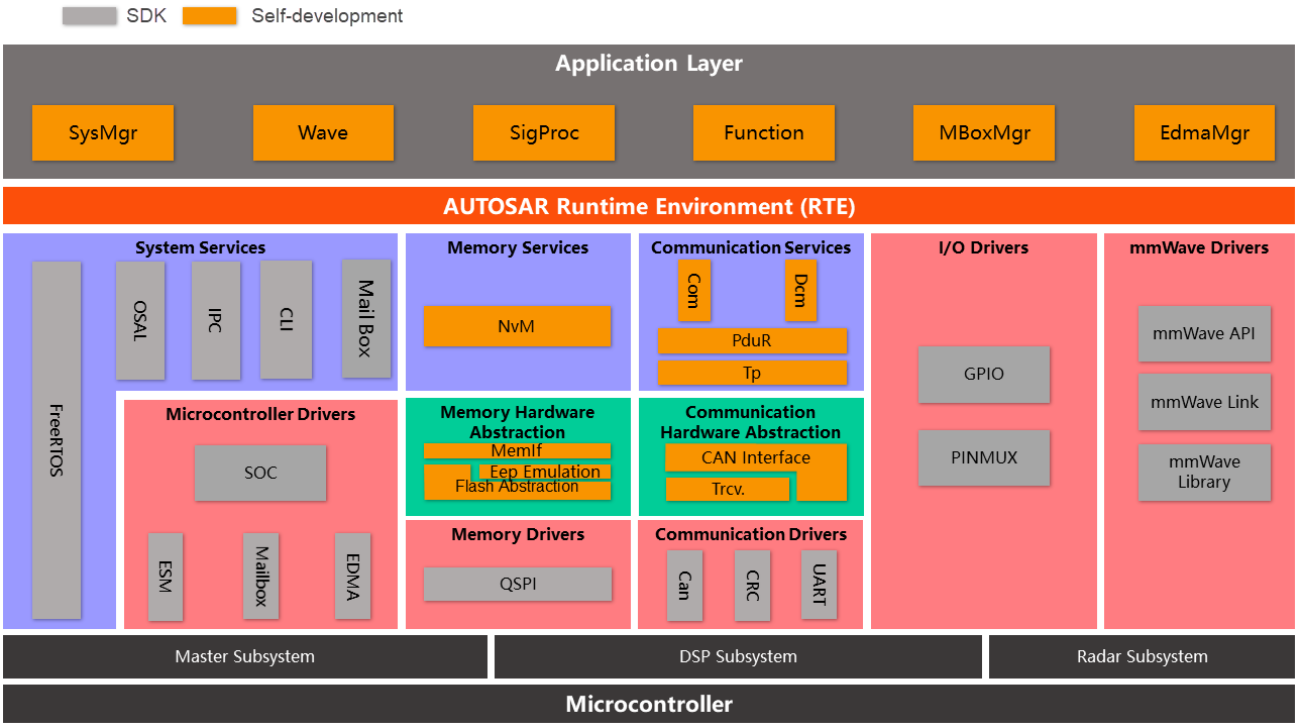



Figure 8 Software architecture

## 2.5 Algorithm structure

The software module in application layer mainly includes signal processing, data processing and function application. See Figure 9 for algorithm flow chart.

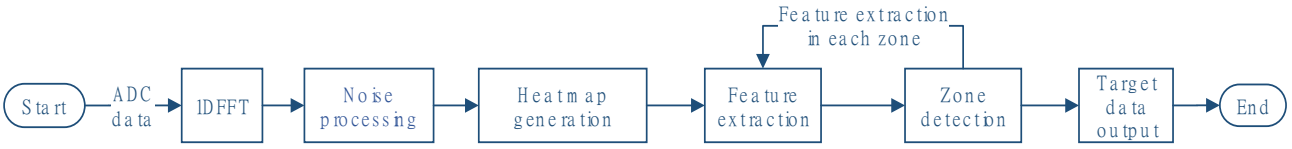
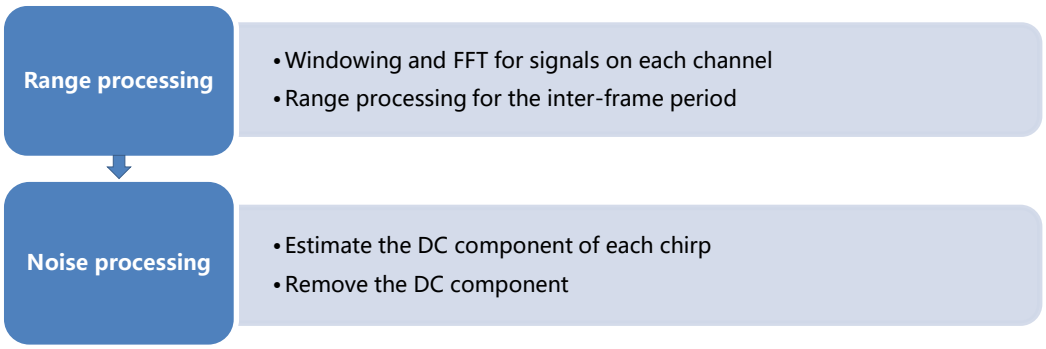



Figure 9 Algorithm flow chart

### 2.5.1 Signal Processing Module

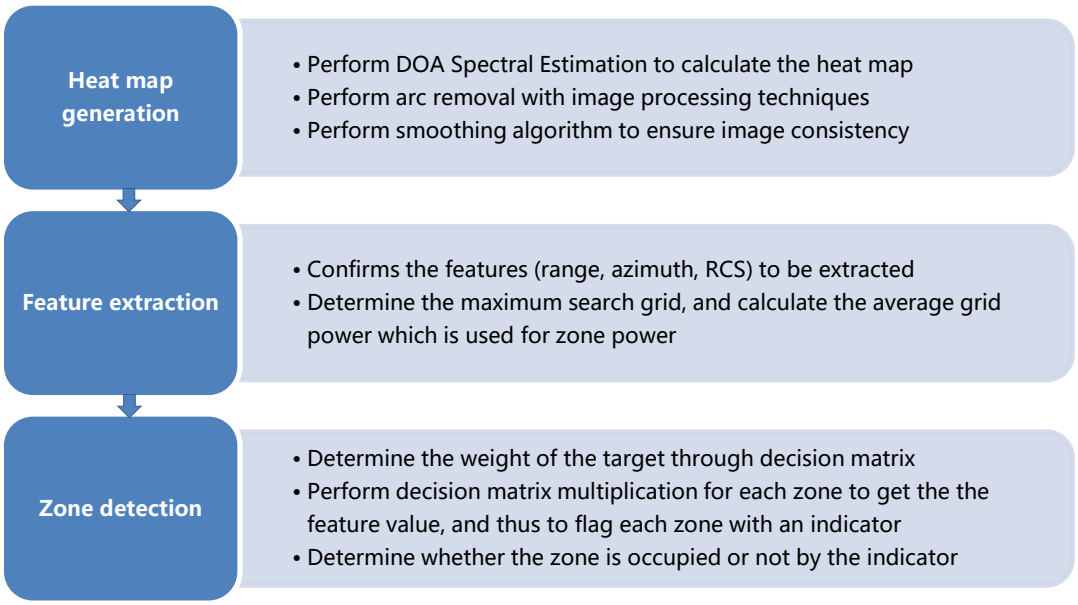
The Signal Processing Module performs windowing and 1DFFT for the signals of each channel, and performs noise processing for the signals after FFT, and to remove the noise signals that generates stationary clutter wave.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.




### 2.5.2 Data Processing Module

The Data Processing Module uses the Direction of Arrival (DOA) spectral estimation algorithm to transform the noised processed data into the Range-Azimuth heat map. Then the module performs feature extraction (range, azimuth, RCS) for the target, .and searches the power intensity within each defined zone. By decision matrix and feature extraction, a feature vector is computed to obtain an indicator value, which indicates whether the zone is occupied or not.




### 2.5.3 Function Application Module

The Function Application Module processes the target object data and zone detection range. Corresponding functions can be developed based on the required feature from customer.

## 2.6 Radar characteristics

### 2.6.1 General characteristics

| | |
| --- | --- |
| Operating frequency | 60 GHz to 64 GHz |

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| | |
|---|---|
| Data cycle | 50ms |
| Distance | 0.1 m~5 m |
| Angle | -60° ~ +60° (horizontal); -45° ~ +45° (vertical) |
| Antenna channels | 2Tx 3Rx |
| Transmit power | 12.5dBm |
| Operating voltage | 12V DC |
| Power consumption | < 1W |
| Static current | ＜100 uA |
| Operating temperature | -40℃ ~ +85℃ |
| Cummunication interface | CAN |
| Degree of protection | IP52 |

### 2.6.2 Operational supply voltage

The radar supports 12V power supply.

| Supply voltage | Operating mode | Performance |
|---|---|---|
| <6.5V(±0.3V Hysteresis) | Safe mode | - No communication with vehicle<br>- No fault detection |
| 6.5V - 9V(±0.3V Hysteresis) | Low voltage mode | - Normal communication with vehicle<br>- Normal hardware monitoring<br>- Partial fault monitoring, low voltage fault memory<br>- Restricted functionality |
| 9V - 16V(±0.3V Hysteresis) | Normal voltage mode | - Normal communication with vehicle<br>- Normal hardware monitoring<br>- Full fault monitoring |
| 16V - 18.5V( ± 0.3V Hysteresis) | High voltage mode | - Normal communication with vehicle<br>- Normal hardware monitoring, not including chassis related DTC<br>- Overvoltage fault memory only<br>- Restricted functionality |
| >18.5V(±0.3V Hysteresis) | Safe mode | - No communication with vehicle<br>- No fault detection |

### 2.6.3 Supplementary information

Hereby, Freetech Intelligent Systems Co., Ltd. declares that the radio equipment type INR10 is in compliance with Directive 2014/53/EU.

#### *2.6.3.1 Manufacturer's name and address*

Freetech Intelligent Systems Co., Ltd
16 Xingfa Road, Tongxiang City, Jiaxing City, Zhejiang Province, China

#### *2.6.3.2 Importer's name and address*

Importer: xxxx
Address: xxxx

#### *2.6.3.3 FCC compliance statement*

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

Please note that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with radio frequency exposure limits set forth by the FCC for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

## 3. System functions

The system outputs the detection result of Child Presence Detection (CPD) function.

The CPD function identifies the living lives by detecting vital signs such as micromotions and breathing rate, and outputs corresponding alarm signals.

The SOD function uses more algorithms to calculate the number and relative position of the living objects. See Figure 10 for function strategy.

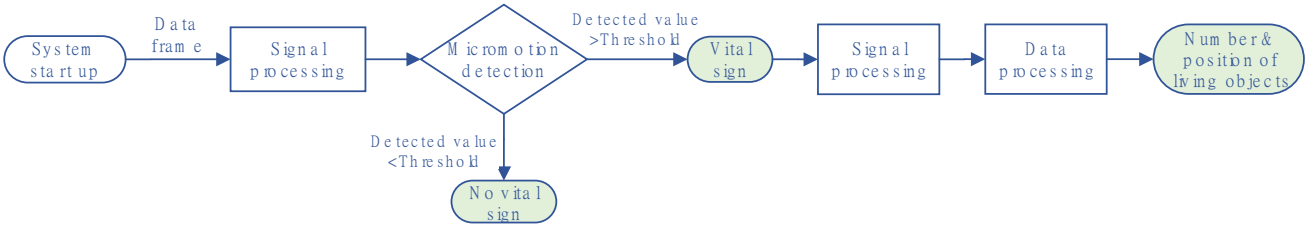
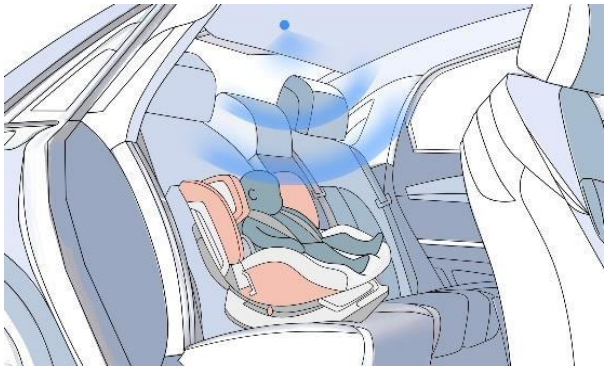



Figure 10 function strategy

This function detects whether there are infants, children, or other living lives such as adult or pet on the rear seats to avoid the risk of children or pets being left unattended in the car.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

Function description:



The engine is switched off and the doors are closed. Nobody is in the cockpit (and the defined starting conditions are met). When living lives are detected on the rear seats, the radar sends alarm signal to the vehicle via CAN communication and sends warning message to the mobile phone of the defined contact person via the vehicle computer. It can also initiate the vehicle warning system to the get the attention of passersby.

# 4. Mounting specification

## 4.1 Mounting position

The product supports a flexible mounting position and is suitable for different types of vehicles, as shown in Figure 11. To achieve optimum performance, and to ensure the function of CPD and SOD, the radar is recommended to be installed in the middle or rear of the roof. Considering some vehicle is equipped with panoramic sunroof or has limited space on the roof, the radar can also be installed on the left or right B-pillar, or nearby the interior rear-view mirror.

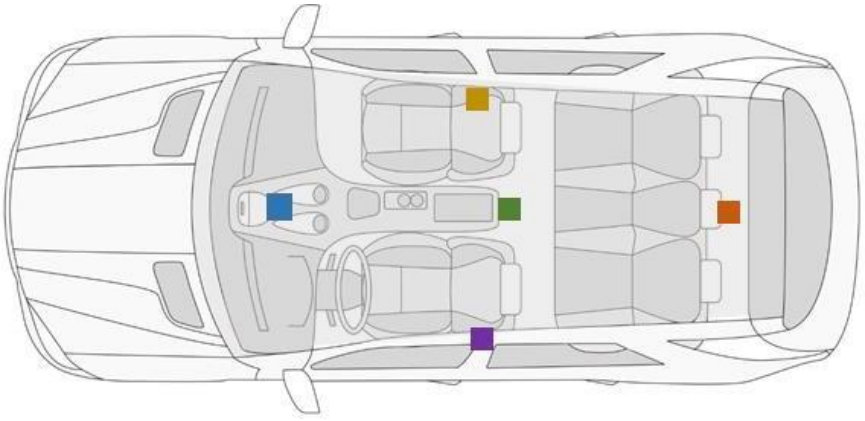


Figure 11 Installation position

- Front of the roof/top control panel
- Upper side of the right B-pillar

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

- Upper side of the left B-pillar
- Middle of the roof
- Rear of the roof

## 4.2 Mounting requirements

1) The radar is rigidly fastened to the vehicle, micro relative movements might cause false alarms.

2) It's recommended to fasten the radar to the frame.

## 4.3 Mounting tolerance

| Parameter | Tolerance |
| --- | --- |
| Position tolerance | ±10mm |
| Yaw angle | ±2° |
| Pitch angle | ±2° |
| Roll angle | ±2° |
| Connector direction | Facing towards the driving direction (recommended) |
| Note: The mounting tolerances above are based on the designed position. Within the range of the tolerance, the radar can be calibrated with software. | |

## 4.4 Requirements for the covering

### 4.4.1 Requirements for single material

For covering made of single material, the thickness is related to the dielectric constant of the material and the tilt angle. When the tilt angle between the radar and the cover pate is $\alpha$ (see Figure 13), the optimal thickness for the cover can calculated according to on the formula below:

$$d = n\frac{\lambda_{diel}}{2} \quad n \in Z_+$$

$$\lambda_{diel} = \frac{c_0}{f\sqrt{\varepsilon_r - sin^2(\alpha)}}$$

where

$d$ is the thickness;

$\lambda_{diel}$ is the wavelength;

$\varepsilon_r$ is the effective dielectric constant;

$c_0$ is the speed of light;

$f$ is the frequency of radar transmitting center;

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

According to the calculation, the optimal thickness of the covering should be a multiple of half wavelength within the material.

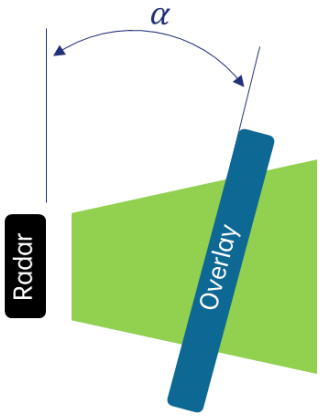



Figure 13 Installation angle

### 4.4.2 Requirements for composite material

For cover made of composite materials, the thickness is related to the dielectric constant of the material. The optimal thickness for the covering made of composite material or with coating can be calculated according to the formula below:

$$d = n\frac{\lambda_{diel,eff}}{2} \quad n \in Z_+$$

$$\lambda_{diel,eff} = \frac{c_0}{f\sqrt{\varepsilon_{r,eff} - sin^2(\alpha)}}$$

where

$d$ is the thickness;

$\lambda_{diel,eff}$ is the effective wavelength;

$\varepsilon_{r,eff}$ is the effective dielectric constant of the composite material;

$c_0$ is the speed of light;

$f$ is the frequency of radar transmitting center;

$\alpha$ is the tilt angle, see Figure 13.

According to the calculation, the optimal thickness of the covering should be a multiple of the half wavelength within the composite material.

Avoid to use composite materials. If it cannot be avoided, ensure that no air gap will be generated between the materials at varying temperatures or humidity.

Avoid to use metallic coatings. If it cannot be avoided, the number of layers of metallic coatings should be ≤2.

The material should have uniform properties. It’s not recommended to use composites containing glass fiber, carbon fiber, or metallic particles.

### 4.4.3 Requirements for the shape and the position

1) The curvature radius of the covering within the radar radiation region shall be larger than 350mm;
2) The covering within the radar radiation region shall not contain ribbed profiles, sharp edges or abrupt thickness changes.
3) The covering within the radar radiation region shall not contain stepped zone of two

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

different materials

4) The clearance distance between the radar and the covering shall be more than 10mm, to avoid possible physical collision caused by vibration.

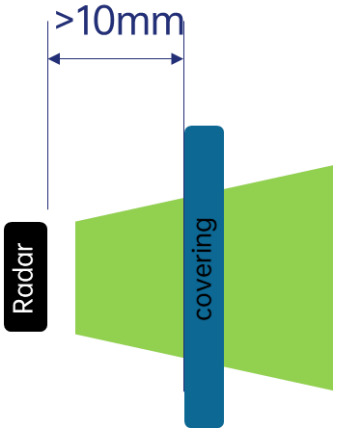



Figure 14 The clearance distance between the radar and the covering

# 5. Design verification

## 5.1 Design standards

| Standard number | Title of standard |
| --- | --- |
| GB/T 28046.1-2011 | Road vehicles - Environmental conditions and testing for electrical and electric equipment - Part 1: General |
| GB/T 28046.2-2011 | Road vehicles - Environmental conditions and testing for electrical and electric equipment - Part 2: Electrical loads |
| GB/T 28046.3-2011 | Road vehicles - Environmental conditions and testing for electrical and electric equipment - Part 3: Mechanical loads |
| GB/T 28046.4-2011 | Road vehicles - Environmental conditions and testing for electrical and electric equipment - Part 4: Climatic loads |
| GB/T 28046.5-2013 | Road vehicles - Environmental conditions and testing for electrical and electric equipment - Part 5: Chemical loads |
| GB/T 1865-2009 | Paints and varnishes - Artificial weathering and exposure to artificial radiation - Exposure to filtered xenon-arc radiation |
| GB/T 2423.1-2008 | Environmental testing for electric and electronic products - Part 2: Test methods - Tests A: Cold |
| GB/T 2423.2-2008 | Environmental testing for electric and electronic products - Part 2: Test methods - Tests B: Dry heat |
| GB/T 2423.4-2008 | Environmental testing for electric and electronic products - Part 2: Test methods - Test Db: Damp heat, Cyclic (12h+12h cycle) |

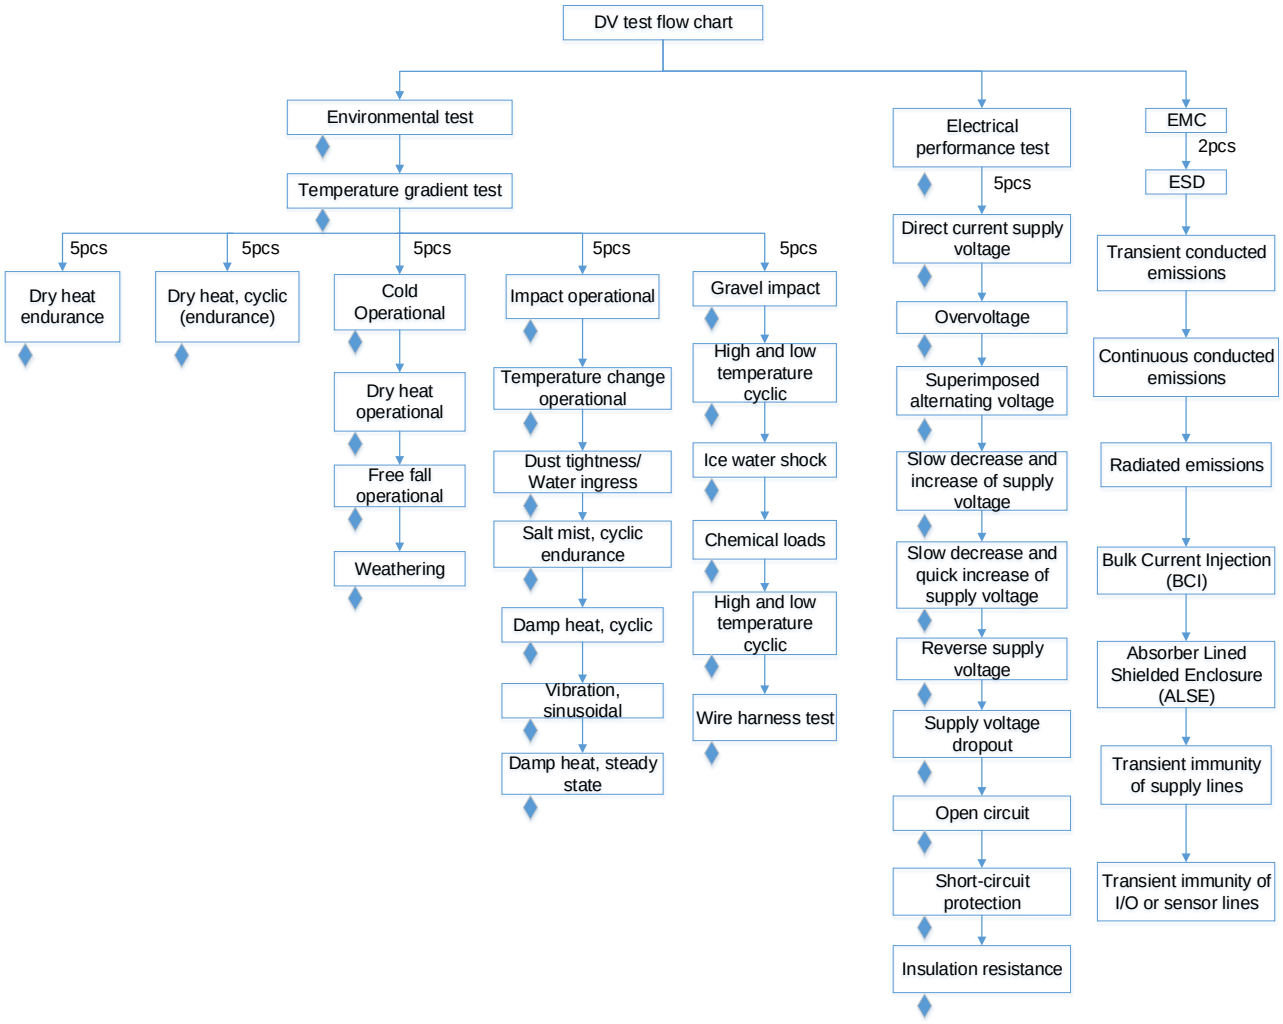
© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| Standard number | Title of standard |
| --- | --- |
| GB/T 2423.18-2012 | Environmental testing for electric and electronic products - Part 2: Test methods - Test Kb: Salt mist, Cyclic (sodium chloride solution) |
| GB/T 2423.22-2012 | Environmental testing for electric and electronic products - Part 2: Test methods - Test N: Change of temperature |
| GB/T 30038-2013 | Road vehicles - Degrees of electrical equipment protection (IP-Code) |
| Q-JLY-J7110195D-2017 | Technical specification for harness connector of vehicle |
| GB/T 21437.2-2008 | Road vehicles - Electrical disturbances from conduction and coupling - Part 2: Electrical transient conduction along supply lines only |
| GB/T 19951-2017 | Road vehicles - Test methods for electrical disturbances from electrostatic discharge |
| GB/T 18655-2010 | Vehicles boats and internal combustion engines - Radio disturbance characteristics - Limits and methods of measurement for the protection of on-board receivers |
| SMTC 3800006-2015 | General test specification for electrical/electronic components and subsystems, electromagnetic compatibility (Electrical transient conduction along supply lines) |
| GB/T 21437.3-2012 | Road vehicles - Electrical disturbances from conduction and coupling - Part 3: Electrical transient transmission by capacitive and inductive coupling via lines other than supply lines |
| CEVT | EMC Specification (BCI and RI) |

## 5.2 DV test verification

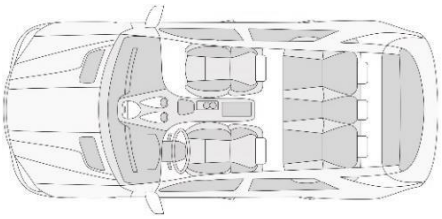
The product passed the DV tests according to the above standards.

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

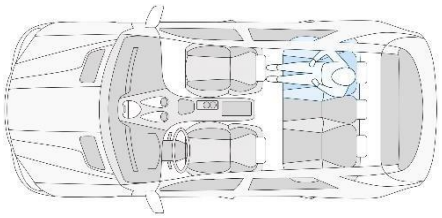
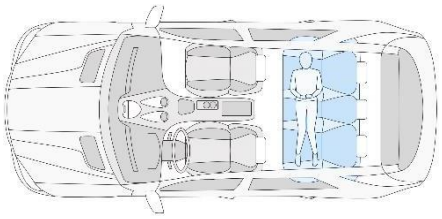
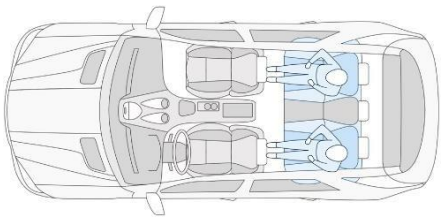
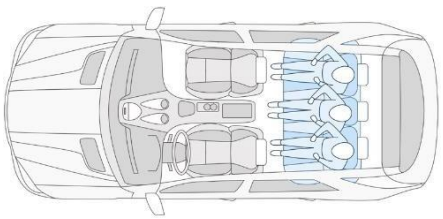



## 5.3 Performance test verification

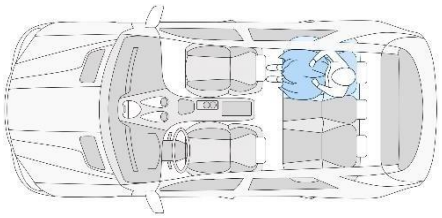
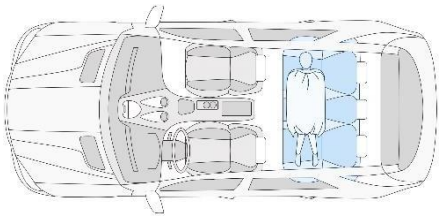
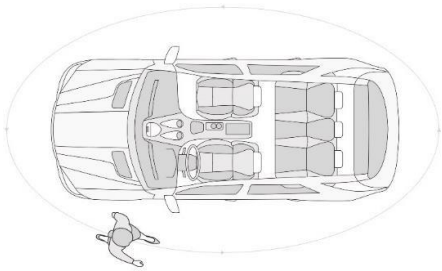
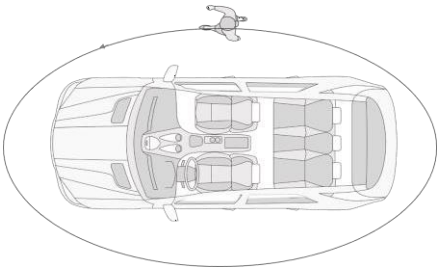
Based on the installation position shown in Figure 12, the performance of the radar is tested in the following scenarios. See below for details of test scenarios and test results.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
| --- | --- | --- | --- | --- | --- |
| 1 | Nobody is in the car (with the engine off/on) | The car is parked, no living objects in the cabin, car doors and windows are closed, no source of external vibration, no pedestrians, pets or other living objects) within 50cm away from the car. |  | Alarm not triggered | Passed |

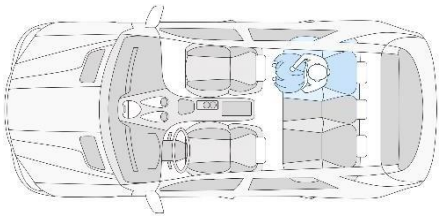
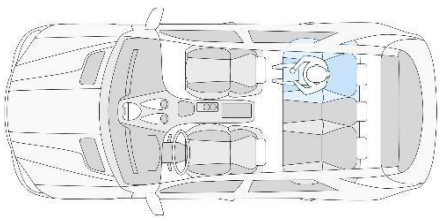
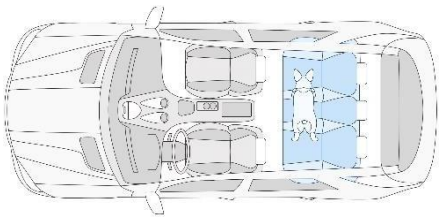
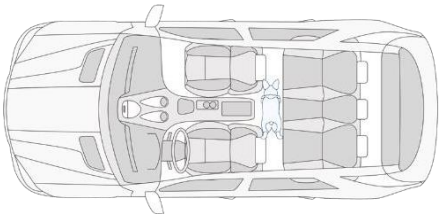
© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
|---|---|---|---|---|---|
| 2 | One adult sitting on the 2nd-row seat | The car is parked with the engine off, no pedestrians, pets or other living objects within 50 cm away from the vehicle. Car doors and windows are closed, no source of external vibration.<br>One adult is sitting on the 2nd-row seat. All three seats at the 2nd row are detected, each detecting for 1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 3 | One adult lying on the 2nd-row seats | The car is parked with the engine off, no pedestrians, pets or other living objects within 50 cm away from the vehicle. Car doors and windows are closed, no source of external vibration.<br>One adult without being covered is lying on the 2nd-row seats. Both lying facing or against the radar positions are detected, each detecting for 1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 4 | Two adults sitting (adjacently/separately) on the 2nd-row seats | The engine is shut down, no pedestrians, pets or other living objects within 50 cm around the vehicle. Car doors and windows are closed, no source of external vibration.<br>Two adults are sitting adjacently on the 2nd-row seats for 1 min. Two adults are sitting separately (one seat away from each other) forl min. |  | Alarm signals and occupancy status are issued | Passed |
| 5 | Three adults sitting on the 2nd-row seats | The engine is shut down, no pedestrians, pets or other living objects within 50 cm around the vehicle. Car doors and windows are closed, no source of external vibration.<br>Three adults are sitting adjacently on the 2nd-row seats for 30s. Two adults are sitting separately (one seat away from each other) for 1 min. |  | Alarm signals and occupancy status are issued | Passed |

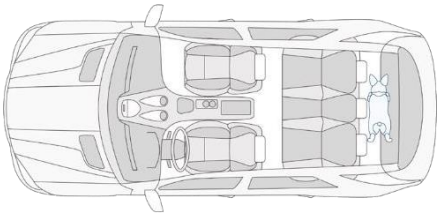
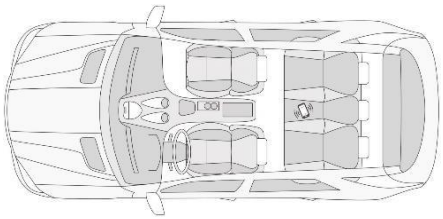
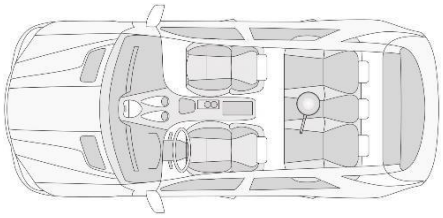
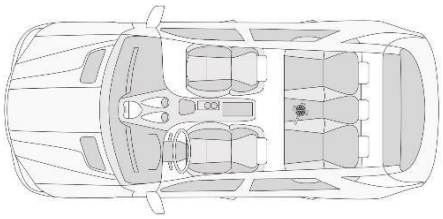
© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
|---|---|---|---|---|---|
| 6 | One adult covered with blanket sitting on the 2nd-row seat | The engine is shut down, no pedestrians, pets or other living objects within 50 cm around the vehicle. Car doors and windows are closed, no source of external vibration.<br>One adult covered with blanket is sitting on the 2nd-row seat. All three seats at the 2nd row are detected, each detecting for 1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 7 | One adult covered with blanket lying on the 2nd-row seats | The car is parked with the engine off, no pedestrians, pets or other living objects within 50 cm around the vehicle. Car doors and windows are closed, no source of external vibration.<br>One adult covered with blanket is lying on the 2nd-row seat. Both lying facing or against the radar positions are detected, each detecting for 30s. |  | Alarm signals and occupancy status are issued | Passed |
| 8 | One adult walking slowly around a car with closed windows | The car is parked with the engine off. Car doors and windows are closed, no source of external vibration.<br>One adult walks around the car, with each circle keeping a distance of 5cm, 10cm, 15cm, 20cm, 25cm, 30cm away from the car. |  | Alarm not triggered | Passed |
| 9 | One adult walking slowly around a car with open windows | The car is parked with the engine off and all windows open. No source of external vibration.<br>One adult walks around the car, with each circle keeping a distance of 5cm, 10cm, 15cm, 20cm, 25cm, 30cm away from the car. |  | Alarm not triggered | Passed |

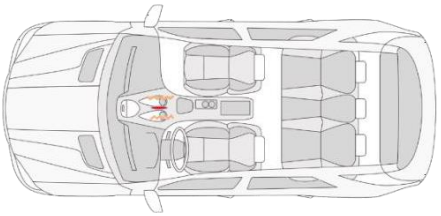
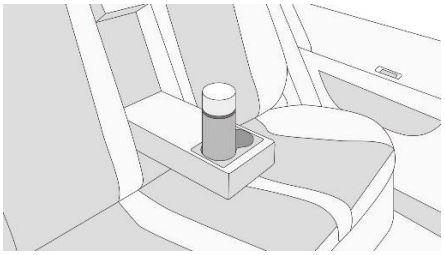
© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
|---|---|---|---|---|---|
| 10 | A 3-year-old child covered with blanket sitting on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no source of external vibration.<br>A 3-year-old child covered with blanket sits on the 2nd-row seat. All three seats at the 2nd row are detected, each detecting for1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 11 | A 3-year-old child sitting on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no source of external vibration.<br>A 3-year-old child covered with blanket sits on the 2nd-row seat. All three seats at the 2nd row are detected, each detecting for1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 12 | Pet staying on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no source of external vibration.<br>A pet stays on the 2nd-row seat for 1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 13 | Pet staying on the floor between the 1st and 2nd-row seats | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no source of external vibration.<br>A pet stays on the floor between the 1st and 2nd-row seats for1 min. |  | Alarm signals and occupancy status are issued | Passed |

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
|---|---|---|---|---|---|
| 14 | Pet staying in the trunk | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no source of external vibration.<br>A pet stays in the trunk for 1 min. |  | Alarm signals and occupancy status are issued | Passed |
| 15 | A buzzing phone on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects) within 50 cm around the car, no source of external vibration.<br>A buzzing phone is placed on the 2nd-row seats. All three seats at the 2nd row are detected, each detecting for 1 min. |  | Alarm not triggered | Passed |
| 16 | A metal pot on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no living objects in the cabin.<br>A metal pot is placed on the 2nd-row seats for 1 min. |  | Alarm not triggered | Passed |
| 17 | A running fan on the 2nd-row seat | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no living objects in the cabin.<br>A fan running at full speed is placed on the 2nd-row seats. All three seats at the 2nd row are detected, each detecting for 1 min. |  | Alarm not triggered | Passed |

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

| No. | Test scenario | Description | Illustration | Expected result | Test result |
| --- | --- | --- | --- | --- | --- |
| 18 | A hanging decoration on the interior rear-view mirror | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no living objects in the cabin.<br>A hanging decoration is hung on the interior rear-view mirror for 1 min. |  | Alarm not triggered | Passed |
| 19 | A metal cup in the cup holder | The car is parked with the engine off, doors & windows closed. No pedestrians, pets or other living objects within 50 cm around the car, no living objects in the cabin.<br>A metal cup is placed in the cup holder for 1 min. |  | Alarm not triggered | Passed |

— End —

© Freetech Intelligent Systems Co., Ltd. 2020. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.