



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20251202831E-02
Applicant: Shenzhen Shuying Technology Co., Ltd.
Address of Applicant: Room 01, 13th Floor, No. 9988 Shennan District, Shenzhen, China
Equipment Under Test (EUT):
Product: wan AIChef ultra (Smart Microwave Oven)
Model No.: DW226-B, DW226-G
Test Model No.: DW226-B
Brand Name: N/A
FCC ID: 2BB9R-DW226
Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Receipt: 2025-12-08
Date of Test: 2025-12-08 to 2025-12-29
Date of Issue: 2026-4-8
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20251202831E-02	Rev.01	Initial report	2026-4-8

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2020; KDB789033	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.207	ANSI C63.10-2020; KDB789033	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.407 (a)	ANSI C63.10-2020; KDB789033	PASS
Emission Bandwidth	47 CFR Part 15 Subpart C Section 15.407 (a)(e)	ANSI C63.10-2020; KDB789033	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	ANSI C63.10-2020; KDB789033	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.209 &15.407(b)	ANSI C63.10-2020; KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2020; KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	ANSI C63.10-2020; KDB789033	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application


3 Content

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENT	4
4 TEST REQUIREMENT	5
4.1 TEST SETUP	5
4.1.1 For Conducted test setup	5
4.1.2 For Radiated Emissions test setup	5
4.1.3 For Conducted Emissions test setup	6
4.2 TEST ENVIRONMENT	6
4.3 TEST CONDITION	7
5 GENERAL INFORMATION	9
5.1 CLIENT INFORMATION	9
5.2 GENERAL DESCRIPTION OF EUT	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	10
5.4 DESCRIPTION OF SUPPORT UNITS	11
5.5 TEST CONFIGURATION	11
5.6 TEST LOCATION	12
5.7 TEST FACILITY	12
5.8 DEVIATION FROM STANDARDS	12
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	12
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
5.11 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	12
6 EQUIPMENT LIST	13
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Emission Bandwidth	15
Appendix B): Maximum Conduct Output Power	104
Appendix C): Maximum Power Spectral Density	157
Appendix D): Band Edge Measurements	195
ANT1:	197
7.1.1 Test Result B1	197
7.1.2 Test Result B4	197
7.1.3 Test Graphs B1	200
7.1.4 Test Graphs B4	208
ANT2:	216
7.1.5 Test Result B1	216
7.1.6 Test Result B4	216
7.1.7 Test Graphs B1	219
7.1.8 Test Graphs B4	227
Appendix E): Frequency Stability	235
Appendix F): Antenna Requirement	238
Appendix G): Operation in the absence of information to the transmit	239
Appendix H): AC Power Line Conducted Emission	240
Appendix I): Restricted bands around fundamental frequency (Radiated Emission)	243
Appendix J): Radiated Spurious Emissions	254
8 PHOTOGRAPHS - EUT TEST SETUP	271
8.1 RADIATED SPURIOUS EMISSION	271
8.2 CONDUCTED EMISSION	272
8.3 RF CONDUCTED MEASUREMENT	273

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

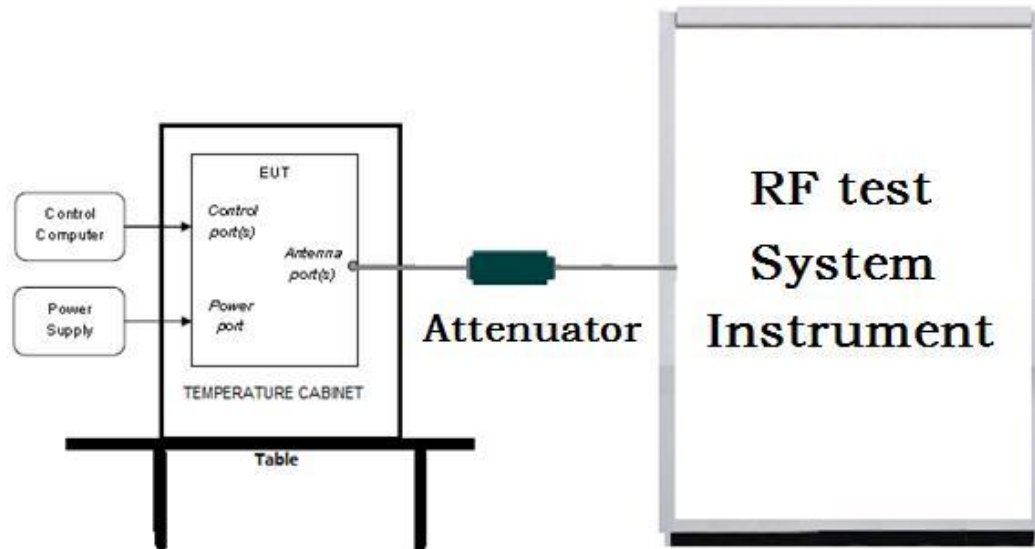

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

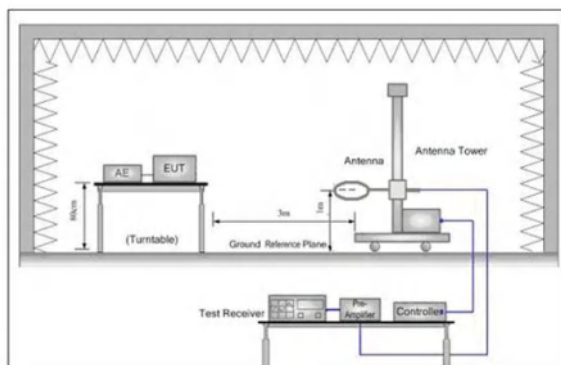


Figure 1. Below 30MHz

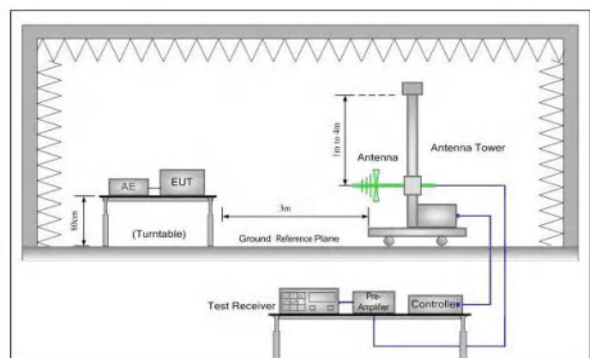


Figure 2. 30MHz to 1GHz


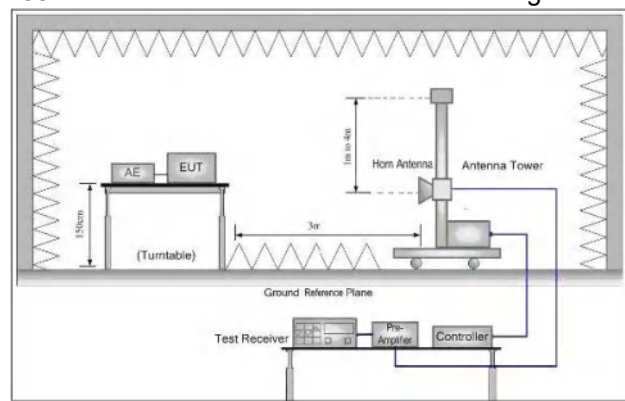


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

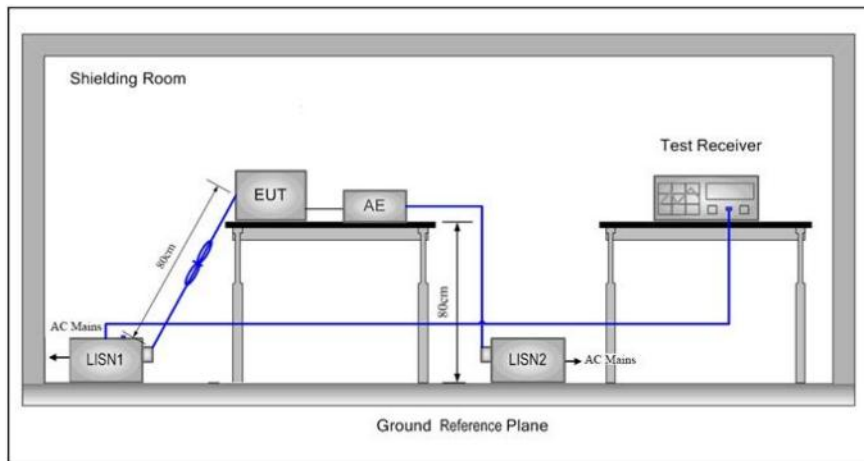

4.2 Test Environment

Operating Environment:		
Conducted Emissions:		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
Radiated Emissions:		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	120
TL/VL	-30	108
TH/VL	50	108
TL/VH	-30	132
TH/VH	50	132
Remark:		
1)The EUT just work in such extreme temperature of -30 °C to 50 °C and the extreme voltage of 108V to 132V, so here the EUT is tested in the temperature of -30 °C to 50 °C and the voltage of 108V to 132V.		
2)VN: Normal Voltage; TN: Normal Temperature;		
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;		
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.		

4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac/ax(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac/ax(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11n/ac/ax(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac/ax(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac/ax(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11n/ac/ax(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

serial-com3 (7) - SecureCRT

文件(F) 编辑(E) 查看(V) 选项(O) 传输(T) 脚本(S) 工具(L) 帮助(H)

输入主机 <Alt+R> 清除屏幕和回家(O)

serial-com3 (7)

```

1[00:00:15,977] [HLUpgrade.cxx: 310] cmd SX1280Set DutMode 1 1
cmd SX1280Set DutMode 1 1
1[00:01:42,011] [HLDebugCmd.cxx: 680] cmd SX1280Set channelB 2
[root@hollyland]:/$:2[00:01:42,021] [HL SX1280Com.cxx:1227] Serial mode changed, key: 11
1[00:01:42,023] [HL SX1280Com.cxx:1334] Serial mode changed
1[00:01:42,070] [HL SX1280Com.cxx:1341] Serial mode changed, key: 11
cmd SX1280Set channelB 2
[root@hollyland]:/$:1[00:01:46,347] [HLDebugCmd.cxx: 680] cmd SX1280Set powerB -5
1[00:01:46,354] [HL SX1280Com.cxx:1038] Serial power is 20 ----- 1
cmd SX1280Set powerB -5
[root@hollyland]:/$:2[00:01:50,643] [HLDebugCmd.cxx: 680] cmd SX1280Set powerB -5
1[00:01:50,646] [HL SX1280Com.cxx:1050] Serial power is 1
[root@hollyland]:/$:
[root@hollyland]:/$:

```

Default

默认

Serial: COM3, 115200 24, 21 24行, 80列 Linux 大写 数字

Test mode:

Pre-scan under all rate at lowest channel for Ant1

Through Pre-scan, 6Mbps is the worst case of 802.11a (20M); MCS0 is the worst case of 802.11n (20M); MCS0 is the worst case of 802.11ac (20M); MCS0 is the worst case of 802.11n(40M); MCS0 is the worst case of 802.11ac (40M); MCS0 is the worst case of 802.11ac (80M);MCS0 is the worst case of 802.11ax (20M); MCS0 is the worst case of 802.11ax (40M); MCS0 is the worst case of 802.11ax (80M);

5 General Information

5.1 Client Information

Applicant:	Shenzhen Shuying Technology Co., Ltd.
Address of Applicant:	Room 01, 13th Floor, No. 9988 Shennan District, Shenzhen, China
Manufacturer:	Shenzhen Shuying Technology Co., Ltd.
Address of Manufacturer:	Room 01, 13th Floor, No. 9988 Shennan District, Shenzhen, China
Factory:	Jiangmen Jens Smart Appliances Co., Ltd.
Address of Factory:	No.88 Heshun Road Hechen Town Heshan City Jiangmen Guangdong Province China

5.2 General Description of EUT

Product Name:	wan AlChef ultra (Smart Microwave Oven)
Model No.:	DW226-B, DW226-G
Test Model No.:	DW226-B
Trade Mark:	N/A
Software Version:	5.10.14
Hardware Version:	3.0
EUT Power Supply:	Power supply AC 120V
EUT Supports Radios application:	U-NII-1: 5.15-5.25GHz;U-NII-3: 5.725-5.850GHz
EUT Type:	Client devices

5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac/ax(20M): 5150MHz ~5250 MHz IEEE802.11n/ac/ax(40M): 5150MHz ~5250 MHz IEEE802.11ac/ax(80M): 5150MHz ~5250 MHz IEEE 802.11a/n/ac/ax(20M): 5725MHz ~5850 MHz IEEE802.11n/ac/ax(40M): 5725MHz ~5850 MHz IEEE802.11ac/ax(80M): 5725MHz ~5850 MHz
Channel Numbers:	IEEE 802.11a/n/ac/ax(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac/ax(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac/ax(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac/ax(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac/ax(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac/ax(80M): 5725MHz ~5850MHz/ 1 channel
Type of Modulation:	IEEE for 802.11a/n/ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11ax: OFDMA(1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Sample Type:	☒ Mobile ☐ Portable
Test Software of EUT:	Serial
Antenna Type:	FPC antenna
Antenna gain:	Ant1:2.93dBi Ant2:2.93dBi Ant1+Ant2:5.94dBi
Cable loss:	1.0 dB

Operation Frequency each of channel


(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210	/	/
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825	/	/
40MHz	151	5755	159	5795
80MHz	165	5775	/	/

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

5.5 Test configuration

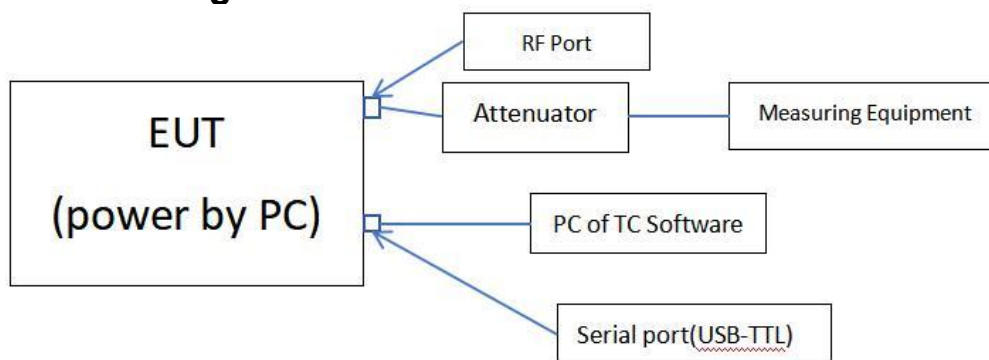

5.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.7 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2025/9/1	2026/8/31
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E

Appendix A): Emission Bandwidth

26dB Emission bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)


Test Method: KDB 789033 D02 II C 2

Limit: ≥ 500 kHz

Test Procedure:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup Diagram

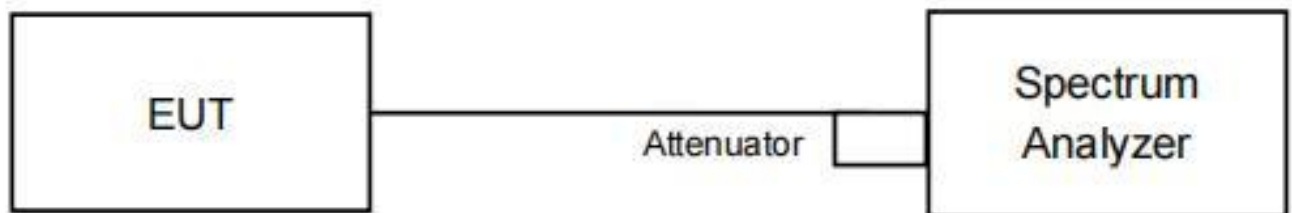

Result Table

ANT1:

TestMode	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	5180	20.08	5170.00	5190.08
	5200	20.04	5189.72	5209.76
	5240	20.04	5230.36	5250.40
	5745	19.24	5735.36	5754.60
	5785	20.48	5775.24	5795.72
	5825	20.44	5814.80	5835.24
11N20SISO	5180	20.44	5169.72	5190.16
	5200	20.60	5189.40	5210.00
	5240	20.84	5229.84	5250.68
	5745	20.68	5734.56	5755.24
	5785	21.28	5774.48	5795.76
	5825	20.72	5814.40	5835.12
11N40SISO	5190	40.40	5169.84	5210.24
	5230	41.12	5209.44	5250.56
	5755	40.64	5734.84	5775.48
	5795	40.40	5775.08	5815.48
11AC20SISO	5180	20.96	5169.36	5190.32
	5200	20.44	5189.56	5210.00
	5240	20.84	5229.76	5250.60
	5745	20.76	5734.88	5755.64
	5785	21.32	5774.64	5795.96
	5825	21.24	5814.24	5835.48
11AC40SISO	5190	39.92	5169.84	5209.76
	5230	41.20	5209.84	5251.04
	5755	40.16	5734.76	5774.92
	5795	40.56	5774.76	5815.32
11AC80SISO	5210	80.80	5169.36	5250.16
	5775	81.44	5734.84	5816.28
11AX20SISO	5180	20.52	5169.56	5190.08
	5200	20.52	5189.56	5210.08
	5240	24.56	5228.64	5253.20
	5745	20.92	5735.00	5755.92
	5785	20.64	5774.60	5795.24
	5825	24.48	5810.72	5835.20

11AX40SISO	5190	40.24	5169.68	5209.92
	5230	41.28	5209.36	5250.64
	5755	40.64	5734.76	5775.40
	5795	41.12	5774.28	5815.40
11AX80SISO	5210	80.00	5170.00	5250.00
	5775	80.96	5735.00	5815.96

TestMode	Freq(MHz)	6db EBW [MHz]	Limit[MHz]	Verdict
11A	5745	16.08	0.5	PASS
	5785	16.44	0.5	PASS
	5825	16.36	0.5	PASS
11N20SISO	5745	17.60	0.5	PASS
	5785	32.56	0.5	PASS
	5825	34.96	0.5	PASS
11N40SISO	5755	32.56	0.5	PASS
	5795	34.96	0.5	PASS
11AC20SISO	5745	17.16	0.5	PASS
	5785	17.56	0.5	PASS
	5825	17.60	0.5	PASS
11AC40SISO	5755	32.56	0.5	PASS
	5795	25.12	0.5	PASS
11AC80SISO	5775	73.92	0.5	PASS
11AX20SISO	5745	16.28	0.5	PASS
	5785	17.16	0.5	PASS
	5825	17.28	0.5	PASS
11AX40SISO	5755	35.04	0.5	PASS
	5795	34.08	0.5	PASS
11AX80SISO	5775	75.84	0.5	PASS

TestMode	Freq(MHz)	OCB [MHz]
11A	5180	16.903
	5200	16.743
	5240	17.263
	5745	16.743
	5785	17.263
	5825	17.223
11N20SISO	5180	17.782
	5200	17.982
	5240	18.182
	5745	17.782
	5785	18.102
	5825	18.102
11N40SISO	5190	35.724
	5230	36.444
	5755	35.964
	5795	35.964
11AC20SISO	5180	18.102
	5200	17.942
	5240	17.942
	5745	17.982
	5785	18.182
	5825	18.062
11AC40SISO	5190	35.884
	5230	36.284
	5755	35.964
	5795	36.284
11AC80SISO	5210	75.604
	5775	75.764
11AX20SISO	5180	17.822
	5200	18.142
	5240	18.102
	5745	18.062
	5785	18.022
	5825	18.062
11AX40SISO	5190	36.284

	5230	36.683
	5755	36.044
	5795	36.124
11AX80SISO	5210	75.764
	5775	75.924

ANT2:

TestMode	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	5180	20.48	5169.88	5190.36
	5200	23.24	5186.72	5209.96
	5240	22.44	5229.88	5252.32
	5745	21.36	5733.60	5754.96
	5785	20.12	5774.92	5795.04
	5825	22.40	5814.88	5837.28
11N20SISO	5180	20.44	5169.68	5190.12
	5200	20.32	5189.72	5210.04
	5240	21.56	5230.00	5251.56
	5745	20.16	5734.92	5755.08
	5785	21.76	5773.56	5795.32
	5825	21.96	5814.32	5836.28
11N40SISO	5190	40.80	5169.60	5210.40
	5230	40.80	5209.52	5250.32
	5755	41.68	5734.12	5775.80
	5795	41.20	5774.12	5815.32
11AC20SISO	5180	20.40	5169.68	5190.08
	5200	21.60	5188.36	5209.96
	5240	21.44	5229.88	5251.32
	5745	20.24	5734.96	5755.20
	5785	20.64	5774.92	5795.56
	5825	20.96	5814.40	5835.36
11AC40SISO	5190	40.48	5169.68	5210.16
	5230	47.44	5206.24	5253.68
	5755	40.40	5735.08	5775.48
	5795	40.80	5774.76	5815.56
11AC80SISO	5210	87.04	5162.96	5250.00
	5775	95.20	5734.20	5829.40
11AX20SISO	5180	24.60	5166.80	5191.40
	5200	22.36	5189.60	5211.96
	5240	20.48	5229.84	5250.32
	5745	20.20	5735.00	5755.20
	5785	22.72	5773.60	5796.32
	5825	20.36	5814.64	5835.00
11AX40SISO	5190	40.48	5169.52	5210.00

11AX80SISO	5230	51.20	5202.32	5253.52
	5755	40.64	5734.92	5775.56
	5795	40.24	5774.84	5815.08
	5210	90.24	5159.76	5250.00
	5775	82.56	5733.72	5816.28

TestMode	Freq(MHz)	6db EBW [MHz]	Limit[MHz]	Verdict
11A	5745	16.40	0.5	PASS
	5785	17.28	0.5	PASS
	5825	17.56	0.5	PASS
11N20SISO	5745	15.92	0.5	PASS
	5785	17.16	0.5	PASS
	5825	17.56	0.5	PASS
11N40SISO	5755	35.04	0.5	PASS
	5795	33.92	0.5	PASS
11AC20SISO	5745	16.08	0.5	PASS
	5785	16.64	0.5	PASS
	5825	17.28	0.5	PASS
11AC40SISO	5755	35.04	0.5	PASS
	5795	35.12	0.5	PASS
11AC80SISO	5775	75.84	0.5	PASS
11AX20SISO	5745	15.40	0.5	PASS
	5785	16.92	0.5	PASS
	5825	17.56	0.5	PASS
11AX40SISO	5755	35.04	0.5	PASS
	5795	35.12	0.5	PASS
11AX80SISO	5775	73.92	0.5	PASS

TestMode	Freq(MHz)	OCB [MHz]
11A	5180	17.023
	5200	17.103
	5240	17.183
	5745	17.063
	5785	17.263
	5825	17.303
11N20SISO	5180	18.262
	5200	18.222
	5240	18.102
	5745	17.822
	5785	18.302
	5825	18.422
11N40SISO	5190	35.964
	5230	36.843
	5755	36.444
	5795	36.124
11AC20SISO	5180	17.982
	5200	17.982
	5240	18.022
	5745	18.022
	5785	18.222
	5825	17.902
11AC40SISO	5190	36.124
	5230	36.683
	5755	36.284
	5795	36.364
11AC80SISO	5210	76.404
	5775	75.924
11AX20SISO	5180	18.262
	5200	18.102
	5240	18.182
	5745	18.142
	5785	17.982
	5825	18.062
11AX40SISO	5190	36.124


	5230	36.843
	5755	36.364
	5795	36.364
11AX80SISO	5210	76.084
	5775	75.924

Note:

Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.


Test Graph

11A_Ant1_5180

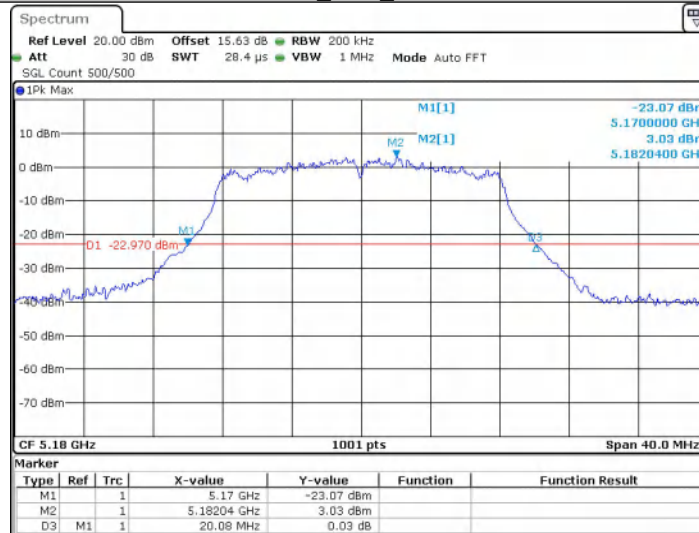


Date: 23 DEC 2025 17:04:02

11A_Ant1_5200

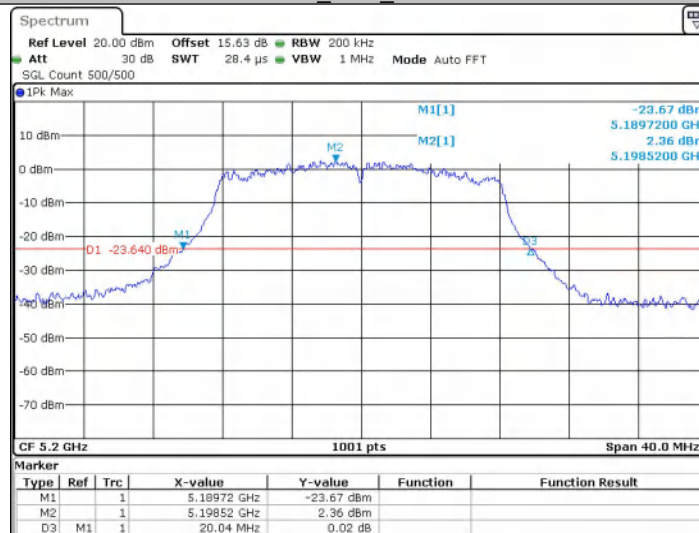


Date: 23 DEC 2025 17:06:32

11A_Ant1_5240

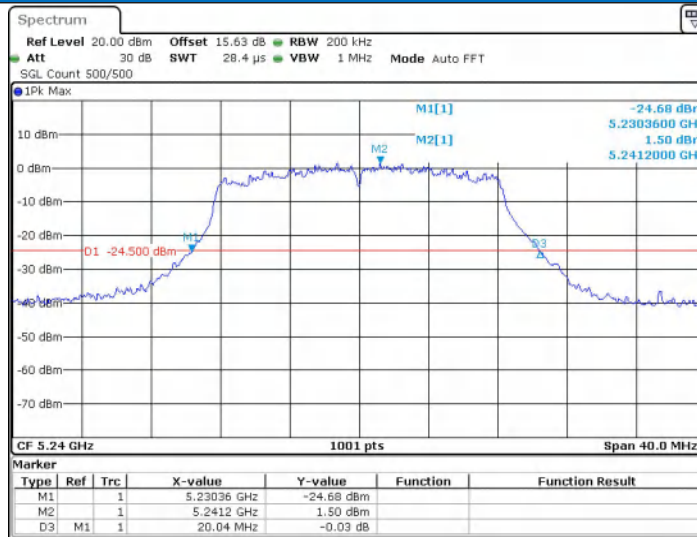


Date: 23 DEC 2025 17:07:53

11A_Ant1_5745

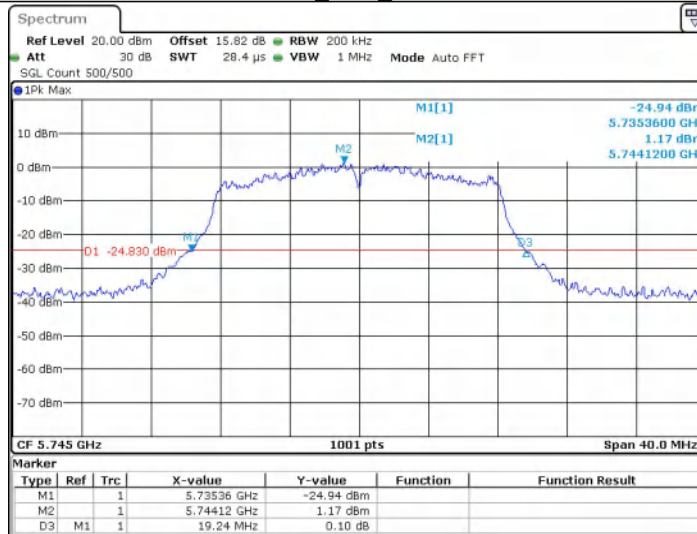


Date: 23 DEC 2025 17:10:43

11A_Ant1_5785

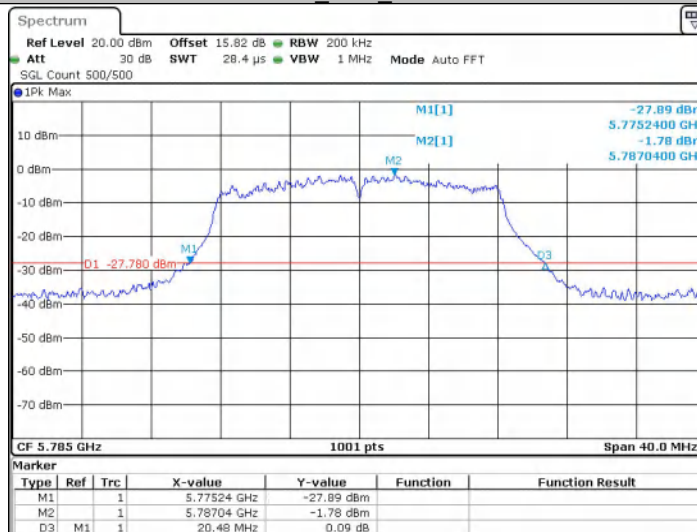


Date: 23 DEC 2025 17:12:51

11A_Ant1_5825

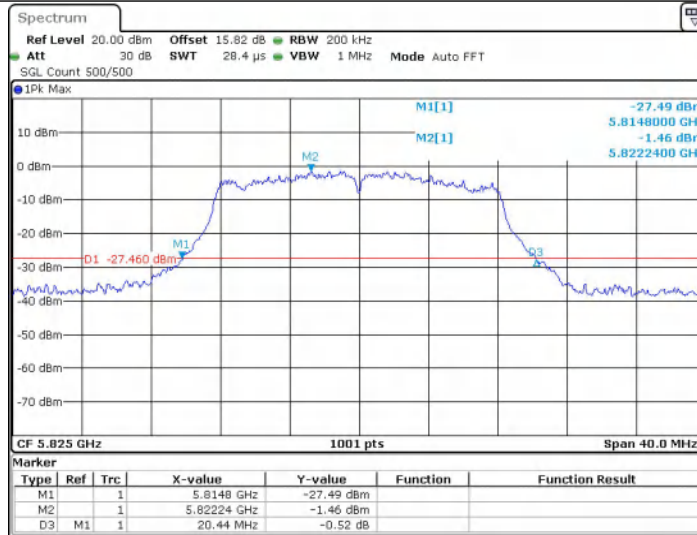


Date: 23 DEC 2025 17:17:59

11N20SISO_Ant1_5180

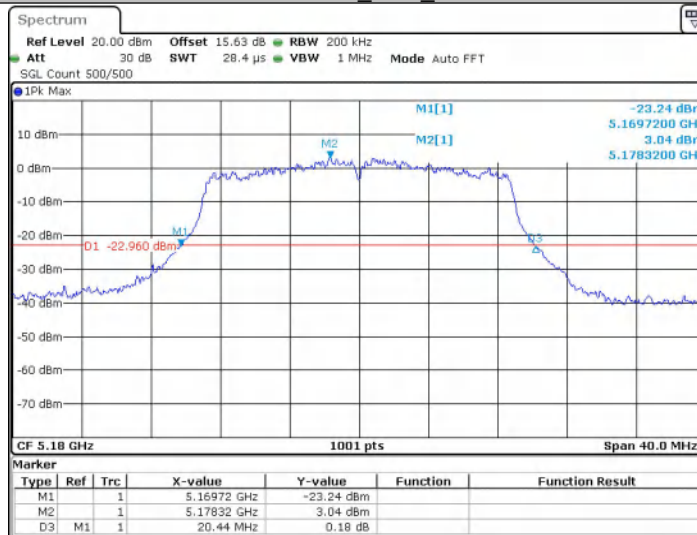


Date: 23 DEC 2025 17:19:43

11N20SISO_Ant1_5200

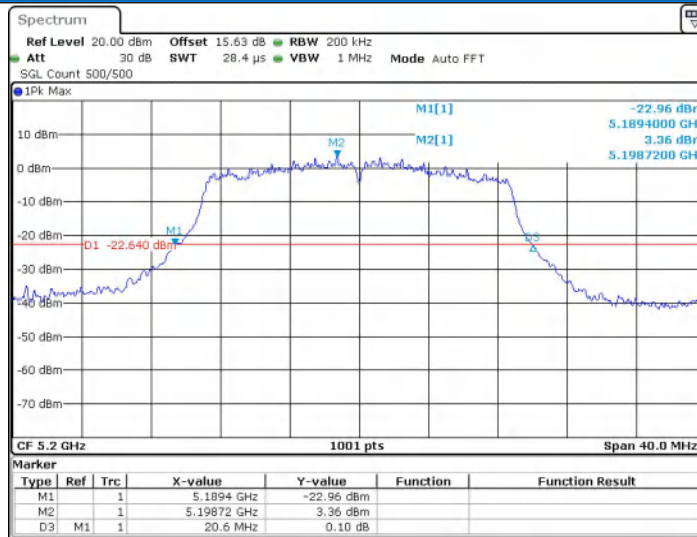


Date: 23 DEC 2025 17:34:24

11N20SISO_Ant1_5240

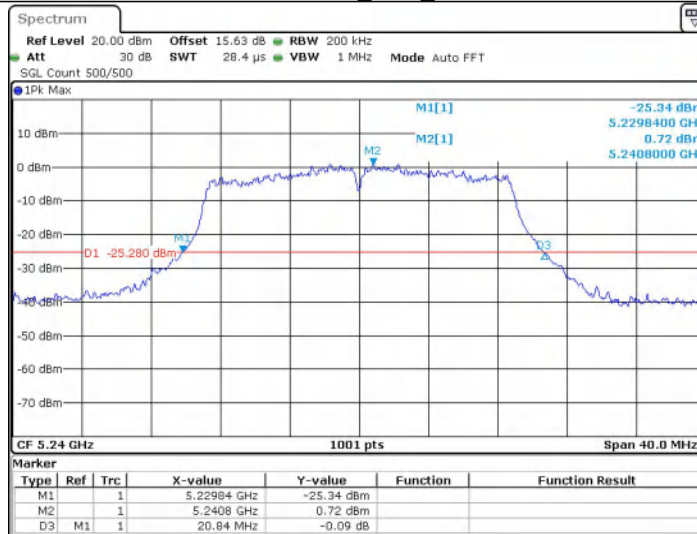


Date: 23 DEC 2025 17:37:01

11N20SISO_Ant1_5745

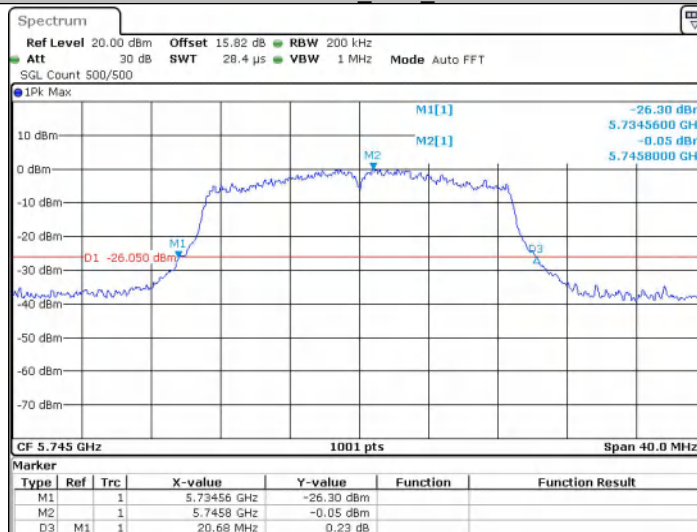


Date: 23 DEC 2025 17:38:50

11N20SISO_Ant1_5785

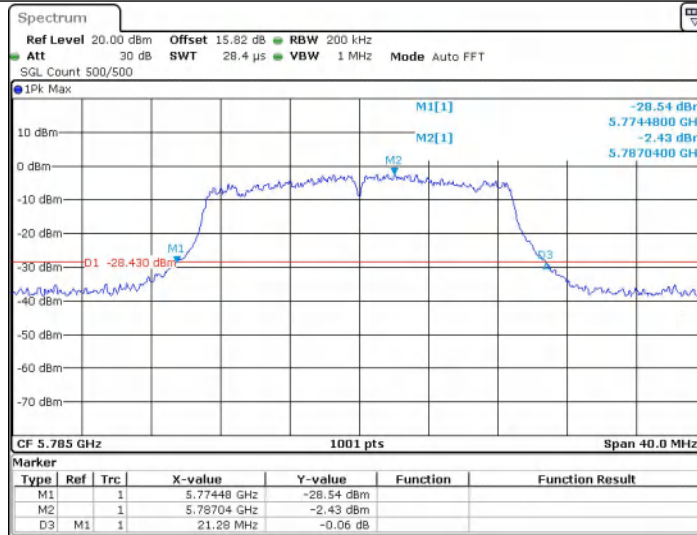


Date: 23 DEC 2025 17:42:03

11N20SISO_Ant1_5825

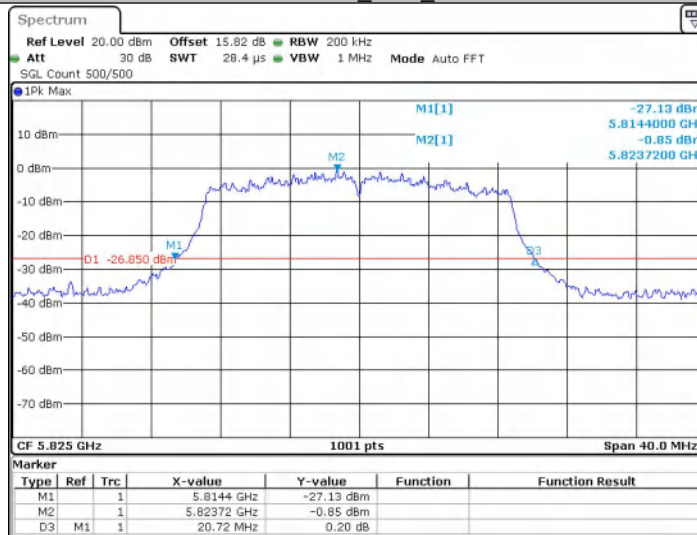


Date: 23 DEC 2025 17:45:16

11N40SISO_Ant1_5190

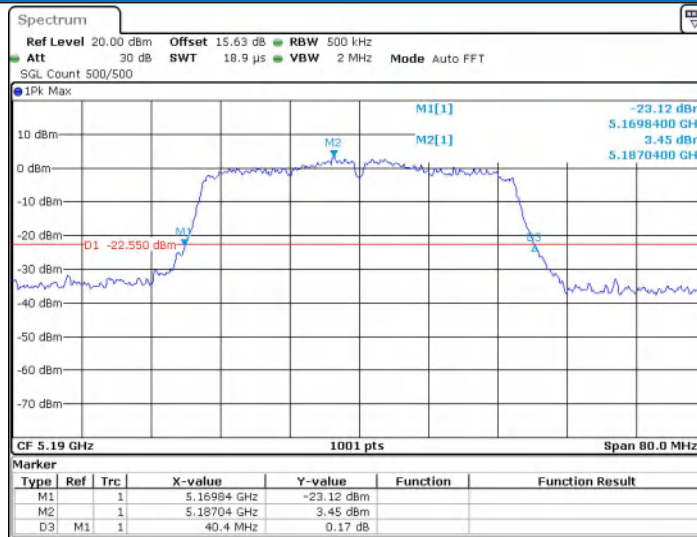


Date: 23 DEC 2025 17:46:57

11N40SISO_Ant1_5230

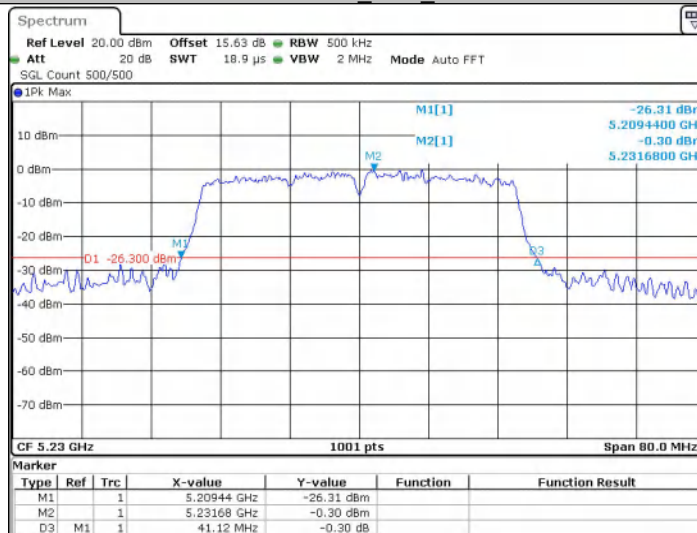


Date: 25 DEC 2025 14:38:41

11N40SISO_Ant1_5755

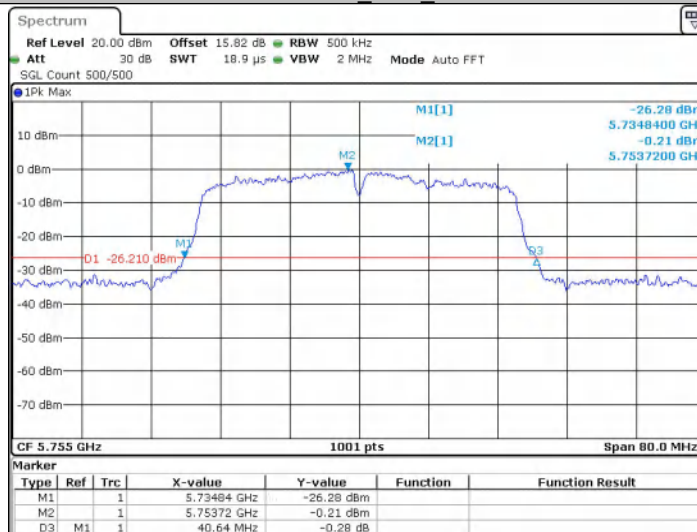


Date: 23 DEC 2025 18:36:05

11N40SISO_Ant1_5795

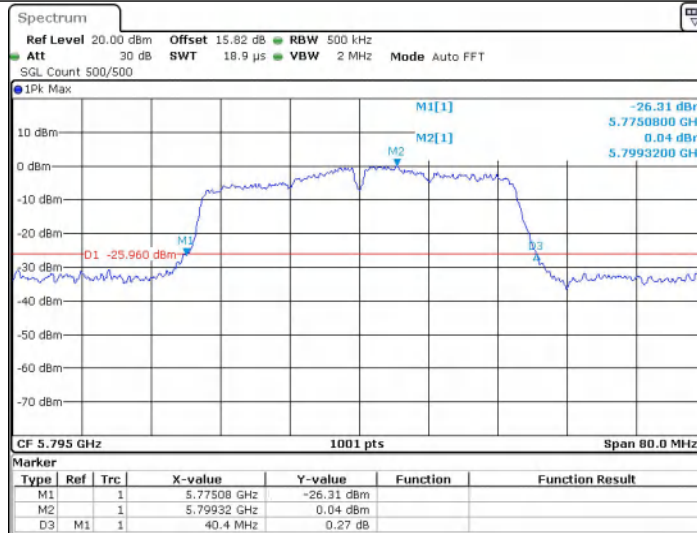


Date: 23 DEC 2025 18:38:25

11AC20SISO_Ant1_5180

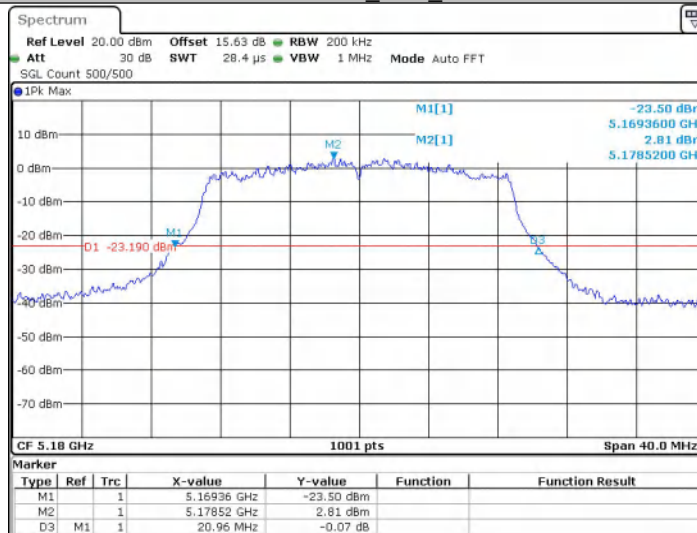


Date: 23 DEC 2025 18:40:10

11AC20SISO_Ant1_5200

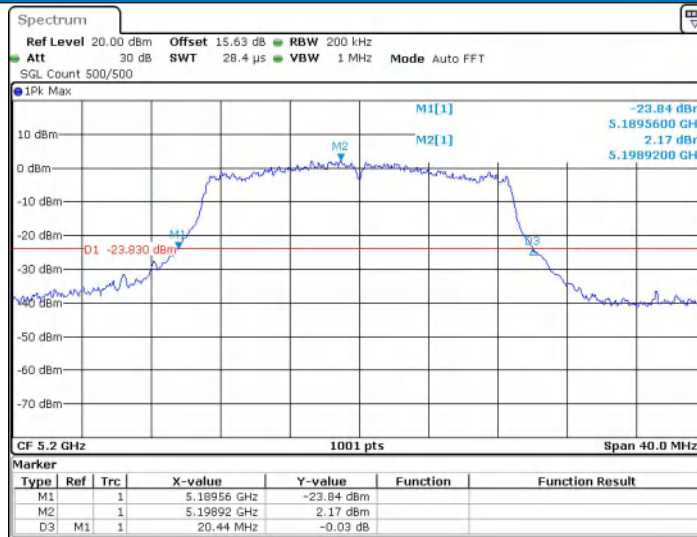


Date: 23 DEC 2025 18:42:46

11AC20SISO_Ant1_5240

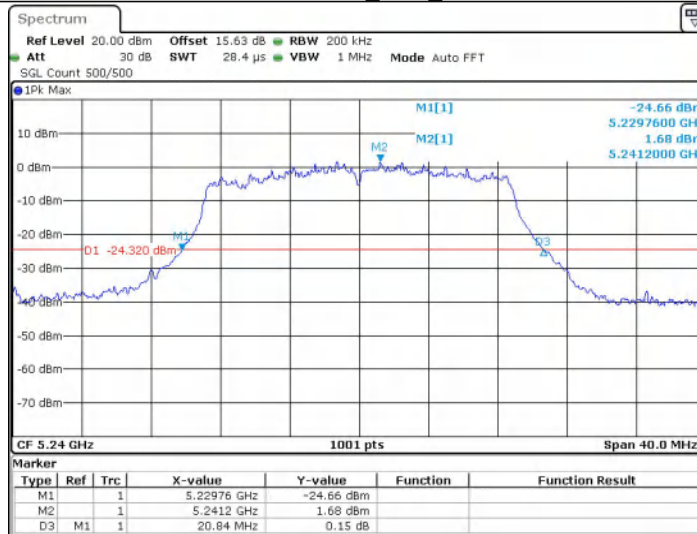


Date: 23 DEC 2025 18:44:09

11AC20SISO_Ant1_5745

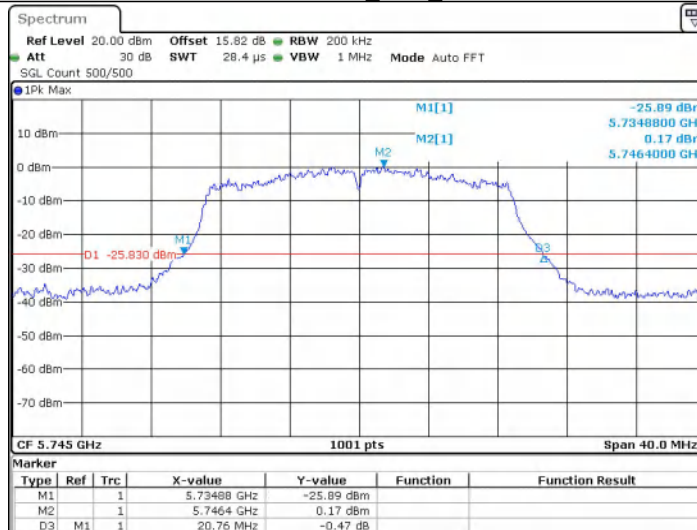


Date: 23 DEC 2025 18:46:26

11AC20SISO_Ant1_5785

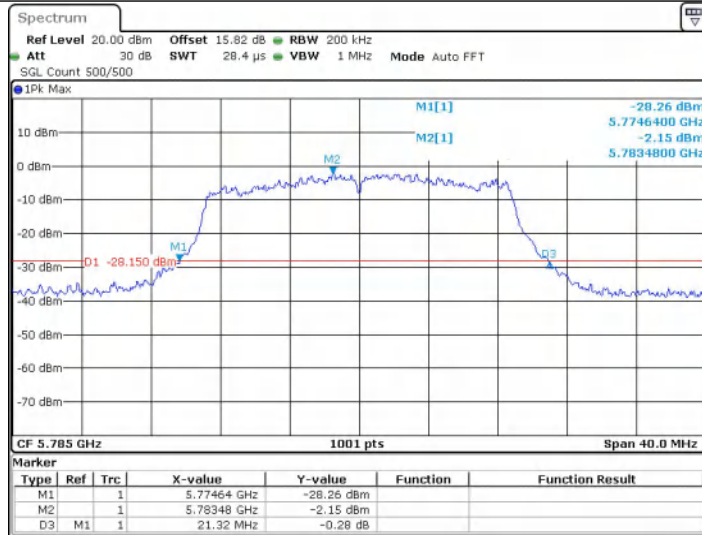


Date: 23 DEC 2025 18:49:33

11AC20SISO_Ant1_5825

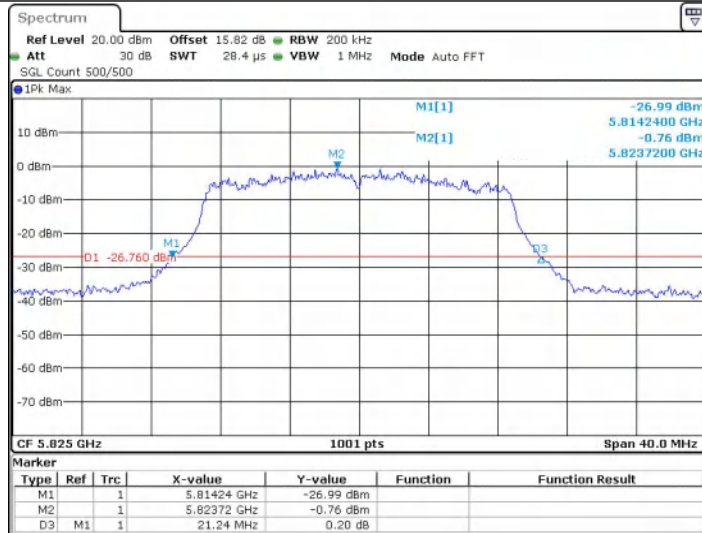


Date: 23 DEC 2025 18:50:42


11AC40SISO_Ant1_5190

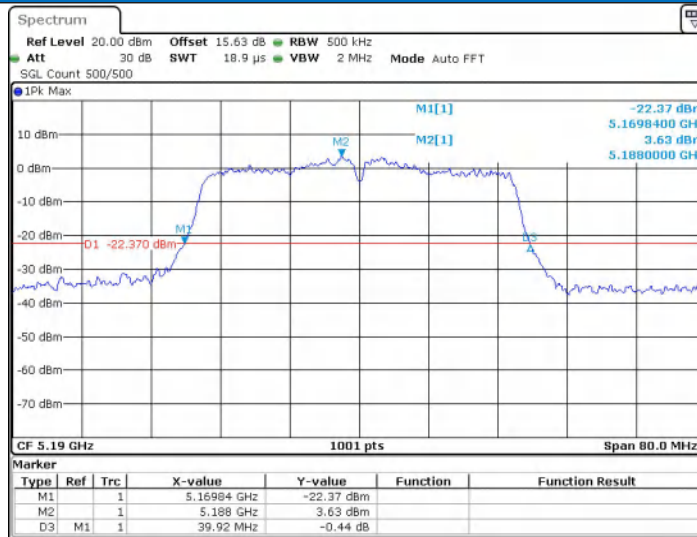


11AC40SISO_Ant1_5230

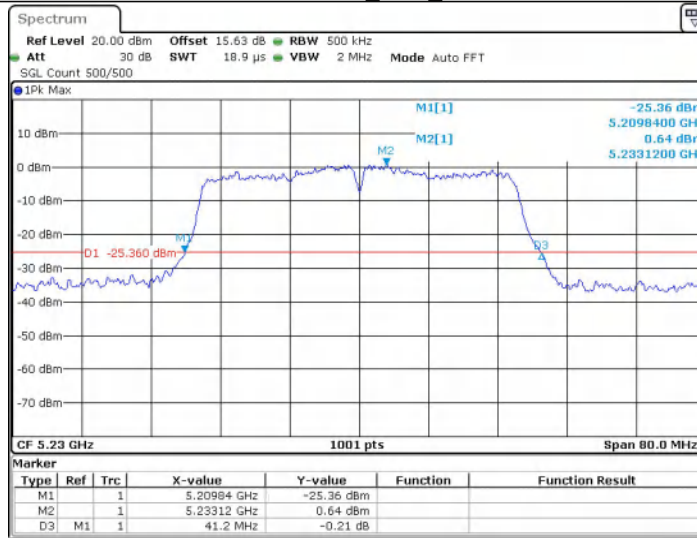

11AC40SISO_Ant1_5755

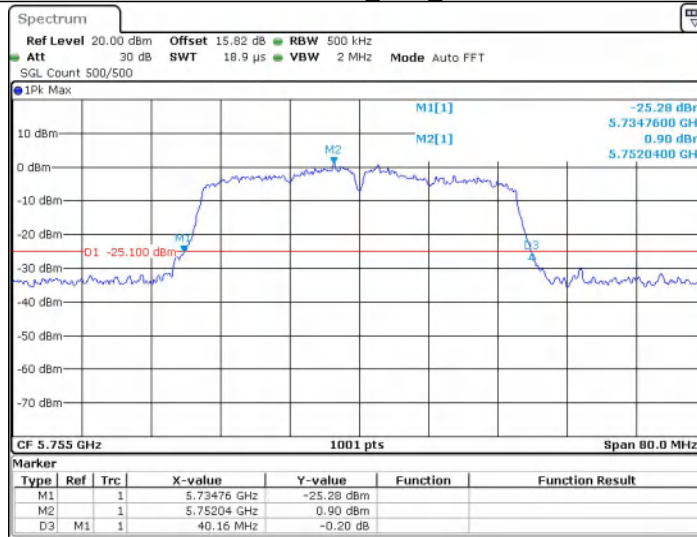


11AC40SISO_Ant1_5795

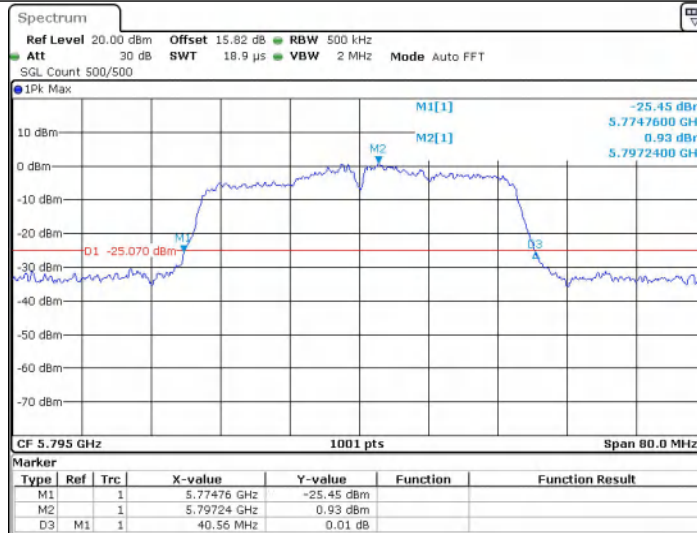


Date: 23 DEC 2025 19:00:06

11AC80SISO_Ant1_5210

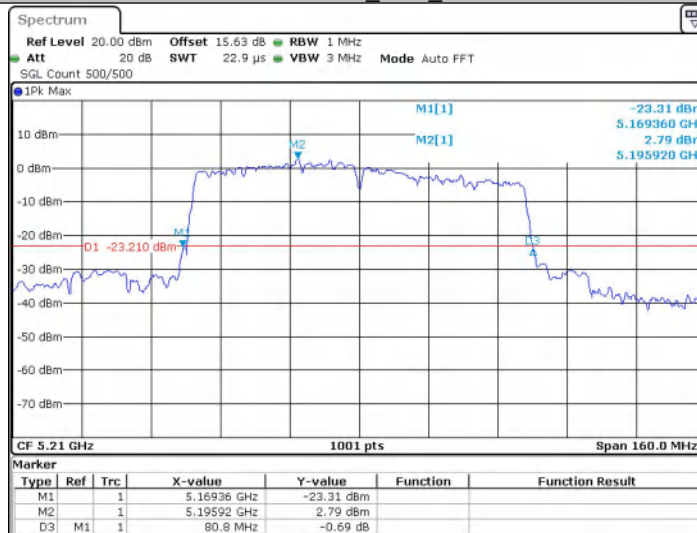


Date: 25 DEC 2025 11:46:05

11AC80SISO_Ant1_5775

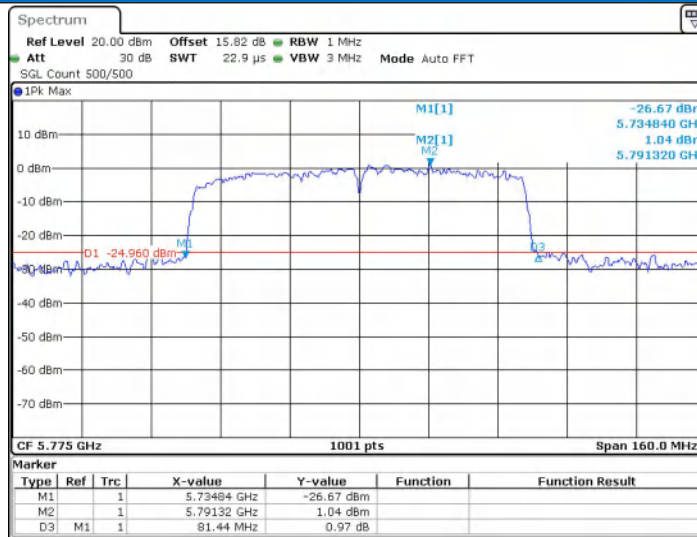


Date: 24.DEC.2025 17:27:35

11AX20SISO_Ant1_5180

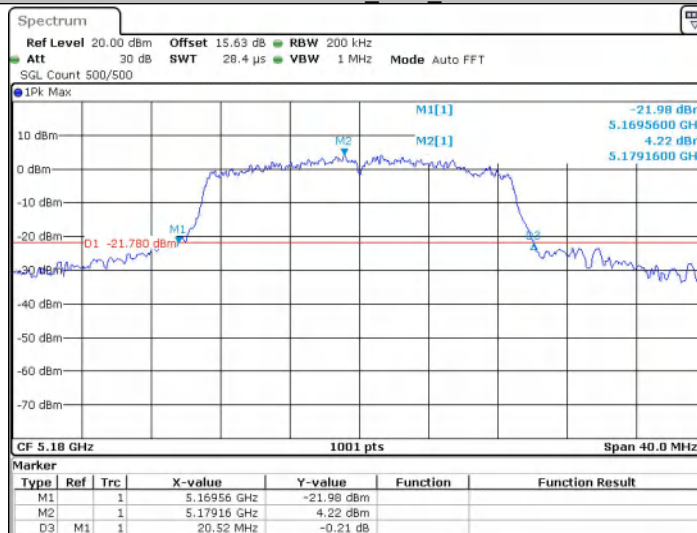


Date: 24.DEC.2025 17:31:03

11AX20SISO_Ant1_5200

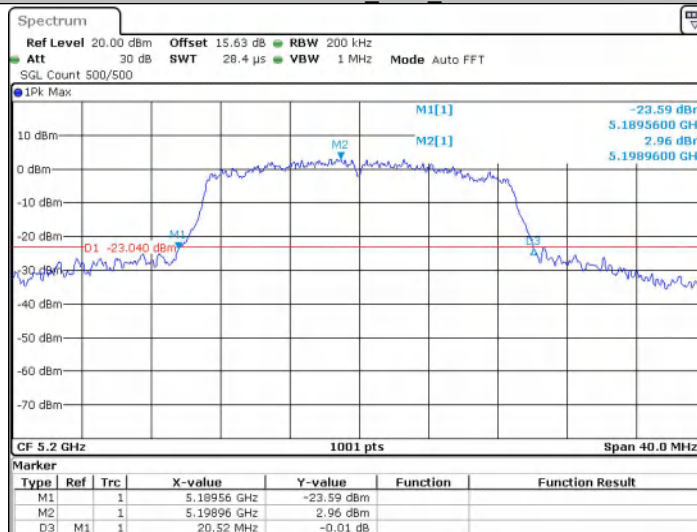


Date: 24.DEC.2025 17:40:24

11AX20SISO_Ant1_5240

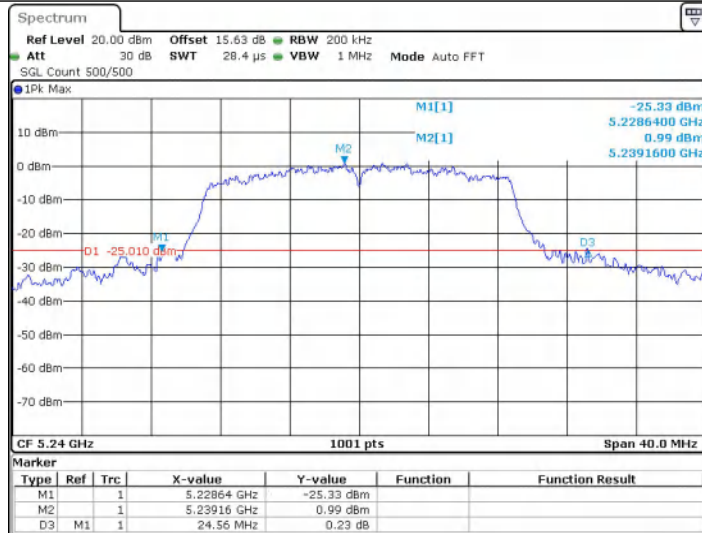


Date: 24 DEC 2025 17:43:36

11AX20SISO_Ant1_5745

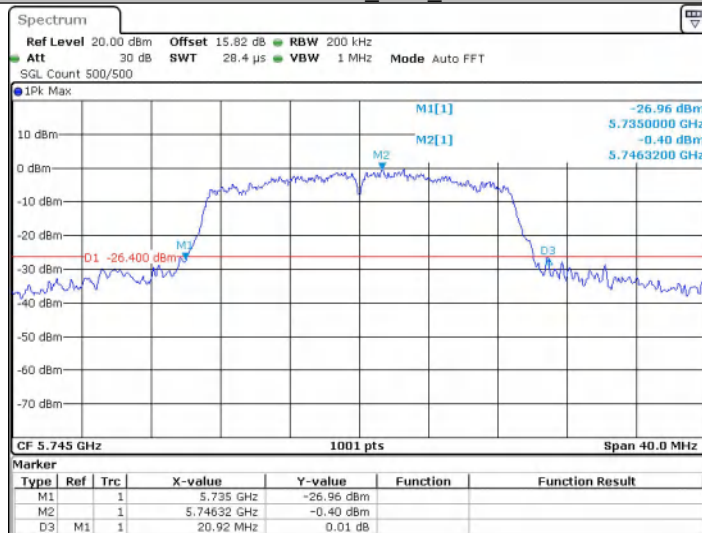


Date: 24 DEC 2025 17:48:40

11AX20SISO_Ant1_5785

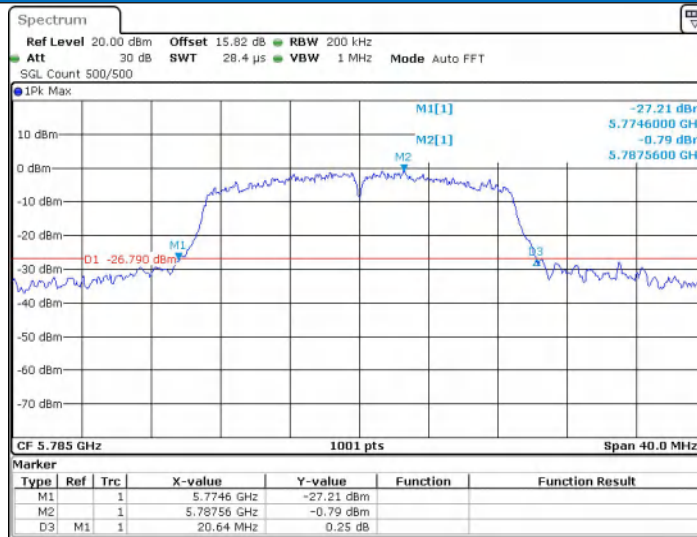


Date: 24 DEC 2025 17:50:19

11AX20SISO_Ant1_5825

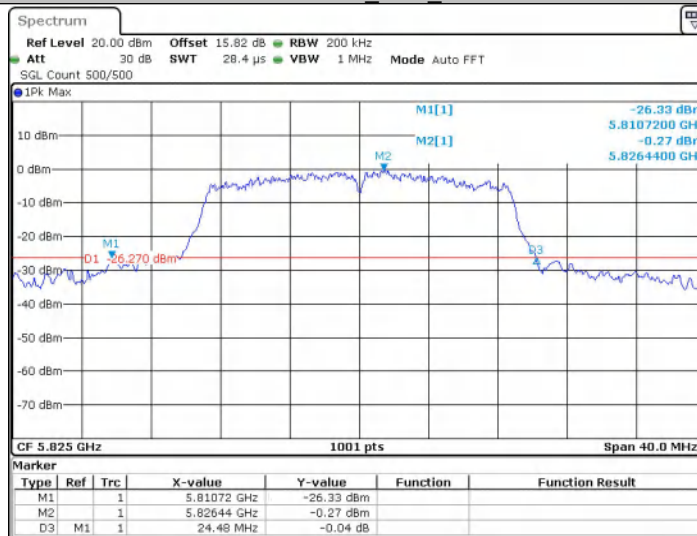


Date: 24 DEC 2025 17:51:28

11AX40SISO_Ant1_5190

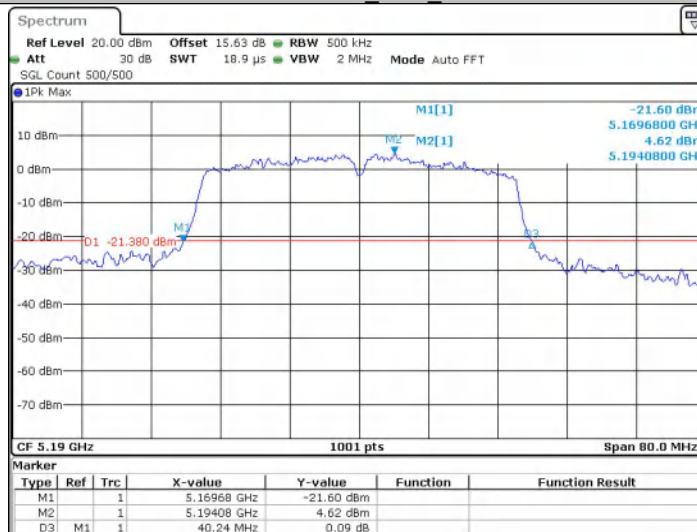


Date: 24 DEC 2025 17:53:39

11AX40SISO_Ant1_5230

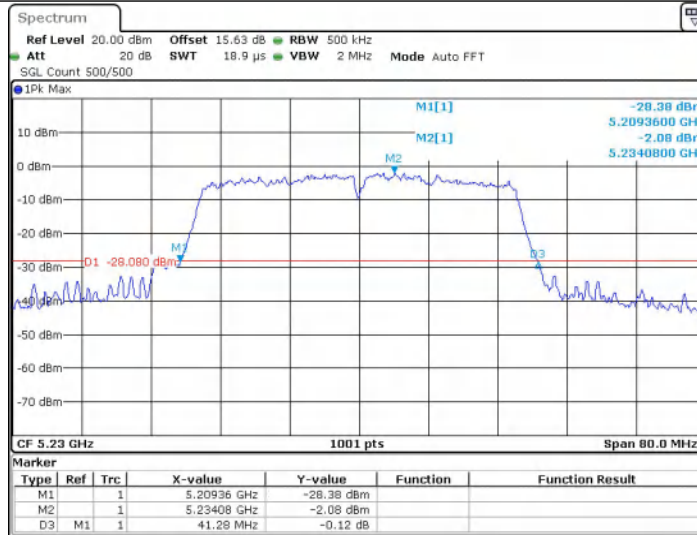


Date: 25 DEC 2025 11:52:26

11AX40SISO_Ant1_5755

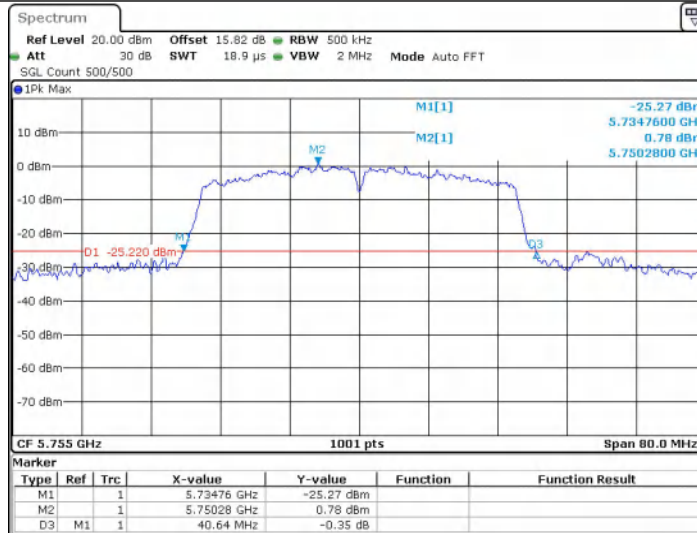


Date: 24 DEC 2025 18:47:03

11AX40SISO_Ant1_5795

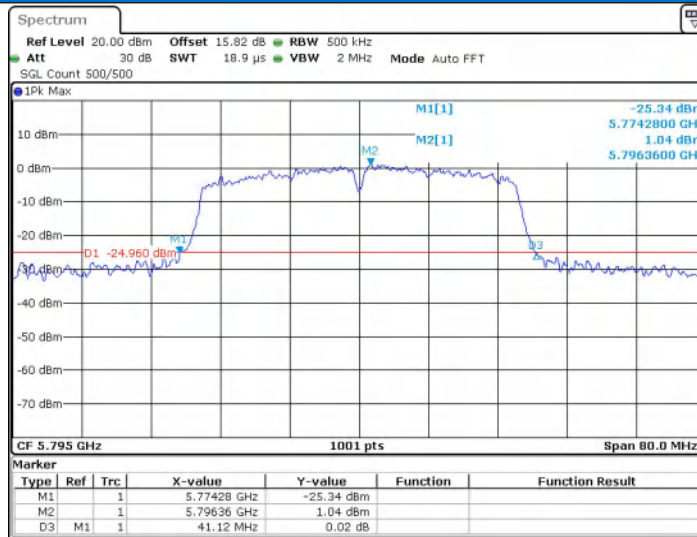


Date: 24 DEC 2025 18:49:47

11AX80SISO_Ant1_5210

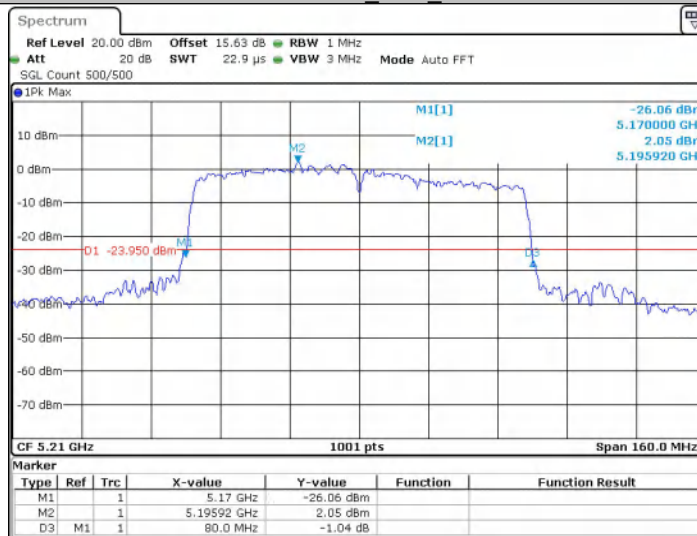


Date: 25 DEC 2025 11:56:11

11AX80SISO_Ant1_5775

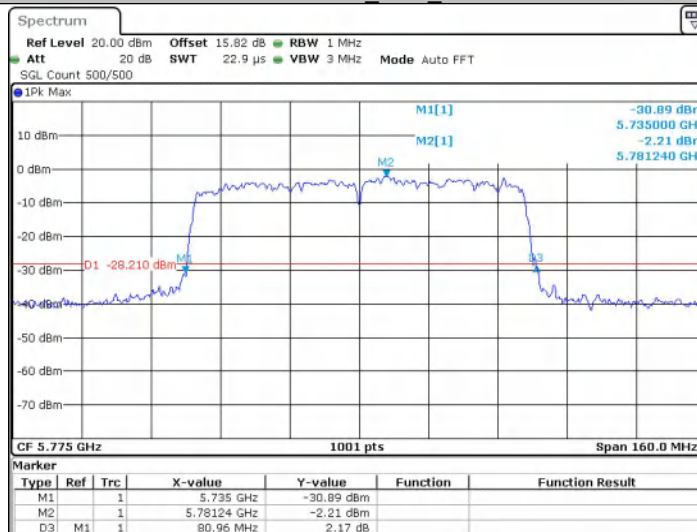


Date: 25 DEC 2025 12:00:44

11A_Ant1_5745

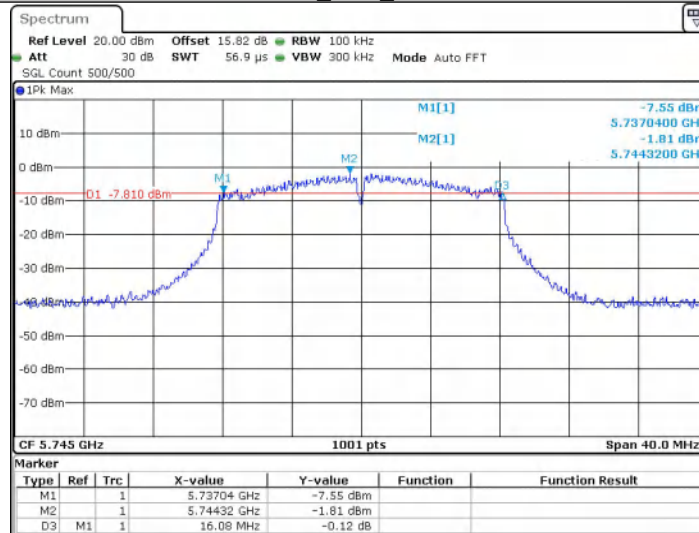


Date: 23 DEC 2025 17:10:51

11A_Ant1_5785

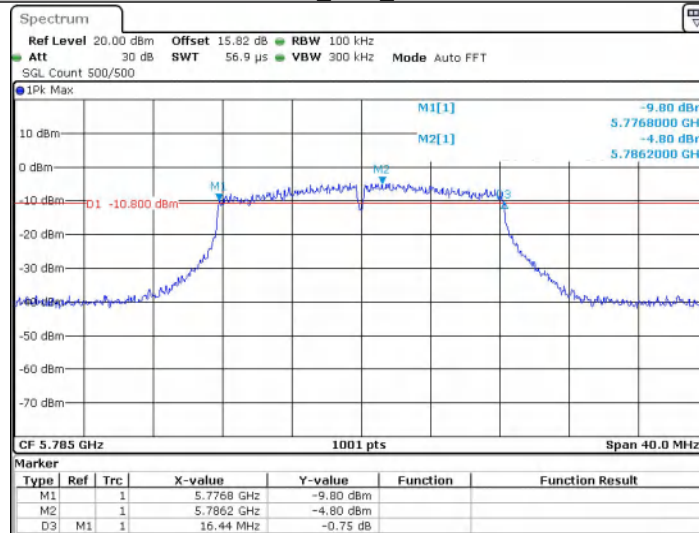


Date: 23 DEC 2025 17:12:59

11A_Ant1_5825

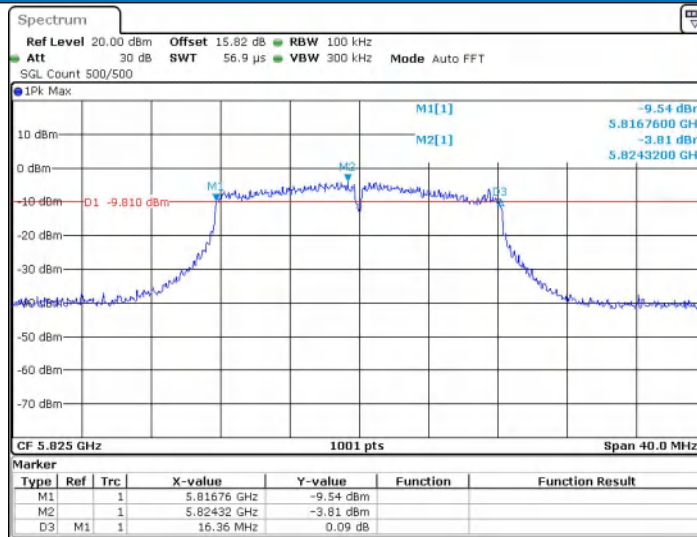


Date: 23 DEC 2025 17:18:07

11N20SISO_Ant1_5745

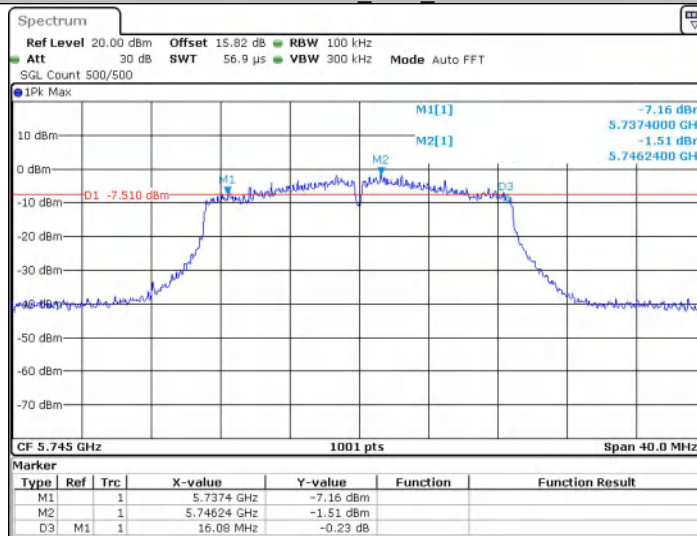


Date: 23 DEC 2025 17:38:58

11N20SISO_Ant1_5785

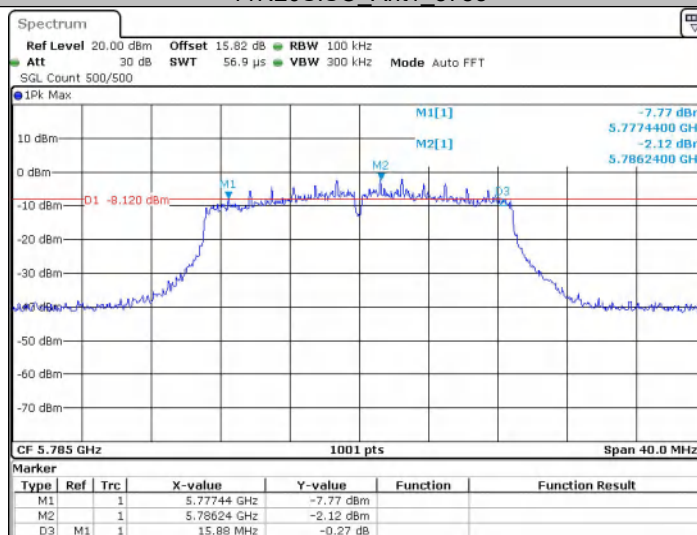


Date: 23 DEC 2025 17:42:10


11N20SISO_Ant1_5825

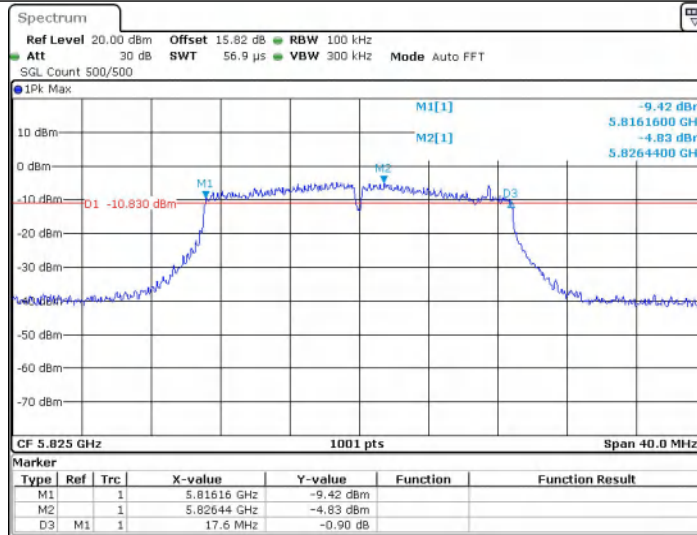

11N40SISO_Ant1_5755

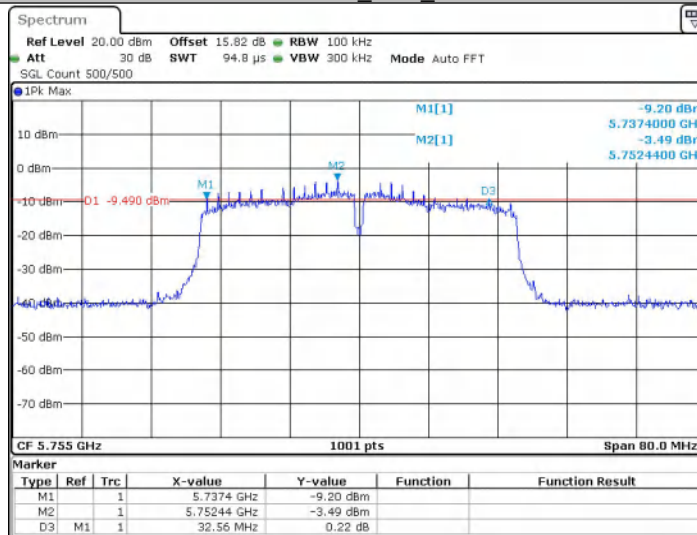


11N40SISO_Ant1_5795

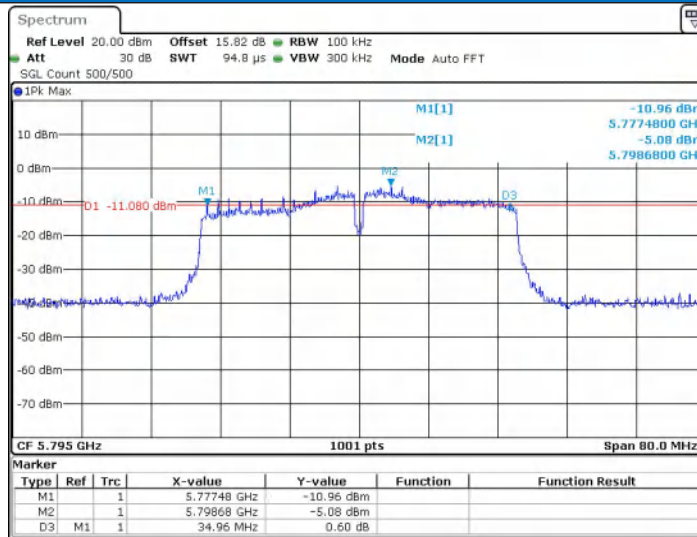


Date: 23 DEC 2025 18:38:34

11AC20SISO_Ant1_5745

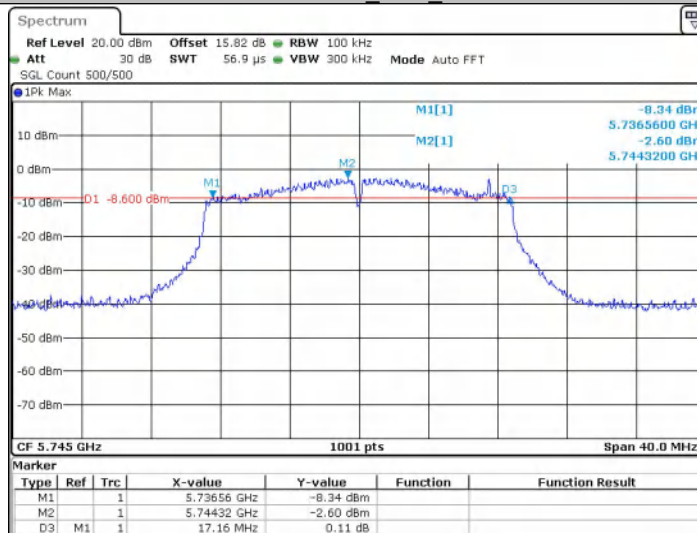


Date: 23 DEC 2025 18:46:33

11AC20SISO_Ant1_5785

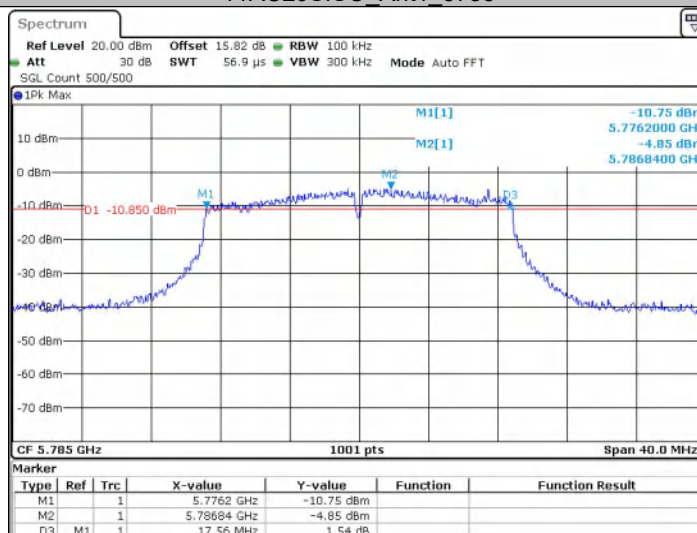


Date: 23 DEC 2025 18:49:41

11AC20SISO_Ant1_5825

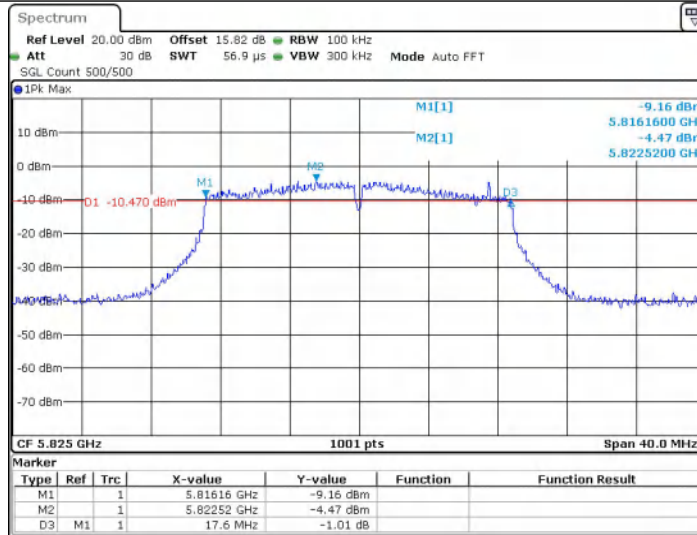


Date: 23 DEC 2025 18:50:50

11AC40SISO_Ant1_5755

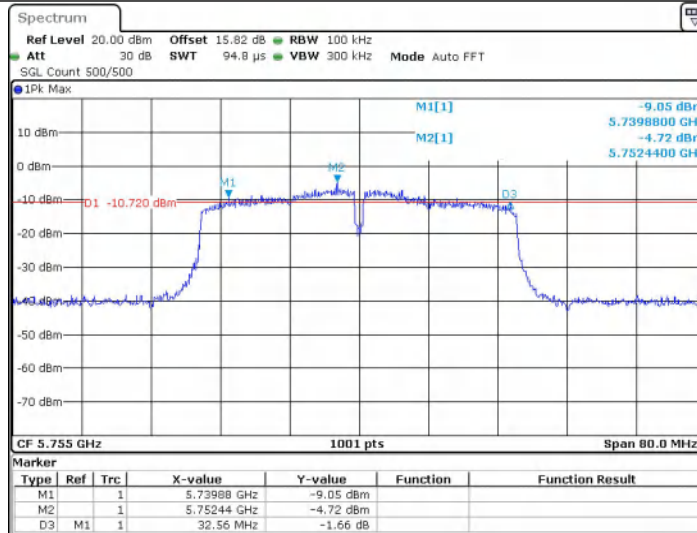


Date: 23 DEC 2025 18:58:19

11AC40SISO_Ant1_5795

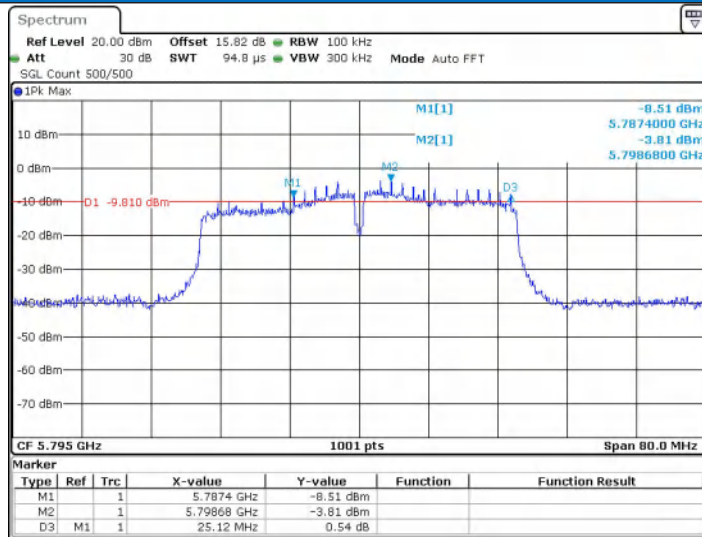


Date: 23 DEC 2025 19:00:15

11AC80SISO_Ant1_5775

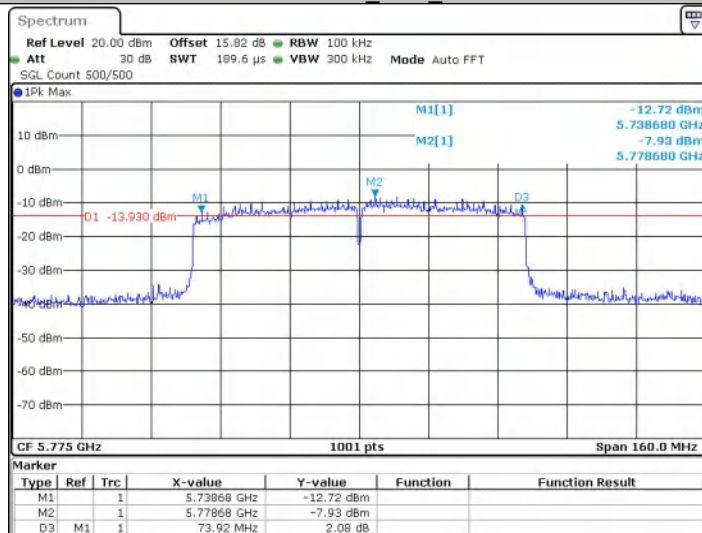


Date: 24 DEC 2025 17:27:49

11AX20SISO_Ant1_5745

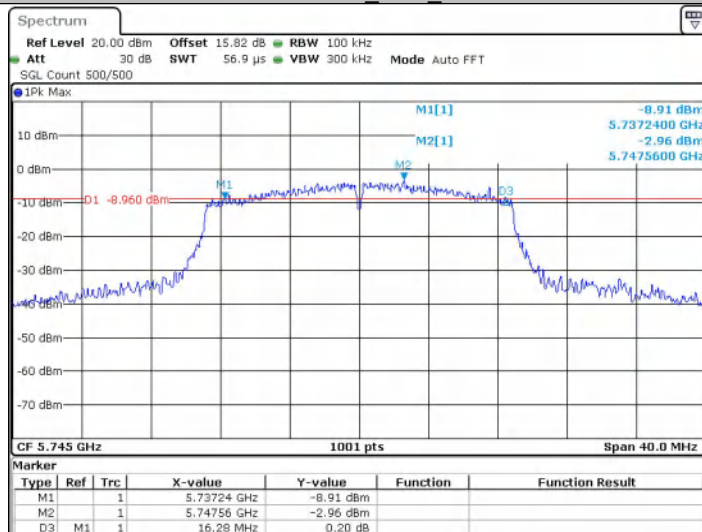


Date: 24 DEC 2025 17:48:48

11AX20SISO_Ant1_5785

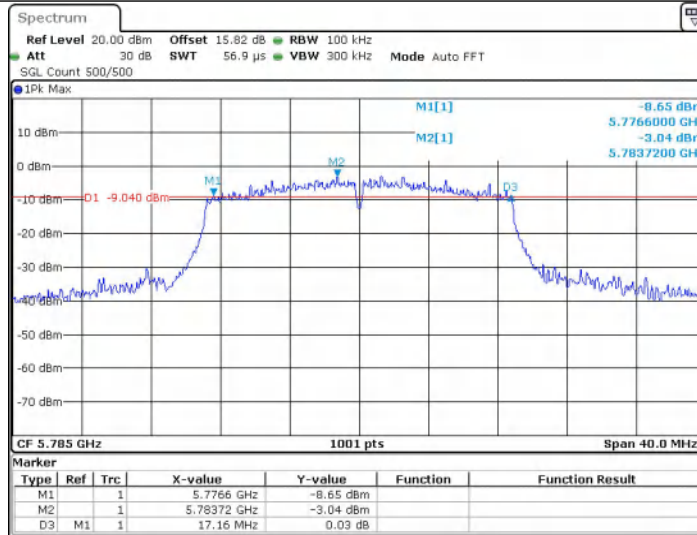


Date: 24 DEC 2025 17:50:28

11AX20SISO_Ant1_5825

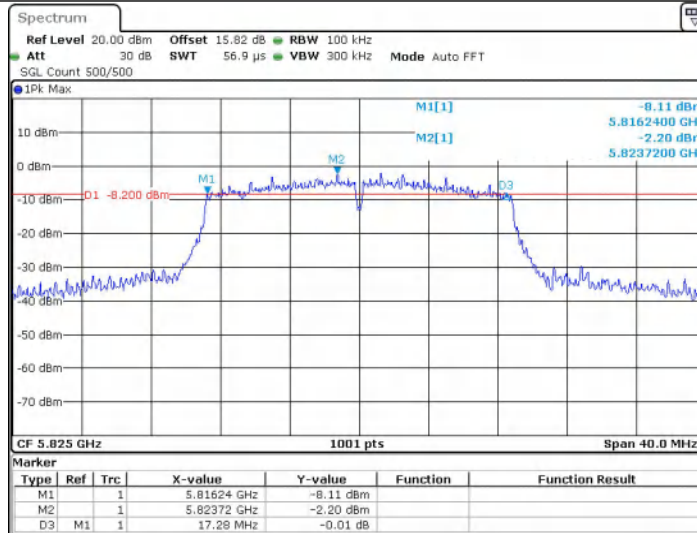


Date: 24 DEC 2025 17:51:36

11AX40SISO_Ant1_5755

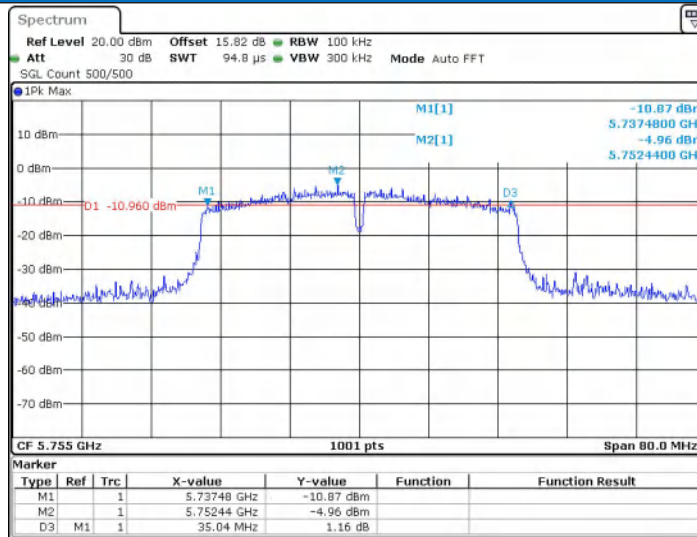


Date: 24 DEC 2025 18:47:12

11AX40SISO_Ant1_5795

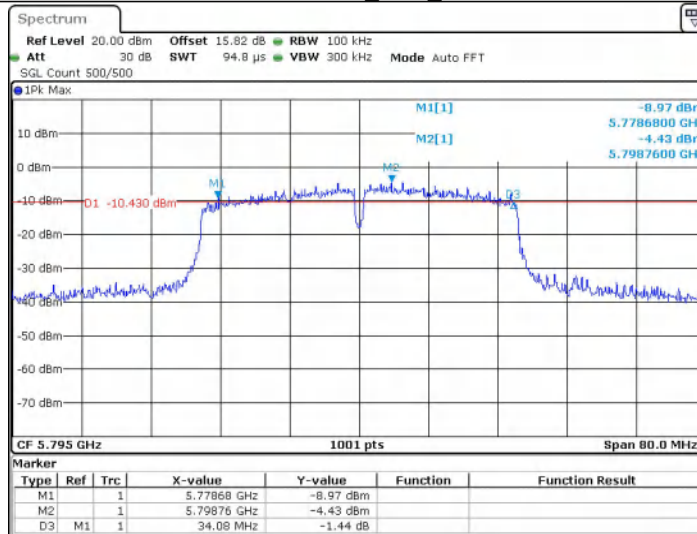


Date: 24 DEC 2025 18:49:56

11AX80SISO_Ant1_5775

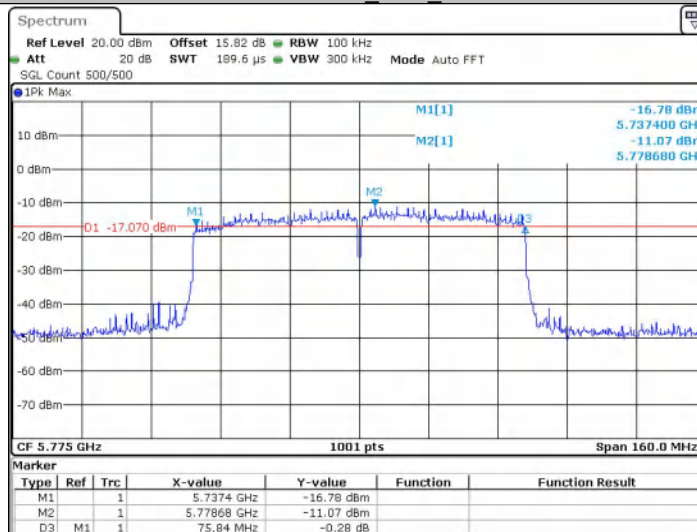


Date: 25 DEC 2025 12:00:58


11A_Ant1_5180

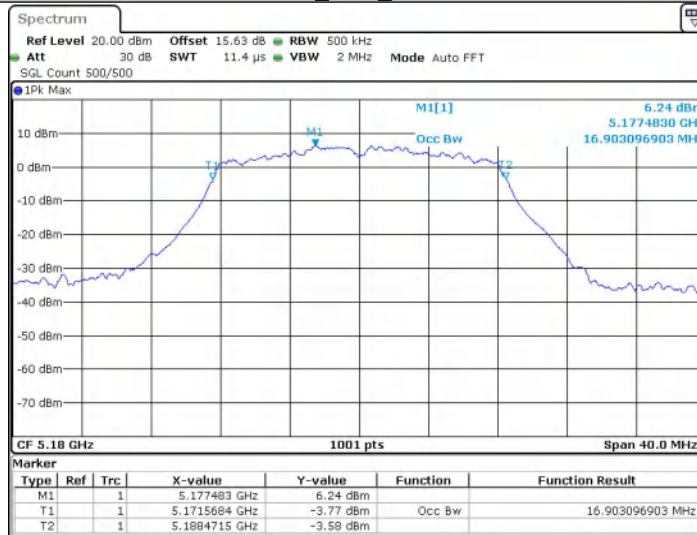


11A_Ant1_5200

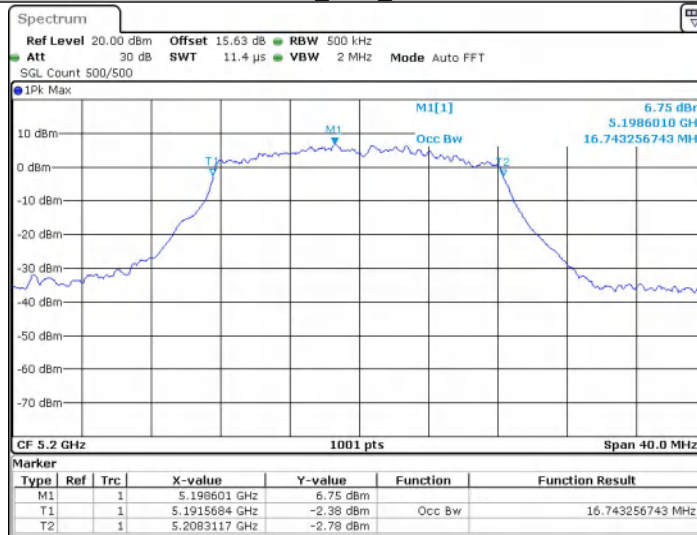


11A_Ant1_5240

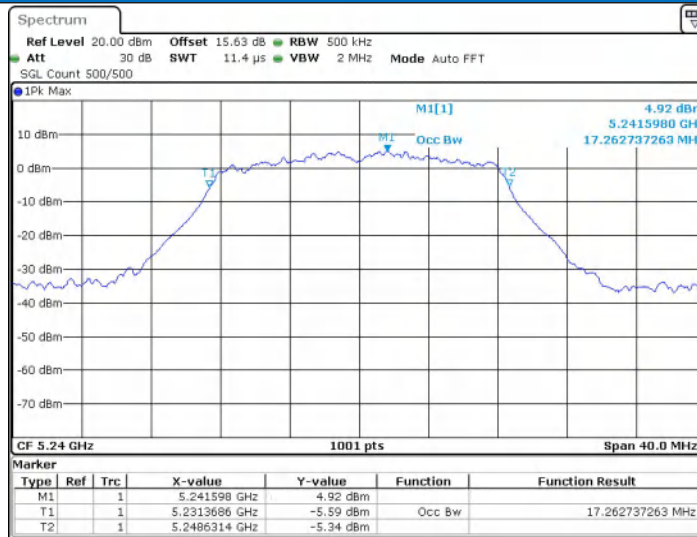


11A_Ant1_5745

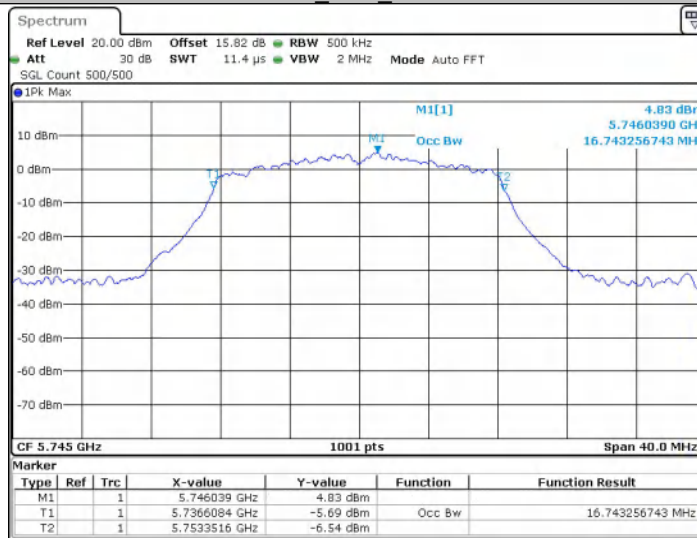


11A_Ant1_5785

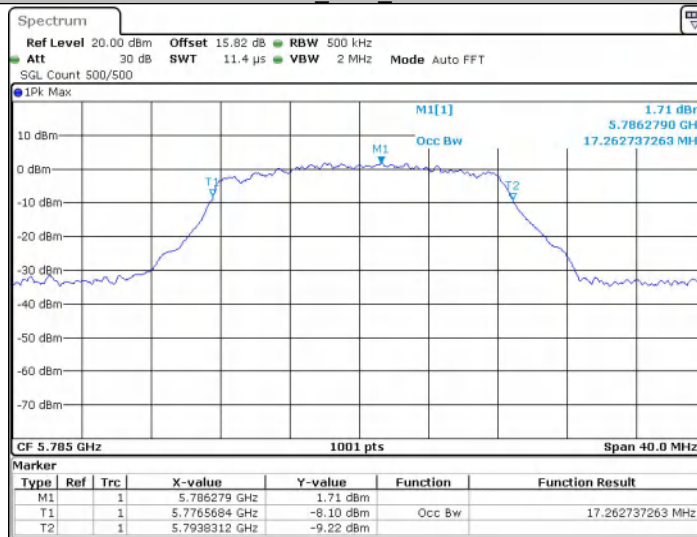


11A_Ant1_5825

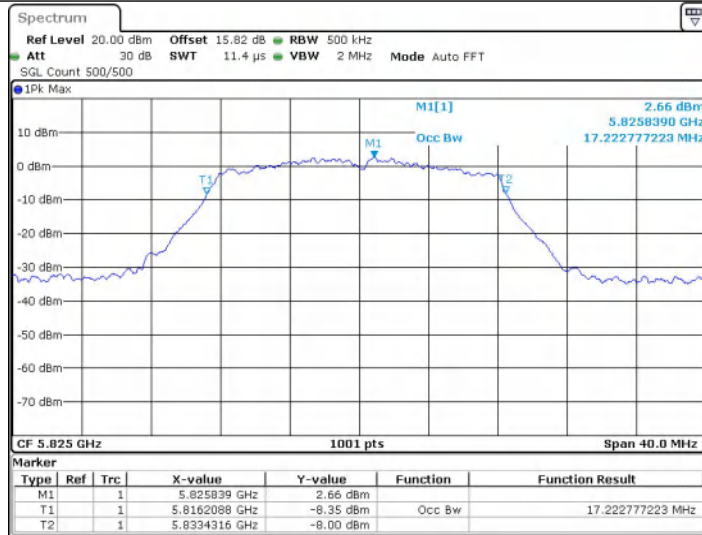


11N20SISO_Ant1_5180

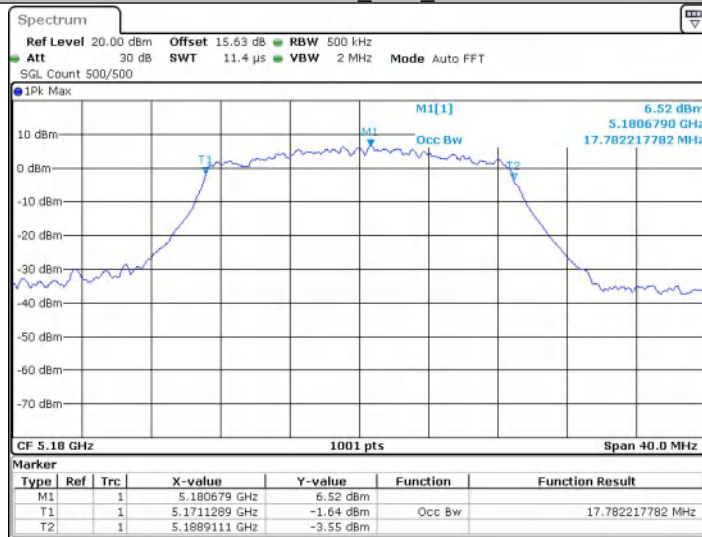


11N20SISO_Ant1_5200

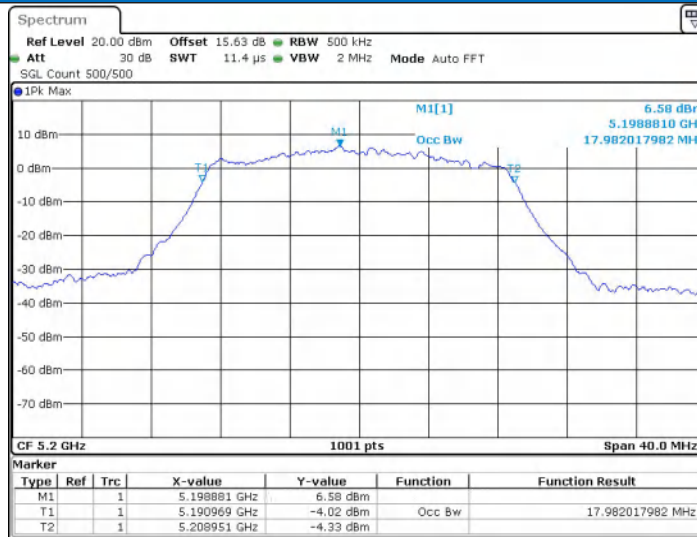


11N20SISO_Ant1_5240

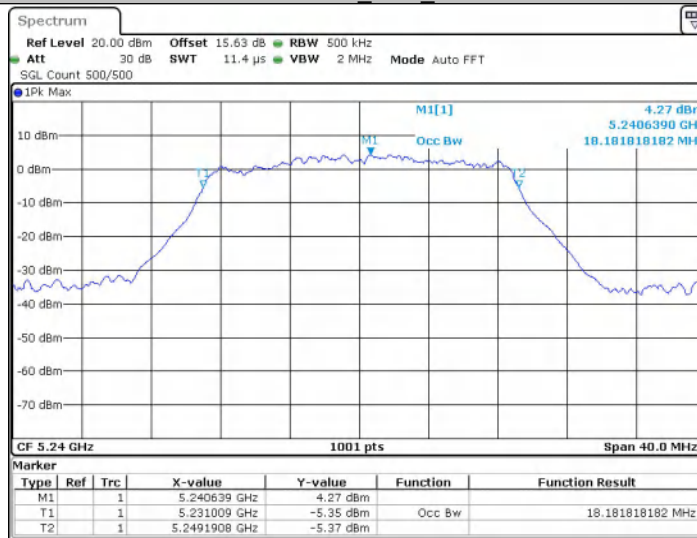


11N20SISO_Ant1_5745

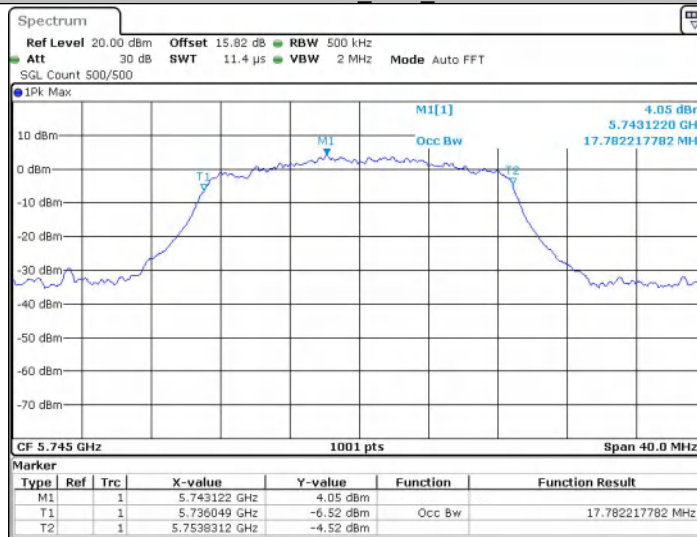


11N20SISO_Ant1_5785

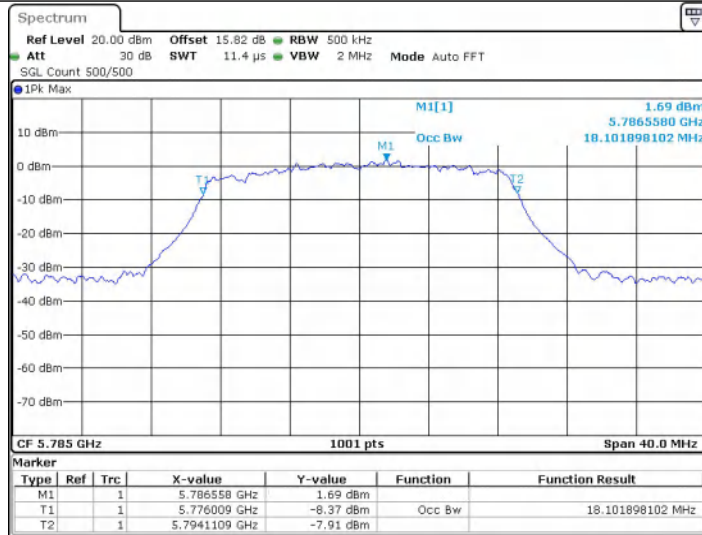


11N20SISO_Ant1_5825

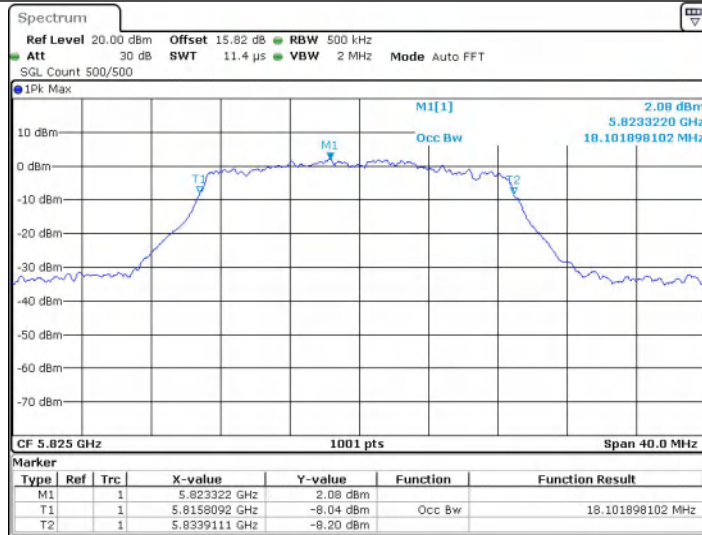


11N40SISO_Ant1_5190

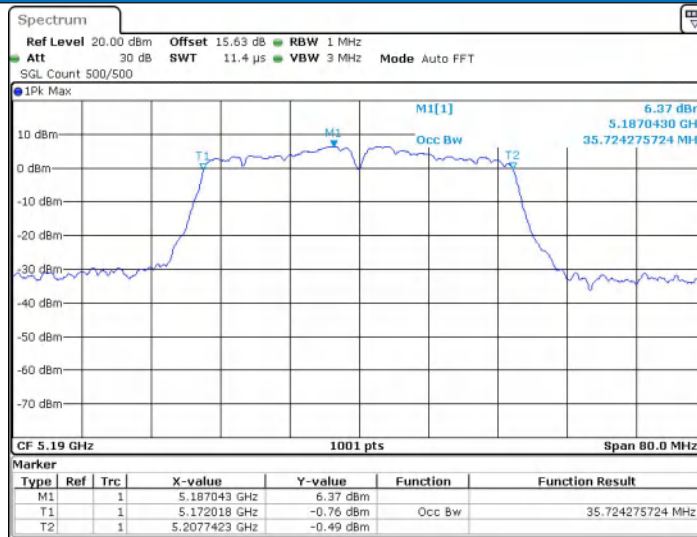


11N40SISO_Ant1_5230

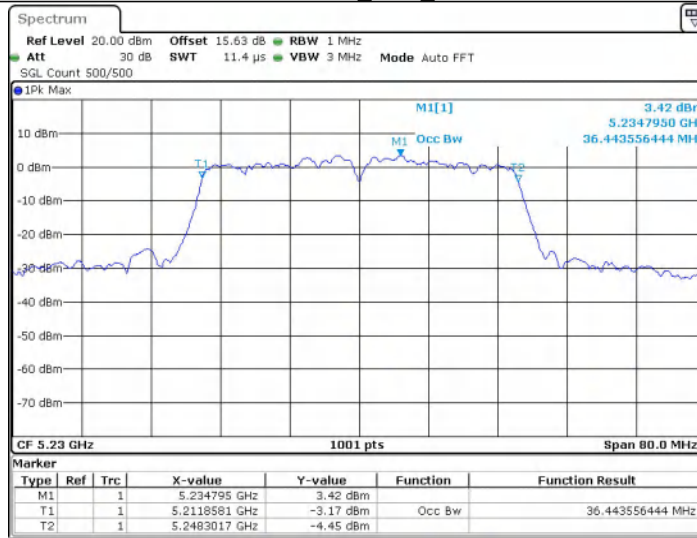

11N40SISO_Ant1_5755

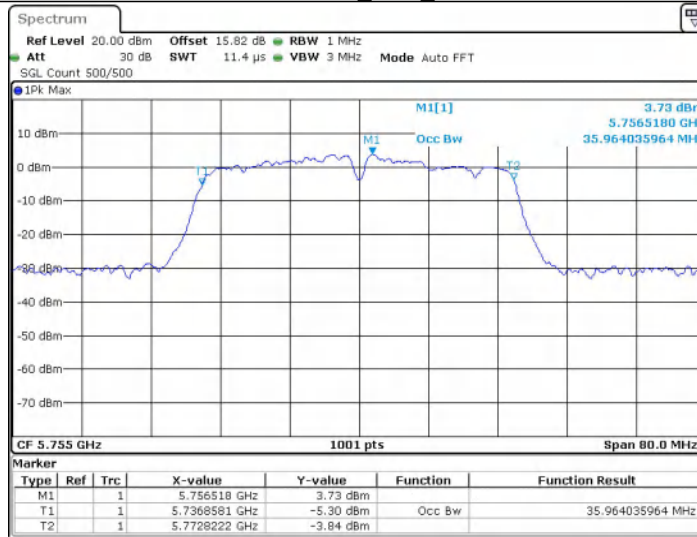


11N40SISO_Ant1_5795

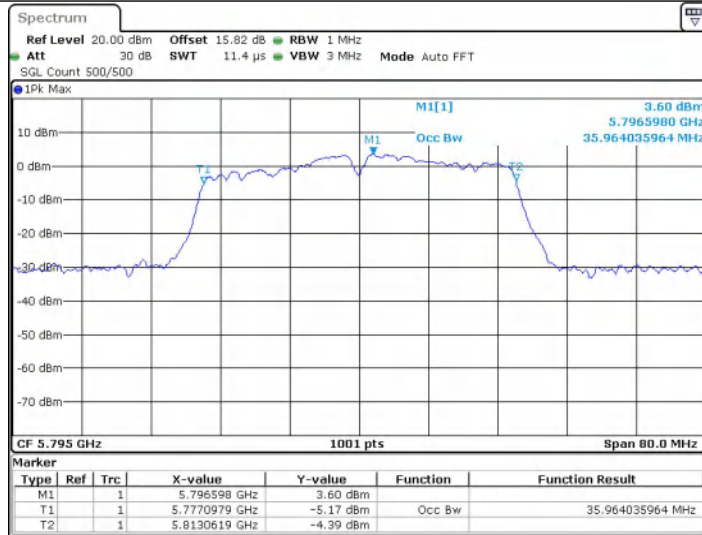


Date: 23 DEC 2025 18:38:43

11AC20SISO_Ant1_5180

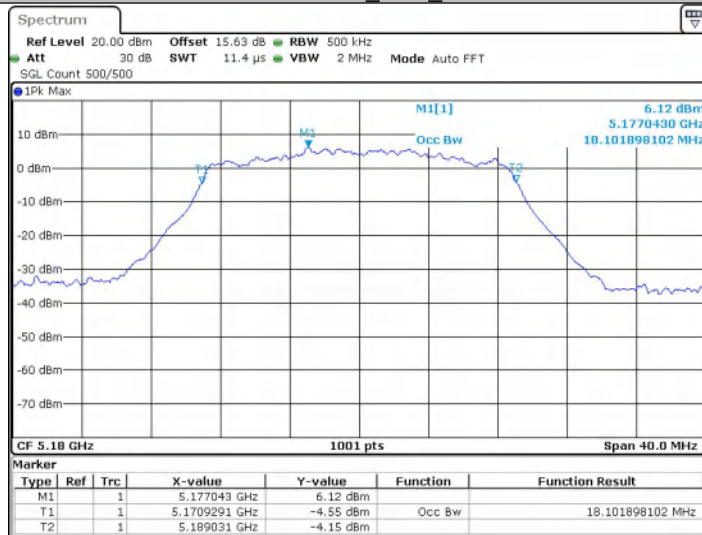


Date: 23 DEC 2025 18:40:24


11AC20SISO_Ant1_5200

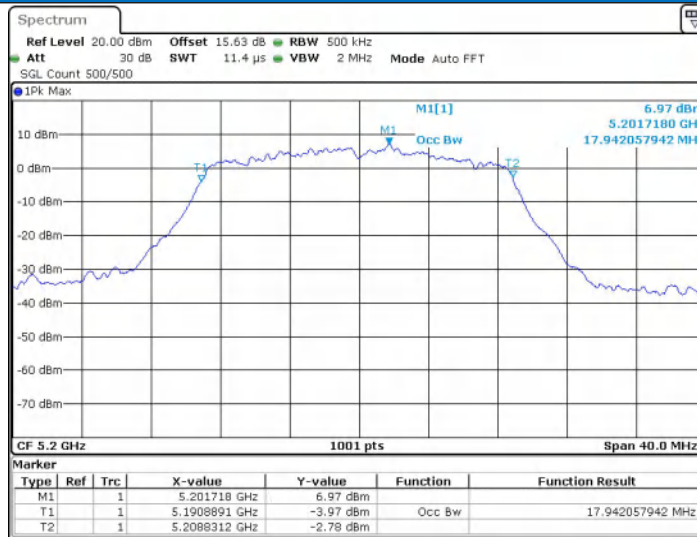


11AC20SISO_Ant1_5240

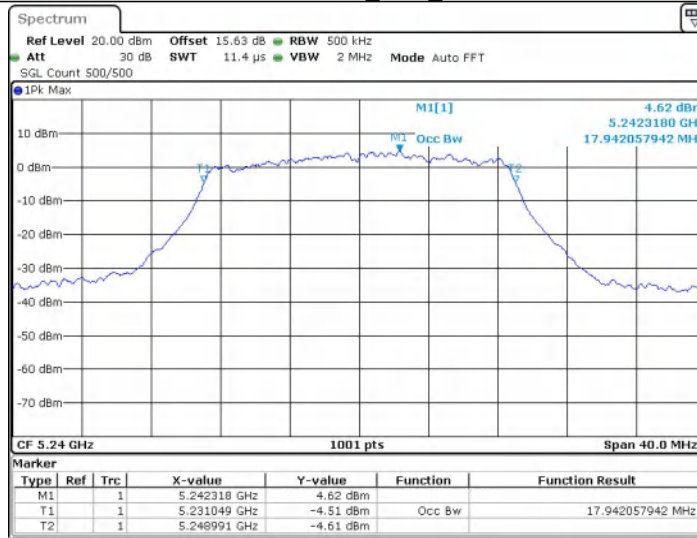


11AC20SISO_Ant1_5745

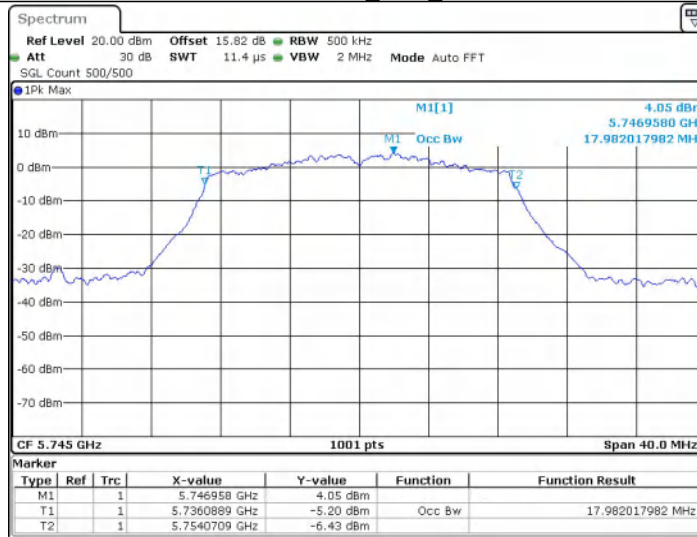


11AC20SISO_Ant1_5785

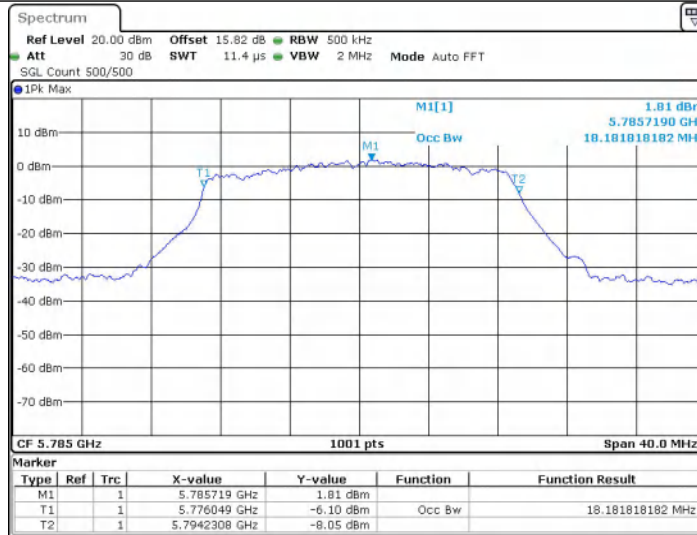


11AC20SISO_Ant1_5825

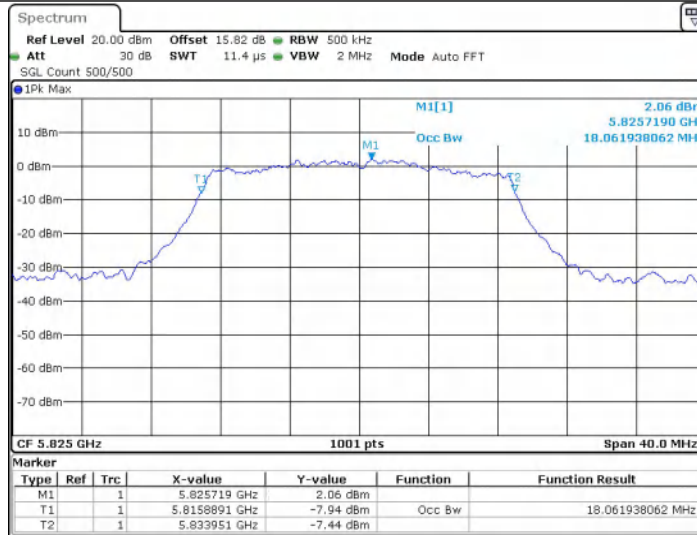


11AC40SISO_Ant1_5190

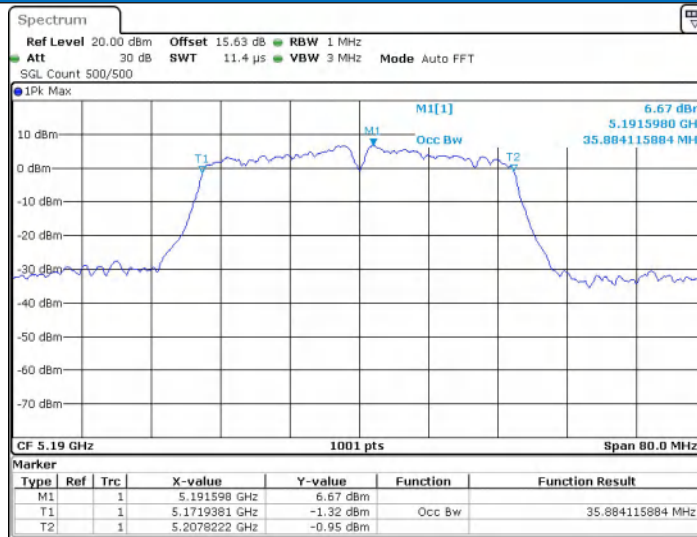


11AC40SISO_Ant1_5230

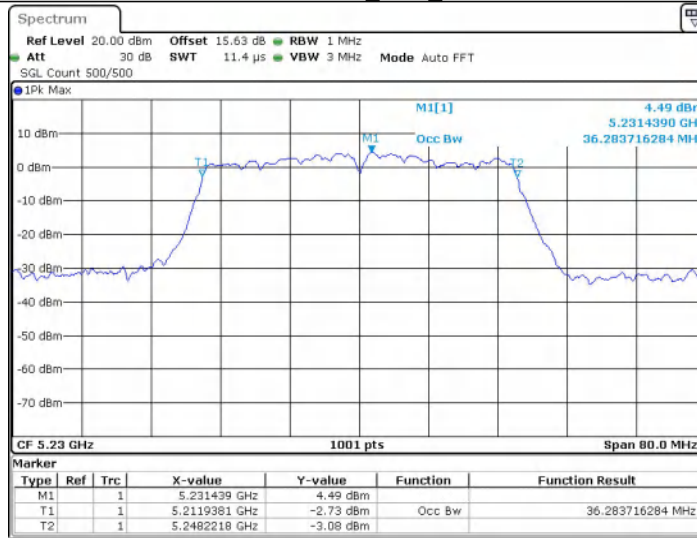

11AC40SISO_Ant1_5755

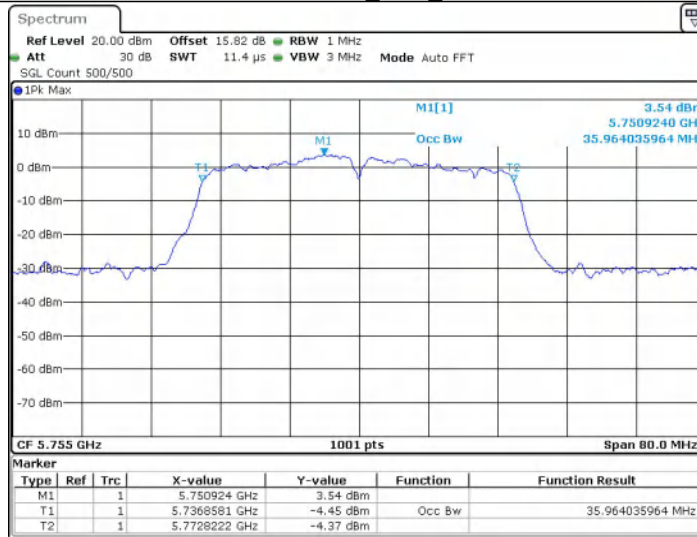


11AC40SISO_Ant1_5795

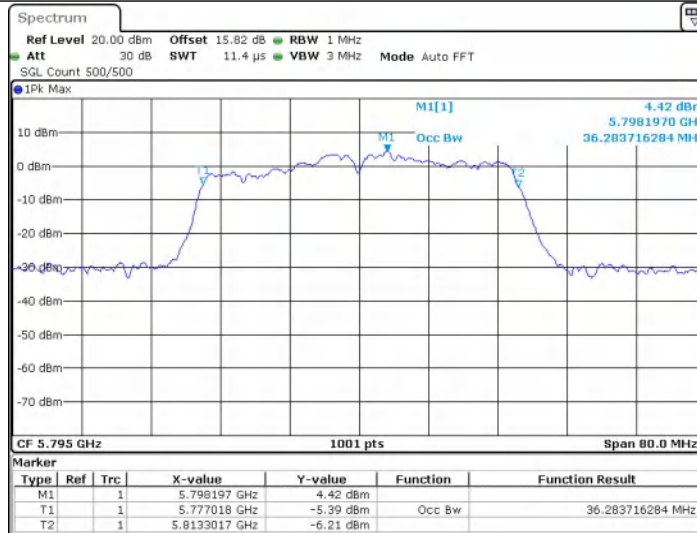


Date: 23 DEC 2025 19:00:24

11AC80SISO_Ant1_5210

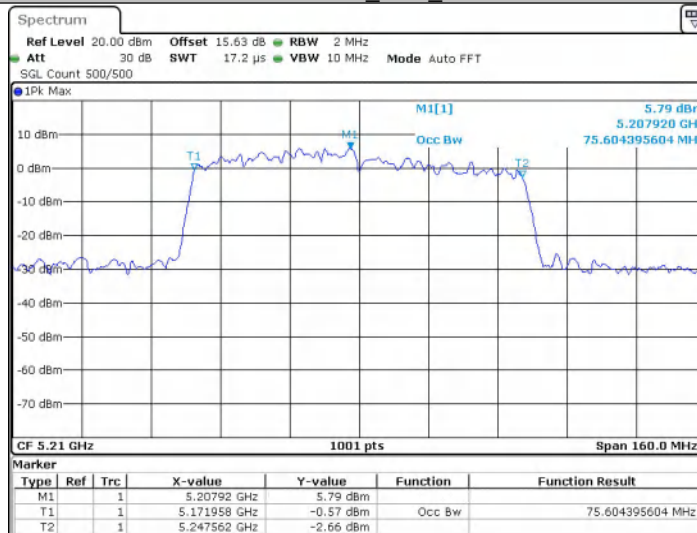


Date: 25 DEC 2025 11:46:37


11AC80SISO_Ant1_5775

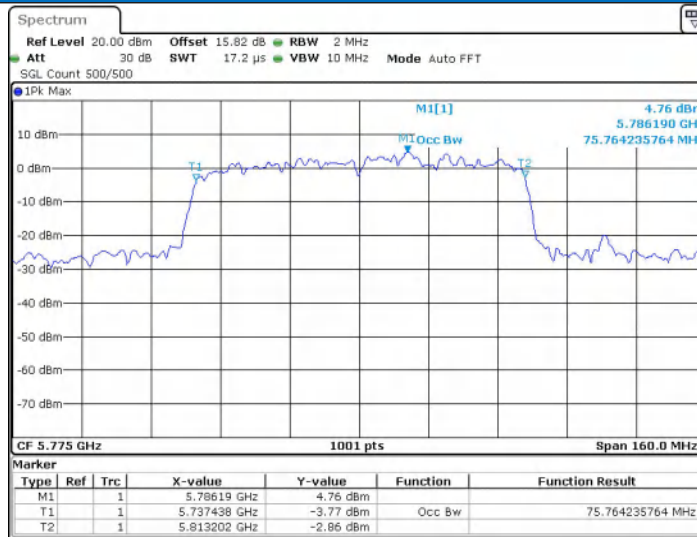


11AX20SISO_Ant1_5180

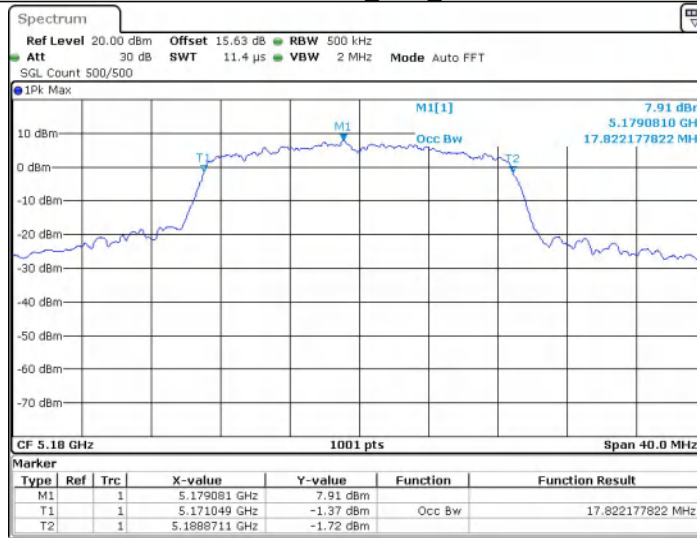


11AX20SISO_Ant1_5200

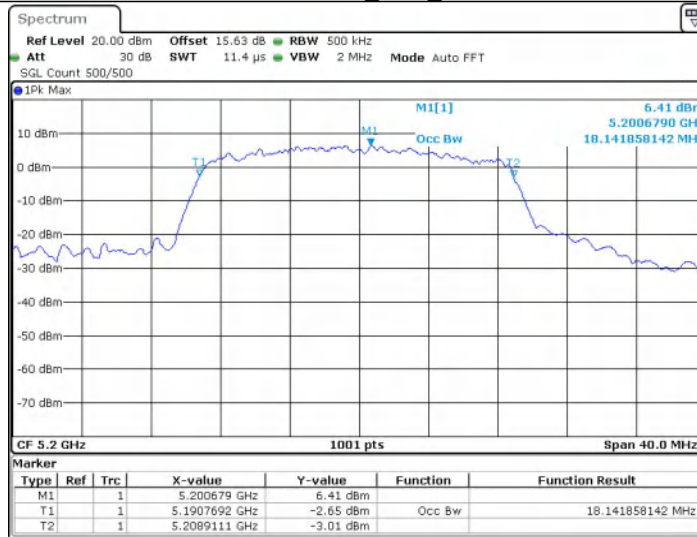


11AX20SISO_Ant1_5240

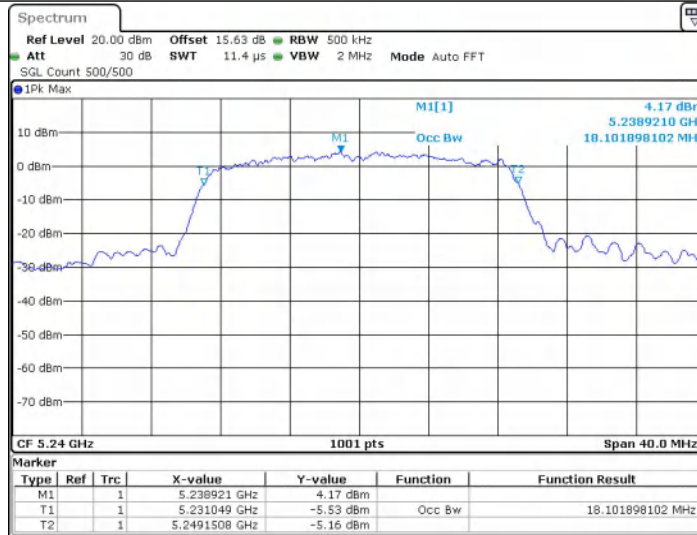


11AX20SISO_Ant1_5745

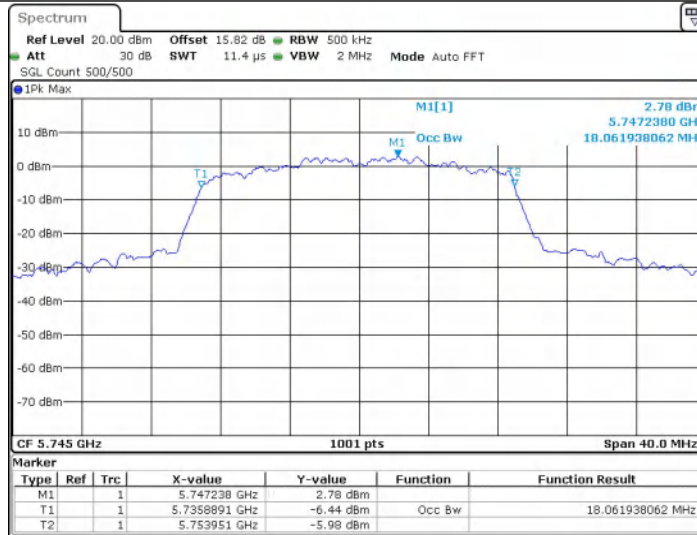


11AX20SISO_Ant1_5785

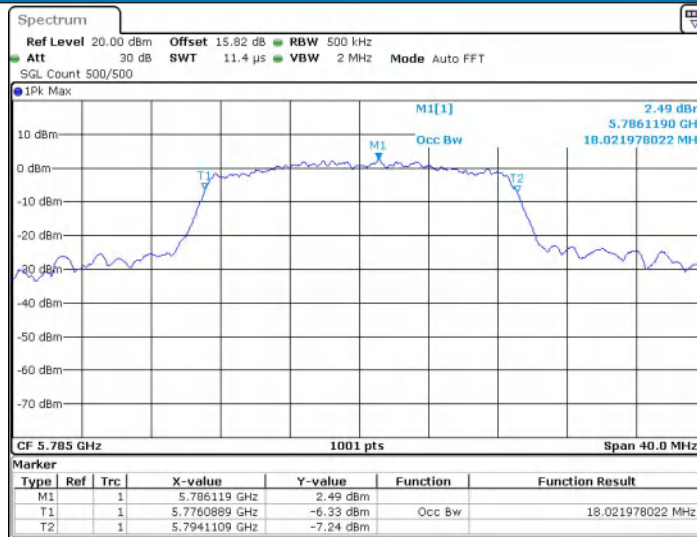


11AX20SISO_Ant1_5825

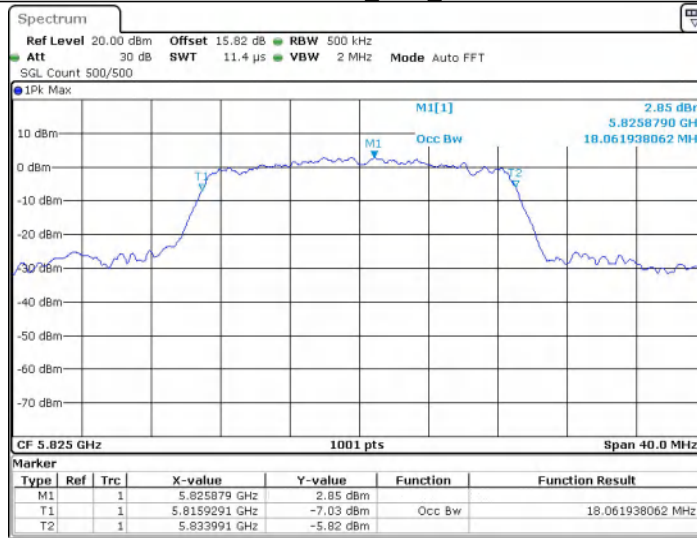

11AX40SISO_Ant1_5190

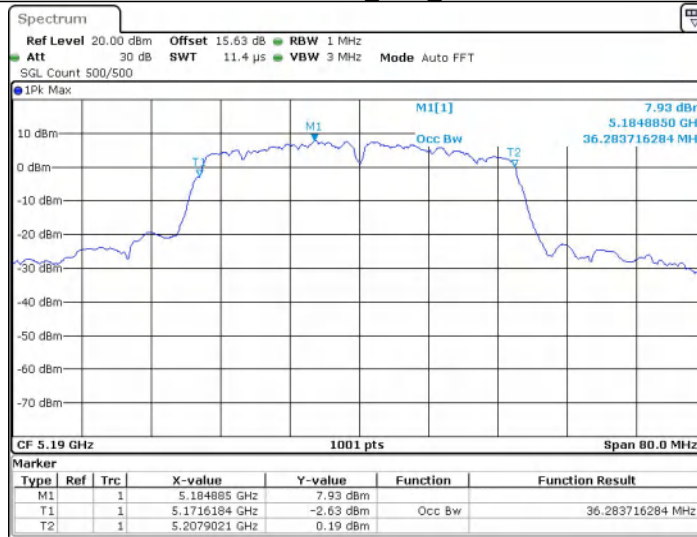


11AX40SISO_Ant1_5230

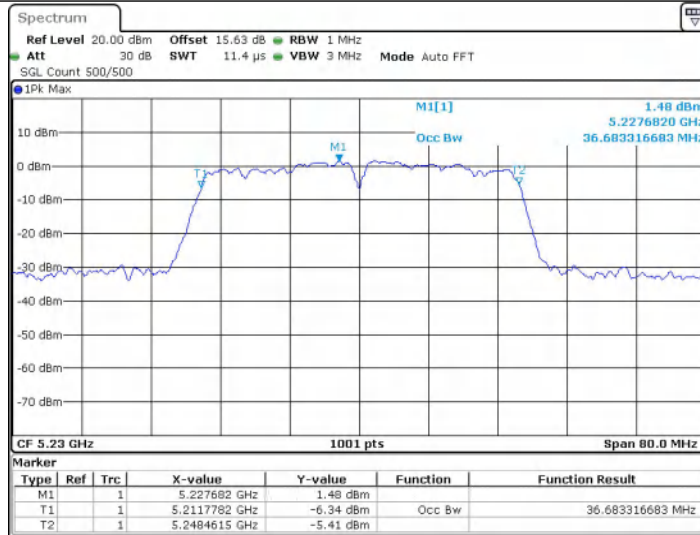


Date: 25 DEC 2025 11:52:44

11AX40SISO_Ant1_5755

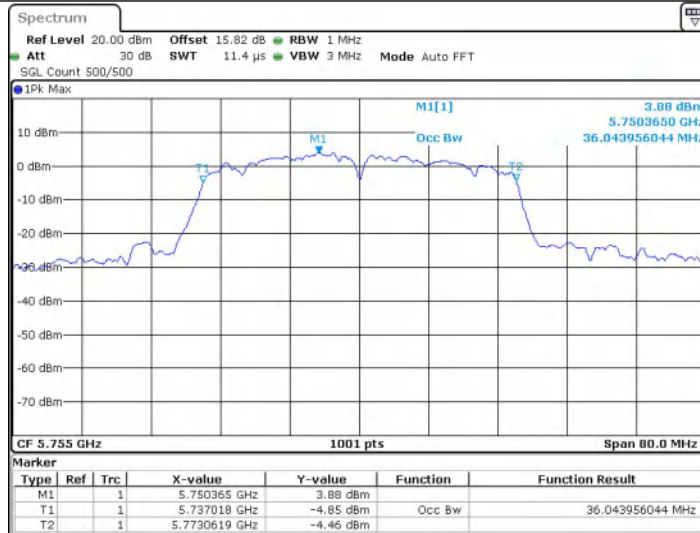


Date: 24 DEC 2025 18:47:21


11AX40SISO_Ant1_5795

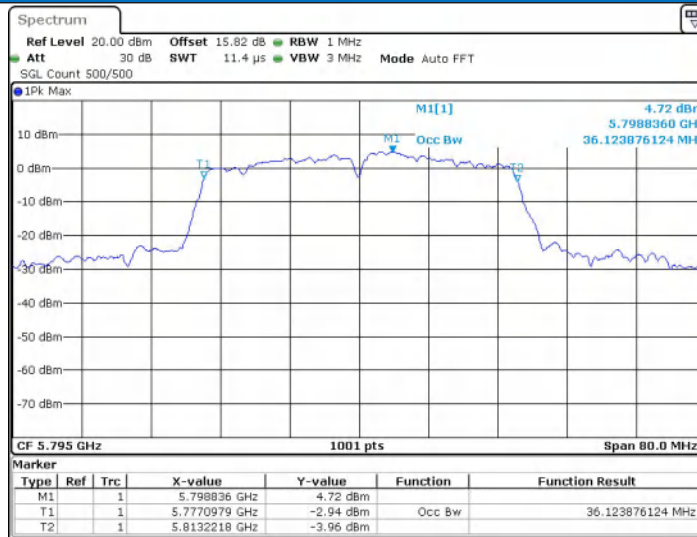


11AX80SISO_Ant1_5210

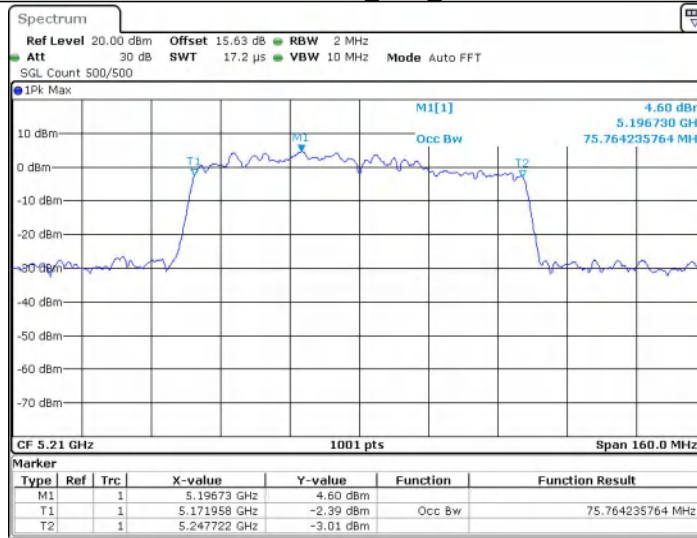

11AX80SISO_Ant1_5775

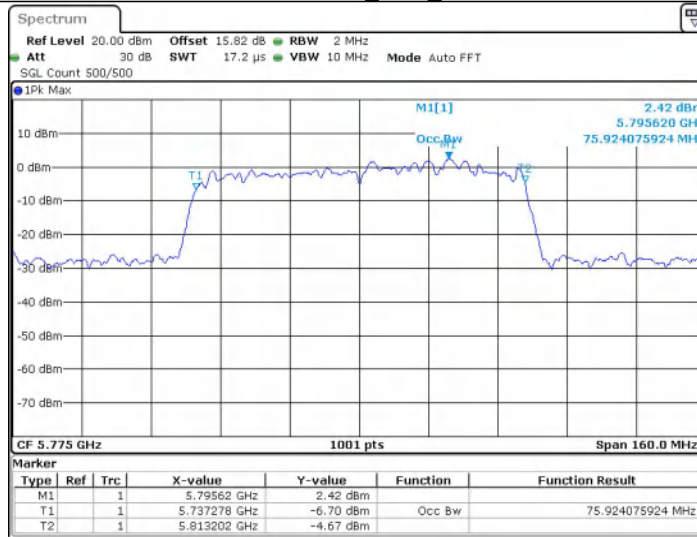


11A_Ant2_5180

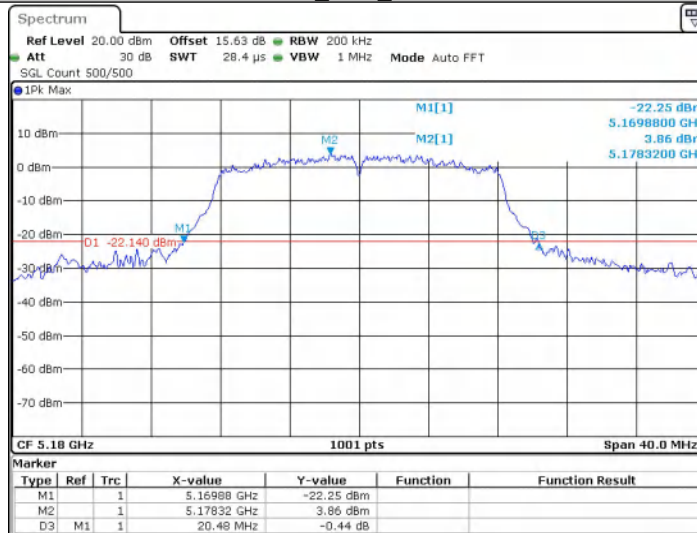


Date: 24 DEC 2025 19:37:00

11A_Ant2_5200

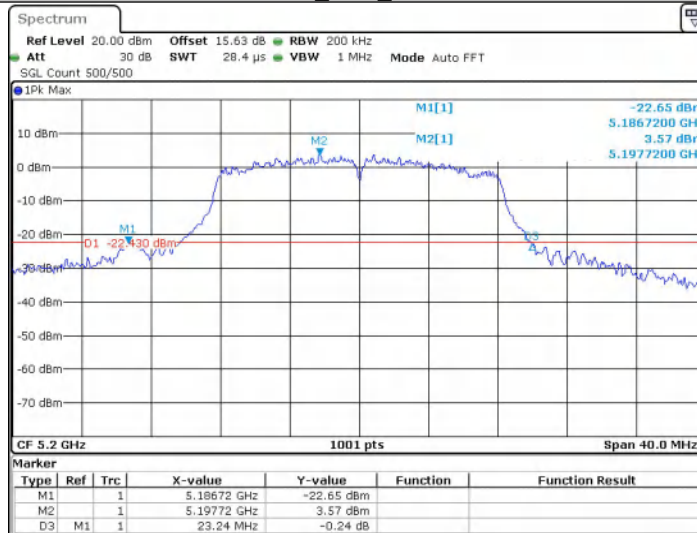


Date: 24 DEC 2025 19:40:20

11A_Ant2_5240

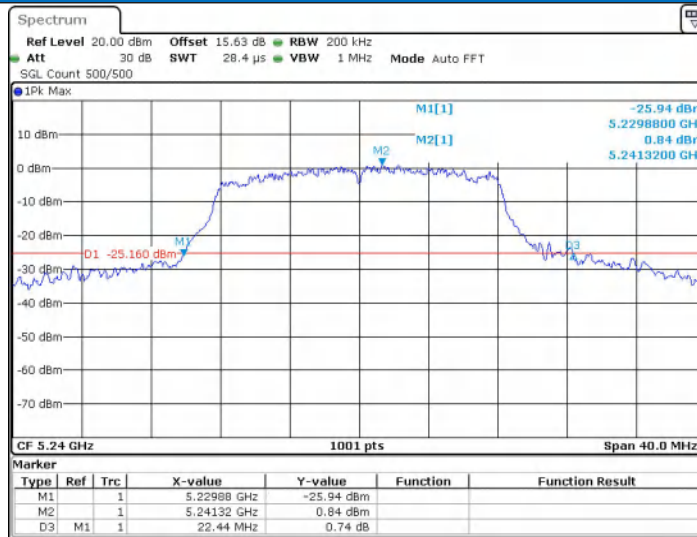


Date: 24 DEC 2025 19:41:21

11A_Ant2_5745

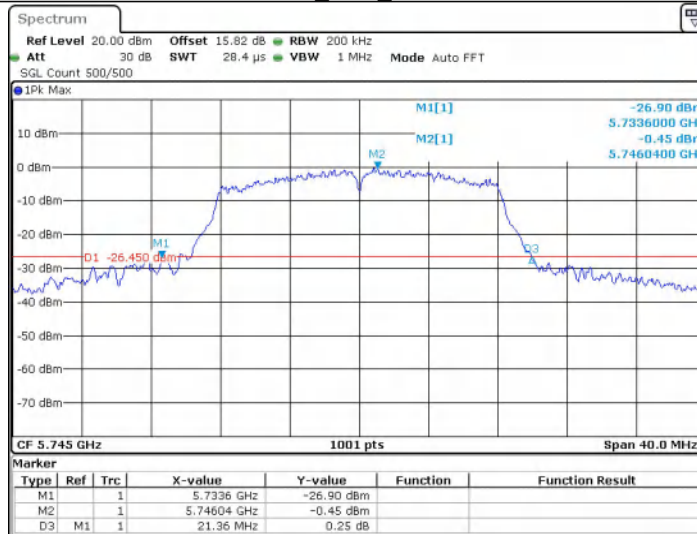


Date: 24 DEC 2025 19:42:58

11A_Ant2_5785

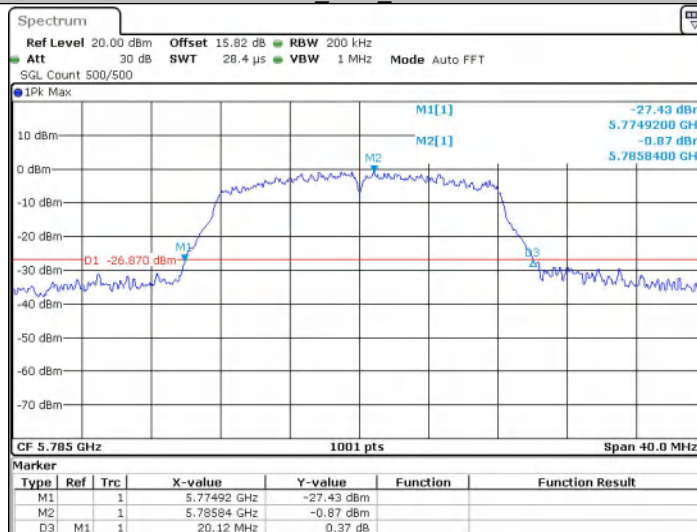


Date: 24 DEC 2025 19:49:09

11A_Ant2_5825

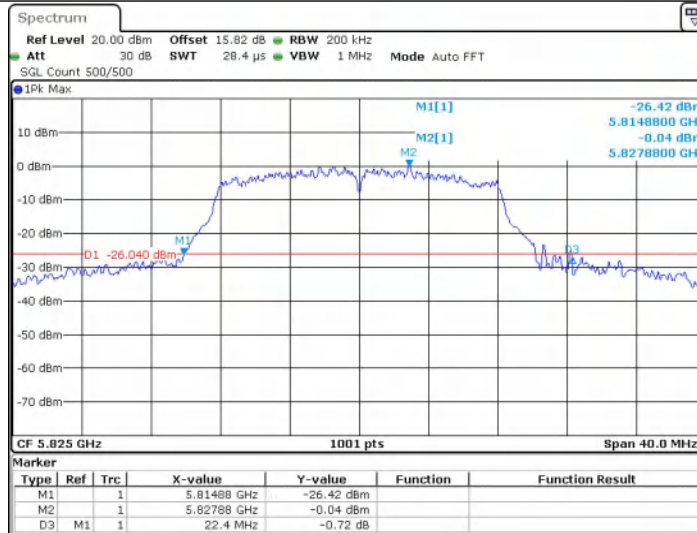


Date: 24 DEC 2025 19:51:07

11N20SISO_Ant2_5180

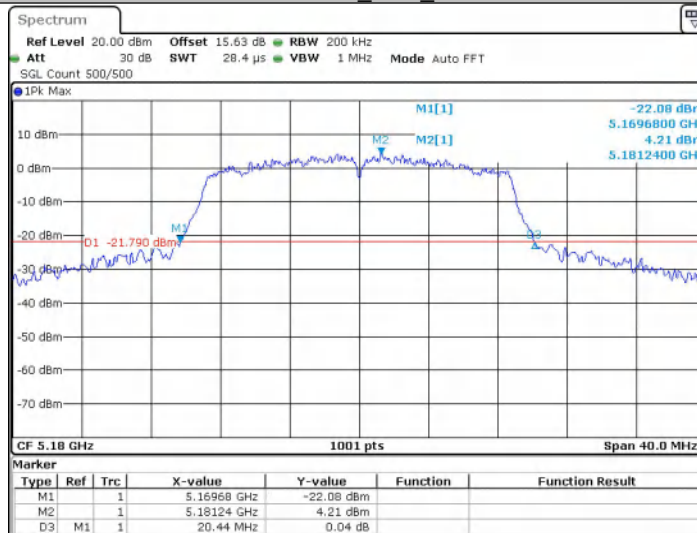


Date: 24 DEC 2025 19:52:39

11N20SISO_Ant2_5200

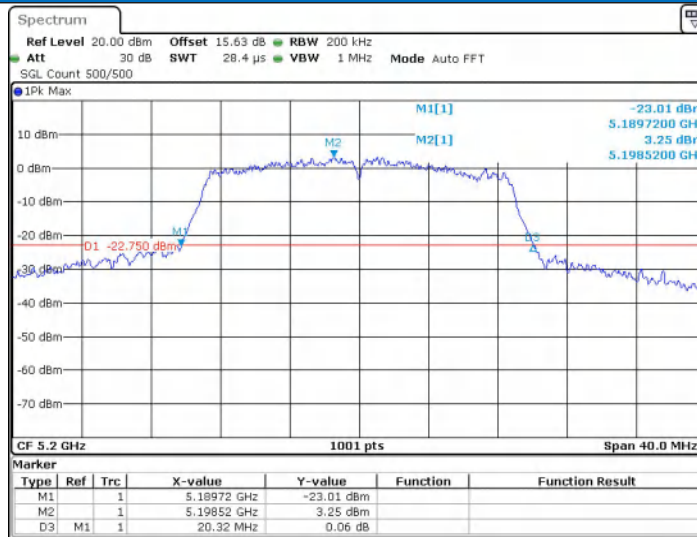


Date: 24 DEC 2025 19:55:28

11N20SISO_Ant2_5240

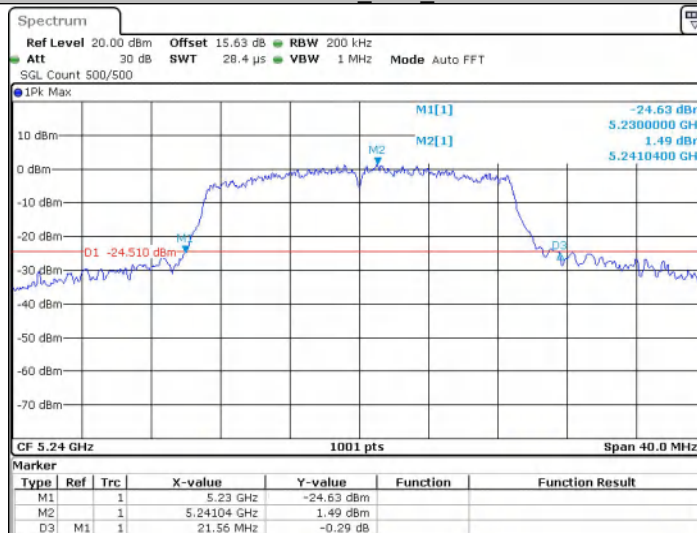


Date: 24 DEC 2025 19:57:21

11N20SISO_Ant2_5745

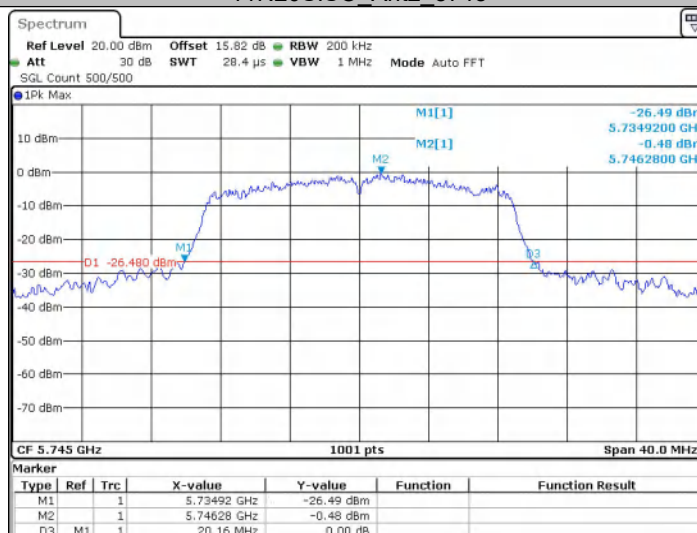


Date: 24 DEC 2025 19:58:57

11N20SISO_Ant2_5785

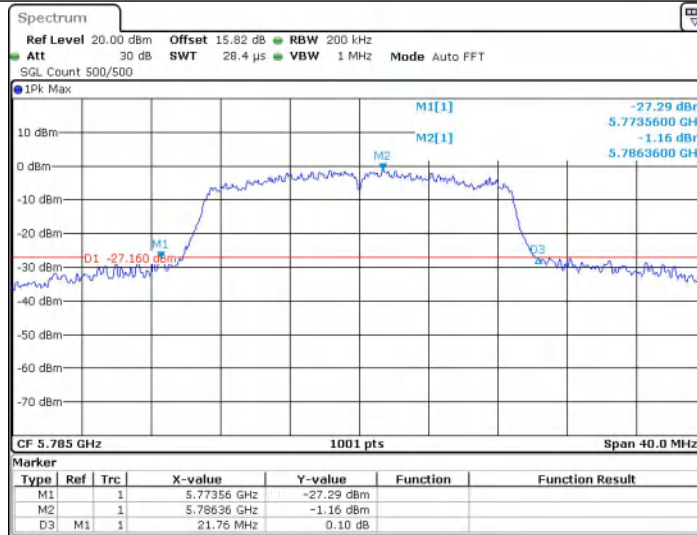


Date: 24 DEC 2025 20:01:25

11N20SISO_Ant2_5825

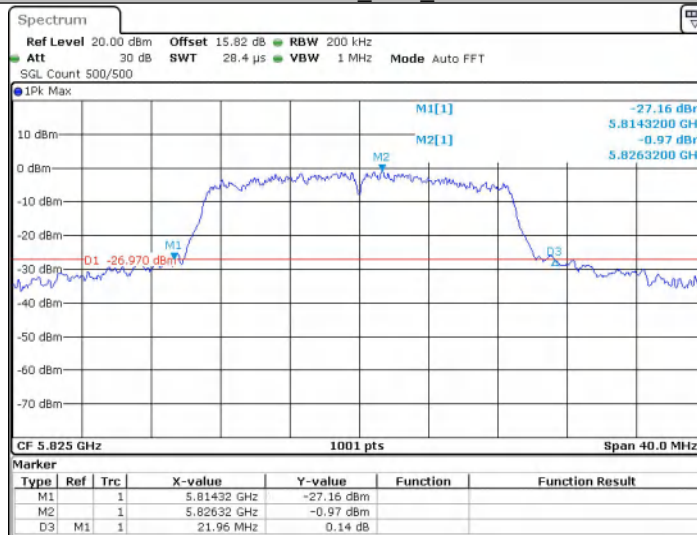


Date: 24 DEC 2025 20:03:21

11N40SISO_Ant2_5190

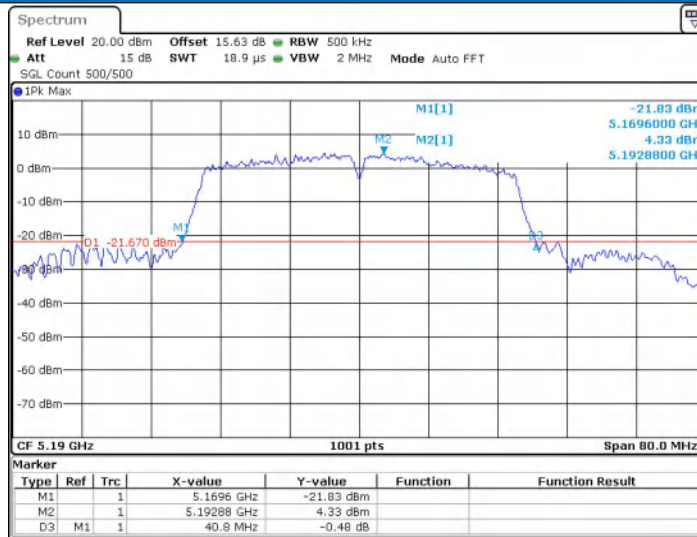


Date: 24 DEC 2025 20:20:17

11N40SISO_Ant2_5230

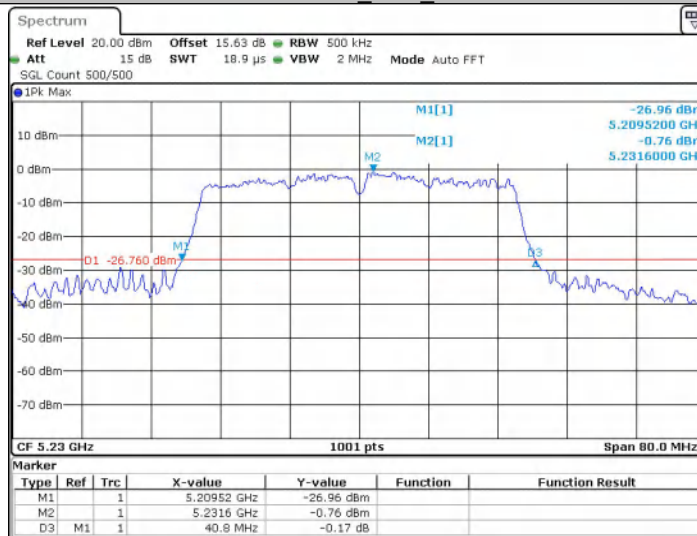


Date: 25 DEC 2025 14:25:18

11N40SISO_Ant2_5755

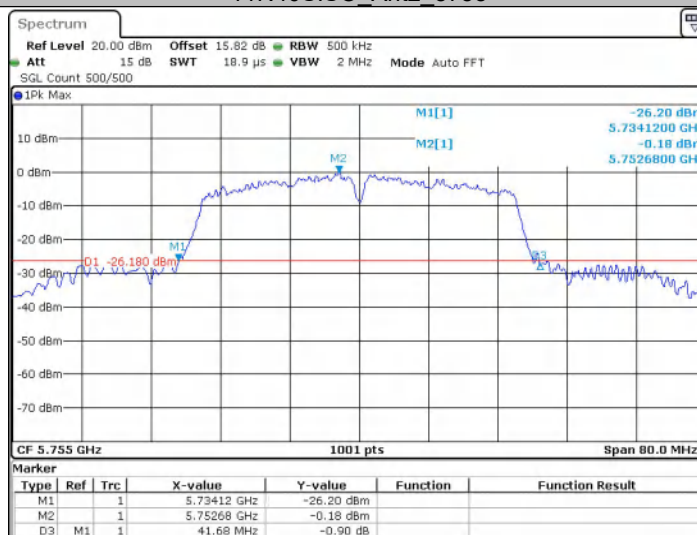


Date: 24 DEC 2025 20:26:27

11N40SISO_Ant2_5795

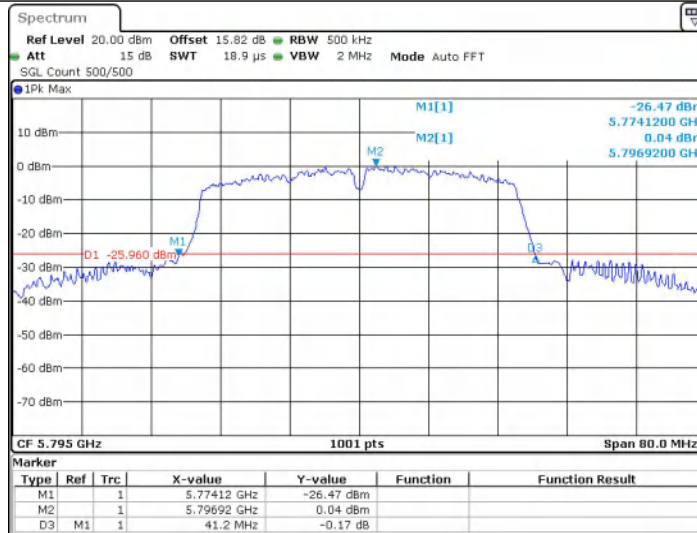


Date: 24 DEC 2025 20:28:22

11AC20SISO_Ant2_5180

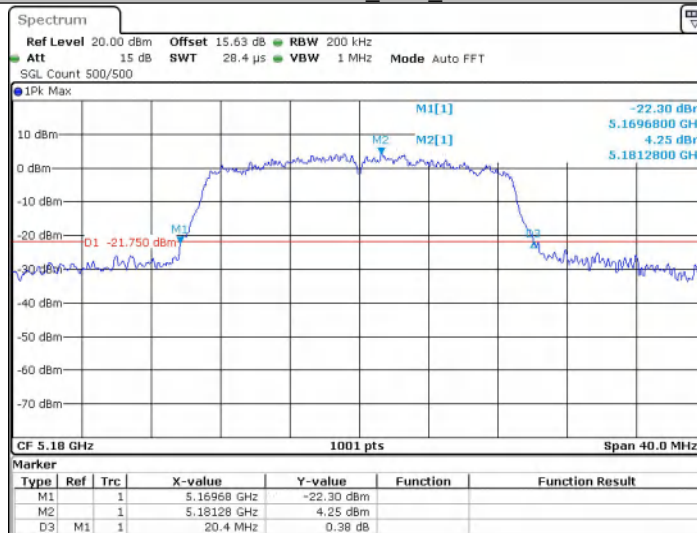


Date: 24 DEC 2025 20:30:12

11AC20SISO_Ant2_5200

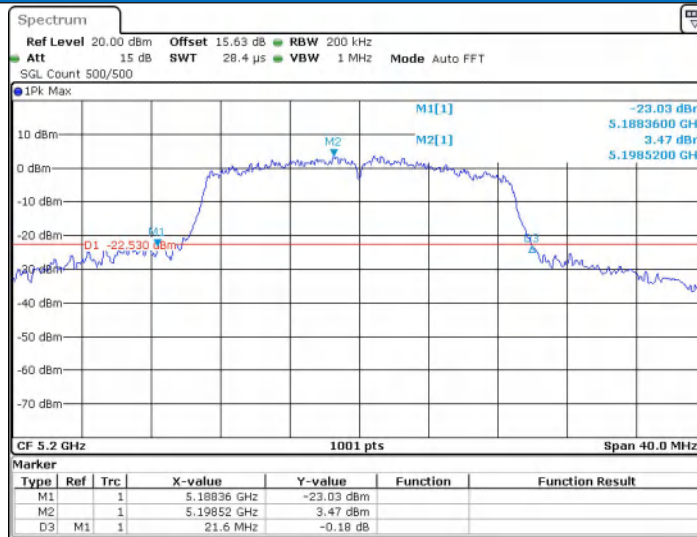


Date: 24 DEC 2025 20:34:41

11AC20SISO_Ant2_5240

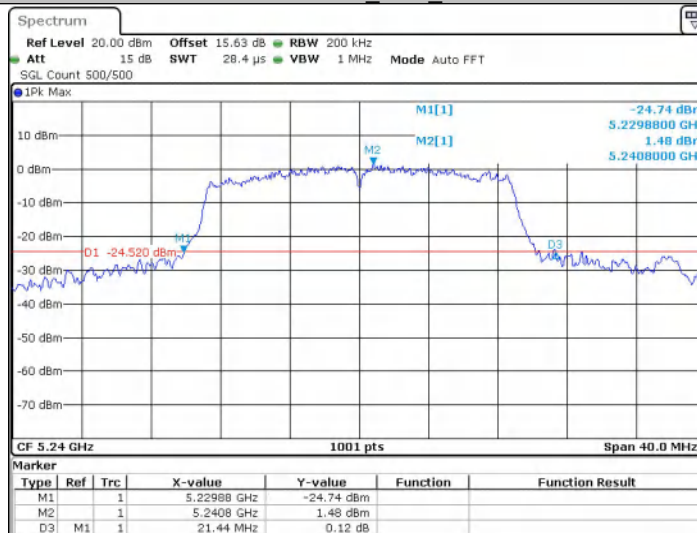


Date: 24 DEC 2025 20:35:41

11AC20SISO_Ant2_5745

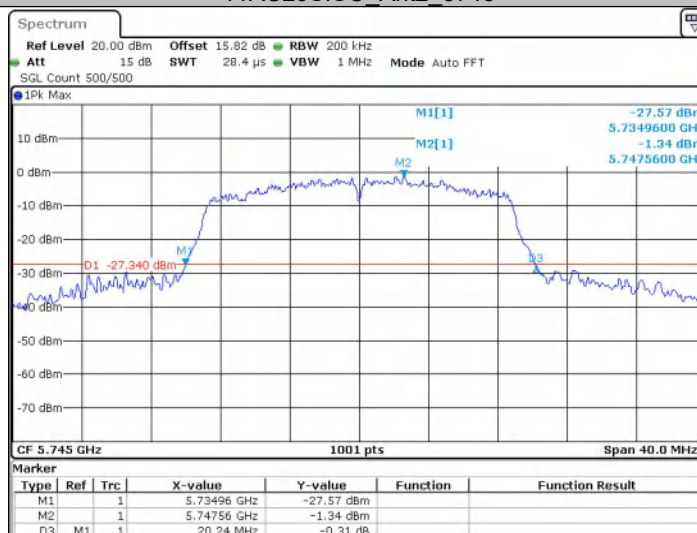


Date: 24 DEC 2025 20:37:13

11AC20SISO_Ant2_5785

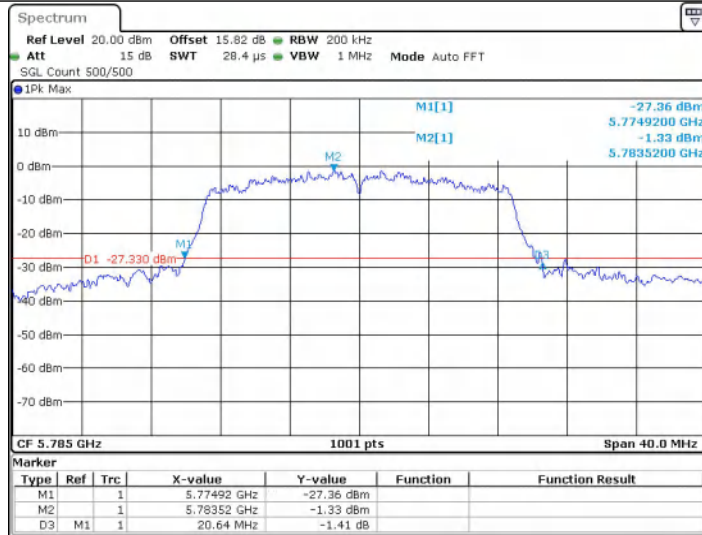


Date: 24 DEC 2025 20:38:45

11AC20SISO_Ant2_5825

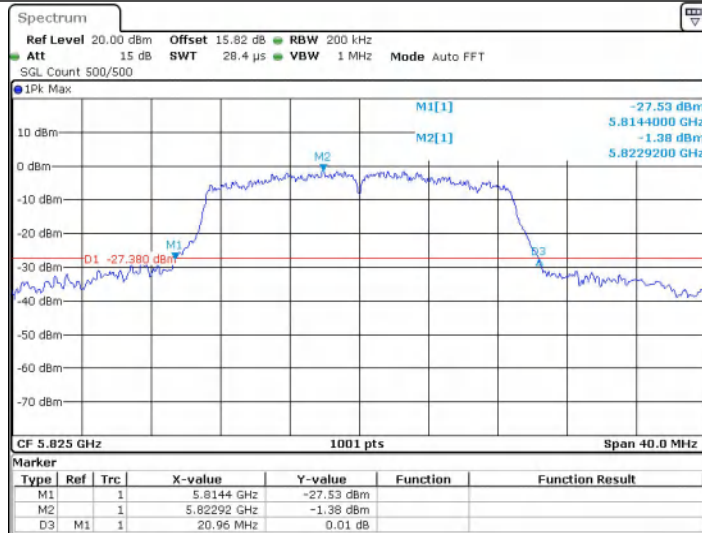


Date: 24 DEC 2025 20:40:01

11AC40SISO_Ant2_5190

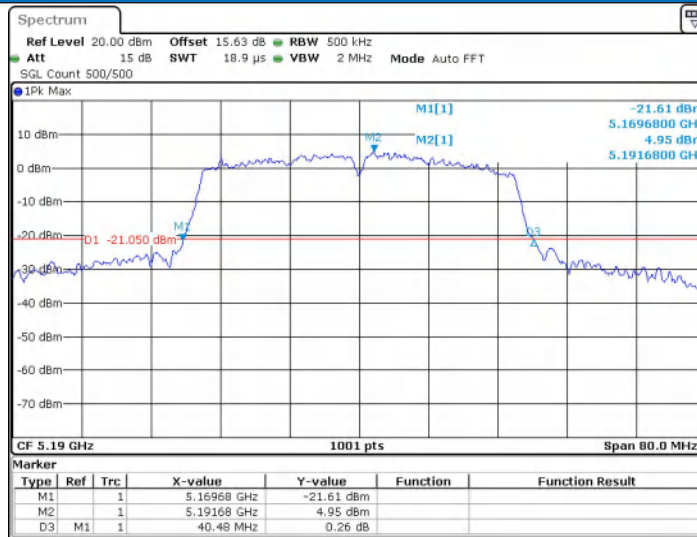


Date: 24 DEC 2025 20:41:31

11AC40SISO_Ant2_5230

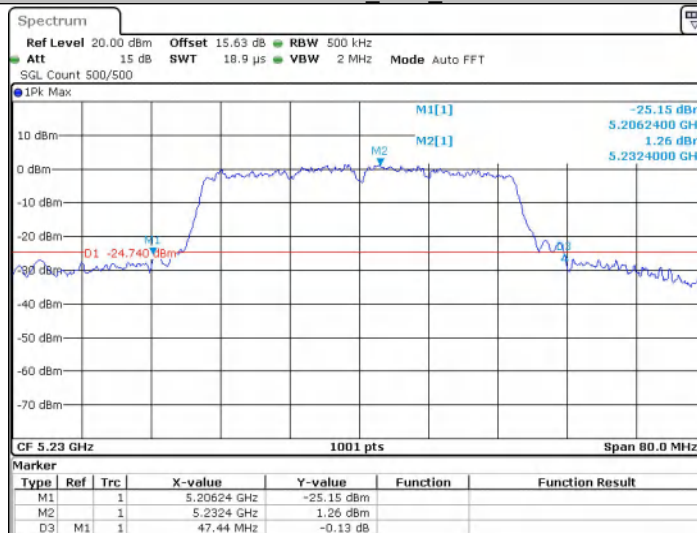


Date: 24 DEC 2025 20:43:51

11AC40SISO_Ant2_5755

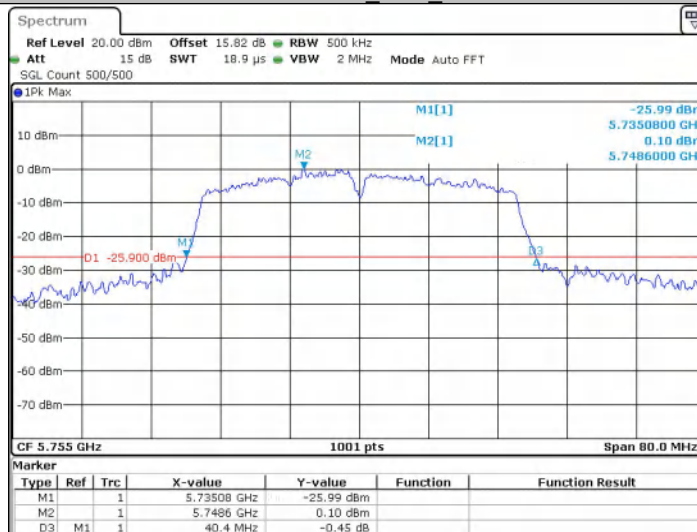


Date: 24 DEC 2025 20:46:32

11AC40SISO_Ant2_5795

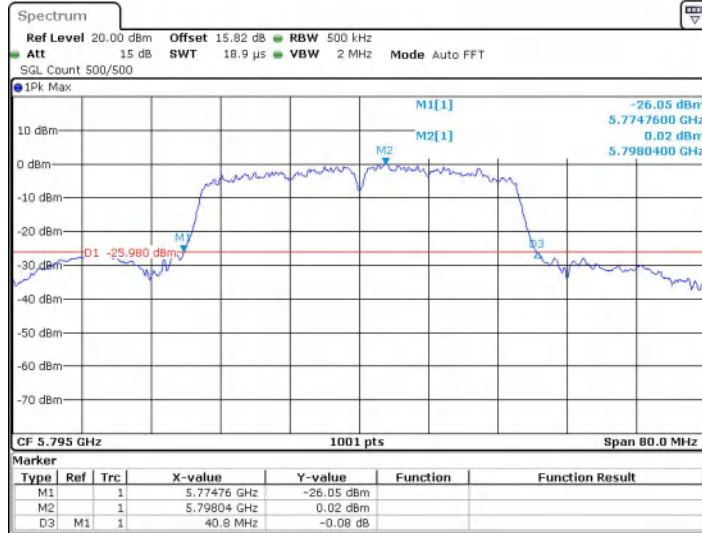


Date: 24 DEC 2025 20:48:16

11AC80SISO_Ant2_5210

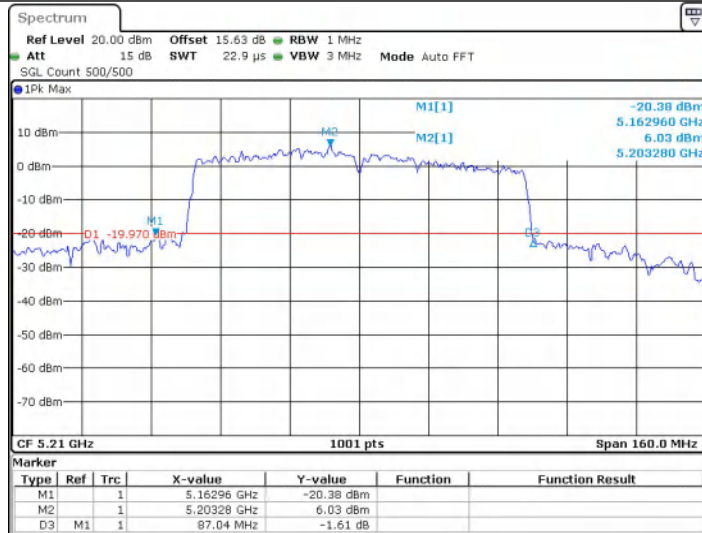


Date: 25 DEC 2025 10:42:42

11AC80SISO_Ant2_5775

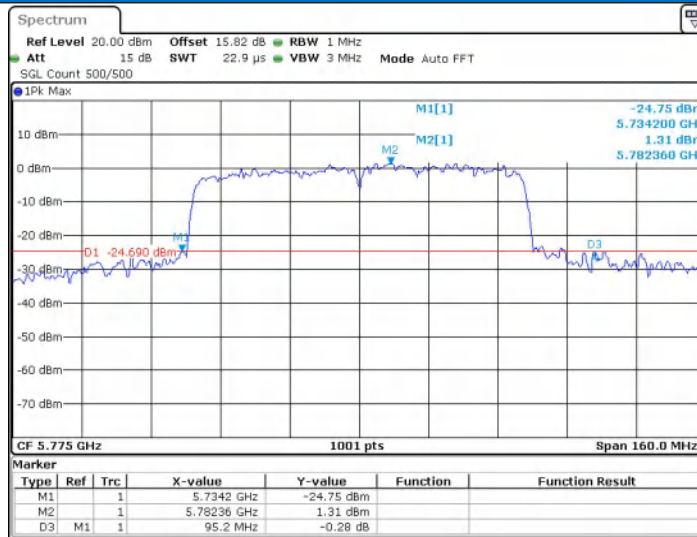


Date: 25 DEC 2025 10:45:55

11AX20SISO_Ant2_5180

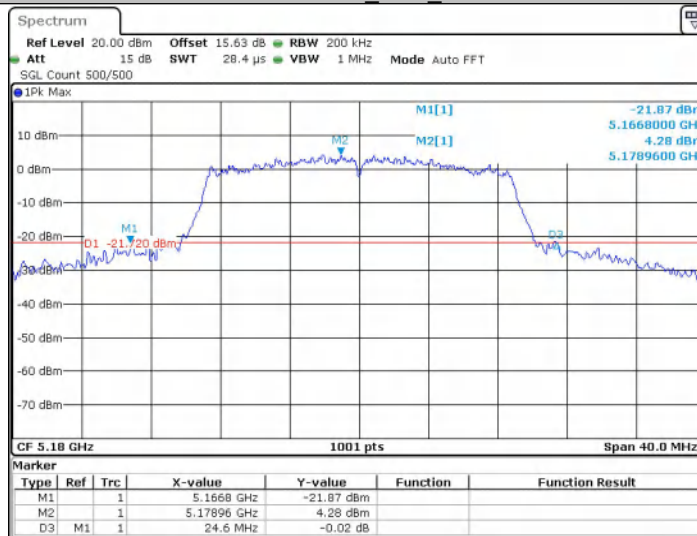


Date: 25 DEC 2025 10:48:11

11AX20SISO_Ant2_5200

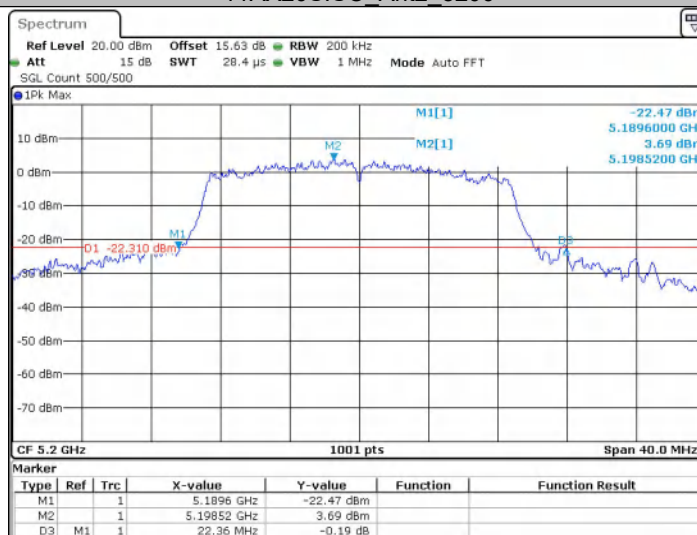


Date: 25 DEC 2025 10:50:27

11AX20SISO_Ant2_5240

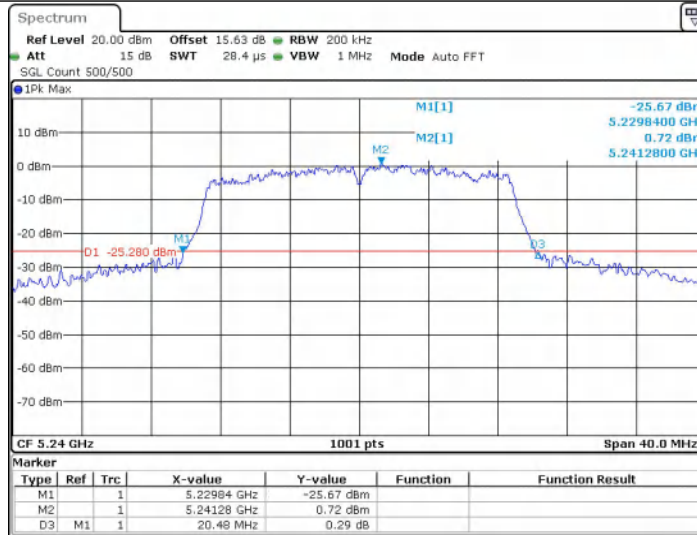


Date: 25 DEC 2025 10:51:39

11AX20SISO_Ant2_5745

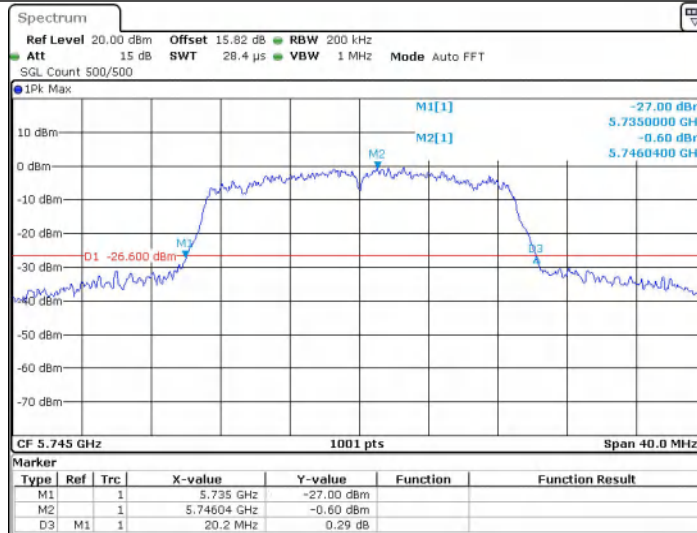


Date: 25 DEC 2025 10:53:27

11AX20SISO_Ant2_5785

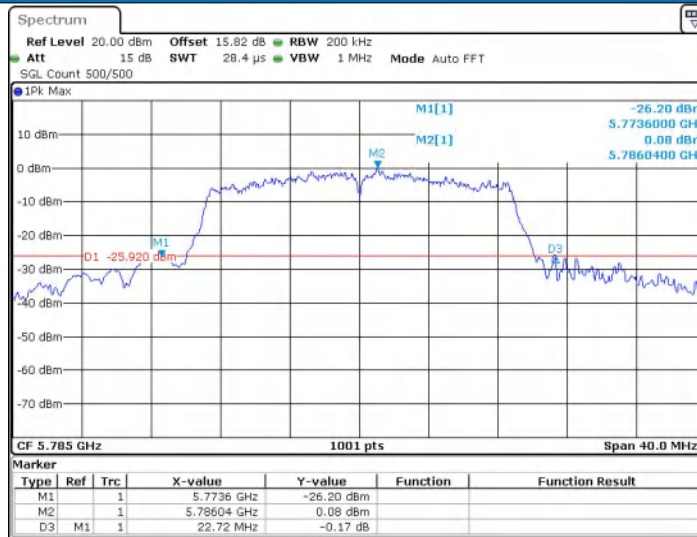


Date: 25 DEC 2025 10:55:01

11AX20SISO_Ant2_5825

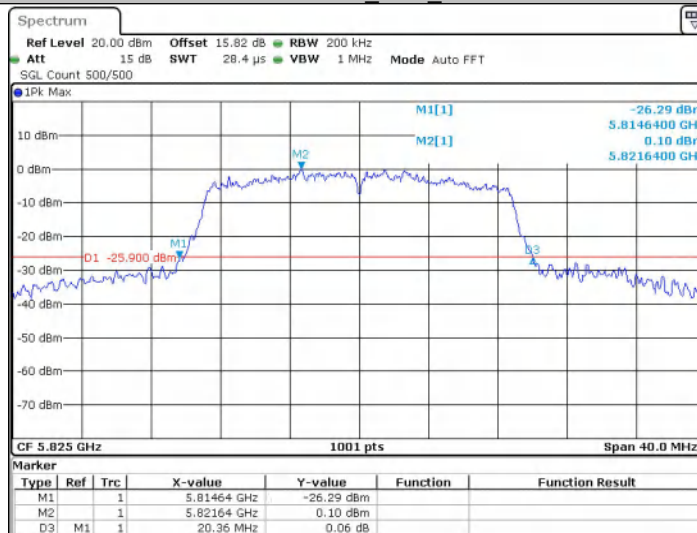


Date: 25 DEC 2025 10:57:07

11AX40SISO_Ant2_5190

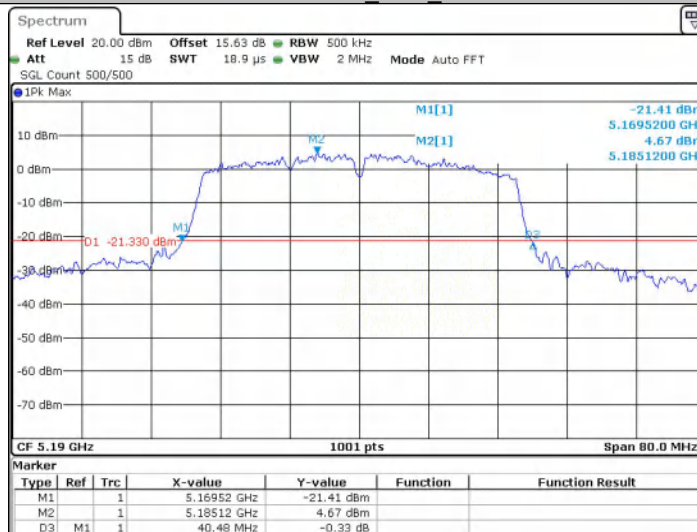


Date: 25 DEC 2025 11:00:18

11AX40SISO_Ant2_5230

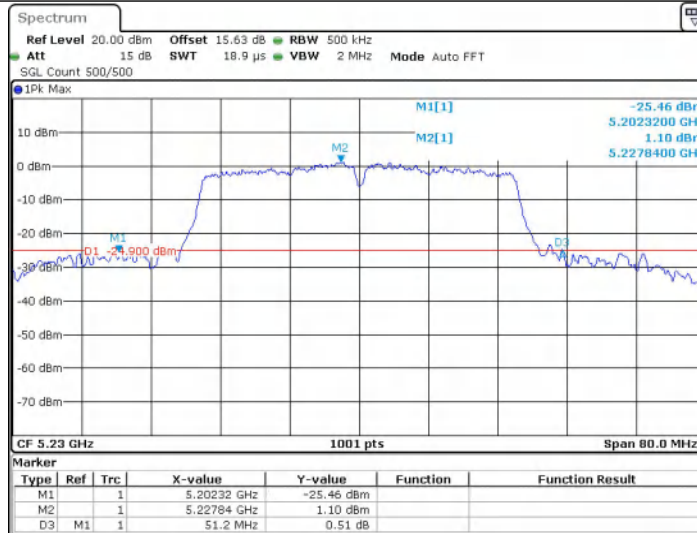


Date: 25 DEC 2025 11:03:20

11AX40SISO_Ant2_5755

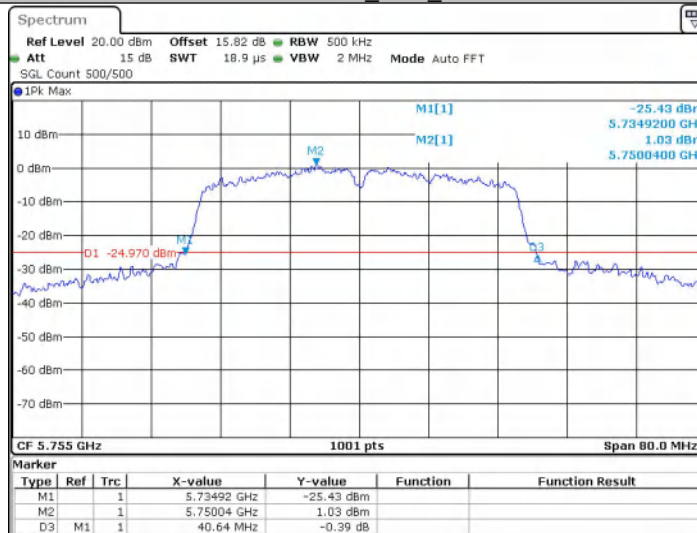


Date: 25 DEC 2025 11:05:13

11AX40SISO_Ant2_5795

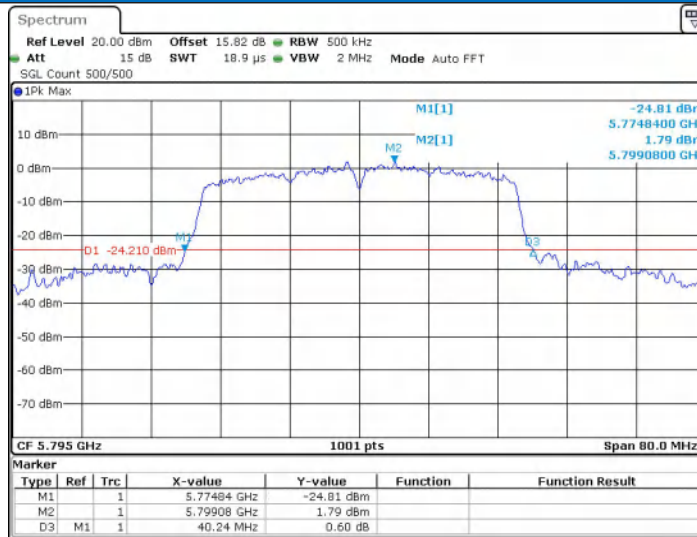


Date: 25 DEC 2025 11:09:04

11AX80SISO_Ant2_5210

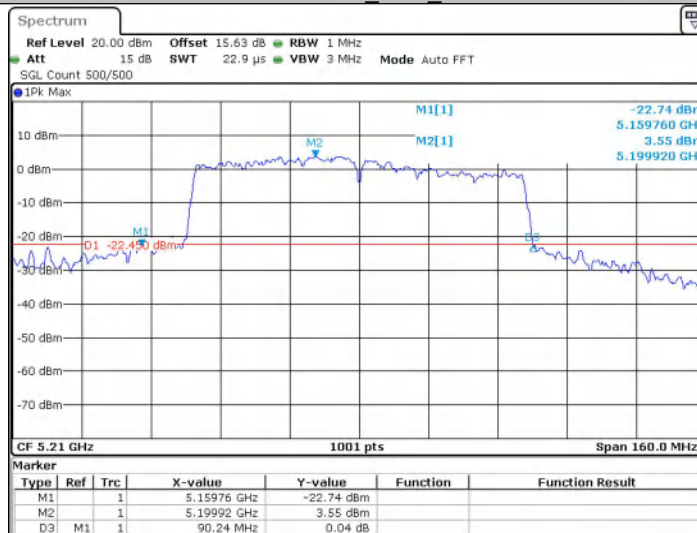


Date: 25 DEC 2025 11:11:09

11AX80SISO_Ant2_5775

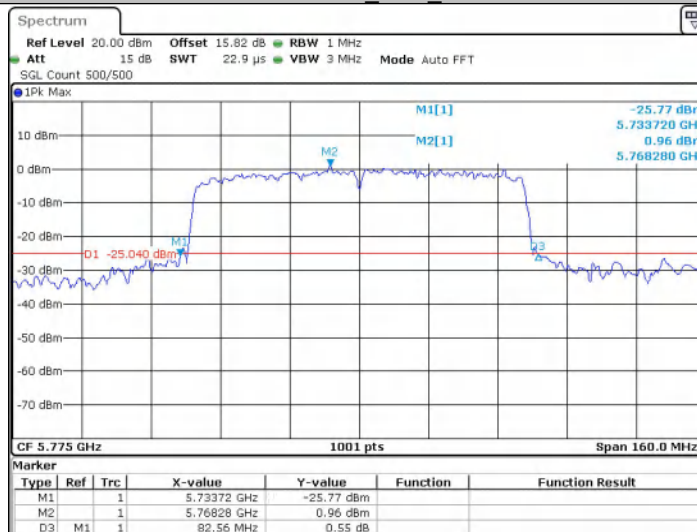


Date: 25 DEC 2025 11:13:53

11A_Ant2_5745

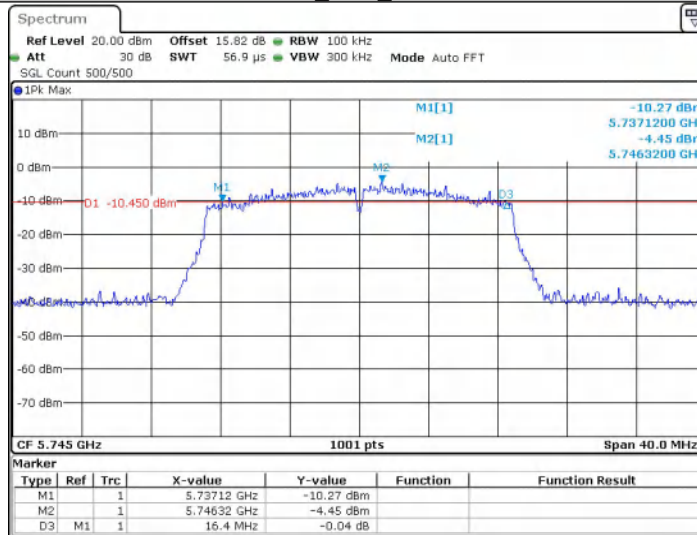


Date: 25 DEC 2025 18:18:51

11A_Ant2_5785

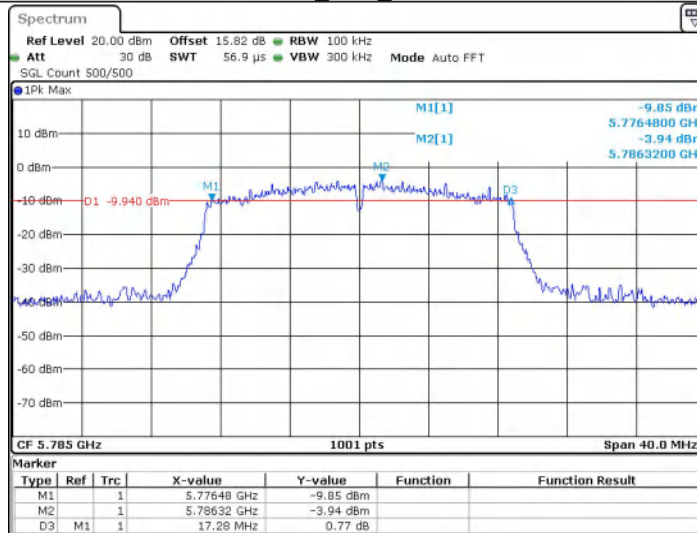


Date: 25 DEC 2025 18:19:19


11A_Ant2_5825

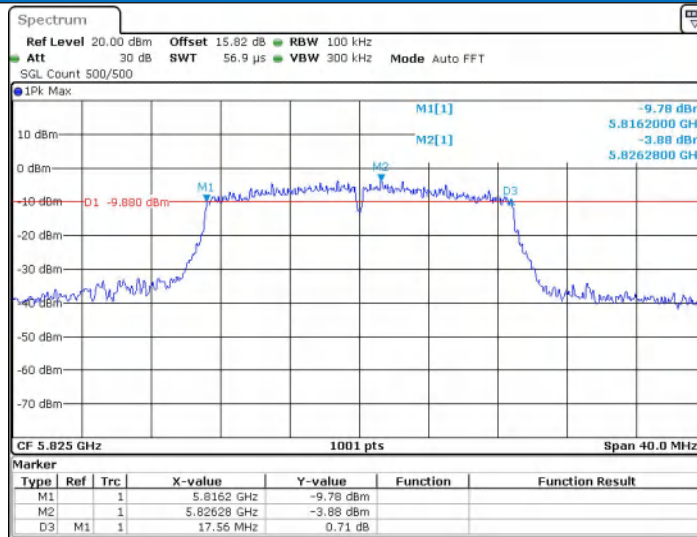


11N20SISO_Ant2_5745

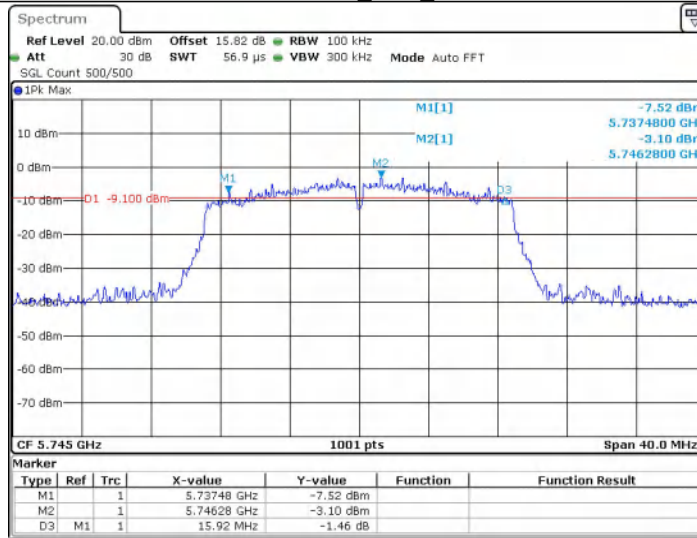

11N20SISO_Ant2_5785

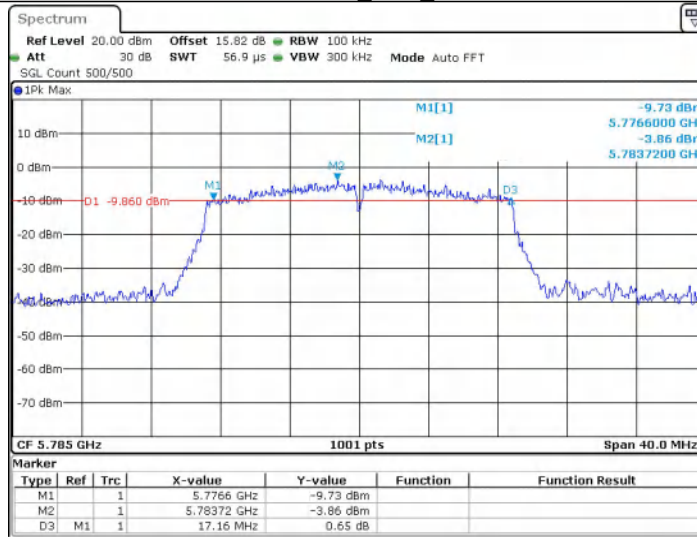


11N20SISO_Ant2_5825

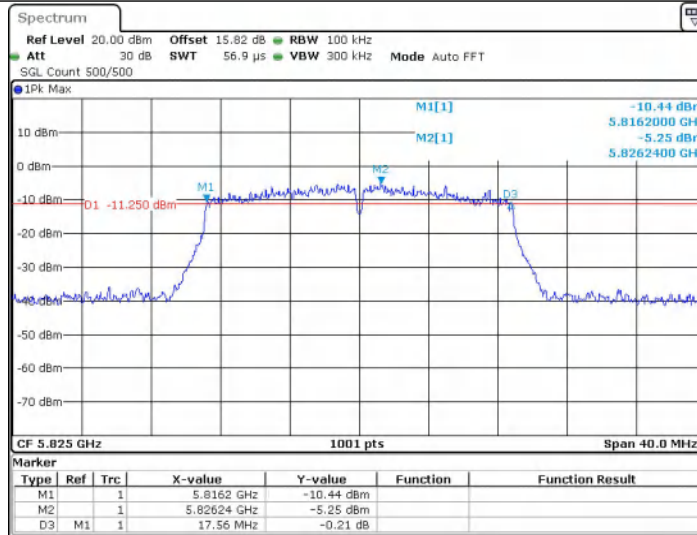


Date: 25 DEC 2025 18:20:44

11N40SISO_Ant2_5755

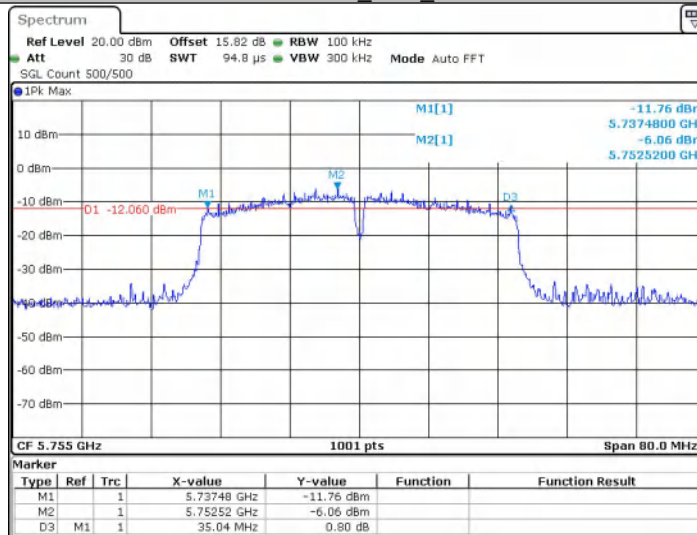


Date: 25 DEC 2025 18:21:20

11N40SISO_Ant2_5795

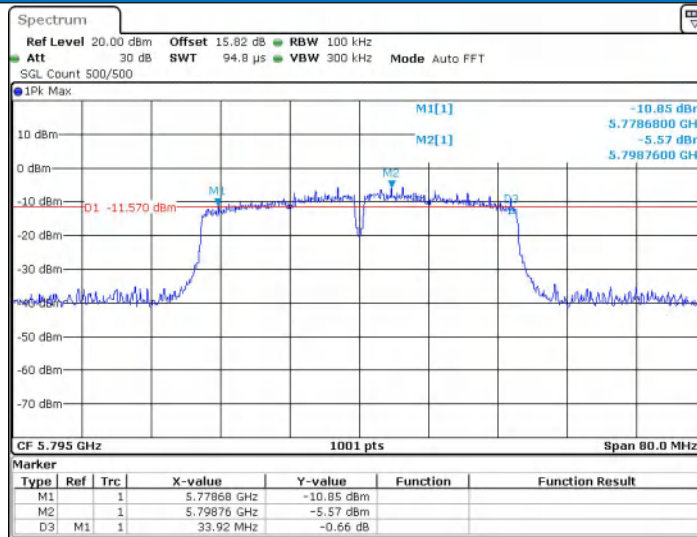


Date: 25 DEC 2025 18:21:57

11AC20SISO_Ant2_5745

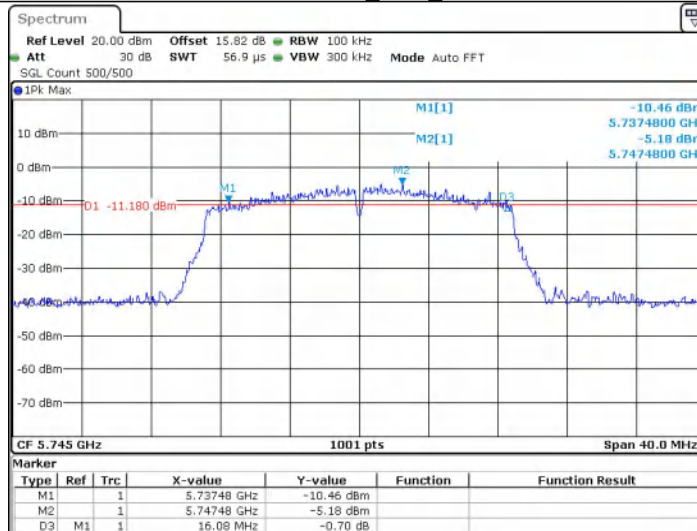


Date: 25 DEC 2025 18:22:21

11AC20SISO_Ant2_5785

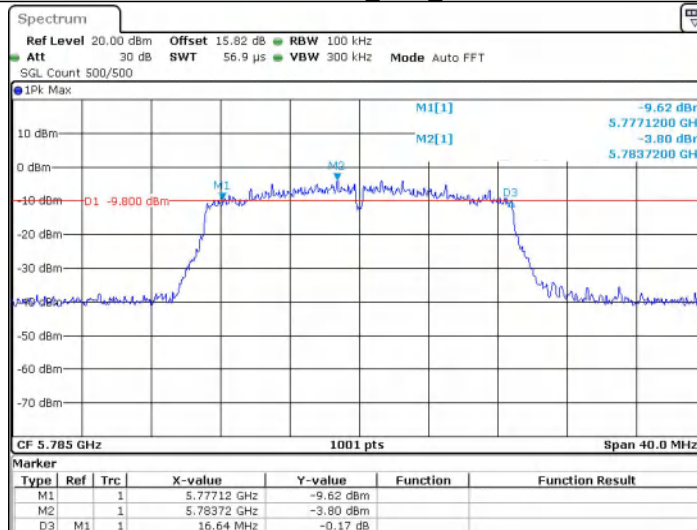


Date: 25 DEC 2025 18:22:43

11AC20SISO_Ant2_5825

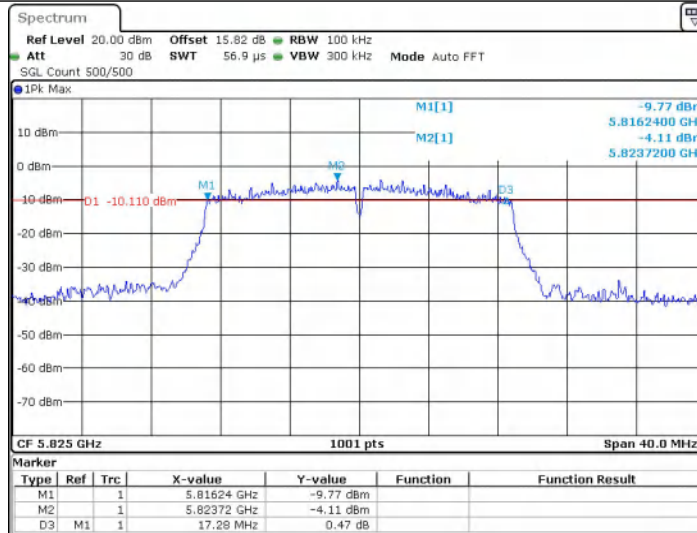


Date: 25 DEC 2025 18:23:06

11AC40SISO_Ant2_5755

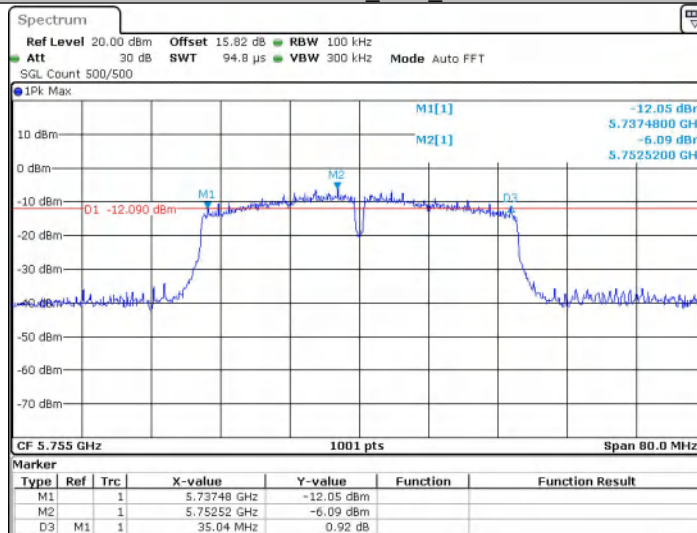


Date: 25 DEC 2025 18:23:46

11AC40SISO_Ant2_5795

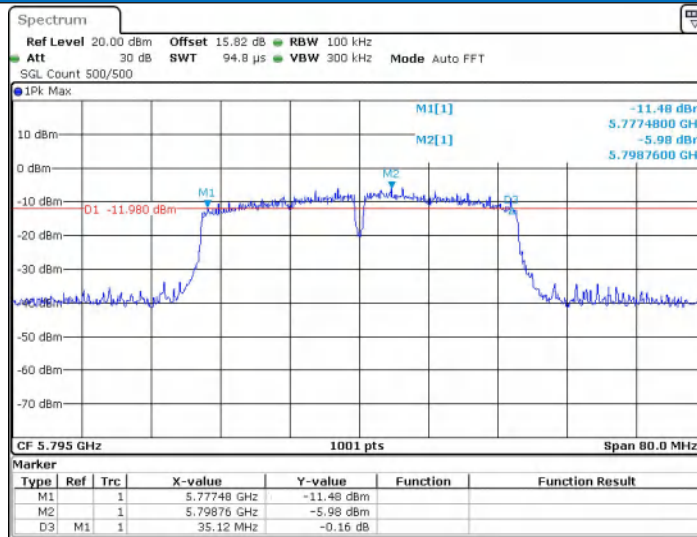


Date: 25 DEC 2025 18:24:21

11AC80SISO_Ant2_5775

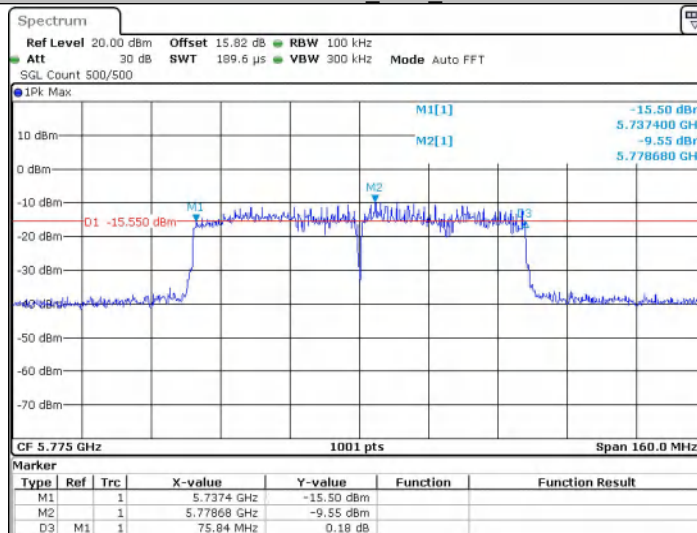


Date: 25 DEC 2025 18:24:58

11AX20SISO_Ant2_5745

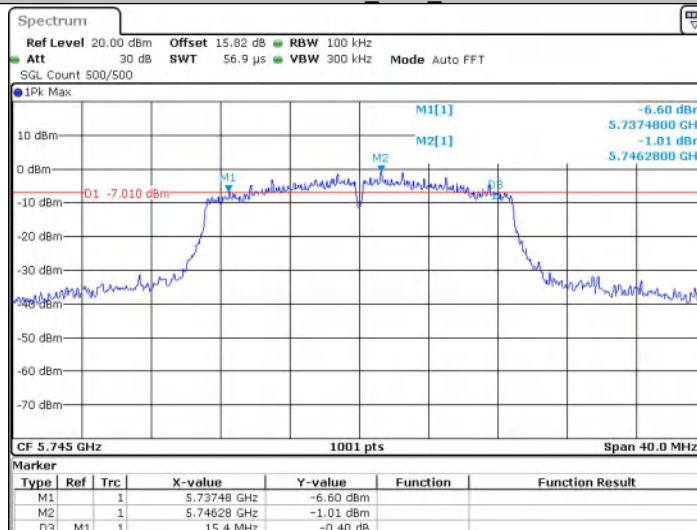


Date: 25 DEC 2025 18:25:21

11AX20SISO_Ant2_5785

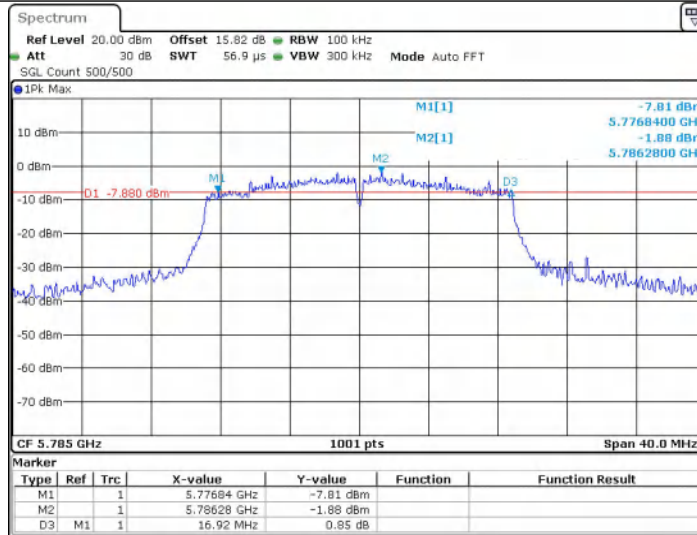


Date: 25 DEC 2025 18:25:51

11AX20SISO_Ant2_5825

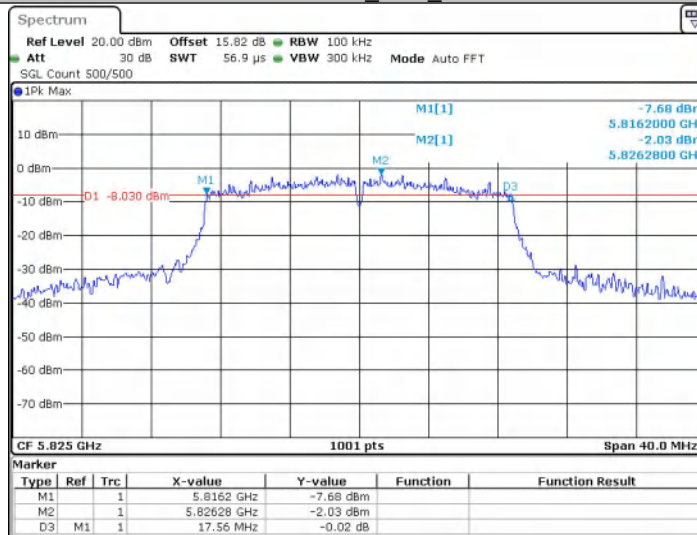


Date: 25 DEC 2025 18:26:12

11AX40SISO_Ant2_5755

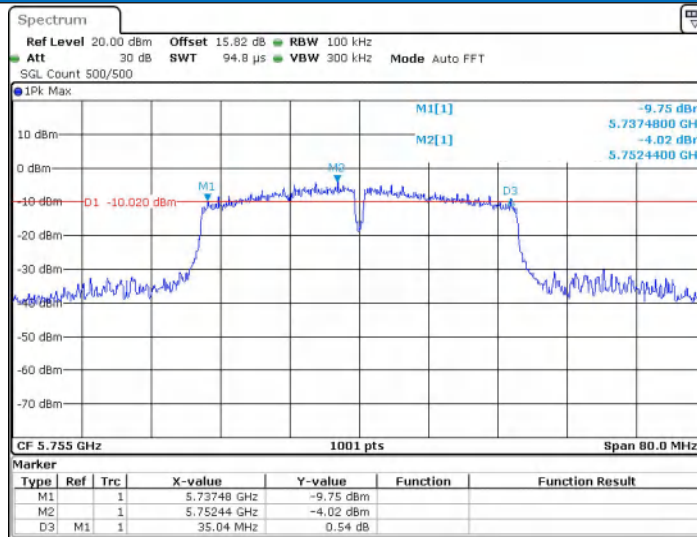


Date: 25 DEC 2025 18:27:02

11AX40SISO_Ant2_5795

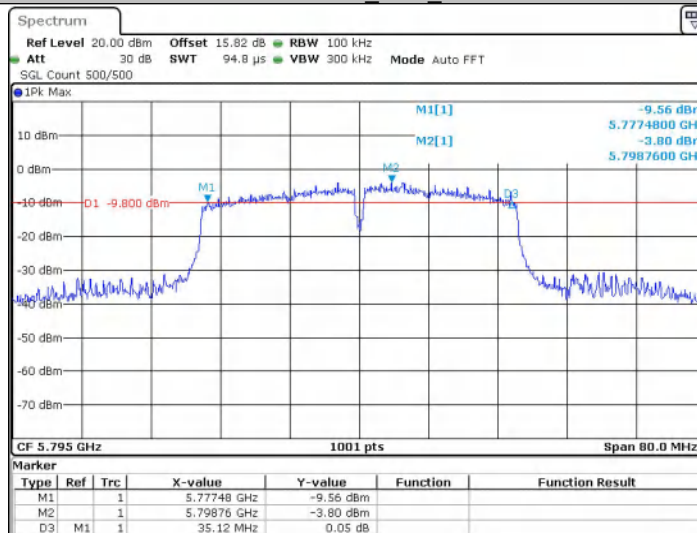


Date: 25 DEC 2025 18:27:25

11AX80SISO_Ant2_5775

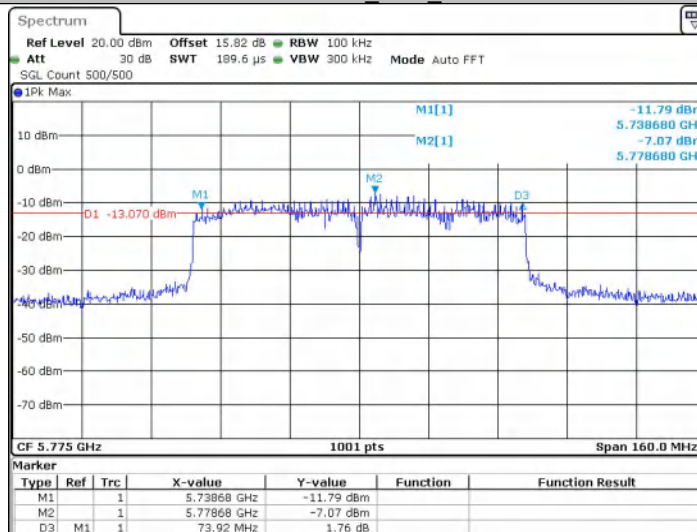


Date: 25 DEC 2025 18:28:01

11A_Ant2_5180

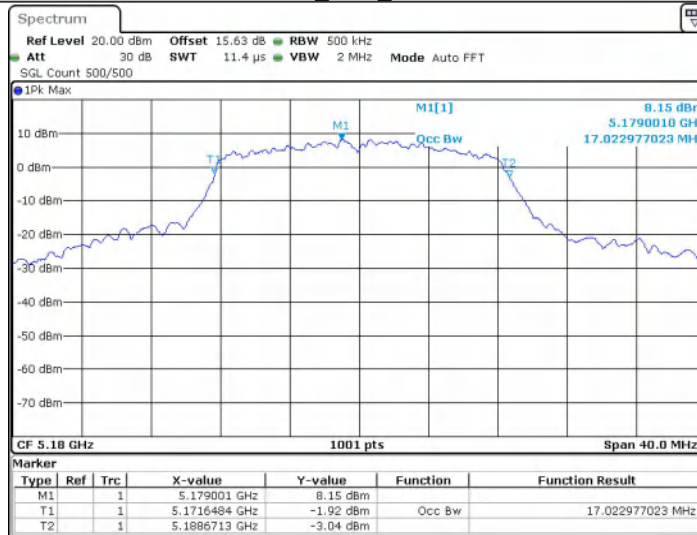


Date: 24 DEC 2025 19:37:07

11A_Ant2_5200

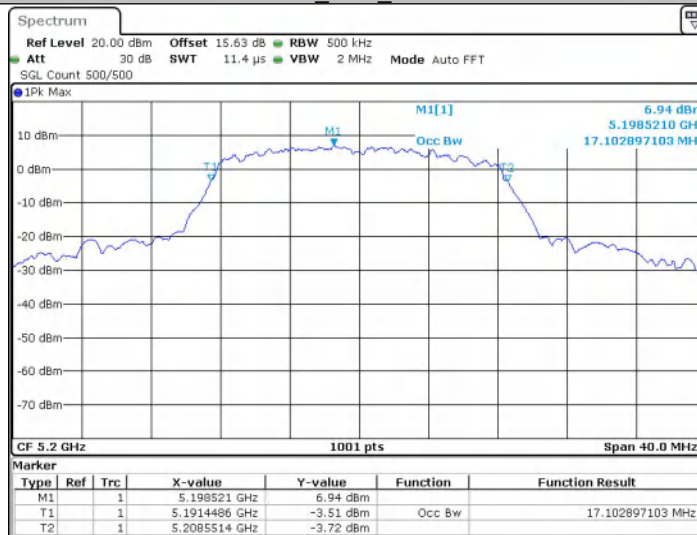


Date: 24 DEC 2025 19:40:26


11A_Ant2_5240

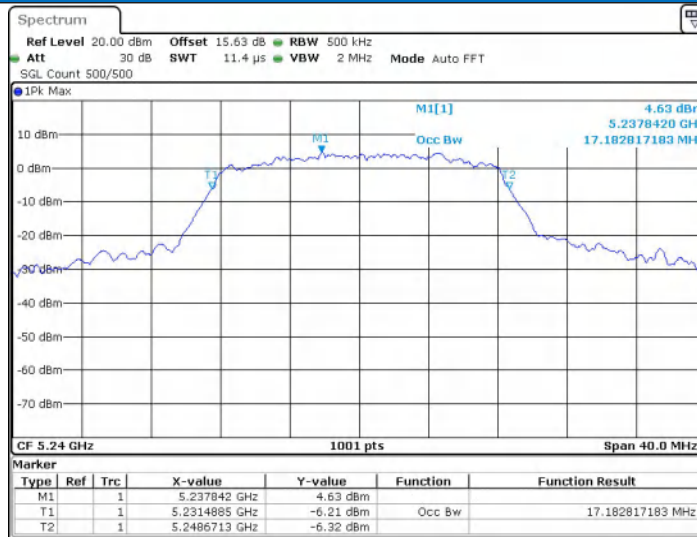


11A_Ant2_5745

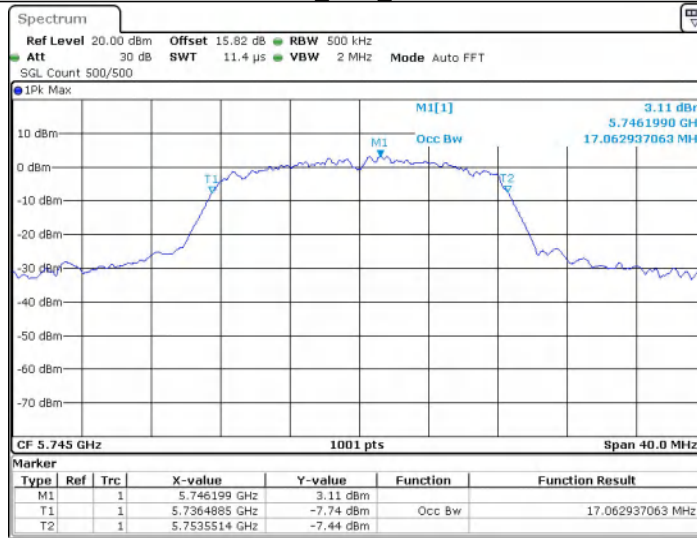

11A_Ant2_5785

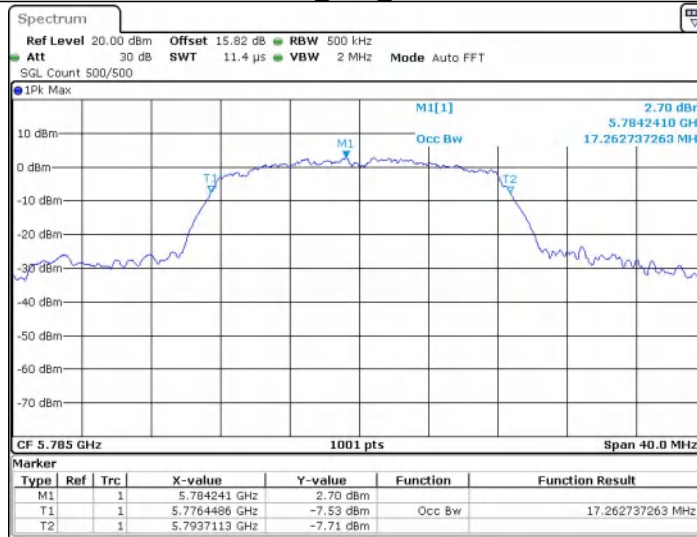


11A_Ant2_5825

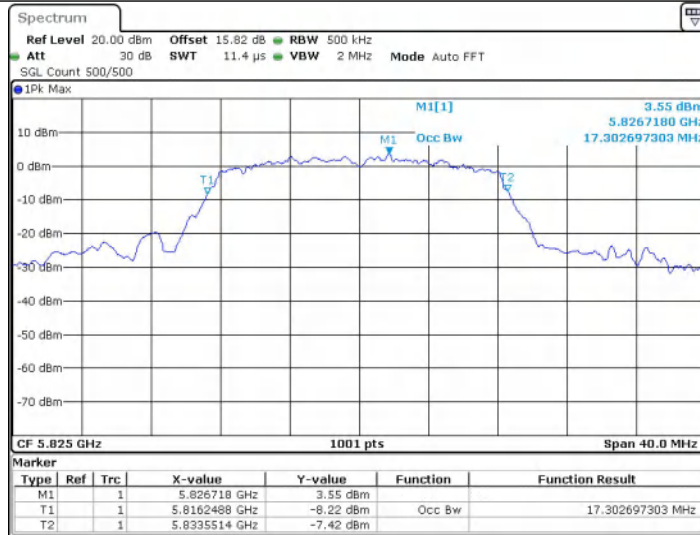

Date: 24 DEC 2025 19:51:13

11N20SISO_Ant2_5180

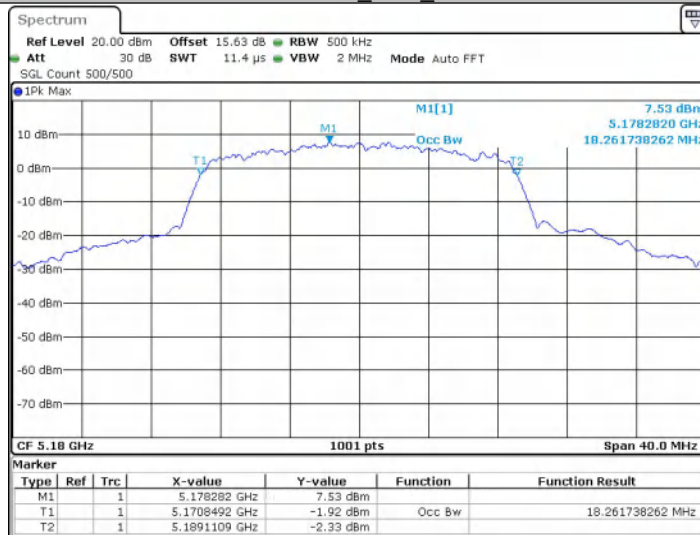

Date: 24 DEC 2025 19:52:45

11N20SISO_Ant2_5200