IW-6300H Series Access Point

Cisco Industrial Wireless Hazardous Location Access Point

2.4 GHz / 5 GHz 802.11 a/ac/b/g/n Wi-Fi radio

IW-6300H-AC-T-K9, IW-6300H-DC-T-K9, IW-6300H-DCW-T-K9, ESW-6300-CON-T-K9

FCC ID: LDKESW6300
IC ID: 2461D-ESW6300

5725-5850 MHz

Against the following Specifications:

47 CFR 15.407
47 CFR 15.209
47 CFR 15.205
RSS-247 issue 2
RSS-Gen issue 5
AS/NZ 4268:2017
LP0002:2018

ACCREDITED

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	
Author: Julian Land **Tested By:** Julian Land	**Approved By:** Adam Walb **Title:** MGR. IoT Compliance **Revision:** 1.0

This report replaces any previously entered test report under EDCS – 18731626**.** . This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW **5**

SECTION 2: ASSESSMENT INFORMATION **6**

2.1 GENERAL 6
2.2 DATE OF TESTING 8
2.3 REPORT ISSUE DATE 8
2.4 TESTING FACILITIES 8
2.5 EQUIPMENT ASSESSED (EUT) 8
2.6 EUT DESCRIPTION 9

SECTION 3: RESULT SUMMARY **12**

SECTION 4: SAMPLE DETAILS **13**

CONDUCTED TEST : **13**

4.1 SAMPLE DETAILS 13
4.2 MODE OF OPERATION DETAILS 13

APPENDIX A: EMISSION TEST RESULTS **15**

CONDUCTED TEST SETUP DIAGRAM 15
TARGET MAXIMUM CHANNEL POWER 15
A.1 DUTY CYCLE 17
A.26DB BANDWIDTH 20
A.3 99% AND 26DB BANDWIDTH 23
A.4MAXIMUM CONDUCTED OUTPUT POWER 26
A.5POWER SPECTRAL DENSITY 32
A.6CONDUCTED SPURIOUS EMISSIONS 38
A.7CONDUCTED BAND EDGE 52

APPENDIX B: RADIATED SPURIOUS AND AC CONDUCTED EMISSIONS **58**

B.1 RADIATED SPURIOUS EMISSIONS 58
B1.1 Setup Diagram 58
B1.2 Restricted Bands 60
B1.3 Limits 62
B1.4 Test Procedure 65
B1.5 TX Radiated Spurious Emissions Graphical Data Results 67
B.2 AC CONDUCTED EMISSIONS 79
B2.1 Limits 79
B2.2 Test Procedures 80
B2.3 AC Conducted Emissions Test Data and Graphical Test Results 83

APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST **85**

APPENDIX C: ABBREVIATION KEY AND DEFINITIONS **87**

APPENDIX D: PHOTOGRAPHS OF TEST SETUPS **88**

APPENDIX E: SOFTWARE USED TO PERFORM TESTING **95**

APPENDIX F: TEST PROCEDURES **96**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

APPENDIX G: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01).....97

APPENDIX H: TEST ASSESSMENT PLAN 97

APPENDIX I: WORST CASE JUSTIFICATION 97

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407
RSS-247
AS/NZ 4268:2017
LP0002:2018

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- KDB 662911 D01 Multiple Transmitter Output v02r01

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.

b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.

c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).

d) All testing was performed under the following environmental conditions:

Temperature	15℃ to 35℃ (54℉ to 95℉)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV] As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10-7
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.2 Date of testing

04-Oct-19 - 05-Oct-19

2.3 Report Issue Date

11/14/2019

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Julian Land

2.5 Equipment Assessed (EUT)

IW-6300H-DC-T-K9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.6 EUT Description

The Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11a - Non HT20, Two Antennas, 6 to 54 Mbps, 1ss

802.11a - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT40, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT80, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Two Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT80, One Antenna, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 2ss

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Model / PID Differences

IW-6300H-AC-x-K9, IW-6300H-DC-x-K9, IW-6300-DCW-x-K9 and ESW-6300-CON-x-K9, all have the same identical components, electronics circuitries, PCB layout and enclosure.

The only differences are listed as below:

IW-6300H-AC-x-K9
IW-6300H-DC-x-K9
IW-6300-DCW-x-K9
ESW-6300-CON-x-K9

Where “x” can be replaced with another letter to indicate country domain.
Domain letters: A, B, C, D, E, F, H, I, L, M, N, Q, R, S, T, Z

Where “AC” is Alternating Current (AC power supply)
Where “DC” is Direct Current (DC power supply), 54V native input
Where “DCW” is Direct Current; wide range 10-36VDC
Where “K9” is encryption software.

Note: Because the three models only differ in the way they are powered up, and the wireless features are exactly the same, only one set of data is collected and documented in this report. All the formal compliance testing was performed using IW-6300H-DC-T-K9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

The following antennas are tested by this product.
The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	>30 degree 5 GHz Antenna Gain (dBi)
2.4/5 GHz	AIR-ANT2547V-N	Dual-band Omni	**4 / 7**	**-6**
	AIR-ANT2513P4M-N	Dual-band Polarization Diverse Patch Array	**13 / 13**	**-5**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 3: Result Summary

3.1 Results Summary Table

LP0002 : 2018			
Standard Section	**Test Item**	**Jud ment**	Remark
4.7.4.5/2 3	Conducte Emission	PASS	None
4.7.4/2.8	Radiated Spurious Emission	PASS	None
4.7.3.3	Peak Output Power	PASS	None
4.7.5	Occupied Bandwith	PASS	None
4.7.3.3	Power Density	PASS	None
4.7.4/2.8	Restricted Bands	PASS	None
4.7.4/2.8	ANTENNA CONDUCTED SPURIOUS EMISSION	PASS	None
4.7.8	Antenna Requirement	PASS	None

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 4: Sample Details

Conducted Test :

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	IW-6300H-DC-T-K9	Cisco Systems	P2	9.1.8.1	9.0.5.5-W8964	FOC23241G16
S02*	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226

(*) S02 issupport equipment Power supply for EUT S01

4.2 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting ≥98% duty cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- KDB 662911 D01 Multiple Transmitter Output v02r01

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

4.3 Mode of Operation Details

Mode (# of Antenna) Setting#	Wi-Fi Mode	Modulation	Data Rate
Single Mode Antenna			
1 (single antenna)	802.11a*	BPSK	6 Mbps
2 (single antenna)	802.11an (HT20)	BPSK	6.5 Mbps (MCS0)
3 (single antenna)	802.11an (HT40)	BPSK	13.5 Mbps (MCS0)
4 (single antenna)	802.11ac (VHT20)	BPSK	6.5 Mbps (MCS0)
5 (single antenna)	802.11ac (VHT40)	BPSK	13.5 Mbps (MCS0)
6 (single antenna)	802.11ac (VHT80)	BPSK	29.3 Mbps (MCS0)
Dual Mode Antenna			
7 (dual antenna)	802.11an (HT20)	BPSK	13.0 Mbps (MCS0)
8 (dual antenna)	802.11an (HT40)*	BPSK	27.0 Mbps (MCS0)
9 (dual antenna)	802.11ac (VHT20)	BPSK	13.0 Mbps (MCS0)
10 (dual antenna)	802.11ac (VHT40)	BPSK	27.0 Mbps (MCS0)
11 (dual antenna)	802.11ac (VHT80)	BPSK	58.5 Mbps (MCS0)
Note: Table above represents the worst case scenarios for all modulations and data rate combination of each mode. ***: Setting**# was determined to be the worst case emissions of all modes and selected for RSE testing.			

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix A: Emission Test Results

Conducted Test Setup Diagram

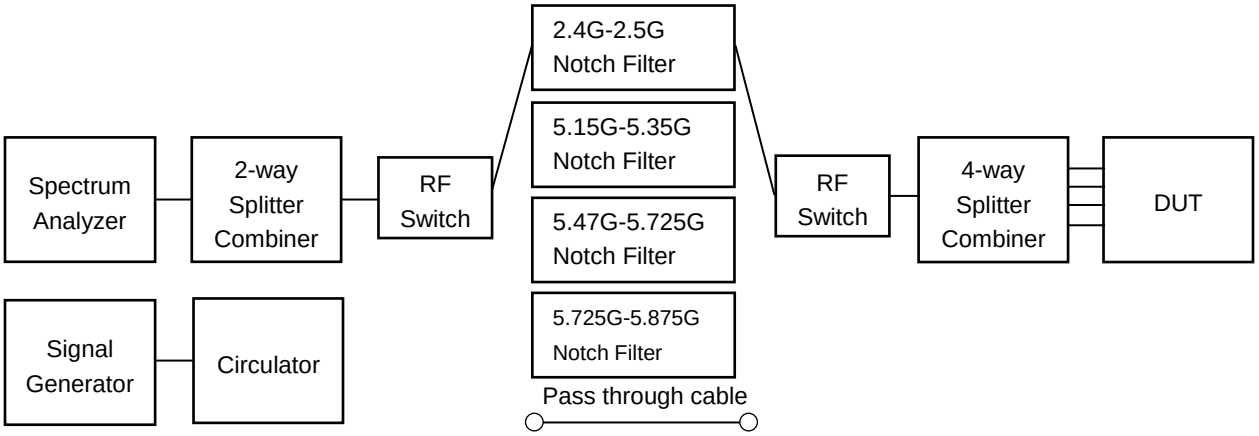

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Antenna Gain: 7dBi	Maximum Channel Power (dBm)		
	Frequency (MHz)		
Operating Mode	5745	5785	5825
Non HT20, 6 to 54 Mbps	25	25	24
Non HT20 Beam Forming, 6 to 54 Mbps	21	22	21
HT/VHT20, M0 to M15	25	25	24
HT/VHT20 Beam Forming, M0 to M15	25	25	24
HT/VHT20 STBC, M0 to M7	25	25	24
	5755	5795	
Non HT40, 6 to 54 Mbps	25	24	
HT/VHT40, M0 to M15	26	24	
HT/VHT40 Beam Forming, M0 to M15	26	24	
HT/VHT40 STBC, M0 to M7	26	24	
	5775		
Non HT80, 6 to 54 Mbps	20		
VHT80, M0 to M9, M0 to M9 1-2ss	24		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss	24		
VHT80 STBC, M0 to M9 1ss	24		

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 13dBi	Maximum Channel Power (dBm)		
	Frequency (MHz)		
Operating Mode	5745	5785	5825
Non HT20, 6 to 54 Mbps	18	19	18
Non HT20 Beam Forming, 6 to 54 Mbps	16	17	16
HT/VHT20, M0 to M15	18	20	18
HT/VHT20 Beam Forming, M0 to M15	16	17	16
HT/VHT20 STBC, M0 to M7	16	17	16
	5755	5795	
Non HT40, 6 to 54 Mbps	17	17	
HT/VHT40, M0 to M15	19	18	
HT/VHT40 Beam Forming, M0 to M15	16	16	
HT/VHT40 STBC, M0 to M7	16	16	
	5775		
Non HT80, 6 to 54 Mbps	13		
VHT80, M0 to M9, M0 to M9 1-2ss	19		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss	16		
VHT80 STBC, M0 to M9 1ss	16		

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.1 Duty Cycle

Duty Cycle Test Requirement
From KDB 789033 D02 General UNII Test Procedures New Rules v02r01
B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, *T*, are required for each tested mode of operation.

Duty Cycle Test Method
From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:
B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW ≥ EBW if possible; otherwise, set RBW to the largest available value. Set VBW ≥ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T ≤ 16.7 microseconds.)

Duty Cycle Test Information

Tested By:	**Date of testing:**
Julian Land	04-Oct-19 - 05-Oct-19
Test Result: PASS	

Test Equipment

See Appendix B for list of test equipment

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	List Samples here	☑	☐
	Support	List Samples here	☐	☑

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Frequency	Mode	Data Rate	Duty Cycle correction (dB)
5745	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0
5755	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M15	m0	0.0
5775	Non HT80, 6 to 54 Mbps	6	0.0
	VHT80, M0 to M9, M0 to M9 1-2ss	**m0x1**	**0.1**
5785	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0
5795	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M15	m0	0.0
5825	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Duty Cycle, 5775 MHz, VHT80, M0 to M9, M0 to M9 1-2ss

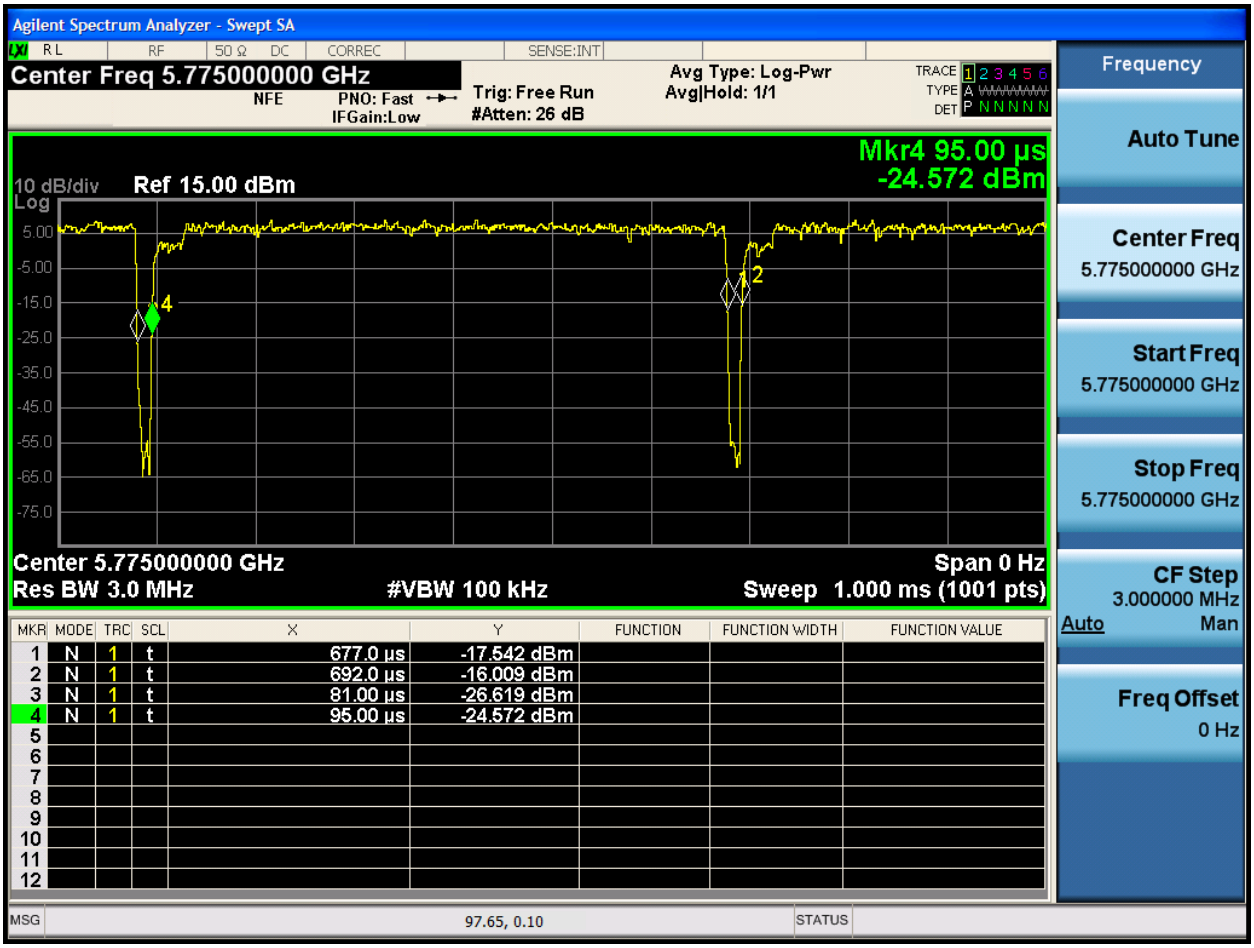

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.26dB Bandwidth

15.407 / RSS-247 Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013

6 BW Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013 section 11.8.2 Option 2

6 BW Test parameters
X dB BW = 6dB (using the OBW function of the spectrum analyzer) Span = Large enough to capture the entire EBW RBW = 100 KHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak or where practical sample shall be used Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By:	**Date of testing:**
Julian Land	04-Oct-19 - 05-Oct-19
Test Result: PASS	

See Appendix B for list of test equipment

6dB Bandwidth Table

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	**Non HT20, 6 to 54 Mbps**	**6**	**16.5**	**>500**	**16.00**
	HT/VHT20, M0 to M15	m0	17.6	>500	17.10
5755	Non HT40, 6 to 54 Mbps	6	35.8	>500	35.30
	HT/VHT40, M0 to M15	m0	35.7	>500	35.20
5775	Non HT80, 6 to 54 Mbps	6	76.4	>500	75.90
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	76.2	>500	75.70
5785	Non HT20, 6 to 54 Mbps	6	16.5	>500	16.00
	HT/VHT20, M0 to M15	m0	17.7	>500	17.20
5795	Non HT40, 6 to 54 Mbps	6	35.7	>500	35.20
	HT/VHT40, M0 to M15	m0	35.6	>500	35.10
5825	Non HT20, 6 to 54 Mbps	6	16.5	>500	16.00
	HT/VHT20, M0 to M15	m0	17.6	>500	17.10

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 5745 MHz, Non HT20, 6 to 54 Mbps

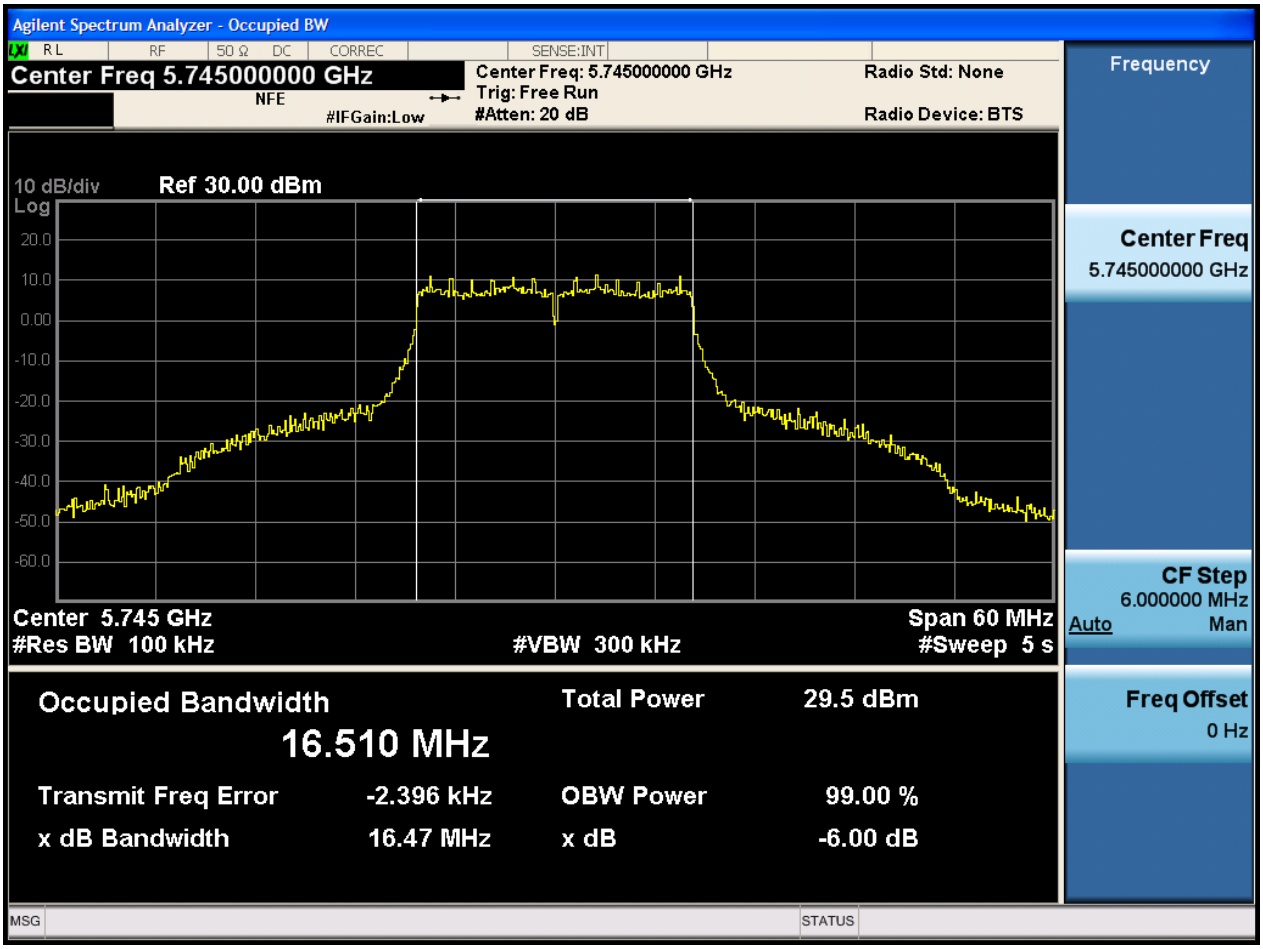

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.3 99% and 26dB Bandwidth

FCC 15.407 / RSS-GEN The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26-dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB) Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB) Test parameters
Span = 1.5 x to 5.0 times OBW RBW = approx. 1% to 5% of the OBW VBW ≥ 3 x RBW Detector = Peak or where practical sample shall be used Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By: Julian Land	**Date of testing:** 04-Oct-19 - 05-Oct-19
Test Result: PASS	

See Appendix B for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

99% and 26dB Bandwidth Table

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT20, 6 to 54 Mbps	6	19.8	16.639
	HT/VHT20, M0 to M15	m0	20.2	17.657
5755	Non HT40, 6 to 54 Mbps	6	52.4	36.589
	HT/VHT40, M0 to M15	m0	40.8	36.205
5775	Non HT80, 6 to 54 Mbps	6	82.0	76.377
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	83.0	76.440
5785	**Non HT20, 6 to 54 Mbps**	**6**	**19.6**	**16.607**
	HT/VHT20, M0 to M15	m0	20.1	17.645
5795	Non HT40, 6 to 54 Mbps	6	43.3	36.483
	HT/VHT40, M0 to M15	m0	41.0	36.216
5825	Non HT20, 6 to 54 Mbps	6	19.7	16.625
	HT/VHT20, M0 to M15	m0	20.3	17.657

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

26dB / 99% Bandwidth, 5785 MHz, Non HT20 Beam Forming, 6 to 54 Mbps

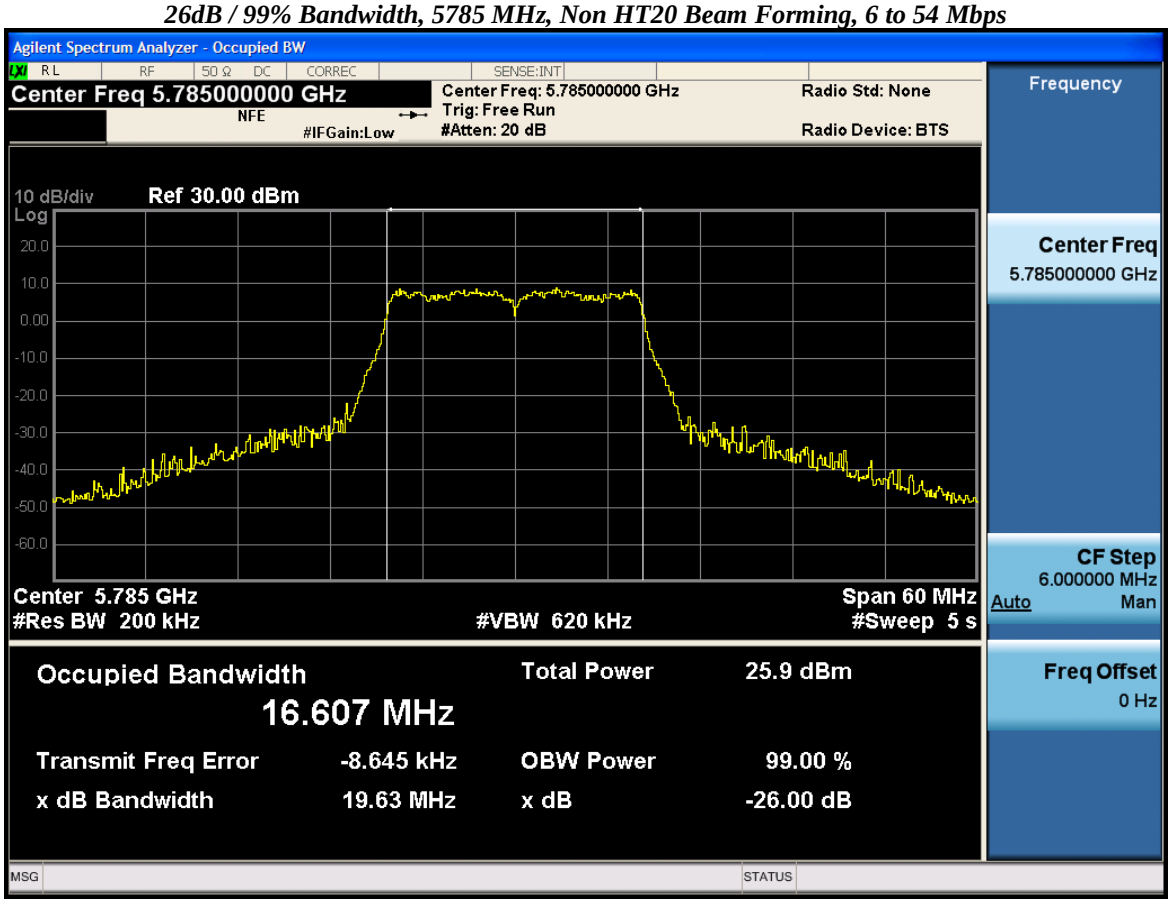

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.4Maximum Conducted Output Power

15.407 / RSS-247, LP0002: 4.7.3.3 (1) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013

Output Power Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

Output Power Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By:	**Date of testing:**
Julian Land	04-Oct-19 - 05-Oct-19
Test Result : PASS	

See Appendix B for list of test equipment

Maximum Output Power

Antenna Gain: 7dBi

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	7	21.1		0.0	21.1	29.0	7.88
	Non HT20, 6 to 54 Mbps	2	7	19.9	20.4	0.0	23.2	29.0	5.81
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	16.7	16.9	0.0	19.8	26.0	6.16
	HT/VHT20, M0 to M7	1	7	21.2		0.0	21.2	29.0	7.78
	HT/VHT20, M0 to M7	2	7	21.2	21.7	0.0	24.5	29.0	4.51
	HT/VHT20, M8 to M15	2	7	21.2	21.7	0.0	24.5	29.0	4.51
	HT/VHT20 Beam Forming, M0 to M7	2	10	16.7	17.0	0.0	19.9	26.0	6.12
	HT/VHT20 Beam Forming, M8 to M15	2	7	21.2	21.7	0.0	24.5	29.0	4.51
	HT/VHT20 STBC, M0 to M7	2	7	21.2	21.7	0.0	24.5	29.0	4.51
5755	Non HT40, 6 to 54 Mbps	1	7	20.5		0.0	20.5	29.0	8.48
	Non HT40, 6 to 54 Mbps	2	7	20.5	21.0	0.0	23.8	29.0	5.21
	HT/VHT40, M0 to M7	1	7	21.4		0.1	21.5	29.0	7.54
	HT/VHT40, M0 to M7	**2**	**7**	**21.4**	**21.9**	**0.1**	**24.7**	**29.0**	**4.28**
	HT/VHT40, M8 to M15	2	7	21.4	21.9	0.1	24.7	29.0	4.28
	HT/VHT40 Beam Forming, M0 to M7	2	10	17.1	17.7	0.1	20.5	26.0	5.52
	HT/VHT40 Beam Forming, M8 to M15	2	7	21.4	21.9	0.1	24.7	29.0	4.28
	HT/VHT40 STBC, M0 to M7	2	7	21.4	21.9	0.1	24.7	29.0	4.28
5775	Non HT80, 6 to 54 Mbps	1	7	15.9		0.0	15.9	29.0	13.07
	Non HT80, 6 to 54 Mbps	2	7	15.9	16.7	0.0	19.4	29.0	9.65
	VHT80, M0 to M9 1ss	1	7	21.9		0.1	22.0	29.0	7.00
	VHT80, M0 to M9 1ss	2	7	19.9	20.6	0.1	23.4	29.0	5.62
	VHT80, M0 to M9 2ss	2	7	19.9	20.6	0.1	23.4	29.0	5.62
	VHT80 Beam Forming, M0 to M9 1ss	2	10	17.6	18.4	0.1	21.1	26.0	4.87
	VHT80 Beam Forming, M0 to M9 2ss	2	7	19.9	20.6	0.1	23.4	29.0	5.62
	VHT80 STBC, M0 to M9 1ss	2	7	19.9	20.6	0.1	23.4	29.0	5.62

7 8	Non HT20, 6 to 54 Mbps	1	7	22.3		0.0	22.3	29.0	6.68

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20, 6 to 54 Mbps	2	7	20.2	20.1	0.0	23.2	29.0	5.81
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	17.9	18.0	0.0	21.0	26.0	5.01
	HT/VHT20, M0 to M7	1	7	22.4		0.0	22.4	29.0	6.58
	HT/VHT20, M0 to M7	2	7	21.4	21.4	0.0	24.4	29.0	4.57
	HT/VHT20, M8 to M15	2	7	21.4	21.4	0.0	24.4	29.0	4.57
	HT/VHT20 Beam Forming, M0 to M7	2	10	18.1	18.1	0.0	21.1	26.0	4.87
	HT/VHT20 Beam Forming, M8 to M15	2	7	21.4	21.4	0.0	24.4	29.0	4.57
	HT/VHT20 STBC, M0 to M7	2	7	21.4	21.4	0.0	24.4	29.0	4.57
5795	Non HT40, 6 to 54 Mbps	1	7	19.5		0.0	19.5	29.0	9.48
	Non HT40, 6 to 54 Mbps	2	7	19.5	19.8	0.0	22.7	29.0	6.32
	HT/VHT40, M0 to M7	1	7	21.3		0.1	21.4	29.0	7.64
	HT/VHT40, M0 to M7	2	7	19.5	19.6	0.1	22.6	29.0	6.38
	HT/VHT40, M8 to M15	2	7	19.5	19.6	0.1	22.6	29.0	6.38
	HT/VHT40 Beam Forming, M0 to M7	2	10	16.5	16.9	0.1	19.8	26.0	6.23
	HT/VHT40 Beam Forming, M8 to M15	2	7	19.5	19.6	0.1	22.6	29.0	6.38
	HT/VHT40 STBC, M0 to M7	2	7	19.5	19.6	0.1	22.6	29.0	6.38
5825	Non HT20, 6 to 54 Mbps	1	7	20.5		0.0	20.5	29.0	8.48
	Non HT20, 6 to 54 Mbps	2	7	20.5	20.2	0.0	23.4	29.0	5.61
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	16.8	16.7	0.0	19.8	26.0	6.21
	HT/VHT20, M0 to M7	1	7	20.7		0.0	20.7	29.0	8.28
	HT/VHT20, M0 to M7	2	7	19.8	19.5	0.0	22.7	29.0	6.32
	HT/VHT20, M8 to M15	2	7	19.8	19.5	0.0	22.7	29.0	6.32
	HT/VHT20 Beam Forming, M0 to M7	2	10	16.9	16.8	0.0	19.9	26.0	6.12
	HT/VHT20 Beam Forming, M8 to M15	2	7	19.8	19.5	0.0	22.7	29.0	6.32
	HT/VHT20 STBC, M0 to M7	2	7	19.8	19.5	0.0	22.7	29.0	6.32

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 13dBi									
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	13	16.7		0.0	16.7	23.0	6.28
	Non HT20, 6 to 54 Mbps	2	13	11.9	12.7	0.0	15.4	23.0	7.65
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	11.9	12.7	0.0	15.4	23.0	7.65
	HT/VHT20, M0 to M7	1	13	16.7		0.0	16.7	23.0	6.28
	HT/VHT20, M0 to M7	2	13	12.0	12.8	0.0	15.5	23.0	7.55
	HT/VHT20, M8 to M15	2	13	12.0	12.8	0.0	15.5	23.0	7.55
	HT/VHT20 Beam Forming, M0 to M7	2	13	12.0	12.8	0.0	15.5	23.0	7.55
	HT/VHT20 Beam Forming, M8 to M15	2	13	12.0	12.8	0.0	15.5	23.0	7.55
	HT/VHT20 STBC, M0 to M7	2	13	12.0	12.8	0.0	15.5	23.0	7.55
5755	Non HT40, 6 to 54 Mbps	1	13	15.7		0.0	15.7	23.0	7.28
	Non HT40, 6 to 54 Mbps	2	13	9.6	10.2	0.0	12.9	23.0	10.06
	HT/VHT40, M0 to M7	1	13	17.1		0.1	17.2	23.0	5.84
	HT/VHT40, M0 to M7	2	13	11.5	12.0	0.1	14.8	23.0	8.18
	HT/VHT40, M8 to M15	2	13	11.5	12.0	0.1	14.8	23.0	8.18
	HT/VHT40 Beam Forming, M0 to M7	2	13	11.5	12.0	0.1	14.8	23.0	8.18
	HT/VHT40 Beam Forming, M8 to M15	2	13	11.5	12.0	0.1	14.8	23.0	8.18
	HT/VHT40 STBC, M0 to M7	2	13	11.5	12.0	0.1	14.8	23.0	8.18
5775	Non HT80, 6 to 54 Mbps	1	13	11.6		0.0	11.6	23.0	11.37
	Non HT80, 6 to 54 Mbps	2	13	5.6	6.5	0.0	9.1	23.0	13.89
	VHT80, M0 to M9 1ss	1	13	17.6		0.1	17.7	23.0	5.30
	VHT80, M0 to M9 1ss	2	13	12.0	12.8	0.1	15.5	23.0	7.47
	VHT80, M0 to M9 2ss	2	13	12.0	12.8	0.1	15.5	23.0	7.47
	VHT80 Beam Forming, M0 to M9 1ss	2	13	12.0	12.8	0.1	15.5	23.0	7.47
	VHT80 Beam Forming, M0 to M9 2ss	2	13	12.0	12.8	0.1	15.5	23.0	7.47
	VHT80 STBC, M0 to M9 1ss	2	13	12.0	12.8	0.1	15.5	23.0	7.47

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT20, 6 to 54 Mbps	1	13	17.9		0.0	17.9	23.0	5.08
	Non HT20, 6 to 54 Mbps	2	13	12.5	12.6	0.0	15.6	23.0	7.41
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	12.5	12.6	0.0	15.6	23.0	7.41
	HT/VHT20, M0 to M7	**1**	**13**	**18.1**		**0.0**	**18.1**	**23.0**	**4.88**
	HT/VHT20, M0 to M7	2	13	12.7	12.7	0.0	15.7	23.0	7.27
	HT/VHT20, M8 to M15	2	13	12.7	12.7	0.0	15.7	23.0	7.27
	HT/VHT20 Beam Forming, M0 to M7	2	13	12.7	12.7	0.0	15.7	23.0	7.27
	HT/VHT20 Beam Forming, M8 to M15	2	13	12.7	12.7	0.0	15.7	23.0	7.27
	HT/VHT20 STBC, M0 to M7	2	13	12.7	12.7	0.0	15.7	23.0	7.27
5795	Non HT40, 6 to 54 Mbps	1	13	15.6		0.0	15.6	23.0	7.38
	Non HT40, 6 to 54 Mbps	2	13	10.8	10.9	0.0	13.9	23.0	9.12
	HT/VHT40, M0 to M7	1	13	16.5		0.1	16.6	23.0	6.44
	HT/VHT40, M0 to M7	2	13	11.4	11.7	0.1	14.6	23.0	8.38
	HT/VHT40, M8 to M15	2	13	11.4	11.7	0.1	14.6	23.0	8.38
	HT/VHT40 Beam Forming, M0 to M7	2	13	11.4	11.7	0.1	14.6	23.0	8.38
	HT/VHT40 Beam Forming, M8 to M15	2	13	11.4	11.7	0.1	14.6	23.0	8.38
	HT/VHT40 STBC, M0 to M7	2	13	11.4	11.7	0.1	14.6	23.0	8.38
5825	Non HT20, 6 to 54 Mbps	1	13	16.8		0.0	16.8	23.0	6.18
	Non HT20, 6 to 54 Mbps	2	13	11.8	11.7	0.0	14.8	23.0	8.21
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	11.8	11.7	0.0	14.8	23.0	8.21
	HT/VHT20, M0 to M7	1	13	16.9		0.0	16.9	23.0	6.08
	HT/VHT20, M0 to M7	2	13	12.0	11.9	0.0	15.0	23.0	8.02
	HT/VHT20, M8 to M15	2	13	12.0	11.9	0.0	15.0	23.0	8.02
	HT/VHT20 Beam Forming, M0 to M7	2	13	12.0	11.9	0.0	15.0	23.0	8.02
	HT/VHT20 Beam Forming, M8 to M15	2	13	12.0	11.9	0.0	15.0	23.0	8.02
	HT/VHT20 STBC, M0 to M7	2	13	12.0	11.9	0.0	15.0	23.0	8.02

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 7dBi

Maximum Transmit Output Power, 5755 MHz, HT/VHT40, M0 to M7

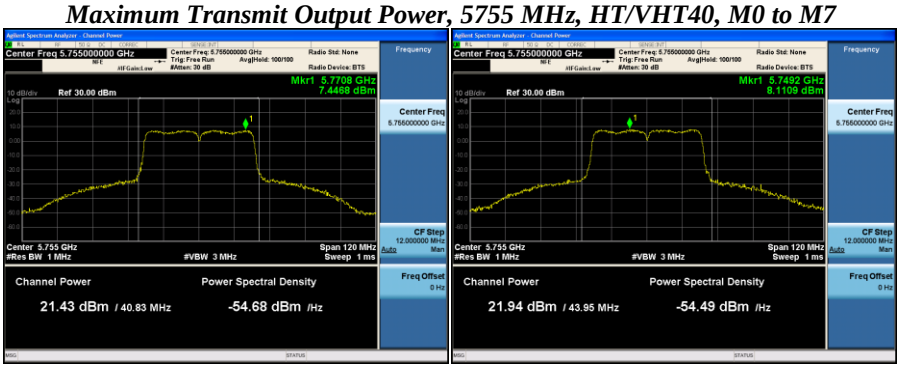

Antenna A ***Antenna B***

Antenna Gain : 13dBi

Maximum Transmit Output Power, 5785 MHz, HT/VHT20, M0 to M7

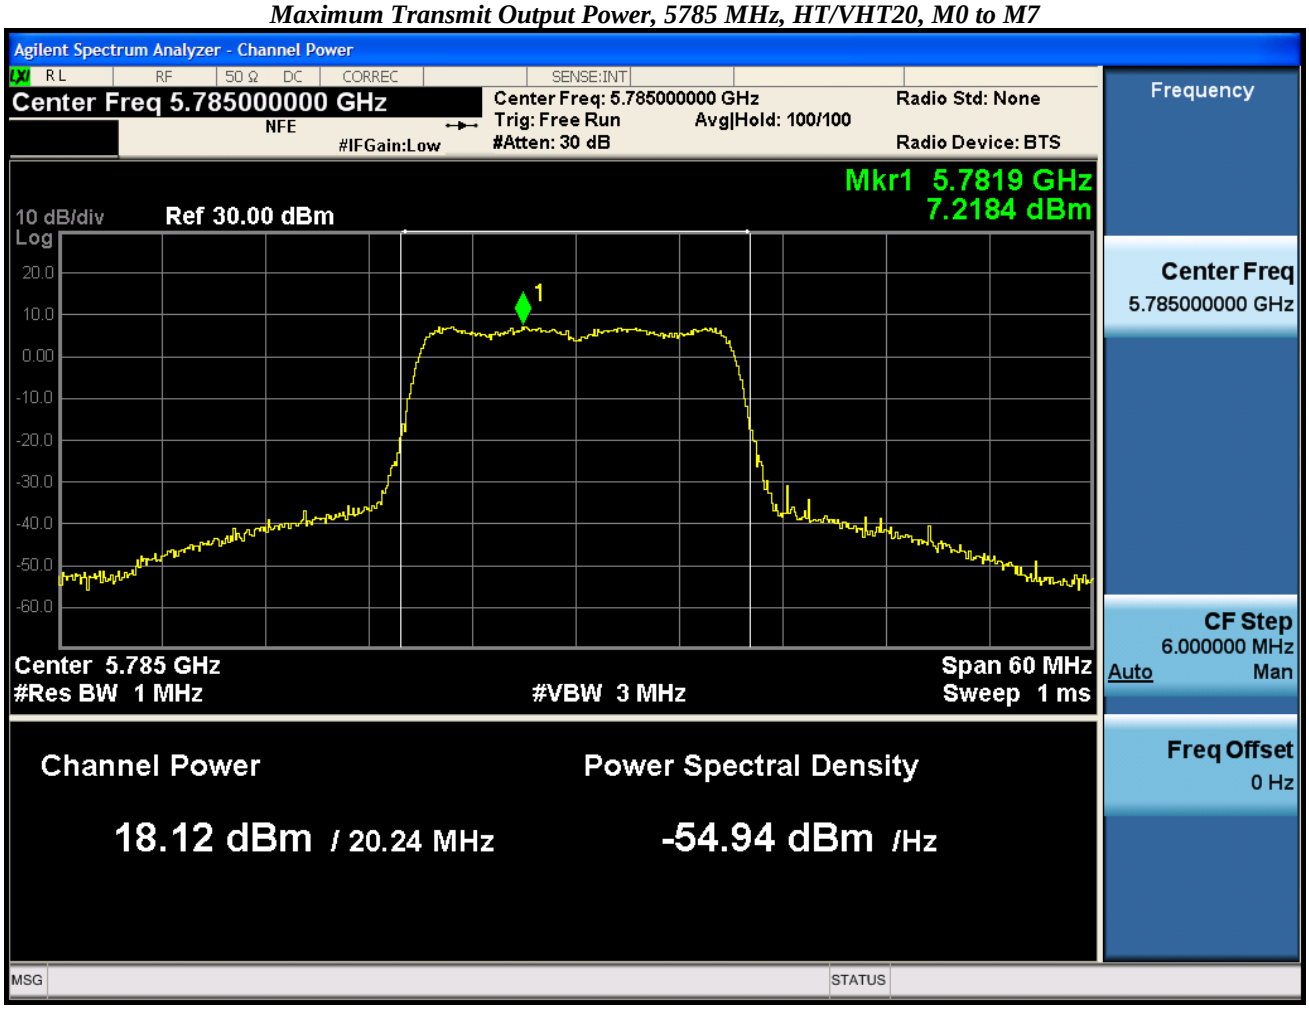

Antenna A

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.5Power Spectral Density

15.407 / RSS-247, LP0002: 4.7.3.3 (2) (4) The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

Power Spectral Density Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Set the radio in the continuous transmitting mode at full power 3. Configure Spectrum analyzer as per test parameters below and Peak search marker 4. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 v01 section F.5

Power Spectral Density Test parameters
Span = >1.5 times the OBW RBW = 500 kHz. VBW ≥ 3 x RBW Sweep = 10s Detector = Peak Trace = Single Sweep Marker = Peak Search

The “Measure and add 10 log(N) dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity 10 log (4) (or 6dB) is added to the worst-case spectrum value before comparing to the emission limit. (ANSI C63.10 2013 section 14.3.2.3)

System Number	**Description**	**Samples**	**System under test**	**Support equipment**
1	EUT	S01	☑	☐
	Support	S02	☐	☑

By: Julian Land	**Date of testing:** 04-Oct-19 - 05-Oct-19
Test Result: PASS	

See Appendix B for list of test equipment

Power Spectral Density

Antenna Gain: 7dBi

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/500kHz)	Tx 2 PSD (dBm/500kHz)	Duty Cycle Correction (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	7	7.9		0.0	7.9	29.0	21.08
	Non HT20, 6 to 54 Mbps	2	10	5.9	6.6	0.0	9.3	26.0	16.70
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	3.1	3.0	0.0	6.1	26.0	19.91
	HT/VHT20, M0 to M7	1	7	6.8		0.0	6.8	29.0	22.18
	HT/VHT20, M0 to M7	**2**	**10**	**6.8**	**7.6**	**0.0**	**10.3**	**26.0**	**15.75**
	HT/VHT20, M8 to M15	2	7	6.8	7.6	0.0	10.3	29.0	18.75
	HT/VHT20 Beam Forming, M0 to M7	2	10	2.6	2.8	0.0	5.7	26.0	20.27
	HT/VHT20 Beam Forming, M8 to M15	2	7	6.8	7.6	0.0	10.3	29.0	18.75
	HT/VHT20 STBC, M0 to M7	2	7	6.8	7.6	0.0	10.3	29.0	18.75
5755	Non HT40, 6 to 54 Mbps	1	7	3.9		0.0	3.9	29.0	25.08
	Non HT40, 6 to 54 Mbps	2	10	3.9	4.2	0.0	7.1	26.0	18.92
	HT/VHT40, M0 to M7	1	7	4.3		0.1	4.4	29.0	24.64
	HT/VHT40, M0 to M7	2	10	4.3	4.9	0.1	7.7	26.0	18.32
	HT/VHT40, M8 to M15	2	7	4.3	4.9	0.1	7.7	29.0	21.32
	HT/VHT40 Beam Forming, M0 to M7	2	10	-0.2	1.2	0.1	3.6	26.0	22.38
	HT/VHT40 Beam Forming, M8 to M15	2	7	4.3	4.9	0.1	7.7	29.0	21.32
	HT/VHT40 STBC, M0 to M7	2	7	4.3	4.9	0.1	7.7	29.0	21.32
5775	Non HT80, 6 to 54 Mbps	1	7	-4.4		0.0	-4.4	29.0	33.37
	Non HT80, 6 to 54 Mbps	2	10	-4.4	-3.3	0.0	-0.8	26.0	26.78
	VHT80, M0 to M9 1ss	1	7	0.8		0.1	0.9	29.0	28.10
	VHT80, M0 to M9 1ss	2	10	-0.9	-0.2	0.1	2.6	26.0	23.42
	VHT80, M0 to M9 2ss	2	7	-0.9	-0.2	0.1	2.6	29.0	26.42
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-3.3	-2.3	0.1	0.3	26.0	25.66
	VHT80 Beam Forming, M0 to M9 2ss	2	7	-0.9	-0.2	0.1	2.6	29.0	26.42
	VHT80 STBC, M0 to M9 1ss	2	7	-0.9	-0.2	0.1	2.6	29.0	26.42

5785	Non HT20, 6 to 54 Mbps	1	7	8.5		0.0	8.5	29.0	20.48
	Non HT20, 6 to 54 Mbps	2	10	6.2	6.3	0.0	9.3	26.0	16.71

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	4.0	4.2	0.0	7.1	26.0	18.86
	HT/VHT20, M0 to M7	1	7	8.2		0.0	8.2	29.0	20.78
	HT/VHT20, M0 to M7	2	10	7.0	7.1	0.0	10.1	26.0	15.92
	HT/VHT20, M8 to M15	2	7	7.0	7.1	0.0	10.1	29.0	18.92
	HT/VHT20 Beam Forming, M0 to M7	2	10	4.1	3.9	0.0	7.0	26.0	18.97
	HT/VHT20 Beam Forming, M8 to M15	2	7	7.0	7.1	0.0	10.1	29.0	18.92
	HT/VHT20 STBC, M0 to M7	2	7	7.0	7.1	0.0	10.1	29.0	18.92
5795	Non HT40, 6 to 54 Mbps	1	7	2.9		0.0	2.9	29.0	26.08
	Non HT40, 6 to 54 Mbps	2	10	2.9	2.9	0.0	5.9	26.0	20.07
	HT/VHT40, M0 to M7	1	7	4.3		0.1	4.4	29.0	24.64
	HT/VHT40, M0 to M7	2	10	2.4	2.7	0.1	5.6	26.0	20.38
	HT/VHT40, M8 to M15	2	7	2.4	2.7	0.1	5.6	29.0	23.38
	HT/VHT40 Beam Forming, M0 to M7	2	10	-0.4	-0.1	0.1	2.8	26.0	23.18
	HT/VHT40 Beam Forming, M8 to M15	2	7	2.4	2.7	0.1	5.6	29.0	23.38
	HT/VHT40 STBC, M0 to M7	2	7	2.4	2.7	0.1	5.6	29.0	23.38
5825	Non HT20, 6 to 54 Mbps	1	7	6.7		0.0	6.7	29.0	22.28
	Non HT20, 6 to 54 Mbps	2	10	6.7	6.1	0.0	9.4	26.0	16.55
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	2.7	2.8	0.0	5.8	26.0	20.21
	HT/VHT20, M0 to M7	1	7	7.0		0.0	7.0	29.0	21.98
	HT/VHT20, M0 to M7	2	10	5.6	5.1	0.0	8.4	26.0	17.61
	HT/VHT20, M8 to M15	2	7	5.6	5.1	0.0	8.4	29.0	20.61
	HT/VHT20 Beam Forming, M0 to M7	2	10	2.7	3.0	0.0	5.9	26.0	20.12
	HT/VHT20 Beam Forming, M8 to M15	2	7	5.6	5.1	0.0	8.4	29.0	20.61
	HT/VHT20 STBC, M0 to M7	2	7	5.6	5.1	0.0	8.4	29.0	20.61

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain : 13dBi									
Frequency (MHz)	**Mode**	**Tx Paths**	**Correlated Antenna Gain (dBi)**	**Tx 1 PSD (dBm/500kHz)**	**Tx 2 PSD (dBm/500kHz)**	**Duty Cycle Correction (dB)**	**Total PSD (dBm/500kHz)**	**Limit (dBm/500kHz)**	**Margin (dB)**
5745	Non HT20, 6 to 54 Mbps	1	13	3.1		0.0	3.1	23.0	19.88
	Non HT20, 6 to 54 Mbps	2	13	-2.1	-1.4	0.0	1.3	23.0	21.70
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-2.1	-1.4	0.0	1.3	23.0	21.70
	HT/VHT20, M0 to M7	1	13	2.6		0.0	2.6	23.0	20.38
	HT/VHT20, M0 to M7	2	13	-2.2	-1.4	0.0	1.3	23.0	21.75
	HT/VHT20, M8 to M15	2	13	-2.2	-1.4	0.0	1.3	23.0	21.75
	HT/VHT20 Beam Forming, M0 to M7	2	13	-2.2	-1.4	0.0	1.3	23.0	21.75
	HT/VHT20 Beam Forming, M8 to M15	2	13	-2.2	-1.4	0.0	1.3	23.0	21.75
	HT/VHT20 STBC, M0 to M7	2	13	-2.2	-1.4	0.0	1.3	23.0	21.75
5755	Non HT40, 6 to 54 Mbps	1	13	-1.0		0.0	-1.0	23.0	23.98
	Non HT40, 6 to 54 Mbps	2	13	-7.3	-6.4	0.0	-3.8	23.0	26.80
	HT/VHT40, M0 to M7	1	13	-0.2		0.1	-0.1	23.0	23.14
	HT/VHT40, M0 to M7	2	13	-5.7	-5.0	0.1	-2.3	23.0	25.27
	HT/VHT40, M8 to M15	2	13	-5.7	-5.0	0.1	-2.3	23.0	25.27
	HT/VHT40 Beam Forming, M0 to M7	2	13	-5.7	-5.0	0.1	-2.3	23.0	25.27
	HT/VHT40 Beam Forming, M8 to M15	2	13	-5.7	-5.0	0.1	-2.3	23.0	25.27
	HT/VHT40 STBC, M0 to M7	2	13	-5.7	-5.0	0.1	-2.3	23.0	25.27
5775	Non HT80, 6 to 54 Mbps	1	13	-8.9		0.0	-8.9	23.0	31.87
	Non HT80, 6 to 54 Mbps	2	13	-14.7	-13.7	0.0	-11.1	23.0	34.13
	VHT80, M0 to M9 1ss	1	13	-3.3		0.1	-3.2	23.0	26.20
	VHT80, M0 to M9 1ss	2	13	-8.9	-8.2	0.1	-5.4	23.0	28.42
	VHT80, M0 to M9 2ss	2	13	-8.9	-8.2	0.1	-5.4	23.0	28.42
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-8.9	-8.2	0.1	-5.4	23.0	28.42
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-8.9	-8.2	0.1	-5.4	23.0	28.42
	VHT80 STBC, M0 to M9 1ss	2	13	-8.9	-8.2	0.1	-5.4	23.0	28.42

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5785	Non HT20, 6 to 54 Mbps	1	13	4.0		0.0	4.0	23.0	18.98
	Non HT20, 6 to 54 Mbps	2	13	-1.5	-1.3	0.0	1.6	23.0	21.36
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-1.5	-1.3	0.0	1.6	23.0	21.36
	HT/VHT20, M0 to M7	**1**	**13**	**4.1**		**0.0**	**4.1**	**23.0**	**18.88**
	HT/VHT20, M0 to M7	2	13	-1.4	-1.3	0.0	1.7	23.0	21.32
	HT/VHT20, M8 to M15	2	13	-1.4	-1.3	0.0	1.7	23.0	21.32
	HT/VHT20 Beam Forming, M0 to M7	2	13	-1.4	-1.3	0.0	1.7	23.0	21.32
	HT/VHT20 Beam Forming, M8 to M15	2	13	-1.4	-1.3	0.0	1.7	23.0	21.32
	HT/VHT20 STBC, M0 to M7	2	13	-1.4	-1.3	0.0	1.7	23.0	21.32
5795	Non HT40, 6 to 54 Mbps	1	13	-1.2		0.0	-1.2	23.0	24.18
	Non HT40, 6 to 54 Mbps	2	13	-5.7	-5.3	0.0	-2.5	23.0	25.47
	HT/VHT40, M0 to M7	1	13	-0.4		0.1	-0.3	23.0	23.34
	HT/VHT40, M0 to M7	2	13	-5.8	-5.3	0.1	-2.5	23.0	25.48
	HT/VHT40, M8 to M15	2	13	-5.8	-5.3	0.1	-2.5	23.0	25.48
	HT/VHT40 Beam Forming, M0 to M7	2	13	-5.8	-5.3	0.1	-2.5	23.0	25.48
	HT/VHT40 Beam Forming, M8 to M15	2	13	-5.8	-5.3	0.1	-2.5	23.0	25.48
	HT/VHT40 STBC, M0 to M7	2	13	-5.8	-5.3	0.1	-2.5	23.0	25.48
5825	Non HT20, 6 to 54 Mbps	1	13	2.7		0.0	2.7	23.0	20.28
	Non HT20, 6 to 54 Mbps	2	13	-1.9	-2.3	0.0	0.9	23.0	22.06
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-1.9	-2.3	0.0	0.9	23.0	22.06
	HT/VHT20, M0 to M7	1	13	2.7		0.0	2.7	23.0	20.28
	HT/VHT20, M0 to M7	2	13	-1.9	-2.4	0.0	0.9	23.0	22.11
	HT/VHT20, M8 to M15	2	13	-1.9	-2.4	0.0	0.9	23.0	22.11
	HT/VHT20 Beam Forming, M0 to M7	2	13	-1.9	-2.4	0.0	0.9	23.0	22.11
	HT/VHT20 Beam Forming, M8 to M15	2	13	-1.9	-2.4	0.0	0.9	23.0	22.11
	HT/VHT20 STBC, M0 to M7	2	13	-1.9	-2.4	0.0	0.9	23.0	22.11

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 7dBi

Power Spectral Density, 5745 MHz, HT/VHT20, M0 to M7

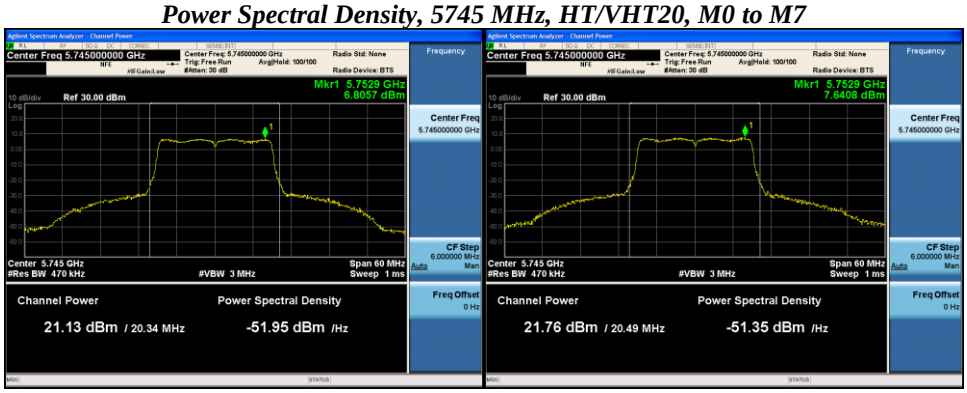

Antenna A ***Antenna B***

Antenna Gain: 13dBi

Power Spectral Density, 5785 MHz, HT/VHT20, M0 to M7

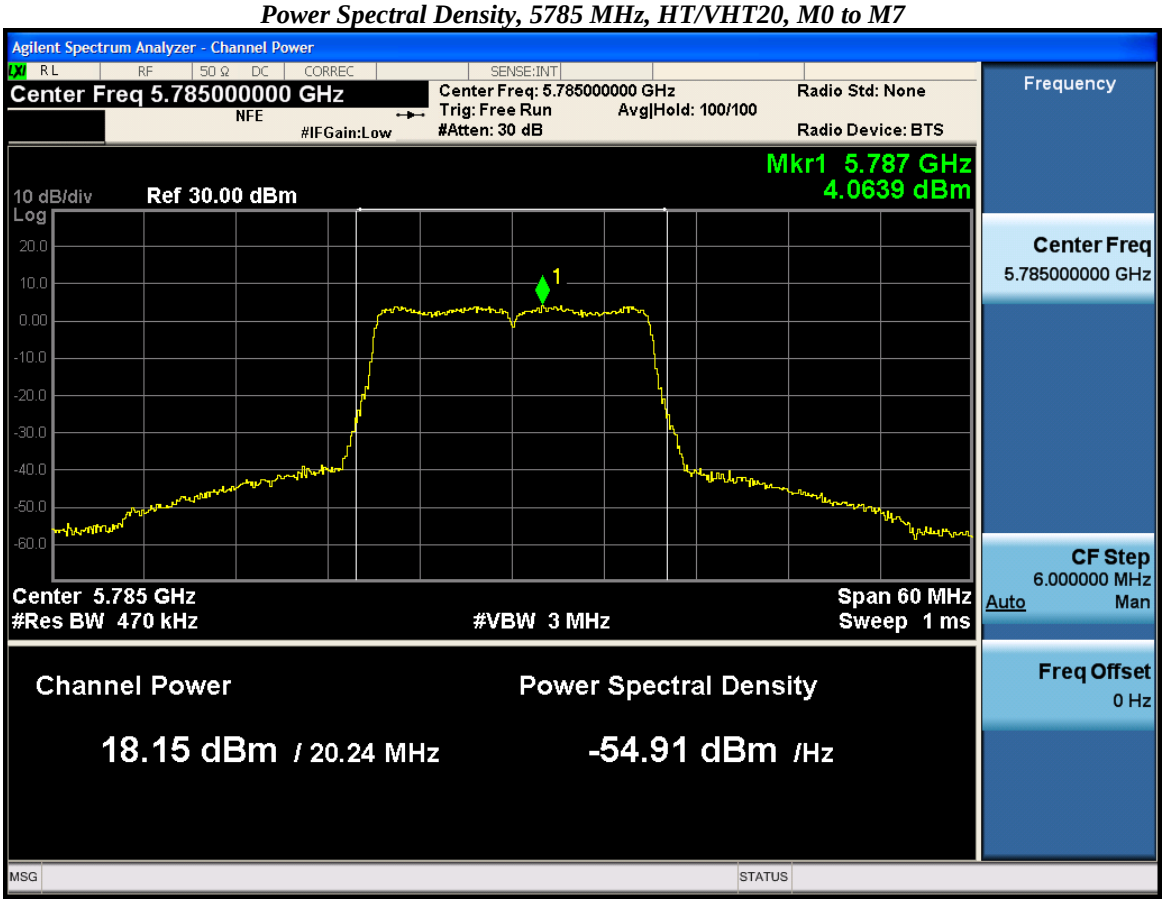

Antenna A

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.6Conducted Spurious Emissions

15.205 / 15.209/LP0002: 4.7.4.1 - Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

RSS-Gen 8.9: Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen 8.10 (**b**) Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and (**c**) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Use formula below to substitute conducted measurements in place of radiated measurements

E[dBμV/m] = EIRP [dBm] - 20 log(d[meters]) + 104.77, where E = field strength and d = 3 meter

1) Average Plot, Limit= -41.25 dBmeirp
2) Peak plot, Limit = -21.25 dBmeirp

Test Procedure

Ref.KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013

Conducted Spurious Emissions Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01r03 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. 6. Capture graphs and record pertinent measurement data.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

Conducted Spurious Emissions
Test parameters
Span = 30MHz to 18GHz / 18GHz to 40GHz RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 1kHz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By:	**Date of testing:**
Julian Land	04-Oct-19 - 05-Oct-19
Test Result : PASS	

See Appendix B for list of test equipment

Note: Data with Highest and Lowest Antenna gain readings were recorded as worst case

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurious Average Table

Antenna Gain : 7dBi									
Frequency (MHz)	**Mode**	**Tx Paths**	**Correlated Antenna Gain (dBi)**	**Tx 1 Spur Power (dBm)**	**Tx 2 Spur Power (dBm)**	**Duty Cycle Correction (dB)**	**Total Conducted Spur (dBm)**	**Limit (dBm)**	**Margin (dB)**
5745	Non HT20, 6 to 54 Mbps	1	7	-54		0	-47.0	-41.25	5.75
	Non HT20, 6 to 54 Mbps	2	7	-54	-54.3	0	-44.1	-41.25	2.89
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-54.3	-54.7	0	-41.5	-41.25	0.24
	HT/VHT20, M0 to M7	1	7	-54		0	-47.0	-41.25	5.75
	HT/VHT20, M0 to M7	2	7	-53.5	-54	0	-43.7	-41.25	2.48
	HT/VHT20, M8 to M15	2	7	-53.5	-54	0	-43.7	-41.25	2.48
	HT/VHT20 Beam Forming, M0 to M7	**2**	**10**	**-54.2**	**-54.4**	**0**	**-41.3**	**-41.25**	**0.04**
	HT/VHT20 Beam Forming, M8 to M15	2	7	-53.5	-54	0	-43.7	-41.25	2.48
	HT/VHT20 STBC, M0 to M7	2	7	-53.5	-54	0	-43.7	-41.25	2.48
5755	Non HT40, 6 to 54 Mbps	1	7	-49.1		0	-42.1	-41.25	0.85
	Non HT40, 6 to 54 Mbps	2	7	-53.4	-53.9	0	-43.6	-41.25	2.38
	HT/VHT40, M0 to M7	1	7	-53.7		0.1	-46.6	-41.25	5.35
	HT/VHT40, M0 to M7	2	7	-53.2	-53.6	0.1	-43.4	-41.25	2.14
	HT/VHT40, M8 to M15	2	7	-53.2	-53.6	0.1	-43.4	-41.25	2.14
	HT/VHT40 Beam Forming, M0 to M7	2	10	-57.1	-57.7	0.1	-44.4	-41.25	3.13
	HT/VHT40 Beam Forming, M8 to M15	2	7	-53.2	-53.6	0.1	-43.4	-41.25	2.14
	HT/VHT40 STBC, M0 to M7	2	7	-53.2	-53.6	0.1	-43.4	-41.25	2.14
5775	Non HT80, 6 to 54 Mbps	1	7	-48.8		0	-41.8	-41.25	0.55
	Non HT80, 6 to 54 Mbps	2	7	-53.9	-54.2	0	-44.0	-41.25	2.79
	VHT80, M0 to M9 1ss	1	7	-53.1		0.1	-46.0	-41.25	4.75
	VHT80, M0 to M9 1ss	2	7	-52.6	-53.3	0.1	-42.9	-41.25	1.68
	VHT80, M0 to M9 2ss	2	7	-52.6	-53.3	0.1	-42.9	-41.25	1.68
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-56.9	-57.4	0.1	-44.1	-41.25	2.88
	VHT80 Beam Forming, M0 to M9 2ss	2	7	-52.6	-53.3	0.1	-42.9	-41.25	1.68
	VHT80 STBC, M0 to M9 1ss	2	7	-52.6	-53.3	0.1	-42.9	-41.25	1.68
5785	Non HT20, 6 to 54 Mbps	1	7	-53.1		0	-46.1	-41.25	4.85
	Non HT20, 6 to 54 Mbps	2	7	-52.6	-53.6	0	-43.1	-41.25	1.81

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-56.8	-57.7	0	-44.2	-41.25	2.97
	HT/VHT20, M0 to M7	1	7	-53.1		0	-46.1	-41.25	4.85
	HT/VHT20, M0 to M7	2	7	-52.6	-53.4	0	-43.0	-41.25	1.72
	HT/VHT20, M8 to M15	2	7	-52.6	-53.4	0	-43.0	-41.25	1.72
	HT/VHT20 Beam Forming, M0 to M7	2	10	-56.5	-57.6	0	-44.0	-41.25	2.75
	HT/VHT20 Beam Forming, M8 to M15	2	7	-52.6	-53.4	0	-43.0	-41.25	1.72
	HT/VHT20 STBC, M0 to M7	2	7	-52.6	-53.4	0	-43.0	-41.25	1.72
5795	Non HT40, 6 to 54 Mbps	1	7	-48.8		0	-41.8	-41.25	0.55
	Non HT40, 6 to 54 Mbps	2	7	-53.1	-53.9	0	-43.5	-41.25	2.22
	HT/VHT40, M0 to M7	1	7	-53		0.1	-45.9	-41.25	4.65
	HT/VHT40, M0 to M7	2	7	-52.5	-53.5	0.1	-43.0	-41.25	1.71
	HT/VHT40, M8 to M15	2	7	-52.5	-53.5	0.1	-43.0	-41.25	1.71
	HT/VHT40 Beam Forming, M0 to M7	2	10	-53.6	-57.3	0.1	-42.1	-41.25	0.81
	HT/VHT40 Beam Forming, M8 to M15	2	7	-52.5	-53.5	0.1	-43.0	-41.25	1.71
	HT/VHT40 STBC, M0 to M7	2	7	-52.5	-53.5	0.1	-43.0	-41.25	1.71
5825	Non HT20, 6 to 54 Mbps	1	7	-48.8		0	-41.8	-41.25	0.55
	Non HT20, 6 to 54 Mbps	2	7	-52.8	-53.9	0	-43.3	-41.25	2.05
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-54	-57.5	0	-42.4	-41.25	1.15
	HT/VHT20, M0 to M7	1	7	-48.8		0	-41.8	-41.25	0.55
	HT/VHT20, M0 to M7	2	7	-52.5	-54	0	-43.2	-41.25	1.93
	HT/VHT20, M8 to M15	2	7	-52.5	-54	0	-43.2	-41.25	1.93
	HT/VHT20 Beam Forming, M0 to M7	2	10	-53.8	-57.4	0	-42.2	-41.25	0.98
	HT/VHT20 Beam Forming, M8 to M15	2	7	-52.5	-54	0	-43.2	-41.25	1.93
	HT/VHT20 STBC, M0 to M7	2	7	-52.5	-54	0	-43.2	-41.25	1.93

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurious Peak Table

Antenna Gain : 7dBi									
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	7	-43.3		0	-36.3	-21.25	15.05
	Non HT20, 6 to 54 Mbps	2	7	-43.1	-45.8	0	-34.2	-21.25	12.98
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-44.2	-46.6	0	-32.2	-21.25	10.98
	HT/VHT20, M0 to M7	1	7	-43.7		0	-36.7	-21.25	15.45
	HT/VHT20, M0 to M7	2	7	-43.2	-44.7	0	-33.9	-21.25	12.63
	HT/VHT20, M8 to M15	2	7	-43.2	-44.7	0	-33.9	-21.25	12.63
	HT/VHT20 Beam Forming, M0 to M7	2	10	-43.8	-45.9	0	-31.7	-21.25	10.46
	HT/VHT20 Beam Forming, M8 to M15	2	7	-43.2	-44.7	0	-33.9	-21.25	12.63
	HT/VHT20 STBC, M0 to M7	2	7	-43.2	-44.7	0	-33.9	-21.25	12.63
5755	Non HT40, 6 to 54 Mbps	1	7	-40.1		0	-33.1	-21.25	11.85
	Non HT40, 6 to 54 Mbps	2	7	-44	-44.9	0	-34.4	-21.25	13.17
	HT/VHT40, M0 to M7	1	7	-43.9		0.1	-36.8	-21.25	15.55
	HT/VHT40, M0 to M7	2	7	-43.4	-43.1	0.1	-33.2	-21.25	11.99
	HT/VHT40, M8 to M15	2	7	-43.4	-43.1	0.1	-33.2	-21.25	11.99
	HT/VHT40 Beam Forming, M0 to M7	2	10	-47.3	-48.8	0.1	-35.0	-21.25	13.73
	HT/VHT40 Beam Forming, M8 to M15	2	7	-43.4	-43.1	0.1	-33.2	-21.25	11.99
	HT/VHT40 STBC, M0 to M7	2	7	-43.4	-43.1	0.1	-33.2	-21.25	11.99
5775	Non HT80, 6 to 54 Mbps	1	7	-40		0	-33.0	-21.25	11.75
	Non HT80, 6 to 54 Mbps	2	7	-44.6	-46.8	0	-35.6	-21.25	14.30
	VHT80, M0 to M9 1ss	1	7	-43.4		0.1	-36.3	-21.25	15.05
	VHT80, M0 to M9 1ss	2	7	-42.9	-44.1	0.1	-33.4	-21.25	12.20
	VHT80, M0 to M9 2ss	2	7	-42.9	-44.1	0.1	-33.4	-21.25	12.20
	VHT80 Beam Forming, M0 to M9 1ss	2	10	-46.6	-48.4	0.1	-34.4	-21.25	13.15
	VHT80 Beam Forming, M0 to M9 2ss	2	7	-42.9	-44.1	0.1	-33.4	-21.25	12.20
	VHT80 STBC, M0 to M9 1ss	2	7	-42.9	-44.1	0.1	-33.4	-21.25	12.20
5785	Non HT20, 6 to 54 Mbps	1	7	-43.1		0	-36.1	-21.25	14.85
	Non HT20, 6 to 54 Mbps	2	7	-42.6	-44.8	0	-33.6	-21.25	12.30

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-46.6	-49.6	0	-34.8	-21.25	13.59
	HT/VHT20, M0 to M7	1	7	-42.5		0	-35.5	-21.25	14.25
	HT/VHT20, M0 to M7	2	7	-42	-44.6	0	-33.1	-21.25	11.85
	HT/VHT20, M8 to M15	2	7	-42	-44.6	0	-33.1	-21.25	11.85
	HT/VHT20 Beam Forming, M0 to M7	2	10	-46.7	-48.4	0	-34.5	-21.25	13.21
	HT/VHT20 Beam Forming, M8 to M15	2	7	-42	-44.6	0	-33.1	-21.25	11.85
	HT/VHT20 STBC, M0 to M7	2	7	-42	-44.6	0	-33.1	-21.25	11.85
5795	Non HT40, 6 to 54 Mbps	1	7	-39.8		0	-32.8	-21.25	11.55
	Non HT40, 6 to 54 Mbps	2	7	-44.4	-45.7	0	-35.0	-21.25	13.74
	HT/VHT40, M0 to M7	1	7	-44.3		0.1	-37.2	-21.25	15.95
	HT/VHT40, M0 to M7	2	7	-43.8	-44.1	0.1	-33.9	-21.25	12.69
	HT/VHT40, M8 to M15	2	7	-43.8	-44.1	0.1	-33.9	-21.25	12.69
	HT/VHT40 Beam Forming, M0 to M7	2	10	-44.3	-48.9	0.1	-33.0	-21.25	11.76
	HT/VHT40 Beam Forming, M8 to M15	2	7	-43.8	-44.1	0.1	-33.9	-21.25	12.69
	HT/VHT40 STBC, M0 to M7	2	7	-43.8	-44.1	0.1	-33.9	-21.25	12.69
5825	Non HT20, 6 to 54 Mbps	1	7	-40.1		0	-33.1	-21.25	11.85
	Non HT20, 6 to 54 Mbps	2	7	-42.8	-45	0	-33.8	-21.25	12.50
	Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-45.5	-48.3	0	-33.7	-21.25	12.42
	HT/VHT20, M0 to M7	**1**	**7**	**-36.7**		**0**	**-32.2**	**-21.25**	**10.95**
	HT/VHT20, M0 to M7	2	7	-42.9	-45.3	0	-33.9	-21.25	12.68
	HT/VHT20, M8 to M15	2	7	-42.9	-45.3	0	-33.9	-21.25	12.68
	HT/VHT20 Beam Forming, M0 to M7	2	10	-45.5	-47.3	0	-33.3	-21.25	12.05
	HT/VHT20 Beam Forming, M8 to M15	2	7	-42.9	-45.3	0	-33.9	-21.25	12.68
	HT/VHT20 STBC, M0 to M7	2	7	-42.9	-45.3	0	-33.9	-21.25	12.68

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurious Average Table

Antenna Gain : 13dBi									
Frequency (MHz)	**Mode**	**Tx Paths**	**Correlated Antenna Gain (dBi)**	**Tx 1 Spur Power (dBm)**	**Tx 2 Spur Power (dBm)**	**Duty Cycle Correction (dB)**	**Total Conducted Spur (dBm)**	**Limit (dBm)**	**Margin (dB)**
5745	Non HT20, 6 to 54 Mbps	1	13	-55.5		0.0	-42.5	-41.25	1.23
	Non HT20, 6 to 54 Mbps	2	13	-61.1	-61.3	0.0	-45.2	-41.25	3.91
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-61.1	-61.3	0.0	-45.2	-41.25	3.91
	HT/VHT20, M0 to M7	1	13	-55.6		0.0	-42.6	-41.25	1.33
	HT/VHT20, M0 to M7	2	13	-61.0	-61.2	0.0	-45.1	-41.25	3.82
	HT/VHT20, M8 to M15	2	13	-61.0	-61.2	0.0	-45.1	-41.25	3.82
	HT/VHT20 Beam Forming, M0 to M7	2	13	-61.0	-61.2	0.0	-45.1	-41.25	3.82
	HT/VHT20 Beam Forming, M8 to M15	2	13	-61.0	-61.2	0.0	-45.1	-41.25	3.82
	HT/VHT20 STBC, M0 to M7	2	13	-61.0	-61.2	0.0	-45.1	-41.25	3.82
5755	Non HT40, 6 to 54 Mbps	1	13	-55.5		0.0	-42.5	-41.25	1.23
	Non HT40, 6 to 54 Mbps	2	13	-61.6	-61.9	0.0	-45.7	-41.25	4.47
	HT/VHT40, M0 to M7	1	13	-55.1		0.1	-42.0	-41.25	0.79
	HT/VHT40, M0 to M7	2	13	-60.8	-61.4	0.1	-45.0	-41.25	3.77
	HT/VHT40, M8 to M15	2	13	-60.8	-61.4	0.1	-45.0	-41.25	3.77
	HT/VHT40 Beam Forming, M0 to M7	2	13	-60.8	-61.4	0.1	-45.0	-41.25	3.77
	HT/VHT40 Beam Forming, M8 to M15	2	13	-60.8	-61.4	0.1	-45.0	-41.25	3.77
	HT/VHT40 STBC, M0 to M7	2	13	-60.8	-61.4	0.1	-45.0	-41.25	3.77
5775	Non HT80, 6 to 54 Mbps	1	13	-56.2		0.0	-43.2	-41.25	1.92
	Non HT80, 6 to 54 Mbps	2	13	-62.2	-62.5	0.0	-46.3	-41.25	5.06
	VHT80, M0 to M9 1ss	1	13	-54.9		0.1	-41.8	-41.25	0.55
	VHT80, M0 to M9 1ss	2	13	-60.6	-61.2	0.1	-44.8	-41.25	3.53
	VHT80, M0 to M9 2ss	2	13	-60.6	-61.2	0.1	-44.8	-41.25	3.53
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-60.6	-61.2	0.1	-44.8	-41.25	3.53
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-60.6	-61.2	0.1	-44.8	-41.25	3.53
	VHT80 STBC, M0 to M9 1ss	2	13	-60.6	-61.2	0.1	-44.8	-41.25	3.53
	Non HT20, 6 to 54 Mbps	2	13	-56.3	-61.2	0.0	-42.1	-41.25	0.81
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-56.3	-61.2	0.0	-42.1	-41.25	0.81
	HT/VHT20, M0 to M7	**1**	**13**	**-54.5**		**0.0**	**-41.5**	**-41.25**	**0.23**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	HT/VHT20, M0 to M7	2	13	-56.2	-61.2	0.0	-42.0	-41.25	0.74
	HT/VHT20, M8 to M15	2	13	-56.2	-61.2	0.0	-42.0	-41.25	0.74
	HT/VHT20 Beam Forming, M0 to M7	2	13	-56.2	-61.2	0.0	-42.0	-41.25	0.74
	HT/VHT20 Beam Forming, M8 to M15	2	13	-56.2	-61.2	0.0	-42.0	-41.25	0.74
	HT/VHT20 STBC, M0 to M7	2	13	-56.2	-61.2	0.0	-42.0	-41.25	0.74
5795	Non HT40, 6 to 54 Mbps	1	13	-55.4		0.0	-42.4	-41.25	1.13
	Non HT40, 6 to 54 Mbps	2	13	-56.2	-61.5	0.0	-42.1	-41.25	0.81
	HT/VHT40, M0 to M7	1	13	-55.0		0.1	-41.9	-41.25	0.69
	HT/VHT40, M0 to M7	2	13	-60.7	-61.3	0.1	-44.9	-41.25	3.67
	HT/VHT40, M8 to M15	2	13	-60.7	-61.3	0.1	-44.9	-41.25	3.67
	HT/VHT40 Beam Forming, M0 to M7	2	13	-60.7	-61.3	0.1	-44.9	-41.25	3.67
	HT/VHT40 Beam Forming, M8 to M15	2	13	-60.7	-61.3	0.1	-44.9	-41.25	3.67
	HT/VHT40 STBC, M0 to M7	2	13	-60.7	-61.3	0.1	-44.9	-41.25	3.67
5825	Non HT20, 6 to 54 Mbps	1	13	-54.7		0.0	-41.7	-41.25	0.43
	Non HT20, 6 to 54 Mbps	2	13	-56.4	-61.5	0.0	-42.2	-41.25	0.96
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-56.4	-61.5	0.0	-42.2	-41.25	0.96
	HT/VHT20, M0 to M7	1	13	-54.7		0.0	-41.7	-41.25	0.43
	HT/VHT20, M0 to M7	2	13	-56.4	-61.4	0.0	-42.2	-41.25	0.94
	HT/VHT20, M8 to M15	2	13	-56.4	-61.4	0.0	-42.2	-41.25	0.94
	HT/VHT20 Beam Forming, M0 to M7	2	13	-56.4	-61.4	0.0	-42.2	-41.25	0.94
	HT/VHT20 Beam Forming, M8 to M15	2	13	-56.4	-61.4	0.0	-42.2	-41.25	0.94
	HT/VHT20 STBC, M0 to M7	2	13	-56.4	-61.4	0.0	-42.2	-41.25	0.94

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurious Peak

Antenna Gain: 13dBi									
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT20, 6 to 54 Mbps	1	13	-44.5		0.0	-31.5	-21.25	10.23
	Non HT20, 6 to 54 Mbps	2	13	-50.8	-52.0	0.0	-35.3	-21.25	14.07
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-50.8	-52.0	0.0	-35.3	-21.25	14.07
	HT/VHT20, M0 to M7	1	13	-45.2		0.0	-32.2	-21.25	10.93
	HT/VHT20, M0 to M7	2	13	-49.3	-52.1	0.0	-34.4	-21.25	13.20
	HT/VHT20, M8 to M15	2	13	-49.3	-52.1	0.0	-34.4	-21.25	13.20
	HT/VHT20 Beam Forming, M0 to M7	2	13	-49.3	-52.1	0.0	-34.4	-21.25	13.20
	HT/VHT20 Beam Forming, M8 to M15	2	13	-49.3	-52.1	0.0	-34.4	-21.25	13.20
	HT/VHT20 STBC, M0 to M7	2	13	-49.3	-52.1	0.0	-34.4	-21.25	13.20
5755	Non HT40, 6 to 54 Mbps	1	13	-45.1		0.0	-32.1	-21.25	10.83
	Non HT40, 6 to 54 Mbps	2	13	-51.0	-53.4	0.0	-36.0	-21.25	14.76
	HT/VHT40, M0 to M7	1	13	-45.3		0.1	-32.2	-21.25	10.99
	HT/VHT40, M0 to M7	2	13	-49.6	-52.6	0.1	-34.8	-21.25	13.53
	HT/VHT40, M8 to M15	2	13	-49.6	-52.6	0.1	-34.8	-21.25	13.53
	HT/VHT40 Beam Forming, M0 to M7	2	13	-49.6	-52.6	0.1	-34.8	-21.25	13.53
	HT/VHT40 Beam Forming, M8 to M15	2	13	-49.6	-52.6	0.1	-34.8	-21.25	13.53
	HT/VHT40 STBC, M0 to M7	2	13	-49.6	-52.6	0.1	-34.8	-21.25	13.53
5775	Non HT80, 6 to 54 Mbps	1	13	-47.9		0.0	-34.9	-21.25	13.62
	Non HT80, 6 to 54 Mbps	2	13	-52.2	-54.8	0.0	-37.3	-21.25	16.02
	VHT80, M0 to M9 1ss	1	13	-44.6		0.1	-31.5	-21.25	10.25
	VHT80, M0 to M9 1ss	2	13	-50.6	-52.1	0.1	-35.2	-21.25	13.92
	VHT80, M0 to M9 2ss	2	13	-50.6	-52.1	0.1	-35.2	-21.25	13.92
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-50.6	-52.1	0.1	-35.2	-21.25	13.92
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-50.6	-52.1	0.1	-35.2	-21.25	13.92
	VHT80 STBC, M0 to M9 1ss	2	13	-50.6	-52.1	0.1	-35.2	-21.25	13.92
578 5	Non HT20, 6 to 54 Mbps	1	13	-44.6		0.0	-31.6	-21.25	10.33
	Non HT20, 6 to 54 Mbps	2	13	-47.3	-52.5	0.0	-33.1	-21.25	11.88

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-47.3	-52.5	0.0	-33.1	-21.25	11.88
	HT/VHT20, M0 to M7	1	13	-44.7		0.0	-31.7	-21.25	10.43
	HT/VHT20, M0 to M7	2	13	-47.2	-51.3	0.0	-32.8	-21.25	11.50
	HT/VHT20, M8 to M15	2	13	-47.2	-51.3	0.0	-32.8	-21.25	11.50
	HT/VHT20 Beam Forming, M0 to M7	2	13	-47.2	-51.3	0.0	-32.8	-21.25	11.50
	HT/VHT20 Beam Forming, M8 to M15	2	13	-47.2	-51.3	0.0	-32.8	-21.25	11.50
	HT/VHT20 STBC, M0 to M7	2	13	-47.2	-51.3	0.0	-32.8	-21.25	11.50
5795	Non HT40, 6 to 54 Mbps	1	13	-45.5		0.0	-32.5	-21.25	11.23
	Non HT40, 6 to 54 Mbps	2	13	-47.3	-52.2	0.0	-33.1	-21.25	11.81
	HT/VHT40, M0 to M7	**1**	**13**	**-44.4**		**0.1**	**-31.3**	**-21.25**	**10.09**
	HT/VHT40, M0 to M7	2	13	-51.1	-53.3	0.1	-36.0	-21.25	14.74
	HT/VHT40, M8 to M15	2	13	-51.1	-53.3	0.1	-36.0	-21.25	14.74
	HT/VHT40 Beam Forming, M0 to M7	2	13	-51.1	-53.3	0.1	-36.0	-21.25	14.74
	HT/VHT40 Beam Forming, M8 to M15	2	13	-51.1	-53.3	0.1	-36.0	-21.25	14.74
	HT/VHT40 STBC, M0 to M7	2	13	-51.1	-53.3	0.1	-36.0	-21.25	14.74
5825	Non HT20, 6 to 54 Mbps	1	13	-44.8		0.0	-31.8	-21.25	10.53
	Non HT20, 6 to 54 Mbps	2	13	-46.6	-52.5	0.0	-32.6	-21.25	11.33
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-46.6	-52.5	0.0	-32.6	-21.25	11.33
	HT/VHT20, M0 to M7	1	13	-45.2		0.0	-32.2	-21.25	10.93
	HT/VHT20, M0 to M7	2	13	-47.1	-52.3	0.0	-32.9	-21.25	11.68
	HT/VHT20, M8 to M15	2	13	-47.1	-52.3	0.0	-32.9	-21.25	11.68
	HT/VHT20 Beam Forming, M0 to M7	2	13	-47.1	-52.3	0.0	-32.9	-21.25	11.68
	HT/VHT20 Beam Forming, M8 to M15	2	13	-47.1	-52.3	0.0	-32.9	-21.25	11.68
	HT/VHT20 STBC, M0 to M7	2	13	-47.1	-52.3	0.0	-32.9	-21.25	11.68

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 7dBi

Conducted Spurs Average, 5745 MHz, HT/VHT20 Beam Forming, M0 to M7

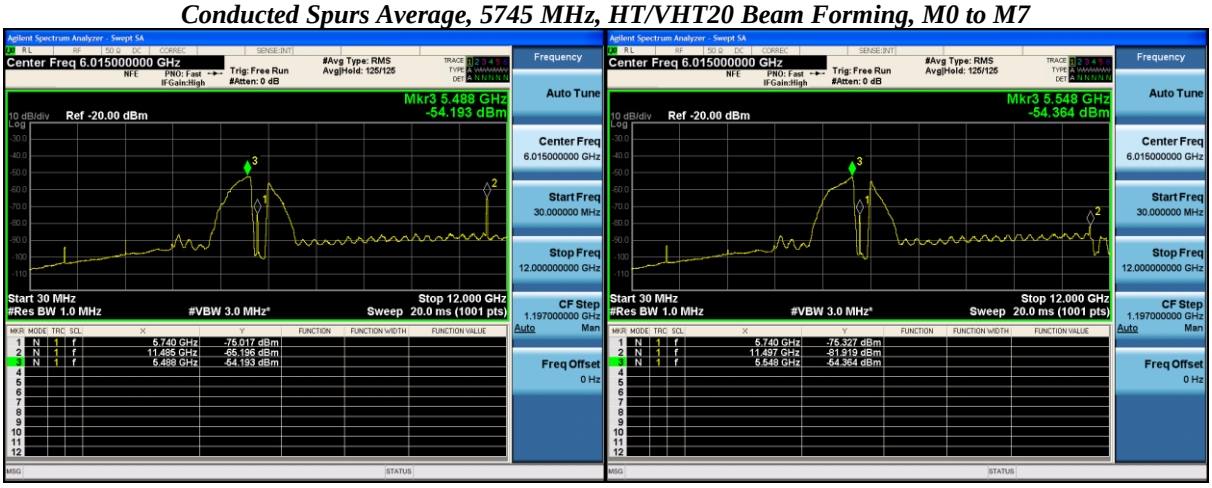

Antenna A ***Antenna B***

Antenna Gain: 7dBi

Conducted Spurs Peak, 5745 MHz, Non HT20 Beam Forming, 6 to 54 Mbps

Antenna A ***Antenna B***

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 7dBi
Conducted Spurs Average, All Antennas

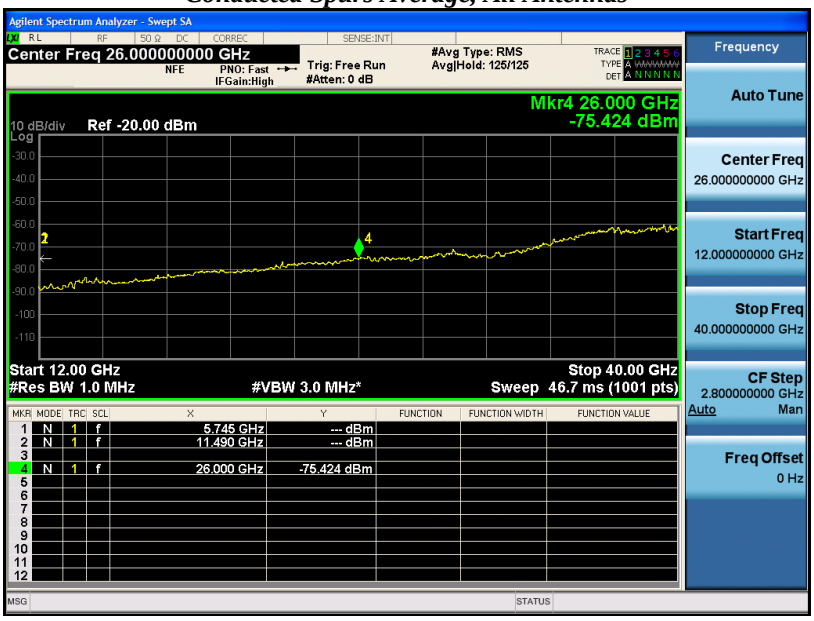

Conducted Spurs Peak, All Antennas

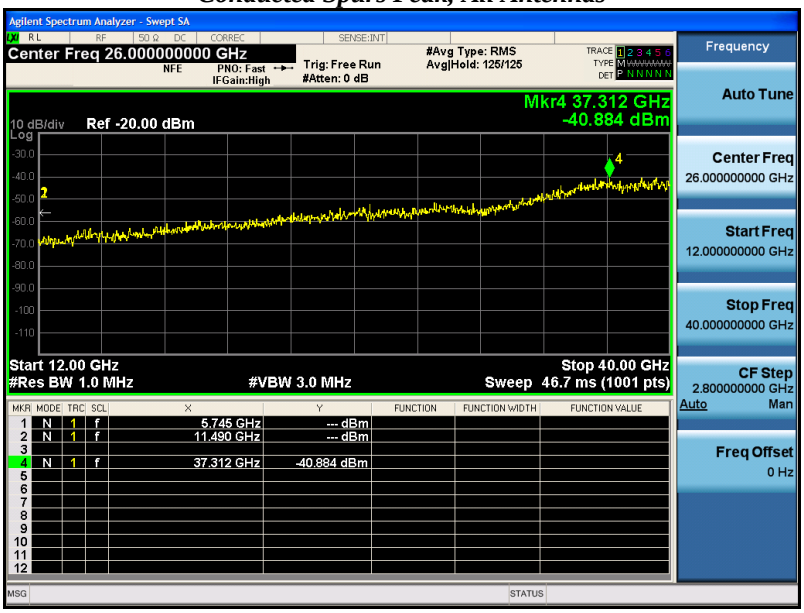

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 13dBi

Conducted Spurs Average, 5785 MHz, HT/VHT20, M0 to M7

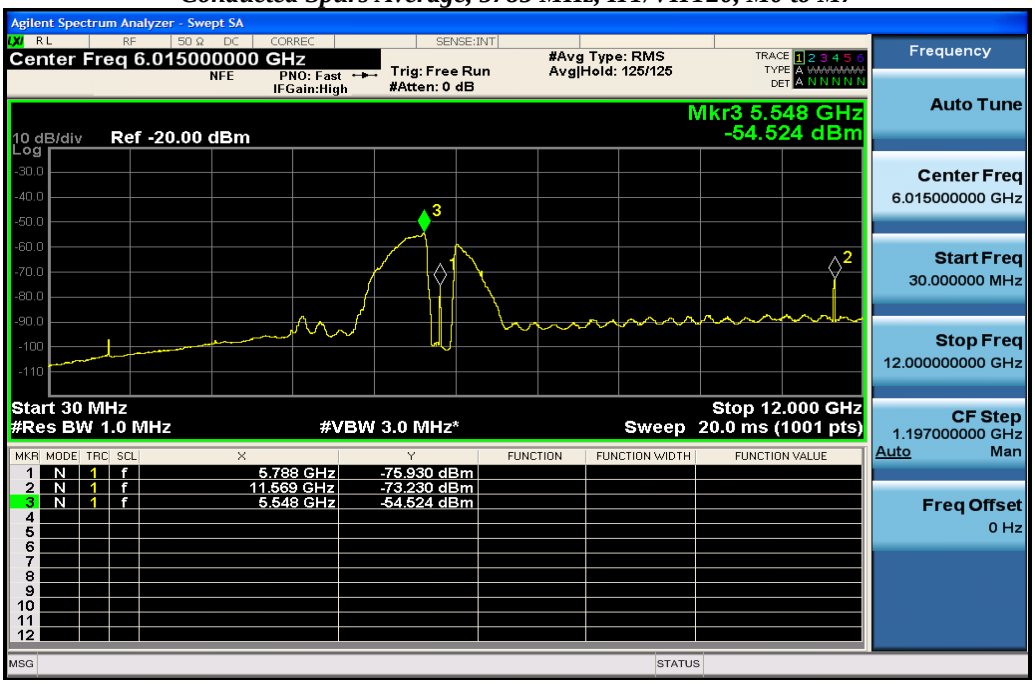

Antenna A

Antenna Gain: 13dBi

Conducted Spurs Peak, 5795 MHz, HT/VHT40, M0 to M7

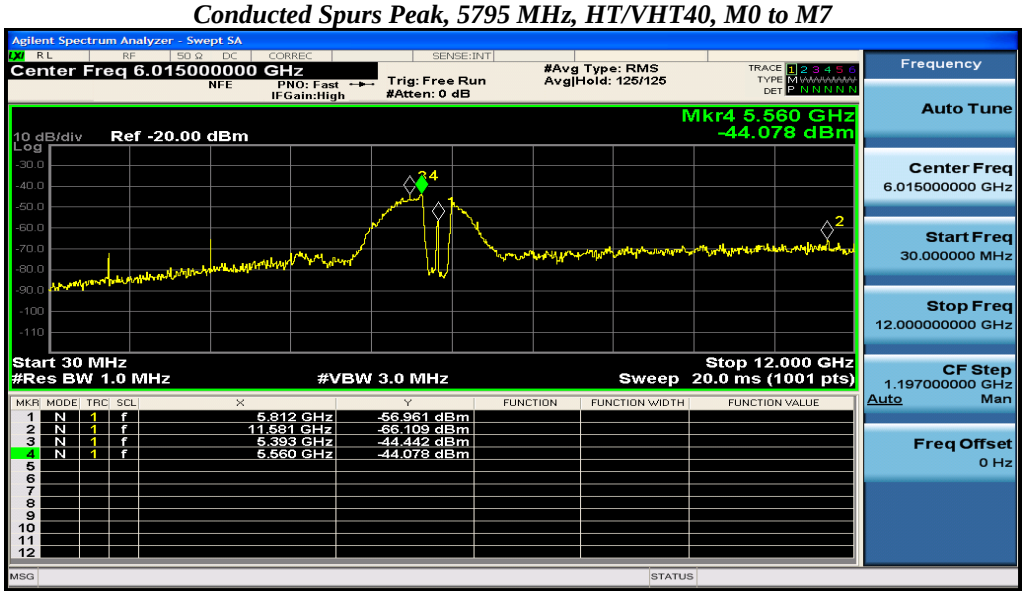

Antenna A

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 13dBi
Conducted Spurs Average, All Antennas

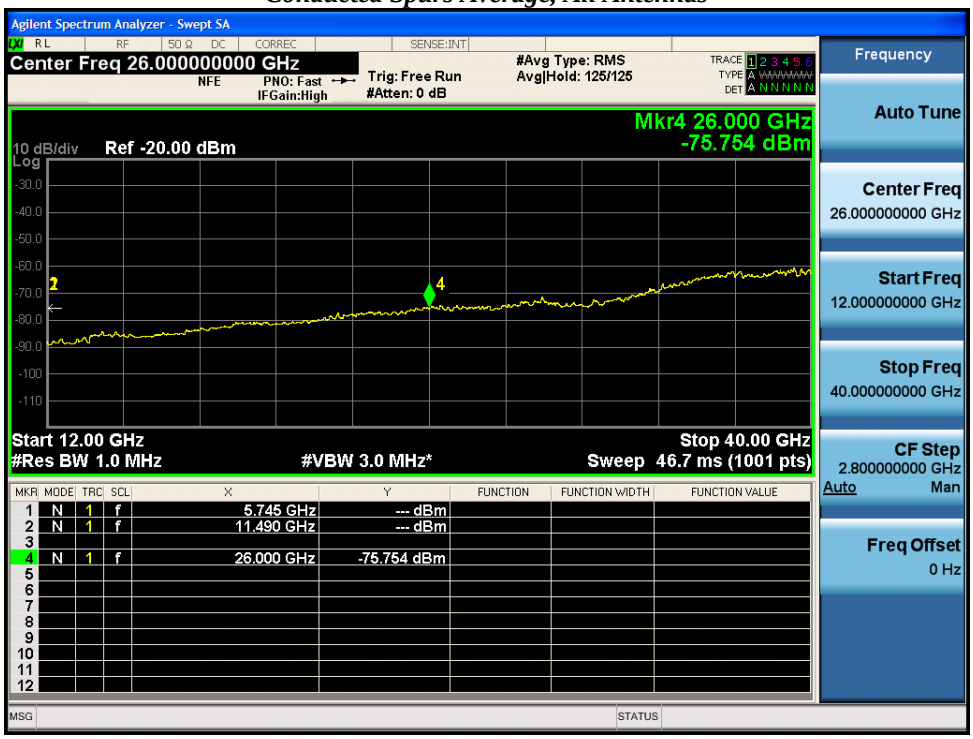

Antenna Gain: 13dBi
Conducted Spurs Peak, All Antennas

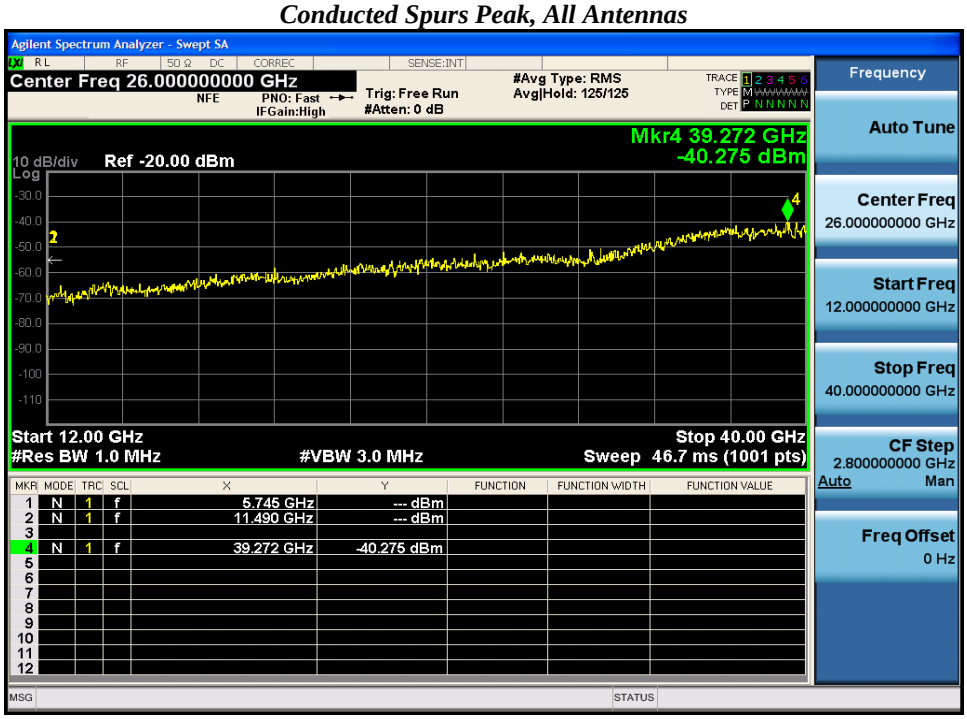

A ***Conducted Spurs Average***

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

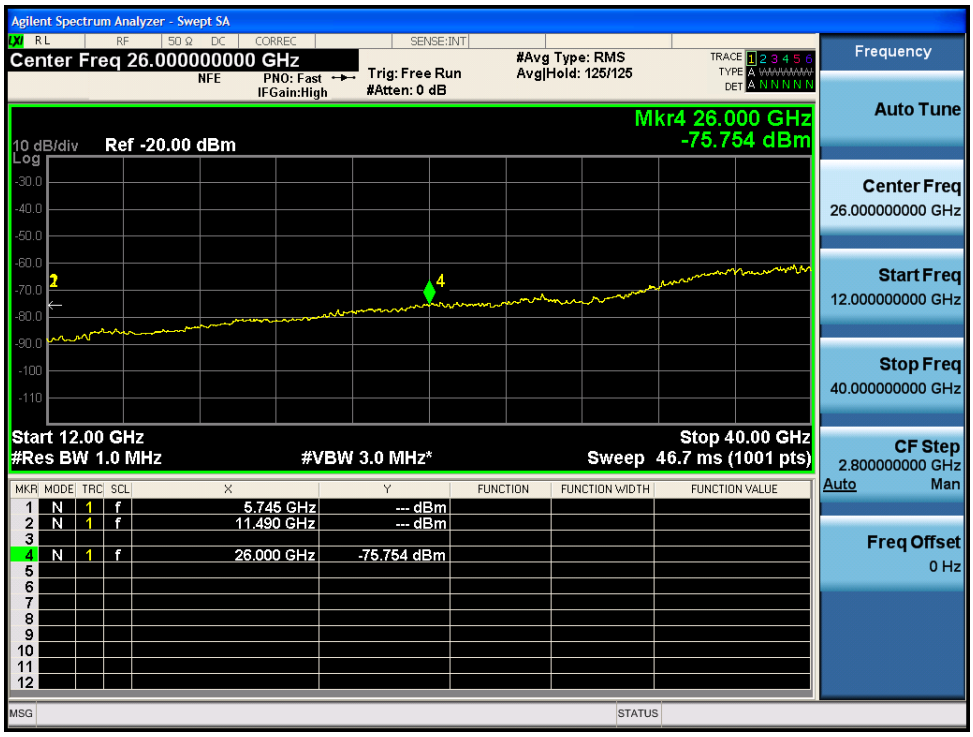

Conducted Spurs Peak

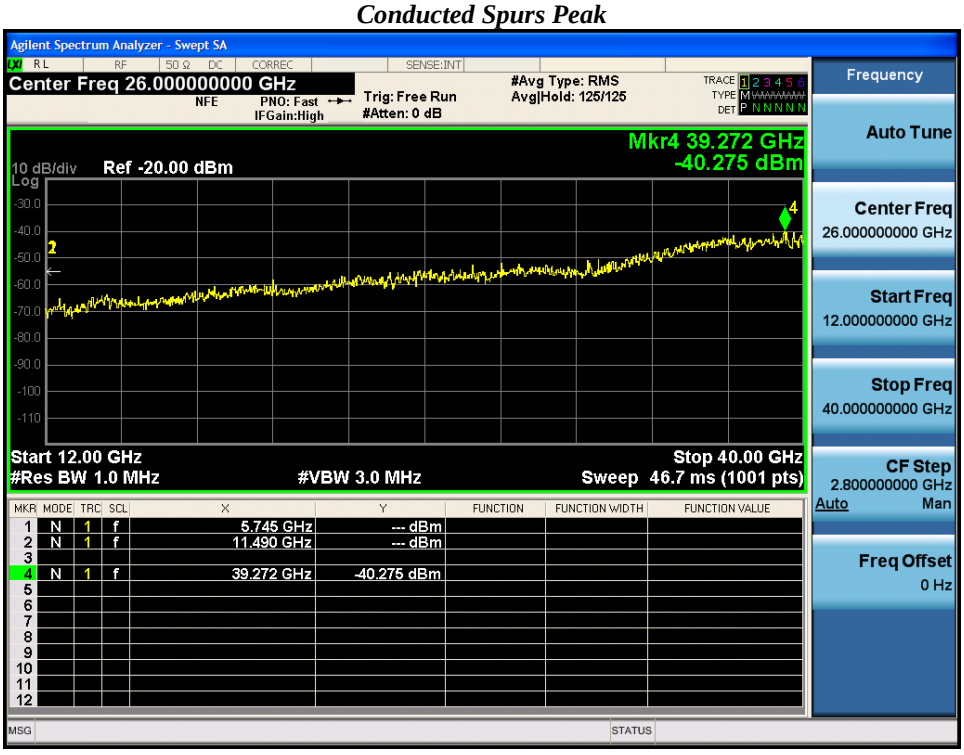

A.7Conducted Band edge

15.205 / 15.407 /LP0002:4.7.4.2/ RSS-247

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

For transmitters operating in the 5.725 GHz~5.850 GHz band: All emissions within the frequency range from the band edge to 5 MHz above or below the band edge shall be less than or equal to an EIRP of 27 dBm/MHz~15.6 dBm/MHz (limits corresponding to linear method); all emissions within the frequency range from the band edge to 5 MHz~25 MHz above or below the band edge shall be less than or equal to an EIRP of 15.6 dBm/MHz~10 dBm/MHz (limits corresponding to linear method); all emissions within the frequency range from the band edge to 25 MHz~75 MHz above or below the band edge shall be less than or equal to an EIRP of 10 dBm/MHz~ -27 dBm/MHz (limits corresponding to linear method); for frequencies 75 MHz or greater above or below the band edge, emissions shall be less than or equal to an EIRP of -27 dBm/MHz

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

Conducted Band edge Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 558074 D01 DTS Meas Guidance v03r05 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.

Conducted Band edge Test parameters non-restricted Band KDB 558074 D01 v03r05 section 11.1b, 11.2-3, also see ANSI C63.10: 2013 section 11.10.3
RBW = 100 kHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	**Description**	**Samples**	**System under test**	**Support equipment**
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By:	**Date of testing:**
Julian Land	04-Oct-19 - 05-Oct-19
Test Result: PASS	

See Appendix C for list of test equipment

Note: Data with Highest and Lowest Antenna gain readings were recorded as worst case

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Peak (Left Side)

Antenna Gain : 13dBi								
Frequency (MHz)	**Mode**	**Tx Paths**	**Correlated Antenna Gain (dBi)**	**Tx 1 Bandedge Level (dBm)**	**Tx 2 Bandedge Level (dBm)**	**Total TxBandedge Level (dBm)**	**Limit (dBm)**	**Margin (dB)**
5745	Non HT20, 6 to 54 Mbps	1	13	-50.7		-37.7	-27.00	10.68
	Non HT20, 6 to 54 Mbps	2	13	-56.2	-57.0	-40.5	-27.00	13.55
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-56.2	-57.0	-40.5	-27.00	13.55
	HT/VHT20, M0 to M7	1	13	-50.8		-37.8	-27.00	10.78
	HT/VHT20, M0 to M7	2	13	-56.3	-56.6	-40.4	-27.00	13.42
	HT/VHT20, M8 to M15	2	13	-56.3	-56.6	-40.4	-27.00	13.42
	HT/VHT20 Beam Forming, M0 to M7	2	13	-56.3	-56.6	-40.4	-27.00	13.42
	HT/VHT20 Beam Forming, M8 to M15	2	13	-56.3	-56.6	-40.4	-27.00	13.42
	HT/VHT20 STBC, M0 to M7	2	13	-56.3	-56.6	-40.4	-27.00	13.42
5755	Non HT40, 6 to 54 Mbps	1	13	-51.1		-38.1	-27.00	11.08
	Non HT40, 6 to 54 Mbps	2	13	-57.0	-57.6	-41.3	-27.00	14.26
	HT/VHT40, M0 to M7	1	13	-50.6		-37.5	-27.00	10.54
	HT/VHT40, M0 to M7	2	13	-56.5	-57.2	-40.8	-27.00	13.77
	HT/VHT40, M8 to M15	2	13	-56.5	-57.2	-40.8	-27.00	13.77
	HT/VHT40 Beam Forming, M0 to M7	2	13	-56.5	-57.2	-40.8	-27.00	13.77
	HT/VHT40 Beam Forming, M8 to M15	2	13	-56.5	-57.2	-40.8	-27.00	13.77
	HT/VHT40 STBC, M0 to M7	2	13	-56.5	-57.2	-40.8	-27.00	13.77
5775	Non HT80, 6 to 54 Mbps	1	13	-52.1		-39.1	-27.00	12.07
	Non HT80, 6 to 54 Mbps	2	13	-58.0	-58.5	-42.2	-27.00	15.21
	VHT80, M0 to M9 1ss	**1**	**13**	**-50.5**		**-37.4**	**-27.00**	**10.40**
	VHT80, M0 to M9 1ss	2	13	-56.2	-57.0	-40.5	-27.00	13.47
	VHT80, M0 to M9 2ss	2	13	-56.2	-57.0	-40.5	-27.00	13.47
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-56.2	-57.0	-40.5	-27.00	13.47
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-56.2	-57.0	-40.5	-27.00	13.47
	VHT80 STBC, M0 to M9 1ss	2	13	-56.2	-57.0	-40.5	-27.00	13.47

Conducted Bandedge Peak (Right Side)

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain : 13dBi								
Frequency (MHz)	**Mode**	**Tx Paths**	**Correlated Antenna Gain (dBi)**	**Tx 1 Bandedge Level (dBm)**	**Tx 2 Bandedge Level (dBm)**	**Total TxBandedge Level (dBm)**	**Limit (dBm)**	**Margin (dB)**
5775	Non HT80, 6 to 54 Mbps	1	13	-52.2		-39.2	-27.00	12.17
	Non HT80, 6 to 54 Mbps	2	13	-58.3	-56.8	-41.4	-27.00	14.45
	VHT80, M0 to M9 1ss	1	13	-51.6		-38.5	-27.00	11.50
	VHT80, M0 to M9 1ss	2	13	-57.7	-56.0	-40.7	-27.00	13.65
	VHT80, M0 to M9 2ss	2	13	-57.7	-56.0	-40.7	-27.00	13.65
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-57.7	-56.0	-40.7	-27.00	13.65
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-57.7	-56.0	-40.7	-27.00	13.65
	VHT80 STBC, M0 to M9 1ss	2	13	-57.7	-56.0	-40.7	-27.00	13.65
5785	Non HT20, 6 to 54 Mbps	1	13	-51.0		-38.0	-27.00	10.98
	Non HT20, 6 to 54 Mbps	**2**	**13**	**-51.6**	**-56.1**	**-37.3**	**-27.00**	**10.26**
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-51.6	-56.1	-37.3	-27.00	10.26
	HT/VHT20, M0 to M7	1	13	-51.1		-38.1	-27.00	11.08
	HT/VHT20, M0 to M7	2	13	-52.0	-56.5	-37.7	-27.00	10.66
	HT/VHT20, M8 to M15	2	13	-52.0	-56.5	-37.7	-27.00	10.66
	HT/VHT20 Beam Forming, M0 to M7	2	13	-52.0	-56.5	-37.7	-27.00	10.66
	HT/VHT20 Beam Forming, M8 to M15	2	13	-52.0	-56.5	-37.7	-27.00	10.66
	HT/VHT20 STBC, M0 to M7	2	13	-52.0	-56.5	-37.7	-27.00	10.66
5795	Non HT40, 6 to 54 Mbps	1	13	-51.8		-38.8	-27.00	11.78
	Non HT40, 6 to 54 Mbps	2	13	-52.0	-56.4	-37.6	-27.00	10.64
	HT/VHT40, M0 to M7	1	13	-51.5		-38.4	-27.00	11.44
	HT/VHT40, M0 to M7	2	13	-57.6	-55.8	-40.5	-27.00	13.54
	HT/VHT40, M8 to M15	2	13	-57.6	-55.8	-40.5	-27.00	13.54
	HT/VHT40 Beam Forming, M0 to M7	2	13	-57.6	-55.8	-40.5	-27.00	13.54
	HT/VHT40 Beam Forming, M8 to M15	2	13	-57.6	-55.8	-40.5	-27.00	13.54
	HT/VHT40 STBC, M0 to M7	2	13	-57.6	-55.8	-40.5	-27.00	13.54
5825	Non HT20, 6 to 54 Mbps	1	13	-51.5		-38.5	-27.00	11.48
	Non HT20, 6 to 54 Mbps	2	13	-52.2	-56.2	-37.7	-27.00	10.72

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-52.2	-56.2	-37.7	-27.00	10.72
	HT/VHT20, M0 to M7	1	13	-51.2		-38.2	-27.00	11.18
	HT/VHT20, M0 to M7	2	13	-52.4	-55.9	-37.8	-27.00	10.77
	HT/VHT20, M8 to M15	2	13	-52.4	-55.9	-37.8	-27.00	10.77
	HT/VHT20 Beam Forming, M0 to M7	2	13	-52.4	-55.9	-37.8	-27.00	10.77
	HT/VHT20 Beam Forming, M8 to M15	2	13	-52.4	-55.9	-37.8	-27.00	10.77
	HT/VHT20 STBC, M0 to M7	2	13	-52.4	-55.9	-37.8	-27.00	10.77

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Antenna Gain: 13dBi
Conducted Band edge Peak 15407L, 5775 MHz, VHT80, M0 to M9 1ss

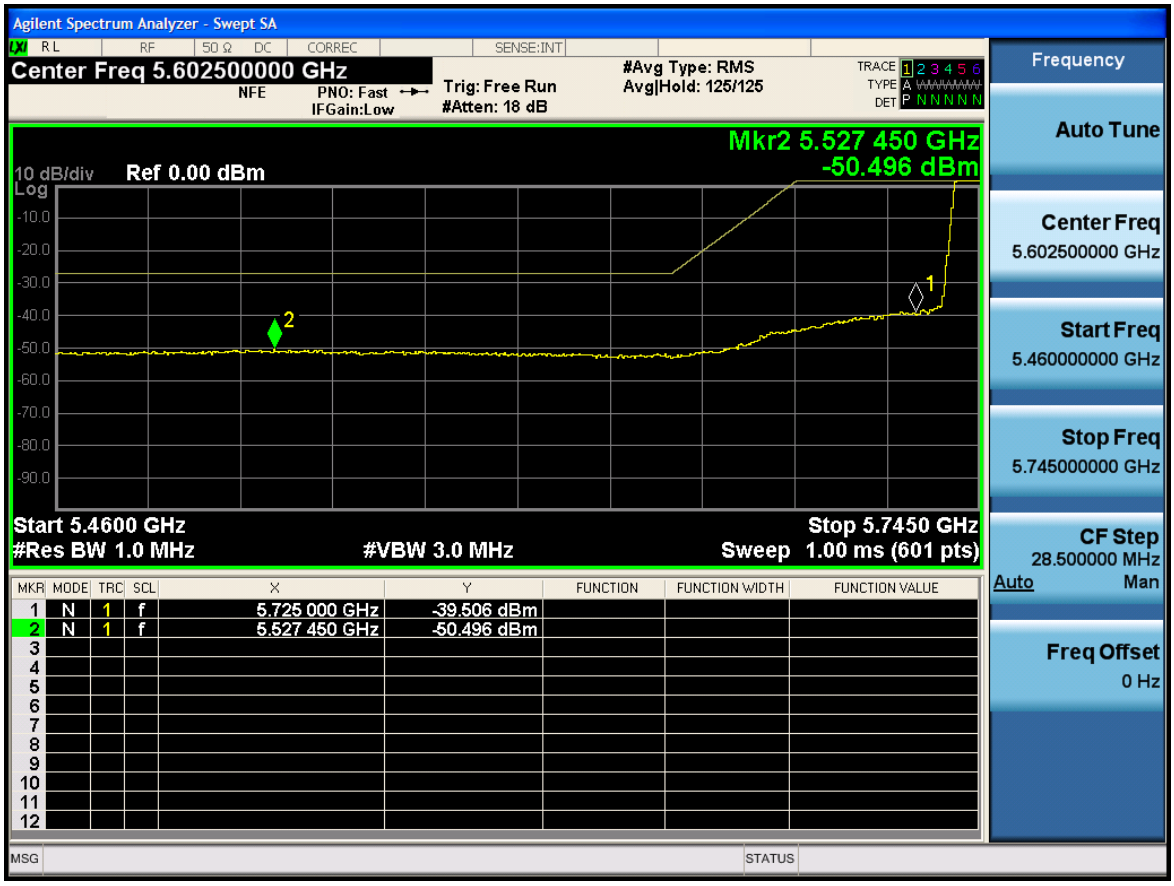

Antenna A
Antenna Gain: 13dBi
Conducted Band edge Peak 15407R, 5785 MHz, Non HT20, 6 to 54 Mbps

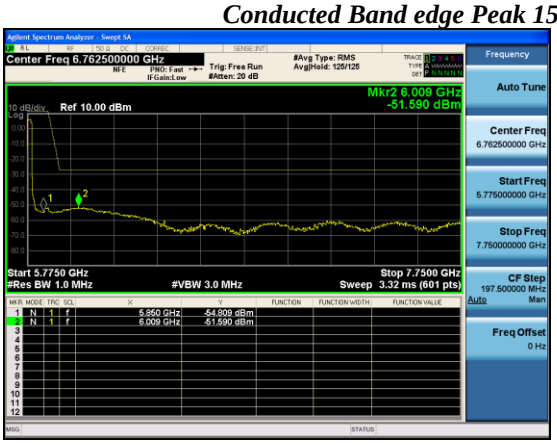

Antenna A

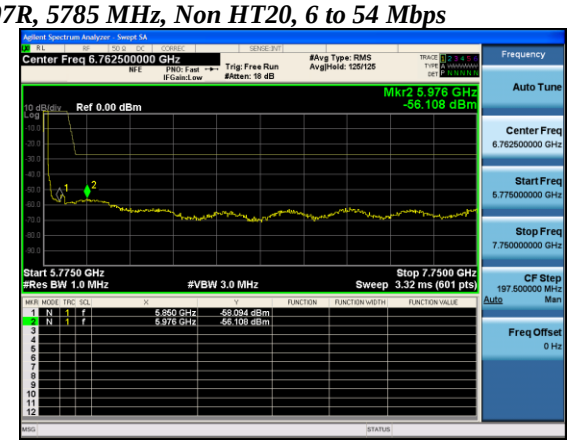

Antenna B

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix B: Radiated Spurious and AC Conducted Emissions

Testing Laboratory: Cisco Systems, Inc., 425 East Tasman Drive, San Jose, CA 95134, USA

B.1 Radiated Spurious Emissions

B1.1 Setup Diagram

Below 1G (Preamp used is optional)

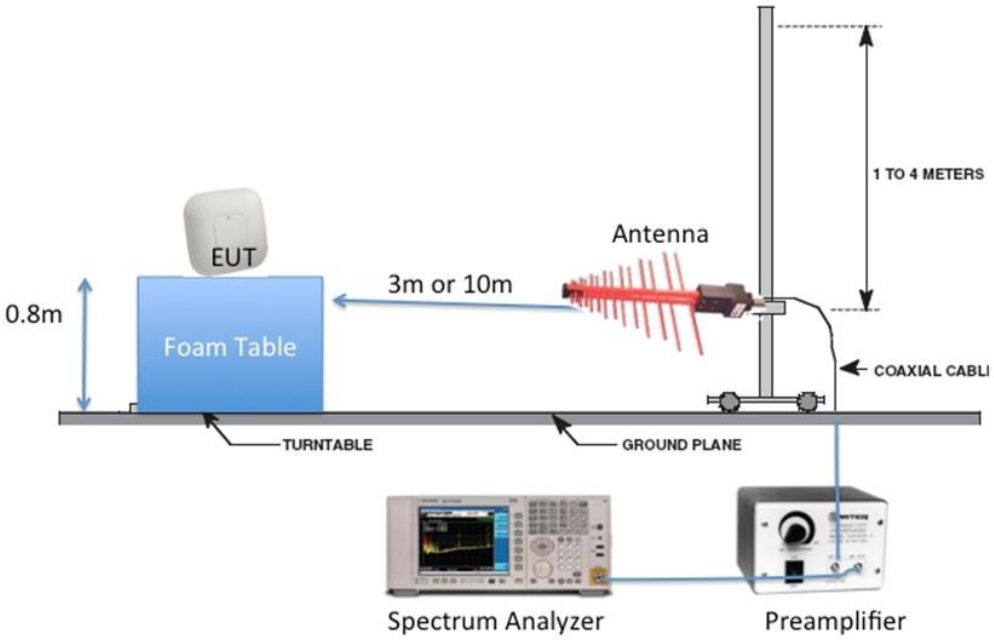

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Above 1G

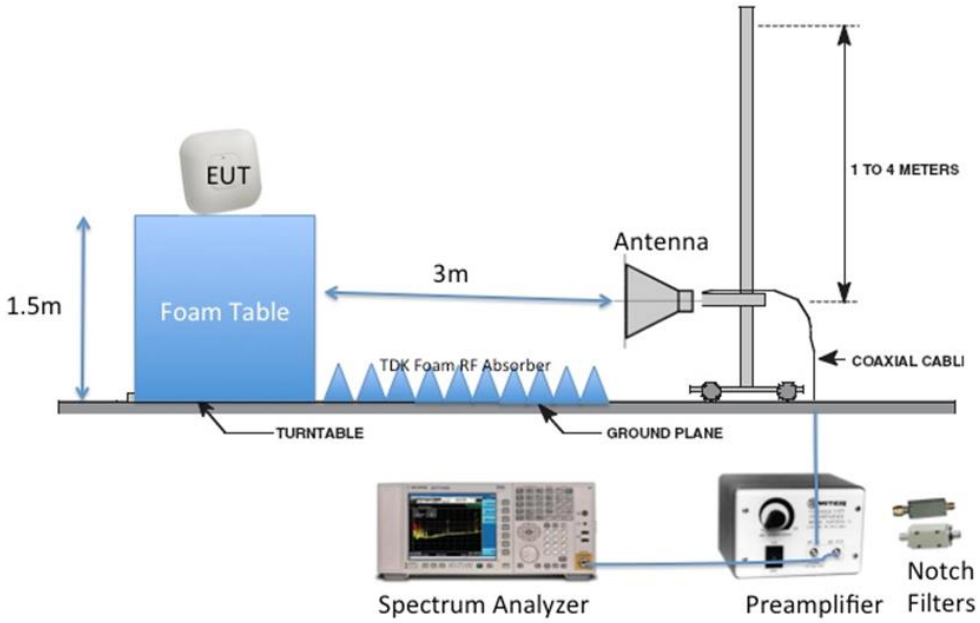

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B1.2 Restricted Bands

15.407 (b) (7) **15.205 / 15.407 /LP0002:4.7.4.2**
The provisions of 15.205 apply to intentional radiators operating under this section

15.205 (b), **LP0002:2.7**
Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. Refer to limit section for detailed limits.

Restricted Bands for LP0002			
MHz	**MHz**	**MHz**	**MHz**
0.090～0.110	108.00～138.00	1660.0～1785.0	8025.0～8500.0
0.490～0.510	149.90～150.05	1805.0～1880.0	9000.0～9200.0
2.172～2.198	156.70～156.90	1885.0～1900.0	9300.0～9500.0
3.013～3.033	162.01～167.17	1905.0～1985.0	10600～12700
4.115～4.198	167.72～173.20	2010.0～2025.0	13250～13400
5.670～5.690	240.00～285.00	2110.0～2170.0	14470～14500
6.200～6.300	322.00～335.40	2200.0～2300.0	15350～16200
8.230～8.400	399.90～410.00	2310.0～2390.0	17700～21400
12.265～12.600	485.00～510.00	2483.5～2900.0	22010～23120
13.340～13.430	608.00～614.00	3260.0～3267.0	23600～24000
14.965～15.020	703.00～748.00	3332.0～3339.0	31200～31800
16.700～16.755	758.00～803.00	3345.8～3358.0	36430～36500
19.965～20.020	825.00～915.00	3500.0～4400.0	Above 38600
25.500～25.700	930.00～1240.0	4500.0～5250.0	
37.475～38.275	1300.0～1427.0	5350.0～5460.0	
73.500～75.400	1435.0～1626.5	7250.0～7750.0	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

RSS-Gen 8.10

(**b**) Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen.

(**c**) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Table 6 Restricted Bands

MHz	MHz	GHz
0.090-0.110	74.8-75.2	9.0-9.2
2.1735-2.1905	108-138	9.3-9.5
3.020-3.026	156.52475-156.52525	10.6-12.7
4.125-4.128	156.7-156.9	13.25-13.4
4.17725-4.17775	240-285	14.47-14.5
4.20725-4.20775	322-335.4	15.35-16.2
5.677-5.683	399.9-410	17.7-21.4
6.215-6.218	608-614	22.01-23.12
6.26775-6.26825	960-1427	23.6-24.0
6.31175-6.31225	1435-1626.5	31.2-31.8
8.291-8.294	1645.5-1646.5	36.43-36.5
8.362-8.366	1660-1710	Above 38.6
8.37625-8.38675	1718.8-1722.2	*
8.41425-8.41475	2200-2300	
12.29-12.293	2310-2390	
12.51975-12.52025	2655-2900	
12.57675-12.57725	3260-3267	
13.36-13.41	3332-3339	
16.42-16.423	3345.8-3358	
16.69475-16.69525	3500-4400	
16.80425-16.80475	4500-5150	
25.5-25.67	5350-5460	
37.5-38.25	7250-7750	
73-74.6	8025-8500	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B1.3 Limits

Below 1 GHz

FCC 15.209 FCC 15.209, LP0002:2.8
The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a).

FCC15.407, LP0002:4.7.4.2

(b) (6) Unwanted emissions below 1GHz must comply with general field strength limits set forth in §15.209.

RSS-Gen 8.9: Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits Table			
Frequency (MHz)	**Field strength (uV/meter)**	**Field strength (dBuV/meter)**	**Measurement distance (meters)**
30-88	100**	40 Qp	3
88-216	150**	43.5 Qp	3
216-960	200**	46 Qp	3
Above 960	500	54 Av / 74 Pk	3

Above 1 GHz

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(4) For transmitters operating in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

RSS-247 6.2.4.2

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and

a) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Limit Conversion (power to field strength)

The field strength limit in dBµV can be converted from power (logarithmic) by using the field strength (linear) approach formula as follows:

$$\mathbf{V/m} = \frac{\sqrt{30 \times Pt \times gt}}{d}$$

where: **pt**= transmitter output power in watts,
gt= numeric gain of the transmitting antenna (unit less),
E = electric field strength in V/m,
d = measurement distance in meters (m).

From the equation above, unit conversion from log => linear with a known power limit of -27 dBm.

(1) Conversion from dBm to Watt

dBm to Watts W = 10((dBm – 30)/10)

$P(W) = 10^{(-27 -120) / 20}$
$= 10^{-5.7}$
$= 1.995 \times 10^{-6}$

(2) Convert from Watt to field strength

a. Convert from Watt to V/m @ 3m distance

$$\mathbf{V/m} = \frac{\sqrt{30 \times Pt \times gt}}{3}$$

$$= \frac{\sqrt{30 \times 0.000001995 \times 1}}{3}$$

= **0.00257**

b. Convert field strength to power density (**V/m to dBµV/m)**

dBµV/m = 20 log (V/m) + 120

= **68.2**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B1.4 Test Procedure

Ref. ANSIC63.10-2013 section 6.5 & 6.6, Cispr16-1-1

ANSI C63.10: 2013 section 4.1.4 / section 12.7.5 (Quasi-Peak), section 12.7.6 (peak), section 12.7.7.3 (average)

Test parameters
(i) Span = Entire frequency range or segment if necessary.
(ii) Reference Level = 80 dBuV
(iii) RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)
(iv) VBW ≥ 3 x RBW
(v) Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz); Peak & Average (frequency range above 1 GHz); Change VBW to 10 Hz for average measurement
(vi) Sweep Time = Couple

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Terminate the access Point RF ports with 50 ohm loads.
Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

30MHz – 18GHz,
Save plots: Peak plot (Vertical and Horizontal) @3m

Above 18 GHz,
Save plots: Peak plot (Vertical and Horizontal) @1m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

Note: The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This report represents the worst-case data for all supported operating modes with antenna which has maximum gain.

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	IW-6300H with Air-ANT2513P4M-N antenna	☑	☐
	Support	IW-6300H-AC-X-K9 power supply	☐	☑

Mode Setting#	Wi-Fi Mode	Modulation	Data Rate
1 (single antenna)	802.11a*	BPSK	6 Mbps
8 (dual antenna)	802.11n (HT40) *	BPSK	27.0 Mbps (MCS0)

Tested By:	**Date of testing:**
Test Engineer(s): Farida Rahmanzai, Jose Huamani	23-Sep-2019 – 11-Oct-2019
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B1.5 TX Radiated Spurious Emissions Graphical Data Results

Subtest Date:	04-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	**802.11a**, Tx Channel 149 (5745 MHz) (worst case)

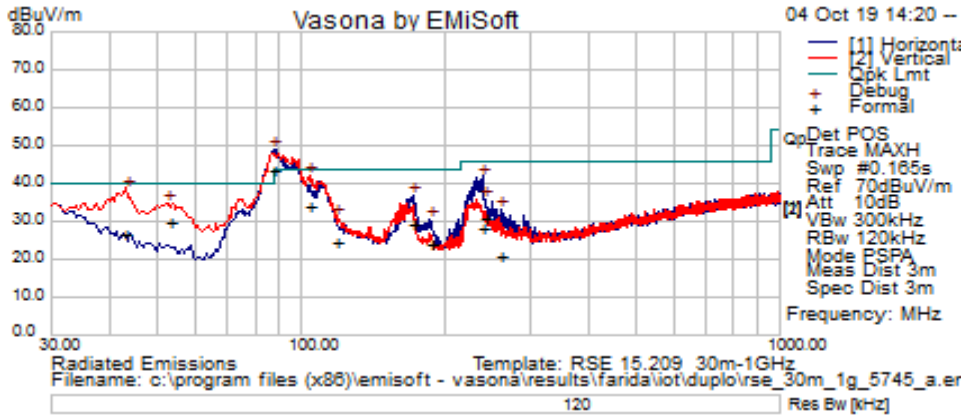

Title: **TX Spurious Emissions from 30MHz-1GHz – Ch149 (5745 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
87.2345	35.53	0.49	7.5	43.53	Quasi Max	H	365	96	50*	-6.47	Pass	See notes
104.2968	22.48	0.54	11.06	34.07	Quasi Max	H	210	222	43.5	-9.43	Pass	
42.786	14.32	0.35	11.87	26.54	Quasi Max	V	213	221	40	-13.46	Pass	
238.3423	15.73	0.83	11.63	28.19	Quasi Max	H	358	235	46	-17.81	Pass	
53.0545	22.05	0.4	7.29	29.75	Quasi Max	V	102	187	40	-10.25	Pass	
171.4943	17.4	0.71	11.3	29.41	Quasi Max	H	208	218	43.5	-14.09	Pass	
242.2598	18.2	0.83	11.7	30.74	Quasi Max	H	104	207	46	-15.26	Pass	
118.015	10.59	0.57	13.6	24.76	Quasi Max	V	198	74	43.5	-18.74	Pass	
261.2858	8	0.86	12.26	21.12	Quasi Max	H	226	124	46	-24.88	Pass	
185.9803	12.39	0.74	10.8	23.92	Quasi Max	H	153	238	43.5	-19.58	Pass	

Note1: 87.23MHz is detemined to be non-radio related signal. FCC part15.109 class A limit applied.
Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	04-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	**802.11a**, Tx Channel 157 (5785 MHz) (worst case)

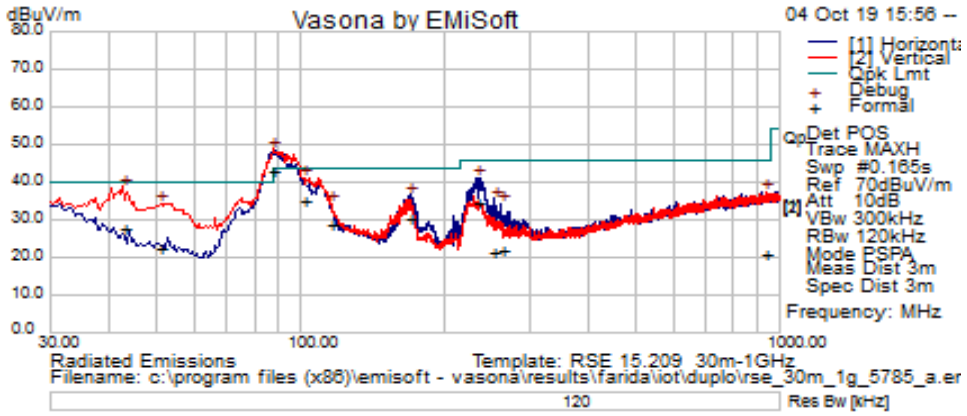

Title: **TX Spurious Emissions from 30MHz-1GHz – Ch157 (5785 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
87.74475	35.04	0.5	7.5	43.03	Quasi Max	H	199	261	50*	-6.97	Pass	See notes
42.5945	15.28	0.35	12.02	27.65	Quasi Max	V	118	36	40	-12.35	Pass	
101.5068	24.41	0.53	10.35	35.29	Quasi Max	V	153	263	43.5	-8.21	Pass	
232.7433	22.52	0.82	11.37	34.71	Quasi Max	H	107	215	46	-11.29	Pass	
50.70275	14.32	0.39	7.79	22.5	Quasi Max	V	296	359	40	-17.5	Pass	
169.796	18.43	0.7	11.42	30.55	Quasi Max	H	161	229	43.5	-12.95	Pass	
935.6403	-2.9	1.66	22.34	21.1	Quasi Max	V	321	158	46	-24.9	Pass	
115.2458	15	0.56	13.22	28.79	Quasi Max	V	184	118	43.5	-14.71	Pass	
253.3625	8.94	0.85	11.5	21.29	Quasi Max	V	177	0	46	-24.71	Pass	
262.6198	8.73	0.87	12.52	22.12	Quasi Max	V	117	143	46	-23.88	Pass	

Note1: 87.74MHz is detemined to be non-radio related signal. FCC part15.109 class A limit applied.
Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

Subtest Date:	04-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	**802.11a**, Tx Channel 165 (5825 MHz) (worst case)

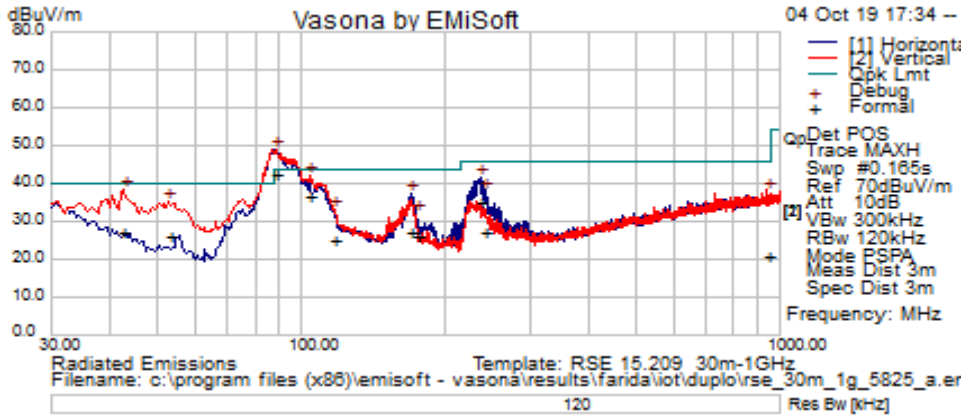

Title: **TX Spurious Emissions from 30MHz-1GHz – Ch165 (5825 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
88.179	34.64	0.5	7.52	42.65	Quasi Max	H	214	251	53.5*	-10.85	Pass	See notes
103.9708	25.22	0.53	10.99	36.74	Quasi Max	V	133	140	43.5	-6.76	Pass	
42.17225	14.47	0.35	12.36	27.18	Quasi Max	V	142	129	40	-12.82	Pass	
236.1693	22.95	0.82	11.52	35.29	Quasi Max	H	103	227	46	-10.71	Pass	
53.03025	18.31	0.4	7.3	26.02	Quasi Max	V	251	335	40	-13.98	Pass	
169.8175	15.03	0.7	11.42	27.15	Quasi Max	V	198	166	43.5	-16.35	Pass	
241.9645	14.5	0.83	11.7	27.03	Quasi Max	H	164	231	46	-18.97	Pass	
938.7485	-2.91	1.67	22.37	21.14	Quasi Max	H	325	348	46	-24.86	Pass	
117.2658	11.15	0.57	13.53	25.25	Quasi Max	H	150	220	43.5	-18.25	Pass	
174.499	14.35	0.71	11.1	26.16	Quasi Max	H	139	199	43.5	-17.34	Pass	

Note1: 88.18MHz is detemined to be non-radio related signal. FCC part15.109 class A limit applied.
Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	11-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	**802.11a**, Tx Channel 149 (5745 MHz)

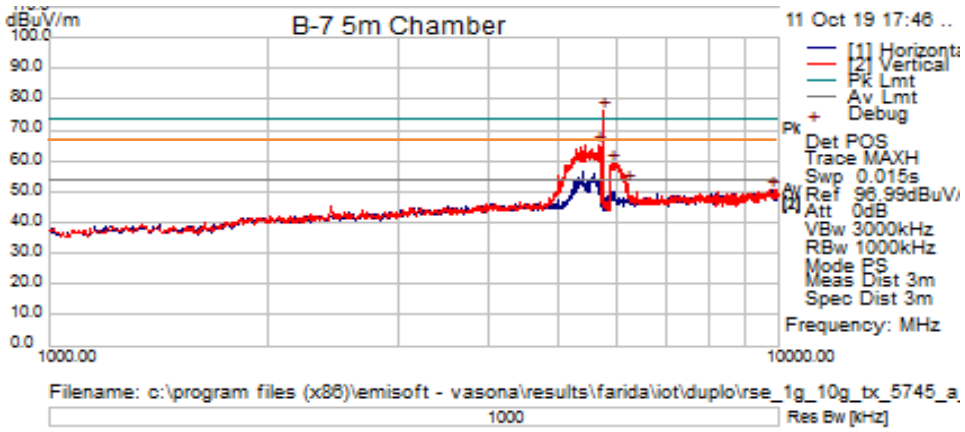

Title: **TX Spurious Emissions from 1GHz-10GHz – Ch149 (5745 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5741.875	71.45	9.97	-5.05	76.36	Peak	V	125	340	N/A	N/A	Ignored	Fundamental
5668.75	60.55	9.9	-5.34	65.1	Peak	V	125	332	72.2	-7.1	Pass	-23dBm/MHz
5910.625	54.07	10.18	-4.98	59.27	Peak	V	100	336	73.2	-13.9	Pass	-22dBm/MHz
6203.125	46.53	10.53	-4.27	52.8	Peak	V	100	342	68.2	-15.4	Pass	-27dBm/MHz

Subtest Date:	11-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	**802.11a**, Tx Channel 157 (5785 MHz)

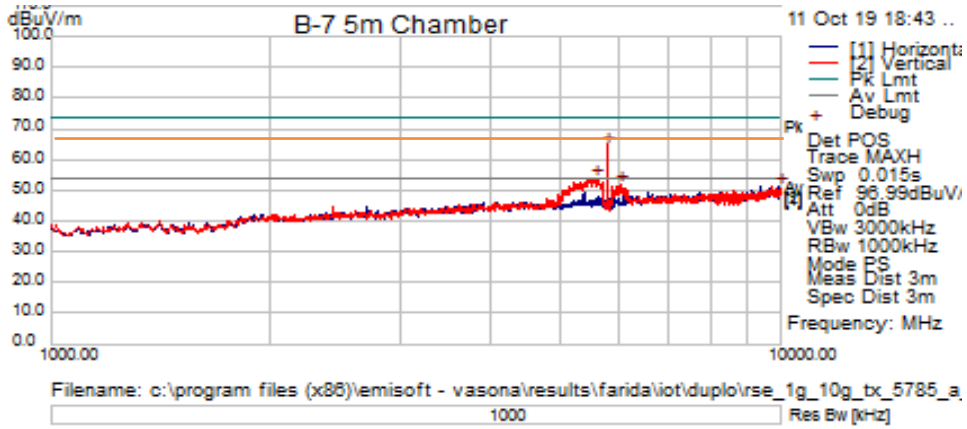

Title: **TX Spurious Emissions from 1GHz-10GHz – Ch157 (5785 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5781.25	59.69	9.97	-4.83	64.84	Peak	V	150	342	N/A	N/A	Ignored	Fundamental
5573.125	49.56	9.75	-5.26	54.04	Peak	V	100	332	68.2	-14.16	Pass	-27dBm/MHz
6034.375	46.39	10.39	-4.56	52.22	Peak	V	125	334	68.2	-15.98	Pass	-27dBm/MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	11-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	**802.11a**, Tx Channel 165 (5825 MHz)

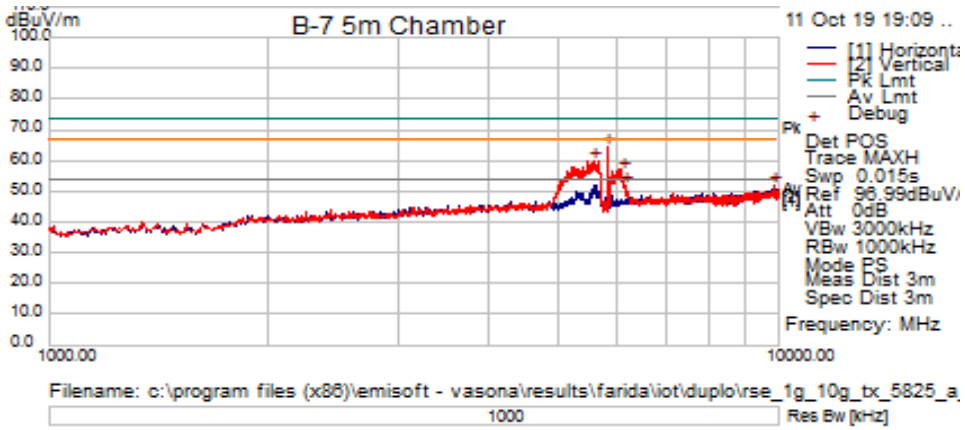

Title: **TX Spurious Emissions from 1GHz-10GHz – Ch165 (5825 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5820.625	59.78	10.09	-5.2	64.67	Peak [Scan]	V	150	338	N/A	N/A	Ignored	Fundamental
6090.625	51.05	10.4	-4.39	57.06	Peak [Scan]	V	150	333	68.2	-11.14	Pass	-27dBm/MHz
6169.375	45.65	10.49	-4.22	51.92	Peak [Scan]	V	100	334	68.2	-16.28	Pass	-27dBm/MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	25-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	**802.11n40**, Tx Channel 151 (5755 MHz)

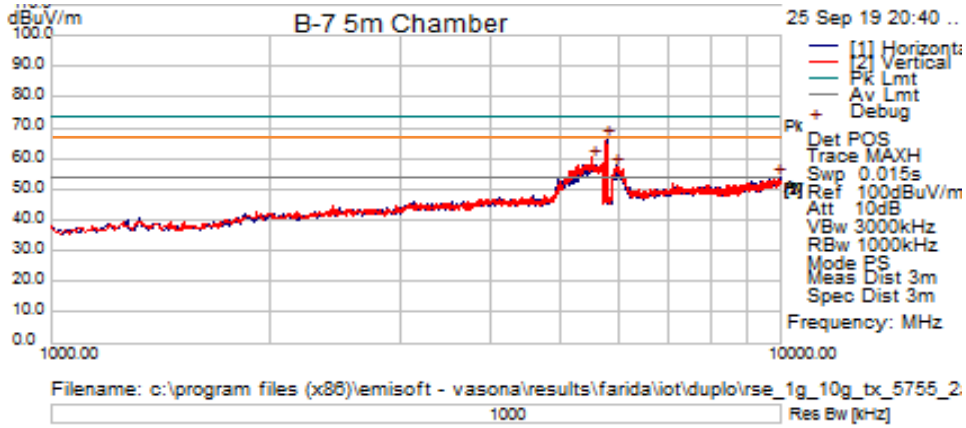

Title: **TX Spurious Emissions from 1GHz-10GHz – Ch151 (5755 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5770	61.63	9.53	-4.78	66.38	Peak	H	150	20	N/A	N/A	Ignored	Fundamental
5500.745	55.54	9.31	-5.37	59.49	Peak	V	101	16	68.2	-8.71	Pass	
5946.583	50.74	9.76	-4.61	55.88	Peak	H	101	28	68.2	-12.32	Pass	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	25-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	**802.11n40**, Tx Channel 159 (5795 MHz)

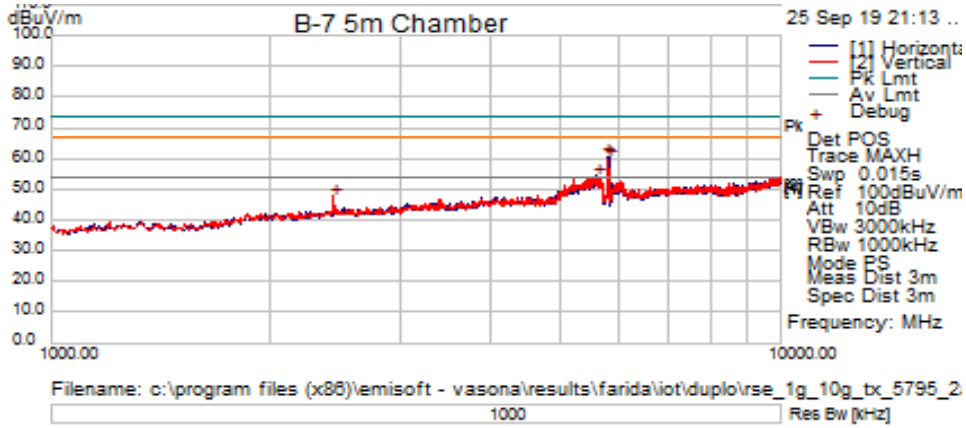

Title: **TX Spurious Emissions from 1GHz-10GHz – Ch159 (5795 MHz)**

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5781.25	55.72	9.56	-4.83	60.45	Peak [Scan]	H	125	15	N/A	N/A	Ignored	Fundamental
5595.625	50.26	9.37	-5.39	54.24	Peak [Scan]	H	125	15	68.2	-13.96	Pass	
2440	48.97	5.89	-7.09	47.77	Peak [Scan]	V	125	148	68.2	-20.43	Pass	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	20-Sep-2019 - 25-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	**802.11a**, Tx Channel 149 (5745 MHz) **802.11n40**, Tx Channel 151 (5755 MHz)

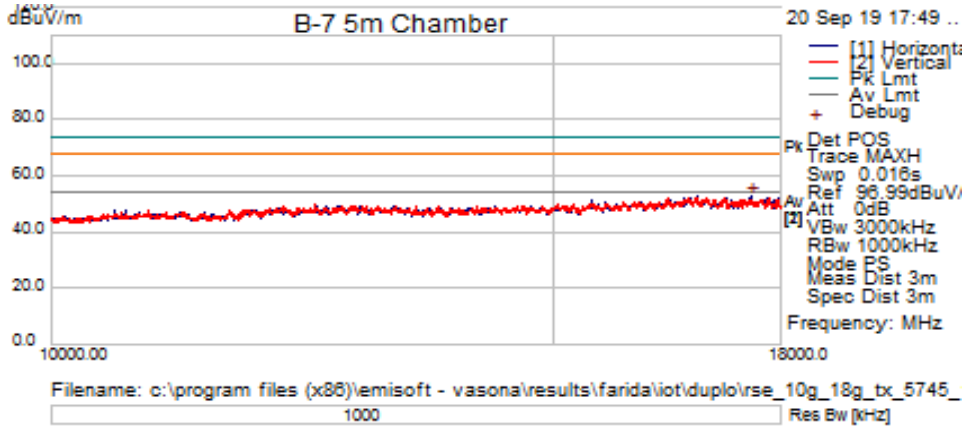

Title: **TX Spurious Emissions from 10GHz-18GHz – Ch149 (5745 MHz)**

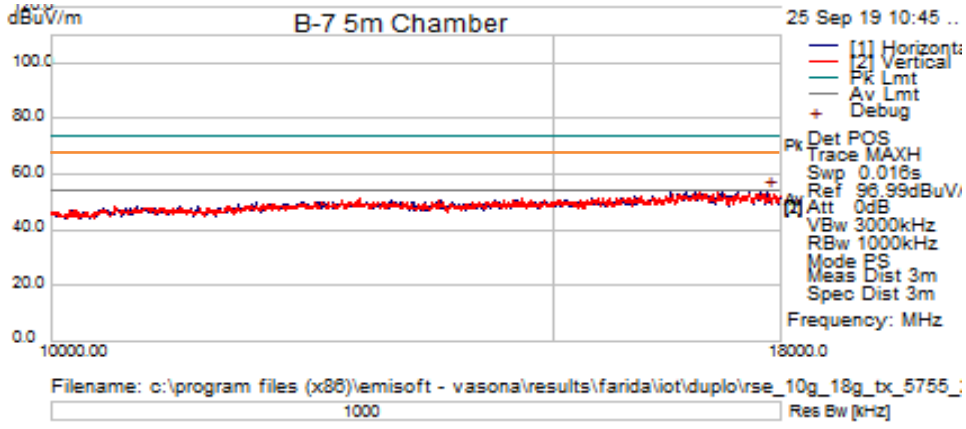

Title: **TX Spurious Emissions from 10GHz-18GHz – Ch151 (5755 MHz)**

Subtest Date:	20-Sep-2019 - 25-Sep-2019

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	**802.11a**, Tx Channel 157 (5785 MHz) **802.11n40**, Tx Channel 159 (5795 MHz)

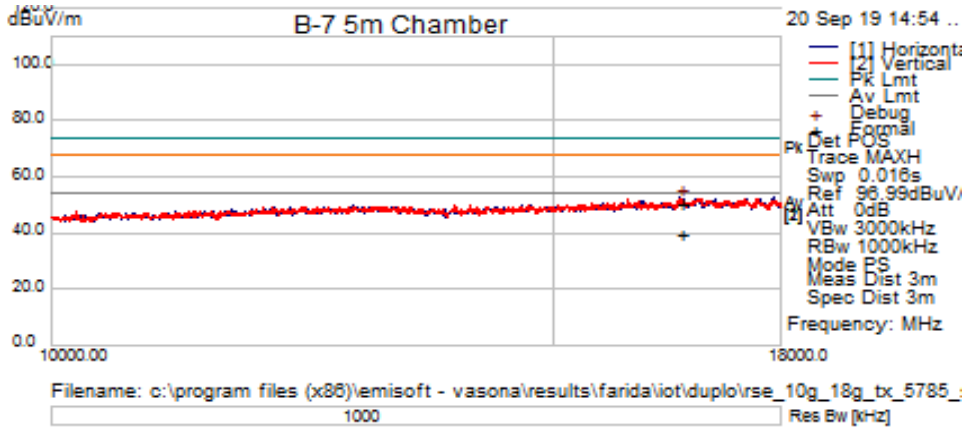

Title: **TX Spurious Emissions from 10GHz-18GHz – Ch157 (5785 MHz)**

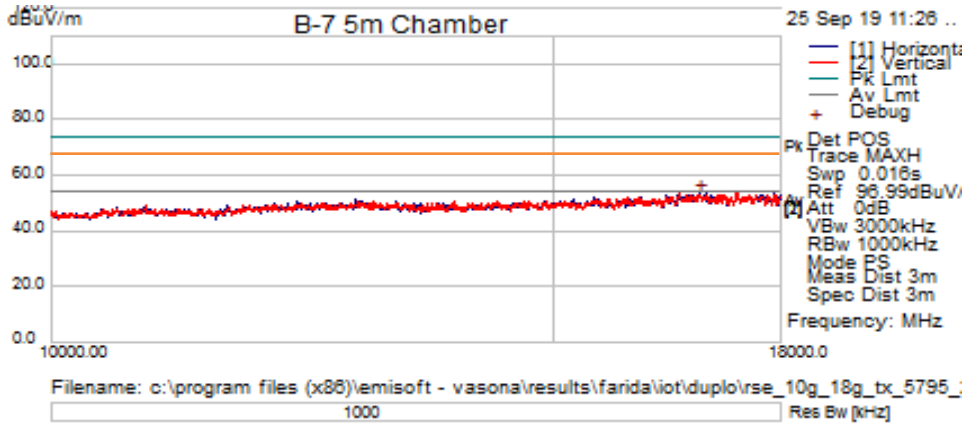

Title: **TX Spurious Emissions from 10GHz-18GHz – Ch159 (5795 MHz)**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	20-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	**802.11a**, Tx Channel 165 (5825 MHz)

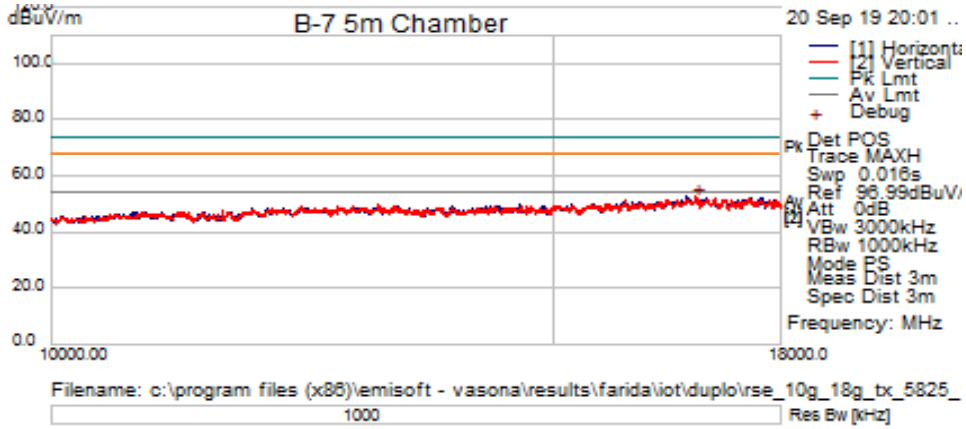

Title: **TX Spurious Emissions from 10GHz-18GHz – Ch165 (5825 MHz)**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	27-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	18GHz - 40GHz
Comments on the above Test Results	**802.11a**, Tx Channel 149 (5745 MHz)

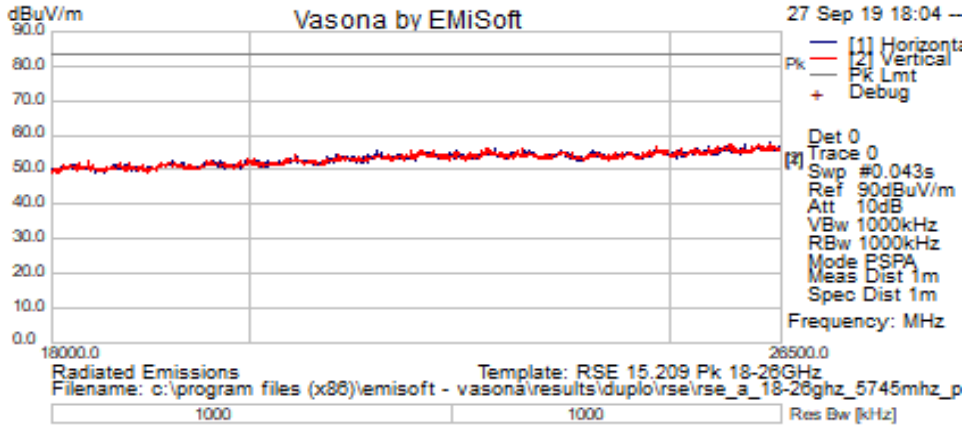

Title: **TX Spurious Emissions from 18GHz-26.5GHz – Ch149 (5745 MHz)**

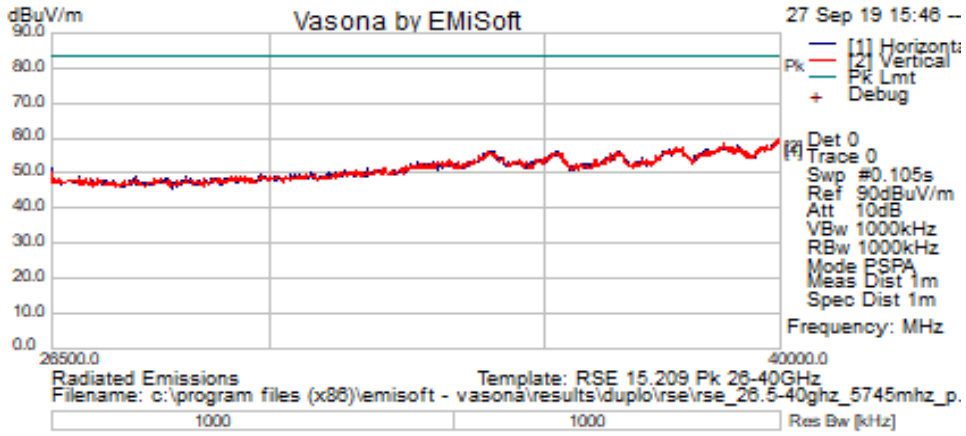

Title: **TX Spurious Emissions from 26.5GHz-40GHz – Ch149 (5745 MHz)**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B.2 AC Conducted Emissions

B2.1 Limits

FCC 15.207: (a), **LP0002:2.3**

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

	Conducted Limits	
Frequency of Emission (MHz)	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

RSS-Gen 8.8: Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4 (AC power-line conducted emissions limit), as measured using a 50 μH / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B2.2 Test Procedures

Ref: C63.10:2013, section 6.2.2

Section 6.2.2 Measurement requirements

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe or across the 50 ΩLISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument, or where permitted or required, the emission currents on the power line sensed by a current probe. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer, and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements, using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having a 50 Ω input impedance. All other ports are terminated in 50Ω loads. Figure 5, Figure 6, and Figure 7 show typical test setups for ac power-line conducted emissions testing (see 6.13). For information about the use of a RF-shielded (screen) room, vertical conducting plane and voltage probe, see ANSI C63.4.

Tabletop devices shall be placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screen) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

Section 6.2.5 Final ac powerline conducted emission measurements

Based on the exploratory tests of the EUT performed in 6.2.4, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency.

Ref. C63.10-2013 section 6.2

Test Procedure
1. Using Vasona software, configure the spectrum analyzer as shown above (be sure to enter all losses between the transmitter output and the spectrum analyzer).

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2. Set the radio in continuous transmit mode.
3. Connect cable end to LISN Hot port and other cable end to the spectrum Analyzer/EMC receiver RF input port. Terminate the LISN neutral port with a 50 Ω impedance terminator.
4. Sweep the frequency range from 150 kHz to 30 MHz (segment if necessary)
5. Use the peak marker function to determine the maximum amplitude level.
6. Center marker frequency and perform final measurement using applicable detector (Quasi-Pk/Average).
7. Record at least 6 highest reading for the worst case operating modes in Quasi-peak/Average.
8. Repeat the test on Neutral lead.
9. Repeat step 3 – 7 with the radio sets in the Receiver mode.
10. Record at least 6 highest reading in Quasi-peak/Average

Ref. C63.10-2013 section 4 / CISPR16-1-1

Test Parameters
Span = Entire frequency range or segment if necessary.
Reference Level = 70 dBuV
RBW = 9 kHz
VBW ≥ 3 x RBW
Sweep Time = Couple
Detector = Quasi-Peak & Average

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
2	EUT	IW-6300H with Air-ANT2513P4M-N antenna	☑	☐
	Support	IW-6300H-AC-X-K9 power supply	☐	☑

Mode Setting#	Wi-Fi Mode	Modulation	Data Rate
1 (single antenna)	802.11a*	BPSK	6 Mbps

Tested By:	**Date of testing:**
Test Engineer(s): Farida Rahmanzai, Jose Huamani	13-Nov-2019
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

B2.3 AC Conducted Emissions Test Data and Graphical Test Results

Subtest Date:	13-Nov-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, formal immunity room
Subtest Title	Conducted Emissions
Frequency Range	150 kHz - 30 MHz
Comments on the above Test Results	TX Ch157 (5785 MHz) with BPSK modulation – 6 Mbps

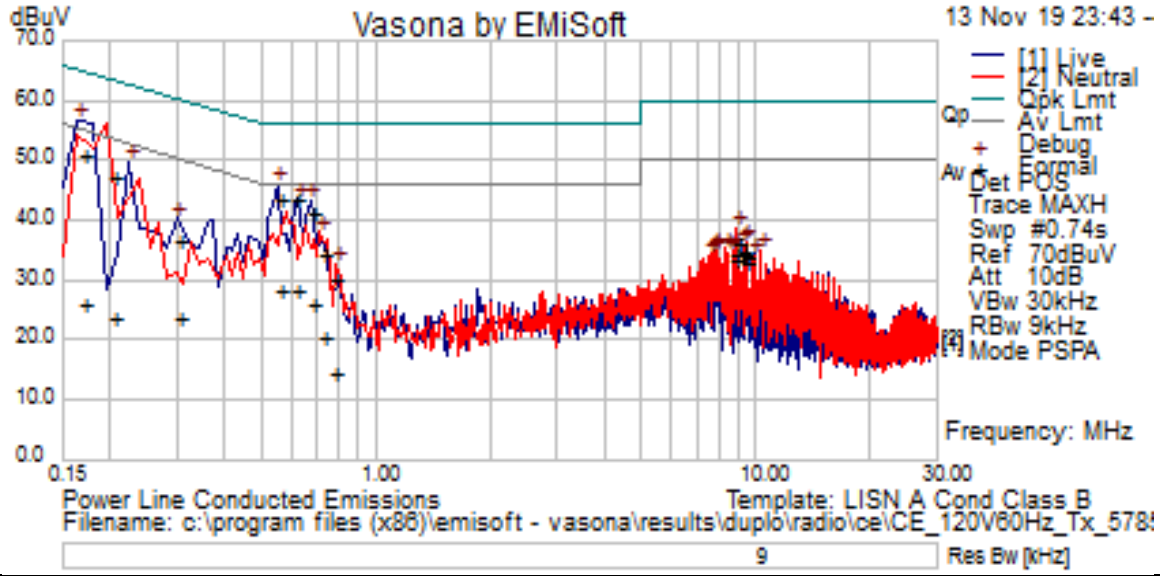

AC Conducted Emissions Test Result Tables for 802.11a / TX Ch157

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
0.170091	30.08	21.07	0.11	51.26	Quasi Peak	Live	64.96	-13.7	Pass	TX / Ch157
0.170091	5.02	21.07	0.11	26.2	Average	Live	54.96	-28.75	Pass	TX / Ch157
0.206625	26.25	20.85	0.1	47.2	Quasi Peak	Live	63.34	-16.14	Pass	TX / Ch157
0.206625	2.78	20.85	0.1	23.73	Average	Live	53.34	-29.61	Pass	TX / Ch157
0.304884	16.22	20.41	0.08	36.71	Quasi Peak	Live	60.11	-23.4	Pass	TX / Ch157
0.304884	3.27	20.41	0.08	23.76	Average	Live	50.11	-26.34	Pass	TX / Ch157
0.561183	23.66	19.98	0.07	43.7	Quasi Peak	Live	56	-12.3	Pass	TX / Ch157
0.561183	8.52	19.98	0.07	28.57	Average	Live	46	-17.43	Pass	TX / Ch157
0.623712	23.58	19.98	0.06	43.61	Quasi Peak	Live	56	-12.39	Pass	TX / Ch157
0.623712	8.35	19.98	0.06	28.38	Average	Live	46	-17.62	Pass	TX / Ch157
0.686883	21.2	19.98	0.06	41.24	Quasi Peak	Live	56	-14.76	Pass	TX / Ch157
0.686883	5.91	19.98	0.06	25.95	Average	Live	46	-20.05	Pass	TX / Ch157
0.72642	14.58	19.98	0.06	34.62	Quasi Peak	Neutral	56	-21.38	Pass	TX / Ch157
0.72642	0.63	19.98	0.06	20.67	Average	Neutral	46	-25.33	Pass	TX / Ch157
0.777771	10.29	19.97	0.07	30.34	Quasi Peak	Neutral	56	-25.66	Pass	TX / Ch157
0.777771	-5.31	19.97	0.07	14.74	Average	Neutral	46	-31.26	Pass	TX / Ch157

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Subtest Date:	13-Nov-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, formal immunity room
Subtest Title	Conducted Emissions
Frequency Range	150 kHz - 30 MHz
Comments on the above Test Results	TX Ch157 (5785 MHz) with BPSK modulation – 6 Mbps

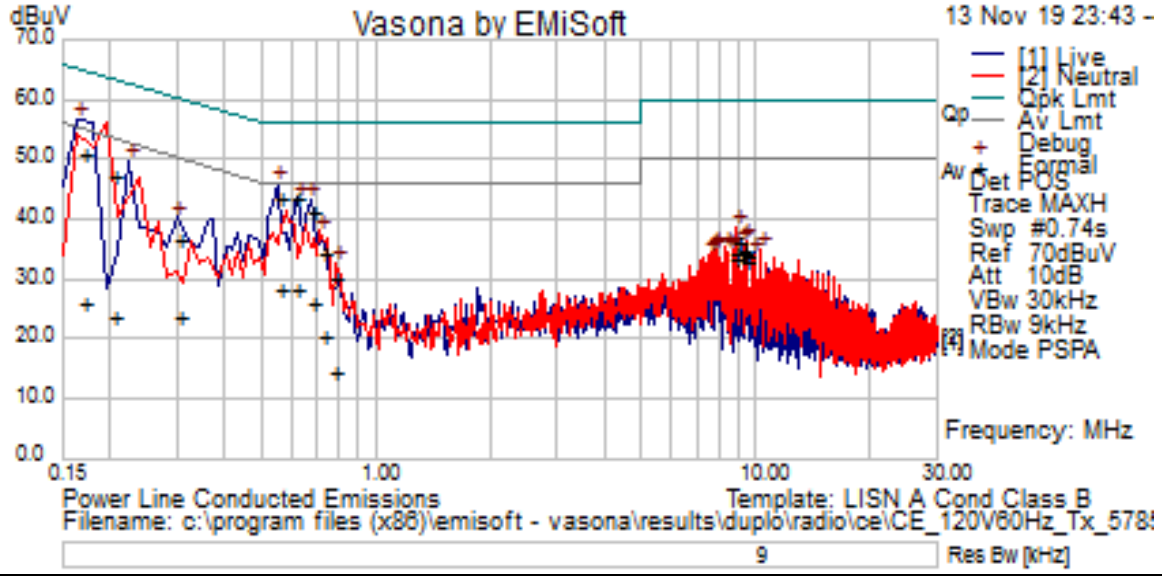

AC Conducted Emissions Test Result Tables for 802.11a / TX Ch157

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
8.775516	14.01	20.13	0.11	34.25	Quasi Peak	Neutral	60	-25.75	Pass	TX / Ch157
8.775516	13.27	20.13	0.11	33.51	Average	Neutral	50	-16.49	Pass	TX / Ch157
8.919039	16.11	20.14	0.1	36.35	Quasi Peak	Neutral	60	-23.65	Pass	TX / Ch157
8.919039	16.02	20.14	0.1	36.26	Average	Neutral	50	-13.74	Pass	TX / Ch157
9.348696	14.83	20.14	0.11	35.08	Quasi Peak	Neutral	60	-24.92	Pass	TX / Ch157
9.348696	14.34	20.14	0.11	34.59	Average	Neutral	50	-15.41	Pass	TX / Ch157
9.493626	13.59	20.15	0.1	33.84	Quasi Peak	Neutral	60	-26.16	Pass	TX / Ch157
9.493626	12.99	20.15	0.1	33.23	Average	Neutral	50	-16.77	Pass	TX / Ch157

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS008113	Cisco/NSA 5m Chamber	NSA 5m Chamber	01-Oct-19	01-Oct-20	B1
CIS037581	ETS Lindgren / 3117	Double Ridged Guide Horn Antenna	25-Jan-19	25-Jan-20	B1
CIS039131	Cisco / TH0118	Mast Mount Preamplifier Array, 1-18GHz	25-Feb-19	25-Feb-20	B1
CIS038404	Sunol Sciences / JB1	Combination Bi-Log Antenna, 30MHz-2GHz	31-Jan-19	31-Jan-20	B1
CIS036710	Cisco/1840	18-40GHz EMI Test Head/Verification Fixture	12-Aug-19	12-Aug-20	B1
CIS018231	Rohde & Schwarz /ESI 40(ESIB 40)	EMI RECEIVER TEST 20Hz-40GHz	07-Mar-19	07-Mar-20	B1
CIS042012	Rohde & Schwarz / ESCI	EMI Test Receiver	12-Aug-19	12-Aug-20	B1
CIS040604	Agilent / E4440A	Precision Spectrum Analyzer	19-Oct-18	19-Oct-20	B1
CIS047311	Huber+ Suhner/Sucoflex 106PA	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS055178	Huber+ Suhner/Sucoflex 106PA	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS025660	Micro-Coax / UFB311A-1-0840-504504	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS025640	Micro-Coax / UFB311A-0-2720-520520	Coaxial Cable, 272.0 in. to 18GHz	30-Sep-19	30-Sep-20	B1
CIS056058	Wainwright Instruments/ WRCJV12-5695-5725-5850-5880 -40SS	SMA Band Reject Filter 5.725GHz to 5.850GHz	10-Aprl-19	10-Apr-20	B1
Test Equipment used for AC Conducted Emissions					
CIS41955	Rohde & Schwarz / ESCI	EMI Test Receiver	25-Apr-19	25-Apr-20	B2
CIS08187	Fisher Custom Com / FCC-450B-2.4-N	Pulse Limiter	15-May-19	15-May-20	B2
CIS019210	TTE / H785-150K-50-21378	High Pass Filter 150KHz	25-Feb-19	25-Feb-20	B2
CIS05039	Fisher Custom Com / 50/250-50-2-02	LISN (9kHz-30MHz)	21-Feb-19	21-Feb-20	B2
CIS034158	Fisher Custom Com / 50-2-RA-NEMA-5-20R	LISN Receptacle Adaptor	21-Feb-19	21-Feb-20	B2
CIS040532	Coleman / RG-223	25 ft RG-223 Cable	04-Dec-18	04-Dec-19	B2
51663	Bird / 5-T-MB	50Ω termination	04-Dec-18	04-Dec-19	B2

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
RF Conducted at output antenna port				
7329	OMEGA/CT485B	Chart Recorder	18 Feb. 2019	18 Feb. 2020
49516	Keysight (Agilent/HP) / N9030A	PXA Signal Analyzer, 3Hz to 50GHz	29 Nov. 2019	29 Nov. 2019
55097	Nattional Instruments / PXI-1042	Chassis PXI	Cal Not Required	Cal Not Required
56089	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
56328	Pasternack / PE5019-1	Torque Wrench	13 Feb. 2019	13 Feb. 2020
57233	Nattional Instruments / PXI-8115	Embedded Controller	Cal Not Required	Cal Not Required
57253	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
57254	National Instruments / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use
57479	CISCO / ATIL	Automation Test Insertion Loss System	Verify Before Use	Verify Before Use

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix C: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ($1x10^3$)
EN	European Norm	MHz	MegaHertz ($1x10^6$)
IEC	International Electro technical Commission	GHz	Gigahertz ($1x10^9$)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ($1x10^3$)
L1	Line 1	µV	Microvolt ($1x10^{-6}$)
L2	Line2	A	Amp
L3	Line 3	µA	Micro Amp ($1x10^{-6}$)
DC	Direct Current	mS	Milli Second ($1x10^{-3}$)
RAW	Uncorrected measurement value, as indicated by the measuring device	µS	Micro Second ($1x10^{-6}$)
RF	Radio Frequency	µS	Micro Second ($1x10^{-6}$)
SLCE	Signal Line Conducted Emissions	m	Meter
Measdist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix D: Photographs of Test Setups

Title: EUT Pictures

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Title: Radio Conducted Test Setup

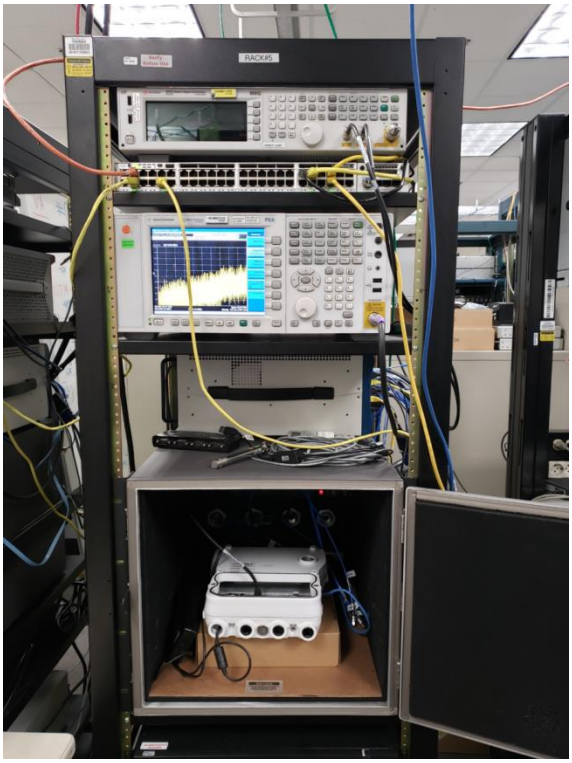

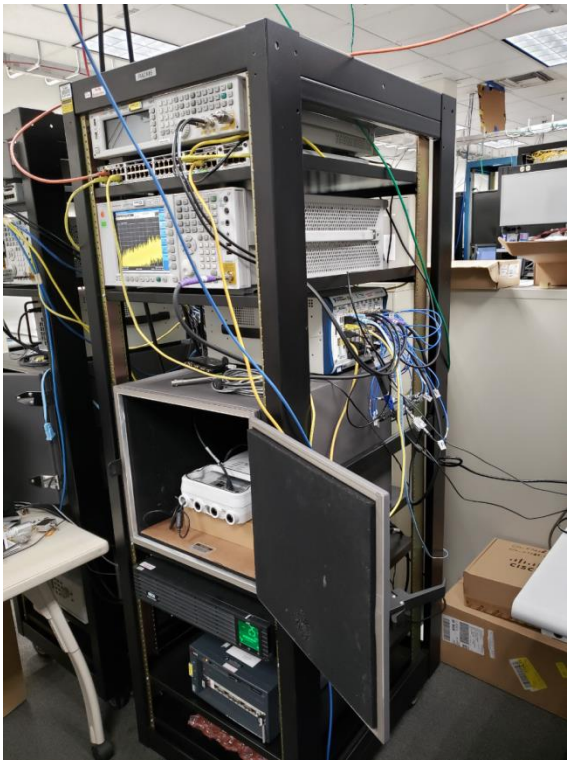

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Title: Radiated Spurious Emissions Test Setup

Title: **Radiated Spurious Emissions 30MHz-1GHz – Test Setup**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

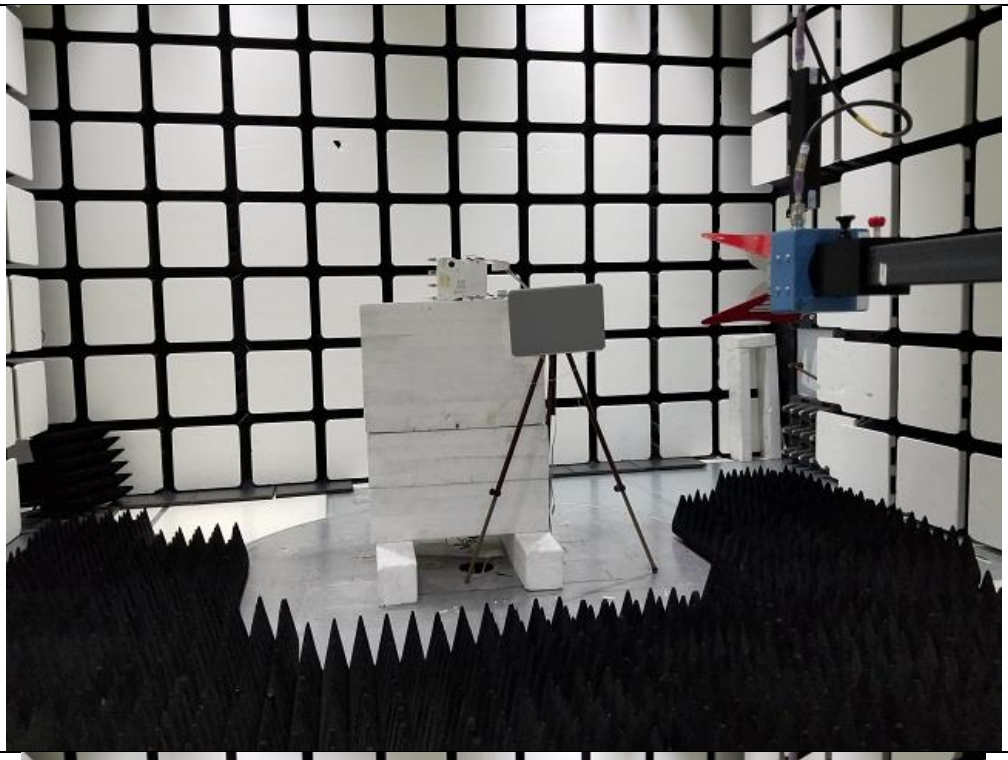

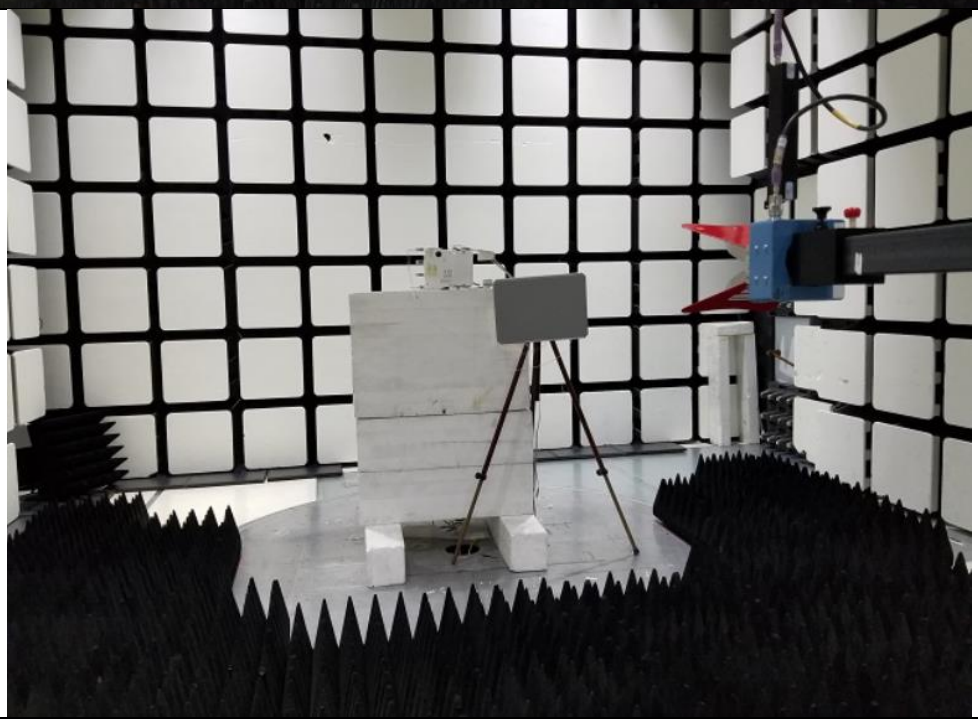

Title: **Radiated Spurious Emissions 1GHz-18GHz – Test Setup**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

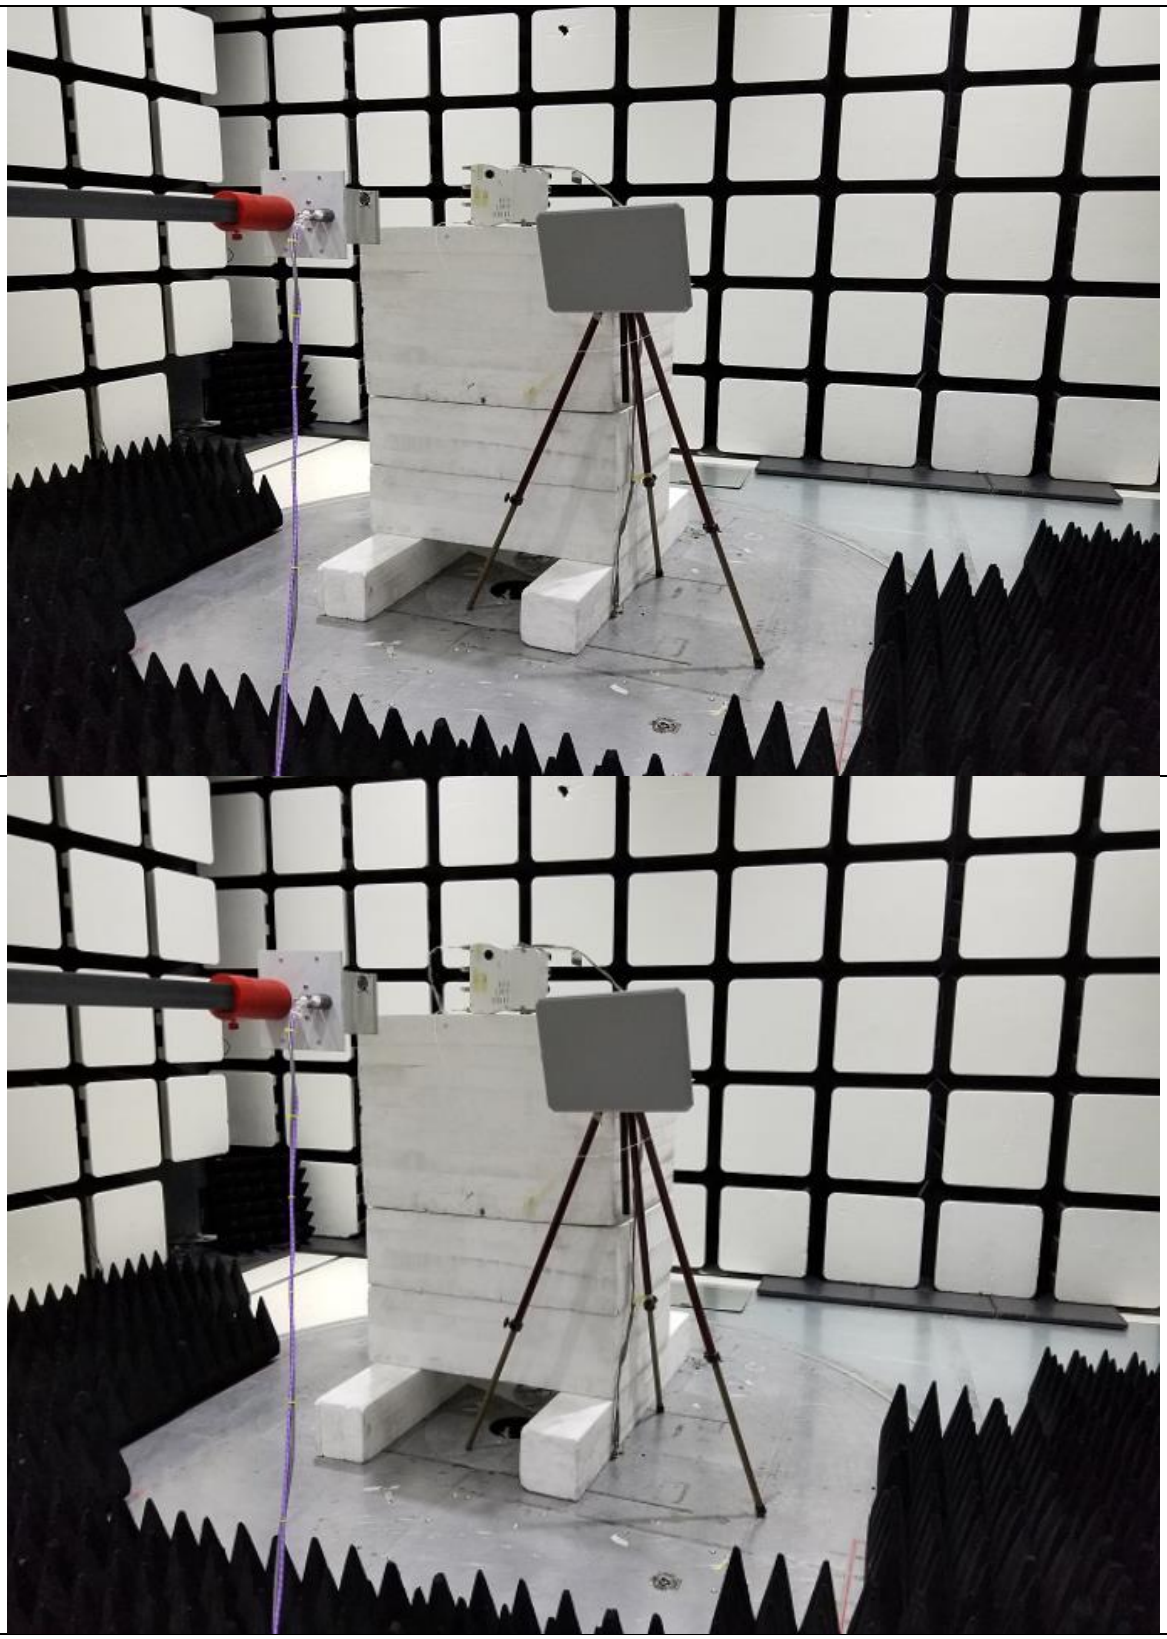

Title: **Radiated Spurious Emissions 18GHz-40GHz – Test Setup**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Title: **Conducted Emissions 150KHz-30MHz – Test Setup**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix E: Software Used to Perform Testing

EMIsoftVasona, version 6.024

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix F: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix G: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

http://www.a2la.org/scopepdf/1178-01.pdf

Appendix H: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 18357550
Target Power Tables EDCS# 18295686

Appendix I: Worst Case Justification

All 3 orientations (Z, Y, Z) of the EUT were assessed by performing pre-scan.
The Z orientation was determined to be the worst-case orientation.

Worst Case Mode: Worst case mode shall be the mode that produces the highest power level based on conducted power measurement.

Also see Appendix A the test report.

End

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential