


頻帶邊緣

附註: 其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射, 其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

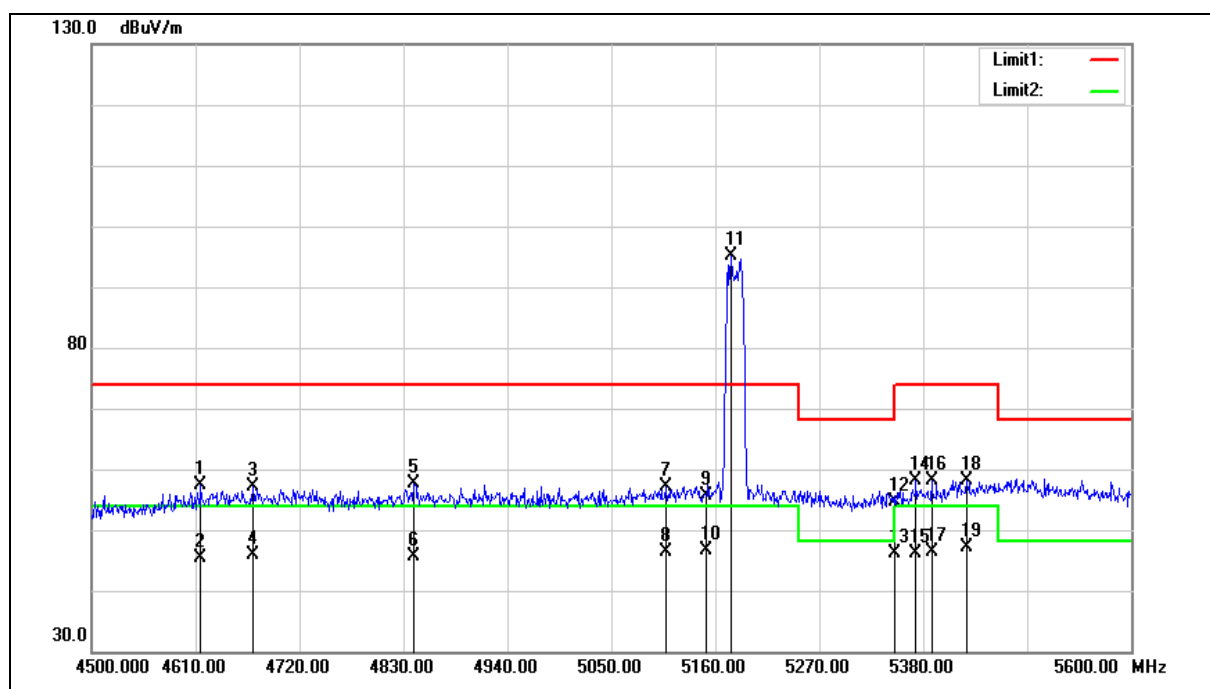

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4615.500	51.96	5.33	57.29	74.00	-16.71	peak
2	4615.500	40.05	5.33	45.38	54.00	-8.62	AVG
3	4670.500	51.50	5.51	57.01	74.00	-16.99	peak
4	4670.500	40.39	5.51	45.90	54.00	-8.10	AVG
5	4841.000	51.61	6.02	57.63	74.00	-16.37	peak
6	4841.000	39.71	6.02	45.73	54.00	-8.27	AVG
7	5107.200	50.29	6.81	57.10	74.00	-16.90	peak
8	5107.200	39.48	6.81	46.29	54.00	-7.71	AVG
9	5150.000	48.61	6.94	55.55	74.00	-18.45	peak
10	5150.000	39.78	6.94	46.72	54.00	-7.28	AVG
11	5176.500	88.22	7.02	95.24	--	--	peak
12	5350.000	47.15	7.50	54.65	74.00	-19.35	peak
13	5350.000	38.65	7.50	46.15	54.00	-7.85	AVG
14	5372.300	50.65	7.56	58.21	74.00	-15.79	peak
15	5372.300	38.56	7.56	46.12	54.00	-7.88	AVG
16	5388.800	50.45	7.62	58.07	74.00	-15.93	peak
17	5388.800	38.65	7.62	46.27	54.00	-7.73	AVG
18	5426.200	50.42	7.73	58.15	74.00	-15.85	peak
19	5426.200	39.51	7.73	47.24	54.00	-6.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

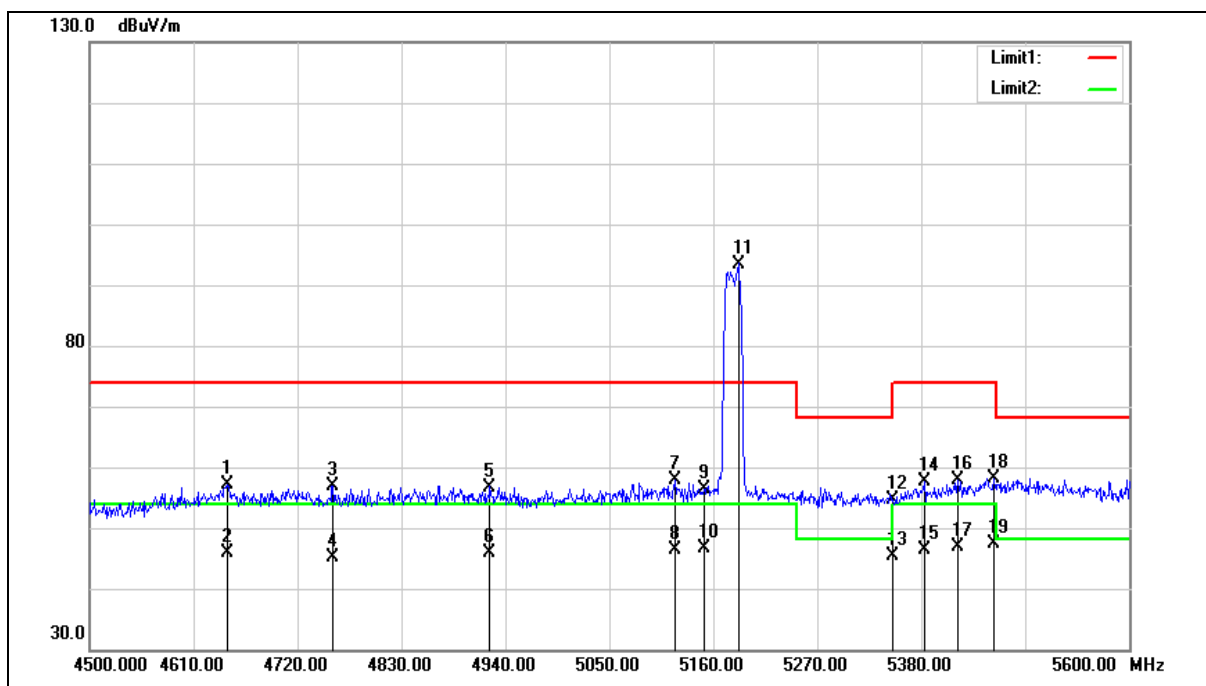

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.200	51.67	5.42	57.09	74.00	-16.91	peak
2	4645.200	40.54	5.42	45.96	54.00	-8.04	AVG
3	4757.400	51.09	5.77	56.86	74.00	-17.14	peak
4	4757.400	39.39	5.77	45.16	54.00	-8.84	AVG
5	4923.500	50.47	6.28	56.75	74.00	-17.25	peak
6	4923.500	39.62	6.28	45.90	54.00	-8.10	AVG
7	5119.300	51.01	6.84	57.85	74.00	-16.15	peak
8	5119.300	39.53	6.84	46.37	54.00	-7.63	AVG
9	5150.000	49.50	6.94	56.44	74.00	-17.56	peak
10	5150.000	39.64	6.94	46.58	54.00	-7.42	AVG
11	5186.400	86.45	7.05	93.50	--	--	peak
12	5350.000	47.13	7.50	54.63	74.00	-19.37	peak
13	5350.000	37.77	7.50	45.27	54.00	-8.73	AVG
14	5383.300	50.04	7.60	57.64	74.00	-16.36	peak
15	5383.300	38.88	7.60	46.48	54.00	-7.52	AVG
16	5418.500	50.23	7.70	57.93	74.00	-16.07	peak
17	5418.500	39.21	7.70	46.91	54.00	-7.09	AVG
18	5457.000	50.36	7.81	58.17	74.00	-15.83	peak
19	5457.000	39.54	7.81	47.35	54.00	-6.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

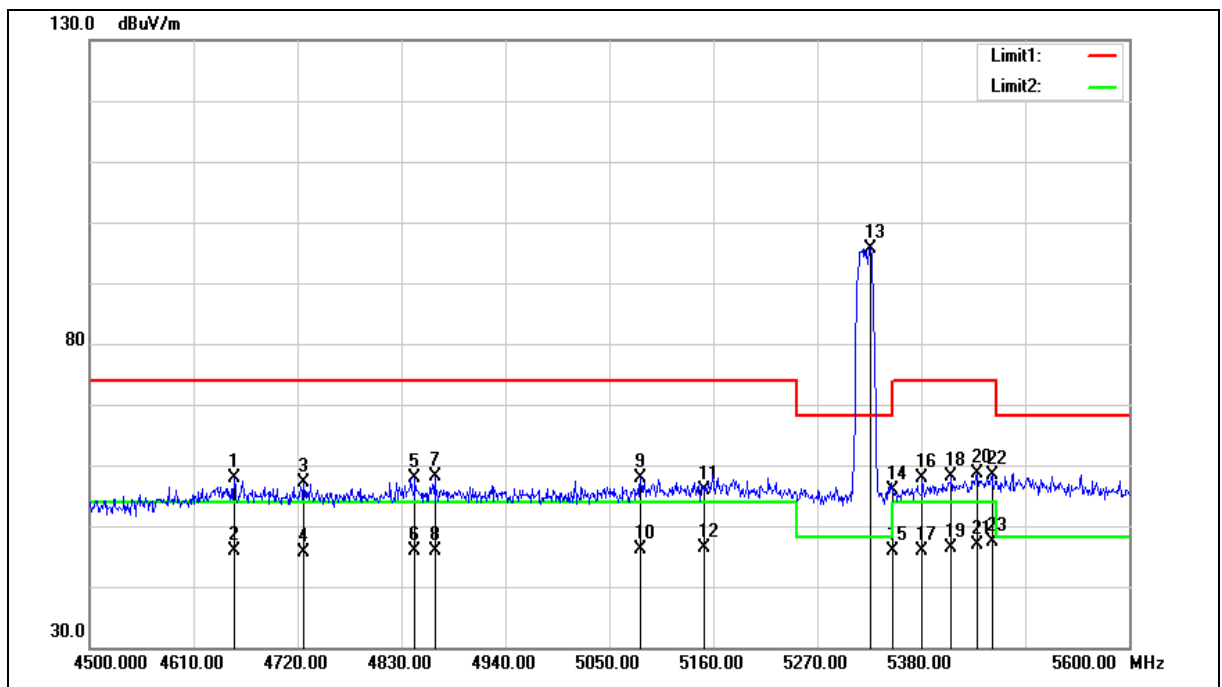

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4652.900	52.45	5.45	57.90	74.00	-16.10	peak
2	4652.900	40.54	5.45	45.99	54.00	-8.01	AVG
3	4726.600	51.51	5.68	57.19	74.00	-16.81	peak
4	4726.600	39.99	5.68	45.67	54.00	-8.33	AVG
5	4844.300	51.93	6.04	57.97	74.00	-16.03	peak
6	4844.300	39.76	6.04	45.80	54.00	-8.20	AVG
7	4865.200	52.13	6.10	58.23	74.00	-15.77	peak
8	4865.200	39.88	6.10	45.98	54.00	-8.02	AVG
9	5083.000	51.06	6.74	57.80	74.00	-16.20	peak
10	5083.000	39.27	6.74	46.01	54.00	-7.99	AVG
11	5150.000	48.88	6.94	55.82	74.00	-18.18	peak
12	5150.000	39.41	6.94	46.35	54.00	-7.65	AVG
13	5326.100	88.15	7.44	95.59	--	--	peak
14	5350.000	48.34	7.50	55.84	74.00	-18.16	peak
15	5350.000	38.41	7.50	45.91	54.00	-8.09	AVG
16	5381.100	50.32	7.60	57.92	74.00	-16.08	peak
17	5381.100	38.22	7.60	45.82	54.00	-8.18	AVG
18	5411.900	50.33	7.68	58.01	74.00	-15.99	peak
19	5411.900	38.61	7.68	46.29	54.00	-7.71	AVG
20	5439.400	50.83	7.76	58.59	74.00	-15.41	peak
21	5439.400	39.07	7.76	46.83	54.00	-7.17	AVG
22	5454.800	50.57	7.80	58.37	74.00	-15.63	peak
23	5454.800	39.61	7.80	47.41	54.00	-6.59	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

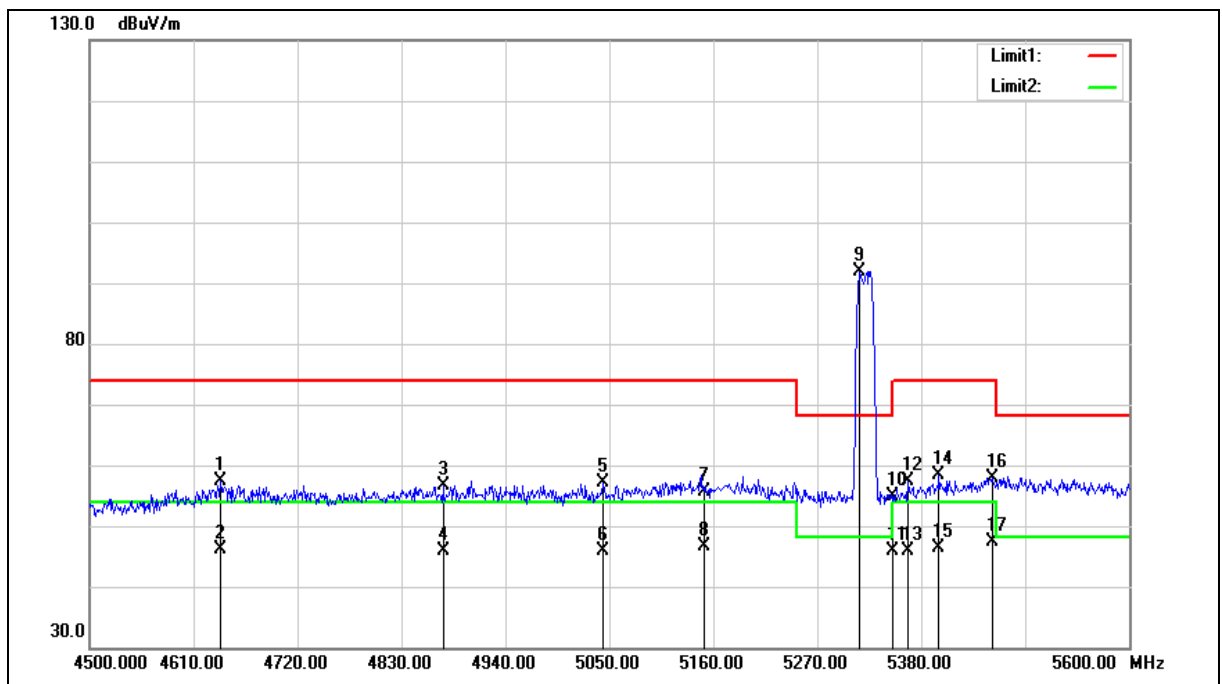

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	52.08	5.40	57.48	74.00	-16.52	peak
2	4638.600	40.68	5.40	46.08	54.00	-7.92	AVG
3	4874.000	50.50	6.12	56.62	74.00	-17.38	peak
4	4874.000	39.66	6.12	45.78	54.00	-8.22	AVG
5	5043.400	50.52	6.63	57.15	74.00	-16.85	peak
6	5043.400	39.29	6.63	45.92	54.00	-8.08	AVG
7	5150.000	48.68	6.94	55.62	74.00	-18.38	peak
8	5150.000	39.79	6.94	46.73	54.00	-7.27	AVG
9	5315.100	84.56	7.41	91.97	--	--	peak
10	5350.000	47.31	7.50	54.81	74.00	-19.19	peak
11	5350.000	38.34	7.50	45.84	54.00	-8.16	AVG
12	5365.700	49.74	7.55	57.29	74.00	-16.71	peak
13	5365.700	38.26	7.55	45.81	54.00	-8.19	AVG
14	5398.700	50.73	7.65	58.38	74.00	-15.62	peak
15	5398.700	38.69	7.65	46.34	54.00	-7.66	AVG
16	5454.800	50.15	7.80	57.95	74.00	-16.05	peak
17	5454.800	39.56	7.80	47.36	54.00	-6.64	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

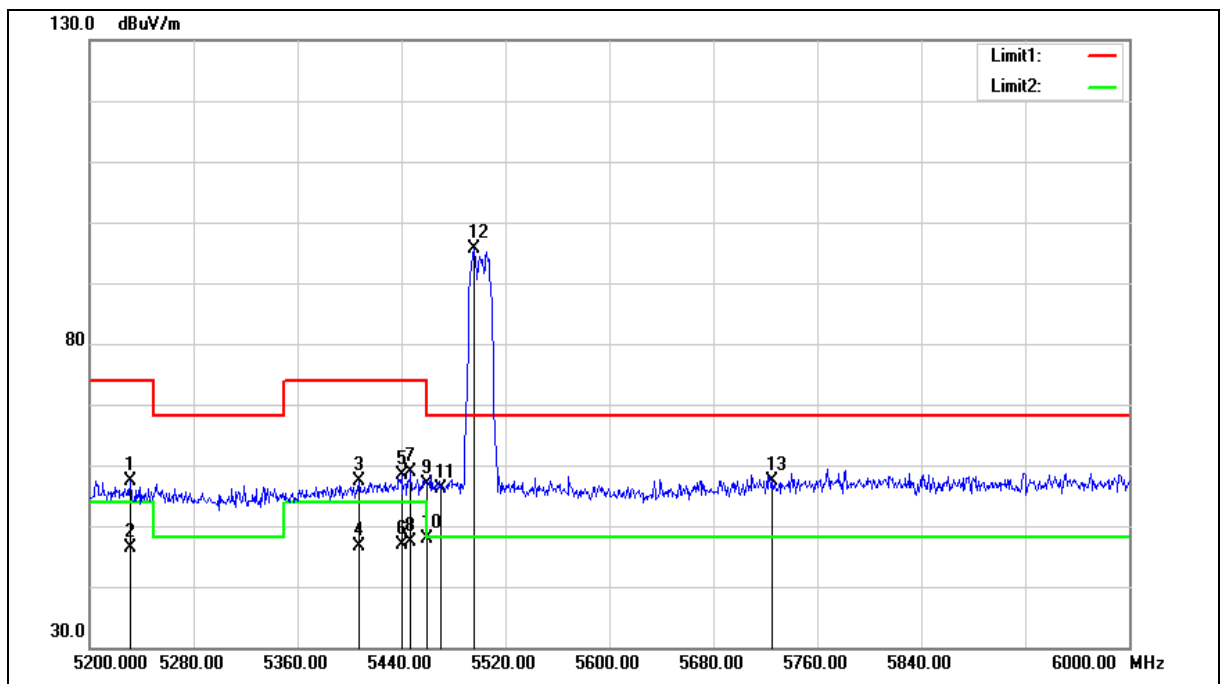

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5231.200	50.19	7.17	57.36	74.00	-16.64	peak
2	5231.200	39.33	7.17	46.50	54.00	-7.50	AVG
3	5407.200	49.63	7.67	57.30	74.00	-16.70	peak
4	5407.200	39.06	7.67	46.73	54.00	-7.27	AVG
5	5440.000	50.50	7.76	58.26	74.00	-15.74	peak
6	5440.000	39.16	7.76	46.92	54.00	-7.08	AVG
7	5447.200	51.20	7.78	58.98	74.00	-15.02	peak
8	5447.200	39.66	7.78	47.44	54.00	-6.56	AVG
9	5460.000	48.94	7.82	56.76	74.00	-17.24	peak
10	5460.000	40.06	7.82	47.88	54.00	-6.12	AVG
11	5470.000	48.17	7.85	56.02	68.20	-12.18	peak
12	5496.000	87.69	7.92	95.61	--	--	peak
13	5725.000	48.90	8.39	57.29	68.20	-10.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

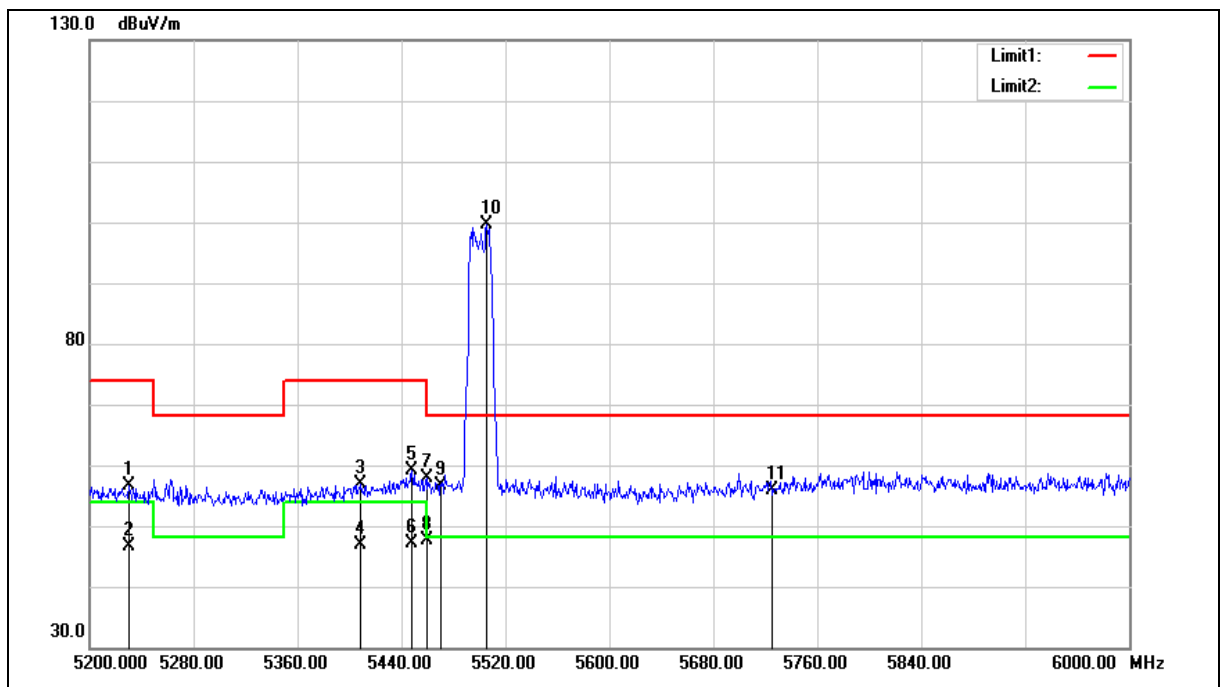

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5230.400	49.48	7.16	56.64	74.00	-17.36	peak
2	5230.400	39.47	7.16	46.63	54.00	-7.37	AVG
3	5408.800	49.09	7.68	56.77	74.00	-17.23	peak
4	5408.800	39.23	7.68	46.91	54.00	-7.09	AVG
5	5448.000	51.37	7.79	59.16	74.00	-14.84	peak
6	5448.000	39.46	7.79	47.25	54.00	-6.75	AVG
7	5460.000	49.95	7.82	57.77	74.00	-16.23	peak
8	5460.000	39.90	7.82	47.72	54.00	-6.28	AVG
9	5470.000	48.75	7.85	56.60	68.20	-11.60	peak
10	5505.600	91.71	7.95	99.66	--	--	peak
11	5725.000	47.55	8.39	55.94	68.20	-12.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

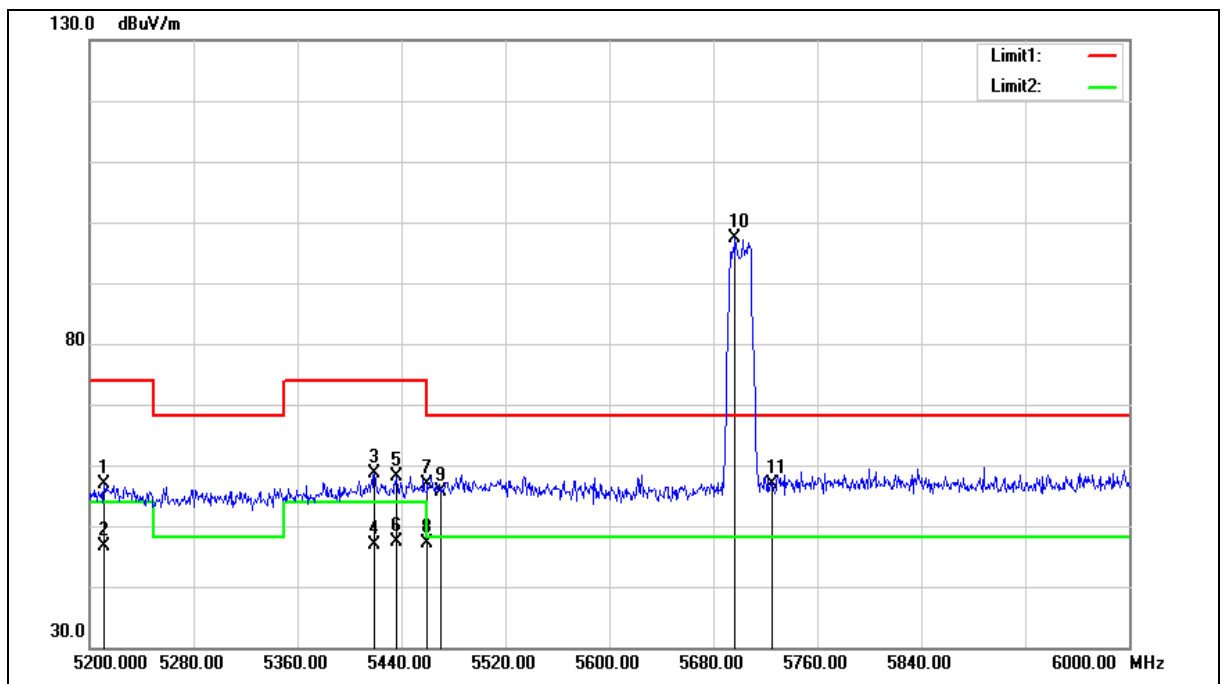

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	49.65	7.11	56.76	74.00	-17.24	peak
2	5211.200	39.53	7.11	46.64	54.00	-7.36	AVG
3	5419.200	50.94	7.70	58.64	74.00	-15.36	peak
4	5419.200	39.30	7.70	47.00	54.00	-7.00	AVG
5	5436.000	50.48	7.75	58.23	74.00	-15.77	peak
6	5436.000	39.58	7.75	47.33	54.00	-6.67	AVG
7	5460.000	48.94	7.82	56.76	74.00	-17.24	peak
8	5460.000	39.39	7.82	47.21	54.00	-6.79	AVG
9	5470.000	47.86	7.85	55.71	68.20	-12.49	peak
10	5696.800	89.15	8.33	97.48	--	--	peak
11	5725.000	48.53	8.39	56.92	68.20	-11.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

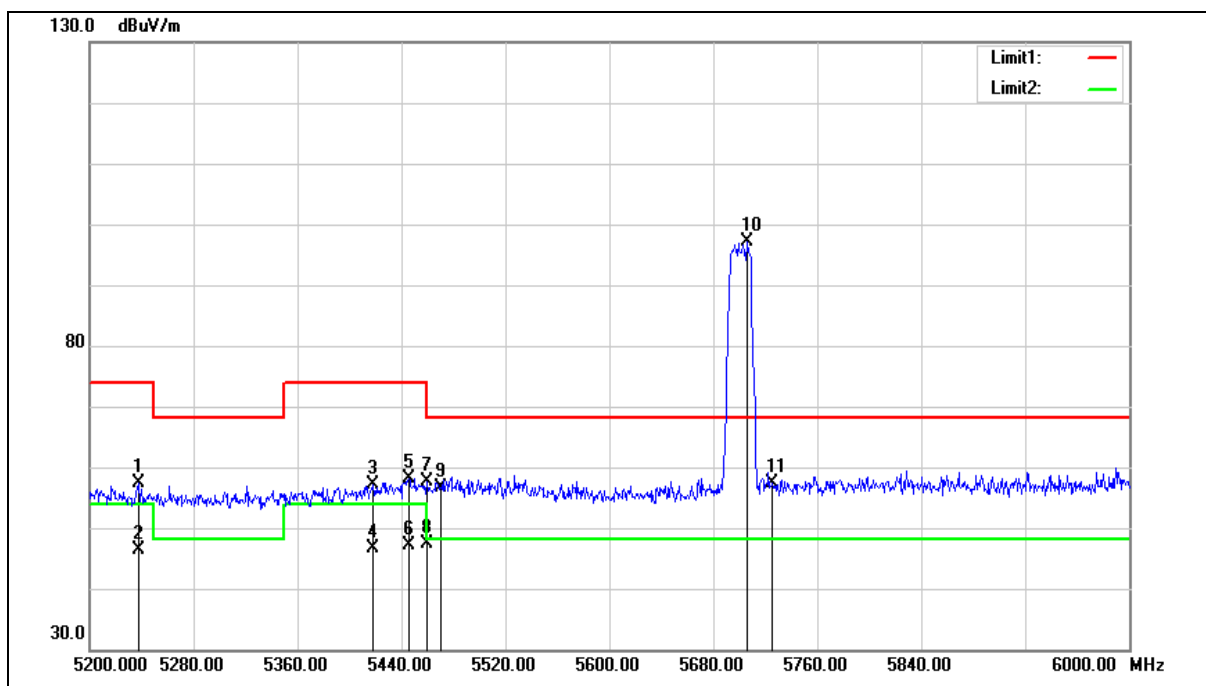

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5237.600	50.18	7.19	57.37	74.00	-16.63	peak
2	5237.600	39.31	7.19	46.50	54.00	-7.50	AVG
3	5418.400	49.52	7.70	57.22	74.00	-16.78	peak
4	5418.400	39.01	7.70	46.71	54.00	-7.29	AVG
5	5445.600	50.27	7.78	58.05	74.00	-15.95	peak
6	5445.600	39.31	7.78	47.09	54.00	-6.91	AVG
7	5460.000	49.86	7.82	57.68	74.00	-16.32	peak
8	5460.000	39.47	7.82	47.29	54.00	-6.71	AVG
9	5470.000	48.80	7.85	56.65	68.20	-11.55	peak
10	5706.400	88.71	8.35	97.06	--	--	peak
11	5725.000	48.90	8.39	57.29	68.20	-10.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

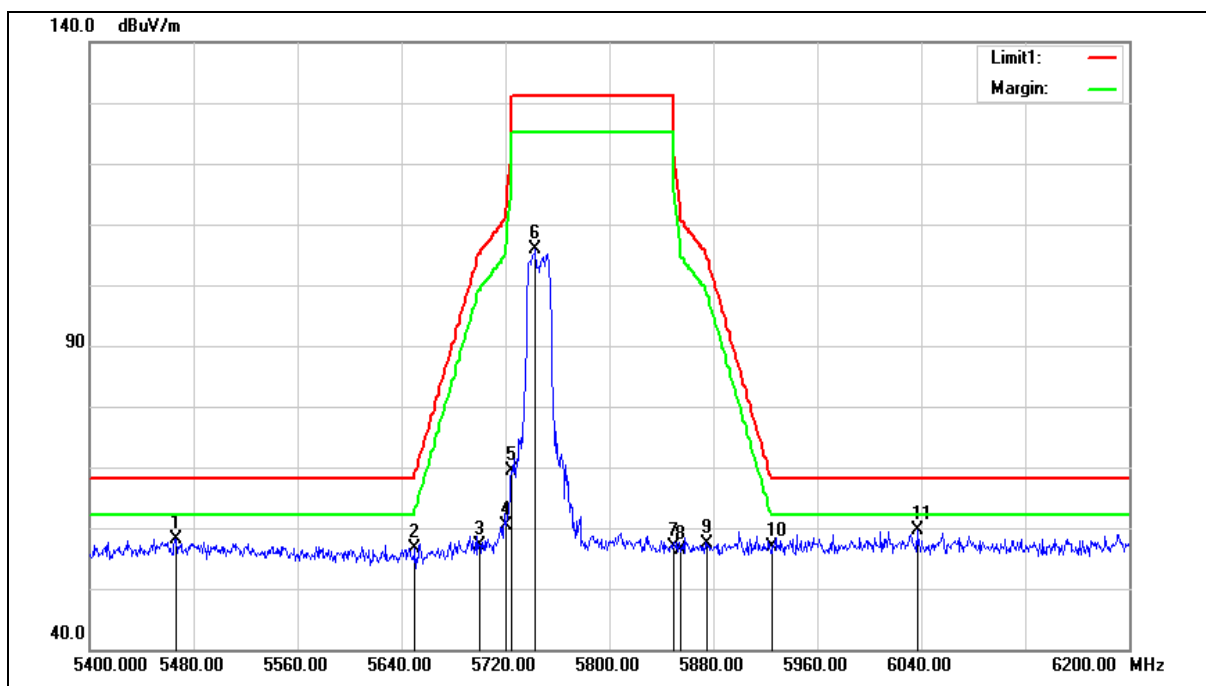

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5466.400	50.40	7.84	58.24	68.20	-9.96	peak
2	5650.000	48.48	8.24	56.72	68.20	-11.48	peak
3	5700.000	48.85	8.34	57.19	105.20	-48.01	peak
4	5720.000	52.10	8.38	60.48	110.80	-50.32	peak
5	5725.000	61.07	8.39	69.46	122.20	-52.74	peak
6	5743.200	97.38	8.42	105.80	--	--	peak
7	5850.000	48.34	8.63	56.97	122.20	-65.23	peak
8	5855.000	47.68	8.64	56.32	110.80	-54.48	peak
9	5875.000	48.73	8.69	57.42	105.20	-47.78	peak
10	5925.000	47.99	8.79	56.78	68.20	-11.42	peak
11	6036.800	50.55	9.05	59.60	68.20	-8.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

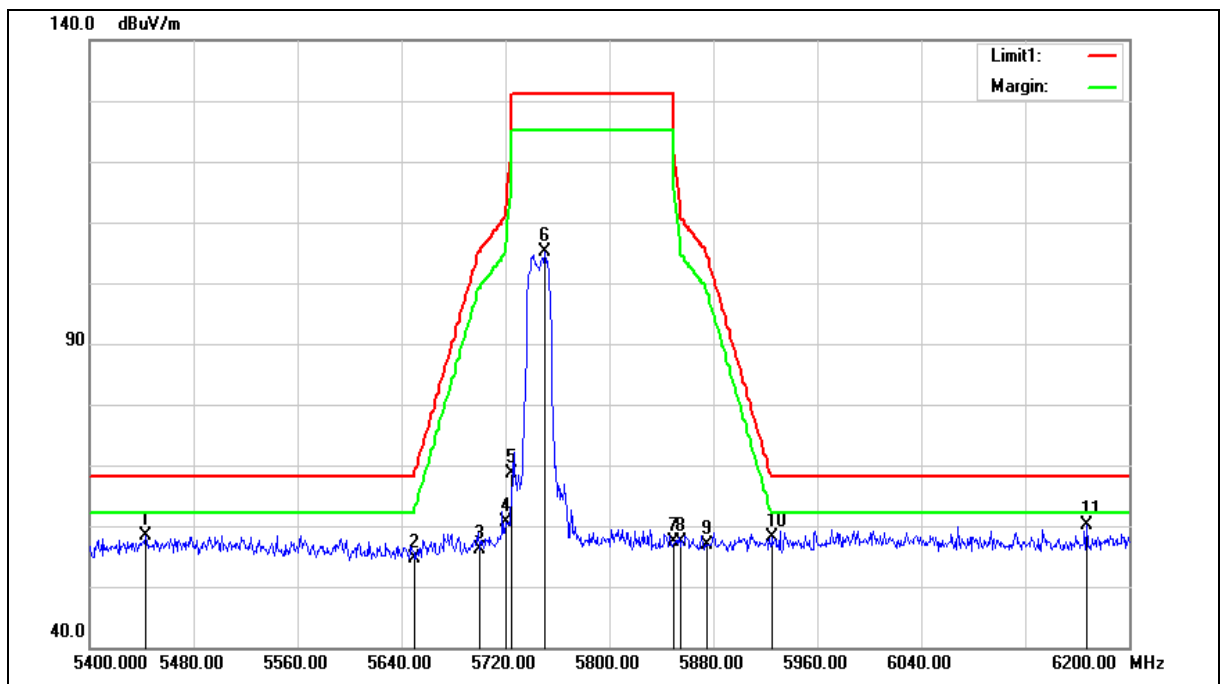

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.200	50.65	7.77	58.42	68.20	-9.78	peak
2	5650.000	46.50	8.24	54.74	68.20	-13.46	peak
3	5700.000	47.81	8.34	56.15	105.20	-49.05	peak
4	5720.000	52.24	8.38	60.62	110.80	-50.18	peak
5	5725.000	60.22	8.39	68.61	122.20	-53.59	peak
6	5750.400	96.70	8.44	105.14	--	--	peak
7	5850.000	48.68	8.63	57.31	122.20	-64.89	peak
8	5855.000	48.76	8.64	57.40	110.80	-53.40	peak
9	5875.000	48.22	8.69	56.91	105.20	-48.29	peak
10	5925.000	49.27	8.79	58.06	68.20	-10.14	peak
11	6167.200	50.61	9.44	60.05	68.20	-8.15	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

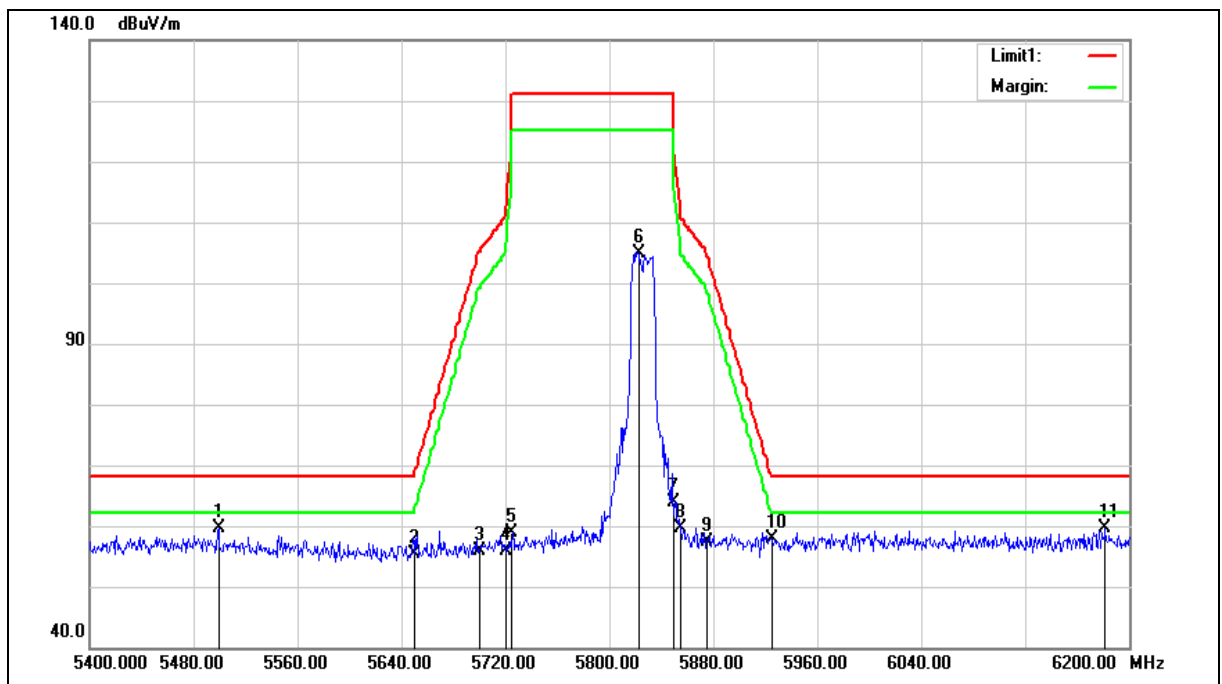

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5499.200	51.75	7.93	59.68	68.20	-8.52	peak
2	5650.000	47.18	8.24	55.42	68.20	-12.78	peak
3	5700.000	47.64	8.34	55.98	105.20	-49.22	peak
4	5720.000	47.60	8.38	55.98	110.80	-54.82	peak
5	5725.000	50.57	8.39	58.96	122.20	-63.24	peak
6	5822.400	96.36	8.58	104.94	--	--	peak
7	5850.000	55.31	8.63	63.94	122.20	-58.26	peak
8	5855.000	50.94	8.64	59.58	110.80	-51.22	peak
9	5875.000	48.69	8.69	57.38	105.20	-47.82	peak
10	5925.000	48.97	8.79	57.76	68.20	-10.44	peak
11	6181.600	50.12	9.48	59.60	68.20	-8.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

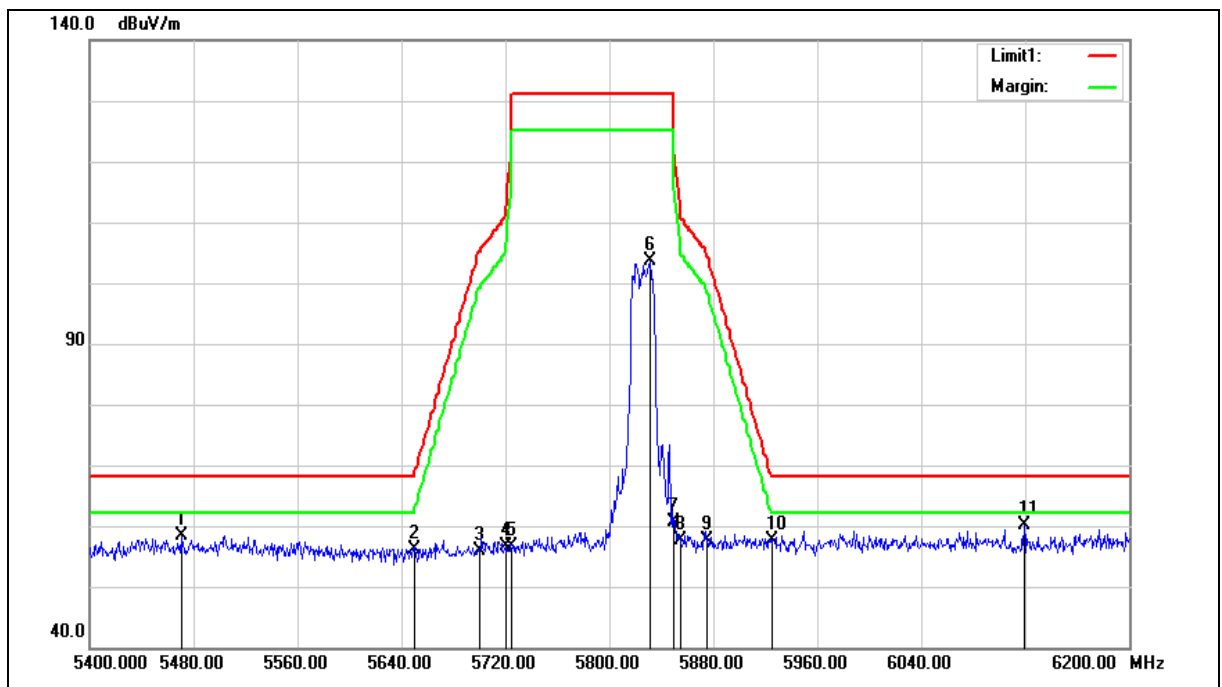

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.400	50.47	7.85	58.32	68.20	-9.88	peak
2	5650.000	47.90	8.24	56.14	68.20	-12.06	peak
3	5700.000	47.46	8.34	55.80	105.20	-49.40	peak
4	5720.000	48.16	8.38	56.54	110.80	-54.26	peak
5	5725.000	48.24	8.39	56.63	122.20	-65.57	peak
6	5831.200	94.97	8.59	103.56	--	--	peak
7	5850.000	52.10	8.63	60.73	122.20	-61.47	peak
8	5855.000	49.07	8.64	57.71	110.80	-53.09	peak
9	5875.000	49.01	8.69	57.70	105.20	-47.50	peak
10	5925.000	48.78	8.79	57.57	68.20	-10.63	peak
11	6119.200	50.72	9.30	60.02	68.20	-8.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

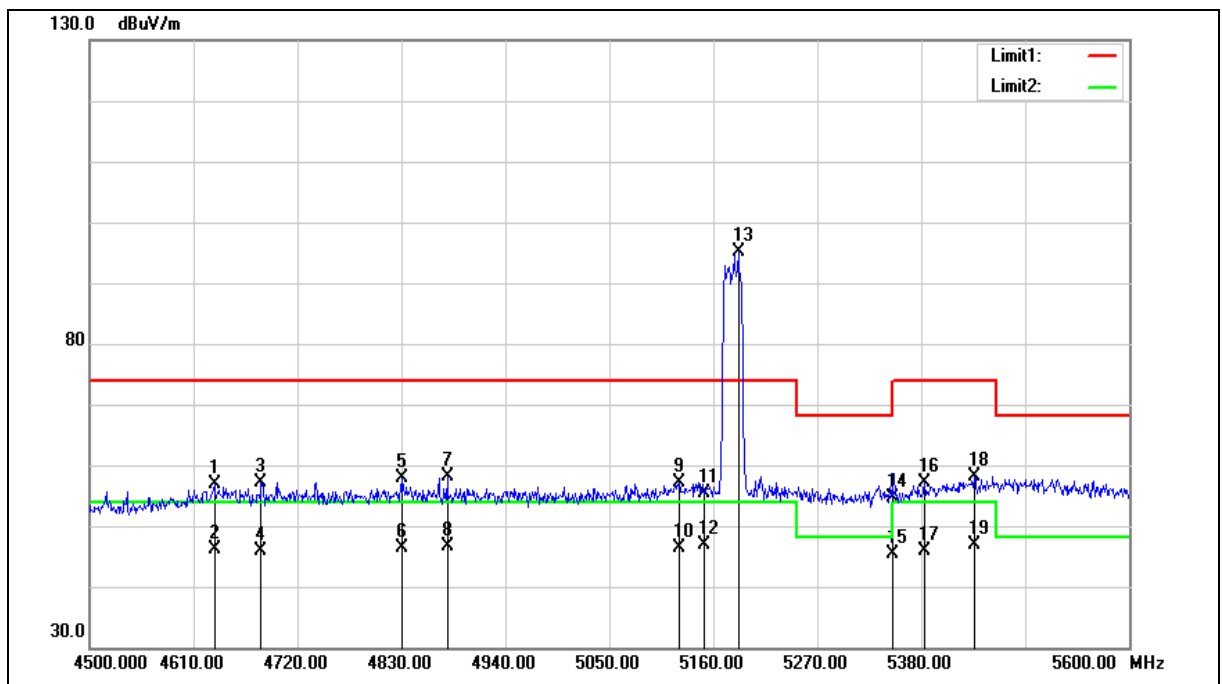

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.000	51.50	5.38	56.88	74.00	-17.12	peak
2	4632.000	40.67	5.38	46.05	54.00	-7.95	AVG
3	4681.500	51.65	5.54	57.19	74.00	-16.81	peak
4	4681.500	40.34	5.54	45.88	54.00	-8.12	AVG
5	4831.100	51.92	5.99	57.91	74.00	-16.09	peak
6	4831.100	40.33	5.99	46.32	54.00	-7.68	AVG
7	4878.400	51.88	6.13	58.01	74.00	-15.99	peak
8	4878.400	40.44	6.13	46.57	54.00	-7.43	AVG
9	5123.700	50.21	6.85	57.06	74.00	-16.94	peak
10	5123.700	39.41	6.85	46.26	54.00	-7.74	AVG
11	5150.000	48.36	6.94	55.30	74.00	-18.70	peak
12	5150.000	39.85	6.94	46.79	54.00	-7.21	AVG
13	5186.400	87.98	7.05	95.03	--	--	peak
14	5350.000	47.05	7.50	54.55	74.00	-19.45	peak
15	5350.000	37.98	7.50	45.48	54.00	-8.52	AVG
16	5383.300	49.52	7.60	57.12	74.00	-16.88	peak
17	5383.300	38.37	7.60	45.97	54.00	-8.03	AVG
18	5436.100	50.45	7.75	58.20	74.00	-15.80	peak
19	5436.100	39.14	7.75	46.89	54.00	-7.11	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

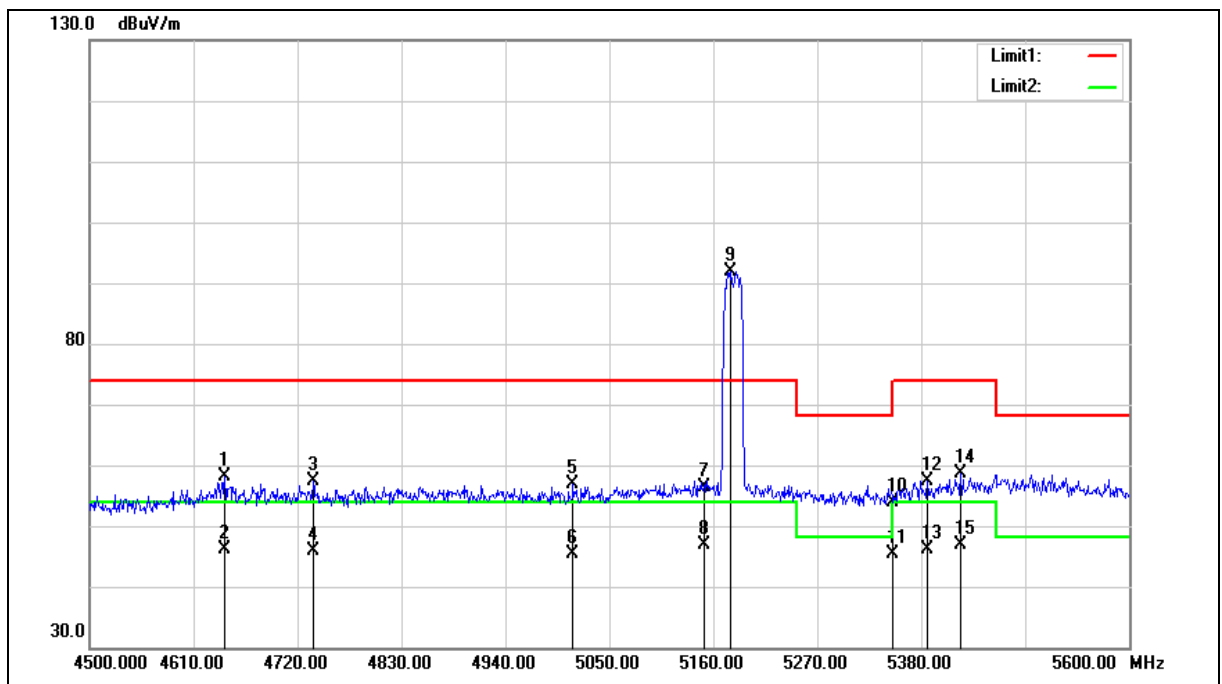

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.000	52.76	5.41	58.17	74.00	-15.83	peak
2	4643.000	40.61	5.41	46.02	54.00	-7.98	AVG
3	4736.500	51.61	5.71	57.32	74.00	-16.68	peak
4	4736.500	40.18	5.71	45.89	54.00	-8.11	AVG
5	5011.500	50.24	6.54	56.78	74.00	-17.22	peak
6	5011.500	38.93	6.54	45.47	54.00	-8.53	AVG
7	5150.000	49.32	6.94	56.26	74.00	-17.74	peak
8	5150.000	39.87	6.94	46.81	54.00	-7.19	AVG
9	5178.700	84.96	7.02	91.98	--	--	peak
10	5350.000	46.36	7.50	53.86	74.00	-20.14	peak
11	5350.000	37.79	7.50	45.29	54.00	-8.71	AVG
12	5386.600	49.85	7.62	57.47	74.00	-16.53	peak
13	5386.600	38.47	7.62	46.09	54.00	-7.91	AVG
14	5421.800	50.96	7.71	58.67	74.00	-15.33	peak
15	5421.800	39.25	7.71	46.96	54.00	-7.04	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

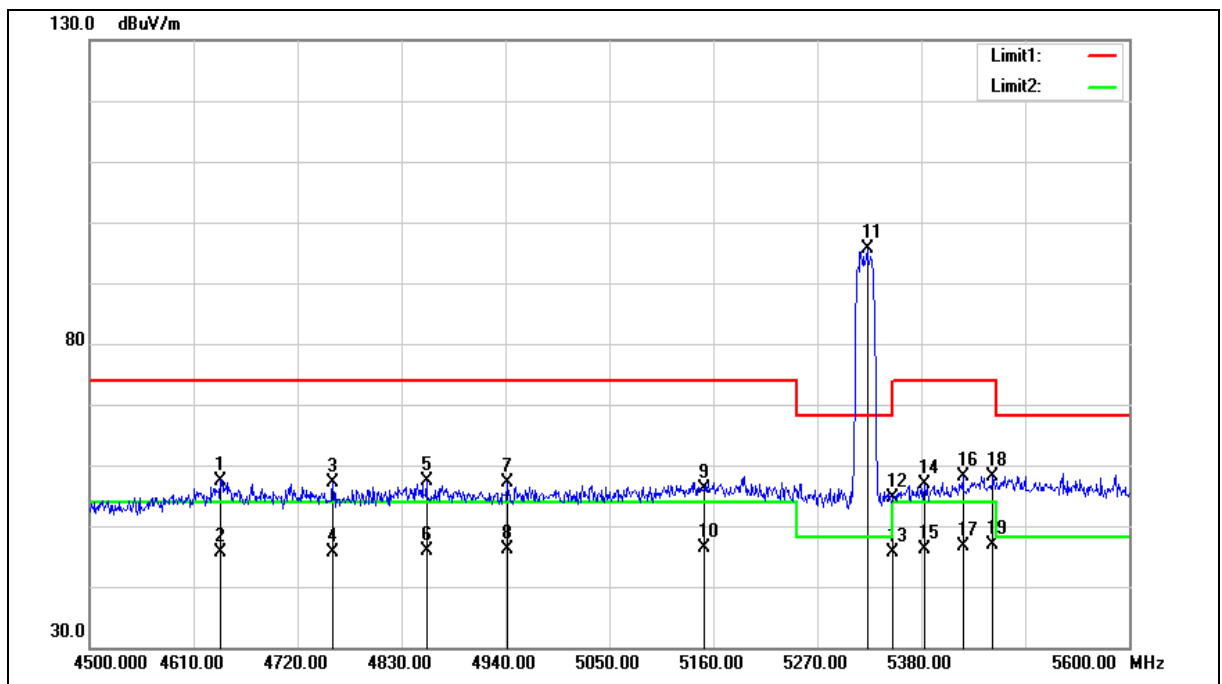

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	52.10	5.40	57.50	74.00	-16.50	peak
2	4638.600	40.24	5.40	45.64	54.00	-8.36	AVG
3	4757.400	51.35	5.77	57.12	74.00	-16.88	peak
4	4757.400	39.85	5.77	45.62	54.00	-8.38	AVG
5	4856.400	51.25	6.07	57.32	74.00	-16.68	peak
6	4856.400	39.82	6.07	45.89	54.00	-8.11	AVG
7	4942.200	50.90	6.33	57.23	74.00	-16.77	peak
8	4942.200	39.92	6.33	46.25	54.00	-7.75	AVG
9	5150.000	49.12	6.94	56.06	74.00	-17.94	peak
10	5150.000	39.54	6.94	46.48	54.00	-7.52	AVG
11	5322.800	88.21	7.42	95.63	--	--	peak
12	5350.000	47.16	7.50	54.66	74.00	-19.34	peak
13	5350.000	38.14	7.50	45.64	54.00	-8.36	AVG
14	5383.300	49.33	7.60	56.93	74.00	-17.07	peak
15	5383.300	38.54	7.60	46.14	54.00	-7.86	AVG
16	5424.000	50.45	7.71	58.16	74.00	-15.84	peak
17	5424.000	38.86	7.71	46.57	54.00	-7.43	AVG
18	5455.900	50.35	7.81	58.16	74.00	-15.84	peak
19	5455.900	39.03	7.81	46.84	54.00	-7.16	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

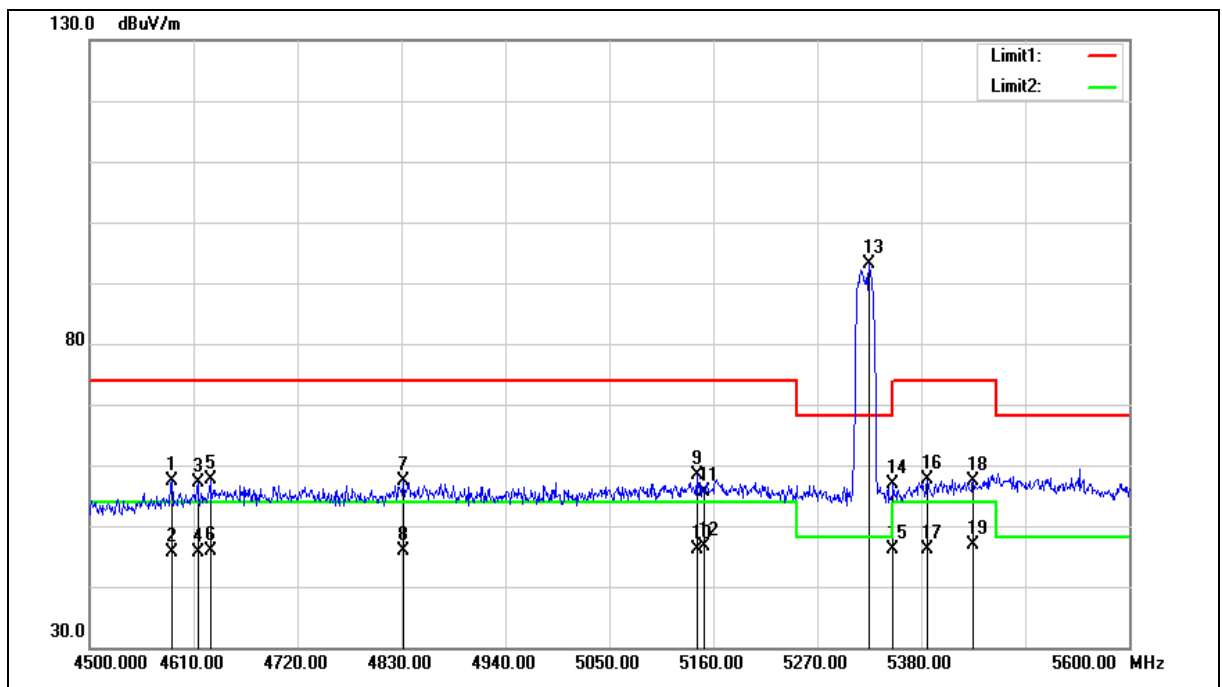

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4586.900	52.09	5.24	57.33	74.00	-16.67	peak
2	4586.900	40.31	5.24	45.55	54.00	-8.45	AVG
3	4614.400	51.90	5.33	57.23	74.00	-16.77	peak
4	4614.400	40.29	5.33	45.62	54.00	-8.38	AVG
5	4627.600	52.31	5.37	57.68	74.00	-16.32	peak
6	4627.600	40.60	5.37	45.97	54.00	-8.03	AVG
7	4832.200	51.27	5.99	57.26	74.00	-16.74	peak
8	4832.200	39.81	5.99	45.80	54.00	-8.20	AVG
9	5142.400	51.36	6.92	58.28	74.00	-15.72	peak
10	5142.400	39.24	6.92	46.16	54.00	-7.84	AVG
11	5150.000	48.62	6.94	55.56	74.00	-18.44	peak
12	5150.000	39.74	6.94	46.68	54.00	-7.32	AVG
13	5325.000	85.73	7.44	93.17	--	--	peak
14	5350.000	49.26	7.50	56.76	74.00	-17.24	peak
15	5350.000	38.60	7.50	46.10	54.00	-7.90	AVG
16	5386.600	49.90	7.62	57.52	74.00	-16.48	peak
17	5386.600	38.60	7.62	46.22	54.00	-7.78	AVG
18	5435.000	49.61	7.75	57.36	74.00	-16.64	peak
19	5435.000	39.21	7.75	46.96	54.00	-7.04	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

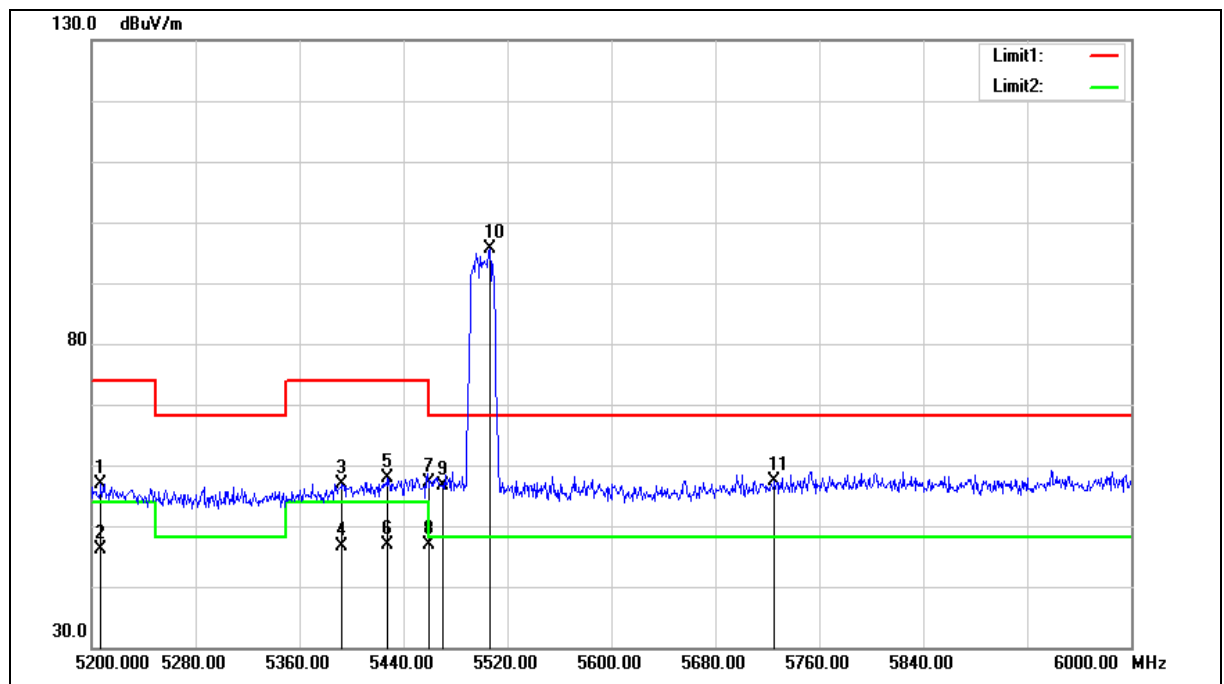

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	49.77	7.10	56.87	74.00	-17.13	peak
2	5207.200	39.13	7.10	46.23	54.00	-7.77	AVG
3	5392.800	49.30	7.63	56.93	74.00	-17.07	peak
4	5392.800	38.93	7.63	46.56	54.00	-7.44	AVG
5	5428.000	50.04	7.73	57.77	74.00	-16.23	peak
6	5428.000	39.15	7.73	46.88	54.00	-7.12	AVG
7	5460.000	49.19	7.82	57.01	74.00	-16.99	peak
8	5460.000	39.00	7.82	46.82	54.00	-7.18	AVG
9	5470.000	48.88	7.85	56.73	68.20	-11.47	peak
10	5506.400	87.59	7.95	95.54	--	--	peak
11	5725.000	48.87	8.39	57.26	68.20	-10.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

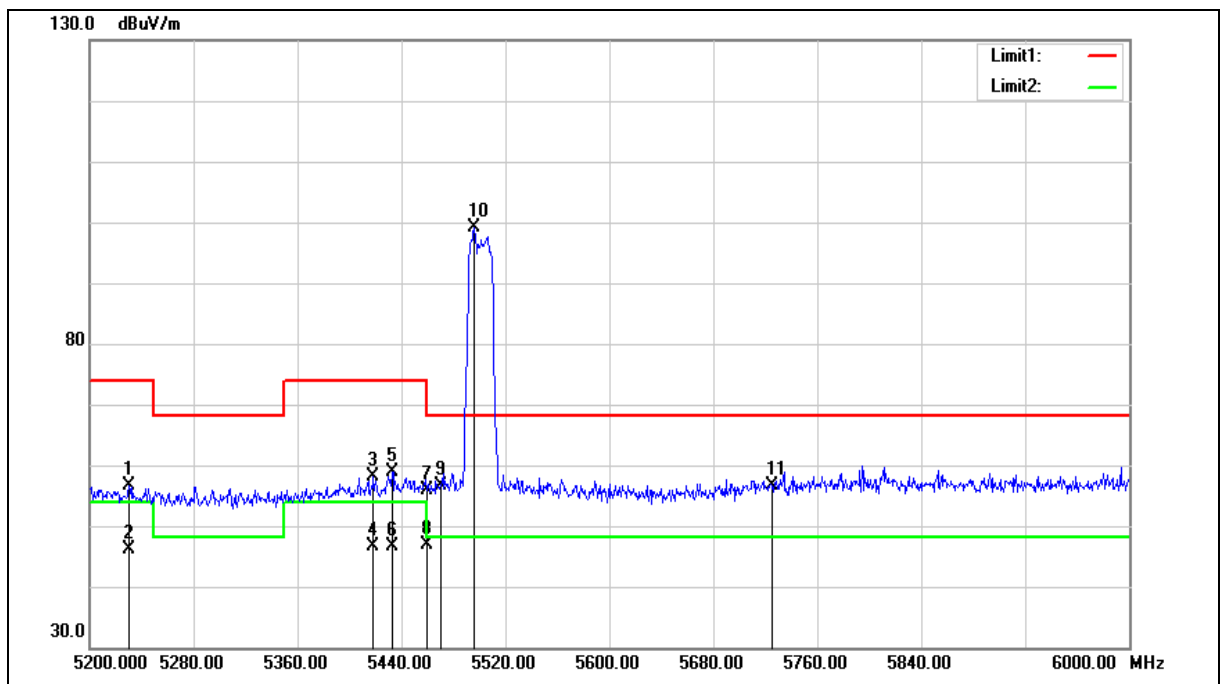

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5230.400	49.57	7.16	56.73	74.00	-17.27	peak
2	5230.400	38.86	7.16	46.02	54.00	-7.98	AVG
3	5418.400	50.38	7.70	58.08	74.00	-15.92	peak
4	5418.400	38.85	7.70	46.55	54.00	-7.45	AVG
5	5432.800	51.15	7.74	58.89	74.00	-15.11	peak
6	5432.800	38.97	7.74	46.71	54.00	-7.29	AVG
7	5460.000	47.96	7.82	55.78	74.00	-18.22	peak
8	5460.000	39.10	7.82	46.92	54.00	-7.08	AVG
9	5470.000	48.84	7.85	56.69	68.20	-11.51	peak
10	5496.000	91.13	7.92	99.05	--	--	peak
11	5725.000	48.34	8.39	56.73	68.20	-11.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

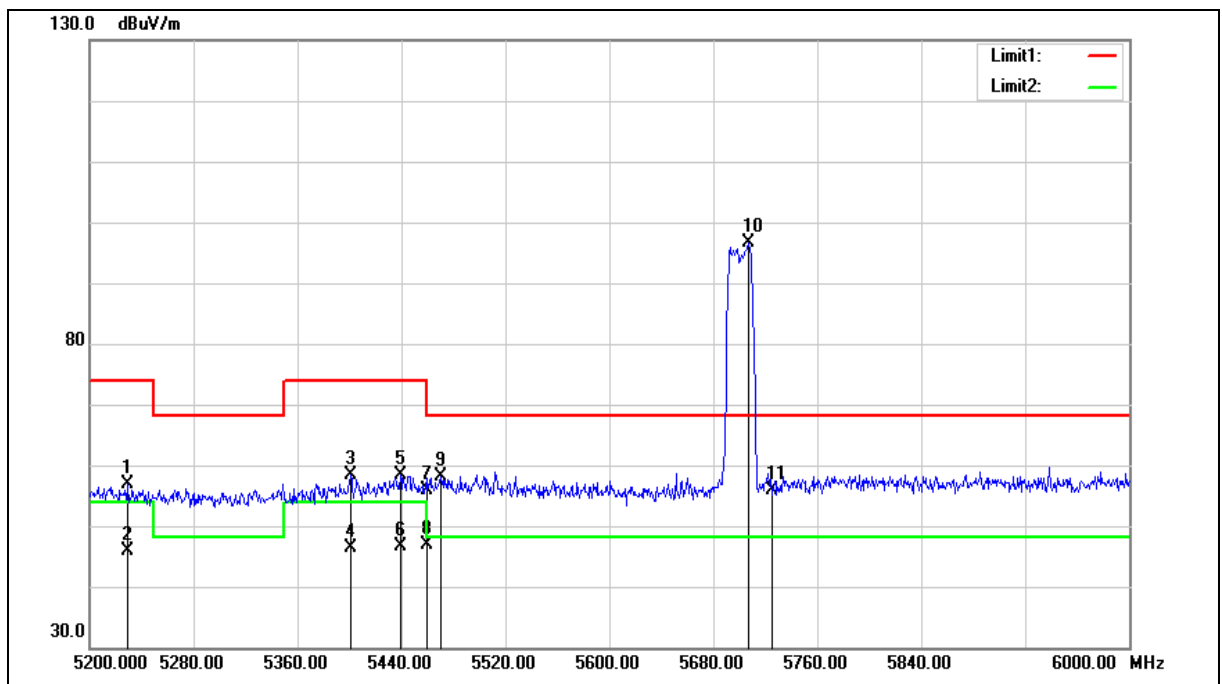

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5229.600	49.68	7.16	56.84	74.00	-17.16	peak
2	5229.600	38.83	7.16	45.99	54.00	-8.01	AVG
3	5400.800	50.73	7.65	58.38	74.00	-15.62	peak
4	5400.800	38.75	7.65	46.40	54.00	-7.60	AVG
5	5439.200	50.53	7.76	58.29	74.00	-15.71	peak
6	5439.200	38.95	7.76	46.71	54.00	-7.29	AVG
7	5460.000	48.10	7.82	55.92	74.00	-18.08	peak
8	5460.000	39.10	7.82	46.92	54.00	-7.08	AVG
9	5470.000	50.17	7.85	58.02	68.20	-10.18	peak
10	5707.200	88.26	8.35	96.61	--	--	peak
11	5725.000	47.61	8.39	56.00	68.20	-12.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

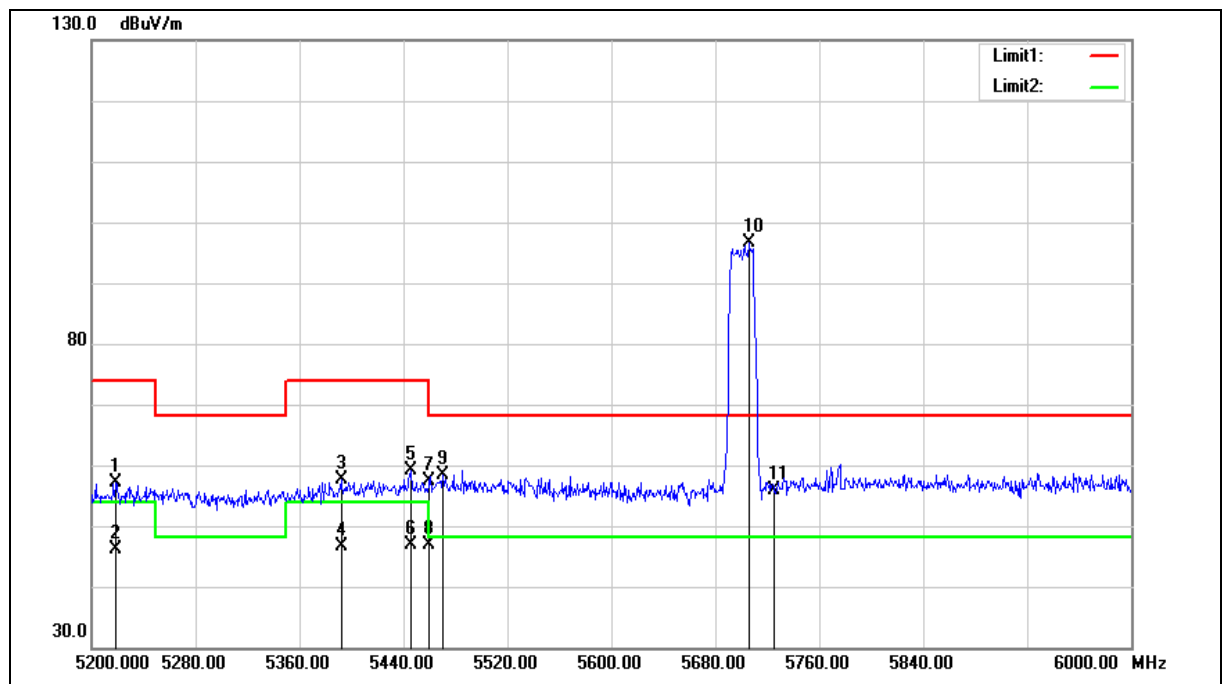

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5218.400	49.88	7.13	57.01	74.00	-16.99	peak
2	5218.400	38.98	7.13	46.11	54.00	-7.89	AVG
3	5392.000	49.94	7.63	57.57	74.00	-16.43	peak
4	5392.000	38.89	7.63	46.52	54.00	-7.48	AVG
5	5445.600	51.34	7.78	59.12	74.00	-14.88	peak
6	5445.600	39.18	7.78	46.96	54.00	-7.04	AVG
7	5460.000	49.53	7.82	57.35	74.00	-16.65	peak
8	5460.000	39.07	7.82	46.89	54.00	-7.11	AVG
9	5470.000	50.64	7.85	58.49	68.20	-9.71	peak
10	5705.600	88.31	8.35	96.66	--	--	peak
11	5725.000	47.48	8.39	55.87	68.20	-12.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

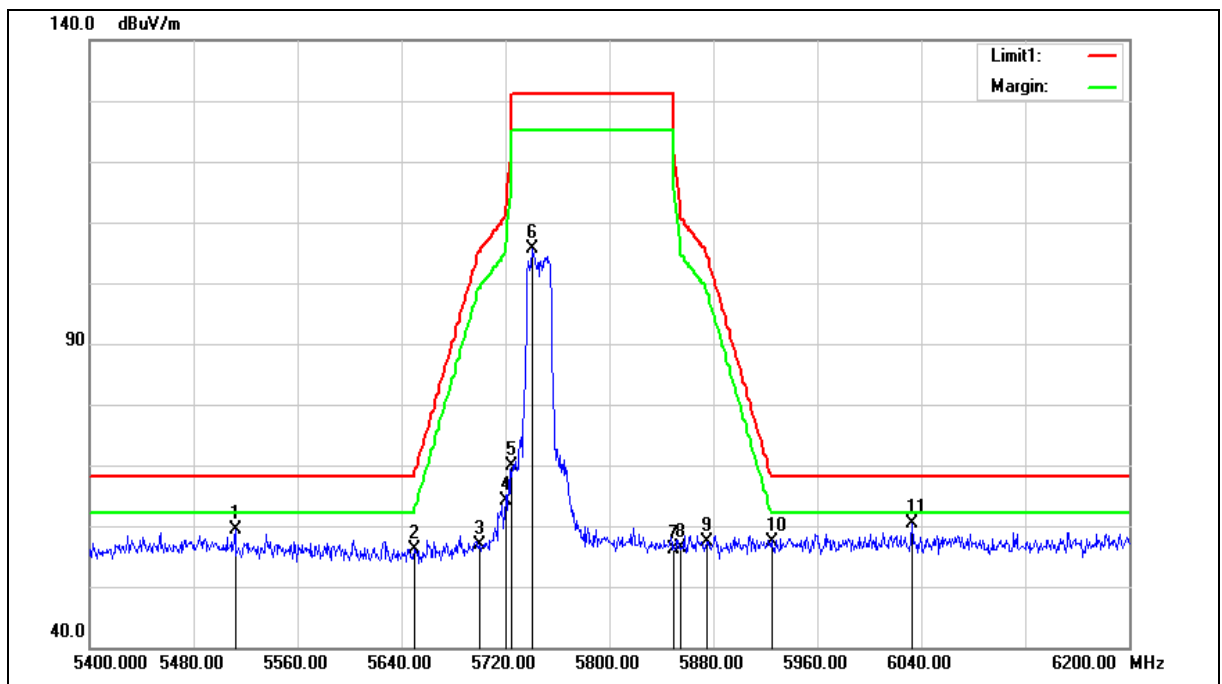

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5512.000	51.46	7.95	59.41	68.20	-8.79	peak
2	5650.000	47.81	8.24	56.05	68.20	-12.15	peak
3	5700.000	48.63	8.34	56.97	105.20	-48.23	peak
4	5720.000	55.63	8.38	64.01	110.80	-46.79	peak
5	5725.000	61.39	8.39	69.78	122.20	-52.42	peak
6	5740.800	97.10	8.42	105.52	--	--	peak
7	5850.000	47.46	8.63	56.09	122.20	-66.11	peak
8	5855.000	47.62	8.64	56.26	110.80	-54.54	peak
9	5875.000	48.63	8.69	57.32	105.20	-47.88	peak
10	5925.000	48.50	8.79	57.29	68.20	-10.91	peak
11	6032.800	51.47	9.03	60.50	68.20	-7.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

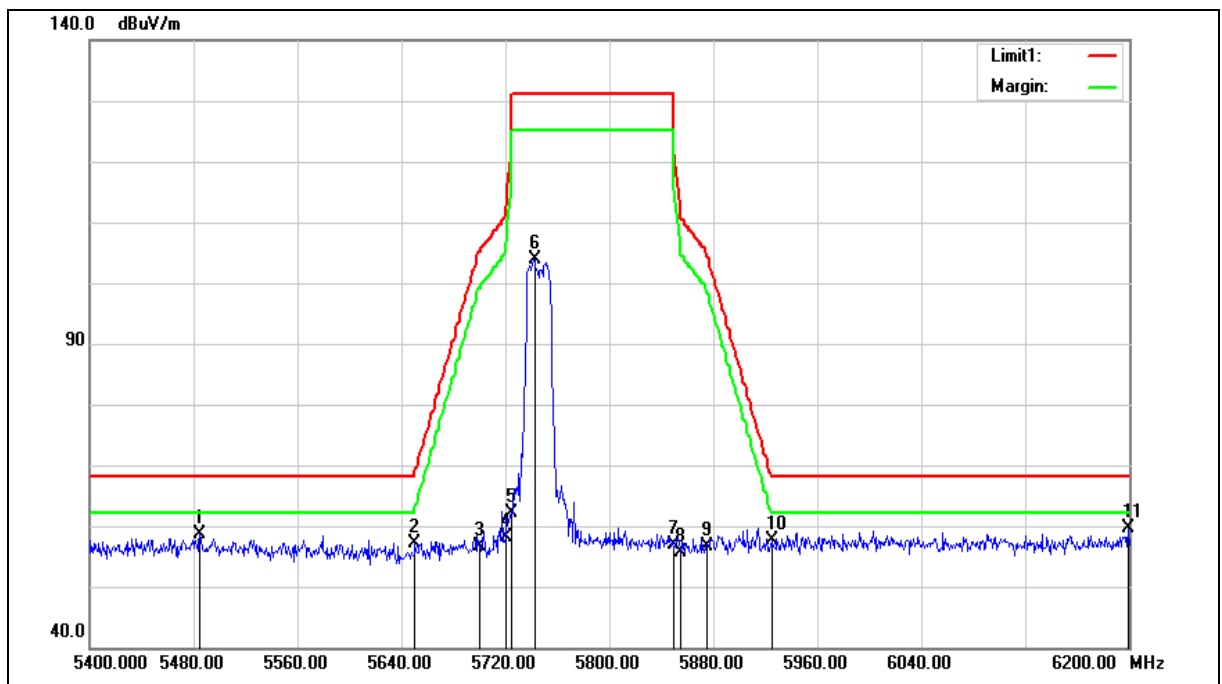

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5484.800	50.68	7.88	58.56	68.20	-9.64	peak
2	5650.000	48.82	8.24	57.06	68.20	-11.14	peak
3	5700.000	48.34	8.34	56.68	105.20	-48.52	peak
4	5720.000	49.68	8.38	58.06	110.80	-52.74	peak
5	5725.000	53.82	8.39	62.21	122.20	-59.99	peak
6	5742.400	95.54	8.42	103.96	--	--	peak
7	5850.000	48.32	8.63	56.95	122.20	-65.25	peak
8	5855.000	46.99	8.64	55.63	110.80	-55.17	peak
9	5875.000	47.98	8.69	56.67	105.20	-48.53	peak
10	5925.000	48.89	8.79	57.68	68.20	-10.52	peak
11	6199.200	50.11	9.53	59.64	68.20	-8.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

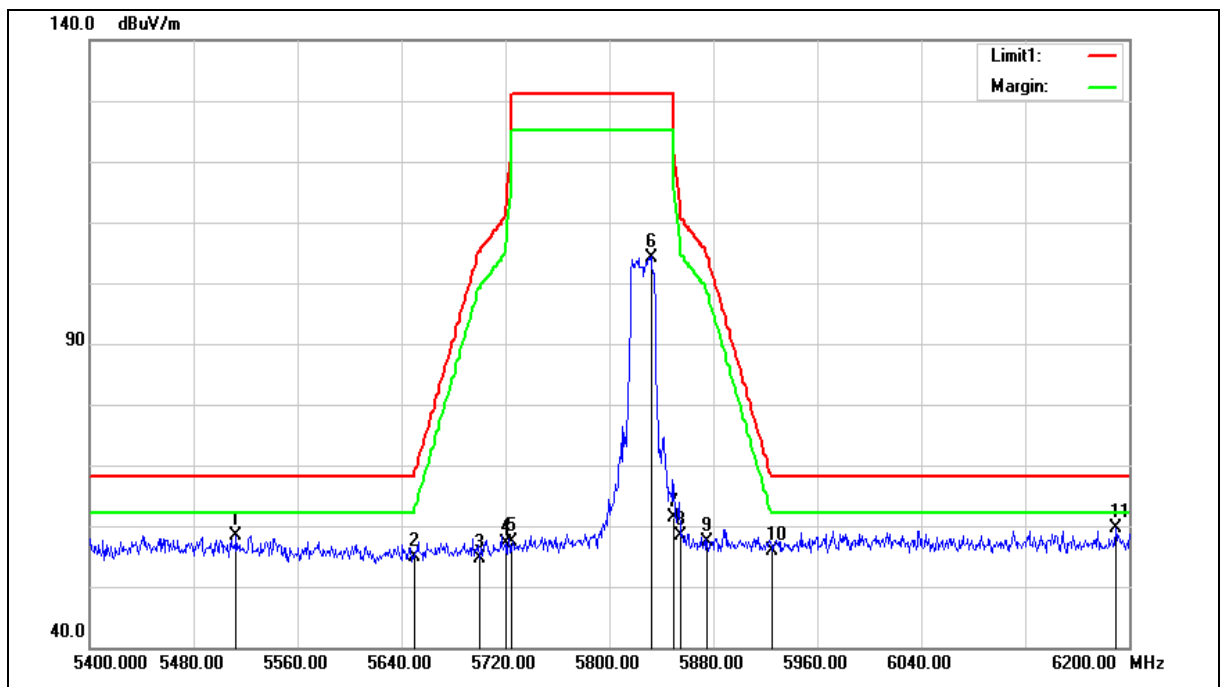

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5512.800	50.54	7.95	58.49	68.20	-9.71	peak
2	5650.000	46.68	8.24	54.92	68.20	-13.28	peak
3	5700.000	46.40	8.34	54.74	105.20	-50.46	peak
4	5720.000	48.85	8.38	57.23	110.80	-53.57	peak
5	5725.000	48.99	8.39	57.38	122.20	-64.82	peak
6	5832.000	95.65	8.60	104.25	--	--	peak
7	5850.000	52.71	8.63	61.34	122.20	-60.86	peak
8	5855.000	49.68	8.64	58.32	110.80	-52.48	peak
9	5875.000	48.66	8.69	57.35	105.20	-47.85	peak
10	5925.000	47.11	8.79	55.90	68.20	-12.30	peak
11	6189.600	50.23	9.51	59.74	68.20	-8.46	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

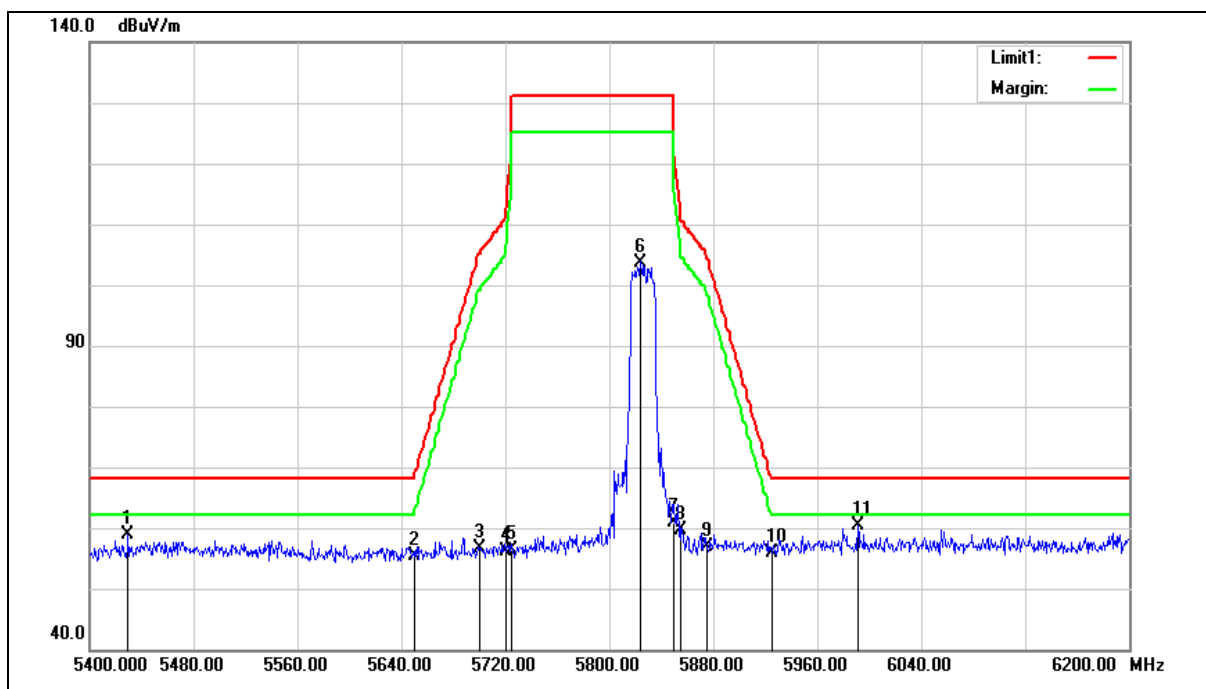

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.600	51.03	7.73	58.76	68.20	-9.44	peak
2	5650.000	47.16	8.24	55.40	68.20	-12.80	peak
3	5700.000	48.40	8.34	56.74	105.20	-48.46	peak
4	5720.000	47.83	8.38	56.21	110.80	-54.59	peak
5	5725.000	48.06	8.39	56.45	122.20	-65.75	peak
6	5824.000	95.17	8.58	103.75	--	--	peak
7	5850.000	52.13	8.63	60.76	122.20	-61.44	peak
8	5855.000	50.97	8.64	59.61	110.80	-51.19	peak
9	5875.000	48.23	8.69	56.92	105.20	-48.28	peak
10	5925.000	47.18	8.79	55.97	68.20	-12.23	peak
11	5991.200	51.52	8.92	60.44	68.20	-7.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

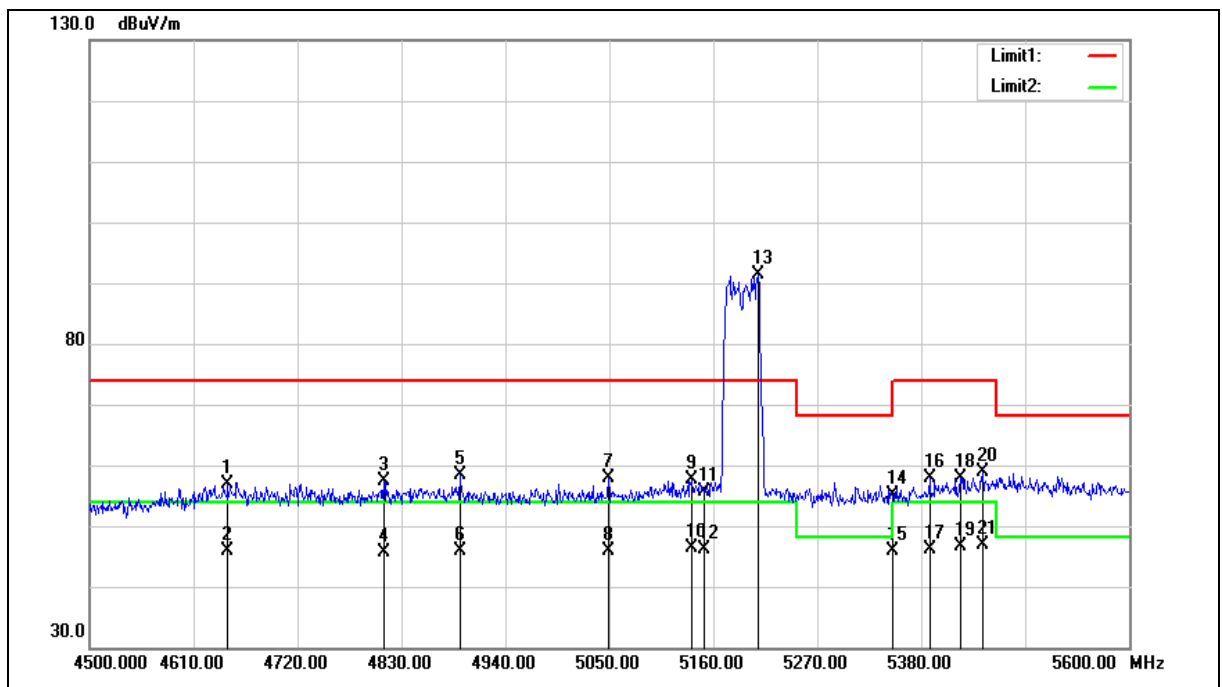

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4646.300	51.46	5.42	56.88	74.00	-17.12	peak
2	4646.300	40.45	5.42	45.87	54.00	-8.13	AVG
3	4811.300	51.53	5.93	57.46	74.00	-16.54	peak
4	4811.300	39.82	5.93	45.75	54.00	-8.25	AVG
5	4891.600	52.21	6.17	58.38	74.00	-15.62	peak
6	4891.600	39.75	6.17	45.92	54.00	-8.08	AVG
7	5048.900	51.11	6.65	57.76	74.00	-16.24	peak
8	5048.900	39.17	6.65	45.82	54.00	-8.18	AVG
9	5136.900	50.75	6.91	57.66	74.00	-16.34	peak
10	5136.900	39.35	6.91	46.26	54.00	-7.74	AVG
11	5150.000	48.60	6.94	55.54	74.00	-18.46	peak
12	5150.000	39.08	6.94	46.02	54.00	-7.98	AVG
13	5207.300	84.18	7.10	91.28	--	--	peak
14	5350.000	47.68	7.50	55.18	74.00	-18.82	peak
15	5350.000	38.36	7.50	45.86	54.00	-8.14	AVG
16	5388.800	50.22	7.62	57.84	74.00	-16.16	peak
17	5388.800	38.44	7.62	46.06	54.00	-7.94	AVG
18	5421.800	50.17	7.71	57.88	74.00	-16.12	peak
19	5421.800	38.84	7.71	46.55	54.00	-7.45	AVG
20	5444.900	51.11	7.77	58.88	74.00	-15.12	peak
21	5444.900	39.05	7.77	46.82	54.00	-7.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

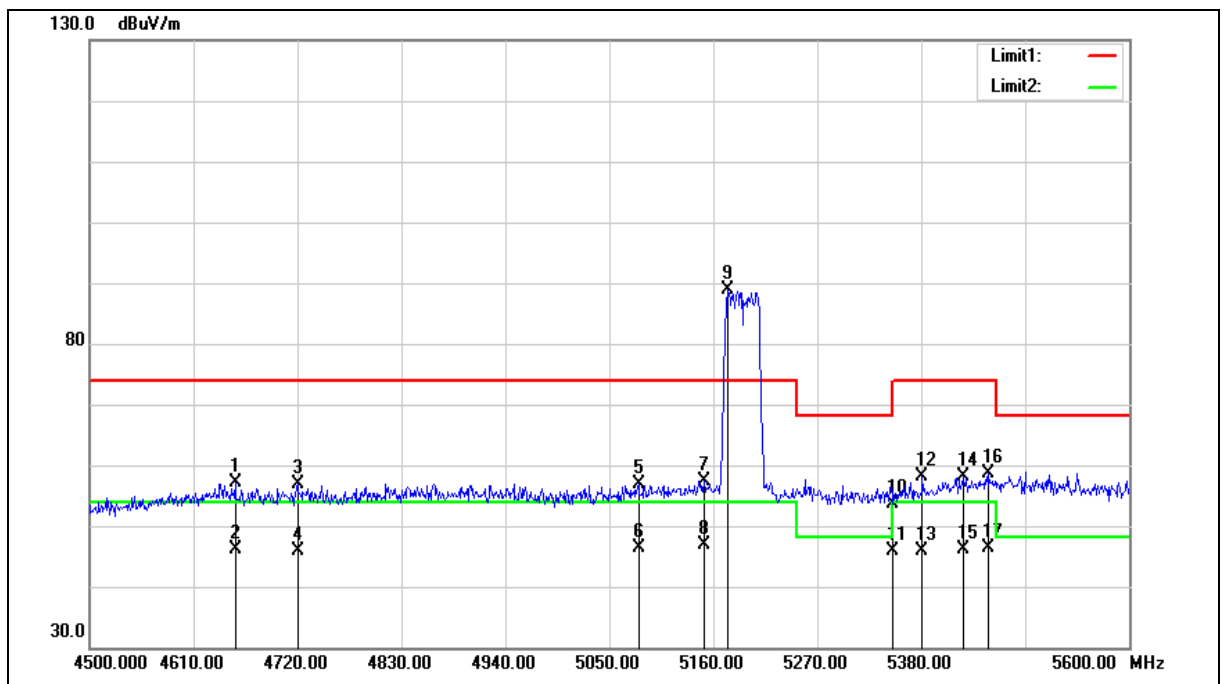

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4654.000	51.69	5.45	57.14	74.00	-16.86	peak
2	4654.000	40.61	5.45	46.06	54.00	-7.94	AVG
3	4720.000	51.22	5.65	56.87	74.00	-17.13	peak
4	4720.000	40.33	5.65	45.98	54.00	-8.02	AVG
5	5080.800	50.16	6.74	56.90	74.00	-17.10	peak
6	5080.800	39.59	6.74	46.33	54.00	-7.67	AVG
7	5150.000	50.32	6.94	57.26	74.00	-16.74	peak
8	5150.000	39.97	6.94	46.91	54.00	-7.09	AVG
9	5175.400	81.74	7.02	88.76	--	--	peak
10	5350.000	46.04	7.50	53.54	74.00	-20.46	peak
11	5350.000	38.37	7.50	45.87	54.00	-8.13	AVG
12	5381.100	50.45	7.60	58.05	74.00	-15.95	peak
13	5381.100	38.28	7.60	45.88	54.00	-8.12	AVG
14	5425.100	50.32	7.73	58.05	74.00	-15.95	peak
15	5425.100	38.29	7.73	46.02	54.00	-7.98	AVG
16	5451.500	50.82	7.79	58.61	74.00	-15.39	peak
17	5451.500	38.66	7.79	46.45	54.00	-7.55	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

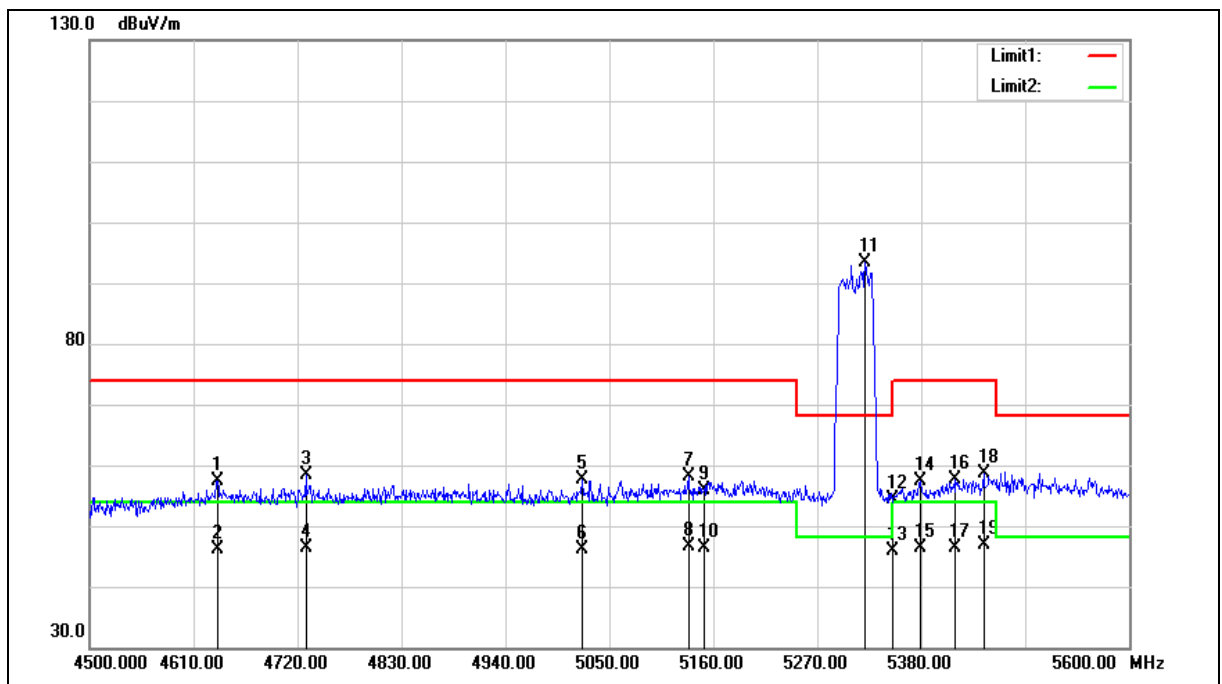

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	52.08	5.39	57.47	74.00	-16.53	peak
2	4635.300	40.69	5.39	46.08	54.00	-7.92	AVG
3	4728.800	52.67	5.68	58.35	74.00	-15.65	peak
4	4728.800	40.63	5.68	46.31	54.00	-7.69	AVG
5	5021.400	51.10	6.57	57.67	74.00	-16.33	peak
6	5021.400	39.68	6.57	46.25	54.00	-7.75	AVG
7	5133.600	51.23	6.89	58.12	74.00	-15.88	peak
8	5133.600	39.62	6.89	46.51	54.00	-7.49	AVG
9	5150.000	49.02	6.94	55.96	74.00	-18.04	peak
10	5150.000	39.53	6.94	46.47	54.00	-7.53	AVG
11	5320.600	86.00	7.42	93.42	--	--	peak
12	5350.000	46.85	7.50	54.35	74.00	-19.65	peak
13	5350.000	38.42	7.50	45.92	54.00	-8.08	AVG
14	5378.900	49.72	7.59	57.31	74.00	-16.69	peak
15	5378.900	38.68	7.59	46.27	54.00	-7.73	AVG
16	5416.300	50.00	7.70	57.70	74.00	-16.30	peak
17	5416.300	38.73	7.70	46.43	54.00	-7.57	AVG
18	5446.000	50.96	7.78	58.74	74.00	-15.26	peak
19	5446.000	39.05	7.78	46.83	54.00	-7.17	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

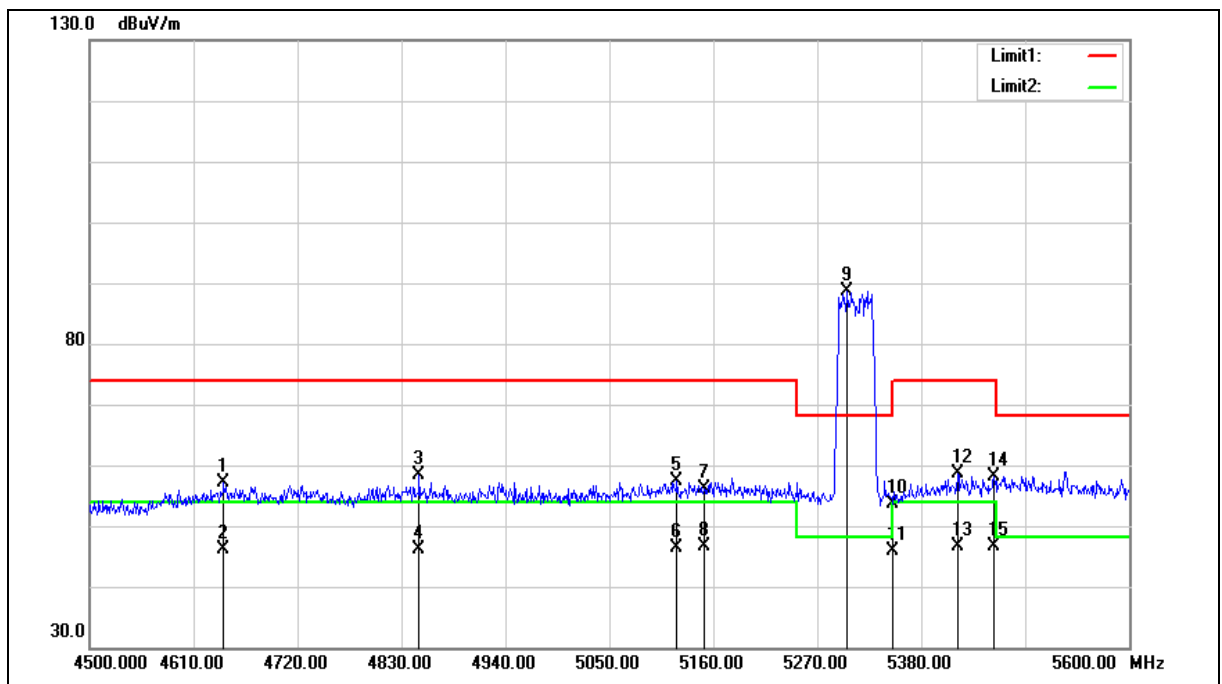

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.900	51.68	5.41	57.09	74.00	-16.91	peak
2	4641.900	40.63	5.41	46.04	54.00	-7.96	AVG
3	4848.700	52.32	6.05	58.37	74.00	-15.63	peak
4	4848.700	40.13	6.05	46.18	54.00	-7.82	AVG
5	5121.500	50.50	6.85	57.35	74.00	-16.65	peak
6	5121.500	39.41	6.85	46.26	54.00	-7.74	AVG
7	5150.000	49.24	6.94	56.18	74.00	-17.82	peak
8	5150.000	39.61	6.94	46.55	54.00	-7.45	AVG
9	5301.900	81.19	7.36	88.55	--	--	peak
10	5350.000	46.17	7.50	53.67	74.00	-20.33	peak
11	5350.000	38.38	7.50	45.88	54.00	-8.12	AVG
12	5418.500	50.91	7.70	58.61	74.00	-15.39	peak
13	5418.500	38.89	7.70	46.59	54.00	-7.41	AVG
14	5457.000	50.33	7.81	58.14	74.00	-15.86	peak
15	5457.000	38.90	7.81	46.71	54.00	-7.29	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

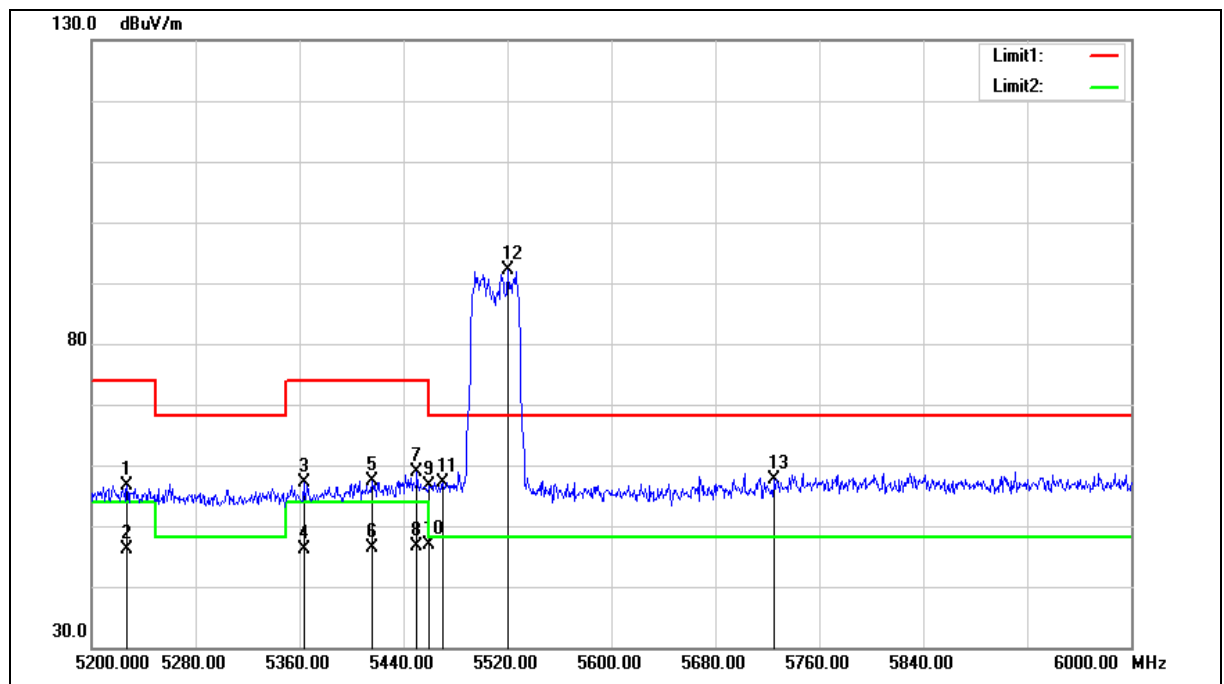

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5227.200	49.57	7.16	56.73	74.00	-17.27	peak
2	5227.200	38.91	7.16	46.07	54.00	-7.93	AVG
3	5363.200	49.60	7.53	57.13	74.00	-16.87	peak
4	5363.200	38.69	7.53	46.22	54.00	-7.78	AVG
5	5416.000	49.77	7.70	57.47	74.00	-16.53	peak
6	5416.000	38.62	7.70	46.32	54.00	-7.68	AVG
7	5450.400	51.00	7.79	58.79	74.00	-15.21	peak
8	5450.400	38.96	7.79	46.75	54.00	-7.25	AVG
9	5460.000	48.79	7.82	56.61	74.00	-17.39	peak
10	5460.000	38.99	7.82	46.81	54.00	-7.19	AVG
11	5470.000	49.34	7.85	57.19	68.20	-11.01	peak
12	5520.000	84.17	7.97	92.14	--	--	peak
13	5725.000	49.31	8.39	57.70	68.20	-10.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

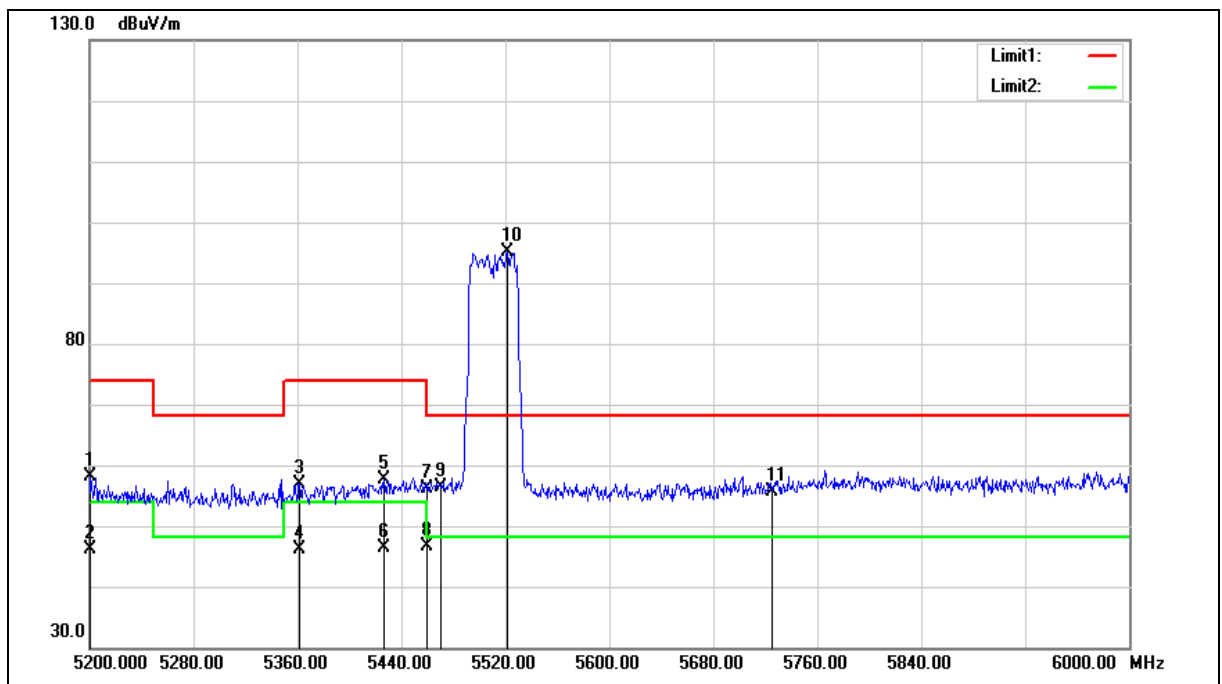

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5200.800	50.98	7.08	58.06	74.00	-15.94	peak
2	5200.800	39.12	7.08	46.20	54.00	-7.80	AVG
3	5361.600	49.23	7.53	56.76	74.00	-17.24	peak
4	5361.600	38.55	7.53	46.08	54.00	-7.92	AVG
5	5426.400	49.89	7.73	57.62	74.00	-16.38	peak
6	5426.400	38.58	7.73	46.31	54.00	-7.69	AVG
7	5460.000	48.26	7.82	56.08	74.00	-17.92	peak
8	5460.000	38.82	7.82	46.64	54.00	-7.36	AVG
9	5470.000	48.51	7.85	56.36	68.20	-11.84	peak
10	5521.600	87.15	7.97	95.12	--	--	peak
11	5725.000	47.17	8.39	55.56	68.20	-12.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

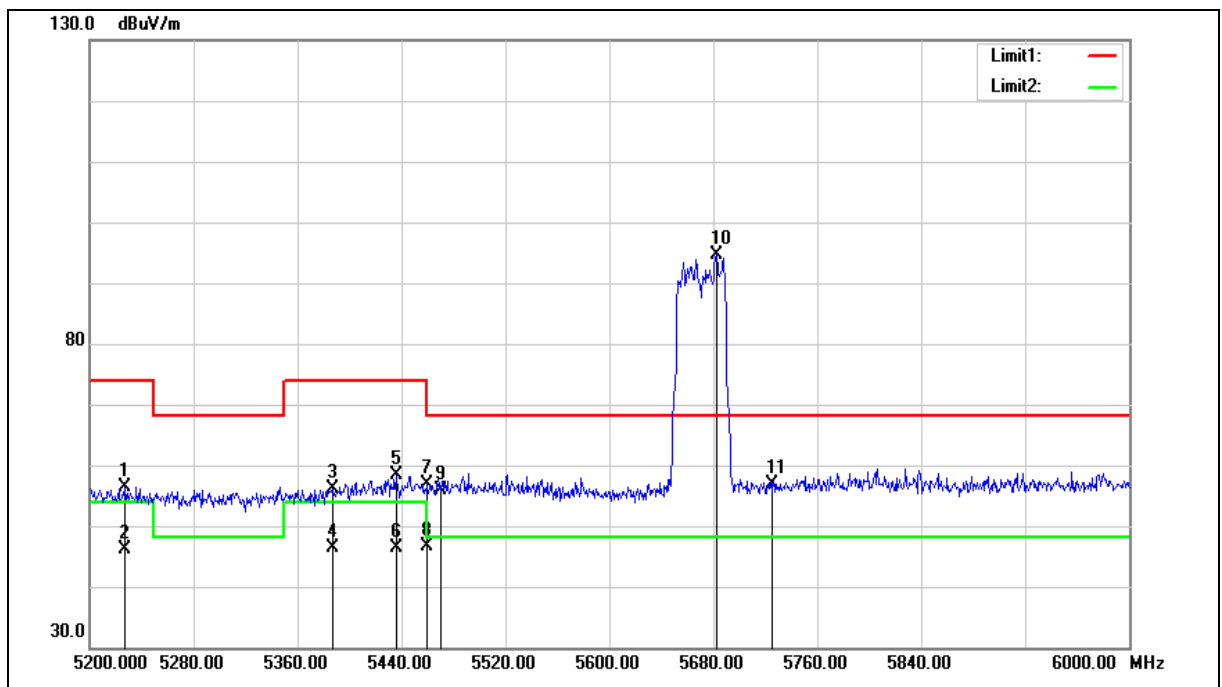

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5227.200	49.15	7.16	56.31	74.00	-17.69	peak
2	5227.200	38.86	7.16	46.02	54.00	-7.98	AVG
3	5387.200	48.39	7.62	56.01	74.00	-17.99	peak
4	5387.200	38.71	7.62	46.33	54.00	-7.67	AVG
5	5436.000	50.60	7.75	58.35	74.00	-15.65	peak
6	5436.000	38.71	7.75	46.46	54.00	-7.54	AVG
7	5460.000	49.00	7.82	56.82	74.00	-17.18	peak
8	5460.000	38.76	7.82	46.58	54.00	-7.42	AVG
9	5470.000	47.94	7.85	55.79	68.20	-12.41	peak
10	5682.400	86.45	8.30	94.75	--	--	peak
11	5725.000	48.40	8.39	56.79	68.20	-11.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

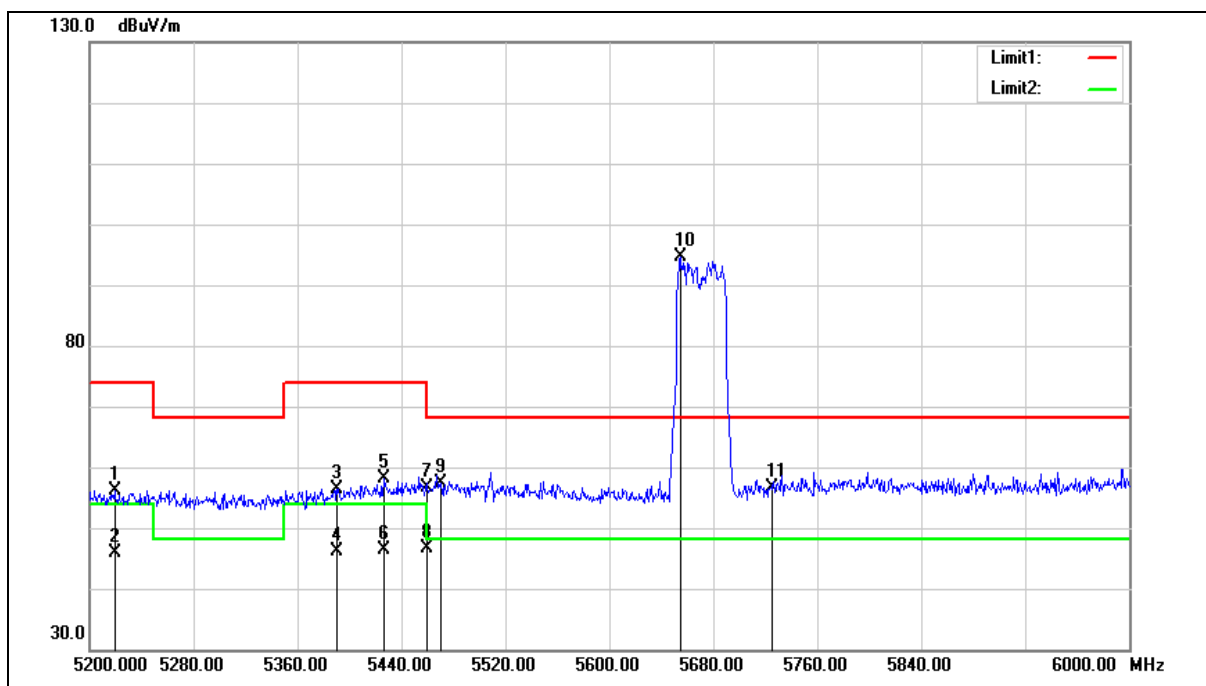

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5219.200	49.05	7.13	56.18	74.00	-17.82	peak
2	5219.200	38.76	7.13	45.89	54.00	-8.11	AVG
3	5390.400	48.87	7.62	56.49	74.00	-17.51	peak
4	5390.400	38.49	7.62	46.11	54.00	-7.89	AVG
5	5426.400	50.32	7.73	58.05	74.00	-15.95	peak
6	5426.400	38.70	7.73	46.43	54.00	-7.57	AVG
7	5460.000	48.91	7.82	56.73	74.00	-17.27	peak
8	5460.000	38.74	7.82	46.56	54.00	-7.44	AVG
9	5470.000	49.59	7.85	57.44	68.20	-10.76	peak
10	5654.400	86.44	8.24	94.68	--	--	peak
11	5725.000	48.32	8.39	56.71	68.20	-11.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

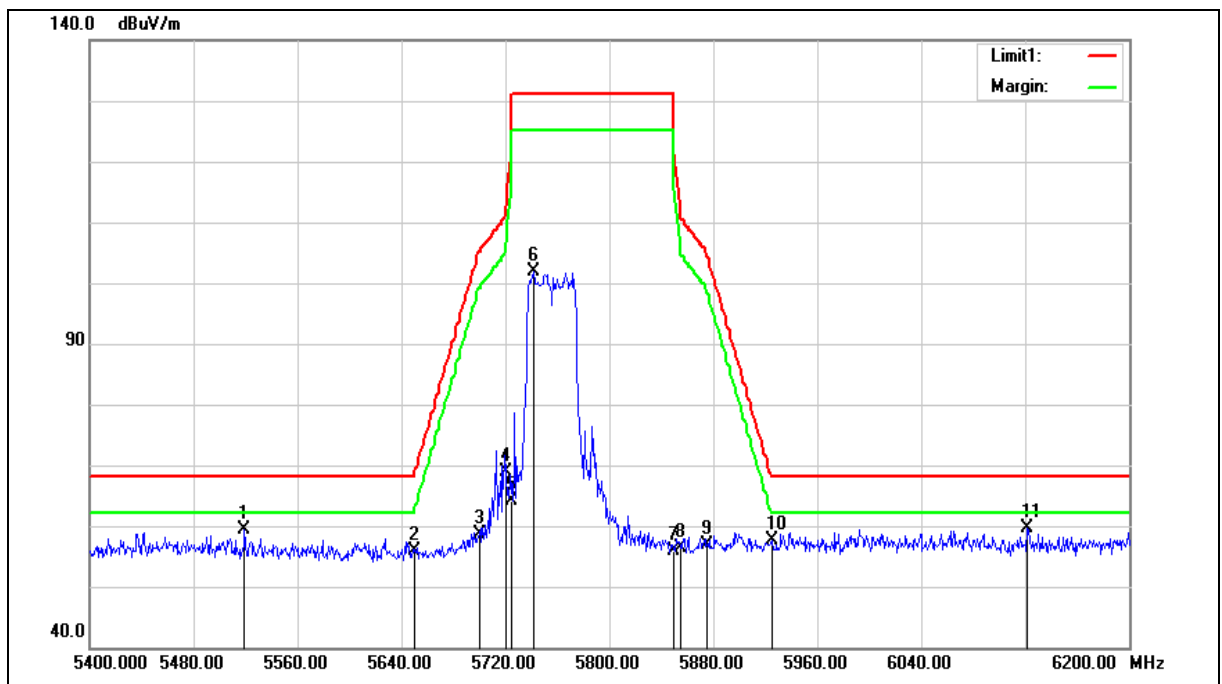

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5519.200	51.46	7.97	59.43	68.20	-8.77	peak
2	5650.000	47.69	8.24	55.93	68.20	-12.27	peak
3	5700.000	50.35	8.34	58.69	105.20	-46.51	peak
4	5720.000	60.49	8.38	68.87	110.80	-41.93	peak
5	5725.000	55.75	8.39	64.14	122.20	-58.06	peak
6	5741.600	93.47	8.42	101.89	--	--	peak
7	5850.000	47.21	8.63	55.84	122.20	-66.36	peak
8	5855.000	47.70	8.64	56.34	110.80	-54.46	peak
9	5875.000	48.24	8.69	56.93	105.20	-48.27	peak
10	5925.000	48.93	8.79	57.72	68.20	-10.48	peak
11	6121.600	50.40	9.31	59.71	68.20	-8.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

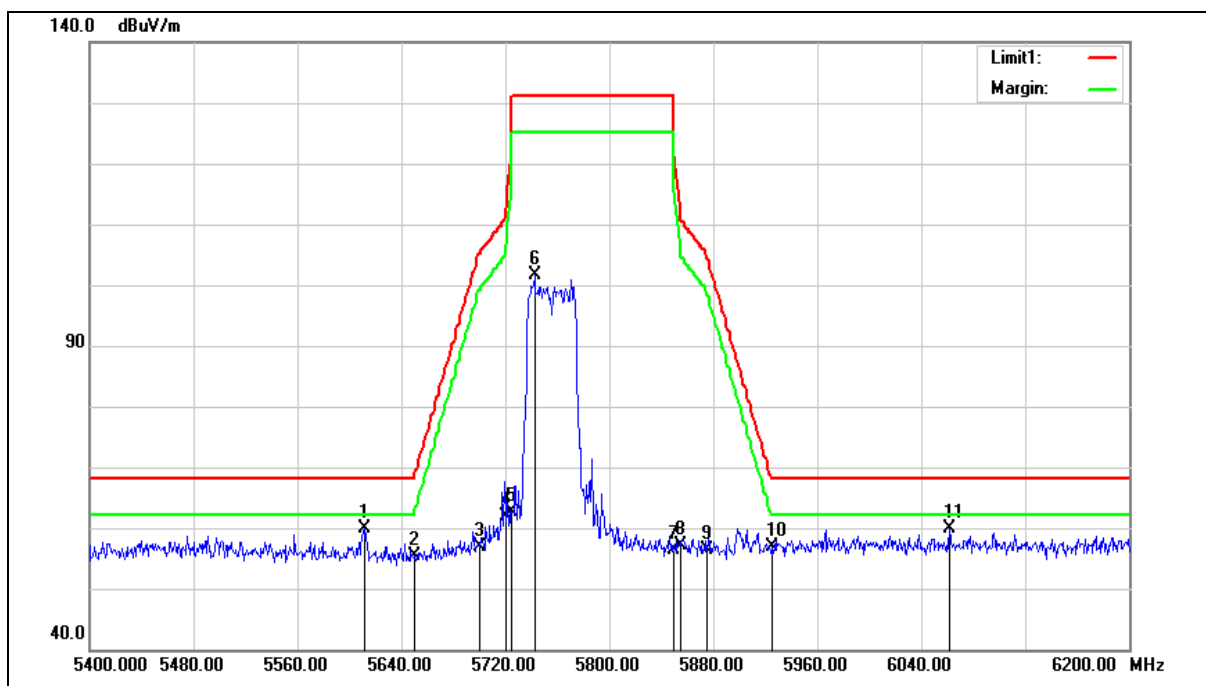

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5611.200	51.64	8.15	59.79	68.20	-8.41	peak
2	5650.000	47.11	8.24	55.35	68.20	-12.85	peak
3	5700.000	48.64	8.34	56.98	105.20	-48.22	peak
4	5720.000	53.43	8.38	61.81	110.80	-48.99	peak
5	5725.000	54.34	8.39	62.73	122.20	-59.47	peak
6	5742.400	93.09	8.42	101.51	--	--	peak
7	5850.000	47.77	8.63	56.40	122.20	-65.80	peak
8	5855.000	48.40	8.64	57.04	110.80	-53.76	peak
9	5875.000	47.66	8.69	56.35	105.20	-48.85	peak
10	5925.000	48.19	8.79	56.98	68.20	-11.22	peak
11	6061.600	50.76	9.13	59.89	68.20	-8.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

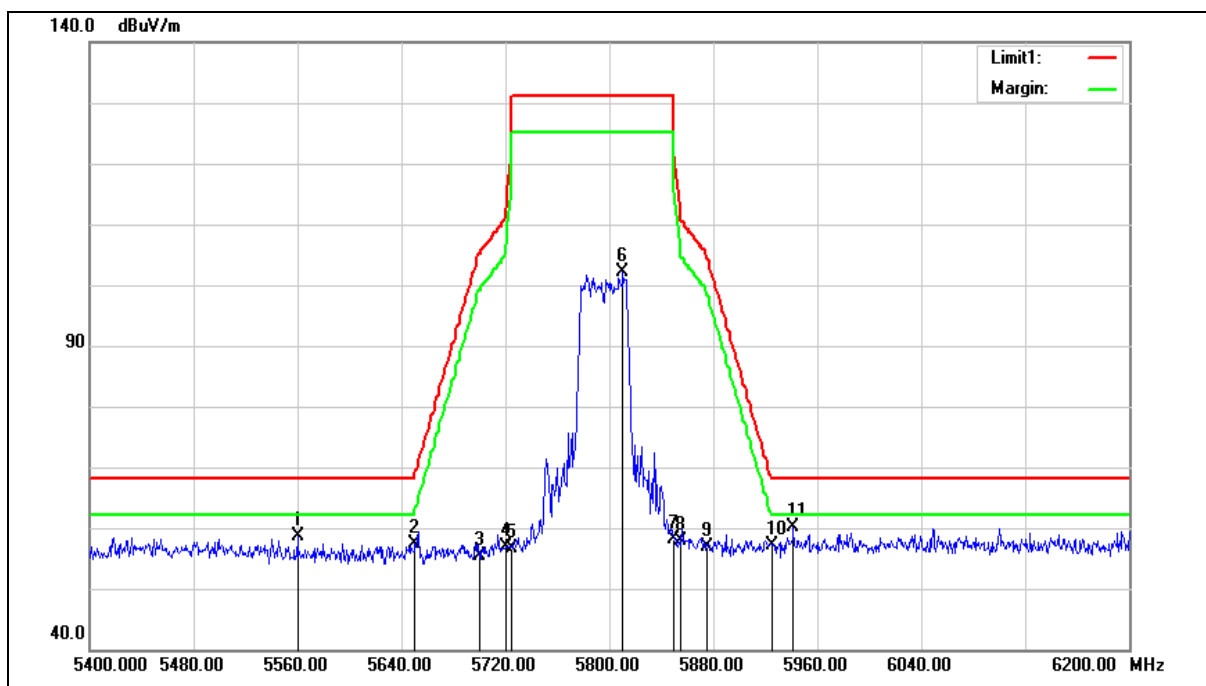

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5560.000	50.66	8.05	58.71	68.20	-9.49	peak
2	5650.000	49.22	8.24	57.46	68.20	-10.74	peak
3	5700.000	47.09	8.34	55.43	105.20	-49.77	peak
4	5720.000	48.39	8.38	56.77	110.80	-54.03	peak
5	5725.000	48.31	8.39	56.70	122.20	-65.50	peak
6	5810.400	93.54	8.55	102.09	--	--	peak
7	5850.000	49.42	8.63	58.05	122.20	-64.15	peak
8	5855.000	49.24	8.64	57.88	110.80	-52.92	peak
9	5875.000	48.31	8.69	57.00	105.20	-48.20	peak
10	5925.000	48.38	8.79	57.17	68.20	-11.03	peak
11	5941.600	51.34	8.82	60.16	68.20	-8.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

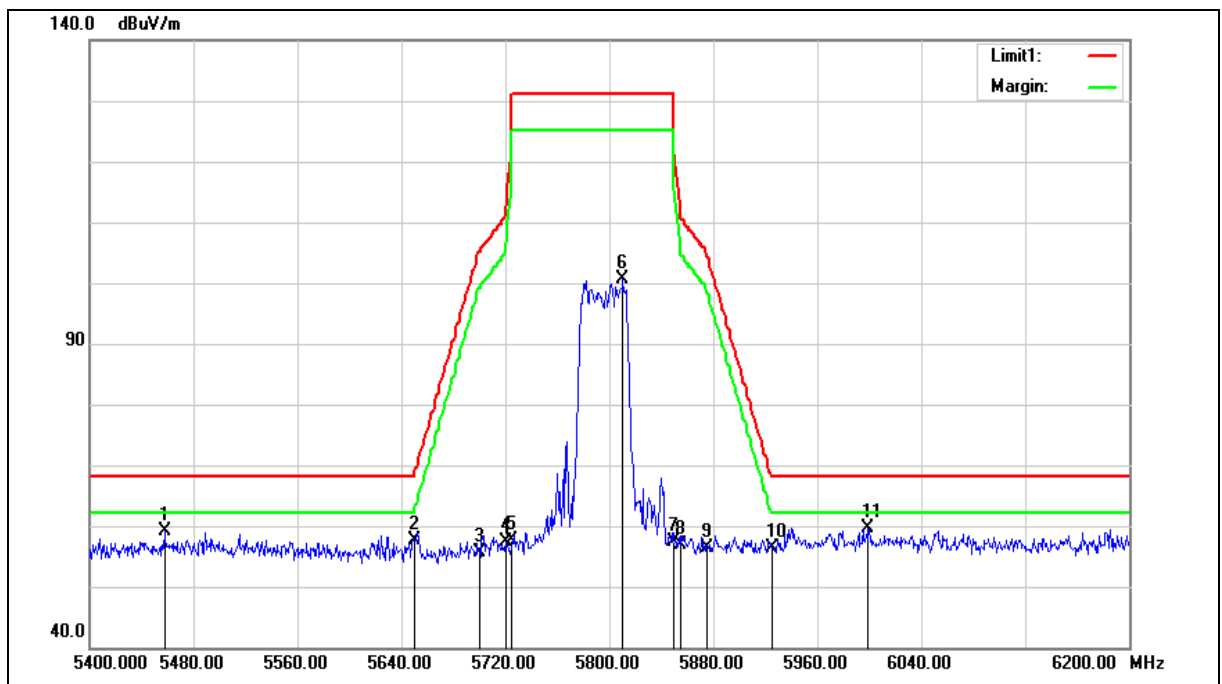

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.600	51.37	7.81	59.18	68.20	-9.02	peak
2	5650.000	49.41	8.24	57.65	68.20	-10.55	peak
3	5700.000	47.20	8.34	55.54	105.20	-49.66	peak
4	5720.000	48.89	8.38	57.27	110.80	-53.53	peak
5	5725.000	49.33	8.39	57.72	122.20	-64.48	peak
6	5810.400	92.03	8.55	100.58	--	--	peak
7	5850.000	48.86	8.63	57.49	122.20	-64.71	peak
8	5855.000	48.26	8.64	56.90	110.80	-53.90	peak
9	5875.000	47.76	8.69	56.45	105.20	-48.75	peak
10	5925.000	47.49	8.79	56.28	68.20	-11.92	peak
11	5999.200	50.77	8.94	59.71	68.20	-8.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

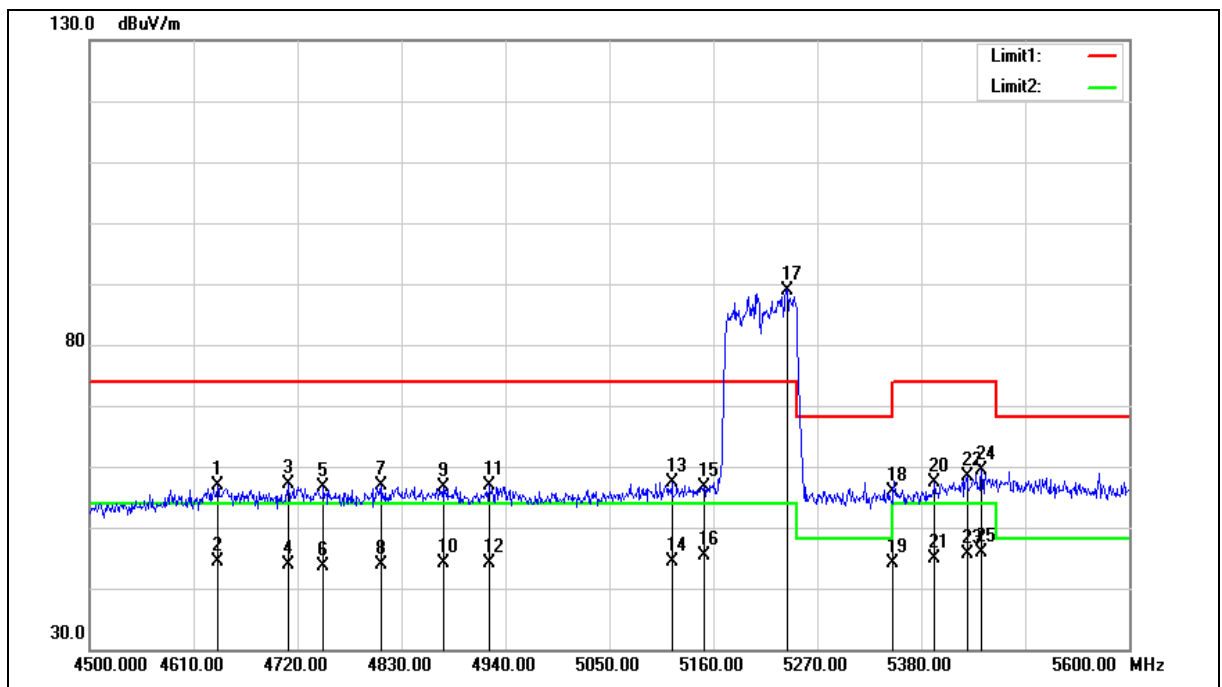

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	51.54	5.39	56.93	74.00	-17.07	peak
2	4635.300	39.01	5.39	44.40	54.00	-9.60	AVG
3	4710.100	51.61	5.62	57.23	74.00	-16.77	peak
4	4710.100	38.28	5.62	43.90	54.00	-10.10	AVG
5	4747.500	50.92	5.73	56.65	74.00	-17.35	peak
6	4747.500	37.87	5.73	43.60	54.00	-10.40	AVG
7	4809.100	51.03	5.93	56.96	74.00	-17.04	peak
8	4809.100	37.95	5.93	43.88	54.00	-10.12	AVG
9	4874.000	50.56	6.12	56.68	74.00	-17.32	peak
10	4874.000	38.09	6.12	44.21	54.00	-9.79	AVG
11	4922.400	50.51	6.28	56.79	74.00	-17.21	peak
12	4922.400	37.84	6.28	44.12	54.00	-9.88	AVG
13	5116.000	50.46	6.84	57.30	74.00	-16.70	peak
14	5116.000	37.55	6.84	44.39	54.00	-9.61	AVG
15	5150.000	49.71	6.94	56.65	74.00	-17.35	peak
16	5150.000	38.39	6.94	45.33	54.00	-8.67	AVG
17	5238.100	81.81	7.19	89.00	--	--	peak
18	5350.000	48.33	7.50	55.83	74.00	-18.17	peak
19	5350.000	36.64	7.50	44.14	54.00	-9.86	AVG
20	5394.300	49.65	7.63	57.28	74.00	-16.72	peak
21	5394.300	37.34	7.63	44.97	54.00	-9.03	AVG
22	5428.400	50.73	7.73	58.46	74.00	-15.54	peak
23	5428.400	37.85	7.73	45.58	54.00	-8.42	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5443.800	51.57	7.77	59.34	74.00	-14.66	peak
25	5443.800	38.23	7.77	46.00	54.00	-8.00	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

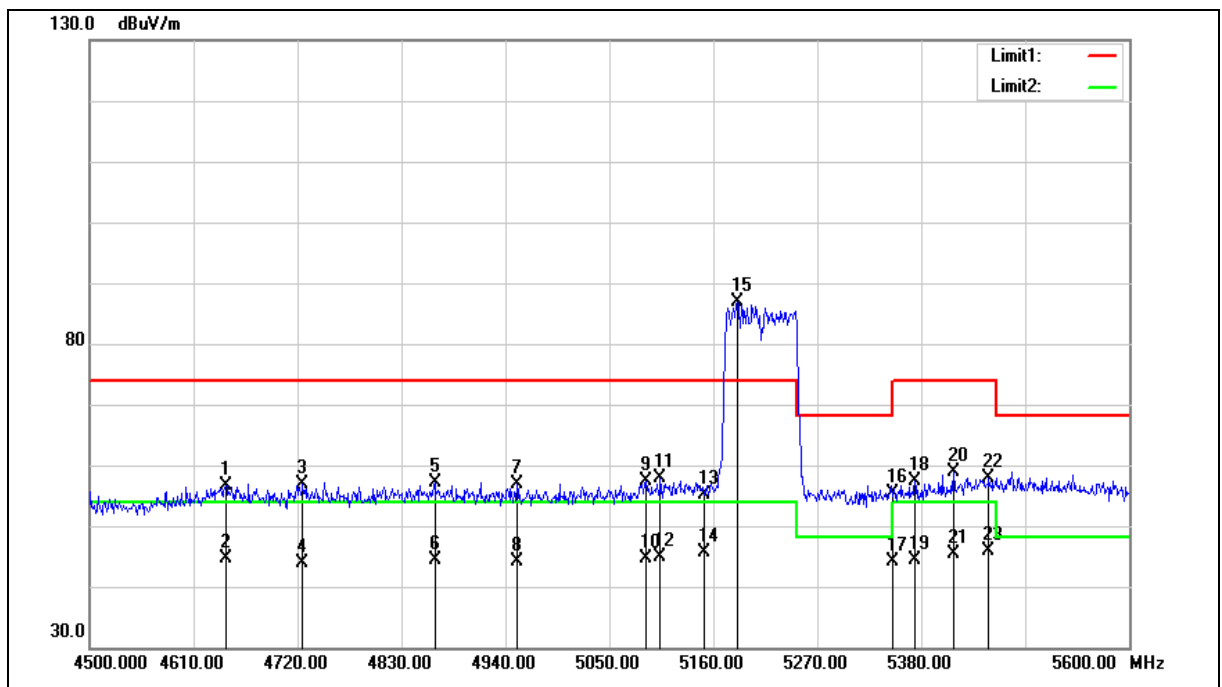

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	51.32	5.42	56.74	74.00	-17.26	peak
2	4644.100	39.30	5.42	44.72	54.00	-9.28	AVG
3	4725.500	51.19	5.68	56.87	74.00	-17.13	peak
4	4725.500	38.22	5.68	43.90	54.00	-10.10	AVG
5	4865.200	50.99	6.10	57.09	74.00	-16.91	peak
6	4865.200	38.27	6.10	44.37	54.00	-9.63	AVG
7	4952.100	50.57	6.36	56.93	74.00	-17.07	peak
8	4952.100	37.70	6.36	44.06	54.00	-9.94	AVG
9	5088.500	50.72	6.76	57.48	74.00	-16.52	peak
10	5088.500	37.85	6.76	44.61	54.00	-9.39	AVG
11	5103.900	50.97	6.80	57.77	74.00	-16.23	peak
12	5103.900	37.98	6.80	44.78	54.00	-9.22	AVG
13	5150.000	48.14	6.94	55.08	74.00	-18.92	peak
14	5150.000	38.72	6.94	45.66	54.00	-8.34	AVG
15	5185.300	79.92	7.04	86.96	--	--	peak
16	5350.000	47.92	7.50	55.42	74.00	-18.58	peak
17	5350.000	36.58	7.50	44.08	54.00	-9.92	AVG
18	5373.400	49.79	7.56	57.35	74.00	-16.65	peak
19	5373.400	36.91	7.56	44.47	54.00	-9.53	AVG
20	5414.100	51.07	7.69	58.76	74.00	-15.24	peak
21	5414.100	37.70	7.69	45.39	54.00	-8.61	AVG
22	5451.500	50.05	7.79	57.84	74.00	-16.16	peak
23	5451.500	38.10	7.79	45.89	54.00	-8.11	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

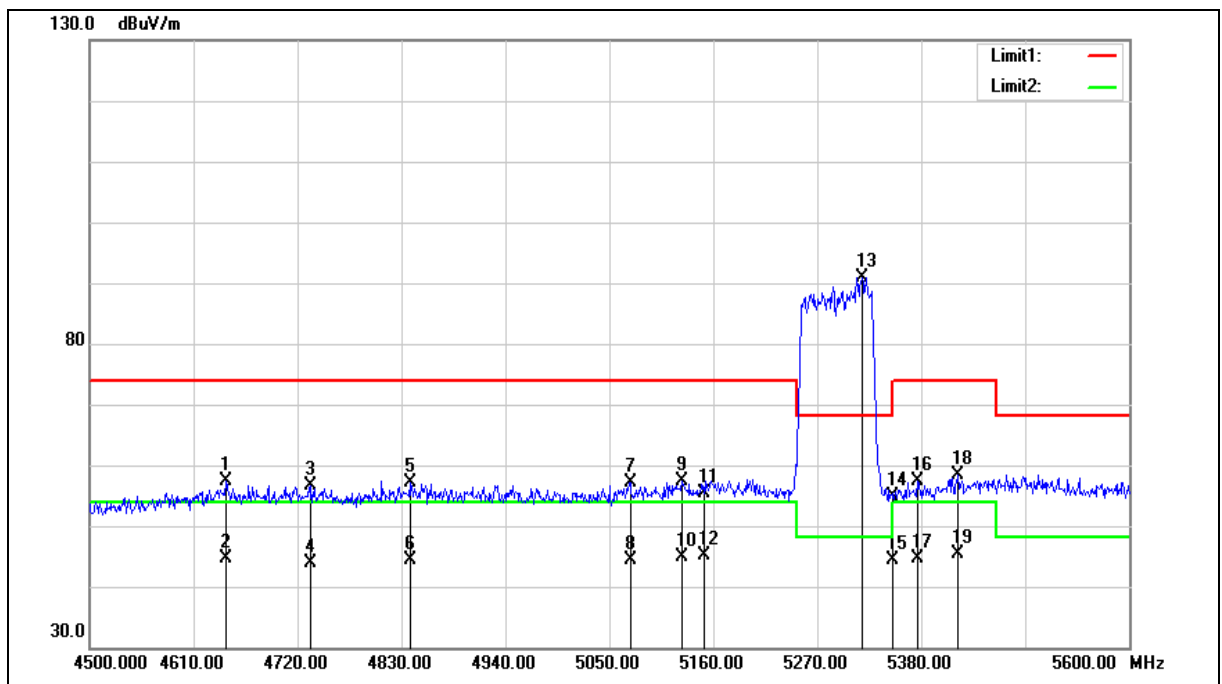

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.03	5.42	57.45	74.00	-16.55	peak
2	4644.100	39.20	5.42	44.62	54.00	-9.38	AVG
3	4734.300	50.91	5.70	56.61	74.00	-17.39	peak
4	4734.300	38.10	5.70	43.80	54.00	-10.20	AVG
5	4838.800	50.99	6.02	57.01	74.00	-16.99	peak
6	4838.800	38.34	6.02	44.36	54.00	-9.64	AVG
7	5072.000	50.51	6.71	57.22	74.00	-16.78	peak
8	5072.000	37.61	6.71	44.32	54.00	-9.68	AVG
9	5127.000	50.61	6.88	57.49	74.00	-16.51	peak
10	5127.000	38.11	6.88	44.99	54.00	-9.01	AVG
11	5150.000	48.32	6.94	55.26	74.00	-18.74	peak
12	5150.000	38.26	6.94	45.20	54.00	-8.80	AVG
13	5317.300	83.47	7.41	90.88	--	--	peak
14	5350.000	47.26	7.50	54.76	74.00	-19.24	peak
15	5350.000	36.95	7.50	44.45	54.00	-9.55	AVG
16	5375.600	49.82	7.59	57.41	74.00	-16.59	peak
17	5375.600	37.06	7.59	44.65	54.00	-9.35	AVG
18	5418.500	50.58	7.70	58.28	74.00	-15.72	peak
19	5418.500	37.73	7.70	45.43	54.00	-8.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

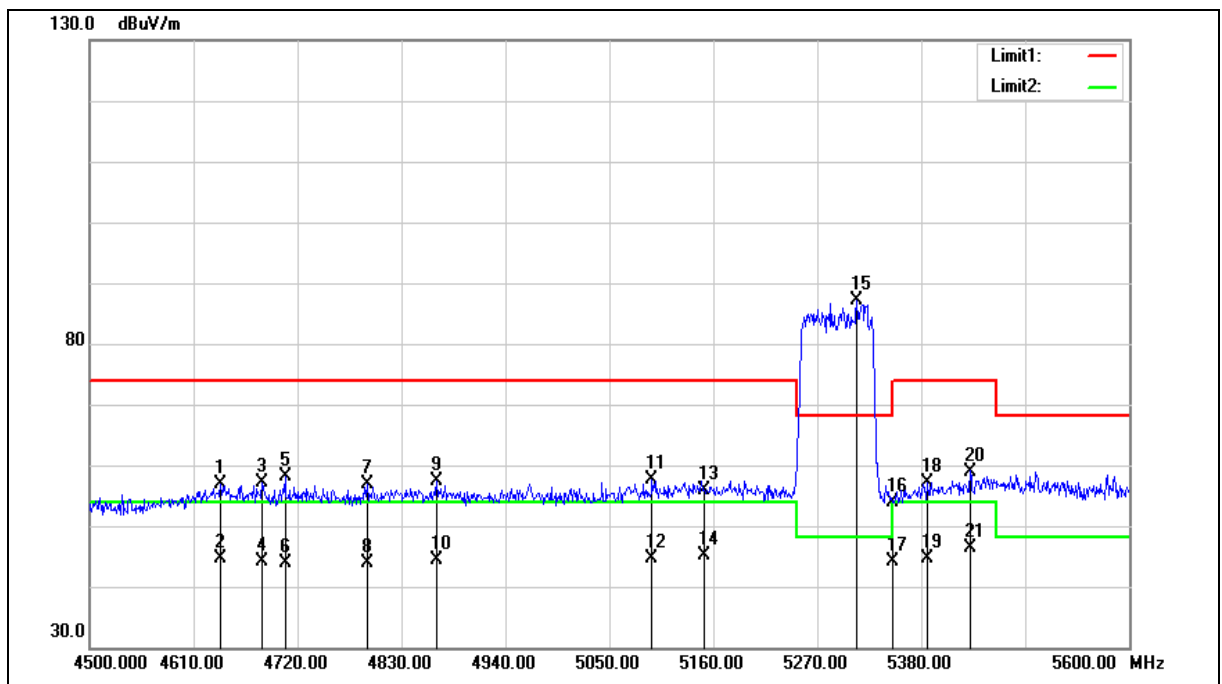

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	51.49	5.40	56.89	74.00	-17.11	peak
2	4638.600	39.14	5.40	44.54	54.00	-9.46	AVG
3	4682.600	51.48	5.54	57.02	74.00	-16.98	peak
4	4682.600	38.53	5.54	44.07	54.00	-9.93	AVG
5	4706.800	52.55	5.60	58.15	74.00	-15.85	peak
6	4706.800	38.28	5.60	43.88	54.00	-10.12	AVG
7	4793.700	50.98	5.89	56.87	74.00	-17.13	peak
8	4793.700	37.90	5.89	43.79	54.00	-10.21	AVG
9	4867.400	51.36	6.11	57.47	74.00	-16.53	peak
10	4867.400	38.23	6.11	44.34	54.00	-9.66	AVG
11	5095.100	50.76	6.78	57.54	74.00	-16.46	peak
12	5095.100	37.85	6.78	44.63	54.00	-9.37	AVG
13	5150.000	48.91	6.94	55.85	74.00	-18.15	peak
14	5150.000	38.28	6.94	45.22	54.00	-8.78	AVG
15	5311.800	79.78	7.39	87.17	--	--	peak
16	5350.000	46.38	7.50	53.88	74.00	-20.12	peak
17	5350.000	36.69	7.50	44.19	54.00	-9.81	AVG
18	5386.600	49.49	7.62	57.11	74.00	-16.89	peak
19	5386.600	37.13	7.62	44.75	54.00	-9.25	AVG
20	5431.700	51.26	7.74	59.00	74.00	-15.00	peak
21	5431.700	38.74	7.74	46.48	54.00	-7.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

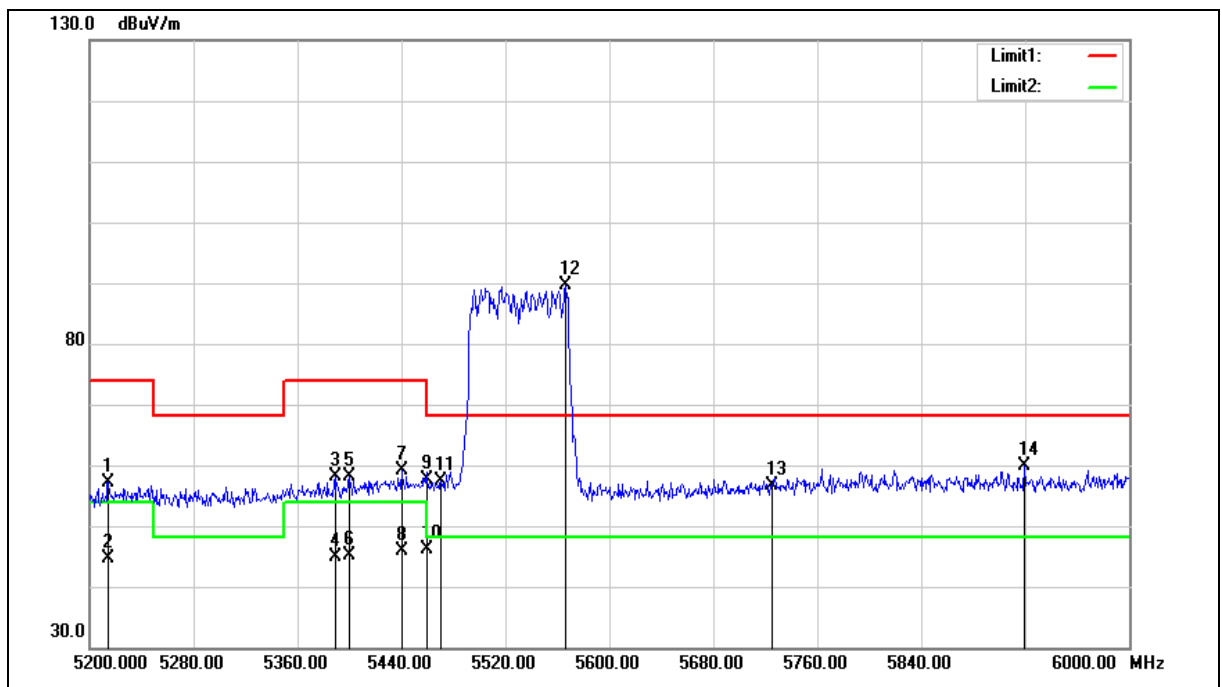

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5214.400	50.02	7.12	57.14	74.00	-16.86	peak
2	5214.400	37.53	7.12	44.65	54.00	-9.35	AVG
3	5388.800	50.47	7.62	58.09	74.00	-15.91	peak
4	5388.800	37.24	7.62	44.86	54.00	-9.14	AVG
5	5400.000	50.51	7.65	58.16	74.00	-15.84	peak
6	5400.000	37.46	7.65	45.11	54.00	-8.89	AVG
7	5440.000	51.48	7.76	59.24	74.00	-14.76	peak
8	5440.000	38.09	7.76	45.85	54.00	-8.15	AVG
9	5460.000	49.87	7.82	57.69	74.00	-16.31	peak
10	5460.000	38.26	7.82	46.08	54.00	-7.92	AVG
11	5470.000	49.58	7.85	57.43	68.20	-10.77	peak
12	5566.400	81.44	8.07	89.51	--	--	peak
13	5725.000	48.33	8.39	56.72	68.20	-11.48	peak
14	5919.200	51.13	8.78	59.91	68.20	-8.29	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

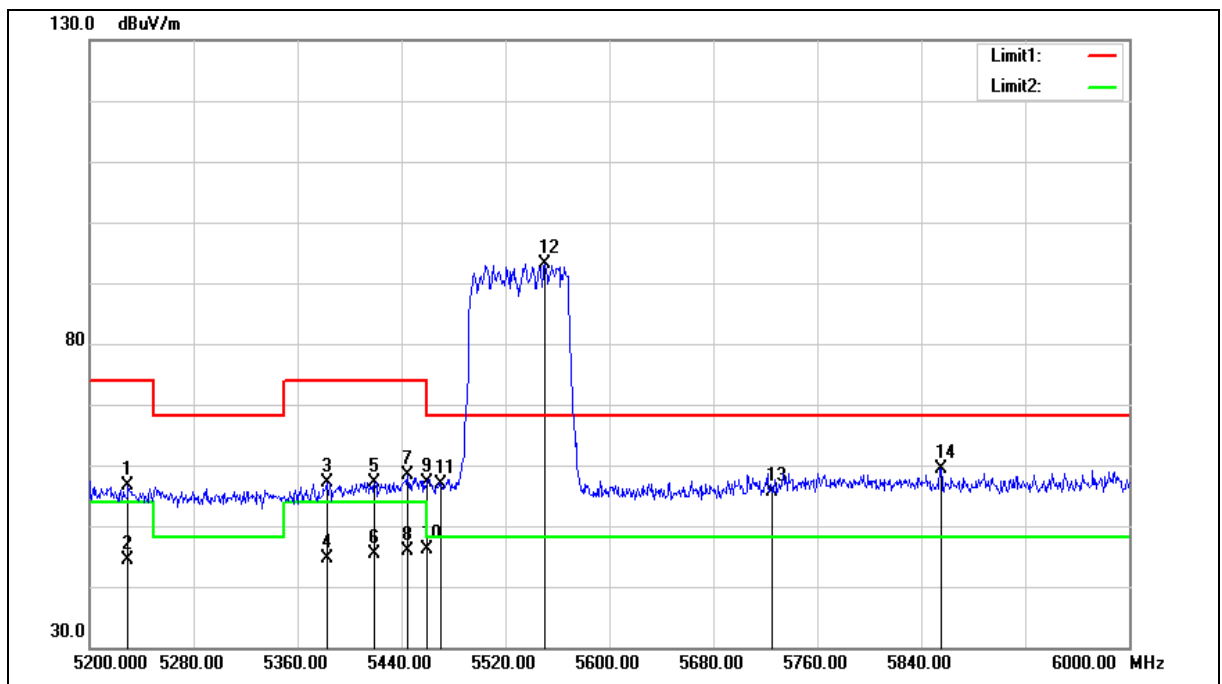

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5229.600	49.48	7.16	56.64	74.00	-17.36	peak
2	5229.600	37.30	7.16	44.46	54.00	-9.54	AVG
3	5382.400	49.53	7.60	57.13	74.00	-16.87	peak
4	5382.400	37.10	7.60	44.70	54.00	-9.30	AVG
5	5419.200	49.53	7.70	57.23	74.00	-16.77	peak
6	5419.200	37.72	7.70	45.42	54.00	-8.58	AVG
7	5444.800	50.58	7.77	58.35	74.00	-15.65	peak
8	5444.800	38.22	7.77	45.99	54.00	-8.01	AVG
9	5460.000	49.43	7.82	57.25	74.00	-16.75	peak
10	5460.000	38.24	7.82	46.06	54.00	-7.94	AVG
11	5470.000	49.08	7.85	56.93	68.20	-11.27	peak
12	5550.400	85.20	8.03	93.23	--	--	peak
13	5725.000	47.20	8.39	55.59	68.20	-12.61	peak
14	5855.200	50.77	8.65	59.42	68.20	-8.78	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

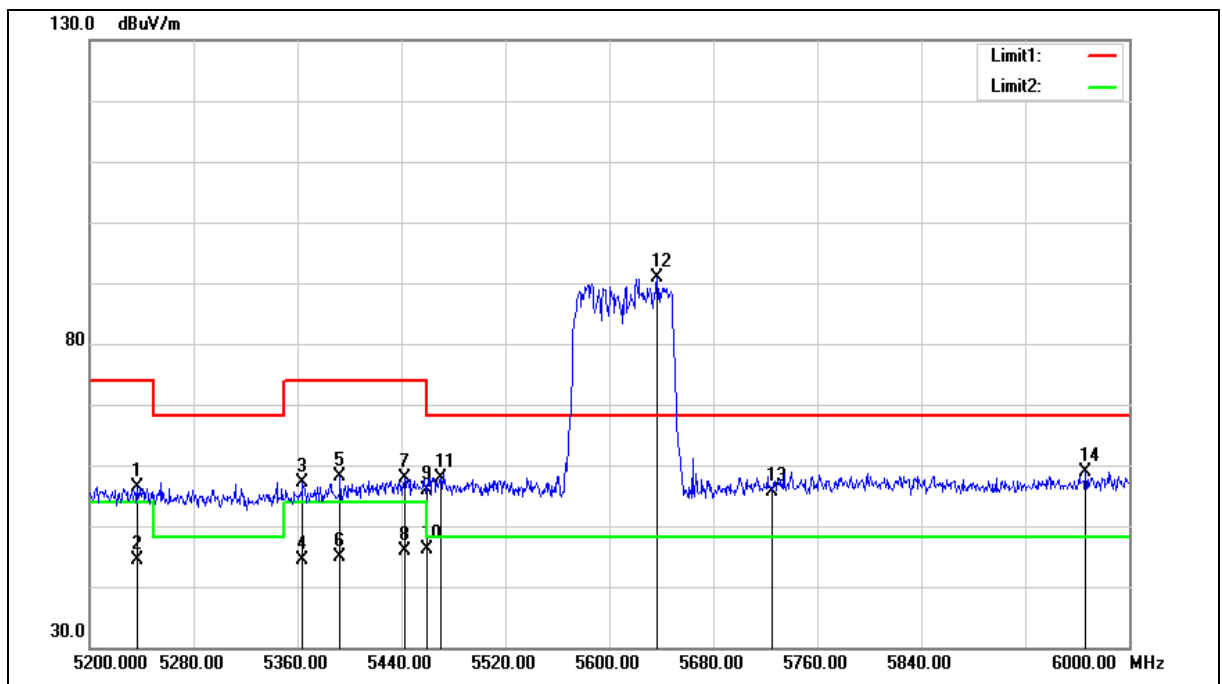

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.800	49.12	7.19	56.31	74.00	-17.69	peak
2	5236.800	37.18	7.19	44.37	54.00	-9.63	AVG
3	5364.000	49.60	7.54	57.14	74.00	-16.86	peak
4	5364.000	36.76	7.54	44.30	54.00	-9.70	AVG
5	5392.800	50.43	7.63	58.06	74.00	-15.94	peak
6	5392.800	37.33	7.63	44.96	54.00	-9.04	AVG
7	5442.400	50.20	7.77	57.97	74.00	-16.03	peak
8	5442.400	38.06	7.77	45.83	54.00	-8.17	AVG
9	5460.000	48.10	7.82	55.92	74.00	-18.08	peak
10	5460.000	38.20	7.82	46.02	54.00	-7.98	AVG
11	5470.000	50.06	7.85	57.91	68.20	-10.29	peak
12	5636.800	82.67	8.21	90.88	--	--	peak
13	5725.000	47.28	8.39	55.67	68.20	-12.53	peak
14	5966.400	50.06	8.88	58.94	68.20	-9.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

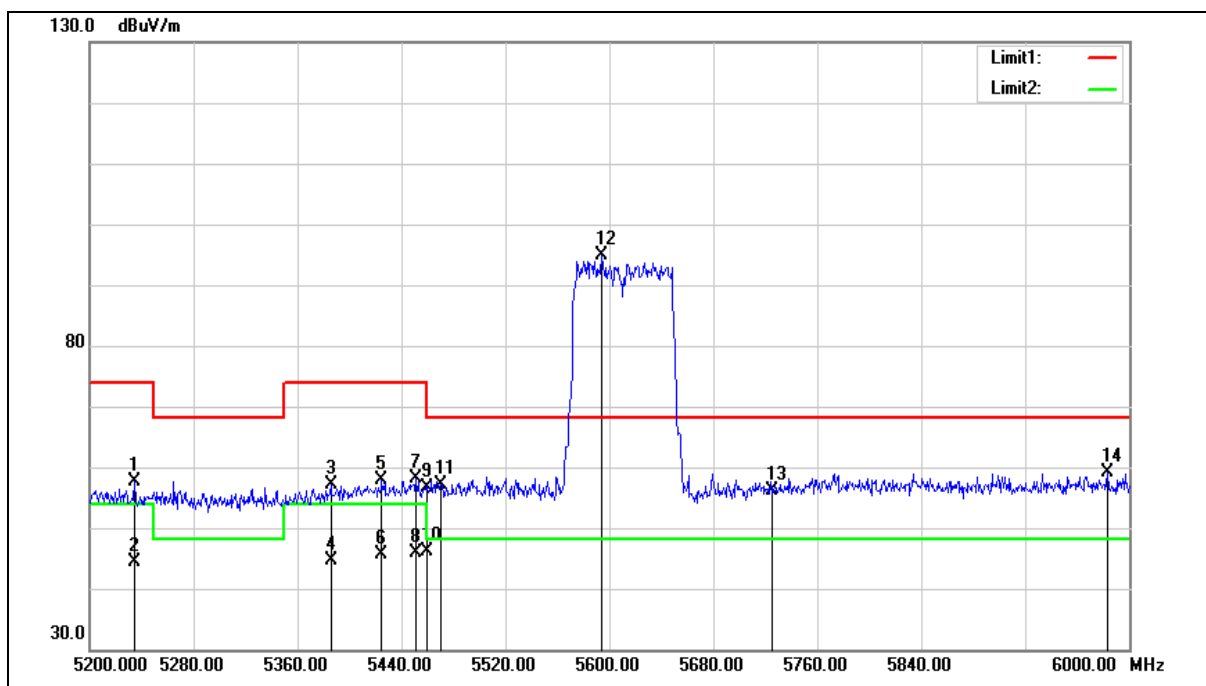

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5234.400	50.37	7.17	57.54	74.00	-16.46	peak
2	5234.400	37.18	7.17	44.35	54.00	-9.65	AVG
3	5385.600	49.42	7.61	57.03	74.00	-16.97	peak
4	5385.600	37.11	7.61	44.72	54.00	-9.28	AVG
5	5424.800	50.13	7.71	57.84	74.00	-16.16	peak
6	5424.800	37.84	7.71	45.55	54.00	-8.45	AVG
7	5451.200	50.31	7.79	58.10	74.00	-15.90	peak
8	5451.200	38.14	7.79	45.93	54.00	-8.07	AVG
9	5460.000	48.82	7.82	56.64	74.00	-17.36	peak
10	5460.000	38.20	7.82	46.02	54.00	-7.98	AVG
11	5470.000	49.20	7.85	57.05	68.20	-11.15	peak
12	5594.400	86.79	8.11	94.90	--	--	peak
13	5725.000	47.76	8.39	56.15	68.20	-12.05	peak
14	5983.200	50.21	8.90	59.11	68.20	-9.09	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

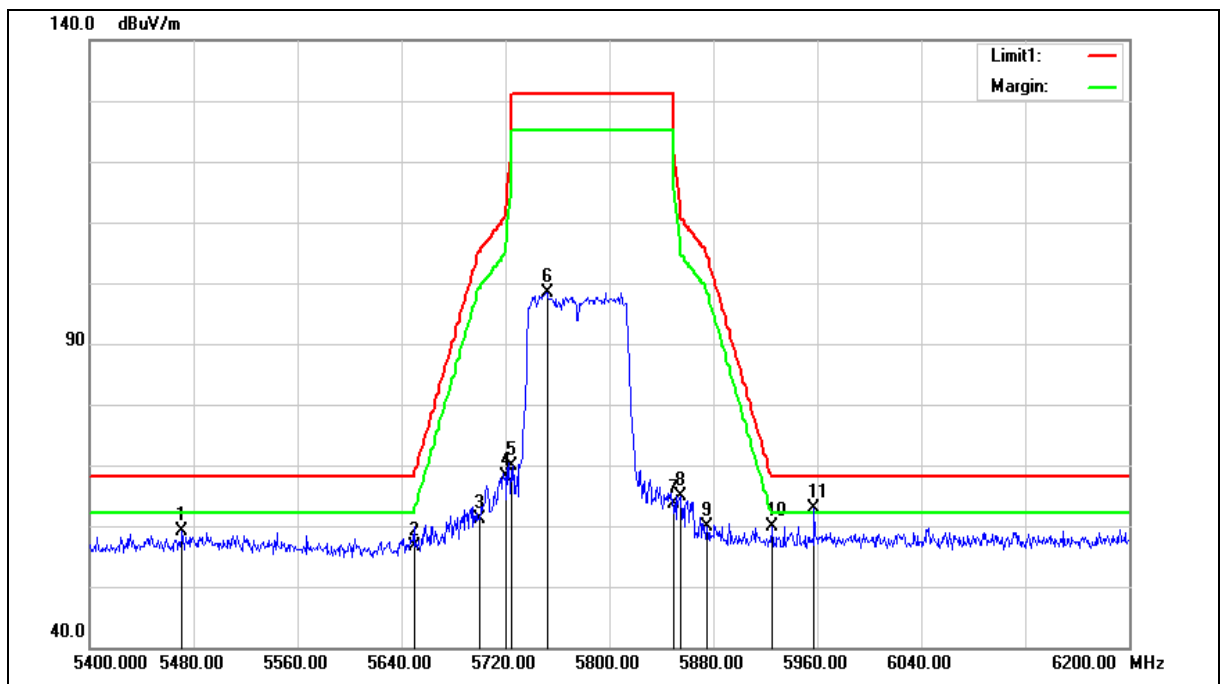

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5471.200	51.18	7.85	59.03	68.20	-9.17	peak
2	5650.000	48.40	8.24	56.64	68.20	-11.56	peak
3	5700.000	52.84	8.34	61.18	105.20	-44.02	peak
4	5720.000	59.69	8.38	68.07	110.80	-42.73	peak
5	5725.000	61.55	8.39	69.94	122.20	-52.26	peak
6	5752.000	90.04	8.44	98.48	--	--	peak
7	5850.000	54.94	8.63	63.57	122.20	-58.63	peak
8	5855.000	56.21	8.64	64.85	110.80	-45.95	peak
9	5875.000	51.16	8.69	59.85	105.20	-45.35	peak
10	5925.000	51.18	8.79	59.97	68.20	-8.23	peak
11	5957.600	53.95	8.86	62.81	68.20	-5.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

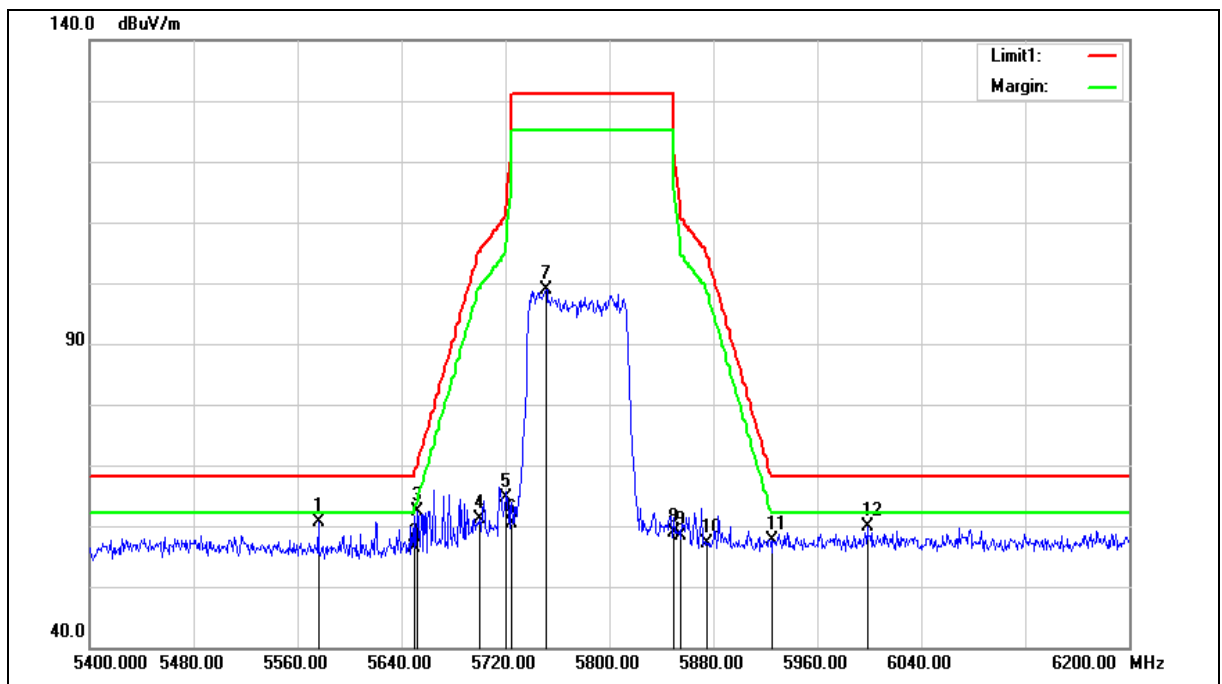

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5576.000	52.55	8.08	60.63	68.20	-7.57	peak
2	5650.000	48.09	8.24	56.33	68.20	-11.87	peak
3	5652.000	54.20	8.24	62.44	69.68	-7.24	peak
4	5700.000	52.84	8.34	61.18	105.20	-44.02	peak
5	5720.000	56.27	8.38	64.65	110.80	-46.15	peak
6	5725.000	51.89	8.39	60.28	122.20	-61.92	peak
7	5751.200	90.55	8.44	98.99	--	--	peak
8	5850.000	50.32	8.63	58.95	122.20	-63.25	peak
9	5855.000	49.84	8.64	58.48	110.80	-52.32	peak
10	5875.000	48.38	8.69	57.07	105.20	-48.13	peak
11	5925.000	48.80	8.79	57.59	68.20	-10.61	peak
12	5998.400	50.96	8.94	59.90	68.20	-8.30	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

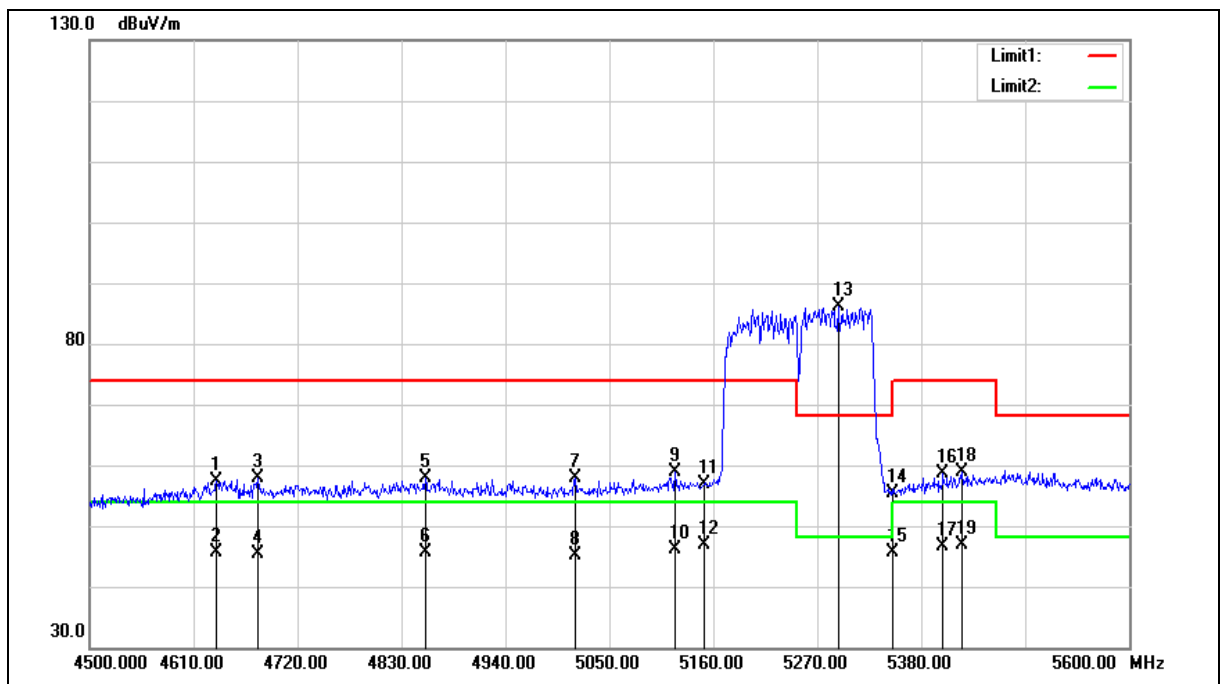

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.200	51.93	5.39	57.32	74.00	-16.68	peak
2	4634.200	40.36	5.39	45.75	54.00	-8.25	AVG
3	4678.200	52.29	5.52	57.81	74.00	-16.19	peak
4	4678.200	39.78	5.52	45.30	54.00	-8.70	AVG
5	4855.300	51.93	6.07	58.00	74.00	-16.00	peak
6	4855.300	39.46	6.07	45.53	54.00	-8.47	AVG
7	5013.700	51.32	6.54	57.86	74.00	-16.14	peak
8	5013.700	38.57	6.54	45.11	54.00	-8.89	AVG
9	5119.300	52.06	6.84	58.90	74.00	-15.10	peak
10	5119.300	39.33	6.84	46.17	54.00	-7.83	AVG
11	5150.000	49.97	6.94	56.91	74.00	-17.09	peak
12	5150.000	39.85	6.94	46.79	54.00	-7.21	AVG
13	5292.000	78.72	7.34	86.06	--	--	peak
14	5350.000	47.83	7.50	55.33	74.00	-18.67	peak
15	5350.000	38.18	7.50	45.68	54.00	-8.32	AVG
16	5403.100	50.86	7.66	58.52	74.00	-15.48	peak
17	5403.100	39.05	7.66	46.71	54.00	-7.29	AVG
18	5422.900	51.06	7.71	58.77	74.00	-15.23	peak
19	5422.900	39.17	7.71	46.88	54.00	-7.12	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Vertical		

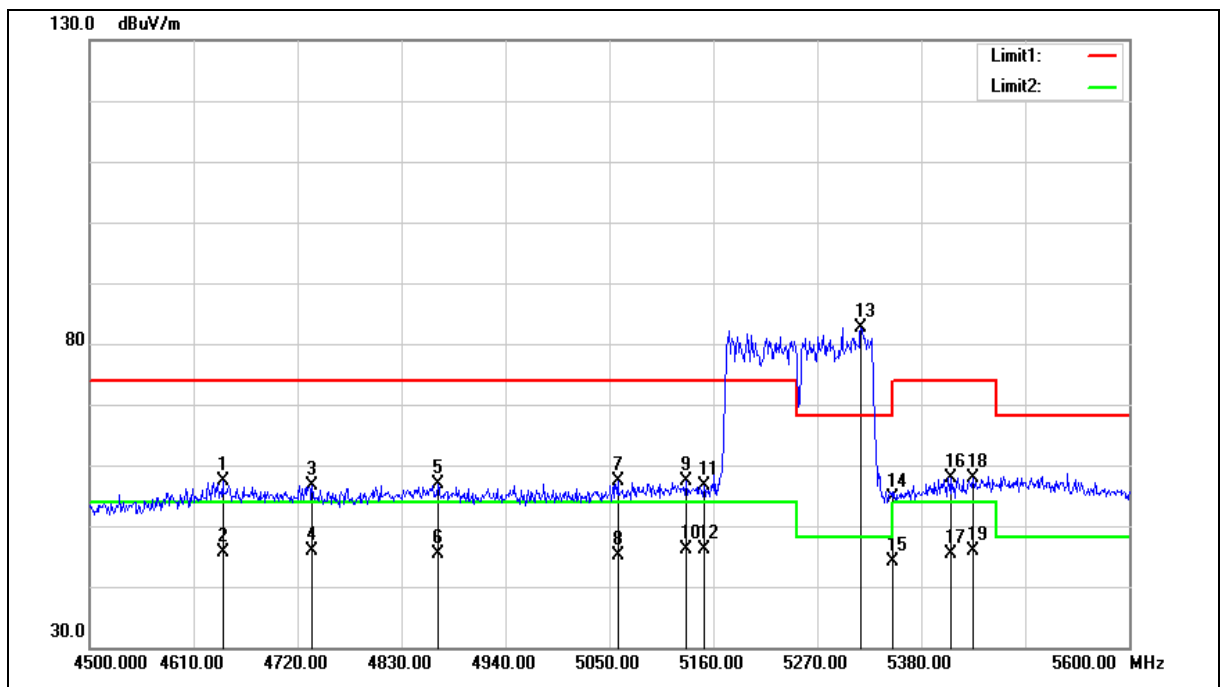

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	51.96	5.41	57.37	74.00	-16.63	peak
2	4640.800	40.25	5.41	45.66	54.00	-8.34	AVG
3	4735.400	50.93	5.70	56.63	74.00	-17.37	peak
4	4735.400	40.15	5.70	45.85	54.00	-8.15	AVG
5	4868.500	50.85	6.11	56.96	74.00	-17.04	peak
6	4868.500	39.25	6.11	45.36	54.00	-8.64	AVG
7	5058.800	50.66	6.68	57.34	74.00	-16.66	peak
8	5058.800	38.51	6.68	45.19	54.00	-8.81	AVG
9	5131.400	50.38	6.89	57.27	74.00	-16.73	peak
10	5131.400	39.22	6.89	46.11	54.00	-7.89	AVG
11	5150.000	49.70	6.94	56.64	74.00	-17.36	peak
12	5150.000	39.31	6.94	46.25	54.00	-7.75	AVG
13	5316.200	75.31	7.41	82.72	--	--	peak
14	5350.000	47.23	7.50	54.73	74.00	-19.27	peak
15	5350.000	36.63	7.50	44.13	54.00	-9.87	AVG
16	5411.900	50.21	7.68	57.89	74.00	-16.11	peak
17	5411.900	37.69	7.68	45.37	54.00	-8.63	AVG
18	5435.000	50.01	7.75	57.76	74.00	-16.24	peak
19	5435.000	38.02	7.75	45.77	54.00	-8.23	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

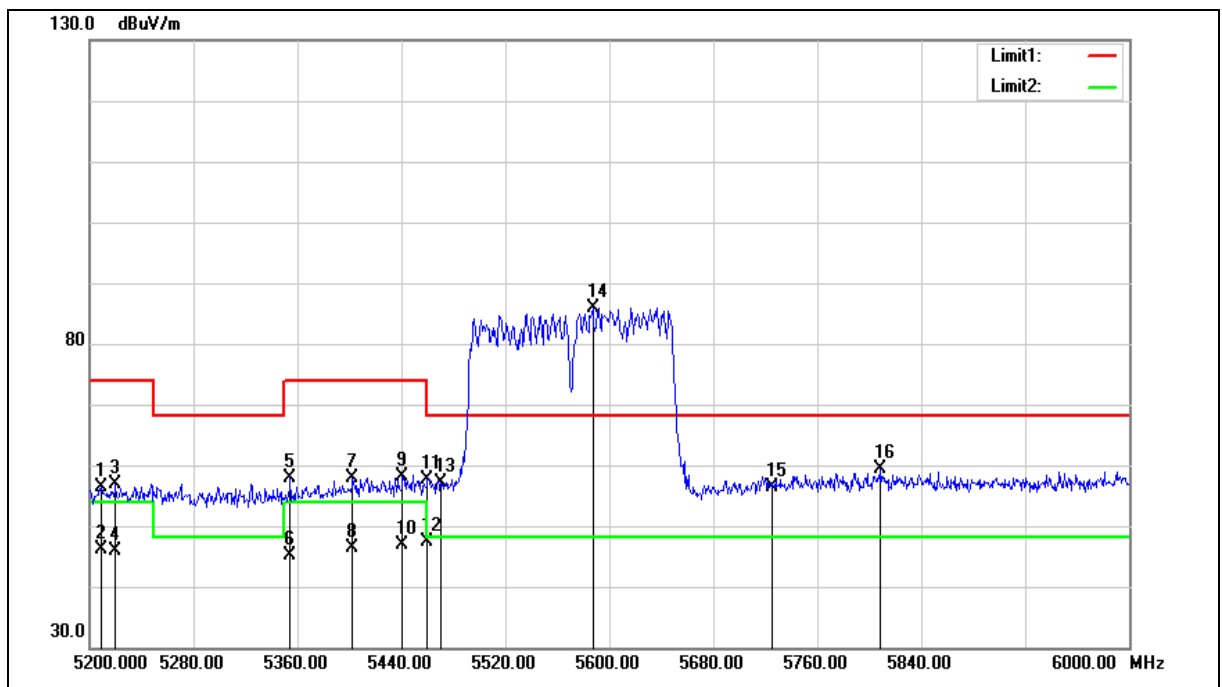

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	49.27	7.11	56.38	74.00	-17.62	peak
2	5208.800	38.93	7.11	46.04	54.00	-7.96	AVG
3	5220.000	49.69	7.14	56.83	74.00	-17.17	peak
4	5220.000	38.69	7.14	45.83	54.00	-8.17	AVG
5	5354.400	50.49	7.51	58.00	74.00	-16.00	peak
6	5354.400	37.73	7.51	45.24	54.00	-8.76	AVG
7	5402.400	50.23	7.65	57.88	74.00	-16.12	peak
8	5402.400	38.65	7.65	46.30	54.00	-7.70	AVG
9	5440.800	50.31	7.76	58.07	74.00	-15.93	peak
10	5440.800	39.21	7.76	46.97	54.00	-7.03	AVG
11	5460.000	49.85	7.82	57.67	74.00	-16.33	peak
12	5460.000	39.57	7.82	47.39	54.00	-6.61	AVG
13	5470.000	49.24	7.85	57.09	68.20	-11.11	peak
14	5587.200	77.77	8.11	85.88	--	--	peak
15	5725.000	47.96	8.39	56.35	68.20	-11.85	peak
16	5808.800	50.90	8.55	59.45	68.20	-8.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Vertical		

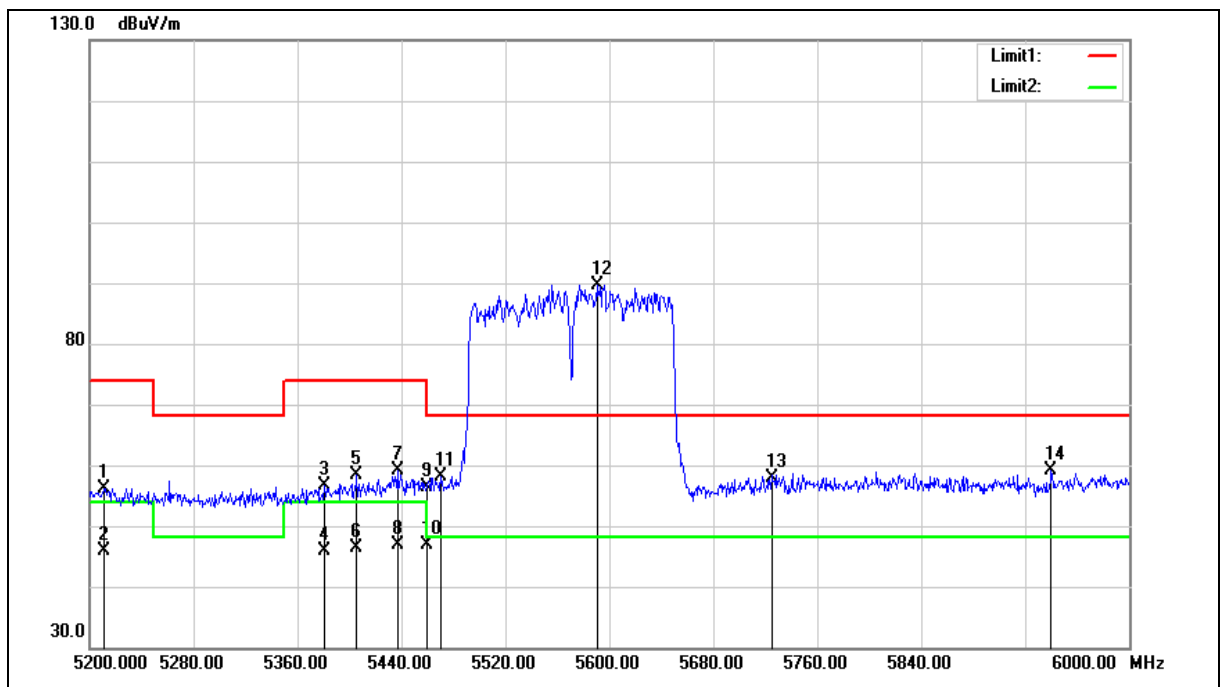

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	49.08	7.11	56.19	74.00	-17.81	peak
2	5211.200	38.76	7.11	45.87	54.00	-8.13	AVG
3	5380.800	49.14	7.60	56.74	74.00	-17.26	peak
4	5380.800	38.22	7.60	45.82	54.00	-8.18	AVG
5	5405.600	50.74	7.67	58.41	74.00	-15.59	peak
6	5405.600	38.63	7.67	46.30	54.00	-7.70	AVG
7	5436.800	51.33	7.76	59.09	74.00	-14.91	peak
8	5436.800	39.15	7.76	46.91	54.00	-7.09	AVG
9	5460.000	48.65	7.82	56.47	74.00	-17.53	peak
10	5460.000	39.17	7.82	46.99	54.00	-7.01	AVG
11	5470.000	50.16	7.85	58.01	68.20	-10.19	peak
12	5590.400	81.58	8.11	89.69	--	--	peak
13	5725.000	49.50	8.39	57.89	68.20	-10.31	peak
14	5940.000	50.20	8.82	59.02	68.20	-9.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

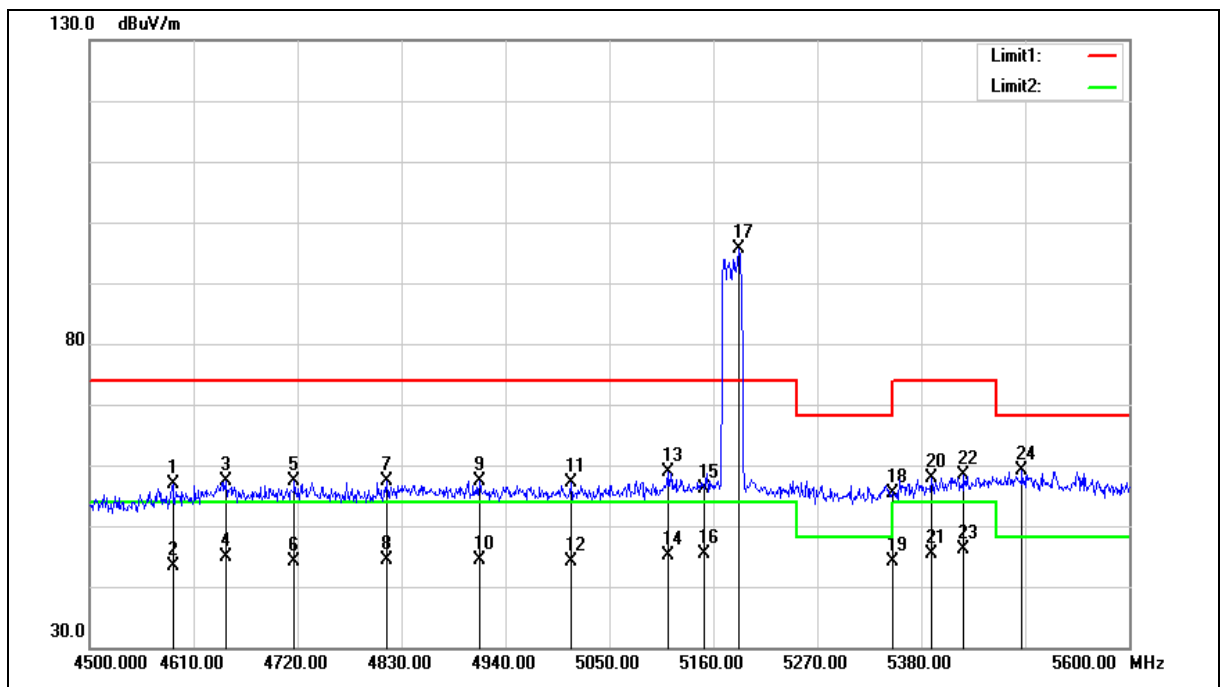

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4588.000	51.61	5.24	56.85	74.00	-17.15	peak
2	4588.000	38.26	5.24	43.50	54.00	-10.50	AVG
3	4644.100	51.85	5.42	57.27	74.00	-16.73	peak
4	4644.100	39.56	5.42	44.98	54.00	-9.02	AVG
5	4716.700	51.62	5.64	57.26	74.00	-16.74	peak
6	4716.700	38.49	5.64	44.13	54.00	-9.87	AVG
7	4814.600	51.54	5.94	57.48	74.00	-16.52	peak
8	4814.600	38.54	5.94	44.48	54.00	-9.52	AVG
9	4912.500	51.18	6.25	57.43	74.00	-16.57	peak
10	4912.500	38.11	6.25	44.36	54.00	-9.64	AVG
11	5009.300	50.59	6.54	57.13	74.00	-16.87	peak
12	5009.300	37.56	6.54	44.10	54.00	-9.90	AVG
13	5111.600	52.17	6.82	58.99	74.00	-15.01	peak
14	5111.600	38.30	6.82	45.12	54.00	-8.88	AVG
15	5150.000	49.18	6.94	56.12	74.00	-17.88	peak
16	5150.000	38.49	6.94	45.43	54.00	-8.57	AVG
17	5187.500	88.53	7.05	95.58	--	--	peak
18	5350.000	47.88	7.50	55.38	74.00	-18.62	peak
19	5350.000	36.75	7.50	44.25	54.00	-9.75	AVG
20	5391.000	50.33	7.62	57.95	74.00	-16.05	peak
21	5391.000	37.67	7.62	45.29	54.00	-8.71	AVG
22	5425.100	50.71	7.73	58.44	74.00	-15.56	peak
23	5425.100	38.28	7.73	46.01	54.00	-7.99	AVG
24	5486.700	51.20	7.90	59.10	68.20	-9.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

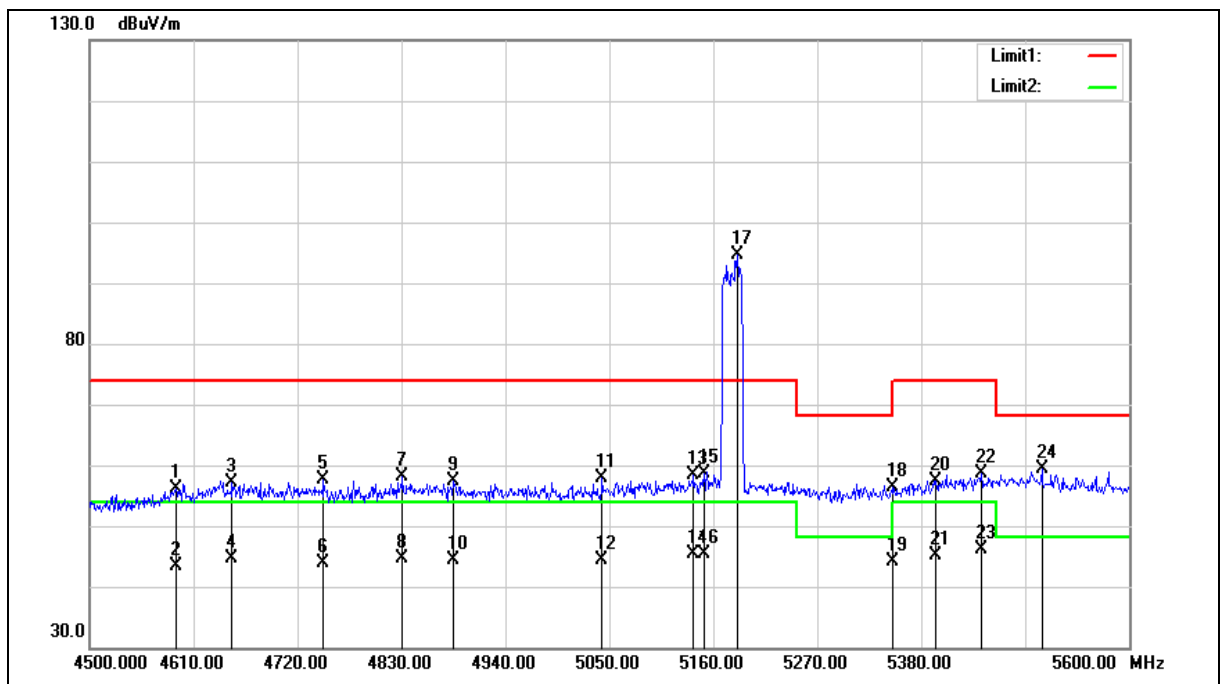

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4591.300	50.88	5.25	56.13	74.00	-17.87	peak
2	4591.300	38.21	5.25	43.46	54.00	-10.54	AVG
3	4650.700	51.79	5.44	57.23	74.00	-16.77	peak
4	4650.700	39.13	5.44	44.57	54.00	-9.43	AVG
5	4747.500	51.87	5.73	57.60	74.00	-16.40	peak
6	4747.500	38.16	5.73	43.89	54.00	-10.11	AVG
7	4831.100	52.10	5.99	58.09	74.00	-15.91	peak
8	4831.100	38.57	5.99	44.56	54.00	-9.44	AVG
9	4885.000	51.10	6.16	57.26	74.00	-16.74	peak
10	4885.000	38.30	6.16	44.46	54.00	-9.54	AVG
11	5042.300	51.23	6.63	57.86	74.00	-16.14	peak
12	5042.300	37.76	6.63	44.39	54.00	-9.61	AVG
13	5139.100	51.54	6.91	58.45	74.00	-15.55	peak
14	5139.100	38.55	6.91	45.46	54.00	-8.54	AVG
15	5150.000	51.73	6.94	58.67	74.00	-15.33	peak
16	5150.000	38.47	6.94	45.41	54.00	-8.59	AVG
17	5185.300	87.47	7.04	94.51	--	--	peak
18	5350.000	48.77	7.50	56.27	74.00	-17.73	peak
19	5350.000	36.69	7.50	44.19	54.00	-9.81	AVG
20	5395.400	49.84	7.64	57.48	74.00	-16.52	peak
21	5395.400	37.56	7.64	45.20	54.00	-8.80	AVG
22	5443.800	50.87	7.77	58.64	74.00	-15.36	peak
23	5443.800	38.26	7.77	46.03	54.00	-7.97	AVG
24	5507.600	51.52	7.95	59.47	68.20	-8.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

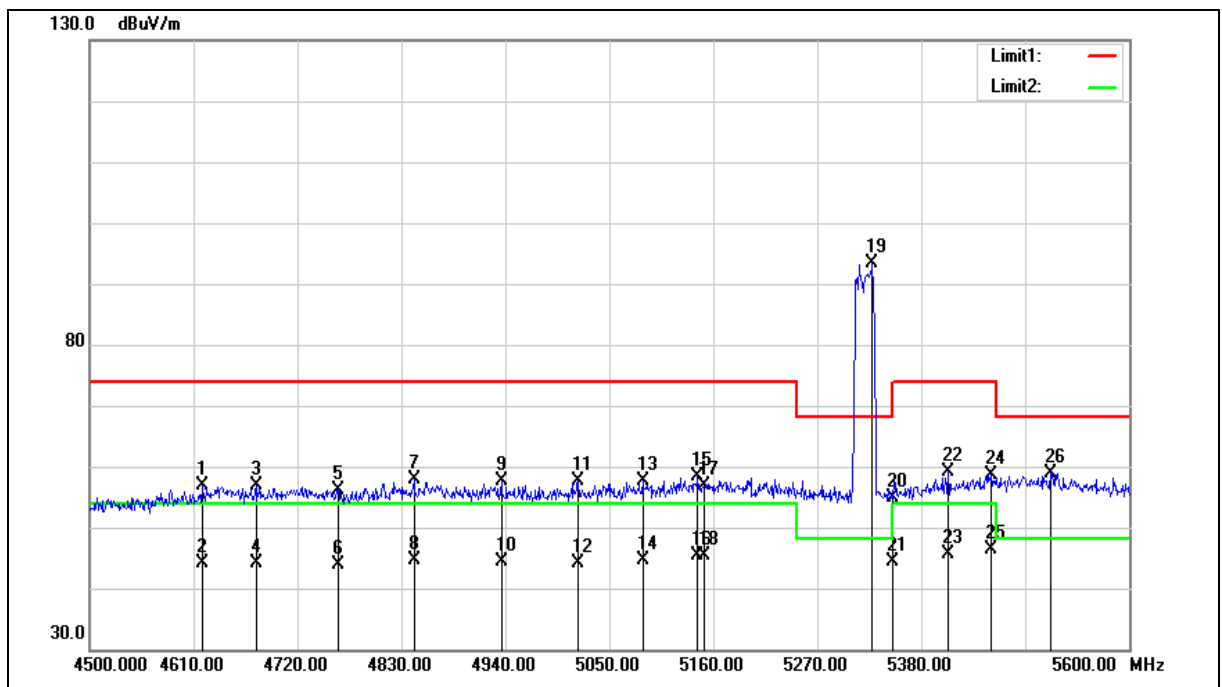

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4618.800	51.43	5.34	56.77	74.00	-17.23	peak
2	4618.800	38.68	5.34	44.02	54.00	-9.98	AVG
3	4676.000	51.45	5.52	56.97	74.00	-17.03	peak
4	4676.000	38.60	5.52	44.12	54.00	-9.88	AVG
5	4762.900	50.47	5.78	56.25	74.00	-17.75	peak
6	4762.900	38.14	5.78	43.92	54.00	-10.08	AVG
7	4843.200	51.84	6.03	57.87	74.00	-16.13	peak
8	4843.200	38.65	6.03	44.68	54.00	-9.32	AVG
9	4935.600	51.37	6.31	57.68	74.00	-16.32	peak
10	4935.600	38.05	6.31	44.36	54.00	-9.64	AVG
11	5017.000	51.01	6.56	57.57	74.00	-16.43	peak
12	5017.000	37.57	6.56	44.13	54.00	-9.87	AVG
13	5085.200	50.94	6.75	57.69	74.00	-16.31	peak
14	5085.200	37.96	6.75	44.71	54.00	-9.29	AVG
15	5143.500	51.36	6.92	58.28	74.00	-15.72	peak
16	5143.500	38.45	6.92	45.37	54.00	-8.63	AVG
17	5150.000	49.84	6.94	56.78	74.00	-17.22	peak
18	5150.000	38.43	6.94	45.37	54.00	-8.63	AVG
19	5328.300	85.87	7.44	93.31	--	--	peak
20	5350.000	47.37	7.50	54.87	74.00	-19.13	peak
21	5350.000	36.85	7.50	44.35	54.00	-9.65	AVG
22	5408.600	51.53	7.68	59.21	74.00	-14.79	peak
23	5408.600	37.97	7.68	45.65	54.00	-8.35	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5453.700	50.87	7.80	58.67	74.00	-15.33	peak
25	5453.700	38.58	7.80	46.38	54.00	-7.62	AVG
26	5517.500	50.80	7.97	58.77	68.20	-9.43	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

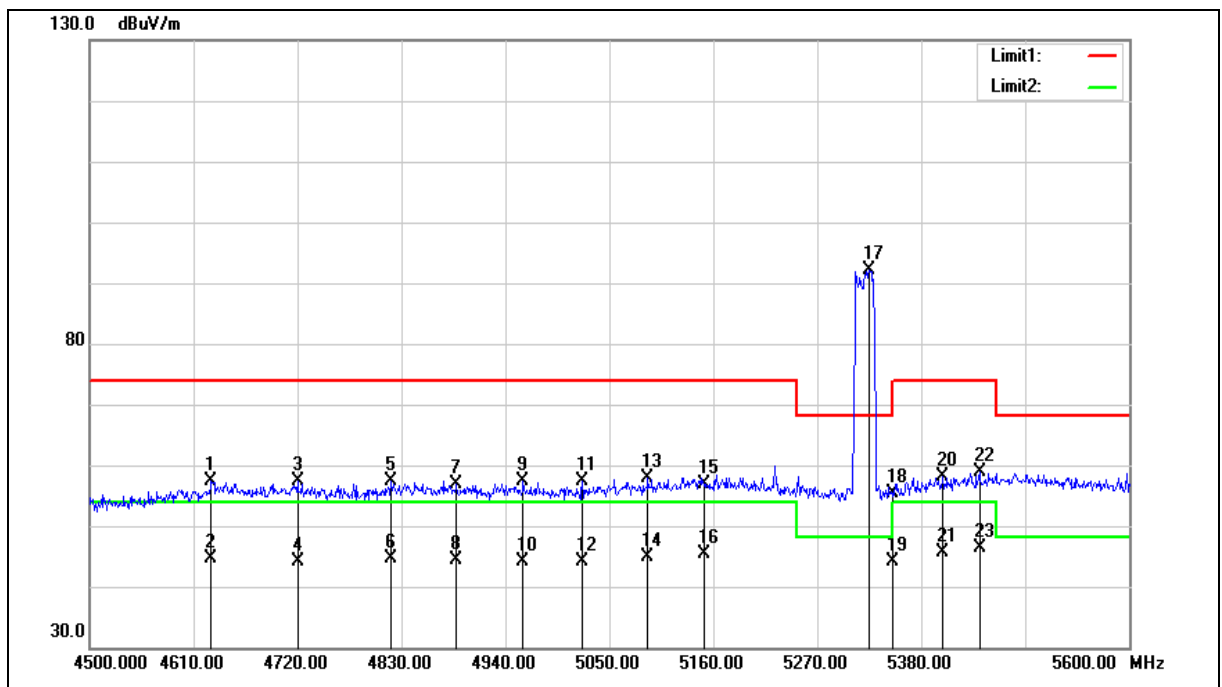

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.700	51.96	5.37	57.33	74.00	-16.67	peak
2	4628.700	39.19	5.37	44.56	54.00	-9.44	AVG
3	4720.000	51.70	5.65	57.35	74.00	-16.65	peak
4	4720.000	38.50	5.65	44.15	54.00	-9.85	AVG
5	4819.000	51.40	5.95	57.35	74.00	-16.65	peak
6	4819.000	38.59	5.95	44.54	54.00	-9.46	AVG
7	4888.300	50.70	6.16	56.86	74.00	-17.14	peak
8	4888.300	38.32	6.16	44.48	54.00	-9.52	AVG
9	4958.700	50.88	6.38	57.26	74.00	-16.74	peak
10	4958.700	37.87	6.38	44.25	54.00	-9.75	AVG
11	5021.400	50.69	6.57	57.26	74.00	-16.74	peak
12	5021.400	37.64	6.57	44.21	54.00	-9.79	AVG
13	5090.700	51.23	6.76	57.99	74.00	-16.01	peak
14	5090.700	38.11	6.76	44.87	54.00	-9.13	AVG
15	5150.000	49.93	6.94	56.87	74.00	-17.13	peak
16	5150.000	38.49	6.94	45.43	54.00	-8.57	AVG
17	5325.000	84.74	7.44	92.18	--	--	peak
18	5350.000	47.98	7.50	55.48	74.00	-18.52	peak
19	5350.000	36.74	7.50	44.24	54.00	-9.76	AVG
20	5403.100	50.51	7.66	58.17	74.00	-15.83	peak
21	5403.100	37.94	7.66	45.60	54.00	-8.40	AVG
22	5441.600	51.11	7.76	58.87	74.00	-15.13	peak
23	5441.600	38.53	7.76	46.29	54.00	-7.71	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

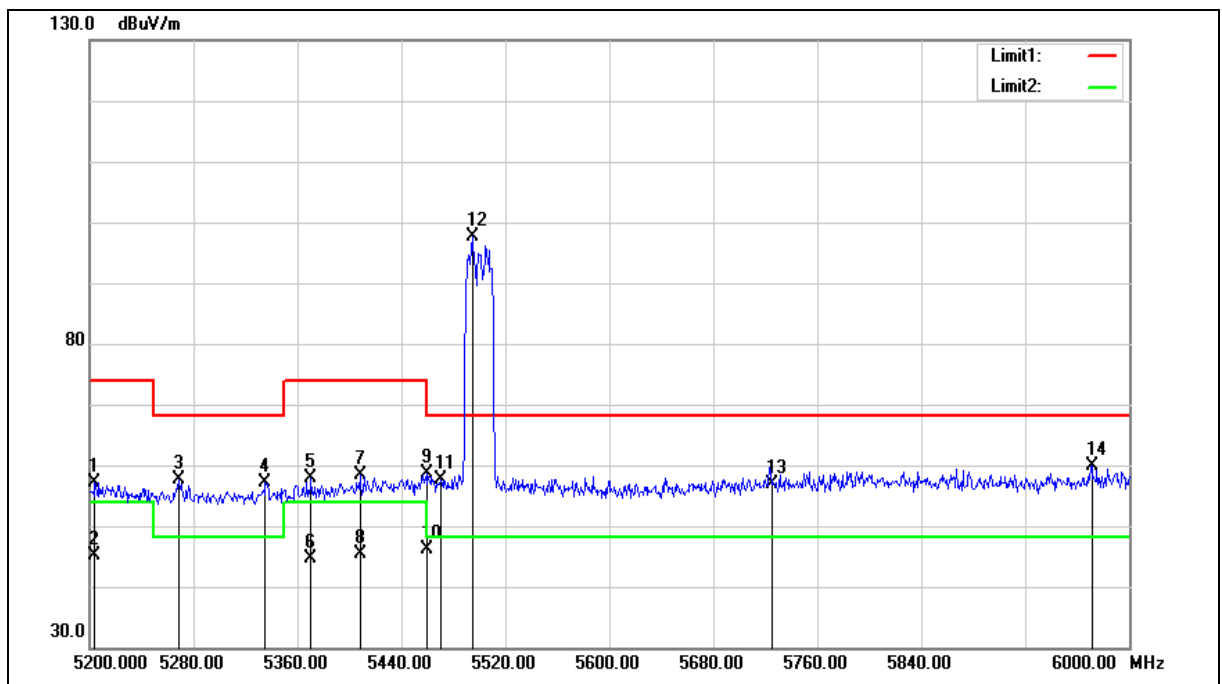

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5204.000	50.11	7.09	57.20	74.00	-16.80	peak
2	5204.000	37.99	7.09	45.08	54.00	-8.92	AVG
3	5268.800	50.24	7.27	57.51	68.20	-10.69	peak
4	5335.200	49.60	7.46	57.06	68.20	-11.14	peak
5	5370.400	50.36	7.56	57.92	74.00	-16.08	peak
6	5370.400	37.08	7.56	44.64	54.00	-9.36	AVG
7	5408.000	50.69	7.67	58.36	74.00	-15.64	peak
8	5408.000	37.77	7.67	45.44	54.00	-8.56	AVG
9	5460.000	50.81	7.82	58.63	74.00	-15.37	peak
10	5460.000	38.37	7.82	46.19	54.00	-7.81	AVG
11	5470.000	49.84	7.85	57.69	68.20	-10.51	peak
12	5494.400	89.65	7.91	97.56	--	--	peak
13	5725.000	48.43	8.39	56.82	68.20	-11.38	peak
14	5971.200	51.11	8.88	59.99	68.20	-8.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

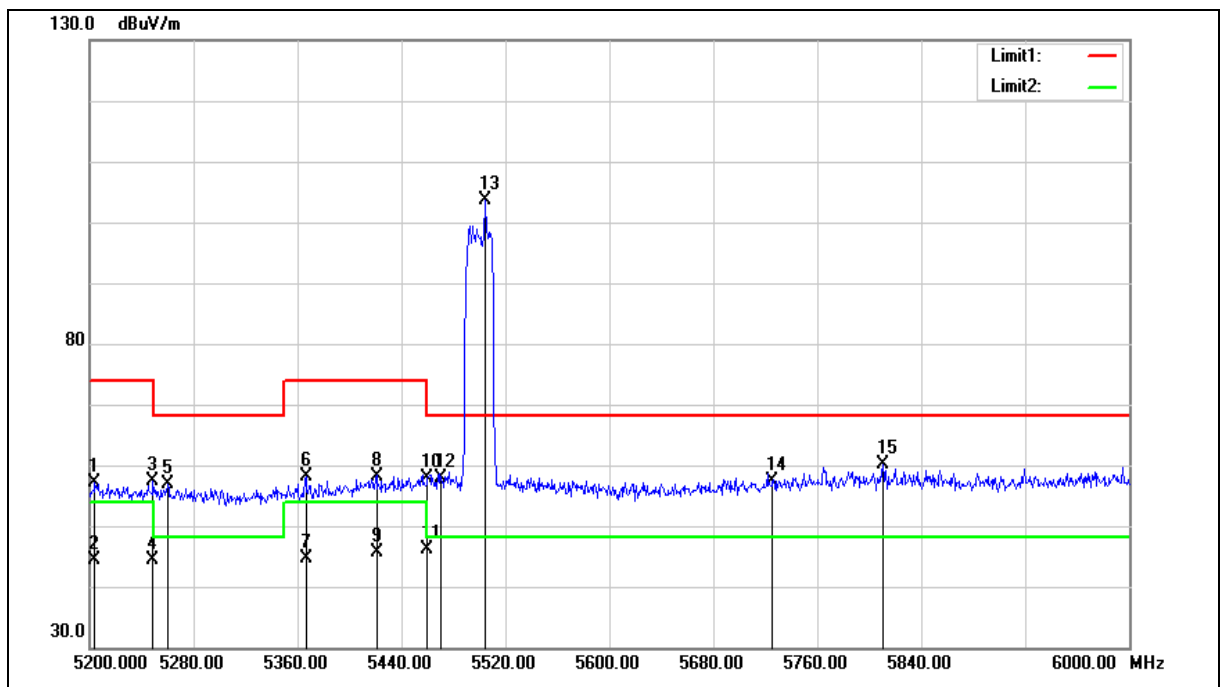

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5204.000	50.13	7.09	57.22	74.00	-16.78	peak
2	5204.000	37.20	7.09	44.29	54.00	-9.71	AVG
3	5248.800	50.20	7.22	57.42	74.00	-16.58	peak
4	5248.800	37.21	7.22	44.43	54.00	-9.57	AVG
5	5260.000	49.58	7.25	56.83	68.20	-11.37	peak
6	5366.400	50.57	7.55	58.12	74.00	-15.88	peak
7	5366.400	36.97	7.55	44.52	54.00	-9.48	AVG
8	5420.800	50.54	7.71	58.25	74.00	-15.75	peak
9	5420.800	38.01	7.71	45.72	54.00	-8.28	AVG
10	5460.000	50.03	7.82	57.85	74.00	-16.15	peak
11	5460.000	38.41	7.82	46.23	54.00	-7.77	AVG
12	5470.000	50.15	7.85	58.00	68.20	-10.20	peak
13	5504.000	95.60	7.93	103.53	--	--	peak
14	5725.000	49.00	8.39	57.39	68.20	-10.81	peak
15	5810.400	51.47	8.55	60.02	68.20	-8.18	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

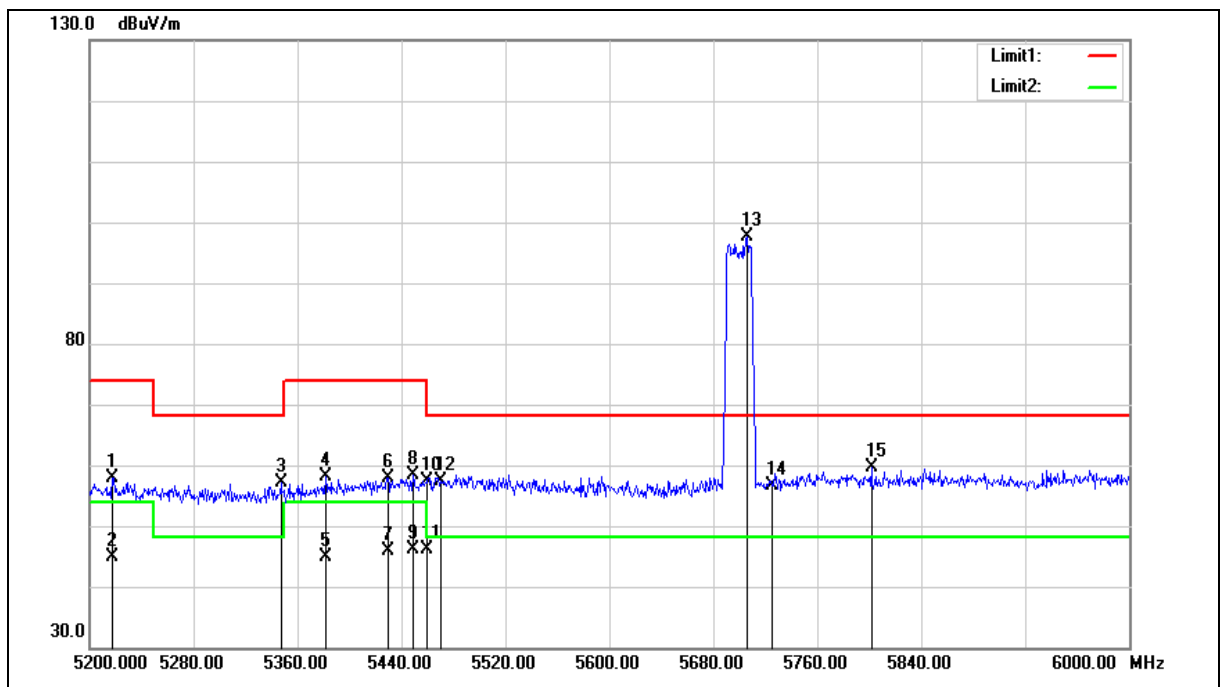

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5217.600	50.74	7.13	57.87	74.00	-16.13	peak
2	5217.600	37.76	7.13	44.89	54.00	-9.11	AVG
3	5347.200	49.65	7.49	57.14	68.20	-11.06	peak
4	5381.600	50.62	7.60	58.22	74.00	-15.78	peak
5	5381.600	37.32	7.60	44.92	54.00	-9.08	AVG
6	5429.600	50.12	7.73	57.85	74.00	-16.15	peak
7	5429.600	38.10	7.73	45.83	54.00	-8.17	AVG
8	5448.800	50.63	7.79	58.42	74.00	-15.58	peak
9	5448.800	38.29	7.79	46.08	54.00	-7.92	AVG
10	5460.000	49.44	7.82	57.26	74.00	-16.74	peak
11	5460.000	38.31	7.82	46.13	54.00	-7.87	AVG
12	5470.000	49.62	7.85	57.47	68.20	-10.73	peak
13	5706.400	89.18	8.35	97.53	--	--	peak
14	5725.000	48.32	8.39	56.71	68.20	-11.49	peak
15	5801.600	51.00	8.54	59.54	68.20	-8.66	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

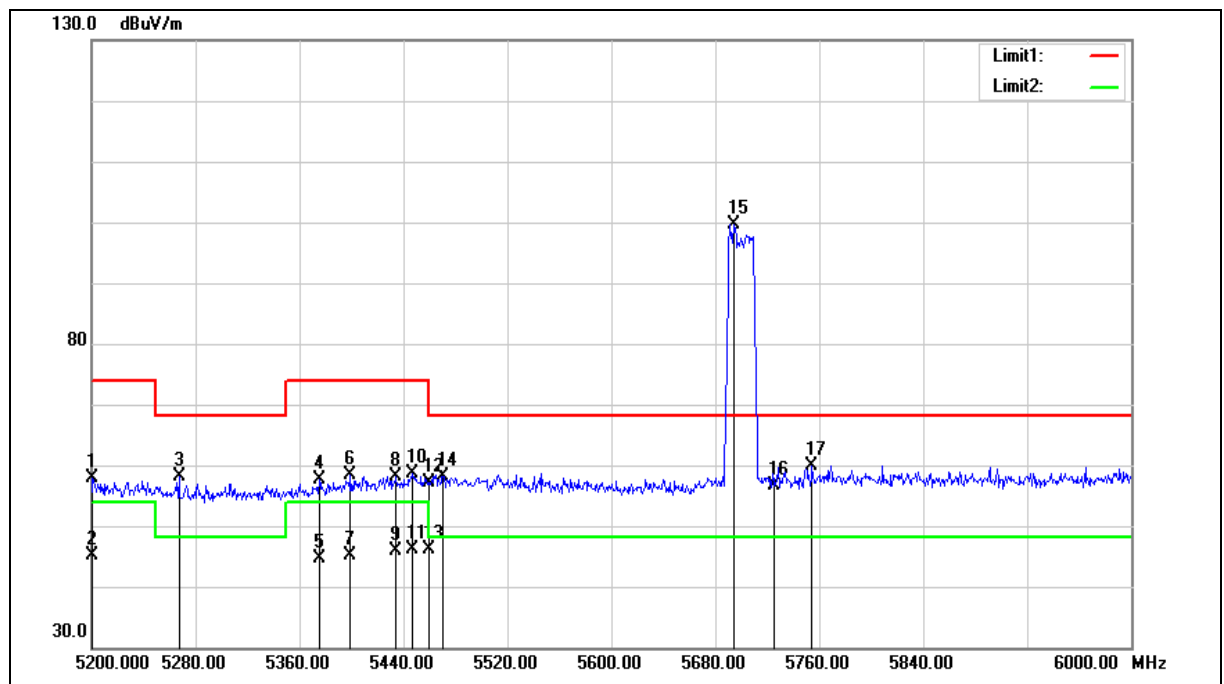

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5200.800	50.89	7.08	57.97	74.00	-16.03	peak
2	5200.800	38.02	7.08	45.10	54.00	-8.90	AVG
3	5267.200	50.94	7.27	58.21	68.20	-9.99	peak
4	5375.200	49.99	7.59	57.58	74.00	-16.42	peak
5	5375.200	37.14	7.59	44.73	54.00	-9.27	AVG
6	5399.200	50.74	7.65	58.39	74.00	-15.61	peak
7	5399.200	37.60	7.65	45.25	54.00	-8.75	AVG
8	5434.400	50.50	7.74	58.24	74.00	-15.76	peak
9	5434.400	38.22	7.74	45.96	54.00	-8.04	AVG
10	5447.200	50.78	7.78	58.56	74.00	-15.44	peak
11	5447.200	38.34	7.78	46.12	54.00	-7.88	AVG
12	5460.000	49.26	7.82	57.08	74.00	-16.92	peak
13	5460.000	38.32	7.82	46.14	54.00	-7.86	AVG
14	5470.000	50.34	7.85	58.19	68.20	-10.01	peak
15	5694.400	91.36	8.32	99.68	--	--	peak
16	5725.000	48.31	8.39	56.70	68.20	-11.50	peak
17	5754.400	51.50	8.44	59.94	68.20	-8.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

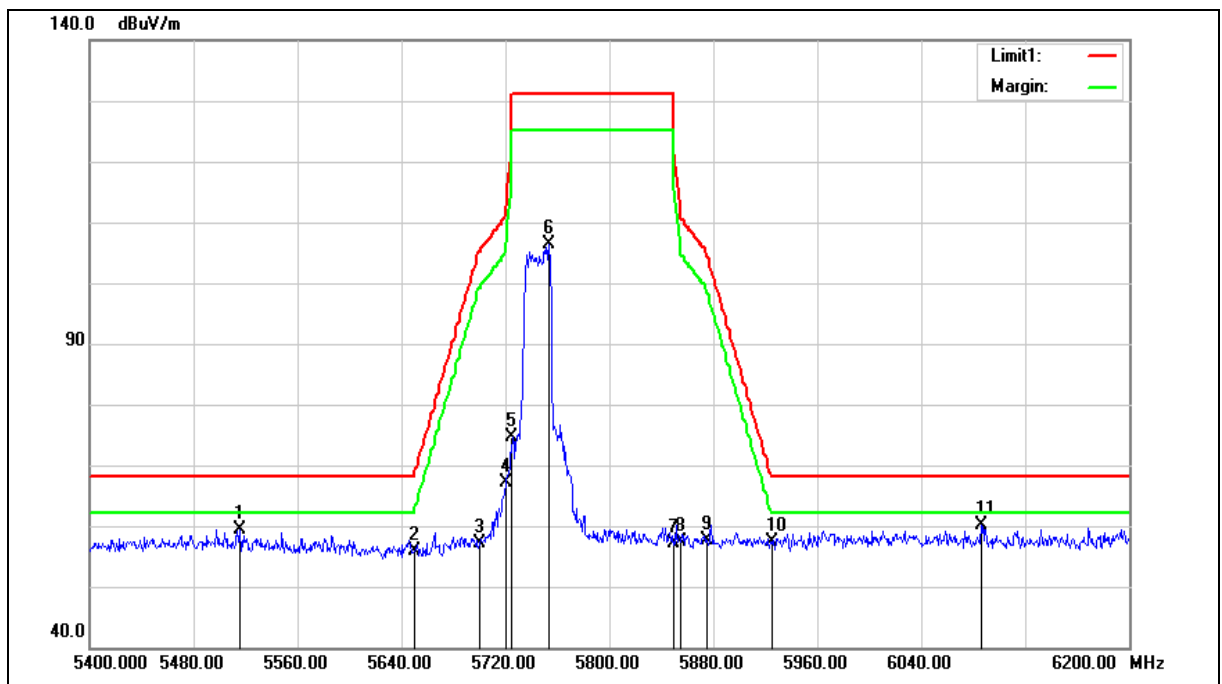

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5515.200	51.35	7.96	59.31	68.20	-8.89	peak
2	5650.000	47.52	8.24	55.76	68.20	-12.44	peak
3	5700.000	48.72	8.34	57.06	105.20	-48.14	peak
4	5720.000	58.85	8.38	67.23	110.80	-43.57	peak
5	5725.000	66.19	8.39	74.58	122.20	-47.62	peak
6	5753.600	97.87	8.44	106.31	--	--	peak
7	5850.000	48.61	8.63	57.24	122.20	-64.96	peak
8	5855.000	48.63	8.64	57.27	110.80	-53.53	peak
9	5875.000	48.90	8.69	57.59	105.20	-47.61	peak
10	5925.000	48.66	8.79	57.45	68.20	-10.75	peak
11	6086.400	50.95	9.20	60.15	68.20	-8.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

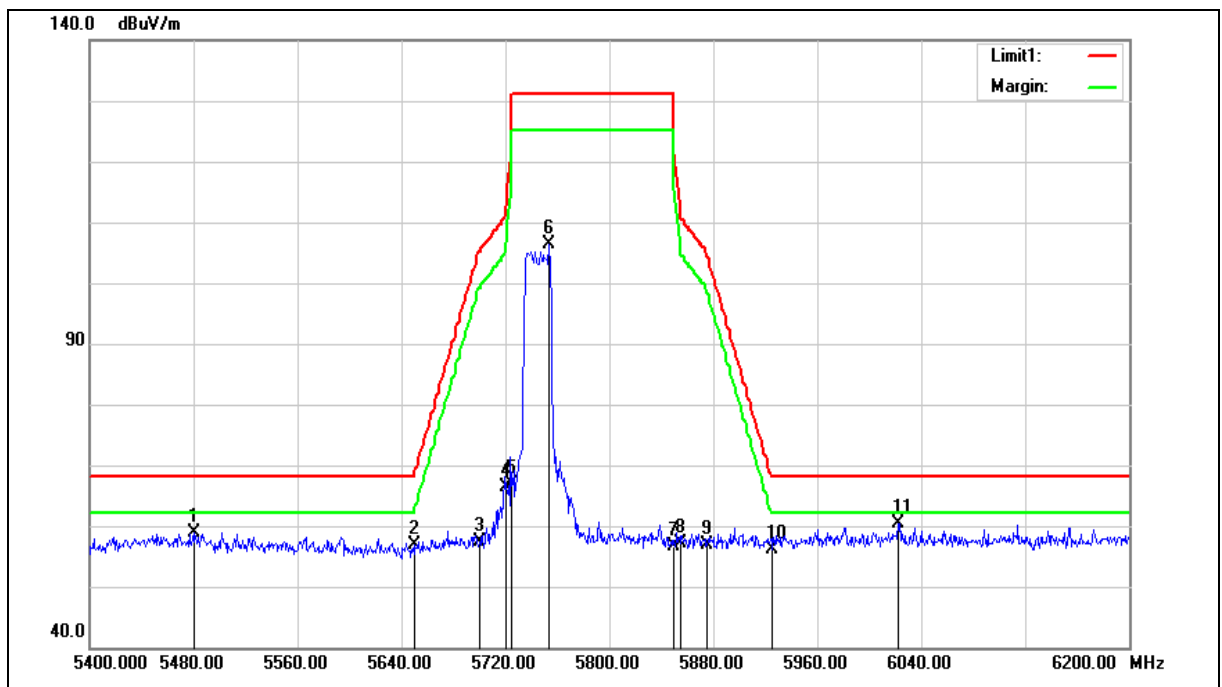

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5480.000	51.02	7.87	58.89	68.20	-9.31	peak
2	5650.000	48.59	8.24	56.83	68.20	-11.37	peak
3	5700.000	48.96	8.34	57.30	105.20	-47.90	peak
4	5720.000	57.94	8.38	66.32	110.80	-44.48	peak
5	5725.000	58.58	8.39	66.97	122.20	-55.23	peak
6	5753.600	98.02	8.44	106.46	--	--	peak
7	5850.000	47.95	8.63	56.58	122.20	-65.62	peak
8	5855.000	48.40	8.64	57.04	110.80	-53.76	peak
9	5875.000	48.14	8.69	56.83	105.20	-48.37	peak
10	5925.000	47.43	8.79	56.22	68.20	-11.98	peak
11	6022.400	51.43	9.01	60.44	68.20	-7.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

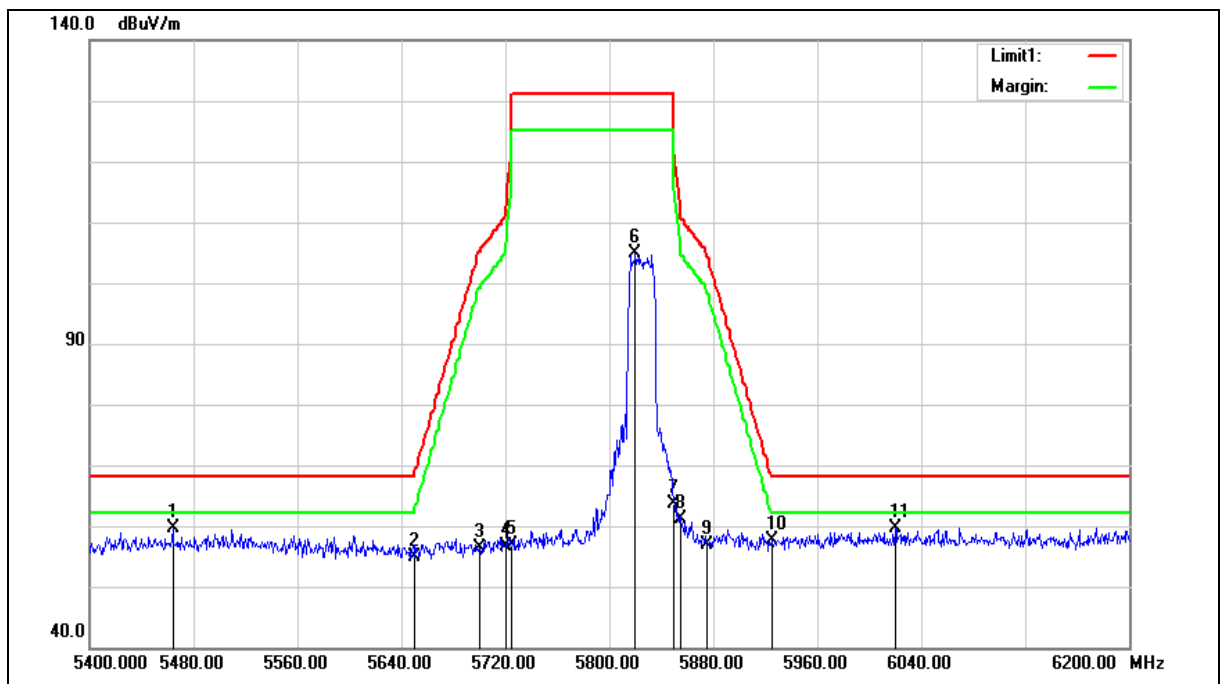

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5464.000	51.75	7.83	59.58	68.20	-8.62	peak
2	5650.000	46.63	8.24	54.87	68.20	-13.33	peak
3	5700.000	48.02	8.34	56.36	105.20	-48.84	peak
4	5720.000	48.33	8.38	56.71	110.80	-54.09	peak
5	5725.000	48.46	8.39	56.85	122.20	-65.35	peak
6	5820.000	96.26	8.57	104.83	--	--	peak
7	5850.000	55.02	8.63	63.65	122.20	-58.55	peak
8	5855.000	52.53	8.64	61.17	110.80	-49.63	peak
9	5875.000	48.11	8.69	56.80	105.20	-48.40	peak
10	5925.000	48.86	8.79	57.65	68.20	-10.55	peak
11	6020.000	50.74	9.00	59.74	68.20	-8.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		

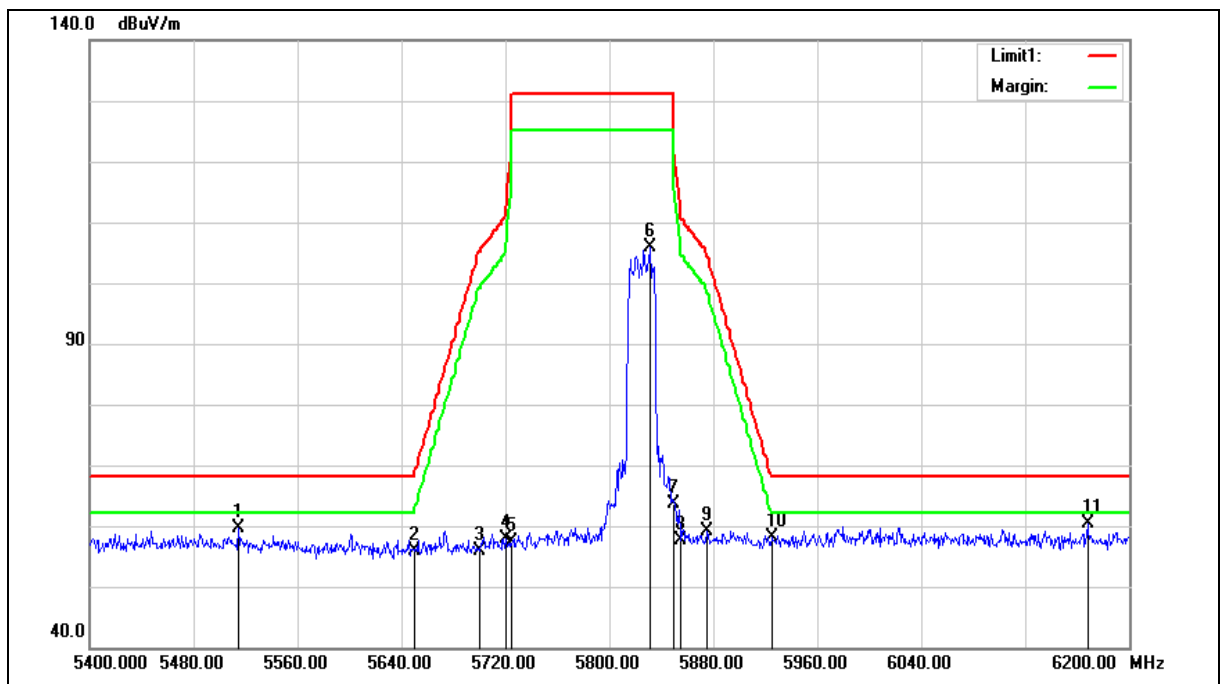

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5514.400	51.62	7.95	59.57	68.20	-8.63	peak
2	5650.000	47.70	8.24	55.94	68.20	-12.26	peak
3	5700.000	47.61	8.34	55.95	105.20	-49.25	peak
4	5720.000	49.61	8.38	57.99	110.80	-52.81	peak
5	5725.000	48.87	8.39	57.26	122.20	-64.94	peak
6	5831.200	97.19	8.59	105.78	--	--	peak
7	5850.000	54.92	8.63	63.55	122.20	-58.65	peak
8	5855.000	49.11	8.64	57.75	110.80	-53.05	peak
9	5875.000	50.56	8.69	59.25	105.20	-45.95	peak
10	5925.000	49.34	8.79	58.13	68.20	-10.07	peak
11	6168.000	51.02	9.44	60.46	68.20	-7.74	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

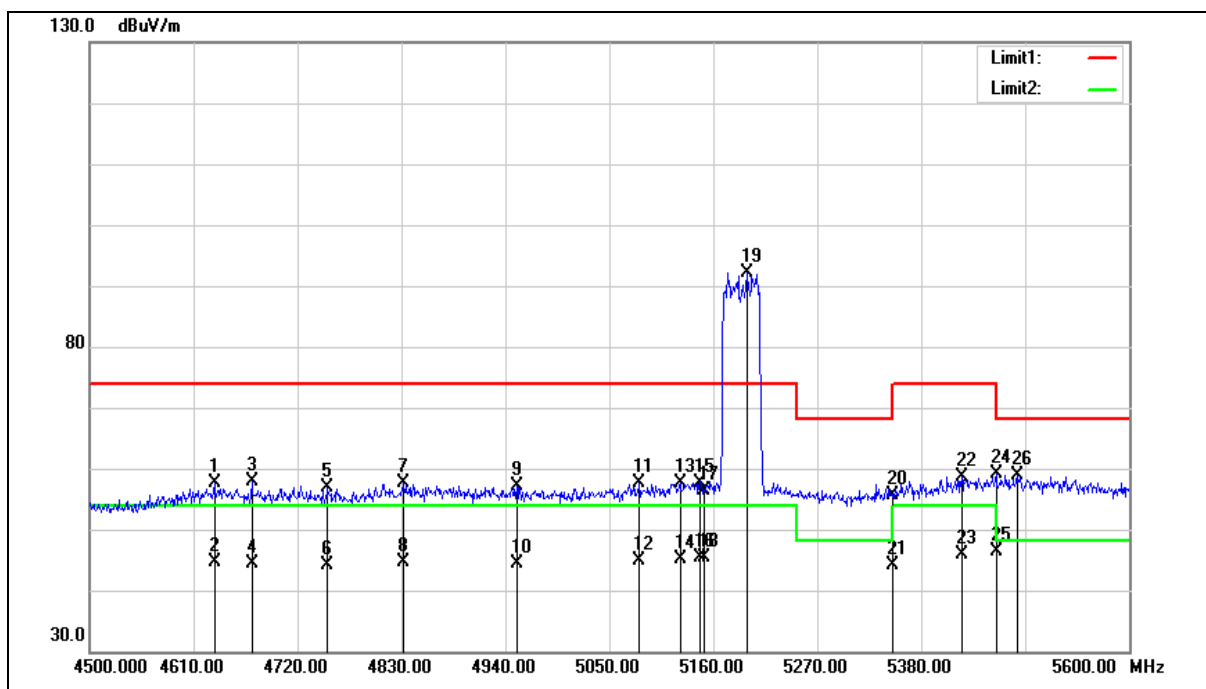

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.000	52.20	5.38	57.58	74.00	-16.42	peak
2	4632.000	39.34	5.38	44.72	54.00	-9.28	AVG
3	4671.600	52.35	5.51	57.86	74.00	-16.14	peak
4	4671.600	38.90	5.51	44.41	54.00	-9.59	AVG
5	4751.900	51.10	5.75	56.85	74.00	-17.15	peak
6	4751.900	38.28	5.75	44.03	54.00	-9.97	AVG
7	4832.200	51.60	5.99	57.59	74.00	-16.41	peak
8	4832.200	38.52	5.99	44.51	54.00	-9.49	AVG
9	4952.100	50.80	6.36	57.16	74.00	-16.84	peak
10	4952.100	37.99	6.36	44.35	54.00	-9.65	AVG
11	5081.900	50.79	6.74	57.53	74.00	-16.47	peak
12	5081.900	38.11	6.74	44.85	54.00	-9.15	AVG
13	5124.800	50.82	6.85	57.67	74.00	-16.33	peak
14	5124.800	38.38	6.85	45.23	54.00	-8.77	AVG
15	5145.700	50.82	6.93	57.75	74.00	-16.25	peak
16	5145.700	38.47	6.93	45.40	54.00	-8.60	AVG
17	5150.000	49.34	6.94	56.28	74.00	-17.72	peak
18	5150.000	38.54	6.94	45.48	54.00	-8.52	AVG
19	5195.200	85.17	7.07	92.24	--	--	peak
20	5350.000	48.08	7.50	55.58	74.00	-18.42	peak
21	5350.000	36.74	7.50	44.24	54.00	-9.76	AVG
22	5422.900	50.94	7.71	58.65	74.00	-15.35	peak
23	5422.900	38.15	7.71	45.86	54.00	-8.14	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5459.200	51.33	7.82	59.15	74.00	-14.85	peak
25	5459.200	38.50	7.82	46.32	54.00	-7.68	AVG
26	5481.200	50.95	7.88	58.83	68.20	-9.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

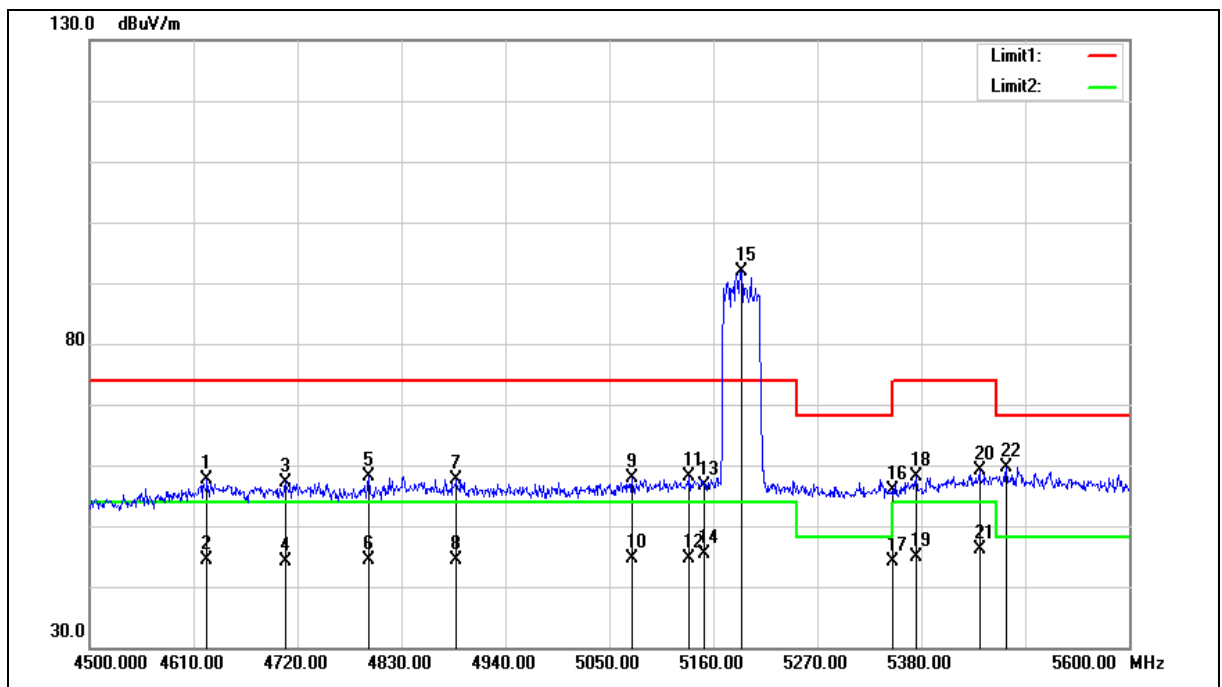

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4624.300	52.32	5.36	57.68	74.00	-16.32	peak
2	4624.300	38.91	5.36	44.27	54.00	-9.73	AVG
3	4706.800	51.65	5.60	57.25	74.00	-16.75	peak
4	4706.800	38.52	5.60	44.12	54.00	-9.88	AVG
5	4794.800	52.28	5.89	58.17	74.00	-15.83	peak
6	4794.800	38.43	5.89	44.32	54.00	-9.68	AVG
7	4888.300	51.55	6.16	57.71	74.00	-16.29	peak
8	4888.300	38.33	6.16	44.49	54.00	-9.51	AVG
9	5074.200	51.17	6.71	57.88	74.00	-16.12	peak
10	5074.200	38.01	6.71	44.72	54.00	-9.28	AVG
11	5134.700	51.20	6.89	58.09	74.00	-15.91	peak
12	5134.700	37.83	6.89	44.72	54.00	-9.28	AVG
13	5150.000	49.66	6.94	56.60	74.00	-17.40	peak
14	5150.000	38.51	6.94	45.45	54.00	-8.55	AVG
15	5189.700	84.88	7.05	91.93	--	--	peak
16	5350.000	48.40	7.50	55.90	74.00	-18.10	peak
17	5350.000	36.71	7.50	44.21	54.00	-9.79	AVG
18	5374.500	50.58	7.56	58.14	74.00	-15.86	peak
19	5374.500	37.28	7.56	44.84	54.00	-9.16	AVG
20	5441.600	51.41	7.76	59.17	74.00	-14.83	peak
21	5441.600	38.32	7.76	46.08	54.00	-7.92	AVG
22	5470.200	51.87	7.85	59.72	68.20	-8.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

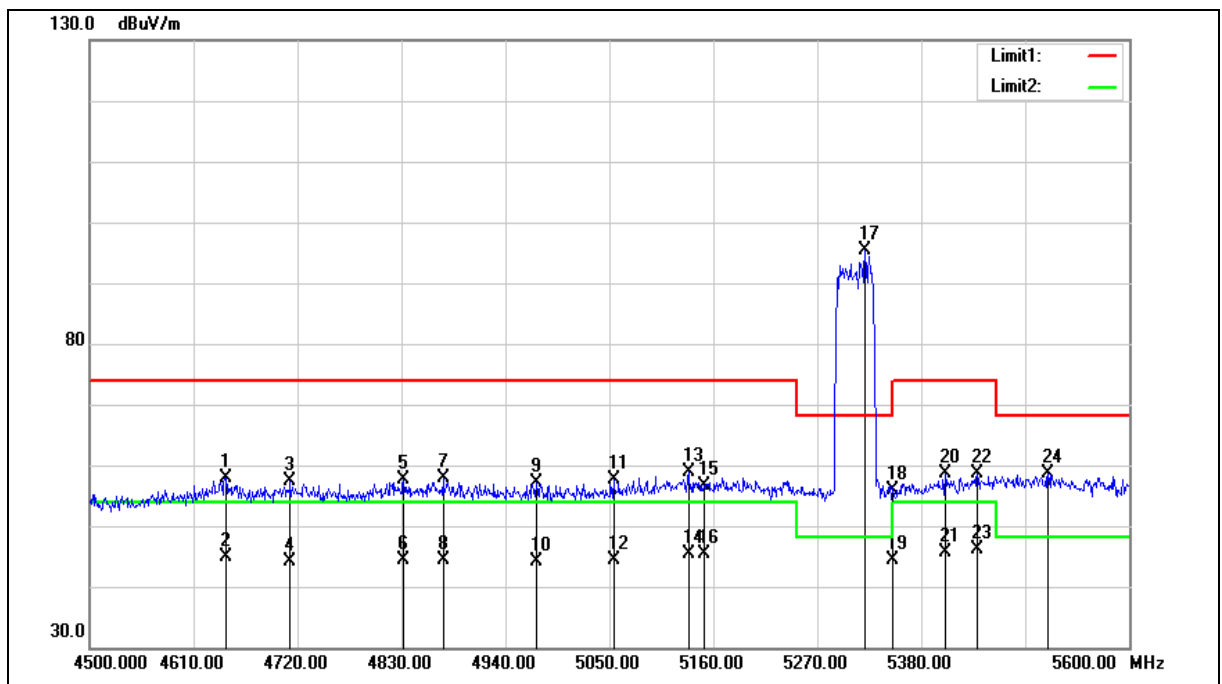

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.49	5.42	57.91	74.00	-16.09	peak
2	4644.100	39.45	5.42	44.87	54.00	-9.13	AVG
3	4712.300	51.78	5.63	57.41	74.00	-16.59	peak
4	4712.300	38.45	5.63	44.08	54.00	-9.92	AVG
5	4832.200	51.54	5.99	57.53	74.00	-16.47	peak
6	4832.200	38.49	5.99	44.48	54.00	-9.52	AVG
7	4874.000	51.86	6.12	57.98	74.00	-16.02	peak
8	4874.000	38.35	6.12	44.47	54.00	-9.53	AVG
9	4973.000	50.77	6.43	57.20	74.00	-16.80	peak
10	4973.000	37.76	6.43	44.19	54.00	-9.81	AVG
11	5054.400	50.88	6.66	57.54	74.00	-16.46	peak
12	5054.400	37.70	6.66	44.36	54.00	-9.64	AVG
13	5133.600	52.01	6.89	58.90	74.00	-15.10	peak
14	5133.600	38.50	6.89	45.39	54.00	-8.61	AVG
15	5150.000	49.81	6.94	56.75	74.00	-17.25	peak
16	5150.000	38.48	6.94	45.42	54.00	-8.58	AVG
17	5320.600	87.97	7.42	95.39	--	--	peak
18	5350.000	48.40	7.50	55.90	74.00	-18.10	peak
19	5350.000	36.91	7.50	44.41	54.00	-9.59	AVG
20	5405.300	50.92	7.67	58.59	74.00	-15.41	peak
21	5405.300	37.98	7.67	45.65	54.00	-8.35	AVG
22	5439.400	50.79	7.76	58.55	74.00	-15.45	peak
23	5439.400	38.26	7.76	46.02	54.00	-7.98	AVG
24	5514.200	50.59	7.95	58.54	68.20	-9.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

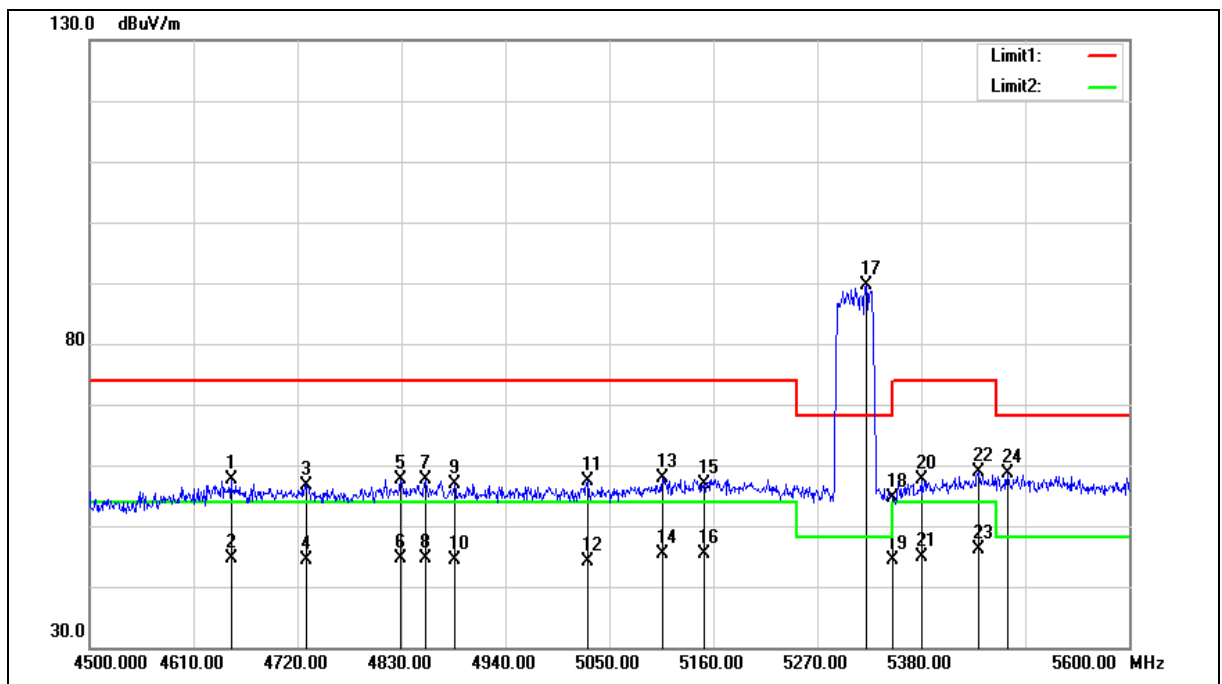

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4649.600	52.15	5.43	57.58	74.00	-16.42	peak
2	4649.600	39.16	5.43	44.59	54.00	-9.41	AVG
3	4728.800	51.05	5.68	56.73	74.00	-17.27	peak
4	4728.800	38.59	5.68	44.27	54.00	-9.73	AVG
5	4828.900	51.53	5.98	57.51	74.00	-16.49	peak
6	4828.900	38.55	5.98	44.53	54.00	-9.47	AVG
7	4855.300	51.44	6.07	57.51	74.00	-16.49	peak
8	4855.300	38.49	6.07	44.56	54.00	-9.44	AVG
9	4886.100	50.81	6.16	56.97	74.00	-17.03	peak
10	4886.100	38.32	6.16	44.48	54.00	-9.52	AVG
11	5026.900	50.75	6.59	57.34	74.00	-16.66	peak
12	5026.900	37.65	6.59	44.24	54.00	-9.76	AVG
13	5106.100	51.05	6.81	57.86	74.00	-16.14	peak
14	5106.100	38.51	6.81	45.32	54.00	-8.68	AVG
15	5150.000	49.96	6.94	56.90	74.00	-17.10	peak
16	5150.000	38.44	6.94	45.38	54.00	-8.62	AVG
17	5321.700	82.22	7.42	89.64	--	--	peak
18	5350.000	47.05	7.50	54.55	74.00	-19.45	peak
19	5350.000	36.77	7.50	44.27	54.00	-9.73	AVG
20	5380.000	50.07	7.59	57.66	74.00	-16.34	peak
21	5380.000	37.36	7.59	44.95	54.00	-9.05	AVG
22	5440.500	51.00	7.76	58.76	74.00	-15.24	peak
23	5440.500	38.27	7.76	46.03	54.00	-7.97	AVG
24	5471.300	50.77	7.85	58.62	68.20	-9.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

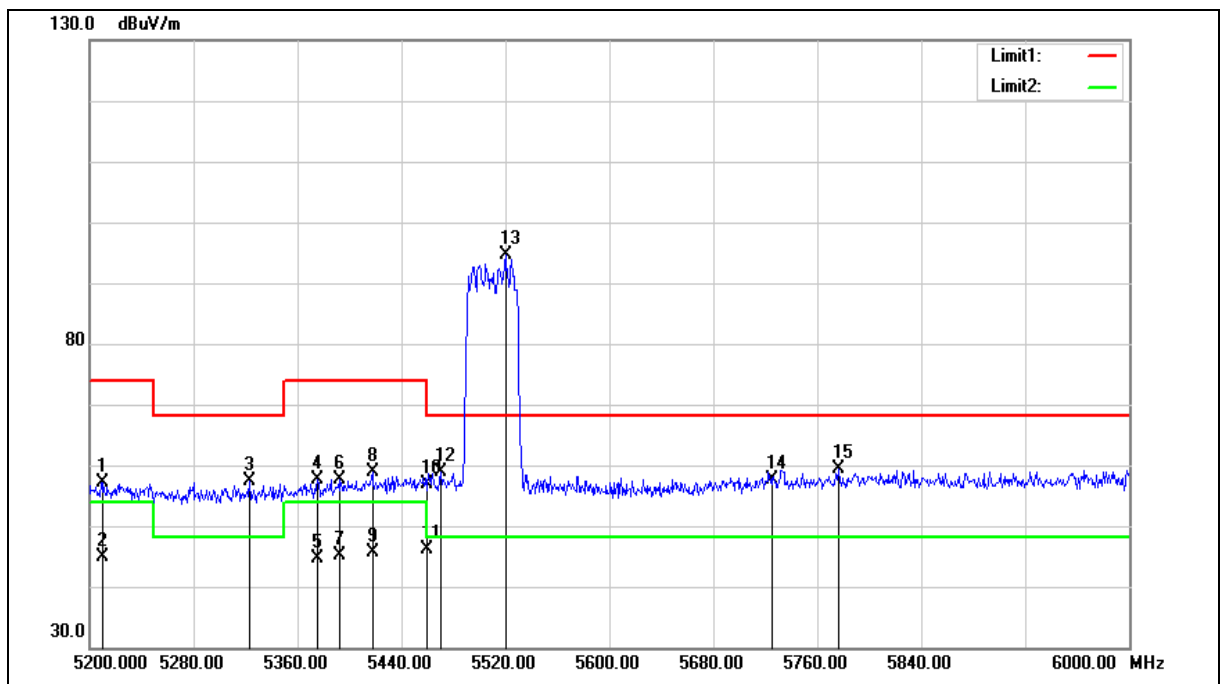

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5210.400	50.04	7.11	57.15	74.00	-16.85	peak
2	5210.400	37.86	7.11	44.97	54.00	-9.03	AVG
3	5323.200	49.93	7.42	57.35	68.20	-10.85	peak
4	5375.200	49.96	7.59	57.55	74.00	-16.45	peak
5	5375.200	37.15	7.59	44.74	54.00	-9.26	AVG
6	5392.000	49.96	7.63	57.59	74.00	-16.41	peak
7	5392.000	37.54	7.63	45.17	54.00	-8.83	AVG
8	5417.600	51.07	7.70	58.77	74.00	-15.23	peak
9	5417.600	37.95	7.70	45.65	54.00	-8.35	AVG
10	5460.000	49.12	7.82	56.94	74.00	-17.06	peak
11	5460.000	38.38	7.82	46.20	54.00	-7.80	AVG
12	5470.000	50.98	7.85	58.83	68.20	-9.37	peak
13	5520.000	86.62	7.97	94.59	--	--	peak
14	5725.000	49.18	8.39	57.57	68.20	-10.63	peak
15	5776.000	50.96	8.49	59.45	68.20	-8.75	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

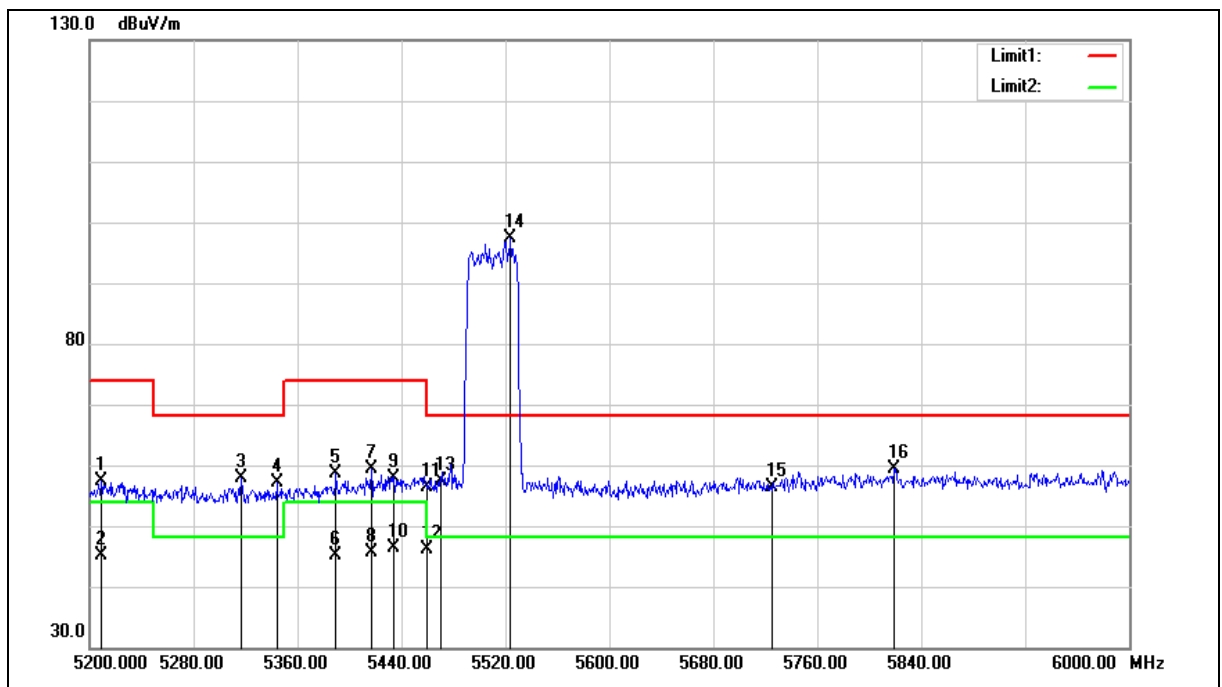

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	50.21	7.11	57.32	74.00	-16.68	peak
2	5208.800	37.93	7.11	45.04	54.00	-8.96	AVG
3	5316.800	50.42	7.41	57.83	68.20	-10.37	peak
4	5344.000	49.74	7.48	57.22	68.20	-10.98	peak
5	5389.600	51.07	7.62	58.69	74.00	-15.31	peak
6	5389.600	37.47	7.62	45.09	54.00	-8.91	AVG
7	5416.800	51.76	7.70	59.46	74.00	-14.54	peak
8	5416.800	37.97	7.70	45.67	54.00	-8.33	AVG
9	5434.400	50.26	7.74	58.00	74.00	-16.00	peak
10	5434.400	38.66	7.74	46.40	54.00	-7.60	AVG
11	5460.000	48.45	7.82	56.27	74.00	-17.73	peak
12	5460.000	38.38	7.82	46.20	54.00	-7.80	AVG
13	5470.000	49.45	7.85	57.30	68.20	-10.90	peak
14	5524.000	89.47	7.97	97.44	--	--	peak
15	5725.000	48.06	8.39	56.45	68.20	-11.75	peak
16	5819.200	50.86	8.57	59.43	68.20	-8.77	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

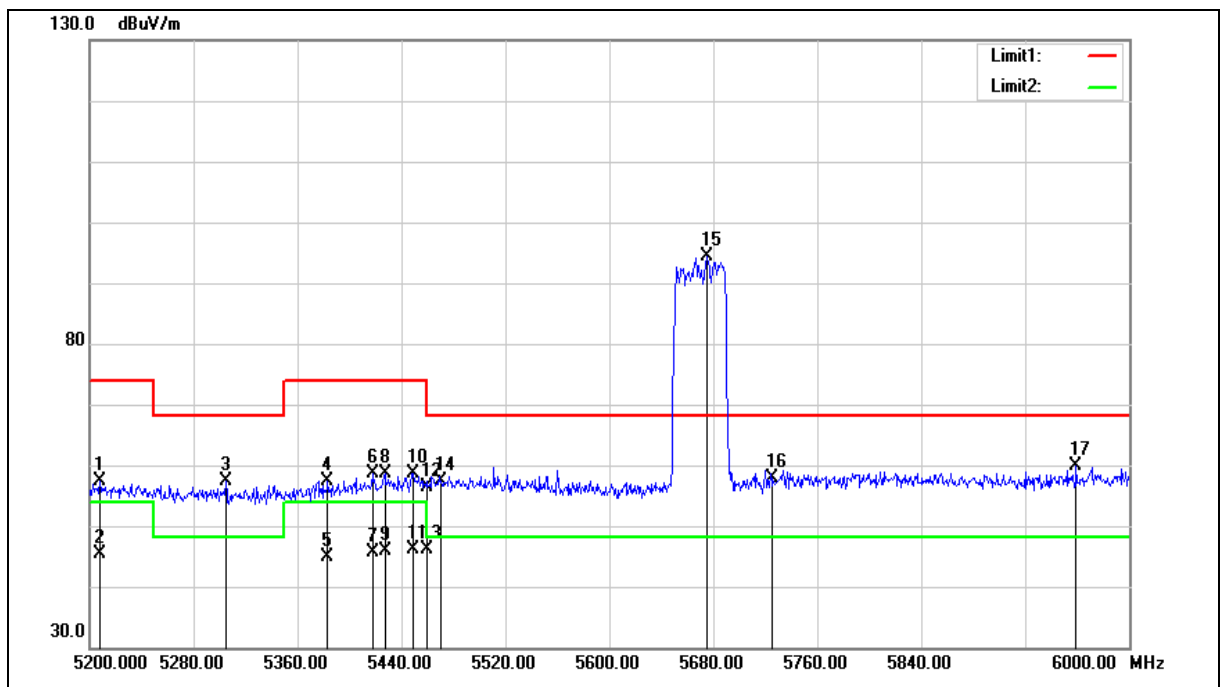

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.000	50.19	7.10	57.29	74.00	-16.71	peak
2	5208.000	38.28	7.10	45.38	54.00	-8.62	AVG
3	5304.800	50.04	7.37	57.41	68.20	-10.79	peak
4	5383.200	49.75	7.60	57.35	74.00	-16.65	peak
5	5383.200	37.35	7.60	44.95	54.00	-9.05	AVG
6	5417.600	50.97	7.70	58.67	74.00	-15.33	peak
7	5417.600	37.94	7.70	45.64	54.00	-8.36	AVG
8	5427.200	50.88	7.73	58.61	74.00	-15.39	peak
9	5427.200	38.10	7.73	45.83	54.00	-8.17	AVG
10	5448.800	50.92	7.79	58.71	74.00	-15.29	peak
11	5448.800	38.31	7.79	46.10	54.00	-7.90	AVG
12	5460.000	48.51	7.82	56.33	74.00	-17.67	peak
13	5460.000	38.35	7.82	46.17	54.00	-7.83	AVG
14	5470.000	49.52	7.85	57.37	68.20	-10.83	peak
15	5675.200	86.02	8.29	94.31	--	--	peak
16	5725.000	49.52	8.39	57.91	68.20	-10.29	peak
17	5959.200	50.92	8.86	59.78	68.20	-8.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

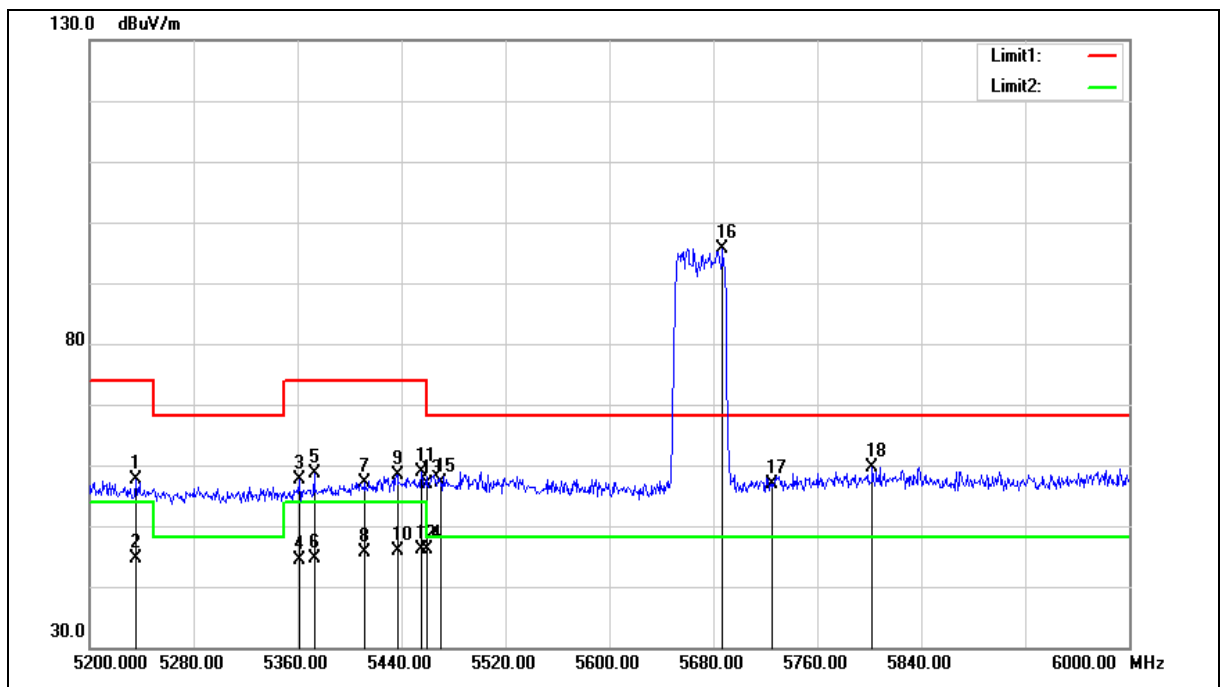

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	50.47	7.18	57.65	74.00	-16.35	peak
2	5235.200	37.41	7.18	44.59	54.00	-9.41	AVG
3	5361.600	50.20	7.53	57.73	74.00	-16.27	peak
4	5361.600	36.92	7.53	44.45	54.00	-9.55	AVG
5	5372.800	51.00	7.56	58.56	74.00	-15.44	peak
6	5372.800	37.14	7.56	44.70	54.00	-9.30	AVG
7	5412.000	49.54	7.68	57.22	74.00	-16.78	peak
8	5412.000	37.90	7.68	45.58	54.00	-8.42	AVG
9	5436.800	50.60	7.76	58.36	74.00	-15.64	peak
10	5436.800	38.22	7.76	45.98	54.00	-8.02	AVG
11	5455.200	51.12	7.81	58.93	74.00	-15.07	peak
12	5455.200	38.33	7.81	46.14	54.00	-7.86	AVG
13	5460.000	49.01	7.82	56.83	74.00	-17.17	peak
14	5460.000	38.33	7.82	46.15	54.00	-7.85	AVG
15	5470.000	49.17	7.85	57.02	68.20	-11.18	peak
16	5687.200	87.38	8.31	95.69	--	--	peak
17	5725.000	48.51	8.39	56.90	68.20	-11.30	peak
18	5802.400	51.19	8.54	59.73	68.20	-8.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

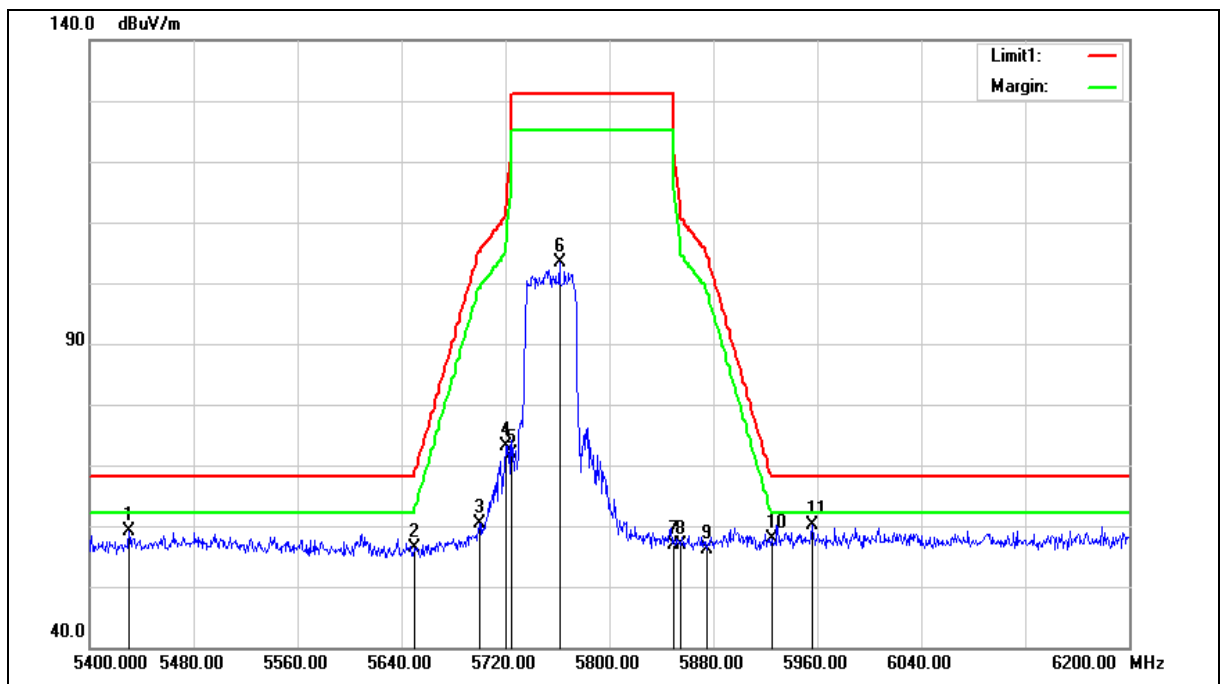

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.400	51.46	7.73	59.19	68.20	-9.01	peak
2	5650.000	48.19	8.24	56.43	68.20	-11.77	peak
3	5700.000	52.07	8.34	60.41	105.20	-44.79	peak
4	5720.000	64.63	8.38	73.01	110.80	-37.79	peak
5	5725.000	63.40	8.39	71.79	122.20	-50.41	peak
6	5761.600	94.84	8.46	103.30	--	--	peak
7	5850.000	48.24	8.63	56.87	122.20	-65.33	peak
8	5855.000	48.19	8.64	56.83	110.80	-53.97	peak
9	5875.000	47.37	8.69	56.06	105.20	-49.14	peak
10	5925.000	49.00	8.79	57.79	68.20	-10.41	peak
11	5956.000	51.20	8.86	60.06	68.20	-8.14	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

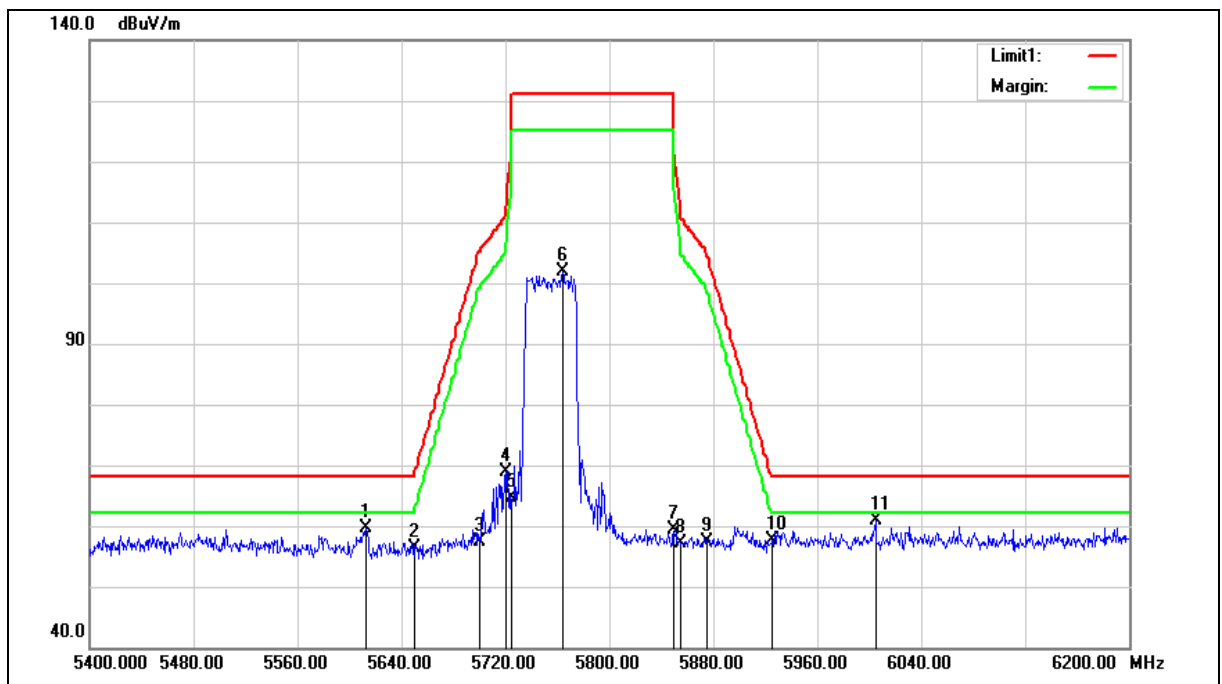

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5612.800	51.58	8.15	59.73	68.20	-8.47	peak
2	5650.000	48.06	8.24	56.30	68.20	-11.90	peak
3	5700.000	49.13	8.34	57.47	105.20	-47.73	peak
4	5720.000	60.54	8.38	68.92	110.80	-41.88	peak
5	5725.000	56.23	8.39	64.62	122.20	-57.58	peak
6	5764.000	93.37	8.46	101.83	--	--	peak
7	5850.000	50.63	8.63	59.26	122.20	-62.94	peak
8	5855.000	48.45	8.64	57.09	110.80	-53.71	peak
9	5875.000	48.72	8.69	57.41	105.20	-47.79	peak
10	5925.000	48.79	8.79	57.58	68.20	-10.62	peak
11	6004.800	51.82	8.96	60.78	68.20	-7.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

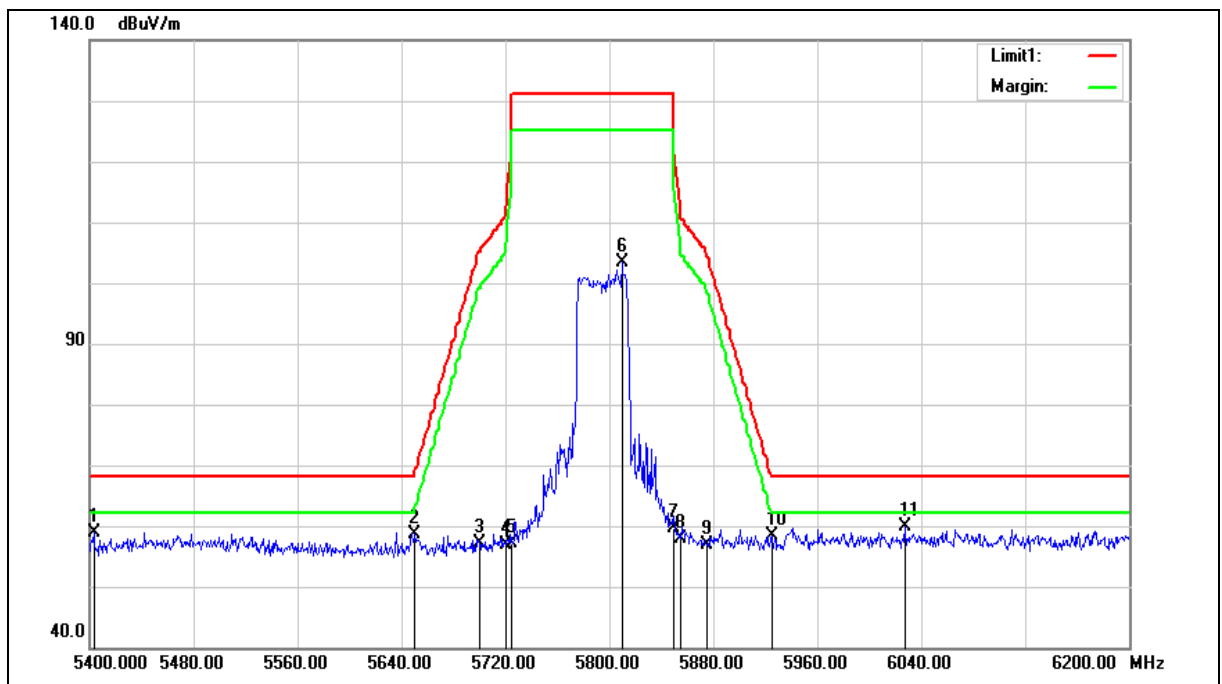

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5403.200	51.34	7.66	59.00	68.20	-9.20	peak
2	5650.000	50.35	8.24	58.59	68.20	-9.61	peak
3	5700.000	48.71	8.34	57.05	105.20	-48.15	peak
4	5720.000	48.48	8.38	56.86	110.80	-53.94	peak
5	5725.000	48.70	8.39	57.09	122.20	-65.11	peak
6	5809.600	94.91	8.55	103.46	--	--	peak
7	5850.000	51.05	8.63	59.68	122.20	-62.52	peak
8	5855.000	49.36	8.64	58.00	110.80	-52.80	peak
9	5875.000	48.29	8.69	56.98	105.20	-48.22	peak
10	5925.000	49.50	8.79	58.29	68.20	-9.91	peak
11	6027.200	50.79	9.03	59.82	68.20	-8.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		

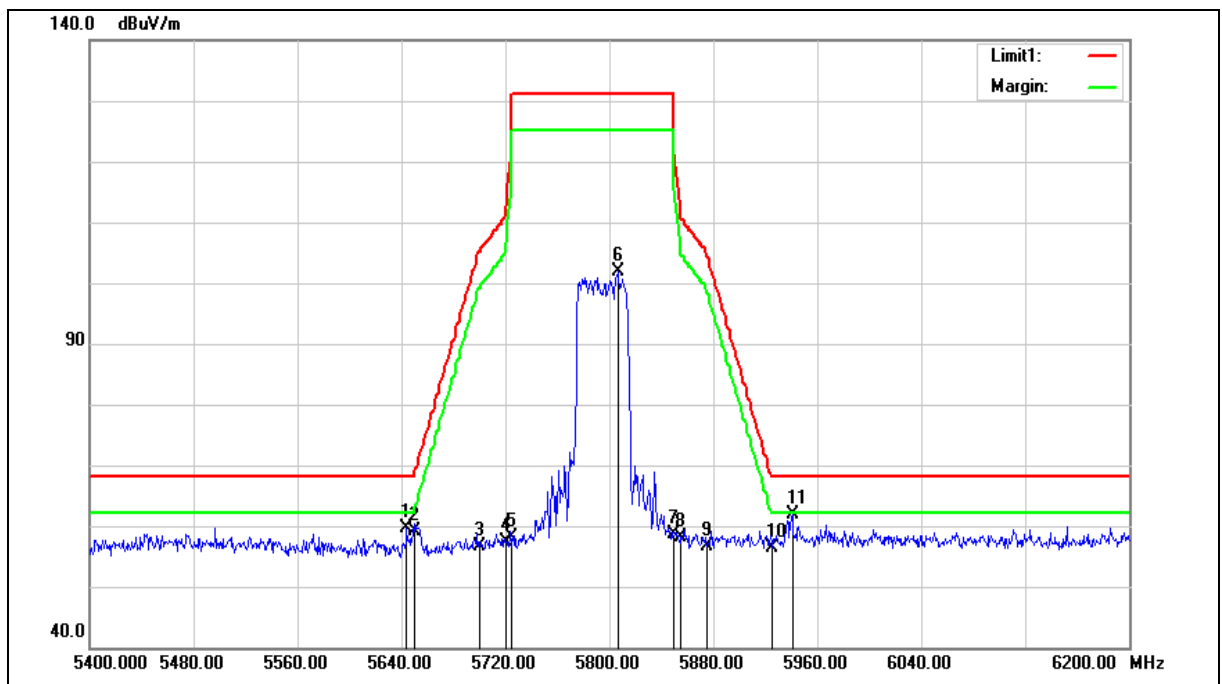

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.000	51.46	8.22	59.68	68.20	-8.52	peak
2	5650.000	50.93	8.24	59.17	68.20	-9.03	peak
3	5700.000	48.39	8.34	56.73	105.20	-48.47	peak
4	5720.000	49.06	8.38	57.44	110.80	-53.36	peak
5	5725.000	49.70	8.39	58.09	122.20	-64.11	peak
6	5806.400	93.21	8.55	101.76	--	--	peak
7	5850.000	49.95	8.63	58.58	122.20	-63.62	peak
8	5855.000	49.56	8.64	58.20	110.80	-52.60	peak
9	5875.000	47.91	8.69	56.60	105.20	-48.60	peak
10	5925.000	47.55	8.79	56.34	68.20	-11.86	peak
11	5940.800	53.16	8.82	61.98	68.20	-6.22	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

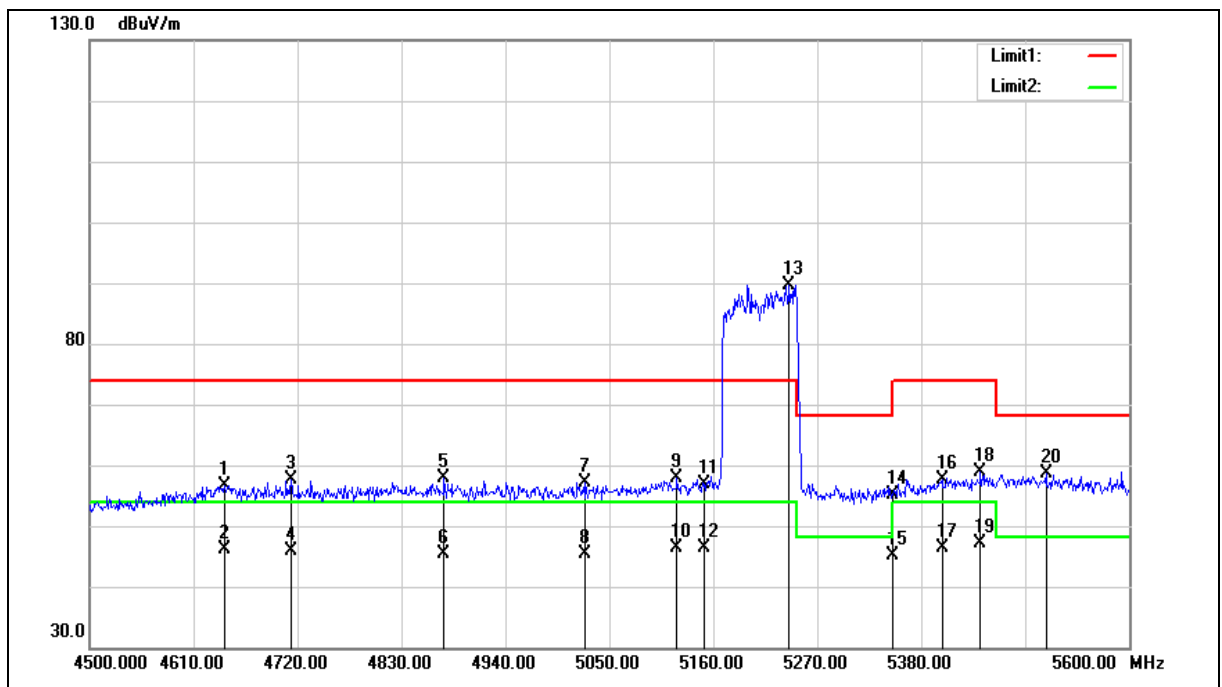

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.000	51.24	5.41	56.65	74.00	-17.35	peak
2	4643.000	40.65	5.41	46.06	54.00	-7.94	AVG
3	4713.400	51.93	5.63	57.56	74.00	-16.44	peak
4	4713.400	40.19	5.63	45.82	54.00	-8.18	AVG
5	4875.100	51.69	6.13	57.82	74.00	-16.18	peak
6	4875.100	39.33	6.13	45.46	54.00	-8.54	AVG
7	5024.700	50.51	6.57	57.08	74.00	-16.92	peak
8	5024.700	38.91	6.57	45.48	54.00	-8.52	AVG
9	5121.500	50.93	6.85	57.78	74.00	-16.22	peak
10	5121.500	39.54	6.85	46.39	54.00	-7.61	AVG
11	5150.000	50.02	6.94	56.96	74.00	-17.04	peak
12	5150.000	39.43	6.94	46.37	54.00	-7.63	AVG
13	5240.300	82.46	7.19	89.65	--	--	peak
14	5350.000	47.58	7.50	55.08	74.00	-18.92	peak
15	5350.000	37.69	7.50	45.19	54.00	-8.81	AVG
16	5402.000	49.95	7.65	57.60	74.00	-16.40	peak
17	5402.000	38.71	7.65	46.36	54.00	-7.64	AVG
18	5442.700	51.06	7.77	58.83	74.00	-15.17	peak
19	5442.700	39.40	7.77	47.17	54.00	-6.83	AVG
20	5512.000	50.65	7.95	58.60	68.20	-9.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		

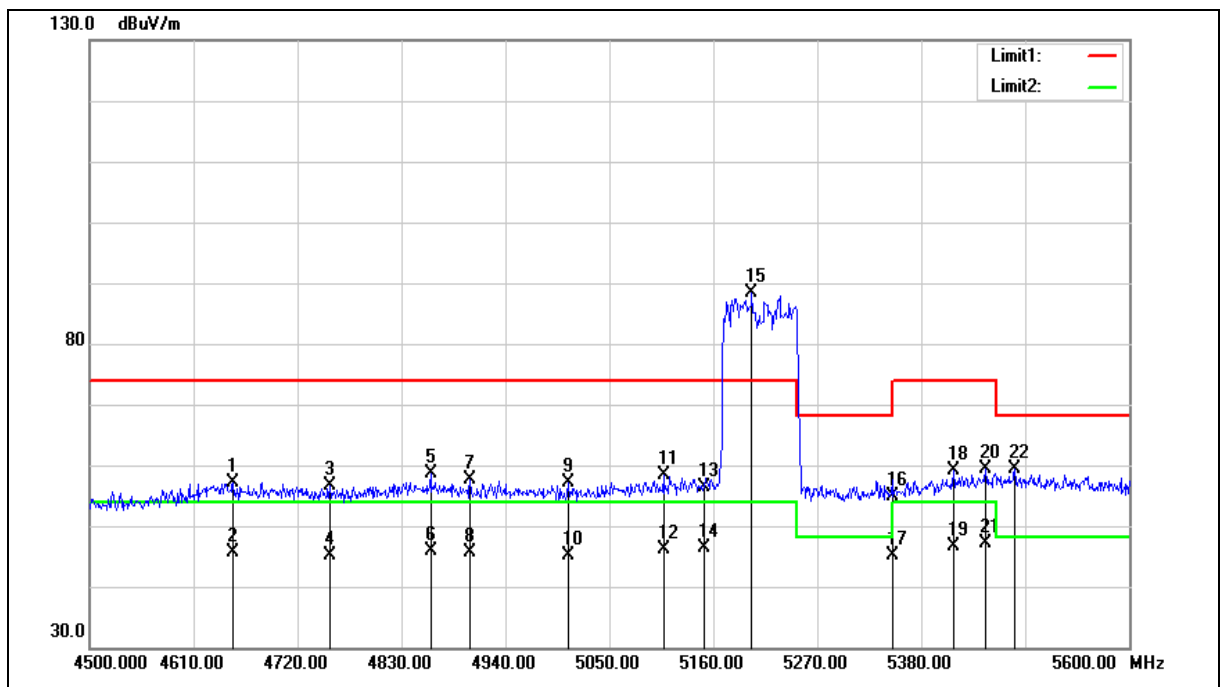

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4651.800	51.65	5.44	57.09	74.00	-16.91	peak
2	4651.800	40.24	5.44	45.68	54.00	-8.32	AVG
3	4754.100	50.86	5.76	56.62	74.00	-17.38	peak
4	4754.100	39.26	5.76	45.02	54.00	-8.98	AVG
5	4860.800	52.52	6.08	58.60	74.00	-15.40	peak
6	4860.800	39.79	6.08	45.87	54.00	-8.13	AVG
7	4902.600	51.38	6.21	57.59	74.00	-16.41	peak
8	4902.600	39.41	6.21	45.62	54.00	-8.38	AVG
9	5006.000	50.56	6.53	57.09	74.00	-16.91	peak
10	5006.000	38.68	6.53	45.21	54.00	-8.79	AVG
11	5107.200	51.67	6.81	58.48	74.00	-15.52	peak
12	5107.200	39.32	6.81	46.13	54.00	-7.87	AVG
13	5150.000	49.41	6.94	56.35	74.00	-17.65	peak
14	5150.000	39.38	6.94	46.32	54.00	-7.68	AVG
15	5200.700	81.36	7.08	88.44	--	--	peak
16	5350.000	47.41	7.50	54.91	74.00	-19.09	peak
17	5350.000	37.65	7.50	45.15	54.00	-8.85	AVG
18	5414.100	51.42	7.69	59.11	74.00	-14.89	peak
19	5414.100	39.02	7.69	46.71	54.00	-7.29	AVG
20	5448.200	51.59	7.79	59.38	74.00	-14.62	peak
21	5448.200	39.42	7.79	47.21	54.00	-6.79	AVG
22	5479.000	51.40	7.87	59.27	68.20	-8.93	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

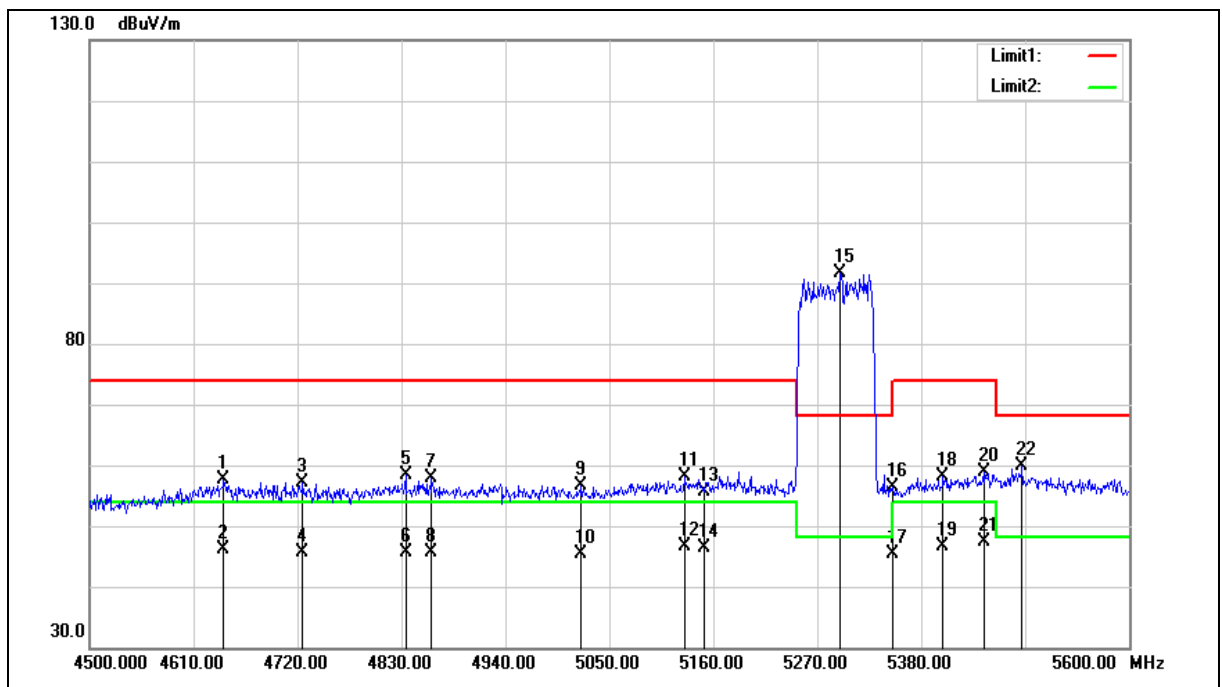

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.900	52.18	5.41	57.59	74.00	-16.41	peak
2	4641.900	40.74	5.41	46.15	54.00	-7.85	AVG
3	4725.500	51.41	5.68	57.09	74.00	-16.91	peak
4	4725.500	39.88	5.68	45.56	54.00	-8.44	AVG
5	4834.400	52.48	6.00	58.48	74.00	-15.52	peak
6	4834.400	39.75	6.00	45.75	54.00	-8.25	AVG
7	4861.900	51.76	6.09	57.85	74.00	-16.15	peak
8	4861.900	39.61	6.09	45.70	54.00	-8.30	AVG
9	5020.300	49.97	6.57	56.54	74.00	-17.46	peak
10	5020.300	38.92	6.57	45.49	54.00	-8.51	AVG
11	5129.200	51.17	6.88	58.05	74.00	-15.95	peak
12	5129.200	39.80	6.88	46.68	54.00	-7.32	AVG
13	5150.000	48.59	6.94	55.53	74.00	-18.47	peak
14	5150.000	39.42	6.94	46.36	54.00	-7.64	AVG
15	5294.200	84.35	7.34	91.69	--	--	peak
16	5350.000	48.88	7.50	56.38	74.00	-17.62	peak
17	5350.000	37.80	7.50	45.30	54.00	-8.70	AVG
18	5403.100	50.57	7.66	58.23	74.00	-15.77	peak
19	5403.100	39.04	7.66	46.70	54.00	-7.30	AVG
20	5446.000	51.00	7.78	58.78	74.00	-15.22	peak
21	5446.000	39.58	7.78	47.36	54.00	-6.64	AVG
22	5486.700	52.03	7.90	59.93	68.20	-8.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		

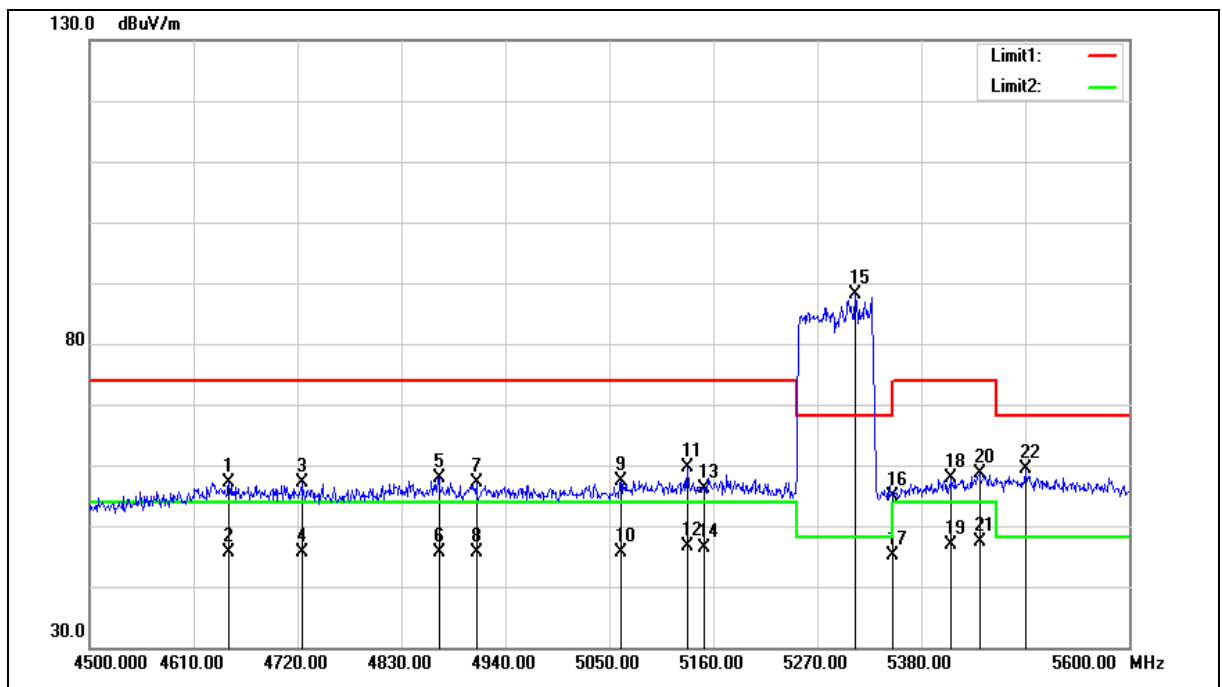

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4647.400	51.77	5.42	57.19	74.00	-16.81	peak
2	4647.400	40.27	5.42	45.69	54.00	-8.31	AVG
3	4724.400	51.57	5.67	57.24	74.00	-16.76	peak
4	4724.400	39.86	5.67	45.53	54.00	-8.47	AVG
5	4869.600	51.89	6.11	58.00	74.00	-16.00	peak
6	4869.600	39.64	6.11	45.75	54.00	-8.25	AVG
7	4909.200	50.78	6.24	57.02	74.00	-16.98	peak
8	4909.200	39.46	6.24	45.70	54.00	-8.30	AVG
9	5062.100	50.78	6.68	57.46	74.00	-16.54	peak
10	5062.100	38.99	6.68	45.67	54.00	-8.33	AVG
11	5132.500	52.85	6.89	59.74	74.00	-14.26	peak
12	5132.500	39.67	6.89	46.56	54.00	-7.44	AVG
13	5150.000	49.12	6.94	56.06	74.00	-17.94	peak
14	5150.000	39.43	6.94	46.37	54.00	-7.63	AVG
15	5309.600	80.69	7.39	88.08	--	--	peak
16	5350.000	47.48	7.50	54.98	74.00	-19.02	peak
17	5350.000	37.64	7.50	45.14	54.00	-8.86	AVG
18	5411.900	50.19	7.68	57.87	74.00	-16.13	peak
19	5411.900	39.24	7.68	46.92	54.00	-7.08	AVG
20	5441.600	50.82	7.76	58.58	74.00	-15.42	peak
21	5441.600	39.63	7.76	47.39	54.00	-6.61	AVG
22	5490.000	51.48	7.90	59.38	68.20	-8.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

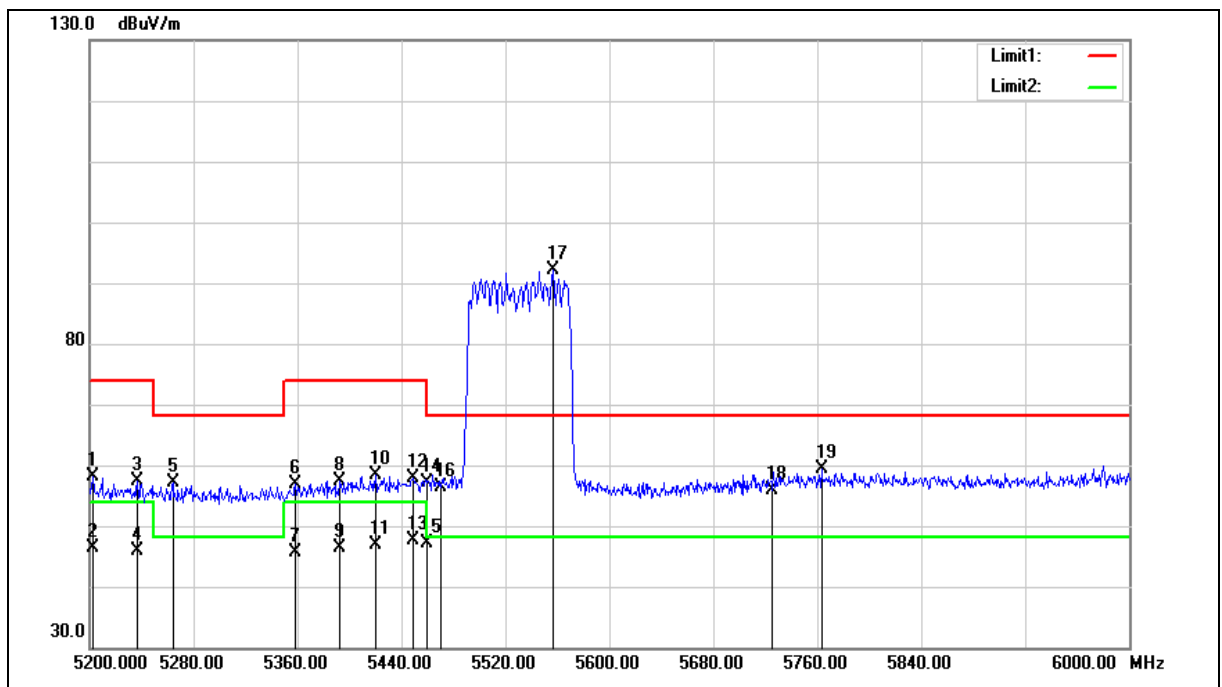

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5202.400	51.15	7.08	58.23	74.00	-15.77	peak
2	5202.400	39.40	7.08	46.48	54.00	-7.52	AVG
3	5236.800	50.19	7.19	57.38	74.00	-16.62	peak
4	5236.800	38.71	7.19	45.90	54.00	-8.10	AVG
5	5264.000	49.85	7.26	57.11	68.20	-11.09	peak
6	5358.400	49.37	7.53	56.90	74.00	-17.10	peak
7	5358.400	38.16	7.53	45.69	54.00	-8.31	AVG
8	5392.000	49.71	7.63	57.34	74.00	-16.66	peak
9	5392.000	38.79	7.63	46.42	54.00	-7.58	AVG
10	5420.000	50.57	7.71	58.28	74.00	-15.72	peak
11	5420.000	39.27	7.71	46.98	54.00	-7.02	AVG
12	5448.800	50.01	7.79	57.80	74.00	-16.20	peak
13	5448.800	39.83	7.79	47.62	54.00	-6.38	AVG
14	5460.000	49.31	7.82	57.13	74.00	-16.87	peak
15	5460.000	39.35	7.82	47.17	54.00	-6.83	AVG
16	5470.000	48.60	7.85	56.45	68.20	-11.75	peak
17	5556.800	83.97	8.05	92.02	--	--	peak
18	5725.000	47.50	8.39	55.89	68.20	-12.31	peak
19	5763.200	50.85	8.46	59.31	68.20	-8.89	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		

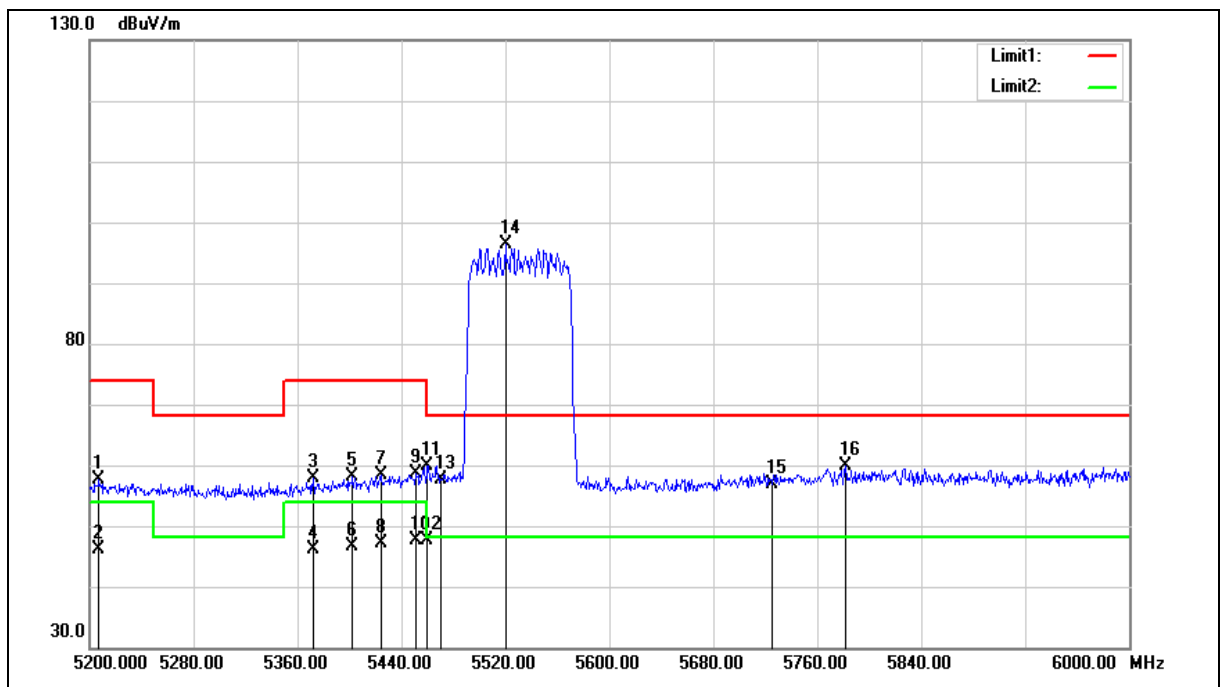

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	50.46	7.10	57.56	74.00	-16.44	peak
2	5207.200	38.91	7.10	46.01	54.00	-7.99	AVG
3	5372.000	50.26	7.56	57.82	74.00	-16.18	peak
4	5372.000	38.57	7.56	46.13	54.00	-7.87	AVG
5	5402.400	50.37	7.65	58.02	74.00	-15.98	peak
6	5402.400	38.93	7.65	46.58	54.00	-7.42	AVG
7	5424.000	50.59	7.71	58.30	74.00	-15.70	peak
8	5424.000	39.34	7.71	47.05	54.00	-6.95	AVG
9	5451.200	50.80	7.79	58.59	74.00	-15.41	peak
10	5451.200	39.83	7.79	47.62	54.00	-6.38	AVG
11	5460.000	52.08	7.82	59.90	74.00	-14.10	peak
12	5460.000	39.77	7.82	47.59	54.00	-6.41	AVG
13	5470.000	49.83	7.85	57.68	68.20	-10.52	peak
14	5520.000	88.41	7.97	96.38	--	--	peak
15	5725.000	48.42	8.39	56.81	68.20	-11.39	peak
16	5781.600	51.31	8.50	59.81	68.20	-8.39	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

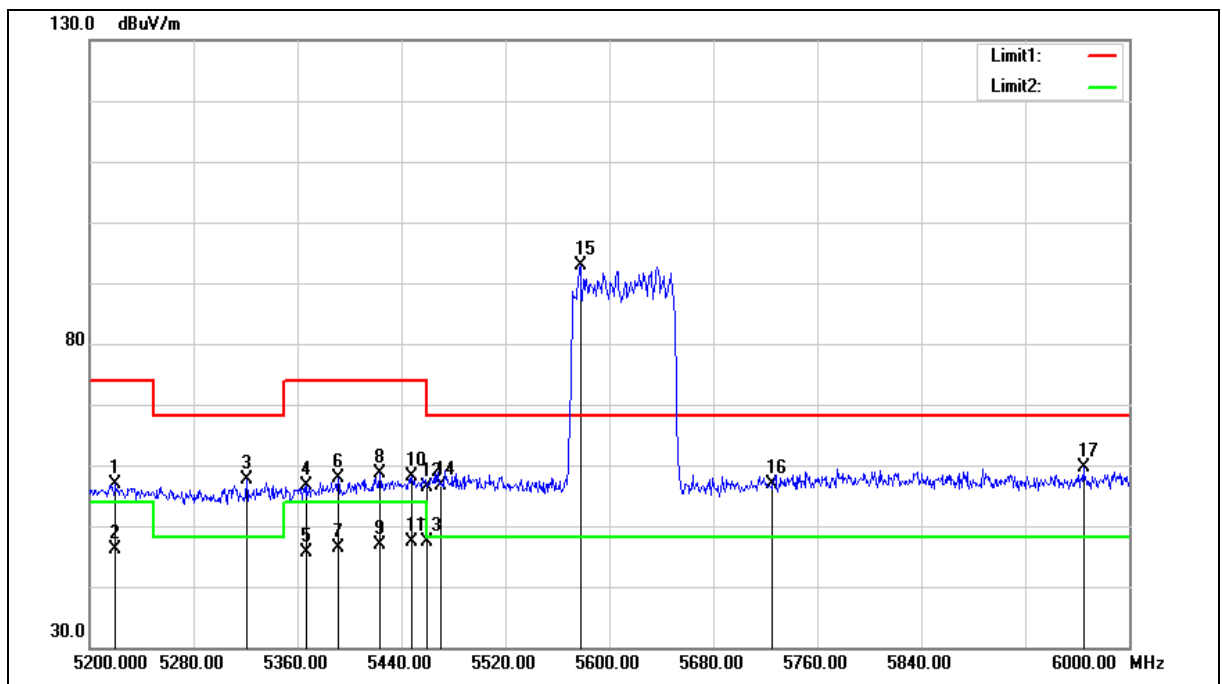

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5220.000	49.81	7.14	56.95	74.00	-17.05	peak
2	5220.000	39.08	7.14	46.22	54.00	-7.78	AVG
3	5320.800	50.21	7.42	57.63	68.20	-10.57	peak
4	5367.200	48.96	7.55	56.51	74.00	-17.49	peak
5	5367.200	38.15	7.55	45.70	54.00	-8.30	AVG
6	5391.200	50.17	7.62	57.79	74.00	-16.21	peak
7	5391.200	38.70	7.62	46.32	54.00	-7.68	AVG
8	5423.200	50.97	7.71	58.68	74.00	-15.32	peak
9	5423.200	39.25	7.71	46.96	54.00	-7.04	AVG
10	5448.000	50.22	7.79	58.01	74.00	-15.99	peak
11	5448.000	39.48	7.79	47.27	54.00	-6.73	AVG
12	5460.000	48.65	7.82	56.47	74.00	-17.53	peak
13	5460.000	39.53	7.82	47.35	54.00	-6.65	AVG
14	5470.000	48.90	7.85	56.75	68.20	-11.45	peak
15	5577.600	84.76	8.09	92.85	--	--	peak
16	5725.000	48.55	8.39	56.94	68.20	-11.26	peak
17	5964.800	50.84	8.87	59.71	68.20	-8.49	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		

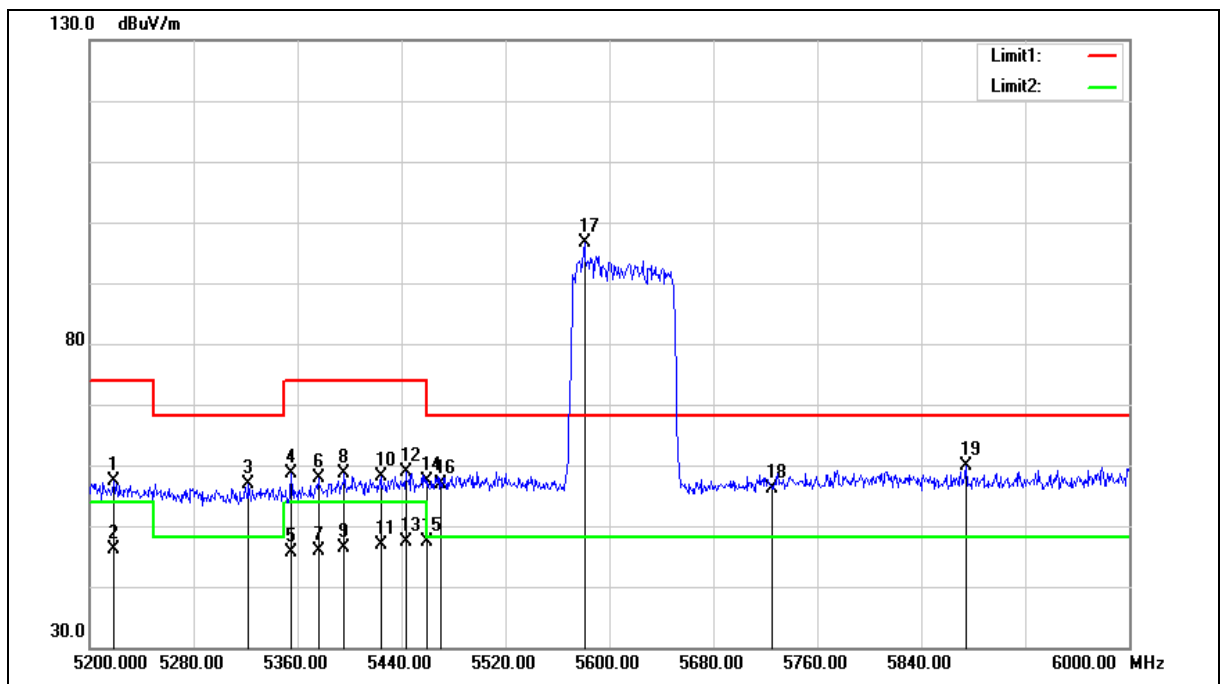

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5218.400	50.27	7.13	57.40	74.00	-16.60	peak
2	5218.400	39.10	7.13	46.23	54.00	-7.77	AVG
3	5322.400	49.56	7.42	56.98	68.20	-11.22	peak
4	5355.200	51.01	7.52	58.53	74.00	-15.47	peak
5	5355.200	38.20	7.52	45.72	54.00	-8.28	AVG
6	5376.000	50.32	7.59	57.91	74.00	-16.09	peak
7	5376.000	38.24	7.59	45.83	54.00	-8.17	AVG
8	5396.000	51.01	7.64	58.65	74.00	-15.35	peak
9	5396.000	38.67	7.64	46.31	54.00	-7.69	AVG
10	5424.000	50.39	7.71	58.10	74.00	-15.90	peak
11	5424.000	39.20	7.71	46.91	54.00	-7.09	AVG
12	5443.200	51.14	7.77	58.91	74.00	-15.09	peak
13	5443.200	39.58	7.77	47.35	54.00	-6.65	AVG
14	5460.000	49.55	7.82	57.37	74.00	-16.63	peak
15	5460.000	39.63	7.82	47.45	54.00	-6.55	AVG
16	5470.000	49.08	7.85	56.93	68.20	-11.27	peak
17	5580.800	88.61	8.09	96.70	--	--	peak
18	5725.000	47.78	8.39	56.17	68.20	-12.03	peak
19	5874.400	51.15	8.68	59.83	68.20	-8.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

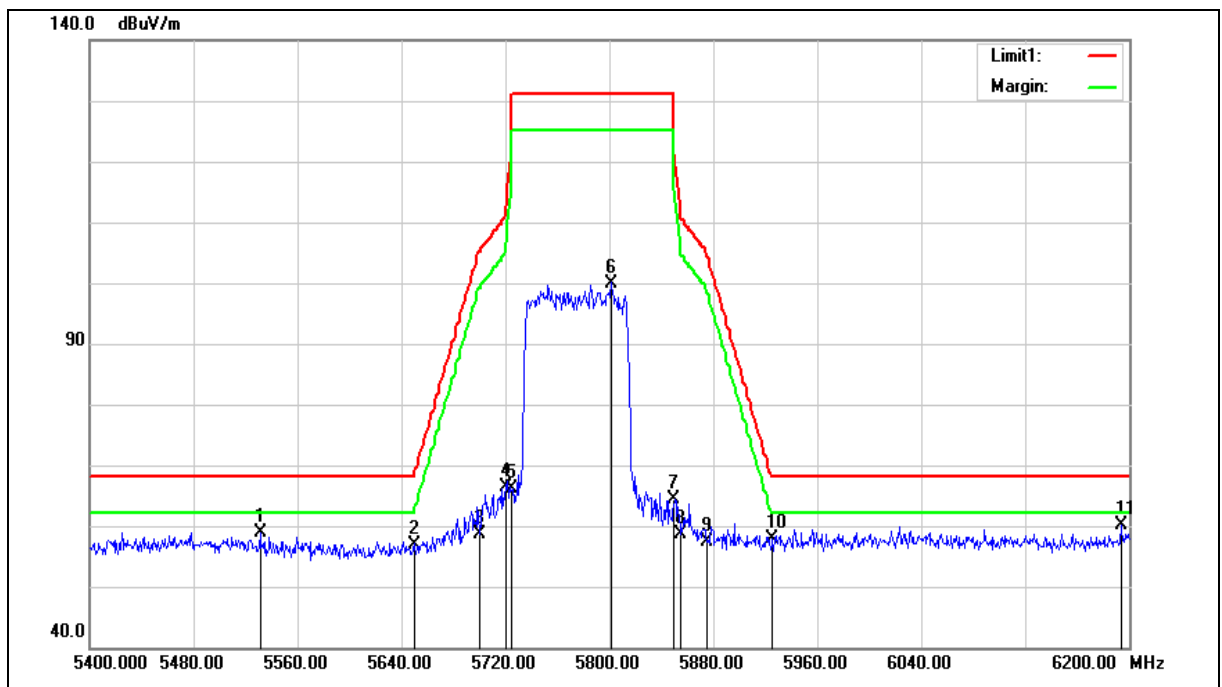

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5531.200	50.93	7.99	58.92	68.20	-9.28	peak
2	5650.000	48.74	8.24	56.98	68.20	-11.22	peak
3	5700.000	50.28	8.34	58.62	105.20	-46.58	peak
4	5720.000	58.03	8.38	66.41	110.80	-44.39	peak
5	5725.000	57.77	8.39	66.16	122.20	-56.04	peak
6	5801.600	91.46	8.54	100.00	--	--	peak
7	5850.000	55.67	8.63	64.30	122.20	-57.90	peak
8	5855.000	50.06	8.64	58.70	110.80	-52.10	peak
9	5875.000	48.77	8.69	57.46	105.20	-47.74	peak
10	5925.000	49.09	8.79	57.88	68.20	-10.32	peak
11	6193.600	50.57	9.52	60.09	68.20	-8.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		

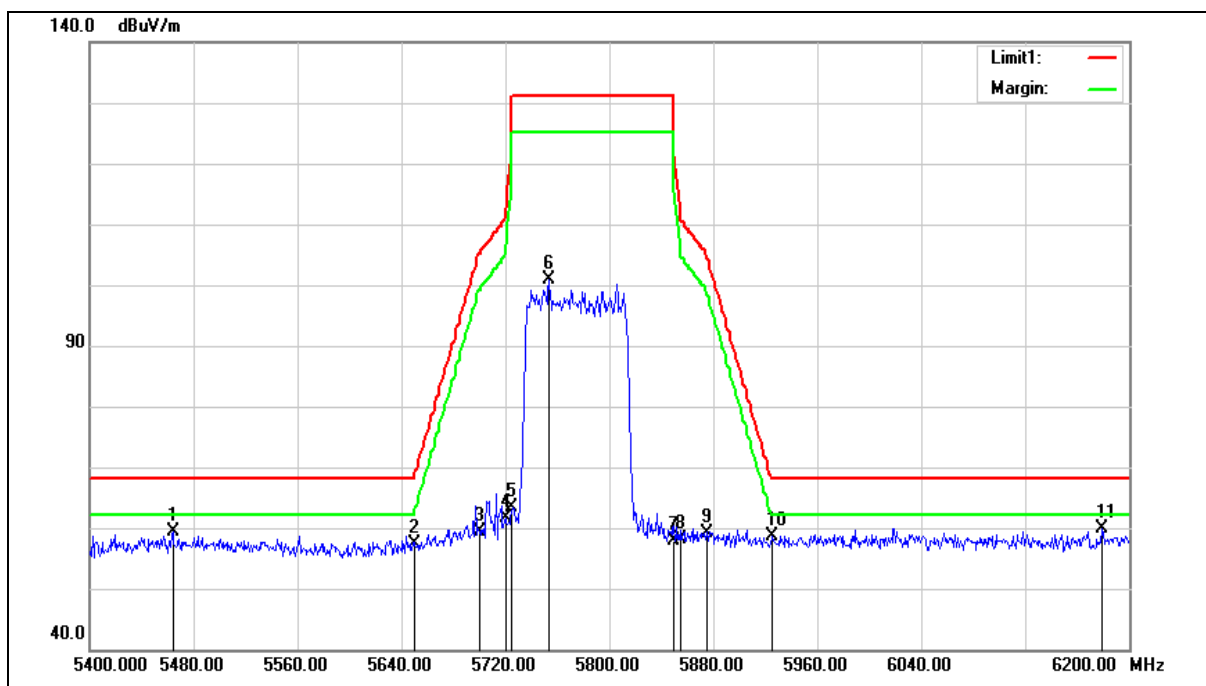

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5464.000	51.63	7.83	59.46	68.20	-8.74	peak
2	5650.000	49.14	8.24	57.38	68.20	-10.82	peak
3	5700.000	51.10	8.34	59.44	105.20	-45.76	peak
4	5720.000	53.21	8.38	61.59	110.80	-49.21	peak
5	5725.000	55.11	8.39	63.50	122.20	-58.70	peak
6	5753.600	92.34	8.44	100.78	--	--	peak
7	5850.000	49.20	8.63	57.83	122.20	-64.37	peak
8	5855.000	49.60	8.64	58.24	110.80	-52.56	peak
9	5875.000	50.56	8.69	59.25	105.20	-45.95	peak
10	5925.000	49.92	8.79	58.71	68.20	-9.49	peak
11	6179.200	50.48	9.47	59.95	68.20	-8.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

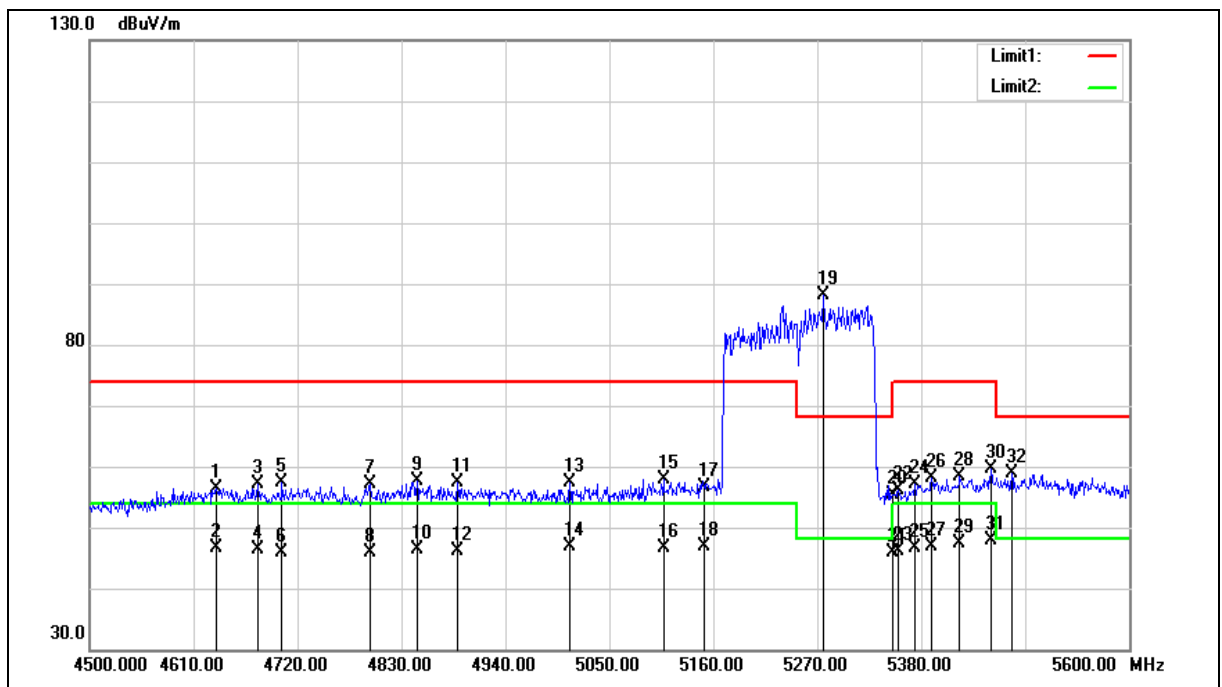

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.200	51.02	5.39	56.41	74.00	-17.59	peak
2	4634.200	41.12	5.39	46.51	54.00	-7.49	AVG
3	4678.200	51.72	5.52	57.24	74.00	-16.76	peak
4	4678.200	40.88	5.52	46.40	54.00	-7.60	AVG
5	4703.500	51.74	5.60	57.34	74.00	-16.66	peak
6	4703.500	40.19	5.60	45.79	54.00	-8.21	AVG
7	4797.000	51.29	5.89	57.18	74.00	-16.82	peak
8	4797.000	40.06	5.89	45.95	54.00	-8.05	AVG
9	4846.500	51.51	6.04	57.55	74.00	-16.45	peak
10	4846.500	40.32	6.04	46.36	54.00	-7.64	AVG
11	4889.400	51.24	6.17	57.41	74.00	-16.59	peak
12	4889.400	40.08	6.17	46.25	54.00	-7.75	AVG
13	5008.200	50.87	6.53	57.40	74.00	-16.60	peak
14	5008.200	40.36	6.53	46.89	54.00	-7.11	AVG
15	5107.200	50.99	6.81	57.80	74.00	-16.20	peak
16	5107.200	39.91	6.81	46.72	54.00	-7.28	AVG
17	5150.000	49.81	6.94	56.75	74.00	-17.25	peak
18	5150.000	39.97	6.94	46.91	54.00	-7.09	AVG
19	5276.600	80.84	7.30	88.14	--	--	peak
20	5350.000	47.89	7.50	55.39	74.00	-18.61	peak
21	5350.000	38.33	7.50	45.83	54.00	-8.17	AVG
22	5355.800	48.68	7.52	56.20	74.00	-17.80	peak
23	5355.800	38.61	7.52	46.13	54.00	-7.87	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5373.400	49.54	7.56	57.10	74.00	-16.90	peak
25	5373.400	38.95	7.56	46.51	54.00	-7.49	AVG
26	5391.000	50.39	7.62	58.01	74.00	-15.99	peak
27	5391.000	39.37	7.62	46.99	54.00	-7.01	AVG
28	5420.700	50.61	7.71	58.32	74.00	-15.68	peak
29	5420.700	39.65	7.71	47.36	54.00	-6.64	AVG
30	5453.700	51.91	7.80	59.71	74.00	-14.29	peak
31	5453.700	40.12	7.80	47.92	54.00	-6.08	AVG
32	5475.700	50.91	7.87	58.78	68.20	-9.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Vertical		

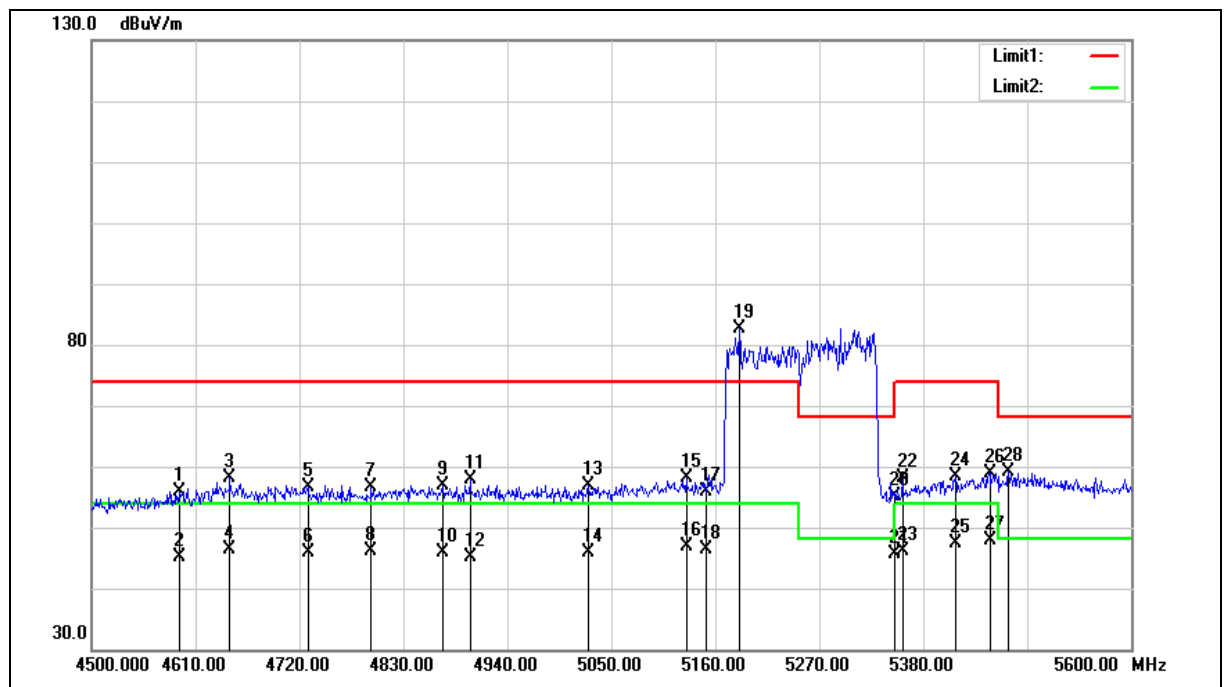

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4592.400	50.68	5.25	55.93	74.00	-18.07	peak
2	4592.400	39.77	5.25	45.02	54.00	-8.98	AVG
3	4646.300	52.70	5.42	58.12	74.00	-15.88	peak
4	4646.300	41.06	5.42	46.48	54.00	-7.52	AVG
5	4728.800	51.01	5.68	56.69	74.00	-17.31	peak
6	4728.800	40.26	5.68	45.94	54.00	-8.06	AVG
7	4795.900	50.82	5.89	56.71	74.00	-17.29	peak
8	4795.900	40.14	5.89	46.03	54.00	-7.97	AVG
9	4871.800	50.87	6.12	56.99	74.00	-17.01	peak
10	4871.800	39.85	6.12	45.97	54.00	-8.03	AVG
11	4900.400	51.71	6.20	57.91	74.00	-16.09	peak
12	4900.400	38.96	6.20	45.16	54.00	-8.84	AVG
13	5025.800	50.28	6.59	56.87	74.00	-17.13	peak
14	5025.800	39.24	6.59	45.83	54.00	-8.17	AVG
15	5129.200	51.21	6.88	58.09	74.00	-15.91	peak
16	5129.200	40.11	6.88	46.99	54.00	-7.01	AVG
17	5150.000	48.86	6.94	55.80	74.00	-18.20	peak
18	5150.000	39.48	6.94	46.42	54.00	-7.58	AVG
19	5185.300	75.57	7.04	82.61	--	--	peak
20	5350.000	47.57	7.50	55.07	74.00	-18.93	peak
21	5350.000	38.06	7.50	45.56	54.00	-8.44	AVG
22	5358.000	50.58	7.52	58.10	74.00	-15.90	peak
23	5358.000	38.71	7.52	46.23	54.00	-7.77	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5414.100	50.69	7.69	58.38	74.00	-15.62	peak
25	5414.100	39.76	7.69	47.45	54.00	-6.55	AVG
26	5450.400	51.17	7.79	58.96	74.00	-15.04	peak
27	5450.400	40.04	7.79	47.83	54.00	-6.17	AVG
28	5470.200	51.32	7.85	59.17	68.20	-9.03	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

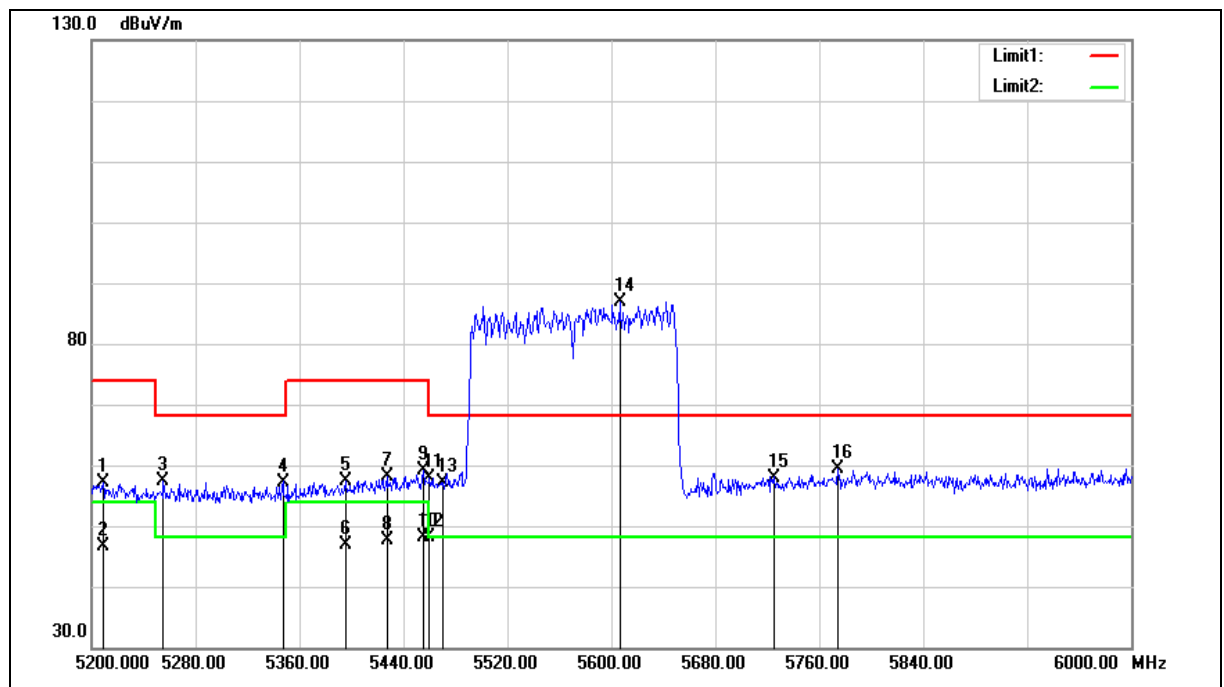

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	50.02	7.11	57.13	74.00	-16.87	peak
2	5208.800	39.63	7.11	46.74	54.00	-7.26	AVG
3	5255.200	50.08	7.24	57.32	68.20	-10.88	peak
4	5347.200	49.76	7.49	57.25	68.20	-10.95	peak
5	5395.200	49.83	7.64	57.47	74.00	-16.53	peak
6	5395.200	39.20	7.64	46.84	54.00	-7.16	AVG
7	5427.200	50.39	7.73	58.12	74.00	-15.88	peak
8	5427.200	39.86	7.73	47.59	54.00	-6.41	AVG
9	5455.200	51.25	7.81	59.06	74.00	-14.94	peak
10	5455.200	40.20	7.81	48.01	54.00	-5.99	AVG
11	5460.000	50.13	7.82	57.95	74.00	-16.05	peak
12	5460.000	40.39	7.82	48.21	54.00	-5.79	AVG
13	5470.000	49.25	7.85	57.10	68.20	-11.10	peak
14	5606.400	78.82	8.14	86.96	--	--	peak
15	5725.000	49.60	8.39	57.99	68.20	-10.21	peak
16	5774.400	50.99	8.48	59.47	68.20	-8.73	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Vertical		

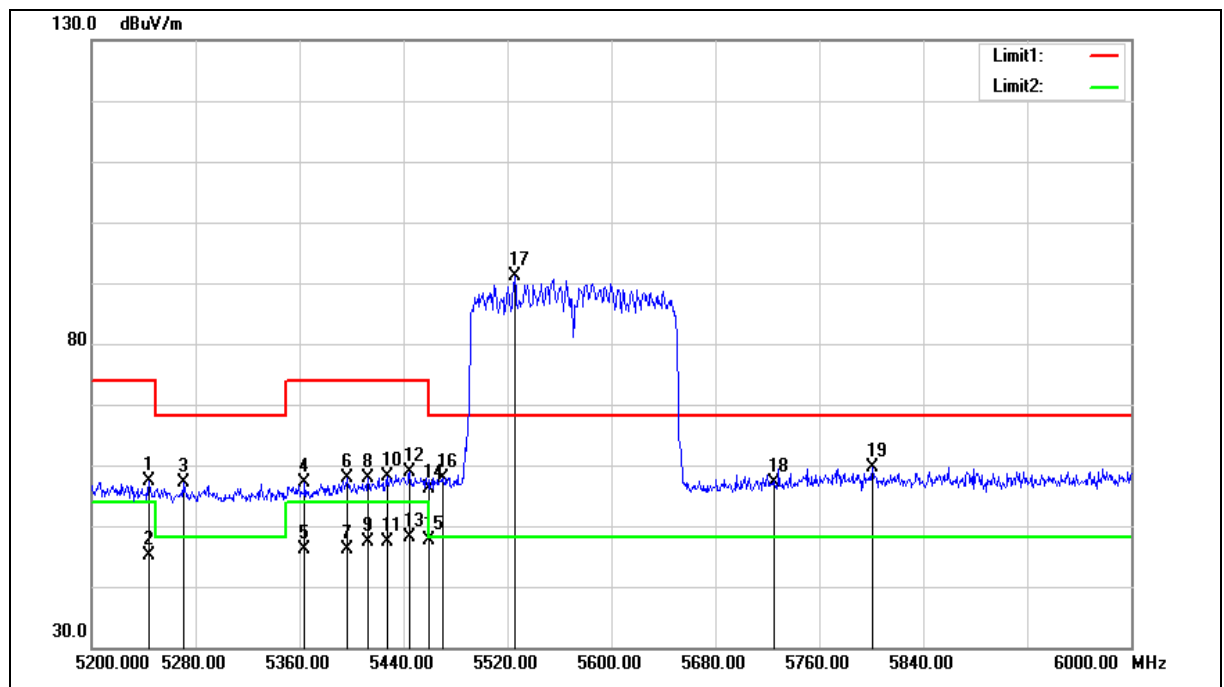

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5244.000	50.16	7.20	57.36	74.00	-16.64	peak
2	5244.000	37.97	7.20	45.17	54.00	-8.83	AVG
3	5270.400	49.73	7.28	57.01	68.20	-11.19	peak
4	5364.000	49.49	7.54	57.03	74.00	-16.97	peak
5	5364.000	38.67	7.54	46.21	54.00	-7.79	AVG
6	5396.800	50.29	7.64	57.93	74.00	-16.07	peak
7	5396.800	38.45	7.64	46.09	54.00	-7.91	AVG
8	5412.800	50.30	7.68	57.98	74.00	-16.02	peak
9	5412.800	39.58	7.68	47.26	54.00	-6.74	AVG
10	5427.200	50.43	7.73	58.16	74.00	-15.84	peak
11	5427.200	39.75	7.73	47.48	54.00	-6.52	AVG
12	5444.800	51.16	7.77	58.93	74.00	-15.07	peak
13	5444.800	40.27	7.77	48.04	54.00	-5.96	AVG
14	5460.000	48.35	7.82	56.17	74.00	-17.83	peak
15	5460.000	39.80	7.82	47.62	54.00	-6.38	AVG
16	5470.000	50.03	7.85	57.88	68.20	-10.32	peak
17	5525.600	83.10	7.99	91.09	--	--	peak
18	5725.000	48.63	8.39	57.02	68.20	-11.18	peak
19	5800.800	51.21	8.53	59.74	68.20	-8.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.3.2 最大傳導輸出功率之量測

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求：

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用：

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21dBm。

(2) 供室內操作使用：

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用：

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23dBi 方向增益之指向性天線時，應依超過 23dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用：

- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 11dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 250 mW 或 $11 \text{ dBm} + 10 \log B$ (B 是 26 dB 發射頻寬，單位 MHz)之較小者。
- (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 1 W。
- (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。
- (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。


4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制（如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等）調整得出正確之峰值量測，以符合本段落所提之發射定義。

CDD mode:

$$\text{Directional} = G_{\text{ANT}} = 10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{\text{ANT}}\} = -1.04 \text{ dBi} < 6 \text{ dBi}$$

MIMO mode:

$$\text{Directional Gain} = 10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / N_{\text{ANT}}\} = 1.96 \text{ dBi} < 6 \text{ dBi}$$

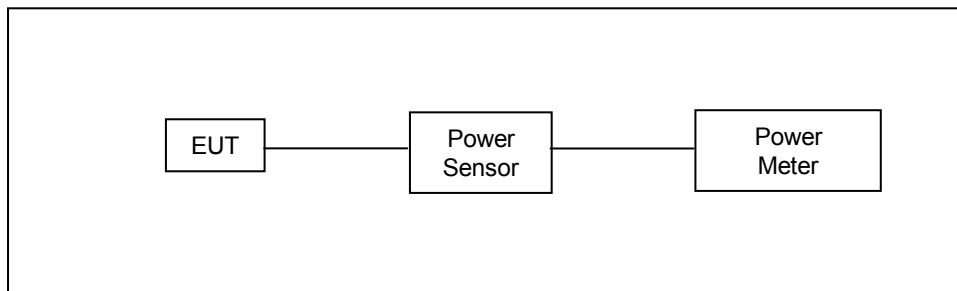測試架構圖：

測試結果:

操作模式		: Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14				
測試結果		: 合格				
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-0		Limit (dBm)
				dBm	W	
Mode 8	36	5180.0	6	8.11	0.006	≤ 24.00
	40	5200.0		15.81	0.038	≤ 24.00
	48	5240.0		15.94	0.039	≤ 24.00
	52	5260.0		15.66	0.037	≤ 24.00
	56	5280.0		15.71	0.037	≤ 24.00
	64	5320.0		7.99	0.006	≤ 24.00
	100	5500.0		7.87	0.006	≤ 24.00
	112	5560.0		15.56	0.036	≤ 24.00
	140	5700.0		7.39	0.005	≤ 24.00
	149	5745.0		15.58	0.036	≤ 30.00
	157	5785.0		15.49	0.035	≤ 30.00
	165	5825.0		15.61	0.036	≤ 30.00
Mode 9	36	5180.0	13	8.06	0.006	≤ 24.00
	40	5200.0		15.89	0.039	≤ 24.00
	48	5240.0		15.84	0.038	≤ 24.00
	52	5260.0		15.65	0.037	≤ 24.00
	56	5280.0		15.59	0.036	≤ 24.00
	64	5320.0		7.90	0.006	≤ 24.00
	100	5500.0		7.80	0.006	≤ 24.00
	112	5560.0		15.47	0.035	≤ 24.00
	140	5700.0		7.33	0.005	≤ 24.00
	149	5745.0		15.52	0.036	≤ 30.00
	157	5785.0		15.42	0.035	≤ 30.00
	165	5825.0		15.45	0.035	≤ 30.00
Mode 10	38	5190.0	27	7.81	0.006	≤ 24.00
	46	5230.0		15.19	0.033	≤ 24.00
	54	5270.0		15.12	0.033	≤ 24.00
	62	5310.0		7.67	0.006	≤ 24.00
	102	5510.0		7.71	0.006	≤ 24.00
	110	5550.0		15.11	0.032	≤ 24.00
	134	5670.0		7.37	0.005	≤ 24.00
	151	5755.0		14.88	0.031	≤ 30.00
	159	5795.0		14.79	0.030	≤ 30.00

操作模式 : Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14						
測試結果 : 合格						
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-0		Limit (dBm)
				dBm	W	
Mode 11	36	5180.0	13	8.13	0.007	≤ 24.00
	40	5200.0		15.82	0.038	≤ 24.00
	48	5240.0		15.93	0.039	≤ 24.00
	52	5260.0		15.69	0.037	≤ 24.00
	56	5280.0		15.72	0.037	≤ 24.00
	64	5320.0		7.99	0.006	≤ 24.00
	100	5500.0		7.88	0.006	≤ 24.00
	112	5560.0		15.61	0.036	≤ 24.00
	140	5700.0		7.46	0.006	≤ 24.00
	149	5745.0		15.59	0.036	≤ 30.00
	157	5785.0		15.53	0.036	≤ 30.00
	165	5825.0		15.58	0.036	≤ 30.00
Mode 12	38	5190.0	27	7.87	0.006	≤ 24.00
	46	5230.0		15.32	0.034	≤ 24.00
	54	5270.0		15.17	0.033	≤ 24.00
	62	5310.0		7.69	0.006	≤ 24.00
	102	5510.0		7.73	0.006	≤ 24.00
	110	5550.0		15.16	0.033	≤ 24.00
	134	5670.0		7.39	0.005	≤ 24.00
	151	5755.0		14.91	0.031	≤ 30.00
	159	5795.0		14.86	0.031	≤ 30.00
Mode 13	42	5210.0	58.6	7.91	0.006	≤ 24.00
	58	5290.0		7.88	0.006	≤ 24.00
	106	5530.0		7.58	0.006	≤ 24.00
	122	5610.0		7.77	0.006	≤ 24.00
	155	5775.0		14.63	0.029	≤ 30.00
Mode 14	50	5250.0	117	2.51	0.002	≤ 24.00
	50	5250.0		2.97	0.002	≤ 24.00
	114	5570.0		5.59	0.004	≤ 24.00

操作模式 : Mode 15 / Mode 16 / Mode 17 / Mode 18								
測試結果 : 合格								
操作模式	Data Rate (Mbps)	頻道 CH	Frequency (MHz)	RU Type	RU NO.	最大傳導輸出功率		
						ANT-0		Limit (dBm)
						dBm	mW	
Mode 15	MCS0	36	5180.0	242	1	8.39	0.007	≤ 24.00
		40	5200.0	242	1	15.92	0.039	≤ 24.00
		48	5240.0	242	1	16.01	0.040	≤ 24.00
		52	5260.0	242	1	15.72	0.037	≤ 24.00
		56	5280.0	242	1	15.81	0.038	≤ 24.00
		64	5320.0	242	1	8.28	0.007	≤ 24.00
		100	5500.0	242	1	8.15	0.007	≤ 24.00
		112	5560.0	242	1	15.53	0.036	≤ 24.00
		140	5700.0	242	1	7.46	0.006	≤ 24.00
		149	5745.0	242	1	15.51	0.036	≤ 30.00
		157	5785.0	242	1	15.42	0.035	≤ 30.00
		165	5825.0	242	1	15.53	0.036	≤ 30.00
Mode 16	MCS0	38	5190.0	484	1	8.16	0.007	≤ 24.00
		46	5230.0	484	1	15.34	0.034	≤ 24.00
		54	5270.0	484	1	15.28	0.034	≤ 24.00
		62	5310.0	484	1	8.06	0.006	≤ 24.00
		102	5510.0	484	1	7.98	0.006	≤ 24.00
		110	5550.0	484	1	15.19	0.033	≤ 24.00
		134	5670.0	484	1	7.43	0.006	≤ 24.00
		151	5755.0	484	1	14.87	0.031	≤ 30.00
		159	5795.0	484	1	14.92	0.031	≤ 30.00
Mode 17	MCS0	42	5210.0	966	1	8.27	0.007	≤ 24.00
		58	5290.0	996	1	8.22	0.007	≤ 30.00
		106	5530.0	996	1	7.96	0.006	≤ 24.00
		122	5610.0	996	1	7.88	0.006	≤ 24.00
		155	5775.0	966	1	14.63	0.029	≤ 30.00
Mode 18	MCS0	50	5250.0	1992	1	3.18	0.002	≤ 24.00
		50	5250.0	1992	1	3.58	0.002	≤ 24.00
		114	5570.0	1992	1	6.26	0.004	≤ 24.00

操作模式 : Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14						
測試結果 : 合格						
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-1		Limit (dBm)
				dBm	W	
Mode 8	36	5180.0	6	7.31	0.005	≤ 24.00
	40	5200.0		14.94	0.031	≤ 24.00
	48	5240.0		15.00	0.032	≤ 24.00
	52	5260.0		14.89	0.031	≤ 24.00
	56	5280.0		15.02	0.032	≤ 24.00
	64	5320.0		7.27	0.005	≤ 24.00
	100	5500.0		6.96	0.005	≤ 24.00
	112	5560.0		15.19	0.033	≤ 24.00
	140	5700.0		6.59	0.005	≤ 24.00
	149	5745.0		14.58	0.029	≤ 30.00
	157	5785.0		14.63	0.029	≤ 30.00
	165	5825.0		14.79	0.030	≤ 30.00
Mode 9	36	5180.0	13	7.21	0.005	≤ 24.00
	40	5200.0		14.96	0.031	≤ 24.00
	48	5240.0		14.93	0.031	≤ 24.00
	52	5260.0		14.86	0.031	≤ 24.00
	56	5280.0		14.80	0.030	≤ 24.00
	64	5320.0		7.26	0.005	≤ 24.00
	100	5500.0		6.91	0.005	≤ 24.00
	112	5560.0		15.13	0.033	≤ 24.00
	140	5700.0		6.47	0.004	≤ 24.00
	149	5745.0		14.51	0.028	≤ 30.00
	157	5785.0		14.62	0.029	≤ 30.00
	165	5825.0		14.71	0.030	≤ 30.00
Mode 10	38	5190.0	27	6.32	0.004	≤ 24.00
	46	5230.0		14.18	0.026	≤ 24.00
	54	5270.0		14.20	0.026	≤ 24.00
	62	5310.0		6.48	0.004	≤ 24.00
	102	5510.0		6.50	0.004	≤ 24.00
	110	5550.0		14.74	0.030	≤ 24.00
	134	5670.0		5.82	0.004	≤ 24.00
	151	5755.0		14.03	0.025	≤ 30.00
	159	5795.0		14.12	0.026	≤ 30.00

操作模式 : Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14						
測試結果 : 合格						
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-1		Limit (dBm)
				dBm	W	
Mode 11	36	5180.0	13	7.27	0.005	≤ 24.00
	40	5200.0		14.86	0.031	≤ 24.00
	48	5240.0		15.01	0.032	≤ 24.00
	52	5260.0		14.90	0.031	≤ 24.00
	56	5280.0		14.99	0.032	≤ 24.00
	64	5320.0		7.34	0.005	≤ 24.00
	100	5500.0		7.04	0.005	≤ 24.00
	112	5560.0		15.11	0.032	≤ 24.00
	140	5700.0		6.54	0.005	≤ 24.00
	149	5745.0		14.61	0.029	≤ 30.00
	157	5785.0		14.72	0.030	≤ 30.00
	165	5825.0		14.82	0.030	≤ 30.00
Mode 12	38	5190.0	27	6.34	0.004	≤ 24.00
	46	5230.0		14.21	0.026	≤ 24.00
	54	5270.0		14.34	0.027	≤ 24.00
	62	5310.0		6.49	0.004	≤ 24.00
	102	5510.0		6.57	0.005	≤ 24.00
	110	5550.0		14.85	0.031	≤ 24.00
	134	5670.0		5.84	0.004	≤ 24.00
	151	5755.0		14.12	0.026	≤ 30.00
	159	5795.0		14.22	0.026	≤ 30.00
Mode 13	42	5210.0	58.6	6.42	0.004	≤ 24.00
	58	5290.0		6.42	0.004	≤ 24.00
	106	5530.0		6.63	0.005	≤ 24.00
	122	5610.0		7.00	0.005	≤ 24.00
	155	5775.0		13.91	0.025	≤ 30.00
Mode 14	50	5250.0	117	1.59	0.001	≤ 24.00
	50	5250.0		0.95	0.001	≤ 24.00
	114	5570.0		4.87	0.003	≤ 24.00

操作模式 : Mode 15 / Mode 16 / Mode 17 / Mode 18								
測試結果 : 合格								
操作模式	Data Rate (Mbps)	頻道 CH	Frequency (MHz)	RU Type	RU NO.	最大傳導輸出功率		
						ANT-1		Limit (dBm)
						dBm	mW	
Mode 15	MCS0	36	5180.0	242	1	7.69	0.006	≤ 24.00
		40	5200.0	242	1	15.31	0.034	≤ 24.00
		48	5240.0	242	1	15.31	0.034	≤ 24.00
		52	5260.0	242	1	15.11	0.032	≤ 24.00
		56	5280.0	242	1	15.21	0.033	≤ 24.00
		64	5320.0	242	1	7.73	0.006	≤ 24.00
		100	5500.0	242	1	7.29	0.005	≤ 24.00
		112	5560.0	242	1	15.11	0.032	≤ 24.00
		140	5700.0	242	1	6.87	0.005	≤ 24.00
		149	5745.0	242	1	14.97	0.031	≤ 30.00
		157	5785.0	242	1	14.87	0.031	≤ 30.00
		165	5825.0	242	1	15.17	0.033	≤ 30.00
Mode 16	MCS0	38	5190.0	484	1	6.76	0.005	≤ 24.00
		46	5230.0	484	1	14.43	0.028	≤ 24.00
		54	5270.0	484	1	14.51	0.028	≤ 24.00
		62	5310.0	484	1	6.96	0.005	≤ 24.00
		102	5510.0	484	1	6.99	0.005	≤ 24.00
		110	5550.0	484	1	14.74	0.030	≤ 24.00
		134	5670.0	484	1	6.28	0.004	≤ 24.00
		151	5755.0	484	1	14.31	0.027	≤ 30.00
		159	5795.0	484	1	14.41	0.028	≤ 30.00
Mode 17	MCS0	42	5210.0	966	1	6.78	0.005	≤ 24.00
		58	5290.0	996	1	6.96	0.005	≤ 30.00
		106	5530.0	996	1	7.29	0.005	≤ 24.00
		122	5610.0	996	1	7.38	0.005	≤ 24.00
		155	5775.0	966	1	14.26	0.027	≤ 30.00
Mode 18	MCS0	50	5250.0	1992	1	2.48	0.002	≤ 24.00
		50	5250.0	1992	1	1.96	0.002	≤ 24.00
		114	5570.0	1992	1	5.56	0.004	≤ 24.00

操作模式 : Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14						
測試結果 : 合格						
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 8	36	5180.0	6	10.74	0.012	≤ 24.00
	40	5200.0		18.41	0.069	≤ 24.00
	48	5240.0		18.51	0.071	≤ 24.00
	52	5260.0		18.30	0.068	≤ 24.00
	56	5280.0		18.39	0.069	≤ 24.00
	64	5320.0		10.66	0.012	≤ 24.00
	100	5500.0		10.45	0.011	≤ 24.00
	112	5560.0		18.39	0.069	≤ 24.00
	140	5700.0		10.02	0.010	≤ 24.00
	149	5745.0		18.12	0.065	≤ 30.00
	157	5785.0		18.09	0.064	≤ 30.00
	165	5825.0		18.23	0.067	≤ 30.00
Mode 9	36	5180.0	13	10.67	0.012	≤ 24.00
	40	5200.0		18.46	0.070	≤ 24.00
	48	5240.0		18.42	0.069	≤ 24.00
	52	5260.0		18.28	0.067	≤ 24.00
	56	5280.0		18.22	0.066	≤ 24.00
	64	5320.0		10.60	0.011	≤ 24.00
	100	5500.0		10.39	0.011	≤ 24.00
	112	5560.0		18.31	0.068	≤ 24.00
	140	5700.0		9.93	0.010	≤ 24.00
	149	5745.0		18.05	0.064	≤ 30.00
	157	5785.0		18.05	0.064	≤ 30.00
	165	5825.0		18.11	0.065	≤ 30.00
Mode 10	38	5190.0	27	10.14	0.010	≤ 24.00
	46	5230.0		17.72	0.059	≤ 24.00
	54	5270.0		17.69	0.059	≤ 24.00
	62	5310.0		10.13	0.010	≤ 24.00
	102	5510.0		10.16	0.010	≤ 24.00
	110	5550.0		17.94	0.062	≤ 24.00
	134	5670.0		9.67	0.009	≤ 24.00
	151	5755.0		17.49	0.056	≤ 30.00
	159	5795.0		17.48	0.056	≤ 30.00

操作模式 : Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12 / Mode 13 / Mode 14						
測試結果 : 合格						
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 11	36	5180.0	13	10.73	0.012	≤ 24.00
	40	5200.0		18.38	0.069	≤ 24.00
	48	5240.0		18.50	0.071	≤ 24.00
	52	5260.0		18.32	0.068	≤ 24.00
	56	5280.0		18.38	0.069	≤ 24.00
	64	5320.0		10.69	0.012	≤ 24.00
	100	5500.0		10.49	0.011	≤ 24.00
	112	5560.0		18.38	0.069	≤ 24.00
	140	5700.0		10.03	0.010	≤ 24.00
	149	5745.0		18.14	0.065	≤ 30.00
	157	5785.0		18.15	0.065	≤ 30.00
	165	5825.0		18.23	0.066	≤ 30.00
Mode 12	38	5190.0	27	10.18	0.010	≤ 24.00
	46	5230.0		17.81	0.060	≤ 24.00
	54	5270.0		17.79	0.060	≤ 24.00
	62	5310.0		10.14	0.010	≤ 24.00
	102	5510.0		10.20	0.010	≤ 24.00
	110	5550.0		18.02	0.063	≤ 24.00
	134	5670.0		9.69	0.009	≤ 24.00
	151	5755.0		17.54	0.057	≤ 30.00
	159	5795.0		17.56	0.057	≤ 30.00
Mode 13	42	5210.0	58.6	10.24	0.011	≤ 24.00
	58	5290.0		10.22	0.011	≤ 24.00
	106	5530.0		10.14	0.010	≤ 24.00
	122	5610.0		10.41	0.011	≤ 24.00
	155	5775.0		17.30	0.054	≤ 30.00
Mode 14	50	5250.0	117	5.09	0.003	≤ 24.00
	50	5250.0		5.09	0.003	≤ 24.00
	114	5570.0		8.26	0.007	≤ 24.00

操作模式 : Mode 15 / Mode 16 / Mode 17 / Mode 18								
測試結果 : 合格								
操作模式	Data Rate (Mbps)	頻道 CH	Frequency (MHz)	RU Type	RU NO.	最大傳導輸出功率		
						ANT-0+1		Limit (dBm)
						dBm	mW	
Mode 15	MCS0	36	5180.0	242	1	11.06	0.013	≤ 24.00
		40	5200.0	242	1	18.64	0.073	≤ 24.00
		48	5240.0	242	1	18.68	0.074	≤ 24.00
		52	5260.0	242	1	18.44	0.070	≤ 24.00
		56	5280.0	242	1	18.53	0.071	≤ 24.00
		64	5320.0	242	1	11.02	0.013	≤ 24.00
		100	5500.0	242	1	10.75	0.012	≤ 24.00
		112	5560.0	242	1	18.34	0.068	≤ 24.00
		140	5700.0	242	1	10.19	0.010	≤ 24.00
		149	5745.0	242	1	18.26	0.067	≤ 30.00
		157	5785.0	242	1	18.16	0.066	≤ 30.00
		165	5825.0	242	1	18.36	0.069	≤ 30.00
Mode 16	MCS0	38	5190.0	484	1	10.53	0.011	≤ 24.00
		46	5230.0	484	1	17.92	0.062	≤ 24.00
		54	5270.0	484	1	17.92	0.062	≤ 24.00
		62	5310.0	484	1	10.56	0.011	≤ 24.00
		102	5510.0	484	1	10.52	0.011	≤ 24.00
		110	5550.0	484	1	17.98	0.063	≤ 24.00
		134	5670.0	484	1	9.90	0.010	≤ 24.00
		151	5755.0	484	1	17.61	0.058	≤ 30.00
		159	5795.0	484	1	17.68	0.059	≤ 30.00
Mode 17	MCS0	42	5210.0	966	1	10.60	0.011	≤ 24.00
		58	5290.0	996	1	10.65	0.012	≤ 30.00
		106	5530.0	996	1	10.65	0.012	≤ 24.00
		122	5610.0	996	1	10.65	0.012	≤ 24.00
		155	5775.0	966	1	17.46	0.056	≤ 30.00
Mode 18	MCS0	50	5250.0	1992	1	5.85	0.004	≤ 24.00
		50	5250.0	1992	1	5.85	0.004	≤ 24.00
		114	5570.0	1992	1	8.93	0.008	≤ 24.00