


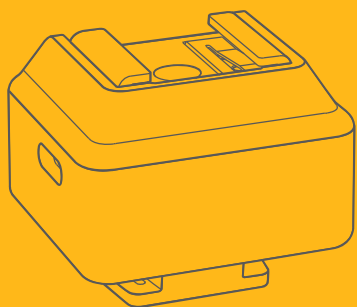

T1

2.4G无线迷你引闪器
2.4G Wireless Mini Flash Trigger

Important Safety Instructions

This product is a professional photographic equipment, to be operated by professional personnel only.

All transport protective materials and packaging on the product must be removed before use.

The following basic safety precautions must be followed when using this product:


1. Carefully read and fully understand the instruction manual before use and strictly follow the safety instructions. Failure to do so may result in serious injury, damage to the product, or other property damage.
2. Do not use damaged equipment or accessories. Allow professional repair technicians to inspect and confirm normal operation before continuing use after repairs.
3. Disconnect the power supply when not in use.
4. This device is not waterproof. Keep it dry and avoid immersing it in water or other liquids. It should be installed in a ventilated and dry location and avoid using in rainy, humid, dusty, or overheated environments. Do not place items above the device or allow liquids to flow into it to prevent danger.
5. Do not disassemble without authorization. If the product malfunctions, it must be inspected and repaired by our company or authorized repair personnel.
6. Do not place the device near alcohol, gasoline, or other flammable volatile solvents or gases such as methane and ethane.
7. Do not use or store this device in potentially explosive environments.
8. Clean gently with a dry cloth. Do not use a wet cloth as it may damage the device.
9. This instruction manual is based on rigorous testing. Changes in design and specifications are subject to change without notice. Check official website for latest instruction manual and product updates.
10. The warranty period for this device as a whole is one year. Unauthorized repairs will void the warranty and will incur charges.
11. Failures from improper operation is not covered under warranty.

Foreword

Thank you for purchasing!

Zeniko's newly launched flash trigger T1 has a compact and portable size, 2.4G wireless triggering with built-in transmitting and receiving system, quite suitable for introductory use with compact flash.

Name of Parts

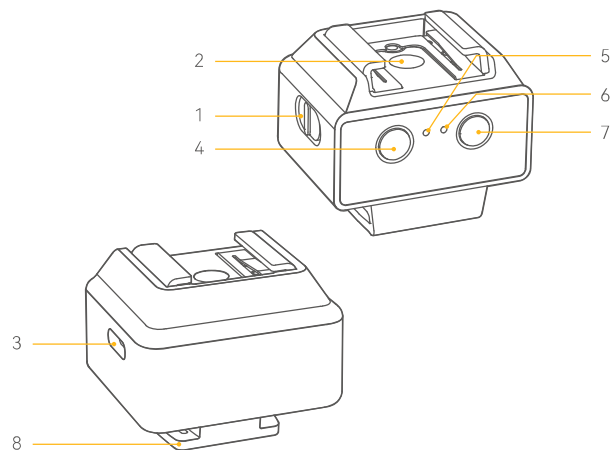

- | | |
|-------------------------------------|---------------------------------|
| 1. Transmitter/Receiver Switch | 5. Power Indicator |
| 2. Hot Shoe Port (connect to flash) | 6. Pairing Indicator |
| 3. USB-C Port | 7. Pairing Button |
| 4. Power Switch/Test Button | 8. Hot Shoe (connect to camera) |

What's Inside T1 Kit




Note: Due to continuous updates and upgrades of the products, there may be differences between the actual products and the pictures. Therefore, the pictures are for reference only, products to prevail in kind.

Power Switch

Power on: Press and hold the power switch button until the power indicator lights up. The power indicator will be constant on red if the battery level is less than 20%, green if the battery level is higher than 20%, and flashes red rapidly before the battery is exhausted.
Power off: Press and hold the power switch button again until the power indicator turns off.
Auto power off: After powering on, the flash trigger will automatically shut down if there is no operation within 8 hours.

Transmitter and Receiver Setting


Toggle the transmitter/receiver switch to set the flash trigger as a transmitter unit or receiver unit.



Note: The pairing distance of the transmitter unit and receiver unit should be 1m.

Transmitter and Receiver Pairing

Power on the two flash triggers, and set them as the transmitter unit and receiver unit respectively. Please pay attention to the pairing indicator during the pairing process.



1. After finishing the steps as shown in the figure, press the test button to trigger a flash (the pairing indicator will flash when the receiver has received the triggering signal).

2. After the pairing is completed, you can exit the pairing mode as follows, and the pairing indicator will be constant on green.
Transmitter unit: Wait for 30s and then automatically exit the pairing mode.
Receiver unit: Automatically exit after successfully paired, or automatically exit pairing mode after 30s when pairing failed.

Transmitter/Receiver unit: Press the pairing button to exit pairing mode.
Note: The triggering distance of transmitter unit and receiver unit should be 0.1m to 100m.

Channel Switch

Power on the transmitter unit, press and hold the pairing button for 5s to switch channels of the transmitter unit, it will enter pairing status after the pairing indicator flashing green rapidly.

Clear Pairing

Press and hold the power switch button and the pairing button for 5s in power on status to clear all pairing information. Both pairing indicators will flash red rapidly for 3s, then the pairing indicator of transmitter unit will be constant on green, while the receiver unit be constant on red.

Hibernation/Wake-up

Hibernation: The receiver unit will enter the hibernation mode without any operation in 30 minutes, the power indicator will flash green slowly (flash red slowly in low power state), and the pairing indicator will be off.
Wake up method 1: Press the pairing button of the transmitter unit to wake up the receiver unit.
Wake up mode 2: Turn off the receiver unit then turn it on to exit the hibernation mode, the pairing indicator will flash red and green rapidly and alternately for 2s, then the power indicator and pairing indicator will return to normal.

Resetting

If the flash trigger crashes, it can be reset as follows.
1. Mount the flash trigger onto the camera hot shoe.
2. Press and hold the power switch button of the flash trigger and press the camera shutter button at the same time to reset;
3. Reboot the flash trigger after resetting.

Charging Instructions

1. Plug the charging cord into the USB-C port, turn on the power supply to charge the flash trigger. The flash trigger supports charging while using.
2. The power indicator is constant on red indicates that it is charging, while constant on green indicates that it is fully charged.
3. When the battery is low, please charge it in time before using or placing.

Charging Instructions

Model	T1
Built-in Lithium Battery	3.2V # 200mAh
Built-in Wireless	2.4GHz
Transmission Distance	100m
USB-C Port	5V max 0.2A (Max.)
Charging Time	<60min
Battery Life	TX mode >40h RX mode >8h
Working Environment Temperature	-10°C ~ +40°C
Dimension	~1.24"x1.18"x1.1" (L x W x H)
Net Weight	~22g

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.

Warning

Operating frequency 2400MHz ~ 2483.5MHz
Maximum EIRP Power 5dBm

Declaration of Conformity

Zeniko Technology Co., Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states/for more information of DoC, Please click this web link: <https://zeniko.com/EU/TT1.PDF>
The device complies with RF specifications when the device used at 0mm from your body.

IC Warning

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes:
(1) L'appareil ne doit pas produire de brouillage, et
(2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'ICODE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.
Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États-Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilise et rayonne, ce qui peut causer des interférences nuisibles pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions.
Cependant, aucun
Garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:
- rediriger ou repositionnement de l'antenne de réception,
- augmenter l'éspacement entre l'appareil et le récepteur,
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.

Avertissement RF pour les appareils portables:
L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. Equipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day of purchase (date) when the product is bought for the first time. And the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases:
① The product or accessory has expired its warranty period;
② Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc;
③ Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alteration, addition and detachment;
④ The original identifying information of product or accessory is modified, alternated, or removed;
⑤ No valid warranty card;
⑥ Breakage or damage caused by using illegally authorized, nonstandard or non-qualify related software;
⑦ Breakage or damage caused by force majeure or accident;
⑧ Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal disintegration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit Board	12	Customer sends the product to designated site
Other Items	Lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Zeniko After-sale Service Call: 438-435-25106331



深圳卓立久科技有限公司
地址：深圳市福田区桂海田海新社区文海西街5033号金山大厦1208
电话：0755-25106331

Zeniko Technology Co., LTD
Add: 1208 Room, Jinshan Building, No.5033, Shenwan East Road, Xinhai Community, Guixian Street, Luohu District, Shenzhen City, P.R. China
Tel: 0755-25106331

www.zeniko.com
Made in China | 705-110000-00

