Test Report

Cisco C9117AXI-x
(x=A,B,N,T,Z)

Cisco Catalyst C9117AX Series

FCC ID: LDKHDGWI1903
IC: 2461N-HDGWI1903

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247
RSS-247
RSS-Gen
LP0002 (2018-01-10)

台灣思科系統股份有限公司

臺北市信義區信義路 4 段 460 號 12 樓

Brand:Cisco/Model:C9117AXI-T for Taiwan

ACCREDITED

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

Author: Chris Blair, Allan Beecroft **Tested By:** Chris Blair	**Approved By:** Allan Beecroft **Title:** Technical Manager **Revision:** Controlled by Doc Central

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This report replaces any previously entered test report under EDCS – 17873336. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644121.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

SECTION 1: OVERVIEW **3**

SECTION 2: ASSESSMENT INFORMATION **5**

2.1 General 5
2.2 Date of testing 7
2.3 Report Issue Date 7
2.4 Testing facilities 7
2.5 Equipment Assessed (EUT) 7
2.6 EUT Description 8

SECTION 3: RESULT SUMMARY **10**

3.1 Results Summary Table 10

SECTION 4: SAMPLE DETAILS **12**

4.1 Sample Details 12
4.2 System Details 12
4.3 Mode of Operation Details 12

APPENDIX A: CONDUCTED EMISSION TEST RESULTS **13**

Conducted Test Setup Diagram 13
Target Maximum Channel Power 13
A.1 Duty Cycle 14
A.2 DTS Bandwidth (6dB Bandwidth) 18
A.3 Occupied Bandwidth 22
A.4 Maximum Conducted Output Power 26
A.5 Power Spectral Density 32
A.6 Conducted Spurious Emissions 36
A.7 Conducted Bandedge (Restricted Band) 52
A.8 Conducted Bandedge (Non-Restricted Band) 62

APPENDIX B: RADIATED EMISSION TEST RESULTS **66**

APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST **67**

APPENDIX D: ABBREVIATION KEY AND DEFINITIONS **68**

APPENDIX E: PHOTOGRAPHS OF TEST SETUPS **68**

APPENDIX F: SOFTWARE USED TO PERFORM TESTING **71**

APPENDIX G: TEST PROCEDURES **71**

APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01) **71**

APPENDIX I: TEST ASSESSMENT PLAN **72**

APPENDIX J: WORST CASE JUSTIFICATION **72**

APPENDIX K: UUT SOFTWARE INFO FROM CLI **72**

Section 1: Overview

The samples were assessed against the tests under the requirements of the following specifications:

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Emission
CFR47 Part 15.247 RSS-247 Issue 2: Feb 2017 RSS-Gen Issue 5: Apr 2018 LP0002 (2018-01-10)

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.

b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.

c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).

d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10-7
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.2 Date of testing

09-Nov-18 - 20-Nov-18 (conducted tests)

2.3 Report Issue Date

29-Jan-2019

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by: Chris Blair

A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

NCC (National Communications Commission) APEC Tel MRA -Phase I

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134	Company #: 2461N-3

Test Engineers

Chris Blair

2.5 Equipment Assessed (EUT)

Cisco C9117AXI-x-K9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2.6 EUT Description

The C9117AXI-x-K9 is a dual-band 802.11ax wireless access point w/ BLE, supporting the following WLAN modes:

802.11b (1-11Mbps)
802.11g (6-54Mbps)
802.11n (MCS0-MCS31)
802.11ax (MCS0-MCS11)
802.11a (6-54Mbps)
802.11n (MCS0-MCS31)
802.11ac (MCS0-MCS9)
802.11ax (MCS0-MCS11)

and using the following bands: 2400MHz – 2483.5MHz 5150MHz – 5250MHz 5250MHz – 5350MHz 5470MHz – 5725MHz, 5725MHz-5850MHz.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

The following antennas are supported by this product.

Frequency	HOST PID | Part Number - Please align Host(s) with antenna(s)	ANTENNA PID | Part Number	Antenna Type	Antenna Gain (includes antenna cable loss)	Antenna + Host | Max Antenna Gain | (EIRP)	Antenna + Host | >30 degree 5 GHz Antenna Gain | (dBi)
2.4 GHz & 5 GHz	TX/RX: Internal	(ANT A: WIFI 2.4 GHz & 5 GHz)	single port, dual band omni	2.4 GHz: 3.5 dBi 5 GHz: 4.5 dB	**2.4 GHz WiFi-** 1 path: 17dBm + 0dB + 3.5dBi = 20.5dBm **5 GHz WiFi -** 1 path: 17dBm + 0dB + 4.5dBi = 21.5dBm	
2.4 GHz & 5 GHz	TX/RX: Internal	(ANT B: WIFI 2.4 GHz & 5 GHz)	single port, dual band omni	2.4 GHz: 3.5 dBi 5 GHz: 6 dBi	**2.4 GHz WiFi-** 1 path: 17dBm + 0dB + 3.5dBi = 20.5dBm **5 GHz WiFi -** 1 path: 17dBm + 0dB + 6dBi = 23dBm	
2.4 GHz & 5 GHz	TX/RX: Internal	(ANT C: WIFI 2.4 GHz & 5 GHz)	single port, dual band omni	2.4 GHz: 4 dBi 5 GHz: 6 dBi	**2.4 GHz WiFi-** 1 path: 17dBm + 0dB + 4dBi = 21dBm **5 GHz WiFi -** 1 path: 17dBm + 0dB + 6dBi = 23dBm	
2.4 GHz & 5 GHz	TX/RX: Interna	(ANT D: WIFI 2.4 GHz/BLE 2.4 GHz & 5 GHz)	single port, dual band omni	2.4 GHz: 3.5 dBi 5 GHz: 5 dBi	**2.4 GHz BLE-** 1 path: 5dBm + 0dB + 3.5dBi = 8.5dBm **2.4 GHz WiFi-** 1 path: 17dBm + 0dB + 3.5dBi = 20.5dBm **5 GHz WiFi -** 1 path: 17dBm + 0dB + 5dBi = 22dBm	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Worst-case results from the tables are in **bold,** and are represented in plots that follow the tables.

Basic Standard	Technical Requirements / Details	Result
FCC 15.247 RSS-247 LP0002 (2018-01-10) (3.10.1.6) (2)(A)	**6dB Bandwidth** Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz	Pass
FCC 15.247 RSS-247	**99% & 26 dB Bandwidth**: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.247 RSS-247 LP0002 (2018-01-10) (3.10.1.2) (1) (C)	**Output Power**: **15.247** The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. **RSS-247** For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.	Pass
FCC 15.247 RSS-247 LP0002 (2018-01-10) (3.10.1.6) (2) (B)	**Power Spectral Density** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	Pass
FCC 15.247 RSS-247 LP0002 (2018-01-10) (3.10.1.5) 2.8	**Conducted Spurious Emissions / Band-Edge**: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.	Pass

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

FCC 15.247 RSS-247 FCC 15.205 RSS-Gen	**Restricted band**: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 RSS-Gen LP0002 (2018-01-10) (3.10.1.5) 2.8	**TX Spurious Emissions:** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section. Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9	Tested at BACL
RSS-Gen LP0002 (2018-01-10) (3.10.1.5) 2.8	**RX Spurious Emissions:** **RSS-Gen 8.9** Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission. **RSS-Gen 8.10 Restricted Bands** Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and (c) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.	Tested at BACL
FCC 15.207 RSS-Gen LP0002 (2018-01-10) 2.3	**AC conducted Emissions:** Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Tested at BACL

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	Cisco C9117AXI-x-K9	Cisco Systems	P3b	See Appendix K	See Appendix K	KWC223301QV
S02	AIR-PWRINJ6	MicroSemi for Cisco	V01	NA	NA	C16036663000 000276

4.2 System Details

System #	Description	Samples
1	Cisco C9117AXI-x-K9 + PSU for conducted measurements	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting, constant high duty cycle

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix A: Conducted Emission Test Results

Conducted Test Setup Diagram

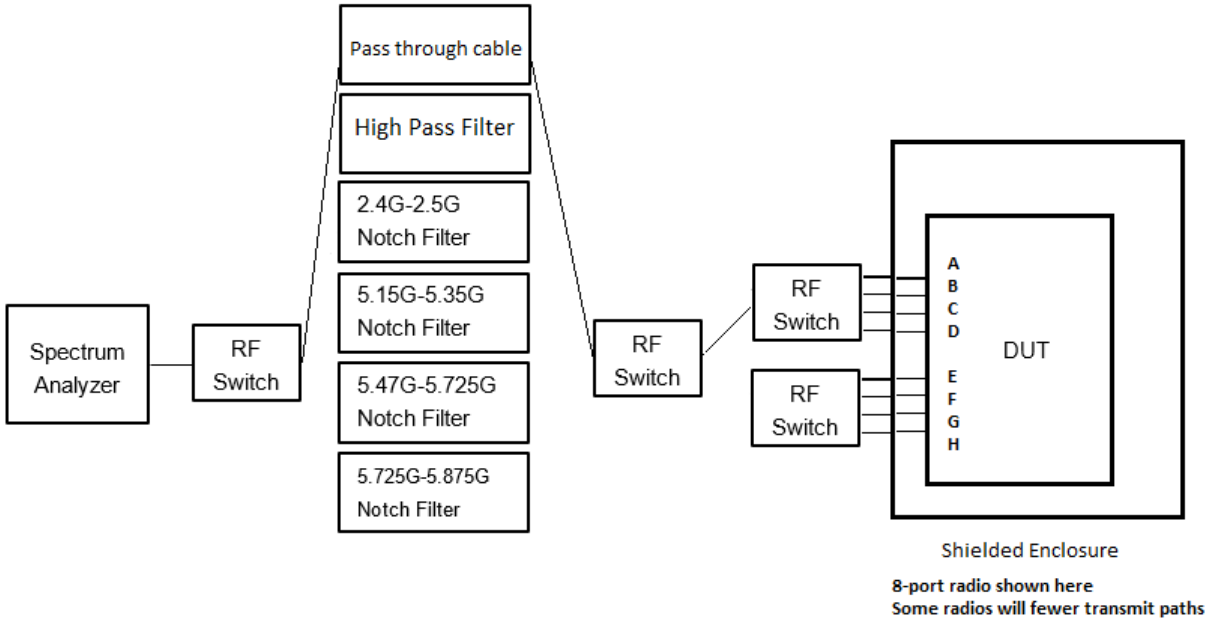

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

	Maximum Channel Power (dBm EIRP)		
	Frequency (MHz)		
Operating Mode	**2412**	**2437**	**2462**
Legacy CCK, 1 to 11 MB/s	**28**	**28**	**28**
Non HT20, 6 to 54 Mbps	**25**	**28**	**24**
Non HT20 Beam Forming, 6 to 54 Mbps	**29**	**34**	**29**
HT20, M0 to M31	**25**	**28**	**25**
HT20 Beam Forming, M0 to M31	**29**	**34**	**29**
HT20 STBC, M0 to M7	**25**	**28**	**25**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.1 Duty Cycle

Duty Cycle Test Requirement

From KDB 558074, Section 6

6.0 Duty cycle, transmission duration and maximum power control level

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (*i.e.*, with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. …

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternate procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle. Within this guidance document, the duty cycle refers to the fraction of time over which the transmitter is on and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ± 2 percent, otherwise the duty cycle is considered to be non-constant.

Duty Cycle Test Method

From KDB 558074, Section 6:

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value. Set VBW ≥ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T ≤ 16.7 microseconds.)

Duty Cycle Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By :	Date of testing:
Chris Blair	09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Mode	Data Rate	On-time (ms)	Total Time (ms)	Duty Cycle (%)	Correction Factor (dB)
NonHT20	6Mbps	2.097	2.217	94.6	0.24
CCK	11Mbps	1.326	1.515	87.5	0.58
HT20	M0	5.432	5.712	95.1	0.22

Duty Cycle Data Screenshots

Duty Cycle, 2412 MHz, 6Mbps

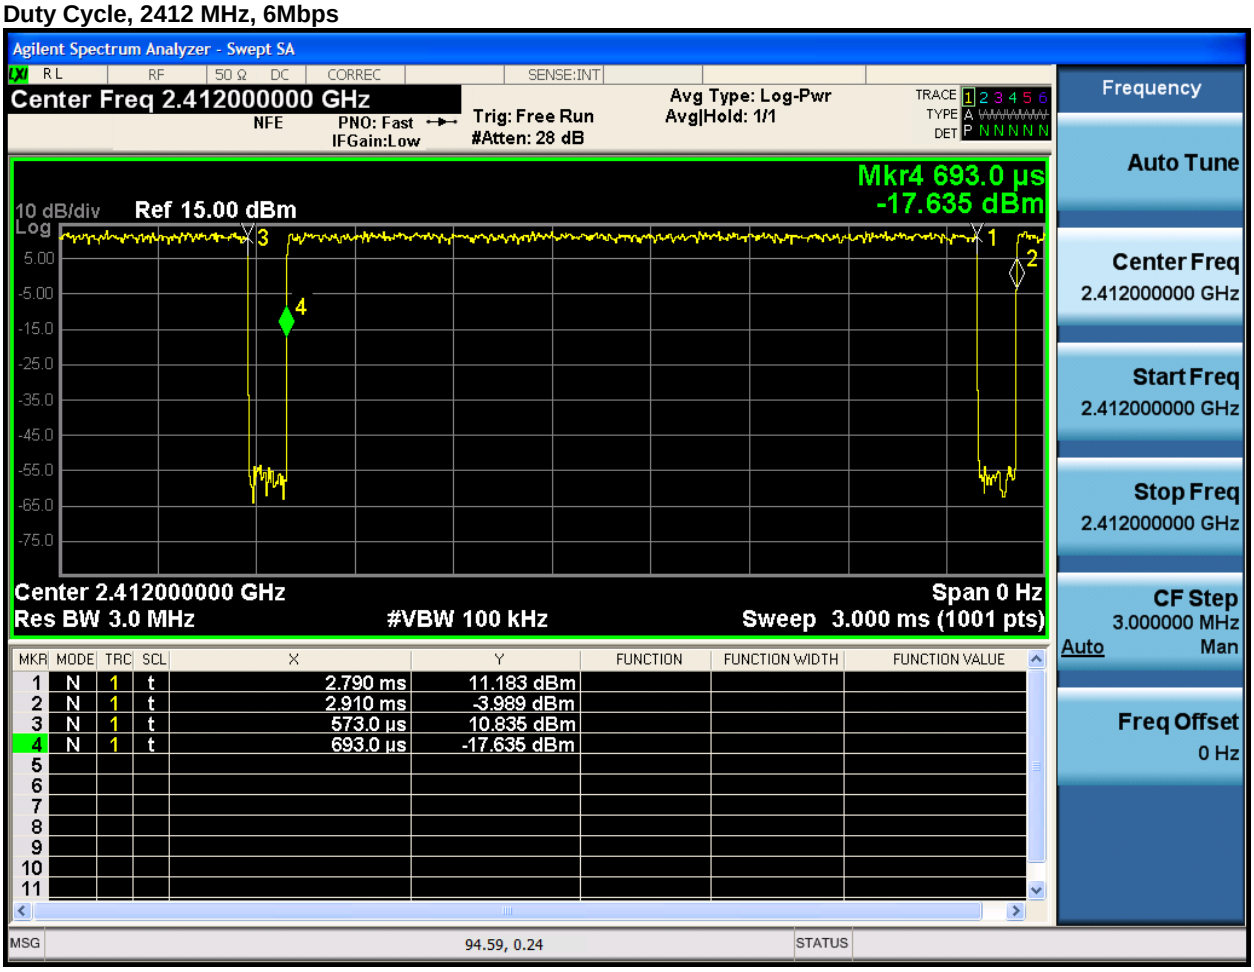

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Duty Cycle, 2412 MHz, 11Mbps

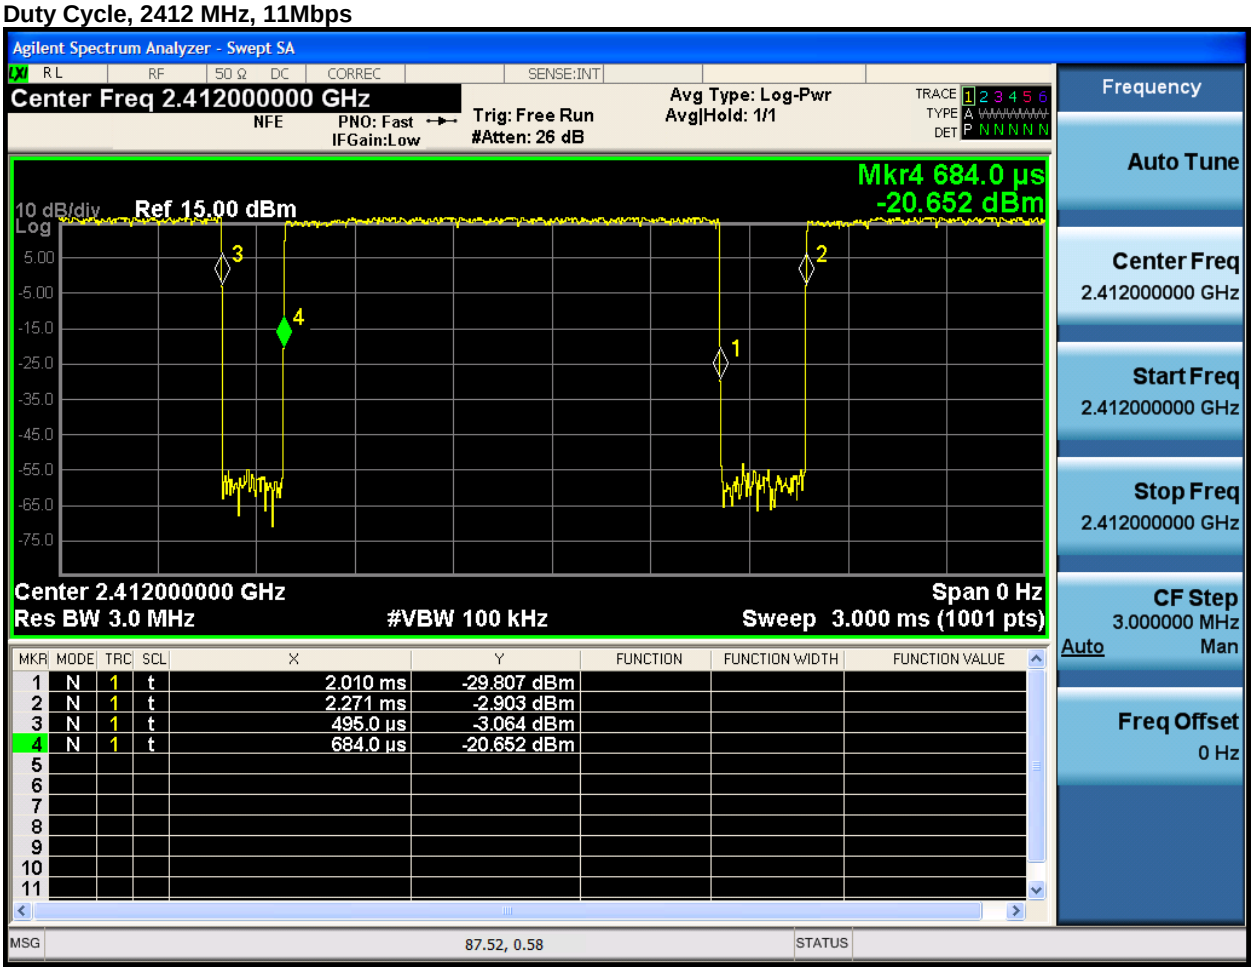

Duty Cycle, 2412 MHz, M0

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

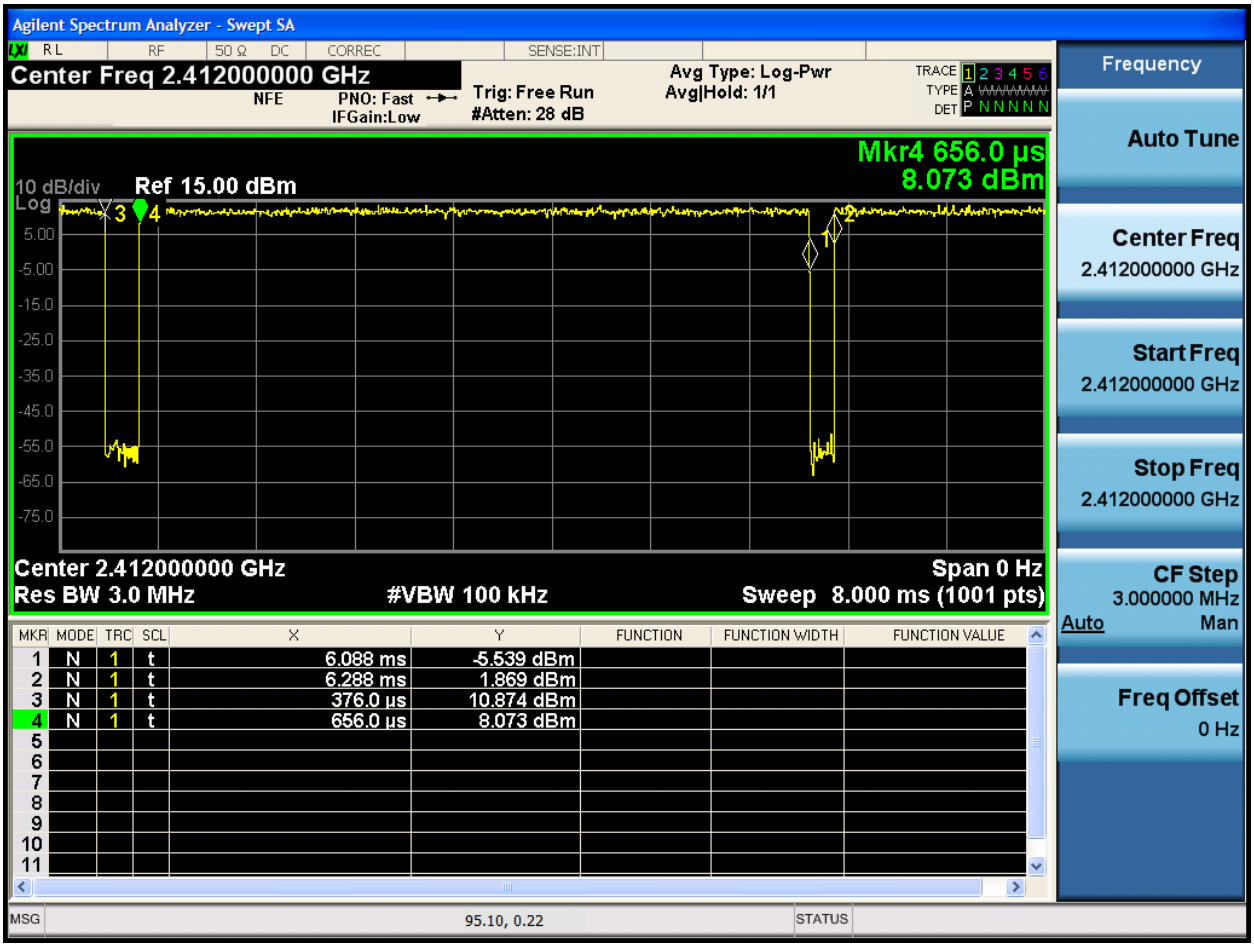

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.2 DTS Bandwidth (6dB Bandwidth)

DTS Bandwidth Test Requirement

For the FCC/ LP0002 (2018-01-10) (3.10.1.6) (2) (A)
15.247 (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

For Industry Canada:
RSS-247 5.2 (a)

5.2 Digital transmission systems
DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:
a) The minimum 6 dB bandwidth shall be 500 kHz.

DTS Bandwidth/ 6dB Bandwidth Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v05, Section 8.2
ANSI C63.10: 2013, Clause 11.8.2 Option 2

6 BW Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v05, Section 8.2
ANSI C63.10: 2013, Clause 11.8.2 Option 2

6 BW Test parameters

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

11.8 DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

11.8.1 Option 1

The steps for the first option are as follows:

a) Set RBW = 100 kHz.

b) Set the VBW ≥ [3 × RBW].

c) Detector = peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

11.8.2 Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the *X* dB bandwidth mode with *X* set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥6 dB.

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By : Chris Blair	**Date of testing:** 20-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
2412	CCK, 1 to 11 MB/s	11	7.6	>500	7.1
	Non HT20, 6 to 54 Mbps	6	16.1	>500	15.6
	HT20, M0 to M31	m0	16.5	>500	16.0
2437	CCK, 1 to 11 MB/s	11	8.0	>500	7.5
	Non HT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT20, M0 to M31	m0	17.6	>500	17.1
2462	**CCK, 1 to 11 MB/s**	**11**	**7.0**	**>500**	**6.5**
	Non HT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT20, M0 to M31	m0	17.4	>500	16.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

6dB Bandwidth, 2462 MHz, CCK, 1 to 11 MB/s

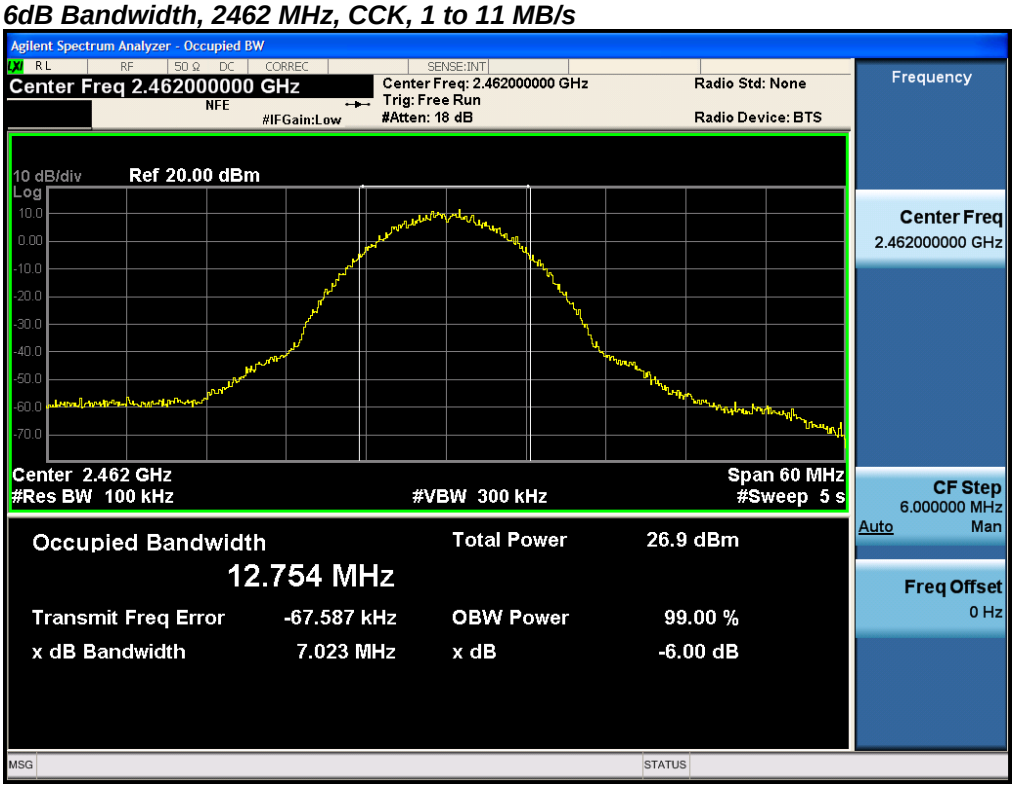

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.3 Occupied Bandwidth

Occupied Bandwidth Test Requirement

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth Test Method

Ref. ANSI C63.10: 2013

Occupied Bandwidth Test Procedure
1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -26dB & OBW to 99% within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 6.9.3

Occupied Bandwidth Test parameters
6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By : Chris Blair	**Date of testing:** 09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
2412	**CCK, 1 to 11 MB/s**	**11**	**16.7**	**12.681**
	Non HT20, 6 to 54 Mbps	6	20.4	16.539
	HT20, M0 to M31	m0	20.0	17.536
2437	CCK, 1 to 11 MB/s	11	16.6	12.801
	Non HT20, 6 to 54 Mbps	6	22.1	16.629
	HT20, M0 to M31	m0	20.5	17.578
2462	CCK, 1 to 11 MB/s	11	16.7	12.776
	Non HT20, 6 to 54 Mbps	6	20.5	16.573
	HT20, M0 to M31	m0	20.1	17.545

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

26dB / 99% Bandwidth, 2412 MHz, CCK, 1 to 11 MB/s

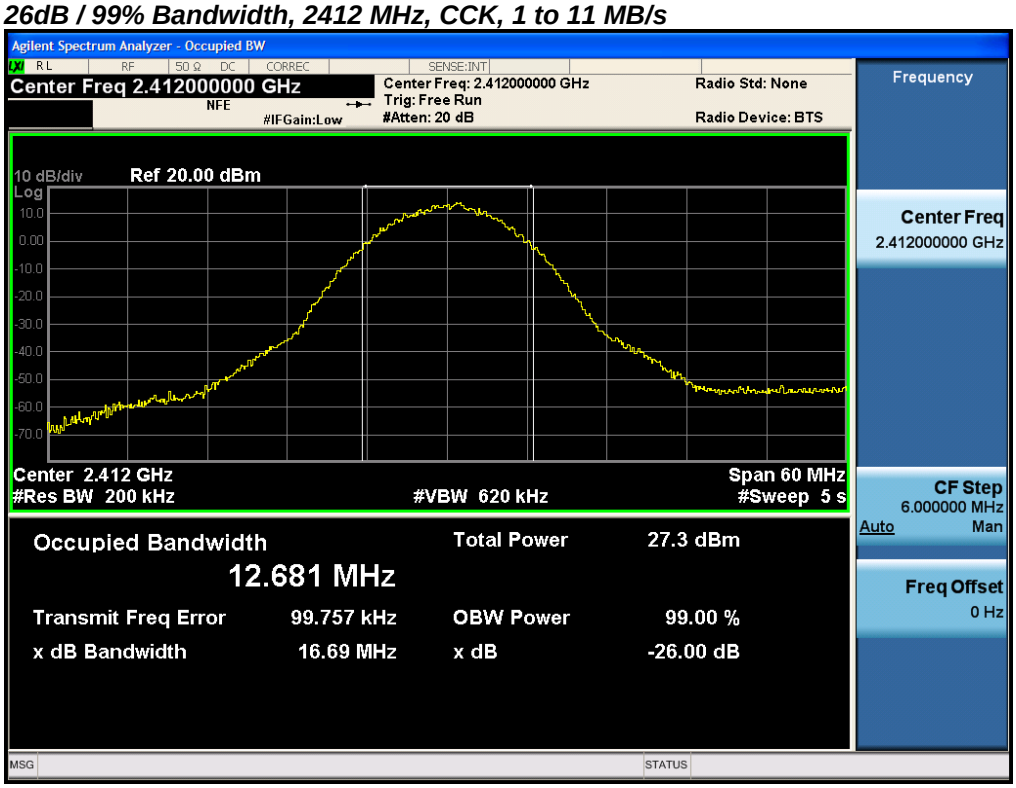

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.4 Maximum Conducted Output Power

Maximum Conducted Output Power Test Requirement

FCC, 15.247/ LP0002 (2018-01-10) (3.10.1.2) (1) (C):
(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, **2400-2483.5 MHz**, and 5725-5850 MHz bands: **1 Watt**. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Industry Canada, RSS-247:

5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements
d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

The maximum supported antenna gain is 4dBi. The peak correlated gain for each mode is listed in the table below.

Maximum Conducted Output Power Test Method

Ref. KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10: 2013

Maximum Conducted Output power Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. 558074 D01 DTS Meas Guidance v05, 8.3.2.2 Measurement using a spectrum analyzer (SA)
ANSI C63.10: 2013, section 11.9.2.2.4 Method AVGSA-2

Maximum Conducted Output power Test parameters

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

11.9.2.2.4 Method AVGSA-2

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

a) Measure the duty cycle *D* of the transmitter output signal as described in 11.6.

b) Set span to at least 1.5 times the OBW.

c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.

d) Set VBW ≥ [3 × RBW].

e) Number of points in sweep ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)

f) Sweep time = auto.

g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.

h) Do not use sweep triggering. Allow the sweep to "free run."

i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.

j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

k) Add [10 log (1 / *D*)], where *D* is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3 for Guidance)

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By :	Date of testing:
Chris Blair	09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

Note: Limit is modified to ensure complying with both conducted power limit of 30dBm and eirp limit of 36 dBm

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm) EIRP	Margin (dB)
2412	CCK, 1 to 11 MB/s	1	4	19.0				23.0	33.4	10.4
	CCK, 1 to 11 MB/s	2	4	19.0	18.3			25.7	33.4	7.7
	CCK, 1 to 11 MB/s	3	4	19.0	18.3	17.6		27.1	33.4	6.3
	CCK, 1 to 11 MB/s	4	4	19.0	18.3	17.6	17.6	28.2	33.4	5.2
	Non HT20, 6 to 54 Mbps	1	4	17.4				21.4	33.8	12.4
	Non HT20, 6 to 54 Mbps	2	4	16.6	15.6			23.1	33.8	10.6
	Non HT20, 6 to 54 Mbps	3	4	16.6	15.6	14.9		24.5	33.8	9.2
	Non HT20, 6 to 54 Mbps	4	4	14.6	13.7	13.1	13.2	23.7	33.8	10.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	15.7	14.6			25.2	35.8	10.6
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	14.6	13.7	13.1		27.6	35.8	8.1
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	13.6	12.7	11.8	11.9	28.6	35.8	7.2
	HT20, M0 to M7	1	4	18.5				22.5	33.8	11.3
	HT20, M0 to M7	2	4	18.5	17.4			25.0	33.8	8.8
	HT20, M8 to M15	2	4	18.5	17.4			25.0	33.8	8.8
	HT20, M0 to M7	3	4	17.2	16.5	15.8		25.3	33.8	8.5
	HT20, M8 to M15	3	4	17.2	16.5	15.8		25.3	33.8	8.5
	HT20, M16 to M23	3	4	17.2	16.5	15.8		25.3	33.8	8.5
	HT20, M0 to M7	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3
	HT20, M8 to M15	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3
	HT20, M16 to M23	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3
	HT20, M24 to M31	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3
	HT20 Beam Forming, M0 to M7	2	7	17.2	16.5			26.9	35.8	8.9
	HT20 Beam Forming, M8 to M15	2	4	18.5	17.4			25.0	33.8	8.8
	HT20 Beam Forming, M0 to M7	3	9	16.5	15.5	14.7		29.4	35.8	6.4
	HT20 Beam Forming, M8 to M15	3	6	17.2	16.5	15.8		27.3	35.8	8.5
	HT20 Beam Forming, M16 to M23	3	4	17.2	16.5	15.8		25.3	33.8	8.5
	HT20 Beam Forming, M0 to M7	4	10	14.4	13.4	12.6	13.0	29.4	35.8	6.3
	HT20 Beam Forming, M8 to M15	4	7	15.4	14.3	13.7	13.9	27.4	35.8	8.4
	HT20 Beam Forming, M16 to M23	4	5	15.4	14.3	13.7	13.9	25.4	34.8	9.4
	HT20 Beam Forming, M24 to M31	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3
	HT20 STBC, M0 to M7	2	4	18.5	17.4			25.0	33.8	8.8
	HT20 STBC, M0 to M7	3	4	17.2	16.5	15.8		25.3	33.8	8.5
	HT20 STBC, M0 to M7	4	4	16.5	15.5	14.7	14.8	25.5	33.8	8.3

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2437	CCK, 1 to 11 MB/s	1	4	19.3				23.3	33.4	10.1
	CCK, 1 to 11 MB/s	2	4	19.3	18.1			25.8	33.4	7.7
	CCK, 1 to 11 MB/s	3	4	19.3	18.1	17.3		27.1	33.4	6.3
	CCK, 1 to 11 MB/s	4	4	19.3	18.1	17.3	17.7	28.2	33.4	5.2
	Non HT20, 6 to 54 Mbps	1	4	19.2				23.2	33.8	10.6
	Non HT20, 6 to 54 Mbps	2	4	19.2	18.3			25.8	33.8	8.0
	Non HT20, 6 to 54 Mbps	3	4	19.2	18.3	17.6		27.2	33.8	6.6
	Non HT20, 6 to 54 Mbps	4	4	19.2	18.3	17.6	17.7	28.3	33.8	5.5
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	19.2	18.3			28.8	35.8	7.0
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	19.2	18.3	17.6		32.2	35.8	3.6
	Non HT20 Beam Forming, 6 to 54 Mbps	**4**	**10**	**19.2**	**18.3**	**17.6**	**17.7**	**34.3**	**35.8**	**1.5**
	HT20, M0 to M7	1	4	19.0				23.0	33.8	10.8
	HT20, M0 to M7	2	4	19.0	18.2			25.6	33.8	8.1
	HT20, M8 to M15	2	4	19.0	18.2			25.6	33.8	8.1
	HT20, M0 to M7	3	4	19.0	18.2	17.4		27.0	33.8	6.7
	HT20, M8 to M15	3	4	19.0	18.2	17.4		27.0	33.8	6.7
	HT20, M16 to M23	3	4	19.0	18.2	17.4		27.0	33.8	6.7
	HT20, M0 to M7	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
	HT20, M8 to M15	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
	HT20, M16 to M23	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
	HT20, M24 to M31	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
	HT20 Beam Forming, M0 to M7	2	7	19.0	18.2			28.6	35.8	7.1
	HT20 Beam Forming, M8 to M15	2	4	19.0	18.2			25.6	33.8	8.1
	HT20 Beam Forming, M0 to M7	3	9	19.0	18.2	17.4		32.0	35.8	3.7
	HT20 Beam Forming, M8 to M15	3	6	19.0	18.2	17.4		29.0	35.8	6.7
	HT20 Beam Forming, M16 to M23	3	4	19.0	18.2	17.4		27.0	33.8	6.7
	HT20 Beam Forming, M0 to M7	4	10	19.0	18.2	17.4	17.4	34.1	35.8	1.7
	HT20 Beam Forming, M8 to M15	4	7	19.0	18.2	17.4	17.4	31.1	35.8	4.7
	HT20 Beam Forming, M16 to M23	4	5	19.0	18.2	17.4	17.4	29.1	34.8	5.7
	HT20 Beam Forming, M24 to M31	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
	HT20 STBC, M0 to M7	2	4	19.0	18.2			25.6	33.8	8.1
	HT20 STBC, M0 to M7	3	4	19.0	18.2	17.4		27.0	33.8	6.7
	HT20 STBC, M0 to M7	4	4	19.0	18.2	17.4	17.4	28.1	33.8	5.7
2462	CCK, 1 to 11 MB/s	1	4	19.2				23.2	33.4	10.2
	CCK, 1 to 11 MB/s	2	4	19.2	18.1			25.7	33.4	7.7
	CCK, 1 to 11 MB/s	3	4	19.2	18.1	17.2		27.0	33.4	6.4
	CCK, 1 to 11 MB/s	4	4	19.2	18.1	17.2	17.5	28.1	33.4	5.3
	Non HT20, 6 to 54 Mbps	1	4	17.5				21.5	33.8	12.3
	Non HT20, 6 to 54 Mbps	2	4	16.3	15.6			23.0	33.8	10.8
	Non HT20, 6 to 54 Mbps	3	4	16.3	15.6	14.6		24.3	33.8	9.4
	Non HT20, 6 to 54 Mbps	4	4	15.3	14.5	13.8	13.8	24.4	33.8	9.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	16.3	15.6			26.0	35.8	9.8

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	14.4	13.4	12.7		27.3	35.8	8.4
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	14.4	13.4	12.7	12.8	29.4	35.8	6.4
	HT20, M0 to M7	1	4	18.2				22.2	33.8	11.6
	HT20, M0 to M7	2	4	17.3	16.2			23.8	33.8	10.0
	HT20, M8 to M15	2	4	17.3	16.2			23.8	33.8	10.0
	HT20, M0 to M7	3	4	17.3	16.2	15.5		25.2	33.8	8.6
	HT20, M8 to M15	3	4	17.3	16.2	15.5		25.2	33.8	8.6
	HT20, M16 to M23	3	4	17.3	16.2	15.5		25.2	33.8	8.6
	HT20, M0 to M7	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6
	HT20, M8 to M15	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6
	HT20, M16 to M23	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6
	HT20, M24 to M31	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6
	HT20 Beam Forming, M0 to M7	2	7	17.3	16.2			26.8	35.8	9.0
	HT20 Beam Forming, M8 to M15	2	4	17.3	16.2			23.8	33.8	10.0
	HT20 Beam Forming, M0 to M7	3	9	15.3	14.4	13.5		28.2	35.8	7.5
	HT20 Beam Forming, M8 to M15	3	6	17.3	16.2	15.5		27.2	35.8	8.6
	HT20 Beam Forming, M16 to M23	3	4	17.3	16.2	15.5		25.2	33.8	8.6
	HT20 Beam Forming, M0 to M7	4	10	14.2	13.4	12.6	12.5	29.3	35.8	6.5
	HT20 Beam Forming, M8 to M15	4	7	15.3	14.4	13.5	13.7	27.3	35.8	8.5
	HT20 Beam Forming, M16 to M23	4	5	16.2	15.3	14.4	14.6	26.2	34.8	8.6
	HT20 Beam Forming, M24 to M31	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6
	HT20 STBC, M0 to M7	2	4	17.3	16.2			23.8	33.8	10.0
	HT20 STBC, M0 to M7	3	4	17.3	16.2	15.5		25.2	33.8	8.6
	HT20 STBC, M0 to M7	4	4	16.2	15.3	14.4	14.6	25.2	33.8	8.6

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Maximum Transmit Output Power, 2437 MHz, Non HT20 Beam Forming, 6 to 54 Mbps

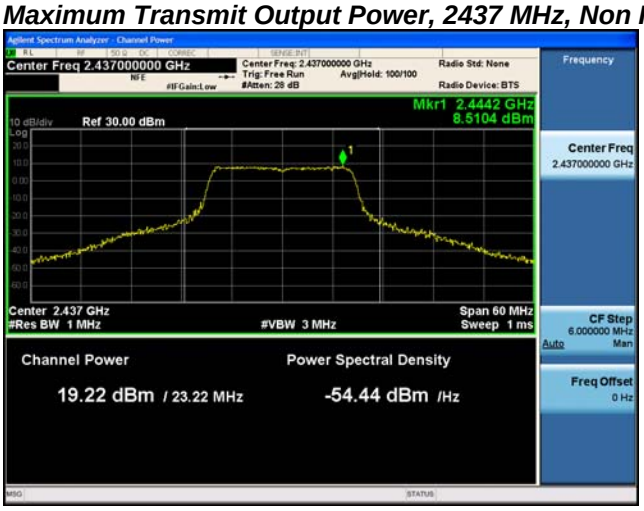

Antenna A

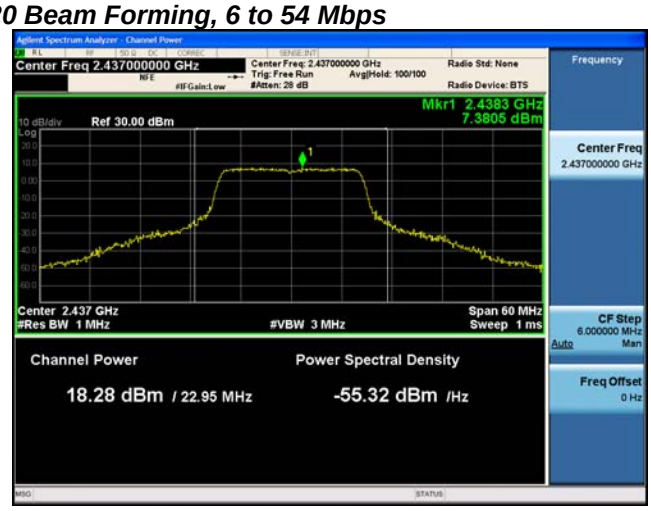

Antenna B

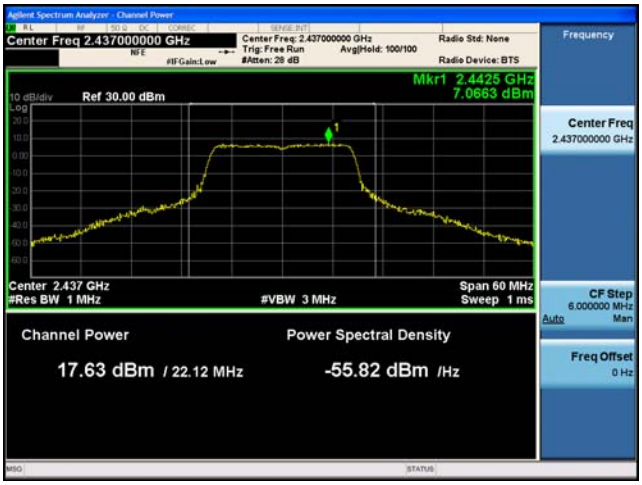

Antenna C

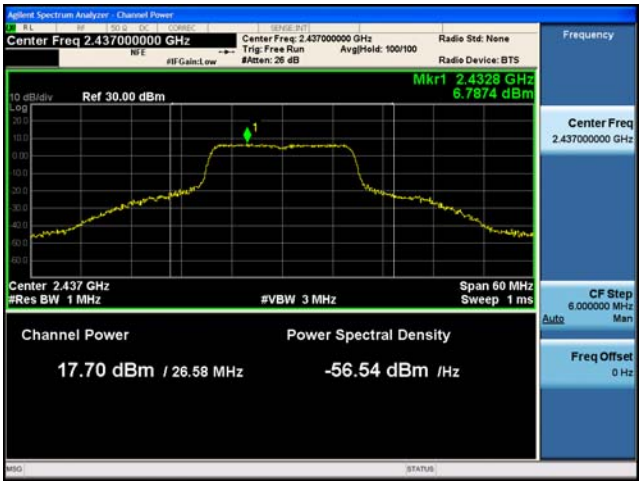

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.5 Power Spectral Density

Power Spectral Density Test Requirement

15.247 (e) / RSS-247 5.2 (b) / LP0002 (2018-01-10) (3.10.1.6) (2) (B):
5.2 Digital transmission systems
DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Power Spectral Density Test Method

Ref. KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10: 2013

Power Spectral Density Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2.Configure Spectrum analyzer as per test parameters below and Peak search marker 3. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v05, section 8.4 DTS maximum power spectral density level in the fundamental emission
ANSI C63.10: 2013, section 11.10.5 Average PSD

Power Spectral Density Test parameters
11.10.5 Method AVGPSD-2 Method AVGPSD-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than ±2%): a) Measure the duty cycle (D) of the transmitter output signal as described in 11.6. b) Set instrument center frequency to DTS channel center frequency. c) Set span to at least 1.5 times the OBW. d) Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz. e) Set VBW ≥ [3 × RBW]. f) Detector = power averaging (rms) or sample detector (when rms not available). g) Ensure that the number of measurement points in the sweep ≥ [2 × span / RBW]. h) Sweep time = auto couple. i) Do not use sweep triggering; allow sweep to "free run." j) Employ trace averaging (rms) mode over a minimum of 100 traces. k) Use the peak marker function to determine the maximum amplitude level. l) Add [10 log (1 / D)], where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time. m) If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

The “Measure and add 10 log(N) dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. (See ANSI C63.10 section 14.3.2.3)

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By : Chris Blair	**Date of testing:** 09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Data Rate (Mbps)	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2412	**CCK, 1 to 11 MB/s**	**11**	**-2.9**	**3.1**	**7.4**	**4.3**
	Non HT20, 6 to 54 Mbps	6	-9.6	-3.6	7.8	11.3
	HT20, M0 to M31	m0	-7.7	-1.7	7.8	9.4
2437	CCK, 1 to 11 MB/s	11	-3.6	2.4	7.4	5.0
	Non HT20, 6 to 54 Mbps	6	-8.0	-2.0	7.8	9.7
	HT20, M0 to M31	m0	-6.0	0.0	7.8	7.7
2462	CCK, 1 to 11 MB/s	11	-3.2	2.8	7.4	4.6
	Non HT20, 6 to 54 Mbps	6	-9.3	-3.3	7.8	11.0
	HT20, M0 to M31	m0	-7.3	-1.3	7.8	9.0

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Power Spectral Density, 2412 MHz, CCK, 1 to 11 MB/s

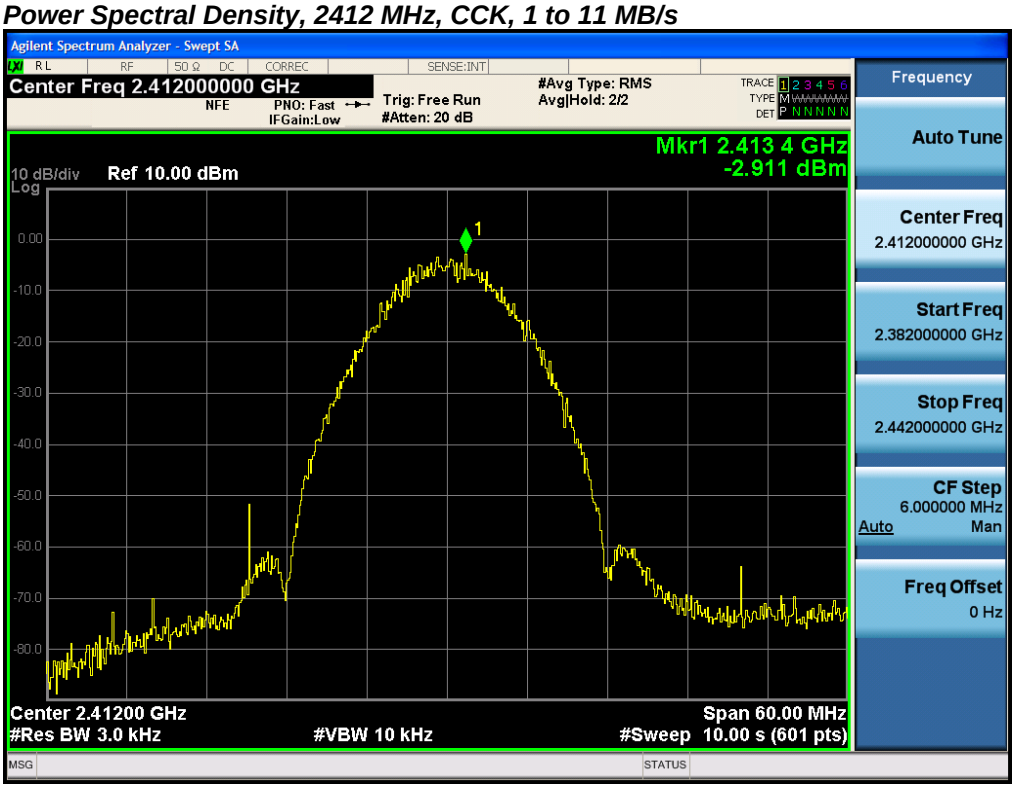

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.6 Conducted Spurious Emissions

Conducted Spurious Emissions Test Requirement

15.205 / RSS-Gen / LP0002 (2018-01-10) (3.10.1.5) (2.8):
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-GEN section 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen section 8.9

RSS-Gen 8.9 Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen 8.10 (**b)** Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and (c) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Use formula below to substitute conducted measurements in place of radiated measurements

E[dBµV/m] = EIRP[dBm] - 20 log(d[meters]) + 104.77, where E = field strength and d = 3 meter

1) Average Plot, Limit= -41.25 dBm eirp
2) Peak plot, Limit = -21.25 dBm eirp

Conducted Spurious Emissions Test Method

Ref. KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10: 2013

Conducted Spurious Emissions Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Use the peak marker function to determine the maximum spurs amplitude level. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10 2013 section 14.3.2.2) 6. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v05, section 8.1 c) 3, section 8.6 DTS emissions in restricted frequency bands
ANSI C63.10: 2013 section 11.12.2.4 (Peak) & 11.12.2.5.2 (Average)

Conducted Spurious Emissions Test parameters	
Peak Span = 30MHz to 26.5GHz / 26.5GHz to 40GHz RBW = 1 MHz VBW ≥ 3 MHz	**Average** Span = 30MHz to 26.5GHz / 26.5GHz to 40GHz RBW = 1 MHz VBW ≥ 3 MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Sweep = Auto Detector = Peak Trace = Max Hold.	Sweep = Auto Detector = RMS Power Averaging

ANSI C63.10: 2013 section 11.12.2.2 c) add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By : Chris Blair	**Date of testing:** 09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average Upper, All Antennas

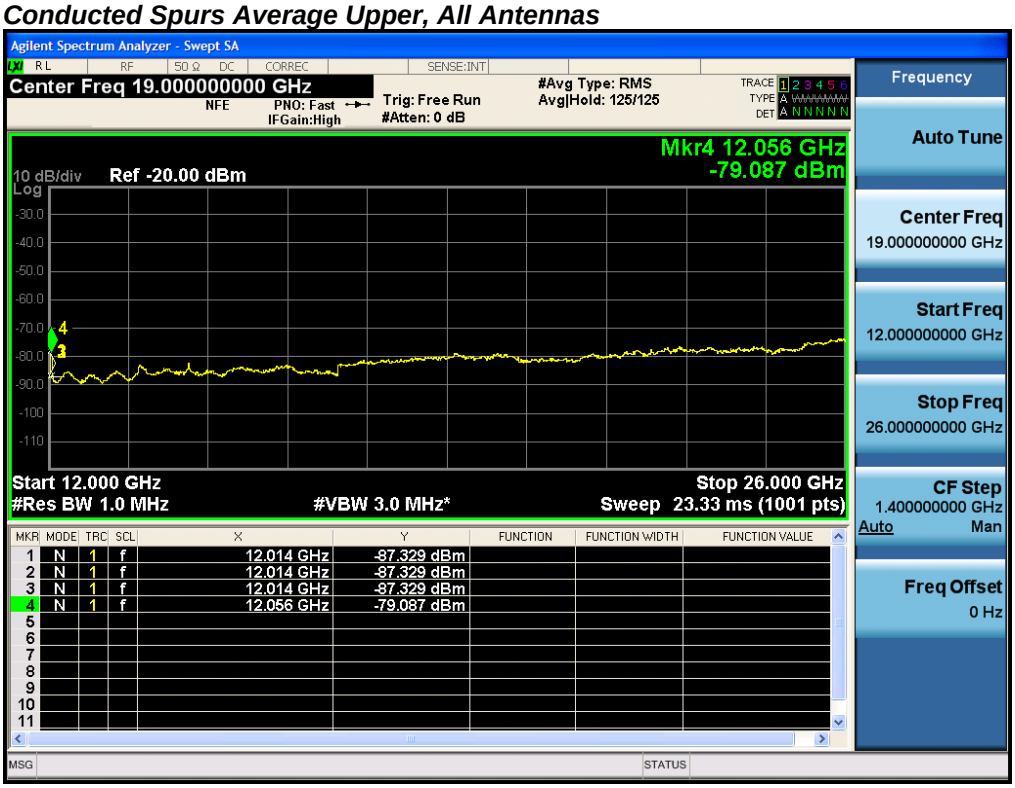

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak Upper, All Antennas

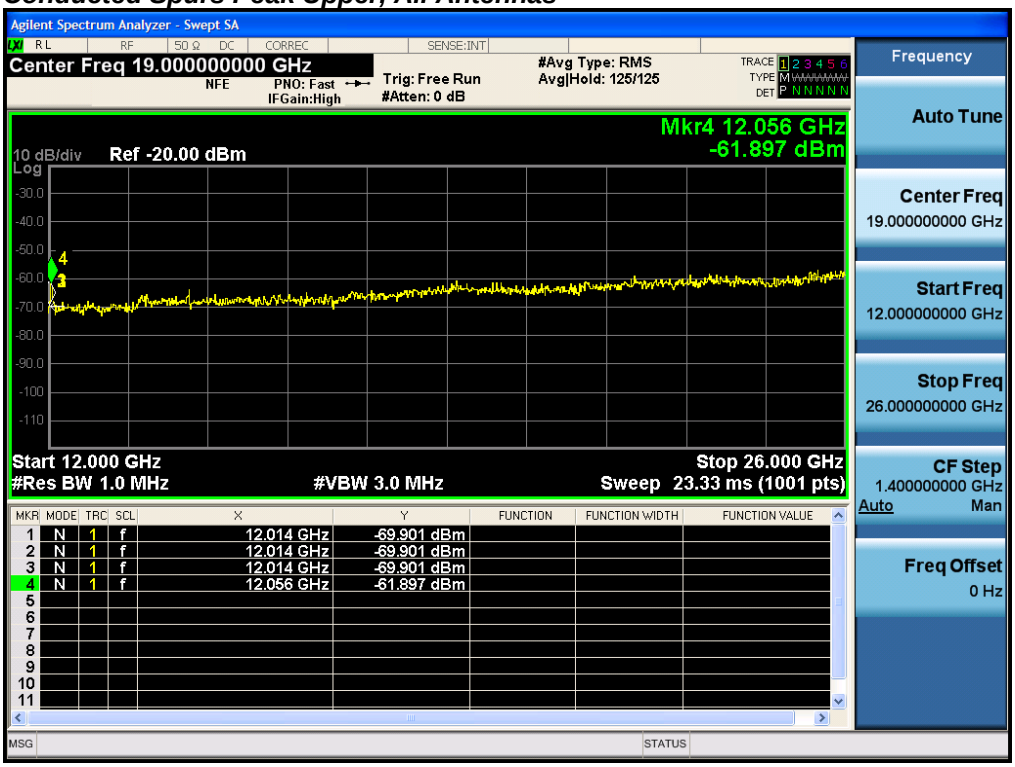

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 MB/s	1	4	-83.3				-79.3	-41.83	37.5
	CCK, 1 to 11 MB/s	2	4	-83.3	-81.4			-75.2	-41.83	33.4
	CCK, 1 to 11 MB/s	3	4	-83.3	-81.4	-78.3		-71.7	-41.83	29.9
	CCK, 1 to 11 MB/s	4	4	-83.3	-81.4	-78.3	-85.2	-71.3	-41.83	29.4
	Non HT20, 6 to 54 Mbps	1	4	-84.7				-80.7	-41.49	39.2
	Non HT20, 6 to 54 Mbps	2	4	-84.5	-84.9			-77.7	-41.49	36.2
	Non HT20, 6 to 54 Mbps	3	4	-84.5	-84.9	-81.8		-74.7	-41.49	33.2
	Non HT20, 6 to 54 Mbps	4	4	-84.5	-84.9	-85.0	-84.6	-74.7	-41.49	33.2
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-84.7	-84.9			-74.8	-41.49	33.3
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-84.5	-84.9	-85.0		-71.0	-41.49	29.5
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-84.7	-85.0	-85.1	-85.0	-68.9	-41.49	27.4
	HT20, M0 to M7	1	4	-83.8				-79.8	-41.49	38.3
	HT20, M0 to M7	2	4	-83.8	-82.1			-75.9	-41.49	34.4
	HT20, M8 to M15	2	4	-83.8	-82.1			-75.9	-41.49	34.4
	HT20, M0 to M7	3	4	-84.5	-83.7	-80.1		-73.5	-41.49	32.1
	HT20, M8 to M15	3	4	-84.5	-83.7	-80.1		-73.5	-41.49	32.1
	HT20, M16 to M23	3	4	-84.5	-83.7	-80.1		-73.5	-41.49	32.1
	HT20, M0 to M7	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5
	HT20, M8 to M15	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5
	HT20, M16 to M23	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5
	HT20, M24 to M31	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5
	HT20 Beam Forming, M0 to M7	2	7	-84.5	-83.7			-74.1	-41.49	32.6
	HT20 Beam Forming, M8 to M15	2	4	-83.8	-82.1			-75.9	-41.49	34.4
	HT20 Beam Forming, M0 to M7	3	9	-84.7	-85.1	-82.2		-70.0	-41.49	28.5
	HT20 Beam Forming, M8 to M15	3	6	-84.5	-83.7	-80.1		-71.5	-41.49	30.1
	HT20 Beam Forming, M16 to M23	3	4	-84.5	-83.7	-80.1		-73.5	-41.49	32.1
	HT20 Beam Forming, M0 to M7	4	10	-84.2	-84.7	-84.9	-84.8	-68.6	-41.49	27.1
	HT20 Beam Forming, M8 to M15	4	7	-84.5	-85.0	-84.5	-84.5	-71.6	-41.49	30.1
	HT20 Beam Forming, M16 to M23	4	5	-84.5	-85.0	-84.5	-84.5	-73.6	-41.49	32.1
	HT20 Beam Forming, M24 to M31	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5
	HT20 STBC, M0 to M7	2	4	-83.8	-82.1			-75.9	-41.49	34.4
	HT20 STBC, M0 to M7	3	4	-84.5	-83.7	-80.1		-73.5	-41.49	32.1
	HT20 STBC, M0 to M7	4	4	-84.7	-85.1	-82.2	-84.6	-74.0	-41.49	32.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2437	CCK, 1 to 11 MB/s	1	4	-85.0				-81.0	-41.83	39.2
	CCK, 1 to 11 MB/s	2	4	-85.0	-85.0			-78.0	-41.83	36.2
	CCK, 1 to 11 MB/s	3	4	-85.0	-85.0	-79.6		-73.6	-41.83	31.8
	CCK, 1 to 11 MB/s	4	4	-85.0	-85.0	-79.6	-85.0	-72.9	-41.83	31.1
	Non HT20, 6 to 54 Mbps	1	4	-84.9				-80.9	-41.49	39.4
	Non HT20, 6 to 54 Mbps	2	4	-84.9	-85.0			-77.9	-41.49	36.4
	Non HT20, 6 to 54 Mbps	3	4	-84.9	-85.0	-80.0		-73.9	-41.49	32.4
	Non HT20, 6 to 54 Mbps	4	4	-84.9	-85.0	-80.0	-85.1	-73.1	-41.49	31.6
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-84.9	-85.0			-74.9	-41.49	33.4
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-84.9	-85.0	-80.0		-68.9	-41.49	27.4
	Non HT20 Beam Forming, 6 to 54 Mbps	**4**	**10**	**-84.9**	**-85.0**	**-80.0**	**-85.1**	**-67.1**	**-41.49**	**25.6**
	HT20, M0 to M7	1	4	-84.6				-80.6	-41.49	39.1
	HT20, M0 to M7	2	4	-84.6	-85.1			-77.8	-41.49	36.3
	HT20, M8 to M15	2	4	-84.6	-85.1			-77.8	-41.49	36.3
	HT20, M0 to M7	3	4	-84.6	-85.1	-80.5		-74.1	-41.49	32.6
	HT20, M8 to M15	3	4	-84.6	-85.1	-80.5		-74.1	-41.49	32.6
	HT20, M16 to M23	3	4	-84.6	-85.1	-80.5		-74.1	-41.49	32.6
	HT20, M0 to M7	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
	HT20, M8 to M15	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
	HT20, M16 to M23	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
	HT20, M24 to M31	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
	HT20 Beam Forming, M0 to M7	2	7	-84.6	-85.1			-74.8	-41.49	33.3
	HT20 Beam Forming, M8 to M15	2	4	-84.6	-85.1			-77.8	-41.49	36.3
	HT20 Beam Forming, M0 to M7	3	9	-84.6	-85.1	-80.5		-69.1	-41.49	27.6
	HT20 Beam Forming, M8 to M15	3	6	-84.6	-85.1	-80.5		-72.1	-41.49	30.6
	HT20 Beam Forming, M16 to M23	3	4	-84.6	-85.1	-80.5		-74.1	-41.49	32.6
	HT20 Beam Forming, M0 to M7	4	10	-84.6	-85.1	-80.5	-85.0	-67.3	-41.49	25.8
	HT20 Beam Forming, M8 to M15	4	7	-84.6	-85.1	-80.5	-85.0	-70.3	-41.49	28.8
	HT20 Beam Forming, M16 to M23	4	5	-84.6	-85.1	-80.5	-85.0	-72.3	-41.49	30.8
	HT20 Beam Forming, M24 to M31	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
	HT20 STBC, M0 to M7	2	4	-84.6	-85.1			-77.8	-41.49	36.3
	HT20 STBC, M0 to M7	3	4	-84.6	-85.1	-80.5		-74.1	-41.49	32.6
	HT20 STBC, M0 to M7	4	4	-84.6	-85.1	-80.5	-85.0	-73.3	-41.49	31.8
2462	CCK, 1 to 11 MB/s	1	4	-84.7				-80.7	-41.83	38.9
	CCK, 1 to 11 MB/s	2	4	-84.7	-85.1			-77.9	-41.83	36.1
	CCK, 1 to 11 MB/s	3	4	-84.7	-85.1	-80.4		-74.1	-41.83	32.2
	CCK, 1 to 11 MB/s	4	4	-84.7	-85.1	-80.4	-85.0	-73.3	-41.83	31.4
	Non HT20, 6 to 54 Mbps	1	4	-84.7				-80.7	-41.49	39.2
	Non HT20, 6 to 54 Mbps	2	4	-84.5	-84.9			-77.7	-41.49	36.2
	Non HT20, 6 to 54 Mbps	3	4	-84.5	-84.9	-85.1		-76.1	-41.49	34.6
	Non HT20, 6 to 54 Mbps	4	4	-84.4	-85.0	-85.3	-85.0	-74.9	-41.49	33.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-84.5	-84.9			-74.7	-41.49	33.2

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-84.5	-84.8	-85.0		-71.0	-41.49	29.5
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-84.5	-84.8	-85.0	-84.7	-68.7	-41.49	27.2
	HT20, M0 to M7	1	4	-84.5				-80.5	-41.49	39.0
	HT20, M0 to M7	2	4	-84.7	-85.0			-77.8	-41.49	36.3
	HT20, M8 to M15	2	4	-84.7	-85.0			-77.8	-41.49	36.3
	HT20, M0 to M7	3	4	-84.7	-85.0	-85.4		-76.3	-41.49	34.8
	HT20, M8 to M15	3	4	-84.7	-85.0	-85.4		-76.3	-41.49	34.8
	HT20, M16 to M23	3	4	-84.7	-85.0	-85.4		-76.3	-41.49	34.8
	HT20, M0 to M7	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3
	HT20, M8 to M15	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3
	HT20, M16 to M23	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3
	HT20, M24 to M31	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3
	HT20 Beam Forming, M0 to M7	2	7	-84.7	-85.0			-74.8	-41.49	33.3
	HT20 Beam Forming, M8 to M15	2	4	-84.7	-85.0			-77.8	-41.49	36.3
	HT20 Beam Forming, M0 to M7	3	9	-84.7	-84.9	-85.2		-71.2	-41.49	29.7
	HT20 Beam Forming, M8 to M15	3	6	-84.7	-85.0	-85.4		-74.3	-41.49	32.8
	HT20 Beam Forming, M16 to M23	3	4	-84.7	-85.0	-85.4		-76.3	-41.49	34.8
	HT20 Beam Forming, M0 to M7	4	10	-84.4	-85.1	-85.0	-85.1	-68.9	-41.49	27.4
	HT20 Beam Forming, M8 to M15	4	7	-84.7	-84.9	-85.2	-84.7	-71.8	-41.49	30.4
	HT20 Beam Forming, M16 to M23	4	5	-84.6	-85.0	-85.1	-84.7	-73.8	-41.49	32.3
	HT20 Beam Forming, M24 to M31	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3
	HT20 STBC, M0 to M7	2	4	-84.7	-85.0			-77.8	-41.49	36.3
	HT20 STBC, M0 to M7	3	4	-84.7	-85.0	-85.4		-76.3	-41.49	34.8
	HT20 STBC, M0 to M7	4	4	-84.6	-85.0	-85.1	-84.7	-74.8	-41.49	33.3

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average, 2437 MHz, Non HT20 Beam Forming, 6 to 54 Mbps

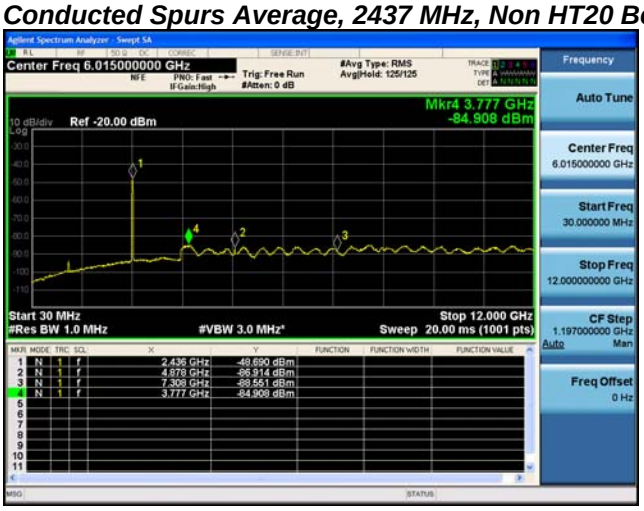

Antenna A

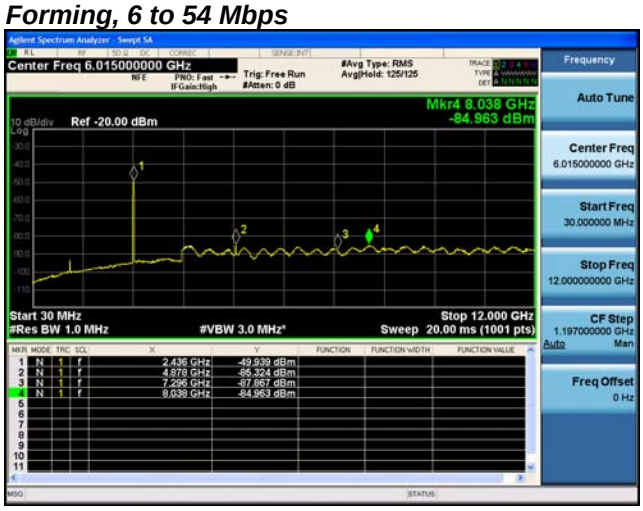

Antenna B

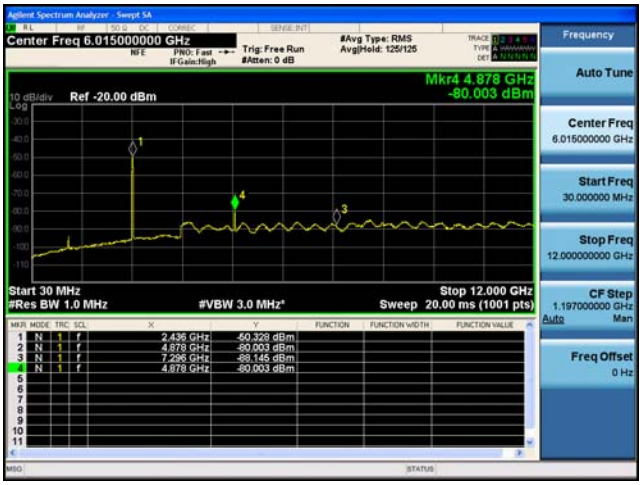

Antenna C

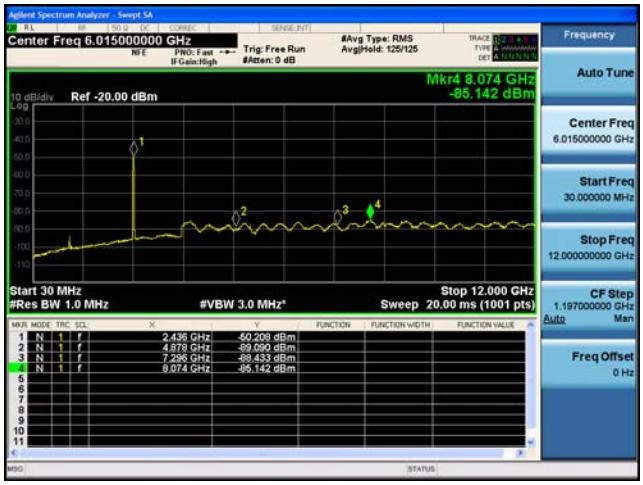

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 MB/s	1	4	-67.0				-63.0	-21.83	41.2
	CCK, 1 to 11 MB/s	2	4	-67.0	-67.1			-60.0	-21.83	38.2
	CCK, 1 to 11 MB/s	3	4	-67.0	-67.1	-63.7		-56.9	-21.83	35.0
	CCK, 1 to 11 MB/s	4	4	-67.0	-67.1	-63.7	-67.5	-56.0	-21.83	34.2
	Non HT20, 6 to 54 Mbps	1	4	-67.7				-63.7	-21.49	42.2
	Non HT20, 6 to 54 Mbps	2	4	-67.4	-67.5			-60.4	-21.49	38.9
	Non HT20, 6 to 54 Mbps	3	4	-67.4	-67.5	-66.1		-58.2	-21.49	36.7
	Non HT20, 6 to 54 Mbps	4	4	-67.7	-67.2	-68.1	-67.9	-57.7	-21.49	36.2
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-67.8	-68.5			-58.1	-21.49	36.6
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-67.7	-67.2	-68.1		-53.9	-21.49	32.4
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-67.5	-67.6	-67.5	-68.0	-51.6	-21.49	30.1
	HT20, M0 to M7	1	4	-66.9				-62.9	-21.49	41.4
	HT20, M0 to M7	2	4	-66.9	-67.7			-60.3	-21.49	38.8
	HT20, M8 to M15	2	4	-66.9	-67.7			-60.3	-21.49	38.8
	HT20, M0 to M7	3	4	-67.5	-67.8	-68.1		-59.0	-21.49	37.5
	HT20, M8 to M15	3	4	-67.5	-67.8	-68.1		-59.0	-21.49	37.5
	HT20, M16 to M23	3	4	-67.5	-67.8	-68.1		-59.0	-21.49	37.5
	HT20, M0 to M7	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9
	HT20, M8 to M15	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9
	HT20, M16 to M23	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9
	HT20, M24 to M31	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9
	HT20 Beam Forming, M0 to M7	2	7	-67.5	-67.8			-57.6	-21.49	36.1
	HT20 Beam Forming, M8 to M15	2	4	-66.9	-67.7			-60.3	-21.49	38.8
	HT20 Beam Forming, M0 to M7	3	9	-67.7	-66.6	-67.7		-53.5	-21.49	32.0
	HT20 Beam Forming, M8 to M15	3	6	-67.5	-67.8	-68.1		-57.0	-21.49	35.5
	HT20 Beam Forming, M16 to M23	3	4	-67.5	-67.8	-68.1		-59.0	-21.49	37.5
	HT20 Beam Forming, M0 to M7	**4**	**10**	**-68.0**	**-67.4**	**-67.7**	**-66.9**	**-51.5**	**-21.49**	**30.0**
	HT20 Beam Forming, M8 to M15	4	7	-66.5	-67.4	-67.6	-67.2	-54.1	-21.49	32.6
	HT20 Beam Forming, M16 to M23	4	5	-66.5	-67.4	-67.6	-67.2	-56.1	-21.49	34.6
	HT20 Beam Forming, M24 to M31	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9
	HT20 STBC, M0 to M7	2	4	-66.9	-67.7			-60.3	-21.49	38.8
	HT20 STBC, M0 to M7	3	4	-67.5	-67.8	-68.1		-59.0	-21.49	37.5
	HT20 STBC, M0 to M7	4	4	-67.7	-66.6	-67.7	-67.9	-57.4	-21.49	35.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2437	CCK, 1 to 11 MB/s	1	4	-67.2				-63.2	-21.83	41.4
	CCK, 1 to 11 MB/s	2	4	-67.2	-67.9			-60.5	-21.83	38.7
	CCK, 1 to 11 MB/s	3	4	-67.2	-67.9	-66.0		-58.2	-21.83	36.4
	CCK, 1 to 11 MB/s	4	4	-67.2	-67.9	-66.0	-67.6	-57.1	-21.83	35.3
	Non HT20, 6 to 54 Mbps	1	4	-68.1				-64.1	-21.49	42.6
	Non HT20, 6 to 54 Mbps	2	4	-68.1	-67.7			-60.9	-21.49	39.4
	Non HT20, 6 to 54 Mbps	3	4	-68.1	-67.7	-67.3		-58.9	-21.49	37.4
	Non HT20, 6 to 54 Mbps	4	4	-68.1	-67.7	-67.3	-67.9	-57.7	-21.49	36.2
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-68.1	-67.7			-57.9	-21.49	36.4
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-68.1	-67.7	-67.3		-53.9	-21.49	32.4
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-68.1	-67.7	-67.3	-67.9	-51.7	-21.49	30.2
	HT20, M0 to M7	1	4	-68.0				-64.0	-21.49	42.5
	HT20, M0 to M7	2	4	-68.0	-67.9			-60.9	-21.49	39.4
	HT20, M8 to M15	2	4	-68.0	-67.9			-60.9	-21.49	39.4
	HT20, M0 to M7	3	4	-68.0	-67.9	-67.4		-59.0	-21.49	37.5
	HT20, M8 to M15	3	4	-68.0	-67.9	-67.4		-59.0	-21.49	37.5
	HT20, M16 to M23	3	4	-68.0	-67.9	-67.4		-59.0	-21.49	37.5
	HT20, M0 to M7	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
	HT20, M8 to M15	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
	HT20, M16 to M23	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
	HT20, M24 to M31	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
	HT20 Beam Forming, M0 to M7	2	7	-68.0	-67.9			-57.9	-21.49	36.4
	HT20 Beam Forming, M8 to M15	2	4	-68.0	-67.9			-60.9	-21.49	39.4
	HT20 Beam Forming, M0 to M7	3	9	-68.0	-67.9	-67.4		-54.0	-21.49	32.5
	HT20 Beam Forming, M8 to M15	3	6	-68.0	-67.9	-67.4		-57.0	-21.49	35.5
	HT20 Beam Forming, M16 to M23	3	4	-68.0	-67.9	-67.4		-59.0	-21.49	37.5
	HT20 Beam Forming, M0 to M7	4	10	-68.0	-67.9	-67.4	-67.7	-51.7	-21.49	30.2
	HT20 Beam Forming, M8 to M15	4	7	-68.0	-67.9	-67.4	-67.7	-54.7	-21.49	33.2
	HT20 Beam Forming, M16 to M23	4	5	-68.0	-67.9	-67.4	-67.7	-56.7	-21.49	35.2
	HT20 Beam Forming, M24 to M31	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
	HT20 STBC, M0 to M7	2	4	-68.0	-67.9			-60.9	-21.49	39.4
	HT20 STBC, M0 to M7	3	4	-68.0	-67.9	-67.4		-59.0	-21.49	37.5
	HT20 STBC, M0 to M7	4	4	-68.0	-67.9	-67.4	-67.7	-57.7	-21.49	36.2
2462	CCK, 1 to 11 MB/s	1	4	-67.5				-63.5	-21.83	41.7
	CCK, 1 to 11 MB/s	2	4	-67.5	-68.2			-60.8	-21.83	39.0
	CCK, 1 to 11 MB/s	3	4	-67.5	-68.2	-66.5		-58.6	-21.83	36.7
	CCK, 1 to 11 MB/s	4	4	-67.5	-68.2	-66.5	-68.3	-57.5	-21.83	35.7
	Non HT20, 6 to 54 Mbps	1	4	-66.4				-62.4	-21.49	40.9
	Non HT20, 6 to 54 Mbps	2	4	-66.6	-68.3			-60.4	-21.49	38.9
	Non HT20, 6 to 54 Mbps	3	4	-66.6	-68.3	-67.8		-58.7	-21.49	37.2
	Non HT20, 6 to 54 Mbps	4	4	-67.7	-67.1	-68.1	-67.6	-57.6	-21.49	36.1
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-66.6	-68.3			-57.4	-21.49	35.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-66.9	-68.5	-67.1		-53.7	-21.49	32.2
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-66.9	-68.5	-67.1	-68.1	-51.6	-21.49	30.1
	HT20, M0 to M7	1	4	-68.2				-64.2	-21.49	42.7
	HT20, M0 to M7	2	4	-67.6	-66.3			-59.9	-21.49	38.4
	HT20, M8 to M15	2	4	-67.6	-66.3			-59.9	-21.49	38.4
	HT20, M0 to M7	3	4	-67.6	-66.3	-67.9		-58.4	-21.49	36.9
	HT20, M8 to M15	3	4	-67.6	-66.3	-67.9		-58.4	-21.49	36.9
	HT20, M16 to M23	3	4	-67.6	-66.3	-67.9		-58.4	-21.49	36.9
	HT20, M0 to M7	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9
	HT20, M8 to M15	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9
	HT20, M16 to M23	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9
	HT20, M24 to M31	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9
	HT20 Beam Forming, M0 to M7	2	7	-67.6	-66.3			-56.9	-21.49	35.4
	HT20 Beam Forming, M8 to M15	2	4	-67.6	-66.3			-59.9	-21.49	38.4
	HT20 Beam Forming, M0 to M7	3	9	-67.6	-67.5	-67.4		-53.7	-21.49	32.2
	HT20 Beam Forming, M8 to M15	3	6	-67.6	-66.3	-67.9		-56.4	-21.49	34.9
	HT20 Beam Forming, M16 to M23	3	4	-67.6	-66.3	-67.9		-58.4	-21.49	36.9
	HT20 Beam Forming, M0 to M7	4	10	-67.7	-67.5	-67.2	-67.5	-51.5	-21.49	30.0
	HT20 Beam Forming, M8 to M15	4	7	-67.6	-67.5	-67.4	-67.5	-54.5	-21.49	33.0
	HT20 Beam Forming, M16 to M23	4	5	-66.5	-68.0	-67.5	-67.9	-56.4	-21.49	34.9
	HT20 Beam Forming, M24 to M31	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9
	HT20 STBC, M0 to M7	2	4	-67.6	-66.3			-59.9	-21.49	38.4
	HT20 STBC, M0 to M7	3	4	-67.6	-66.3	-67.9		-58.4	-21.49	36.9
	HT20 STBC, M0 to M7	4	4	-66.5	-68.0	-67.5	-67.9	-57.4	-21.49	35.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak, 2412 MHz, HT20 Beam Forming, M0 to M7

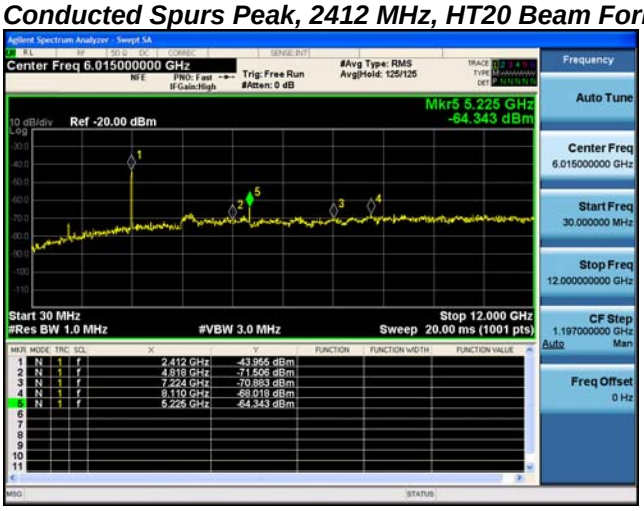

Antenna A

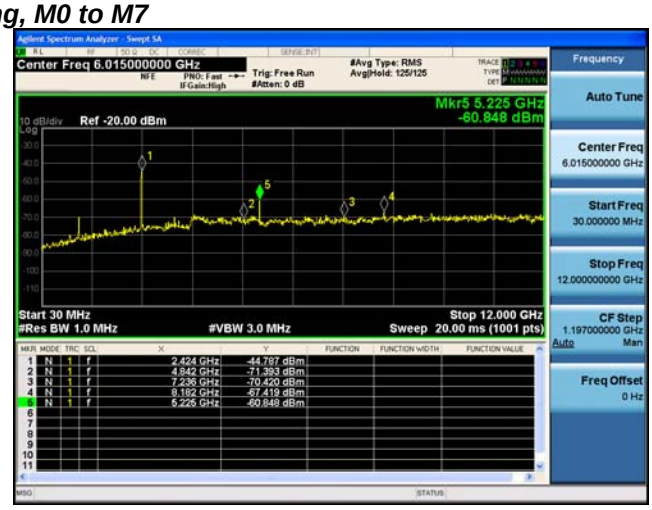

Antenna B

Antenna C

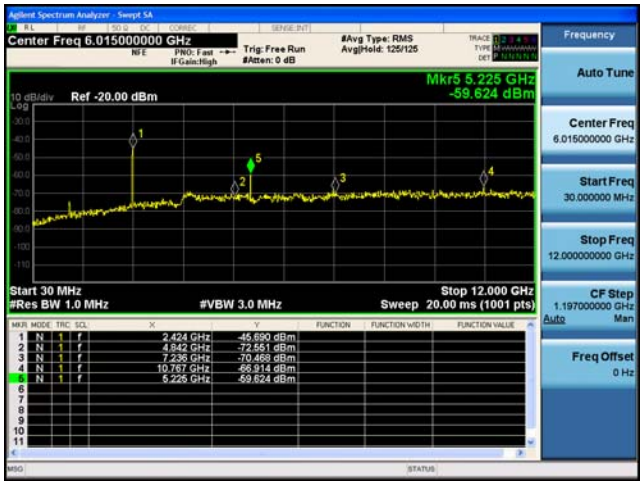

Antenna D

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average Upper, All Antennas, RECEIVE mode

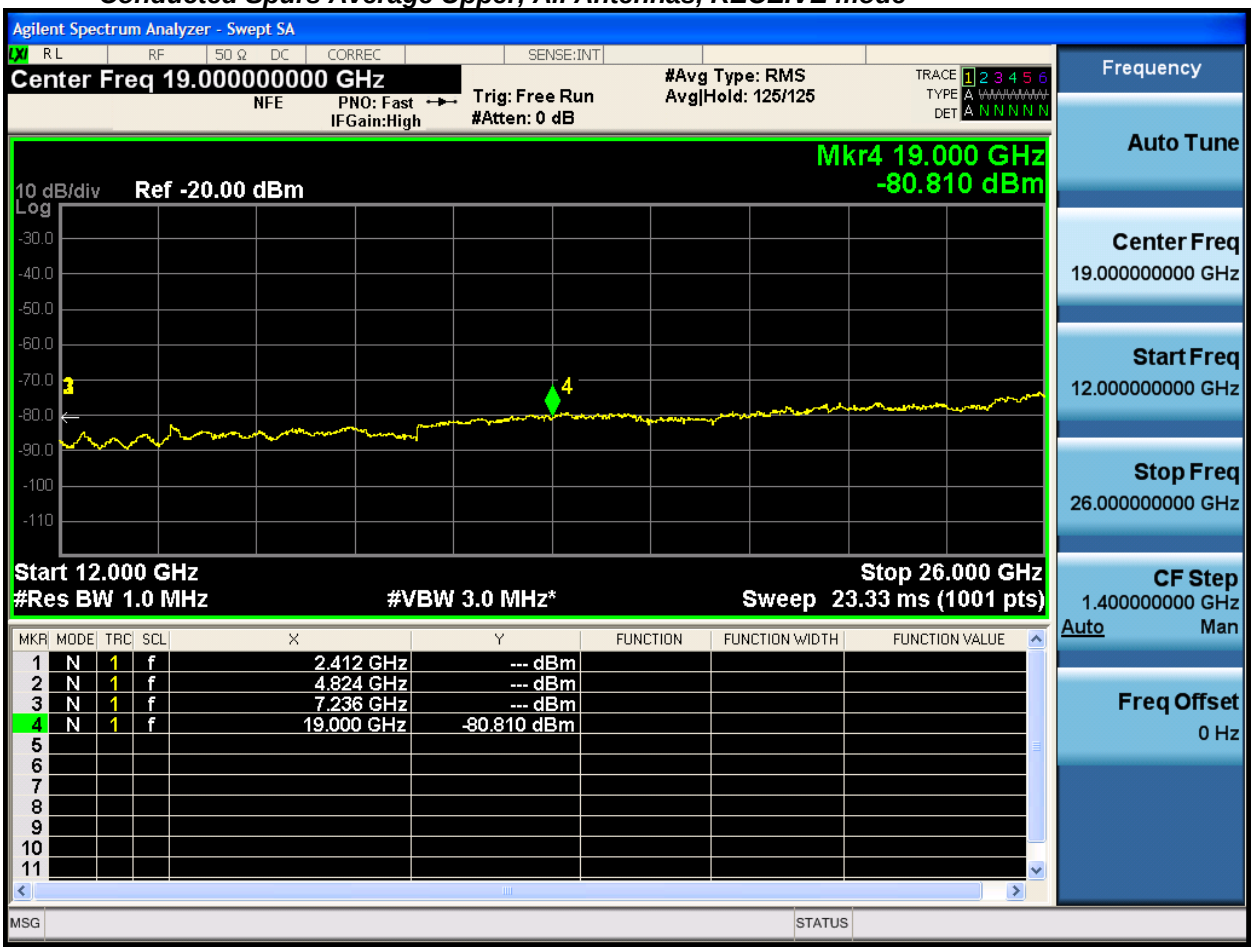

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak Upper, All Antennas, RECEIVE mode

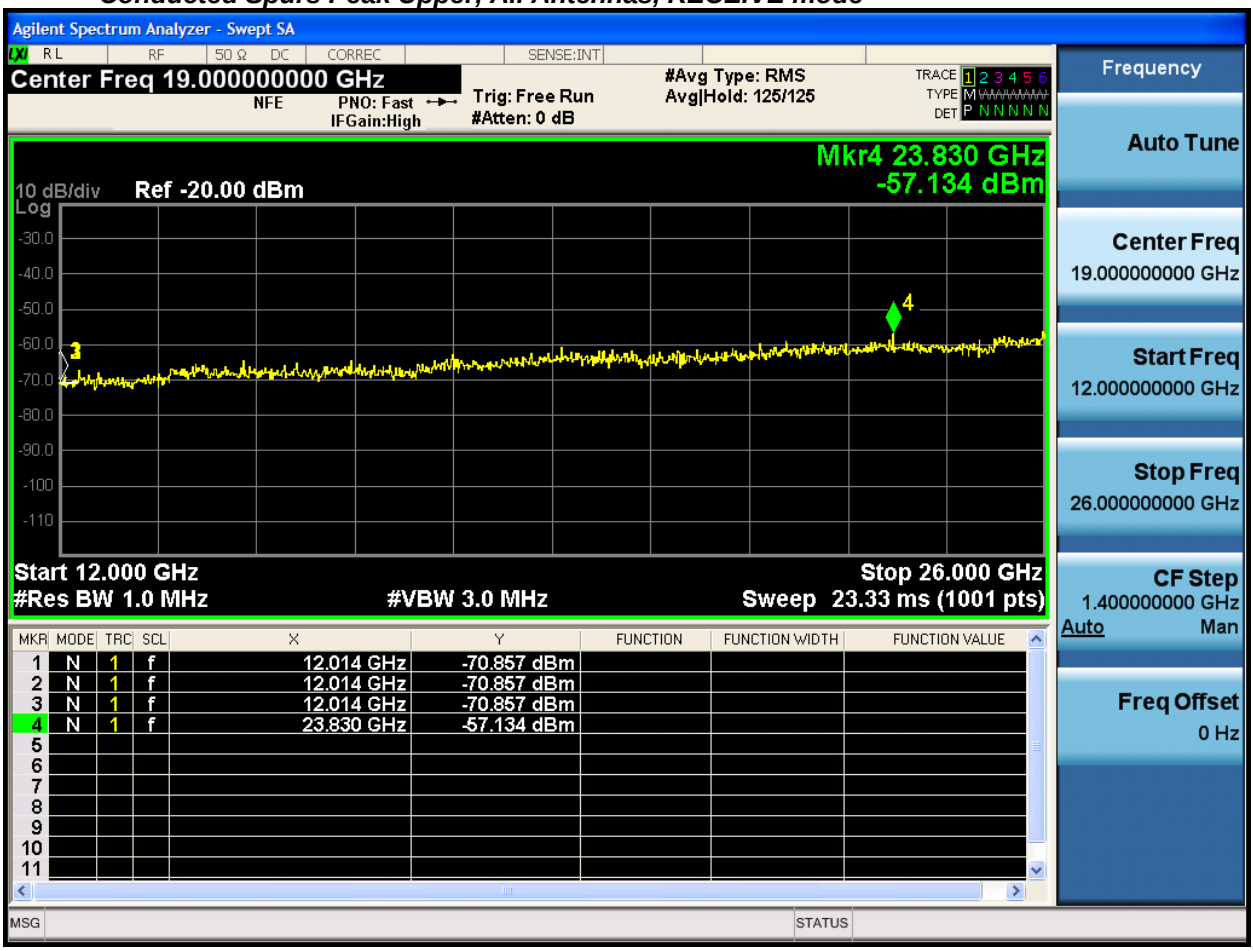

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average, All Antennas, RECEIVE mode

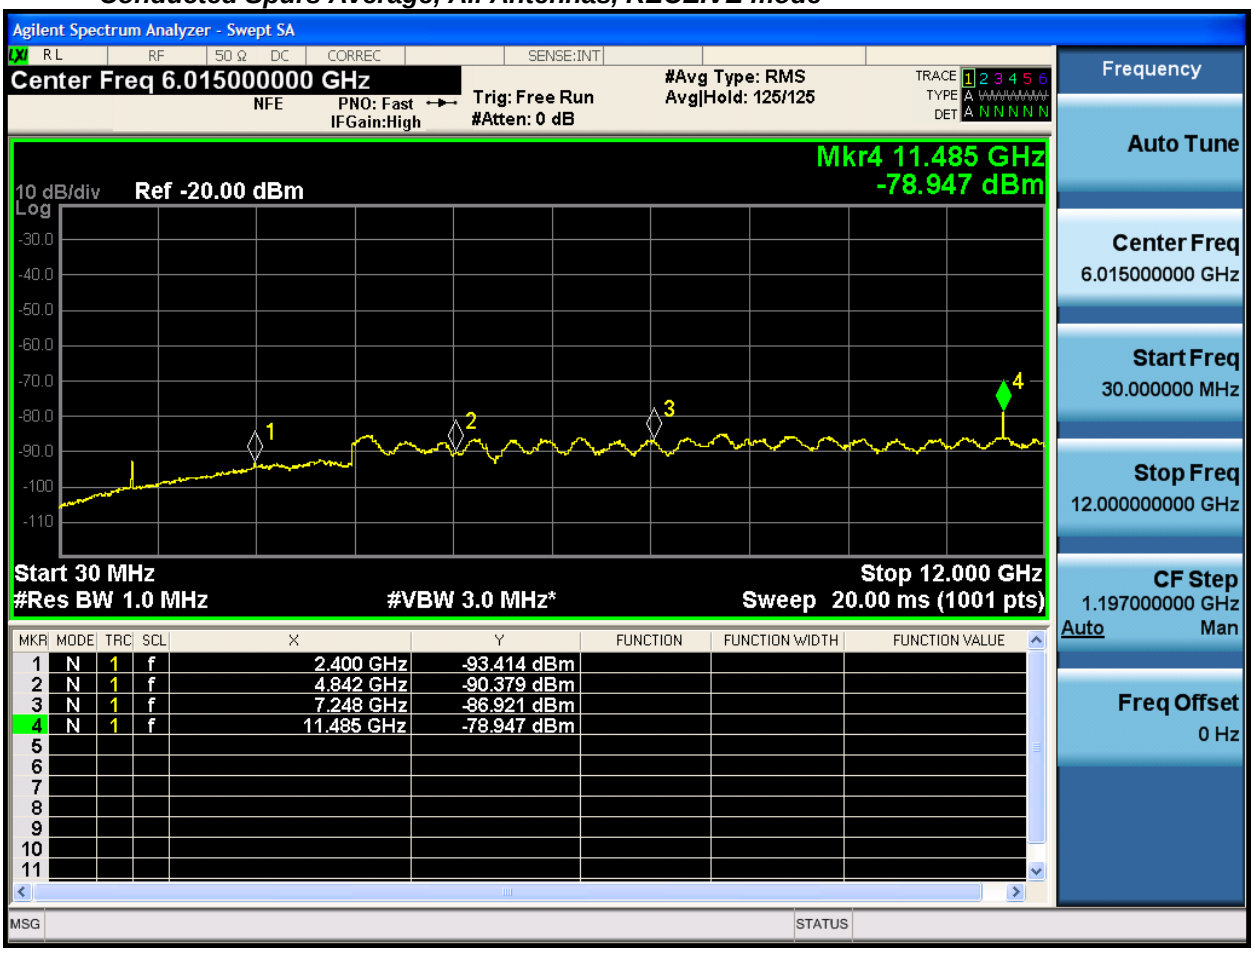

Rx Peak

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

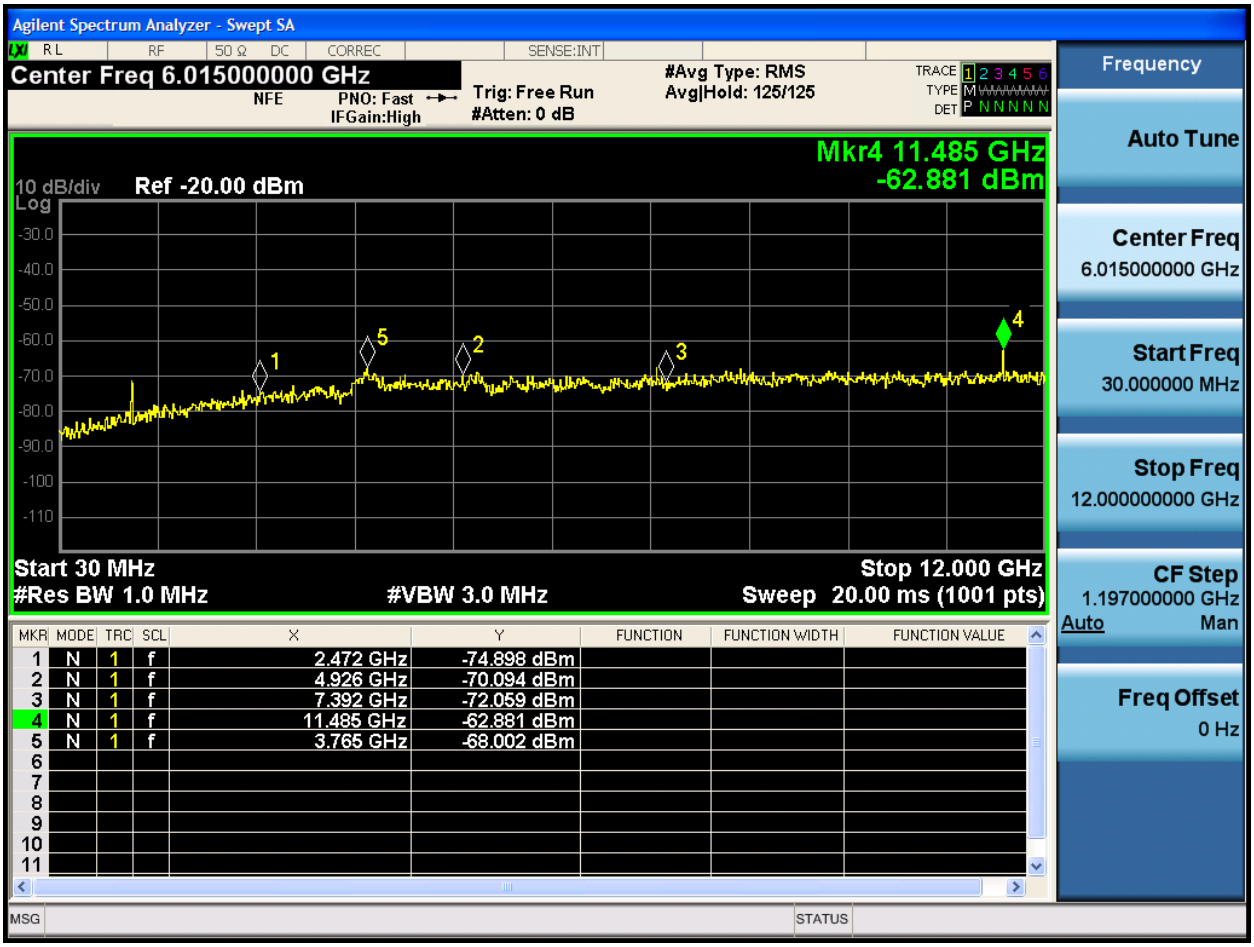

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.7 Conducted Bandedge (Restricted Band)

Conducted Band Edge Test Requirement

15.247 / LP0002 (2018-01-10) (3.10.1.5) (2.8):
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247
5.5 Unwanted emissions
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

15.205 / RSS-Gen
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), and RSS-Gen 8.10 must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen 8.9.

Conducted Bandedge Test Method

Ref. KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10: 2013

Conducted Band edge Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 558074 D01 DTS Meas Guidance v04 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v05, section 8.1 c) 3, section 8.6 DTS emissions in restricted frequency bands
ANSI C63.10: 2013 section 11.12.2.4 (Peak) & 11.12.2.5.2 (Average)

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurious Emissions Test parameters	
Peak RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = Peak Trace = Max Hold.	**Average** RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = RMS Power Averaging

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By : Chris Blair	**Date of testing:** 09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Restricted Band

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 MB/s	1	4	-60.4				-56.4	-41.83	14.6
	CCK, 1 to 11 MB/s	2	4	-60.4	-61.8			-54.0	-41.83	12.2
	CCK, 1 to 11 MB/s	3	4	-60.4	-61.8	-61.8		-52.5	-41.83	10.7
	CCK, 1 to 11 MB/s	4	4	-60.4	-61.8	-61.8	-62.2	-51.5	-41.83	9.6
	Non HT20, 6 to 54 Mbps	1	4	-46.3				-42.3	-41.49	0.8
	Non HT20, 6 to 54 Mbps	2	4	-51.6	-50.4			-43.9	-41.49	2.5
	Non HT20, 6 to 54 Mbps	3	4	-51.6	-50.4	-52.2		-42.6	-41.49	1.1
	Non HT20, 6 to 54 Mbps	4	4	-58.9	-57.9	-59.1	-51.4	-45.4	-41.49	3.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-54.2	-56.5			-45.2	-41.49	3.7
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-58.9	-57.9	-59.1		-44.8	-41.49	3.3
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-61.0	-60.0	-62.0	-55.7	-42.9	-41.49	1.4
	HT20, M0 to M7	1	4	-48.9				-44.9	-41.49	3.4
	HT20, M0 to M7	**2**	**4**	**-48.9**	**-48.5**			**-41.7**	**-41.49**	**0.2**
	HT20, M8 to M15	2	4	-48.9	-48.5			-41.7	-41.49	0.2
	HT20, M0 to M7	3	4	-54.1	-53.0	-53.4		-44.7	-41.49	3.2
	HT20, M8 to M15	3	4	-54.1	-53.0	-53.4		-44.7	-41.49	3.2
	HT20, M16 to M23	3	4	-54.1	-53.0	-53.4		-44.7	-41.49	3.2
	HT20, M0 to M7	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5
	HT20, M8 to M15	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5
	HT20, M16 to M23	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5
	HT20, M24 to M31	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5
	HT20 Beam Forming, M0 to M7	2	7	-54.1	-53.0			-43.5	-41.49	2.0
	HT20 Beam Forming, M8 to M15	2	4	-48.9	-48.5			-41.7	-41.49	0.2
	HT20 Beam Forming, M0 to M7	3	9	-58.2	-55.7	-57.9		-43.3	-41.49	1.9
	HT20 Beam Forming, M8 to M15	3	6	-54.1	-53.0	-53.4		-42.7	-41.49	1.2
	HT20 Beam Forming, M16 to M23	3	4	-54.1	-53.0	-53.4		-44.7	-41.49	3.2
	HT20 Beam Forming, M0 to M7	4	10	-62.3	-60.5	-61.9	-55.2	-42.9	-41.49	1.4
	HT20 Beam Forming, M8 to M15	4	7	-61.0	-58.3	-59.9	-52.3	-43.4	-41.49	1.9
	HT20 Beam Forming, M16 to M23	4	5	-61.0	-58.3	-59.9	-52.3	-45.4	-41.49	3.9
	HT20 Beam Forming, M24 to M31	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5
	HT20 STBC, M0 to M7	2	4	-48.9	-48.5			-41.7	-41.49	0.2
	HT20 STBC, M0 to M7	3	4	-54.1	-53.0	-53.4		-44.7	-41.49	3.2
	HT20 STBC, M0 to M7	4	4	-58.2	-55.7	-57.9	-47.1	-42.0	-41.49	0.5

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2462	CCK, 1 to 11 MB/s	1	4	-60.6				-56.6	-41.83	14.8
	CCK, 1 to 11 MB/s	2	4	-60.6	-62.1			-54.3	-41.83	12.4
	CCK, 1 to 11 MB/s	3	4	-60.6	-62.1	-60.9		-52.4	-41.83	10.6
	CCK, 1 to 11 MB/s	4	4	-60.6	-62.1	-60.9	-63.2	-51.6	-41.83	9.7
	Non HT20, 6 to 54 Mbps	1	4	-47.6				-43.6	-41.49	2.1
	Non HT20, 6 to 54 Mbps	2	4	-50.6	-53.8			-44.9	-41.49	3.4
	Non HT20, 6 to 54 Mbps	3	4	-50.6	-53.8	-52.7		-43.4	-41.49	1.9
	Non HT20, 6 to 54 Mbps	4	4	-53.6	-56.4	-56.1	-51.6	-44.0	-41.49	2.5
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-50.6	-53.8			-41.9	-41.49	0.4
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-57.2	-58.1	-58.7		-44.2	-41.49	2.7
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-57.2	-58.1	-58.7	-56.8	-41.6	-41.49	0.1
	HT20, M0 to M7	1	4	-47.1				-43.1	-41.49	1.6
	HT20, M0 to M7	2	4	-51.4	-52.4			-44.9	-41.49	3.4
	HT20, M8 to M15	2	4	-51.4	-52.4			-44.9	-41.49	3.4
	HT20, M0 to M7	3	4	-51.4	-52.4	-53.2		-43.5	-41.49	2.0
	HT20, M8 to M15	3	4	-51.4	-52.4	-53.2		-43.5	-41.49	2.0
	HT20, M16 to M23	3	4	-51.4	-52.4	-53.2		-43.5	-41.49	2.0
	HT20, M0 to M7	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9
	HT20, M8 to M15	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9
	HT20, M16 to M23	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9
	HT20, M24 to M31	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9
	HT20 Beam Forming, M0 to M7	2	7	-51.4	-52.4			-41.9	-41.49	0.4
	HT20 Beam Forming, M8 to M15	2	4	-51.4	-52.4			-44.9	-41.49	3.4
	HT20 Beam Forming, M0 to M7	3	9	-55.2	-56.8	-57.7		-42.7	-41.49	1.2
	HT20 Beam Forming, M8 to M15	**3**	**6**	**-51.4**	**-52.4**	**-53.2**		**-41.5**	**-41.49**	**0.0**
	HT20 Beam Forming, M16 to M23	3	4	-51.4	-52.4	-53.2		-43.5	-41.49	2.0
	HT20 Beam Forming, M0 to M7	4	10	-57.4	-58.0	-59.6	-61.2	-42.8	-41.49	1.3
	HT20 Beam Forming, M8 to M15	4	7	-55.2	-56.8	-57.7	-57.8	-43.7	-41.49	2.2
	HT20 Beam Forming, M16 to M23	4	5	-53.8	-55.0	-55.7	-53.4	-43.4	-41.49	1.9
	HT20 Beam Forming, M24 to M31	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9
	HT20 STBC, M0 to M7	2	4	-51.4	-52.4			-44.9	-41.49	3.4
	HT20 STBC, M0 to M7	3	4	-51.4	-52.4	-53.2		-43.5	-41.49	2.0
	HT20 STBC, M0 to M7	4	4	-53.8	-55.0	-55.7	-53.4	-44.4	-41.49	2.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Average, 2412 MHz, HT20, M0 to M7

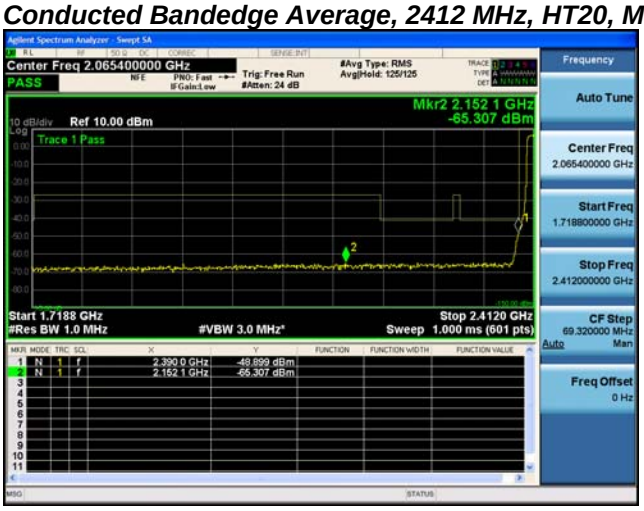

Antenna A

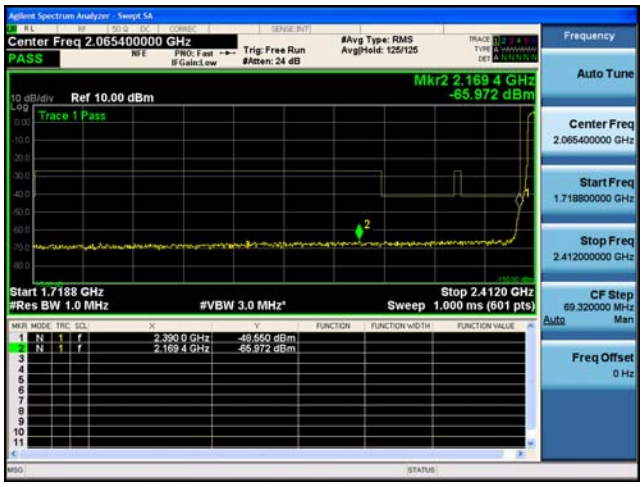

Antenna B

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Average, 2462 MHz, HT20 Beam Forming, M8 to M15

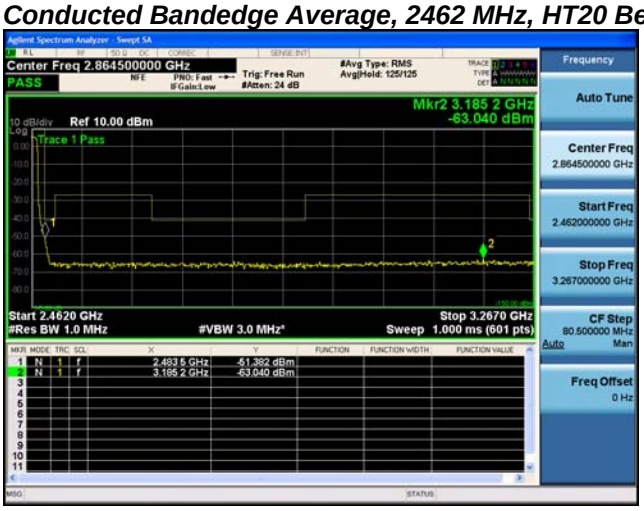

Antenna A

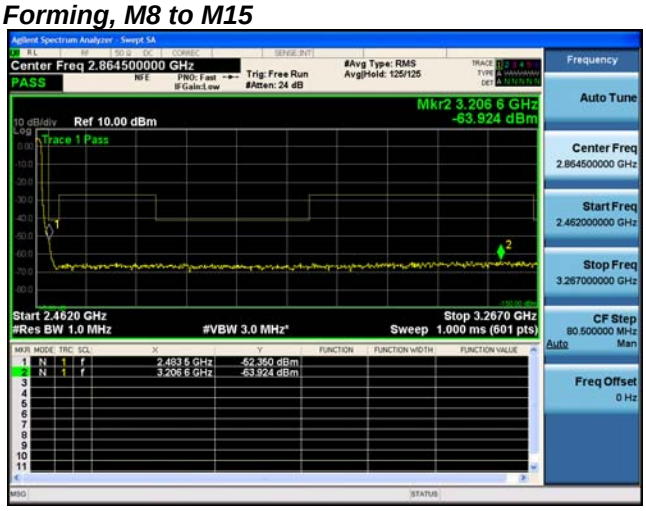

Antenna B

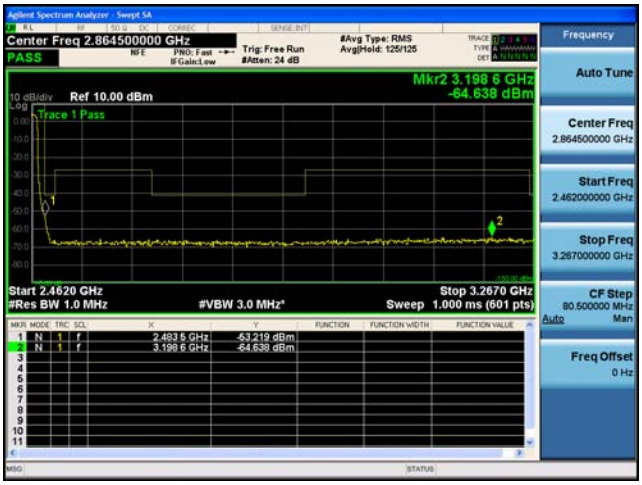

Antenna C

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 MB/s	1	4	-49.2				-45.2	-21.83	23.4
	CCK, 1 to 11 MB/s	2	4	-49.2	-46.7			-40.8	-21.83	18.9
	CCK, 1 to 11 MB/s	3	4	-49.2	-46.7	-50.6		-39.8	-21.83	17.9
	CCK, 1 to 11 MB/s	4	4	-49.2	-46.7	-50.6	-48.7	-38.5	-21.83	16.7
	Non HT20, 6 to 54 Mbps	1	4	-30.7				-26.7	-21.49	5.2
	Non HT20, 6 to 54 Mbps	2	4	-34.3	-33.6			-26.9	-21.49	5.4
	Non HT20, 6 to 54 Mbps	**3**	**4**	**-34.3**	**-33.6**	**-36.4**		**-25.8**	**-21.49**	**4.4**
	Non HT20, 6 to 54 Mbps	4	4	-44.7	-43.9	-41.4	-38.1	-31.2	-21.49	9.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-34.9	-39.6			-26.6	-21.49	5.1
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-44.7	-43.9	-41.4		-29.3	-21.49	7.8
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-44.7	-48.4	-48.5	-39.1	-27.3	-21.49	5.8
	HT20, M0 to M7	1	4	-40.6				-36.6	-21.49	15.1
	HT20, M0 to M7	2	4	-40.6	-37.0			-31.4	-21.49	9.9
	HT20, M8 to M15	2	4	-40.6	-37.0			-31.4	-21.49	9.9
	HT20, M0 to M7	3	4	-42.9	-41.1	-44.1		-33.8	-21.49	12.3
	HT20, M8 to M15	3	4	-42.9	-41.1	-44.1		-33.8	-21.49	12.3
	HT20, M16 to M23	3	4	-42.9	-41.1	-44.1		-33.8	-21.49	12.3
	HT20, M0 to M7	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9
	HT20, M8 to M15	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9
	HT20, M16 to M23	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9
	HT20, M24 to M31	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9
	HT20 Beam Forming, M0 to M7	2	7	-42.9	-41.1			-31.9	-21.49	10.4
	HT20 Beam Forming, M8 to M15	2	4	-40.6	-37.0			-31.4	-21.49	9.9
	HT20 Beam Forming, M0 to M7	3	9	-47.7	-45.9	-44.2		-31.9	-21.49	10.4
	HT20 Beam Forming, M8 to M15	3	6	-42.9	-41.1	-44.1		-31.8	-21.49	10.3
	HT20 Beam Forming, M16 to M23	3	4	-42.9	-41.1	-44.1		-33.8	-21.49	12.3
	HT20 Beam Forming, M0 to M7	4	10	-47.7	-46.7	-50.0	-46.5	-31.5	-21.49	10.0
	HT20 Beam Forming, M8 to M15	4	7	-49.1	-46.3	-50.3	-44.1	-33.8	-21.49	12.3
	HT20 Beam Forming, M16 to M23	4	5	-49.1	-46.3	-50.3	-44.1	-35.8	-21.49	14.3
	HT20 Beam Forming, M24 to M31	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9
	HT20 STBC, M0 to M7	2	4	-40.6	-37.0			-31.4	-21.49	9.9
	HT20 STBC, M0 to M7	3	4	-42.9	-41.1	-44.1		-33.8	-21.49	12.3
	HT20 STBC, M0 to M7	4	4	-47.7	-45.9	-44.2	-39.9	-33.4	-21.49	11.9

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

2462	CCK, 1 to 11 MB/s	1	4	-44.4				-40.4	-21.83	18.6
	CCK, 1 to 11 MB/s	2	4	-44.4	-46.8			-38.4	-21.83	16.6
	CCK, 1 to 11 MB/s	3	4	-44.4	-46.8	-46.2		-36.9	-21.83	15.1
	CCK, 1 to 11 MB/s	4	4	-44.4	-46.8	-46.2	-48.0	-36.1	-21.83	14.3
	Non HT20, 6 to 54 Mbps	1	4	-31.2				-27.2	-21.49	5.7
	Non HT20, 6 to 54 Mbps	2	4	-33.8	-36.3			-27.9	-21.49	6.4
	Non HT20, 6 to 54 Mbps	3	4	-33.8	-36.3	-37.6		-26.8	-21.49	5.3
	Non HT20, 6 to 54 Mbps	4	4	-37.4	-41.6	-41.0	-35.1	-27.9	-21.49	6.5
	Non HT20 Beam Forming, 6 to 54 Mbps	**2**	**7**	**-33.8**	**-36.3**			**-24.9**	**-21.49**	**3.4**
	Non HT20 Beam Forming, 6 to 54 Mbps	3	9	-42.9	-45.4	-46.2		-30.8	-21.49	9.3
	Non HT20 Beam Forming, 6 to 54 Mbps	4	10	-42.9	-45.4	-46.2	-38.4	-26.0	-21.49	4.6
	HT20, M0 to M7	1	4	-34.9				-30.9	-21.49	9.4
	HT20, M0 to M7	2	4	-39.7	-39.8			-32.7	-21.49	11.2
	HT20, M8 to M15	2	4	-39.7	-39.8			-32.7	-21.49	11.2
	HT20, M0 to M7	3	4	-39.7	-39.8	-41.4		-31.5	-21.49	10.0
	HT20, M8 to M15	3	4	-39.7	-39.8	-41.4		-31.5	-21.49	10.0
	HT20, M16 to M23	3	4	-39.7	-39.8	-41.4		-31.5	-21.49	10.0
	HT20, M0 to M7	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8
	HT20, M8 to M15	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8
	HT20, M16 to M23	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8
	HT20, M24 to M31	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8
	HT20 Beam Forming, M0 to M7	2	7	-39.7	-39.8			-29.7	-21.49	8.2
	HT20 Beam Forming, M8 to M15	2	4	-39.7	-39.8			-32.7	-21.49	11.2
	HT20 Beam Forming, M0 to M7	3	9	-43.6	-45.7	-45.4		-31.0	-21.49	9.5
	HT20 Beam Forming, M8 to M15	3	6	-39.7	-39.8	-41.4		-29.5	-21.49	8.0
	HT20 Beam Forming, M16 to M23	3	4	-39.7	-39.8	-41.4		-31.5	-21.49	10.0
	HT20 Beam Forming, M0 to M7	4	10	-44.0	-45.7	-47.5	-47.3	-29.9	-21.49	8.4
	HT20 Beam Forming, M8 to M15	4	7	-43.6	-45.7	-45.4	-44.3	-31.6	-21.49	10.2
	HT20 Beam Forming, M16 to M23	4	5	-42.2	-42.8	-44.1	-44.5	-32.3	-21.49	10.8
	HT20 Beam Forming, M24 to M31	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8
	HT20 STBC, M0 to M7	2	4	-39.7	-39.8			-32.7	-21.49	11.2
	HT20 STBC, M0 to M7	3	4	-39.7	-39.8	-41.4		-31.5	-21.49	10.0
	HT20 STBC, M0 to M7	4	4	-42.2	-42.8	-44.1	-44.5	-33.3	-21.49	11.8

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Peak, 2412 MHz, Non HT20, 6 to 54 Mbps

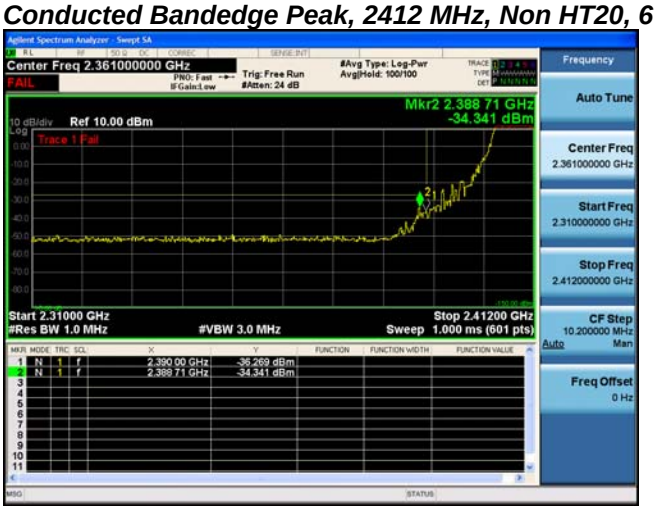

Antenna A

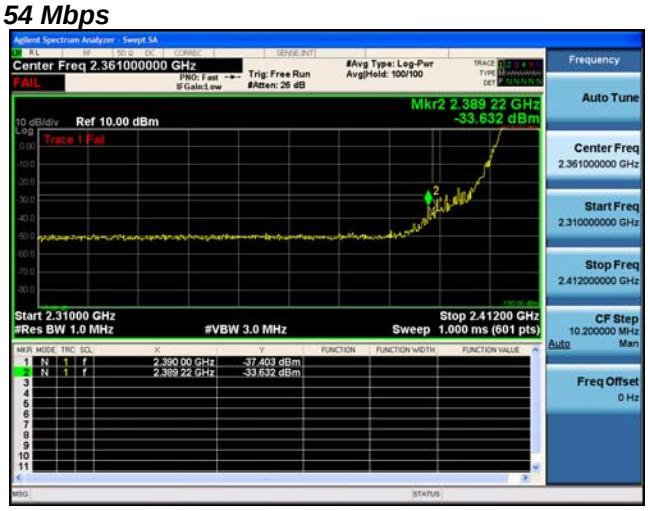

Antenna B

Antenna C

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Peak, 2462 MHz, Non HT20 Beam Forming, 6 to 54 Mbps

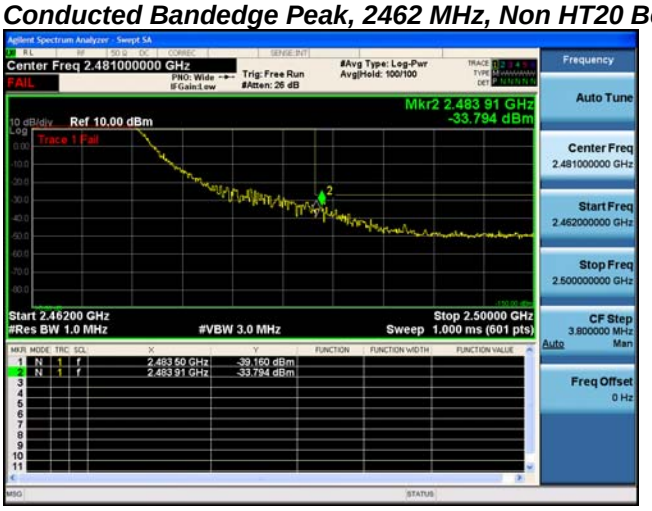

Antenna A

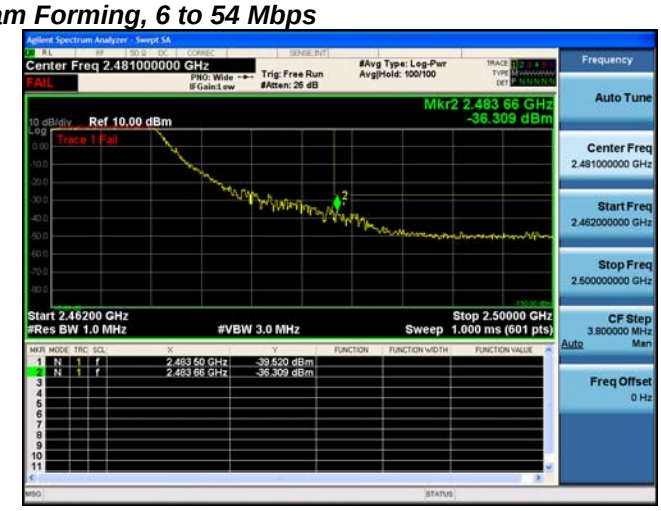

Antenna B

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.8 Conducted Bandedge (Non-Restricted Band)

Emissions in non-restricted frequency bands - Test Requirement

15.247 / LP0002 (2018-01-10) (3.10.1.5) (2.8):
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-Gen 8.9 Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen 8.10 (**b)** Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and (c) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Emissions in non-restricted frequency bands - Test Method

Ref. KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10: 2013

Emissions in non-restricted frequency bands - Conducted Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Use the marker function to determine the maximum spurs amplitude level. 5. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v05 section, 8.5 DTS emissions in non-restricted frequency bands, 8.7 DTS band-edge measurements
ANSI C63.10: 2013 section 11.11.2, 11.11.3

Emissions in non-restricted frequency bands - Conducted Test parameters	
11.11.2 Reference Level measurement Establish a reference level by using the following procedure: a) Set instrument center frequency to DTS channel center frequency. b) Set the span to ≥ 1.5 x *DTS bandwidth*. c) Set the RBW = 100 kHz. d) Set the VBW ≥ 3 x RBW. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum PSD level.	**11.11.3 Emission Level Measurement** a) Set the center frequency and span to encompass frequency range to be measured. b) Set the RBW = 100 kHz. c) Set the VBW ≥ 3 x RBW. d) Detector = peak. e) Sweep time = auto couple. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use the peak marker function to determine the maximum amplitude level.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☑	☐
	Support	S02	☐	☑

Tested By :	Date of testing:
Chris Blair	09-Nov-18 - 13-Nov-18
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Non-Restricted Band

Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Bandedge Delta (dB)	Limit (dBc)	Margin (dB)
2412	CCK, 1 to 11 MB/s	11	55.5	>30	25.5
	Non HT20, 6 to 54 Mbps	**6**	**34.6**	**>30**	**4.6**
	HT20, M0 to M31	m0	39.9	>30	9.9
2462	CCK, 1 to 11 MB/s	11	70.1	>30	40.1
	Non HT20, 6 to 54 Mbps	6	52.6	>30	22.6
	HT20, M0 to M31	m0	56.1	>30	26.1

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Bandedge Delta, 2412 MHz, Non HT20, 6 to 54 Mbps

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix B: Radiated Emission Test Results

Not included in this evaluation. These tests were performed at BACL.

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix C: List of Test Equipment Used to perform the test

Test Equipment used for RF Conducted Tests					
Equip#	**Manufacturer/ Model**	**Description**	**Last Cal**	**Next Cal**	**Test Item**
CIS057476	Cisco NMN	Rack	Cal Not Required		A1 thru A8
CIS055094	PXI-1042 National Instruments	Chassis	Cal Not Required		A1 thru A8
CIS057237	National Instruments PXI-8115	Embedded Controller	Cal Not Required		A1 thru A8
CIS054686	National Instruments PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Cal Not Required		A1 thru A8
CIS056091	National Instruments PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Cal Not Required		A1 thru A8
CIS057245	National Instruments PXI-2799	Switch 1x1	Cal Not Required		A1 thru A8
CIS050721	Agilent N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	10-Apr-18	10-Apr-19	A1 thru A8
CIS054346	N5182B Keysight	MXG X-Series RF Vector Signal Generator	05 Oct 2018	05 Oct 2019	A1 thru A8
CIS036772	Fluke 175	RMS multimeter	22 May 2018	22 May 2019	A1 thru A8
CIS006325	Lufft 5063-33W	Dial hygrometer	27 Aug 2018	27 Aug 2019	A1 thru A8
CIS056329	Pasternack PE5019-1	Torque wrench	28 Feb 2018	28 Feb 2019	A1 thru A8

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ($1x10^3$)
EN	European Norm	MHz	MegaHertz ($1x10^6$)
IEC	International Electro technical Commission	GHz	Gigahertz ($1x10^9$)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ($1x10^3$)
L1	Line 1	µV	Microvolt ($1x10^{-6}$)
L2	Line2	A	Amp
L3	Line 3	µA	Micro Amp ($1x10^{-6}$)
DC	Direct Current	mS	Milli Second ($1x10^{-3}$)
RAW	Uncorrected measurement value, as indicated by the measuring device	µS	Micro Second ($1x10^{-6}$)
RF	Radio Frequency	µS	Micro Second ($1x10^{-6}$)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Photographs of Test Setups

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Title: Radio Conducted Test Setup

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software rev41, rev44, rev45
Cisco Internal LabView Radio Test Automation Report Generator Software rev13, rev14

Appendix G:Test Procedures

Measurements were made in accordance with

- KDB 558074 - D01 DTS Meas Guidance v05
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below

FCC 2.4GHz Test Procedures	EDCS # 1445042
FCC 2.4GHz RSE Test Procedures	EDCS # 1480386

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

http://www.a2la.org/scopepdf/1178-01.pdf

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Appendix I: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 15683808
Target Power Tables EDCS# 11899590

Appendix J: Worst Case Justification

Test modes were selected from the Target Power Tables EDCS# 11899590, representative of supported data rates, paths, antennas, and beamforming combinations.

Appendix K: UUT Software Info from CLI

AP00B7.7108.B200#show ver
Restricted Rights Legend

Use, duplication, or disclosure by the Government is subject to
restrictions as set forth in subparagraph (c) of the Commercial
Computer Software - Restricted Rights clause at FAR sec. 52.227-19 and
subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer
Software clause at DFARS sec. 252.227-7013.

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, California 95134-1706

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

This product contains some software licensed under the
"GNU General Public License, version 2" provided with
ABSOLUTELY NO WARRANTY under the terms of
"GNU General Public License, version 2", available here:
http://www.gnu.org/licenses/old-licenses/gpl-2.0.html

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

This product contains some software licensed under the
"GNU Library General Public License, version 2" provided
with ABSOLUTELY NO WARRANTY under the terms of "GNU Library
General Public License, version 2", available here:
http://www.gnu.org/licenses/old-licenses/lgpl-2.0.html

This product contains some software licensed under the
"GNU Lesser General Public License, version 2.1" provided
with ABSOLUTELY NO WARRANTY under the terms of "GNU Lesser
General Public License, version 2.1", available here:
http://www.gnu.org/licenses/old-licenses/lgpl-2.1.html

This product contains some software licensed under the
"GNU General Public License, version 3" provided with
ABSOLUTELY NO WARRANTY under the terms of
"GNU General Public License, Version 3", available here:
http://www.gnu.org/licenses/gpl.html.

This product contains some software licensed under the
"GNU Affero General Public License, version 3" provided
with ABSOLUTELY NO WARRANTY under the terms of
"GNU Affero General Public License, version 3", available here:
http://www.gnu.org/licenses/agpl-3.0.html.

Cisco AP Software, (ap1g6), [rch-ads-037:/nobackup/shaoxie/workspace5/router]
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2015 by Cisco Systems, Inc.
Compiled Fri Nov 2 14:01:55 CST 2018

ROM: Bootstrap program is U-Boot boot loader
BOOTLDR: U-Boot boot loader Version

AP00B7.7108.B200 uptime is 0 days, 0 hours, 8 minutes
Last reload time : Wed Sep 26 19:49:21 UTC 2018
Last reload reason : reload command

cisco AIR-AP2900I-B-K9 with 1931052/1534120K bytes of memory.
Processor board ID KWC223301QV
AP Running Image : 8.8.1.10
Primary Boot Image : 8.8.1.10
Backup Boot Image : 8.8.1.10
Primary Boot Image Hash:
e748370826e95c1b8b8b8b2fc369fbc6dc494ceafc57c988f282f31c42eccc676a07e281b174d9d90b8b59cfa15b1ca02d
71ef345a3363cc1c7f363cc6ca89b3
Backup Boot Image Hash:
0258f224157b54ade1af05b331dd80850ed106bbacdfdc5ee05118a6f973adbfb9331d779fee68d5f8a0020af829dfb828
f7f66a8f9761adfbe25876fa383e63

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

1 Gigabit Ethernet interfaces
2 802.11 Radios
Radio FW version : 0309210f11c4d71c07c3661854b97256
NSS FW version : sradhakr,

Base ethernet MAC Address : 00:B7:71:08:B2:00
Part Number : 74-55083-01
PCA Assembly Number : 000-00000-00
PCA Revision Number : 01
PCB Serial Number : KWC223301QV
Top Assembly Part Number : 074-120619-01
Top Assembly Serial Number : KWC223301QV
Top Revision Number : 01
Product/Model Number : AIR-AP2900I-B-K9

AP00B7.7108.B200#
AP00B7.7108.B200#
AP00B7.7108.B200#devs
EXITING CISCO SHELL. PLEASE EXECUTE EXIT IN DEVSHELL TO GET BACK TO CISCO SHELL.

BusyBox v1.23.2 (2018-11-01 11:29:22 CST) built-in shell (ash)

Welcome to Cisco.

Usage of this device is governed by Cisco's End User License Agreement,
available at:
http://www.cisco.com/c/en/us/td/docs/general/warranty/English/EU1KEN_.html.

m00B77108B200:/# cat MERAKI_BUILD.extra
Fri Nov 2 14:01:55 CST 2018
rch-ads-037
/nobackup/shaoxie/workspace5/router

09262017
c85
c86
c87
* compliance_chris
fc_merge
hgbtldr31
initclean
master
swsudi_commit
base/axel-qca/firmware/IPQ8074/q6_fw.b00 | Bin 404 -> 404 bytes
base/axel-qca/firmware/IPQ8074/q6_fw.b01 | Bin 392 -> 392 bytes

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

```
 base/axel-qca/firmware/IPQ8074/q6_fw.b02 | Bin 4696 -> 4696 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b03 | Bin 2989648 -> 2987856 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b04 | Bin 953856 -> 953152 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b05 | Bin 193668 -> 193668 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b07 | Bin 7544 -> 7552 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b08 | Bin 330837 -> 330645 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.b09 | Bin 262144 -> 262144 bytes
 base/axel-qca/firmware/IPQ8074/q6_fw.mdt | Bin 796 -> 796 bytes
 10 files changed, 0 insertions(+), 0 deletions(-)

svn base: c5729886f15bad4a5e4823f97f90962c2b676db9M
commit: 4372b95ed5aadd828cb7a28ab4f355b7c3bace38
tree 1702f08529f671c35d95d2be1133f8ae5176078c
recent commit: c5729886f15bad4a5e4823f97f90962c2b676db9
m00B77108B200:/#
m00B77108B200:/#
m00B77108B200:/#
m00B77108B200:/# show_cookie
Part Number                    : 74-55083-01
Board Revision                 : 0
PCB Serial Number              : KWC223301QV
PCB Fab Part Number            : 0-0000-00
Deviation Number               : 0
MAC Address                    : 00:B7:71:08:B2:00
MAC Address Block Size         : 4
Radio 0 MAC Address            : 00:B7:71:08:B4:00
Radio 0 MAC Address Block Size : 16
Radio 1 MAC Address            : 00:B7:71:08:B4:10
Radio 1 MAC Address Block Size : 16
PCA Assembly Number            : 000-00000-00
PCA Revision Number            : 01
Product/Model Number           : AIR-AP2900I-B-K9
Top Assembly Part Number       : 074-120619-01
Top Revision Number            : 01
Top Assembly Serial Number     : KWC223301QV
RMA Test History               : 00
RMA History                    : 00
RMA Number                     : 00-00-00-00
Device Type                    : 4C
Max Association Allowed        : 2
Radio(2.4G) Carrier Set        : 0000
Radio(2.4G) Max Transmit Power Level : 100
Radio(2.4G) Antenna Diversity Support: 01
Radio(2.4G) Encryption Ability : 0002
Radio(5G) Carrier Set          : 0029
Radio(5G) Max Transmit Power Level : 100
Radio(5G) Antenna Diversity Support : 01
Radio(5G) Encryption Ability   : 0002
```


This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

```
Radio(802.11g) Radio Mode          : 255
PEP Product Identifier (PID)       : AIR-AP2900I-B-K9
PEP Version Identifier (VID)       : V01
System Flags                       : 00
Controller Type                    : 0000
Host Controller Type               : 0000
Mfr Service Date                   : 2018.08.15-47:59:59
Radio(49) Carrier Set              : 0000
Radio(49) Max Transmit Power Level  : 100
Radio(49) Antenna Diversity Support  : 01
Radio(49) Encryption Ability       : 0002
Radio(58) Carrier Set              : 0029
Radio(58) Max Transmit Power Level  : 100
Radio(58) Antenna Diversity Support  : 01
Radio(58) Encryption Ability       : 0002
ACT2 ID                            : AP2900
Static AP Mode                     : 0
m00B77108B200:/#
m00B77108B200:/#
m00B77108B200:/#
m00B77108B200:/#
m00B77108B200:/# iwpriv wifi0 getRegdomain
wifi0     getRegdomain:20
m00B77108B200:/# iwpriv wifi1 getRegdomain
wifi1     getRegdomain:58
m00B77108B200:/#
```

End Of Document

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential