正面

反面

205 .00 mm

SK8 series RGB USB /Bluetooth+2.4G 3-mode keyboard

Applicable models: SK8 Mechanical switch/Optical switch series keyboard

MAC ON WIN OFF

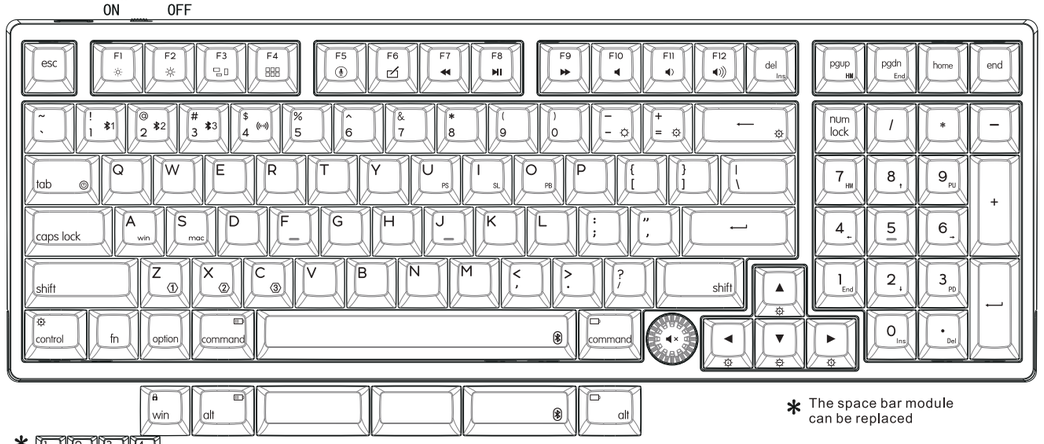

* The space bar module can be replaced

* 1 2 3 4 One of the blue LED is flashing,The keyboard is connecting the BT/2.4G equipment.

fn + Space Bluetooth or 2.4G ON/OFF switch,Link to USB mode.

Press Fn with the function keys

FN function description (long press Esc+Ctrl_L+Alt_L = reset)

BT/2.4G Setting (BT model only,can not modify)

Key	Feature
FN + Space	Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + 1	Long press: The red&green LED of 1 keycap will flash, The ✱1 bluetooth equipment can be paired. Press: The keyboard will connect the ✱1 BT equipment or disconnect.
FN + 2	Long press: The red&green LED of 2 keycap will flash, The ✱2 bluetooth equipment can be paired. Press: The keyboard will connect the ✱2 BT equipment or disconnect.
FN + 3	Long press: The red&green LED of 3 keycap will flash, The ✱3 bluetooth equipment can be paired. Press: The keyboard will connect the ✱3 BT equipment or disconnect.
FN + 4	Press: The keyboard will connect the 2.4G equipment or disconnect.

Note: If the bluetooth pairing is timed out or failed, please re-pair. If the bluetooth pairingis successful on the equipment, but the keyboard can not work still, please delete the keyboard in the bluetooth list of equipment and pair again.

Lighting control (can not modify)

Key	Feature	Key	Feature
FN + backspace	Backlight ON/OFF	FN + = +	Light color switching
FN + ▼	Backlight brightness -	FN + ◄	Backlight Effect Speed −
FN + ▲	Backlight brightness +	FN + ►	Backlight Effect Speed +
FN + −_	Backlight mode 1~18	FN + Control	Ambient light/Logo light mode switch

Media control (can not modify)

Key		MAC Feature	Windows Feature
FN+F1	F1	Screen brightness -	Screen brightness -
FN+F2	F2	Screen brightness +	Screen brightness +
FN+F3	F3	Expand all active windows	Expand all active windows
FN+F4	F4	Enter the main interface of the app	Show desktop
FN+F5	F5	Enter Spotlight global search	F5
FN+F6	F6	Enter handwriting input	F6
FN+F7	F7	Previous	Previous
FN+F8	F8	Play/Pause	Play/Pause
FN+F9	F9	Next	Next
FN+F10	F10	Mute	Mute
FN+F11	F11	Volume−	Volume−
FN+F12	F12	Volume+	Volume+

Pilot lamp control (can not modify)

FN + Win	Clock/Unlock Win key
FN + L-Alt	Off/on the charg Indicator light , LOGO light and backlight
FN + R-Alt	Electric quantity inquiry (Only Wireless mode)
FN + Tab	long press for 3 seconds to on/off the keyboard

Mac/Win OS Switch (can not modify)

	MAC mode	WIN mode
Wired single-mode	Toggle the switch on the Upper left corner of keyboard to the left	Toggle the switch on the Upper left corner of keyboard to the right
Wireless three-mode	Short press FN+S	Short press FN+A

FN Combination key (factory setting)

Key	Windows\MAC Feature	Key	Windows\MAC Feature
FN+U	PS	FN+Del	Ins
FN+I	SL	FN+PG UP	HM
FN+O	PB	FN+PG DN	End
FN+ESC	Switching screens		

Custom mode description

Key	Feature
FN + Z Layer 1	① FN + Z Enter user mode 1, the white light under the Z key will light up, no need to Connect the driver, the keyboard can Execute the set custom function.Users can modify the key functions and macro settings by the driver And the setting can be downloaded to the keyboard and saved.
FN + X Layer 2	② FN + X Enter user mode 2, the white light under the X key will light up, no need to Connect the driver, the keyboard can Execute the set custom function.Users can modify the key functions and macro settings by the driver And the setting can be downloaded to the keyboard and saved.
FN + C Layer 3	③ FN + C Enter user mode 3, the white light under the C key will light up, no need to Connect the driver, the keyboard can Execute the set custom function.Users can modify the key functions and macro settings by the driver And the setting can be downloaded to the keyboard and saved.

Note: The three layers need to be customized in the drive environment, and after customization, they will be automatically downloaded to the keyboard and saved locally.

For more technical support, please update the driver for setup
http://www.sikakeyb.com
Contact us：support@sikakeyb.com；ocean@sikakeyb.com

Powered by SIKAKEYB

SK8 系列 RGB USB 有线/蓝牙双模 /蓝牙 +2.4G 三模键盘

适用机型：SK8 机械轴/SK8 机械光轴版系列键盘

MAC ON WIN OFF

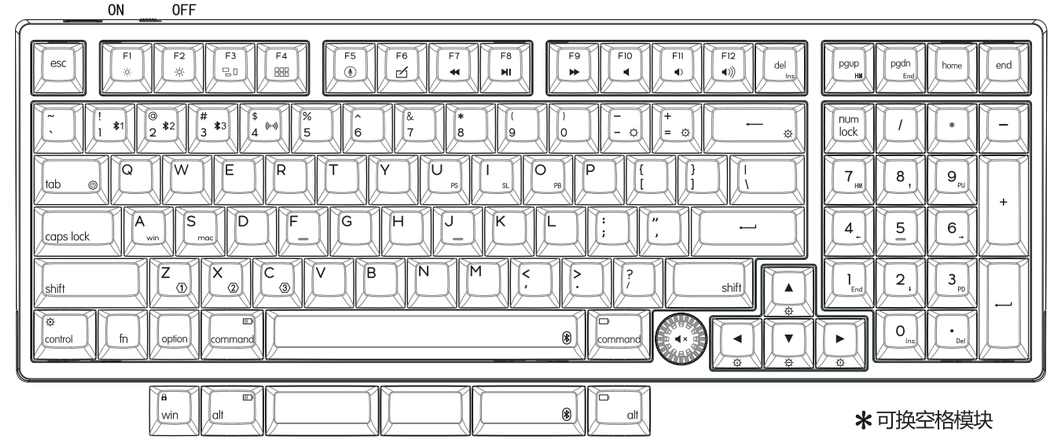

* 可换空格模块

* 1 2 3 4 蓝牙/2.4G状态说明：1、2、3、4 键下任意蓝灯闪烁表示搜索蓝牙/2.4G设备，蓝灯常亮表示蓝牙/2.4G正常连接中。

fn + 空格键 快速关闭蓝牙/2.4G搜索和连接，键盘切换到有线模式。
有线模式下按FN1+空格键，键盘切换到最后连接的蓝牙或2.4G设备。

以上键帽字符仅供参考，以实物为准。
上图FN附加功能需配合FN组合键才能触发

FN 功能说明 (长按Esc+Ctrl_L+Alt_L 恢复出厂设置)

蓝牙及2.4G控制（蓝牙/2.4G机型专有设置 不可更改）

按键	功能
FN + 空格	蓝牙/2.4G开关 ON/OFF 切换到 USB 有线键盘模式或者连接上一次蓝牙/2.4G设备。
FN + 1	长按： 1 键下红绿交替闪烁，对码 ✱1 蓝牙设备。 短按： 切换到 ✱1 蓝牙设备或者离开 ✱1 蓝牙设备。
FN + 2	长按： 2 键下红绿交替闪烁，对码 ✱2 蓝牙设备。 短按： 切换到 ✱2 蓝牙设备或者离开 ✱2 蓝牙设备。
FN + 3	长按： 3 键下红绿交替闪烁，对码 ✱3 蓝牙设备。 短按： 切换到 ✱3 蓝牙设备或者离开 ✱3 蓝牙设备。
FN + 4	短按：切换到 2.4G设备或者离开 2.4G设备。

注意：如蓝牙配对超时或配对失败，请重新进行配对；如果主机显示蓝牙配对成功，但无法使用，请删除主机蓝牙列表里的这个键盘，重新配对。

灯光控制（固定设置 不可更改）

按键	功能	按键	功能
FN + backspace	背光开关ON/OFF	FN + =+	背光颜色切换
FN + ▼	背光亮度 −	FN + ◄	背光变换速度 −
FN + ▲	背光亮度 +	FN + ►	背光变换速度 +
FN + −_	背光模式 1-18	FN + Control	底灯/Logo灯模式切换

多媒体控制 （标准模式不可更改）

按键		MAC功能	Windows功能
FN+F1	F1	屏幕亮度 −	屏幕亮度 −
FN+F2	F2	屏幕亮度 +	屏幕亮度 +
FN+F3	F3	展开所有活动窗口	展开所有活动窗口
FN+F4	F4	进入应用程序主界面	显示桌面
FN+F5	F5	进入spotlight全局搜索	F5
FN+F6	F6	进入手写输入	F6
FN+F7	F7	上一曲	上一曲
FN+F8	F8	播放/暂停	播放/暂停
FN+F9	F9	下一曲	下一曲
FN+F10	F10	静音	静音
FN+F11	F11	音量 −	音量 −
FN+F12	F12	音量 +	音量 +

指示灯控制 （标准模式不可更改）

FN+Tab	长按3秒开启/锁定键盘
FN+Win	锁定/解锁Win功能键
FN+L-Alt/Command	关闭/开启充电指示灯、LOGO灯和底灯
FN+R-Alt/Command	电池电量显示

Mac/Win系统切换（标准模式不可更改）

	MAC模式	WIN模式
有线单模	键盘右上角切拨开关向左切	键盘右上角切拨开关向右切
无线三模	短按 FN+S	短按 FN+A

FN 复合功能键（标准模式出厂设置）

按键	Windows\MAC功能	按键	Windows\MAC功能
FN+U	PS	FN+Del	Ins
FN+I	SL	FN+PG UP	HM
FN+O	PB	FN+PG DN	End
FN+ESC	切换屏幕		

自定义模式说明

按键	功能
FN + Z 配置层 1	① FN + Z，进入用户自定义模式1，Z键下白灯亮起，无需打开和连接驱动，键盘即可执行用户设置好的按键自定义功能，用户可以通过驱动程序修改本模式下的按键功能和宏定义设置并可将设置参数下载到键盘本地保存。
FN + X 配置层 2	② FN + X，进入用户自定义模式2，X键下白灯亮起，无需打开和连接驱动，键盘即可执行用户设置好的按键自定义功能，用户可以通过驱动程序修改本模式下的按键功能和宏定义设置并可将设置参数下载到键盘本地保存。
FN + C 配置层 3	③ FN + C，进入用户自定义模式3，C键下白灯亮起，无需打开和连接驱动，键盘即可执行用户设置好的按键自定义功能，用户可以通过驱动程序修改本模式下的按键功能和宏定义设置并可将设置参数下载到键盘本地保存。

注意：以上三个配置层需要在驱动环境下自定义，自定义后会自动下载到键盘本地中保存。

更多技术支持请到以下网址下载更新驱动程序进行设置
http://www.sikakeyb.com
联系我们：support@sikakeyb.com；ocean@sikakeyb.com

Powered by SIKAKEYB

183.6mm

虚线为折叠线
印刷时请去掉此线

正反面印刷
印刷时请把黑色边框去掉
并帮忙折叠好(英文在上面,中文在里面),谢谢!
尺寸:183.6 x 205mm

中文微软雅黑 英文Arial

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.