


Appendix RF test data for WIFI5.3G

E.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	27.337	≥ 0.5	Pass
NVNT	a	5300	Ant1	25.226	≥ 0.5	Pass
NVNT	a	5320	Ant1	28.565	≥ 0.5	Pass
NVNT	n20	5260	Ant1	26.074	≥ 0.5	Pass
NVNT	n20	5300	Ant1	29.016	≥ 0.5	Pass
NVNT	n20	5320	Ant1	27.683	≥ 0.5	Pass
NVNT	n40	5270	Ant1	51.342	≥ 0.5	Pass
NVNT	n40	5310	Ant1	41.467	≥ 0.5	Pass
NVNT	ac20	5260	Ant1	27.95	≥ 0.5	Pass
NVNT	ac20	5300	Ant1	29.006	≥ 0.5	Pass
NVNT	ac20	5320	Ant1	27.455	≥ 0.5	Pass
NVNT	ac40	5270	Ant1	46.659	≥ 0.5	Pass
NVNT	ac40	5310	Ant1	51.173	≥ 0.5	Pass
NVNT	ac80	5290	Ant1	86.017	≥ 0.5	Pass
NVNT	ax20	5260	Ant1	29.17	≥ 0.5	Pass
NVNT	ax20	5300	Ant1	27.245	≥ 0.5	Pass
NVNT	ax20	5320	Ant1	26.577	≥ 0.5	Pass
NVNT	ax40	5270	Ant1	45.969	≥ 0.5	Pass
NVNT	ax40	5310	Ant1	49.456	≥ 0.5	Pass
NVNT	ax80	5290	Ant1	86.36	≥ 0.5	Pass

Test Graphs


-26dB Bandwidth NVNT a 5260MHz Ant1

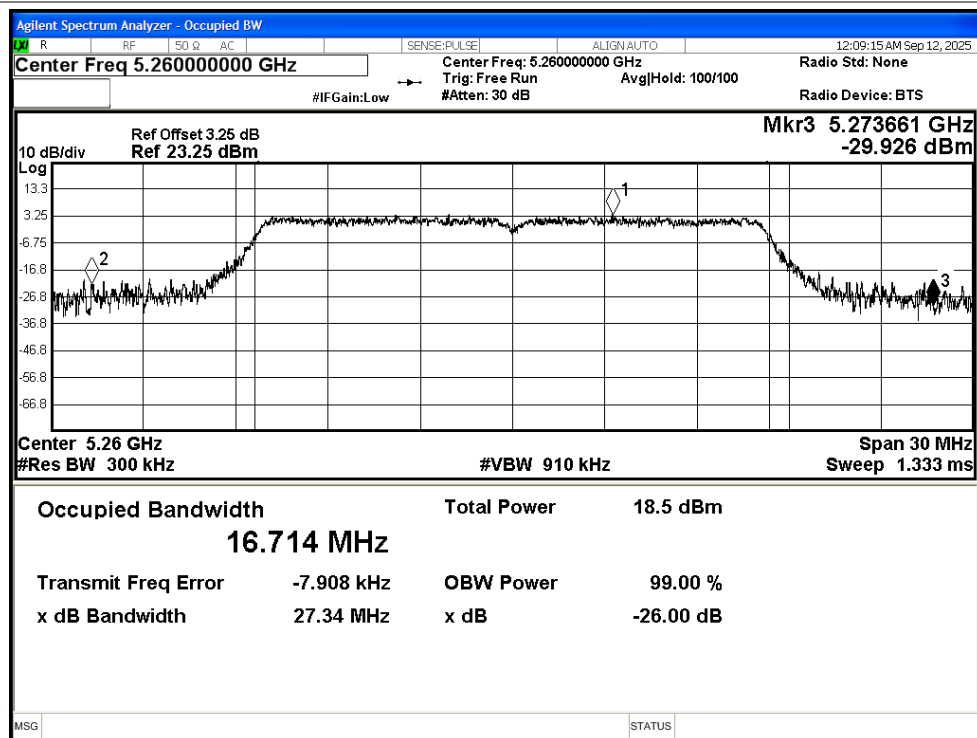


-26dB Bandwidth NVNT a 5300MHz Ant1

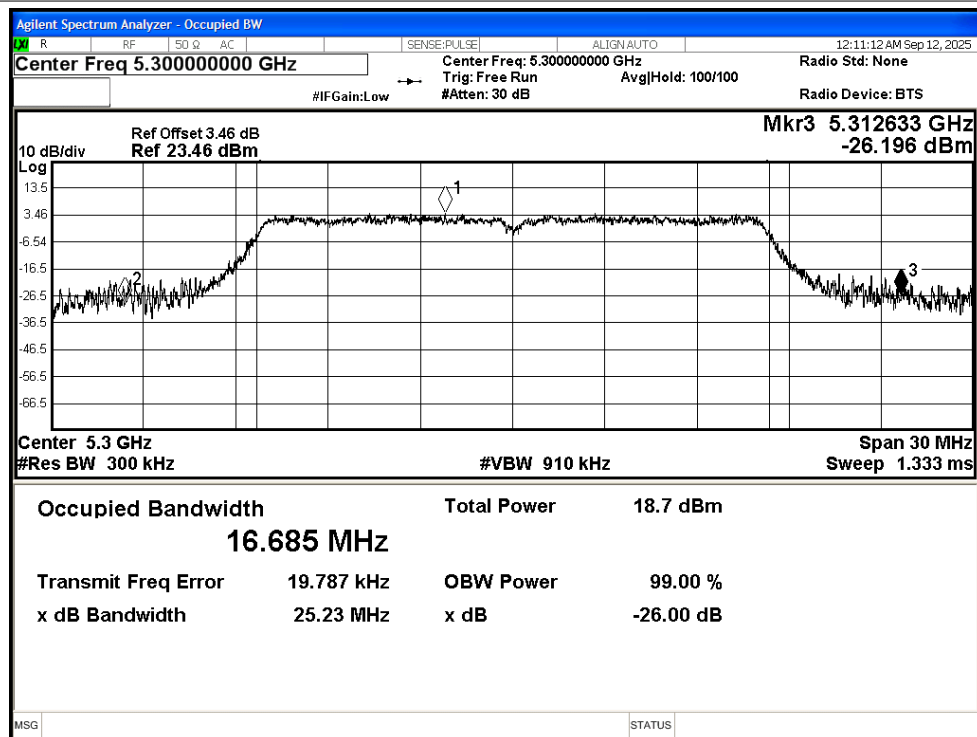


-26dB Bandwidth NVNT a 5320MHz Ant1

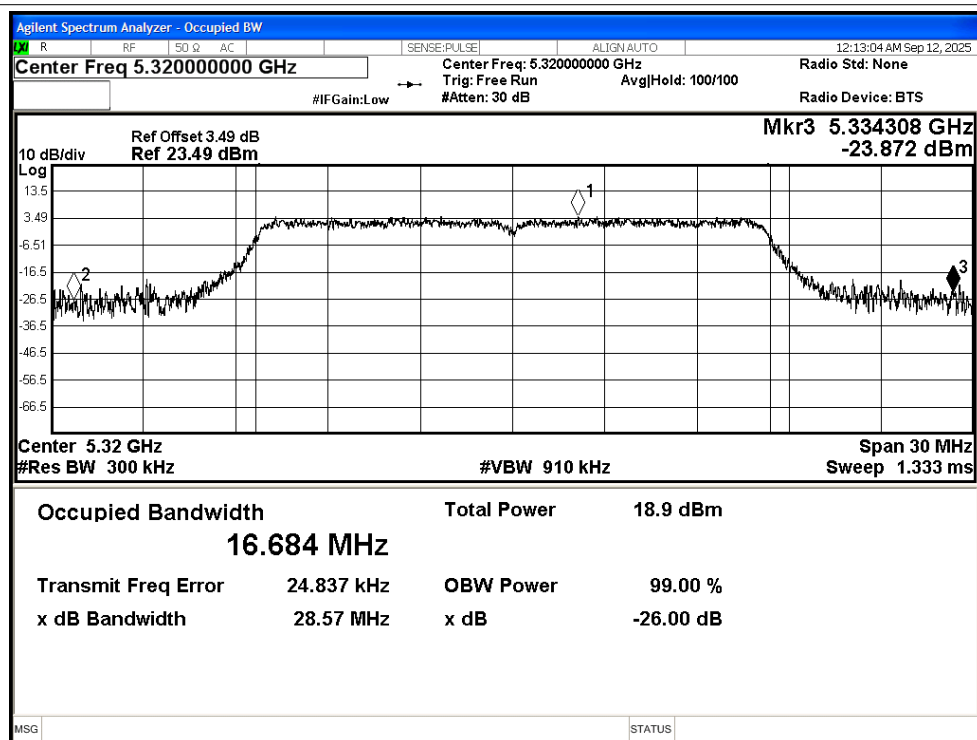


-26dB Bandwidth NVNT n20 5260MHz Ant1

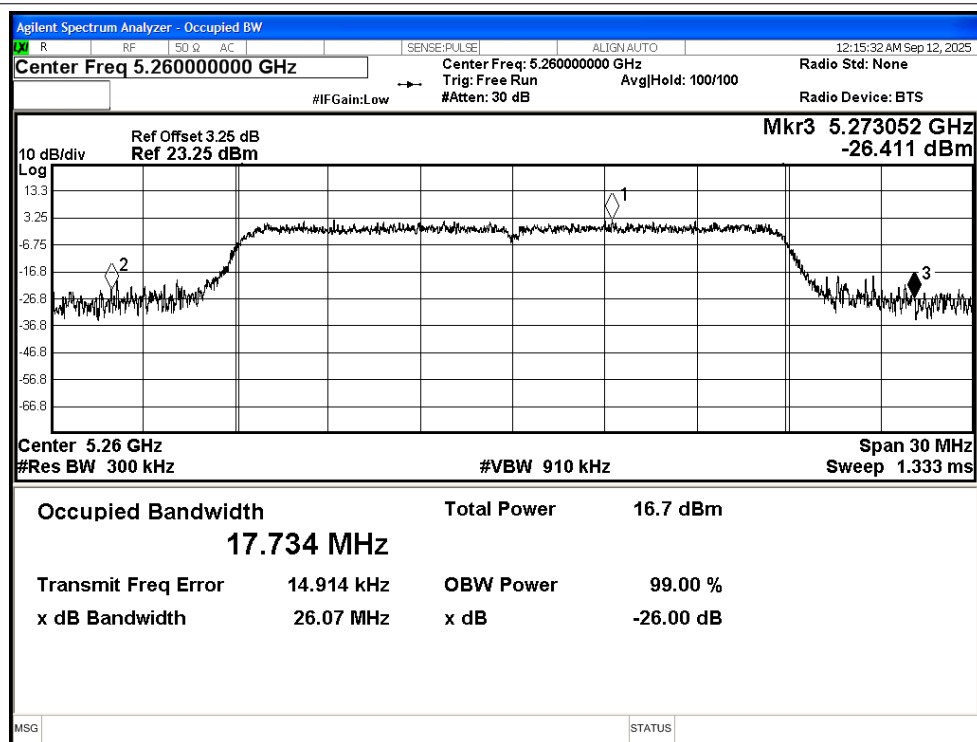


-26dB Bandwidth NVNT n20 5300MHz Ant1

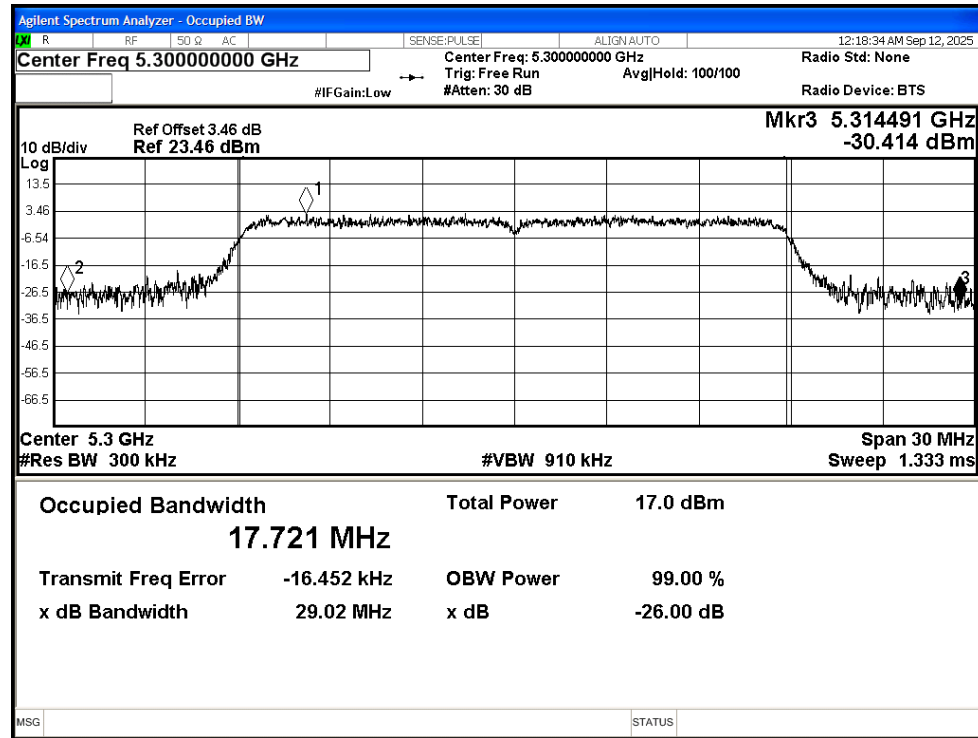


-26dB Bandwidth NVNT n20 5320MHz Ant1

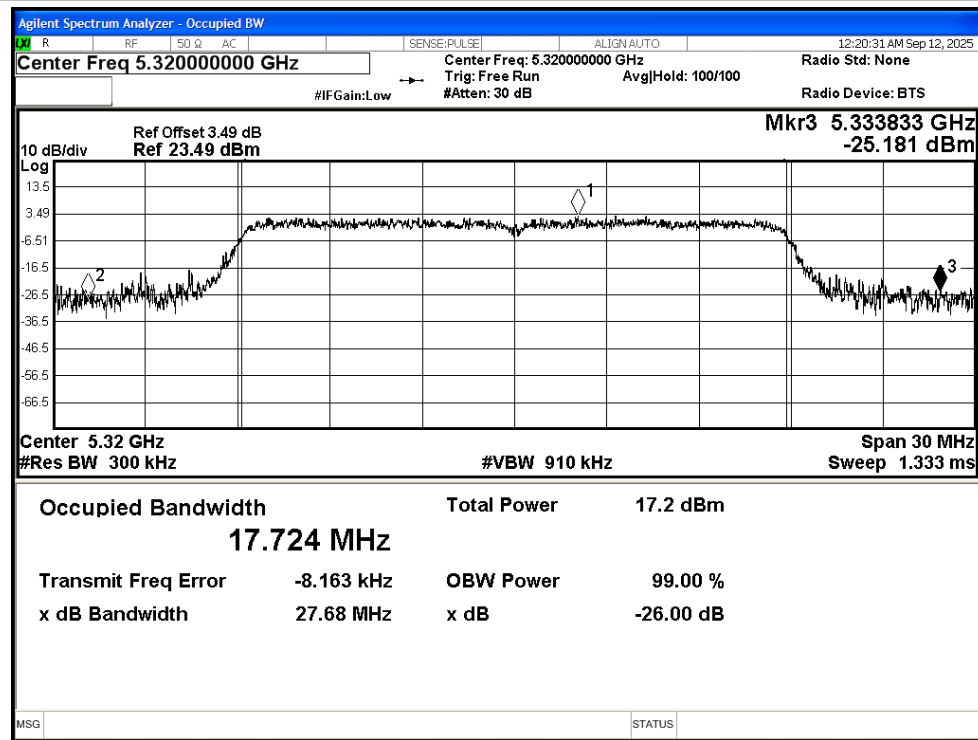


-26dB Bandwidth NVNT n40 5270MHz Ant1

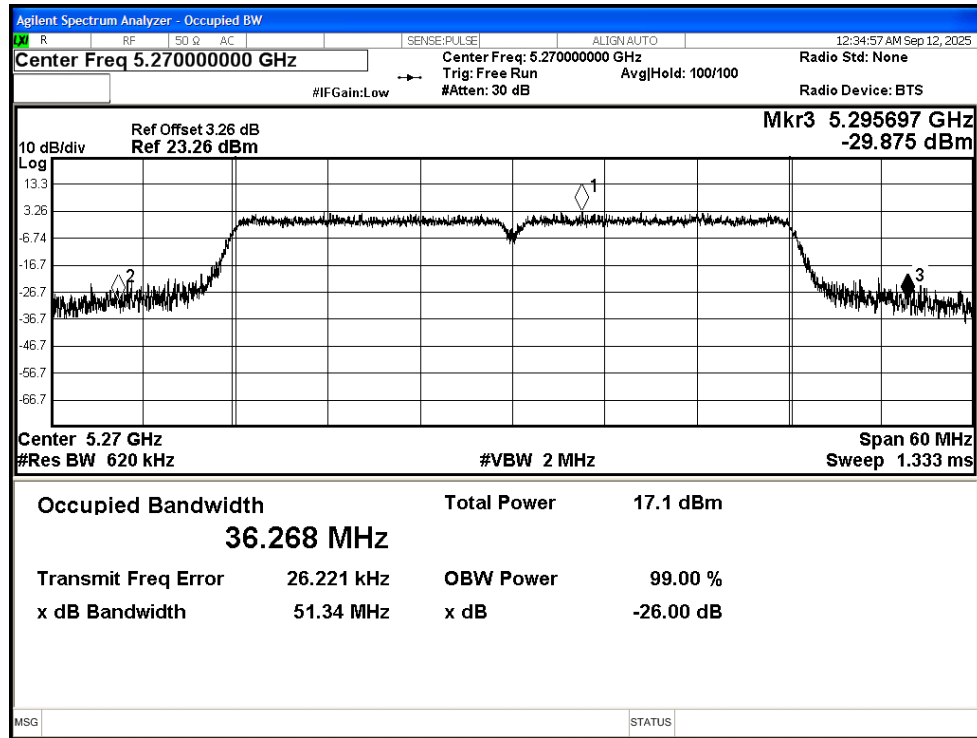


-26dB Bandwidth NVNT n40 5310MHz Ant1

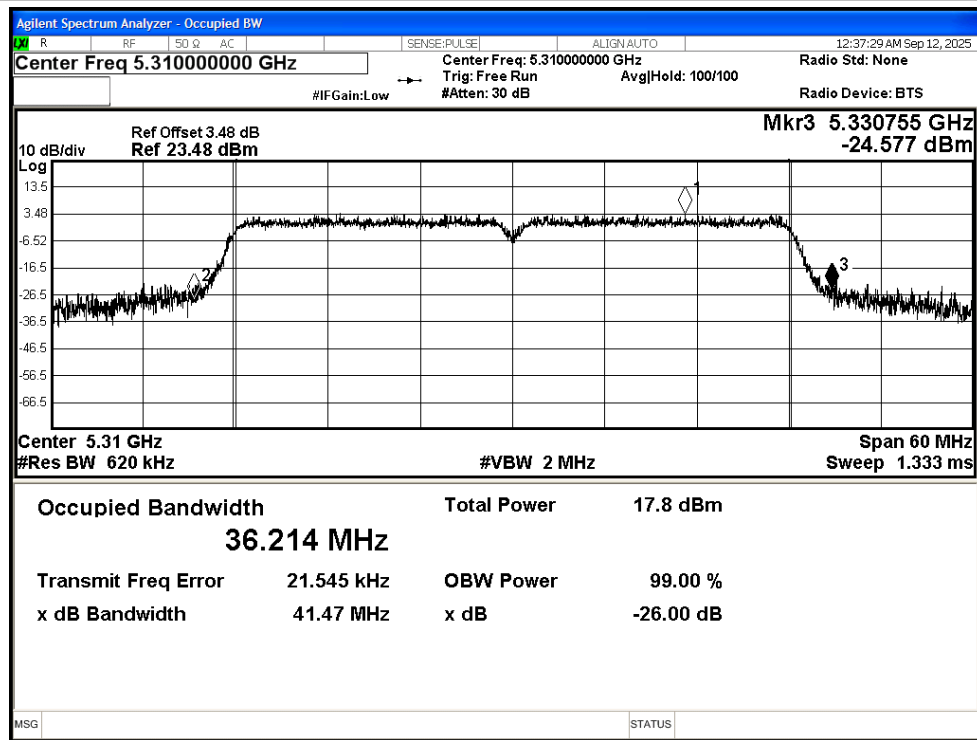


-26dB Bandwidth NVNT ac20 5260MHz Ant1

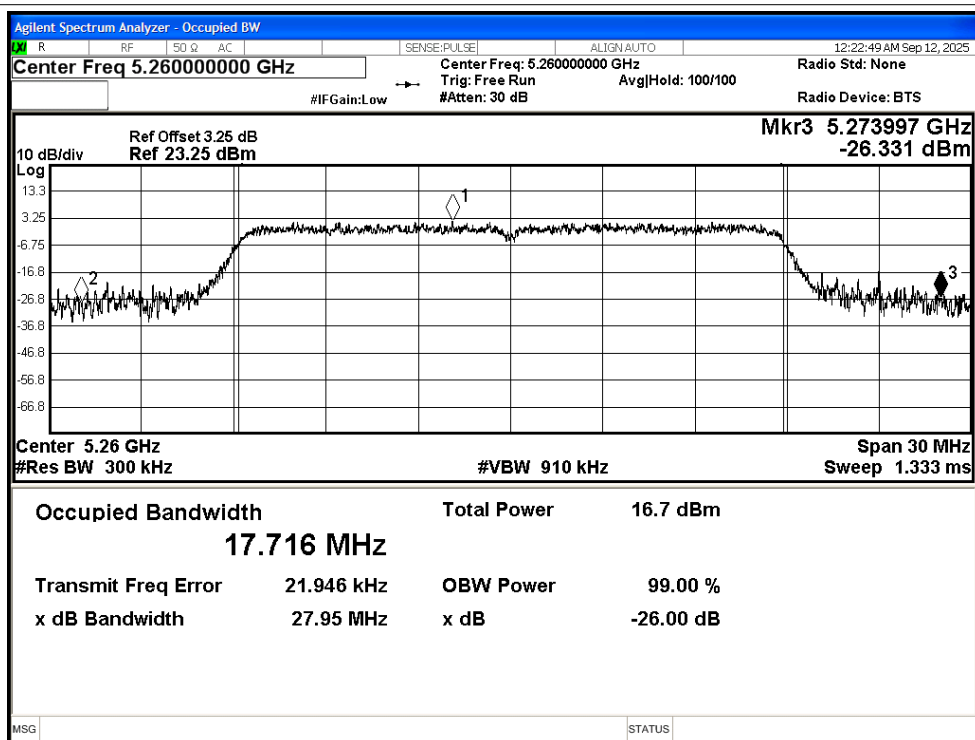


-26dB Bandwidth NVNT ac20 5300MHz Ant1

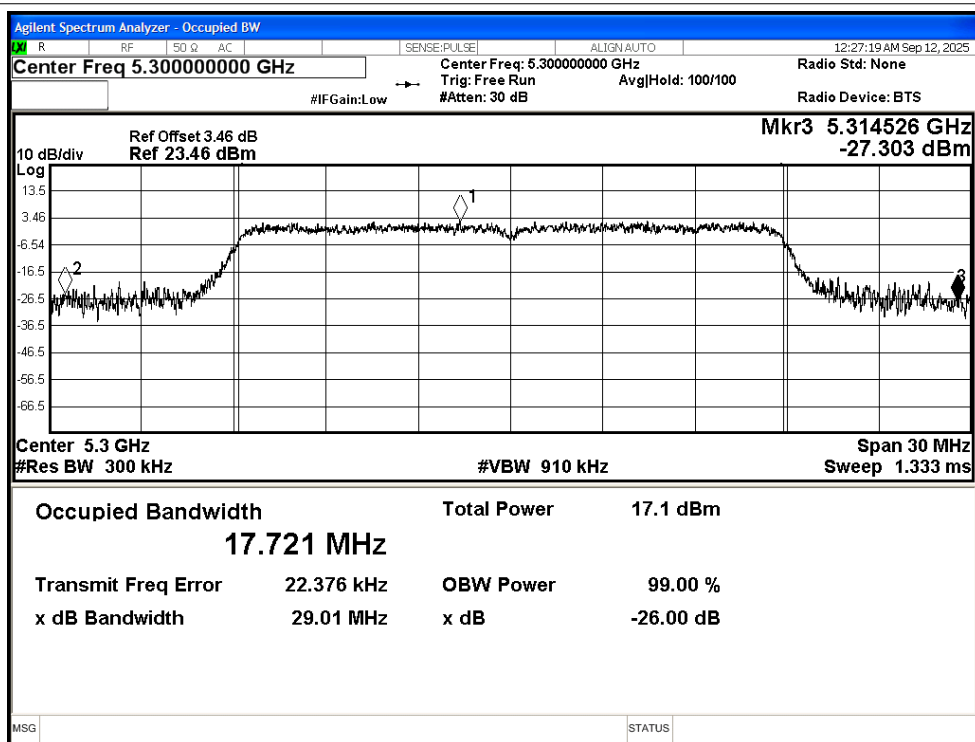


-26dB Bandwidth NVNT ac20 5320MHz Ant1

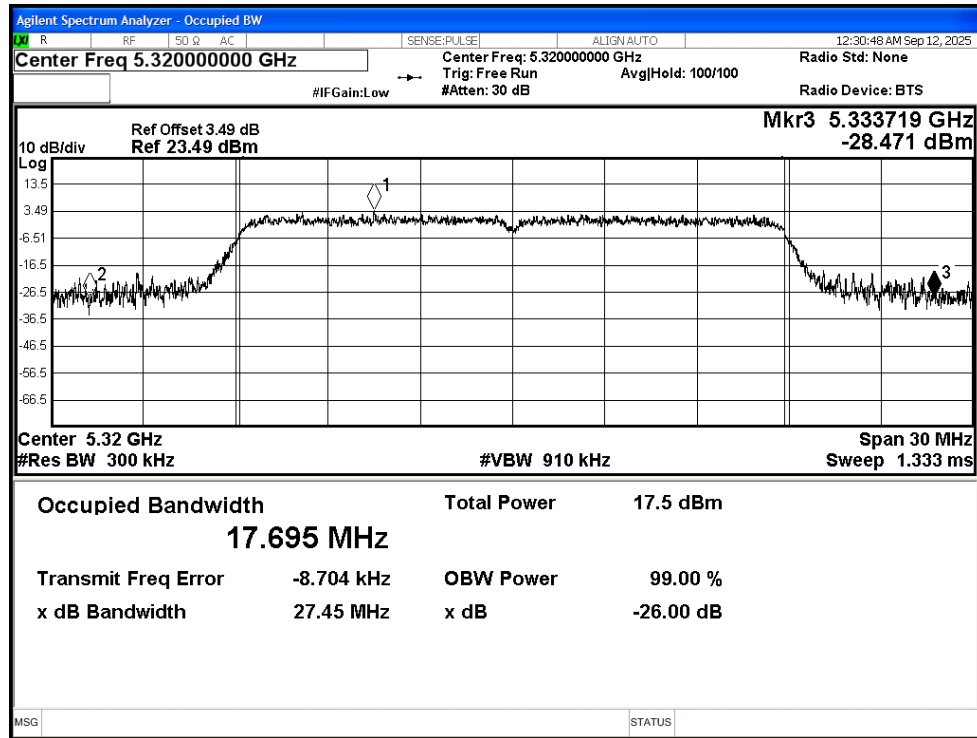


-26dB Bandwidth NVNT ac40 5270MHz Ant1

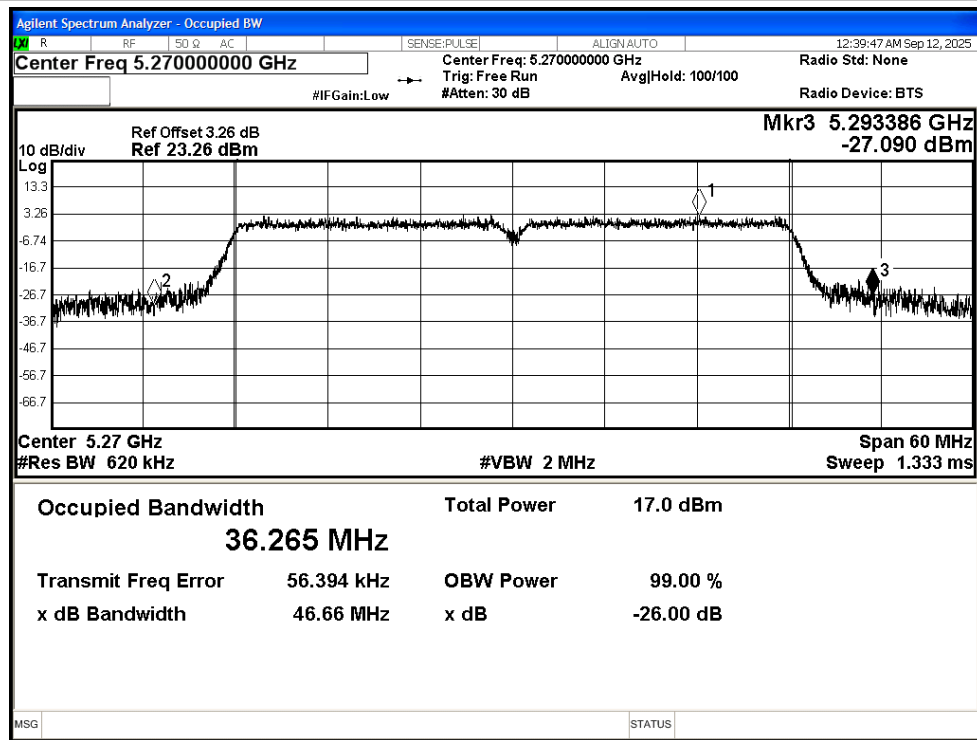

-26dB Bandwidth NVNT ac40 5310MHz Ant1

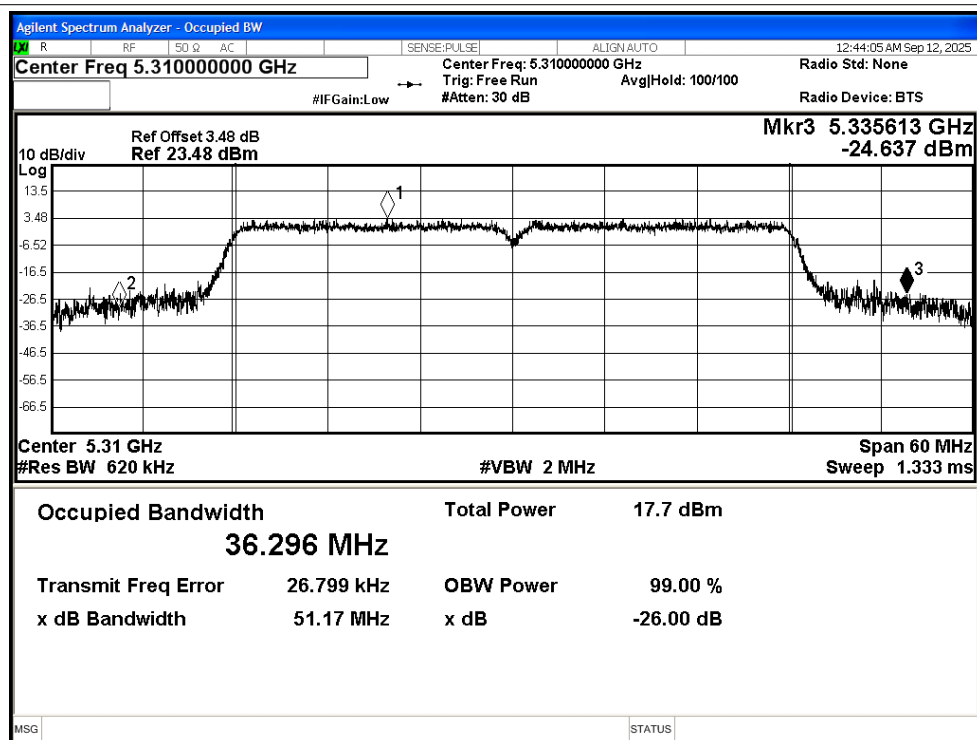


-26dB Bandwidth NVNT ac80 5290MHz Ant1

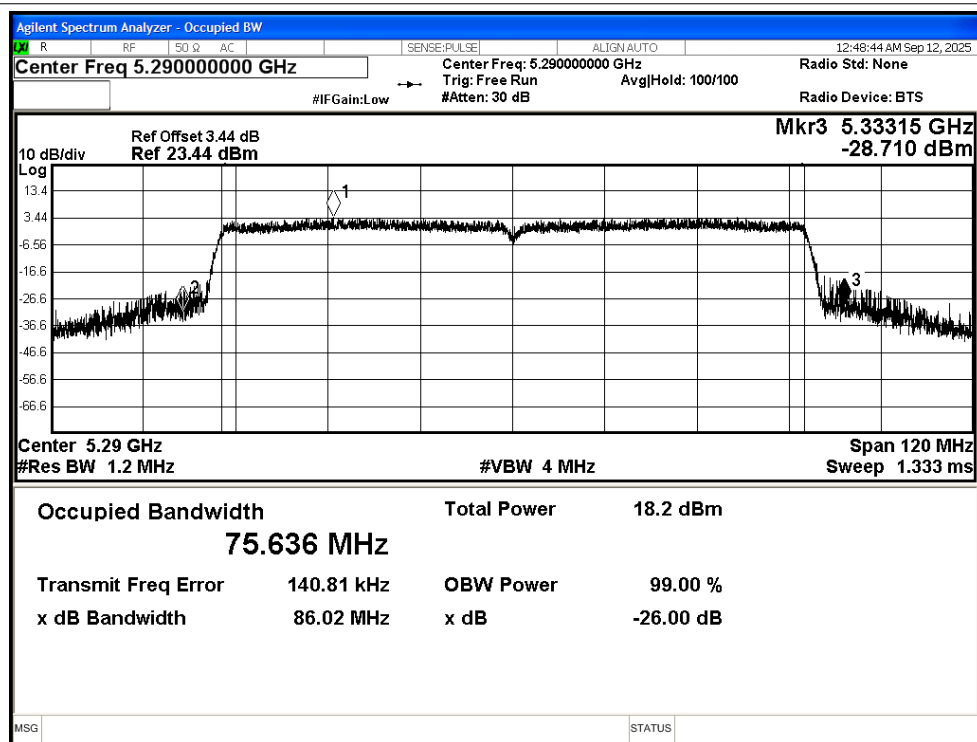


250904124FW4

-26dB Bandwidth NVNT ax20 5260MHz Ant1

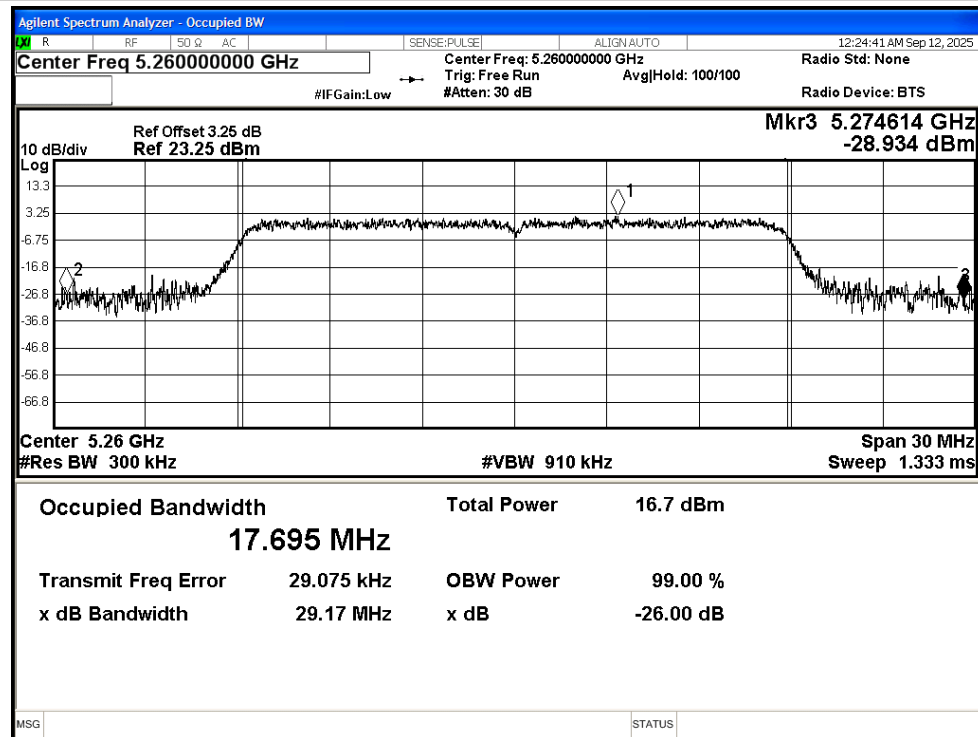


-26dB Bandwidth NVNT ax20 5300MHz Ant1

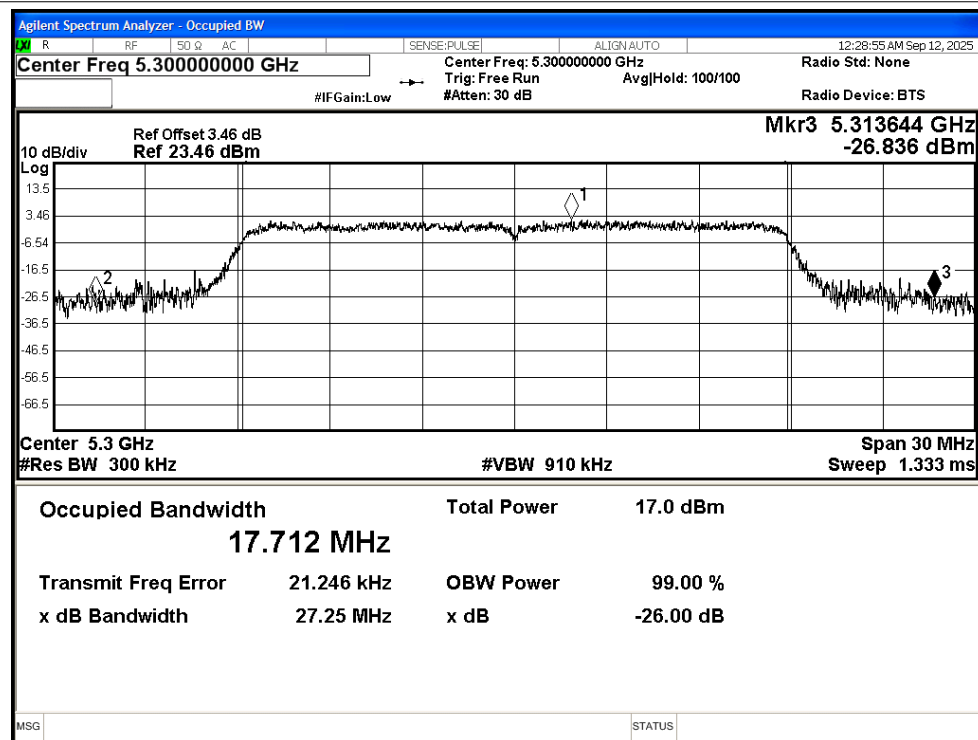


250904124FW4

-26dB Bandwidth NVNT ax20 5320MHz Ant1

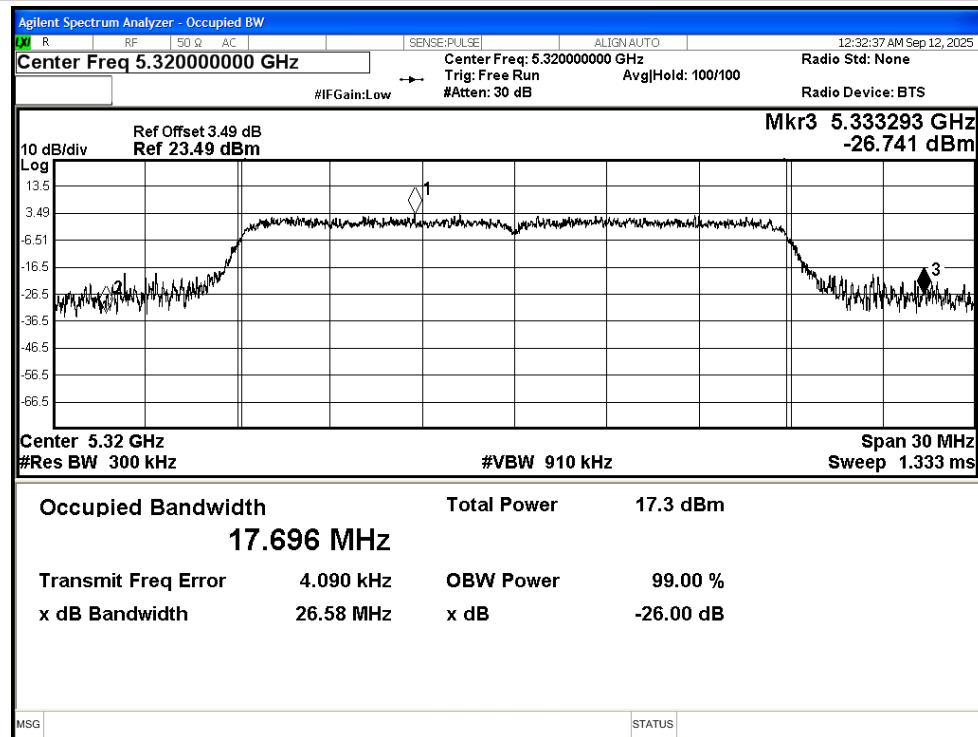


-26dB Bandwidth NVNT ax40 5270MHz Ant1

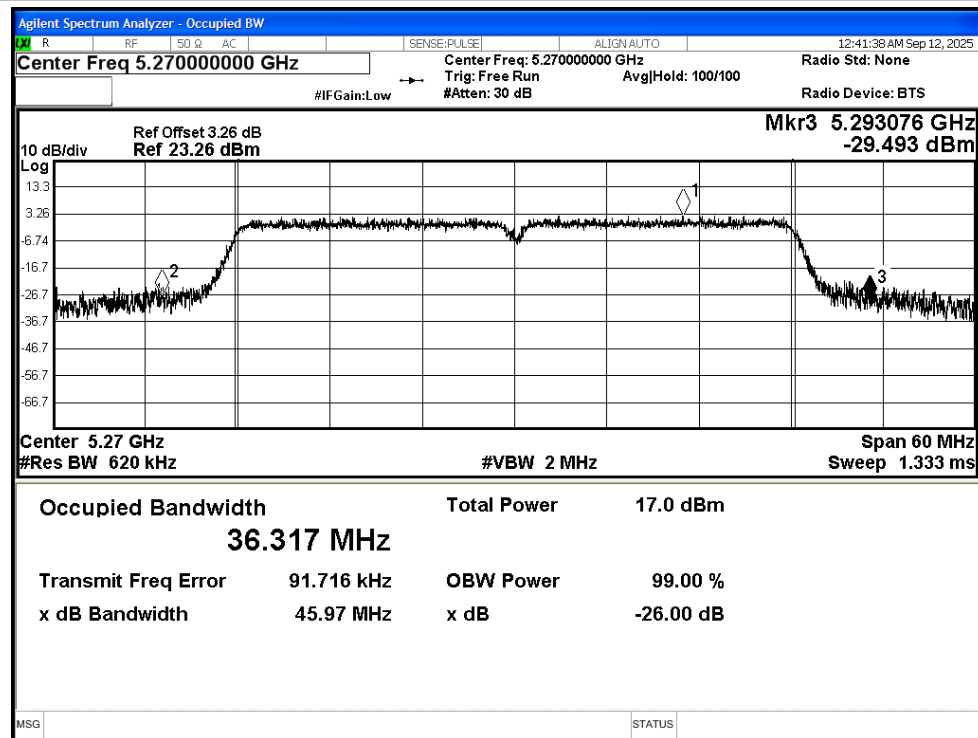


250904124FW4

-26dB Bandwidth NVNT ax40 5310MHz Ant1

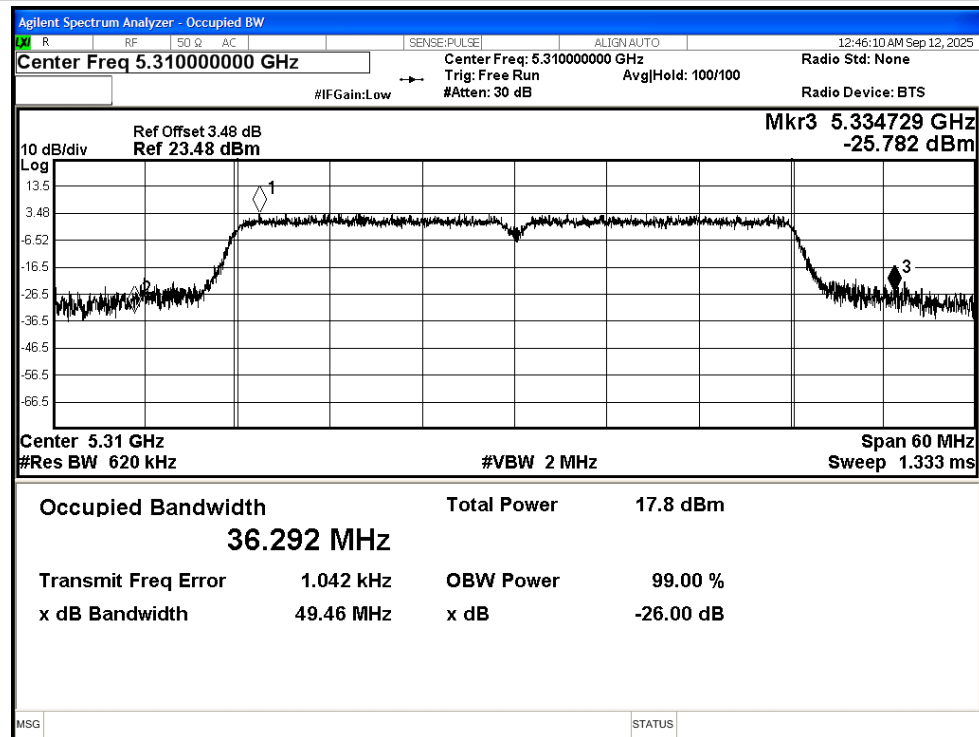

-26dB Bandwidth NVNT ax80 5290MHz Ant1

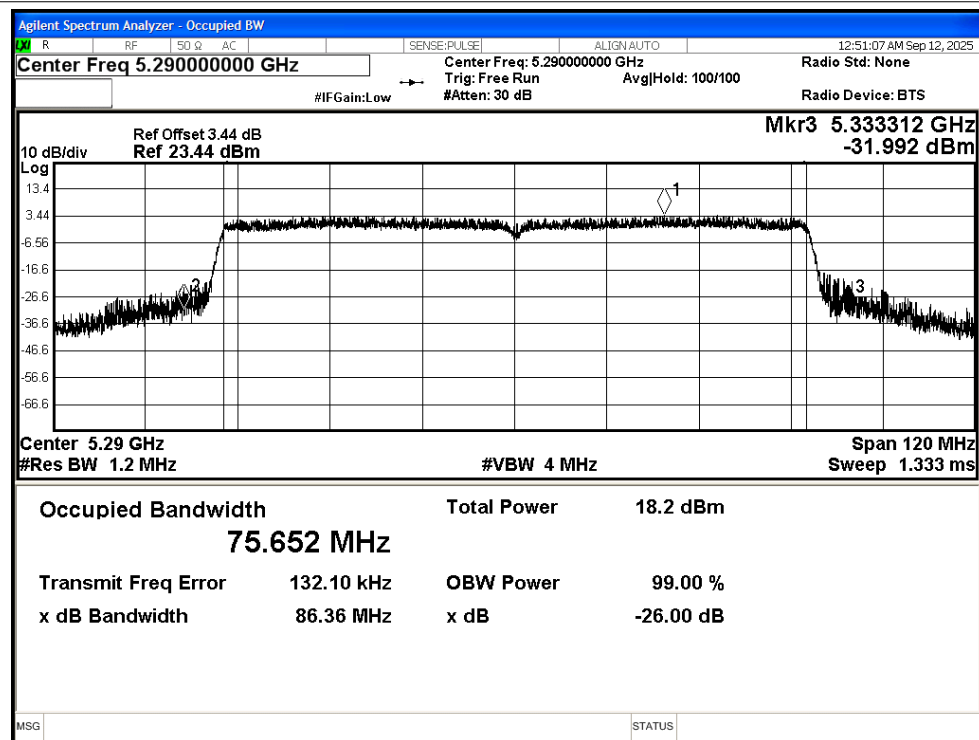


E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	12.73	0.24	12.97	24	Pass
NVNT	a	5300	Ant1	12.93	0.24	13.17	24	Pass
NVNT	a	5320	Ant1	13.17	0.24	13.41	24	Pass
NVNT	n20	5260	Ant1	11.21	0.12	11.33	24	Pass
NVNT	n20	5300	Ant1	11.54	0.12	11.66	24	Pass
NVNT	n20	5320	Ant1	11.77	0.12	11.89	24	Pass
NVNT	n40	5270	Ant1	10.79	0.24	11.03	24	Pass
NVNT	n40	5310	Ant1	11.59	0.24	11.83	24	Pass
NVNT	ac20	5260	Ant1	11.20	0.12	11.32	24	Pass
NVNT	ac20	5300	Ant1	11.56	0.12	11.68	24	Pass
NVNT	ac20	5320	Ant1	11.90	0.12	12.02	24	Pass
NVNT	ac40	5270	Ant1	10.83	0.24	11.07	24	Pass
NVNT	ac40	5310	Ant1	11.53	0.24	11.77	24	Pass
NVNT	ac80	5290	Ant1	11.24	0.47	11.71	24	Pass
NVNT	ax20	5260	Ant1	11.17	0.12	11.29	24	Pass
NVNT	ax20	5300	Ant1	11.68	0.12	11.80	24	Pass
NVNT	ax20	5320	Ant1	11.82	0.12	11.94	24	Pass
NVNT	ax40	5270	Ant1	10.85	0.24	11.09	24	Pass
NVNT	ax40	5310	Ant1	11.52	0.24	11.76	24	Pass
NVNT	ax80	5290	Ant1	11.17	0.47	11.64	24	Pass


E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	2.29	0.24	2.53	11	Pass
NVNT	a	5300	Ant1	2.32	0.24	2.56	11	Pass
NVNT	a	5320	Ant1	2.74	0.24	2.98	11	Pass
NVNT	n20	5260	Ant1	0.52	0.12	0.64	11	Pass
NVNT	n20	5300	Ant1	0.62	0.12	0.74	11	Pass
NVNT	n20	5320	Ant1	0.94	0.12	1.06	11	Pass
NVNT	n40	5270	Ant1	-2.97	0.24	-2.73	11	Pass
NVNT	n40	5310	Ant1	-2.59	0.24	-2.35	11	Pass
NVNT	ac20	5260	Ant1	0.5	0.12	0.62	11	Pass
NVNT	ac20	5300	Ant1	0.76	0.12	0.88	11	Pass
NVNT	ac20	5320	Ant1	0.95	0.12	1.07	11	Pass
NVNT	ac40	5270	Ant1	-3.28	0.24	-3.04	11	Pass
NVNT	ac40	5310	Ant1	-2.33	0.24	-2.09	11	Pass
NVNT	ac80	5290	Ant1	-5.62	0.47	-5.15	11	Pass
NVNT	ax20	5260	Ant1	0.65	0.12	0.77	11	Pass
NVNT	ax20	5300	Ant1	0.88	0.12	1	11	Pass
NVNT	ax20	5320	Ant1	1.11	0.12	1.23	11	Pass
NVNT	ax40	5270	Ant1	-3.13	0.24	-2.89	11	Pass
NVNT	ax40	5310	Ant1	-2.42	0.24	-2.18	11	Pass
NVNT	ax80	5290	Ant1	-5.41	0.47	-4.94	11	Pass

PSD NVNT a 5260MHz Ant1

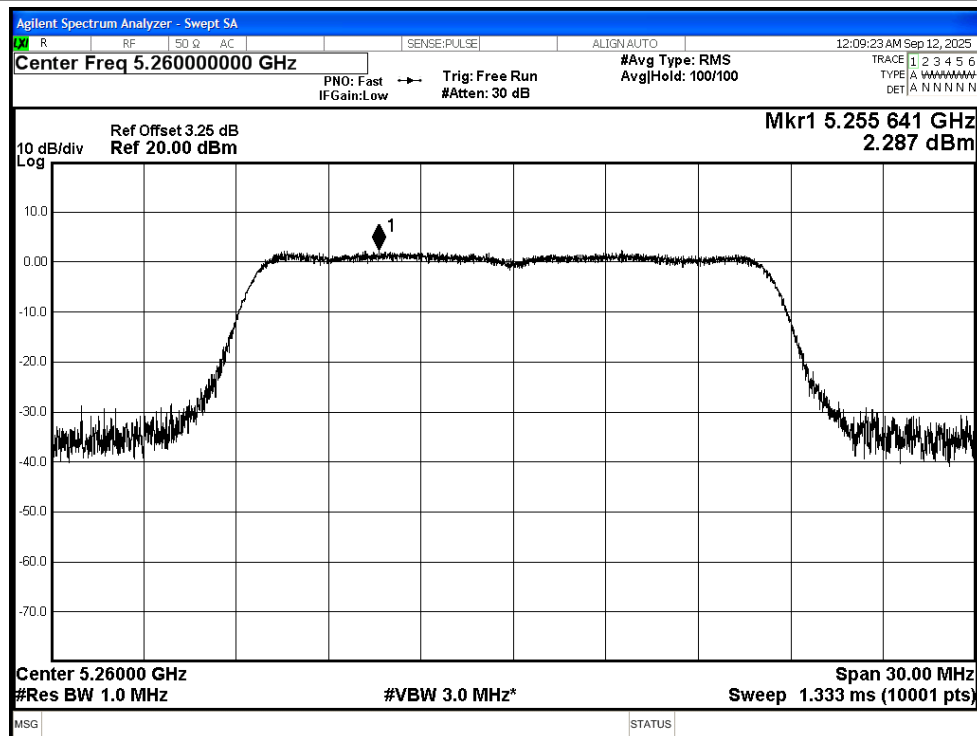



PSD NVNT a 5300MHz Ant1

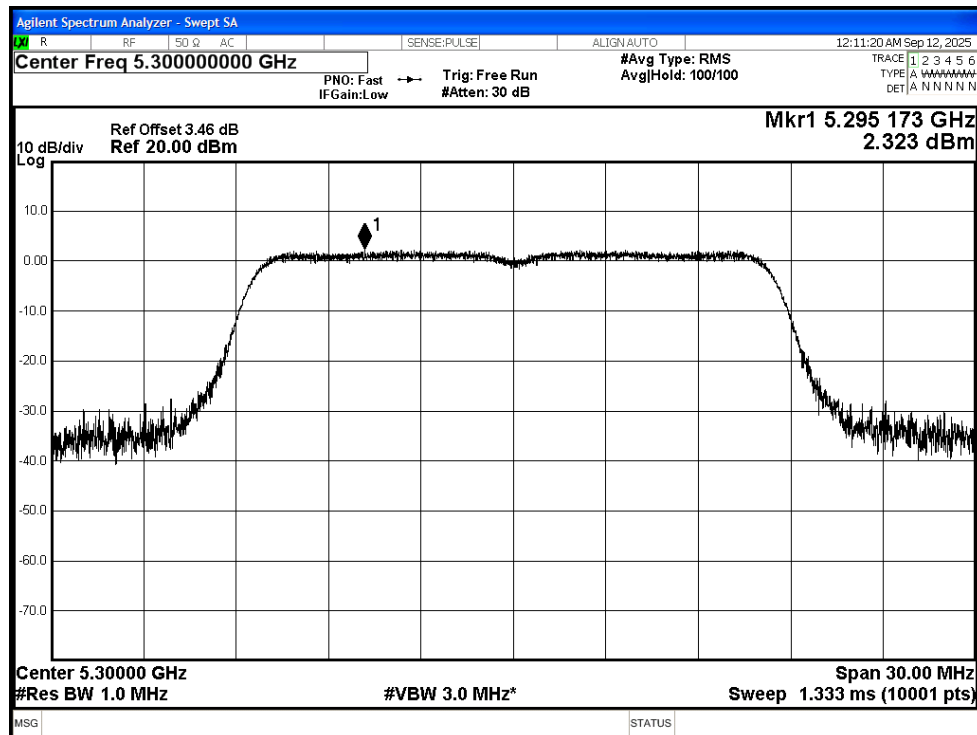

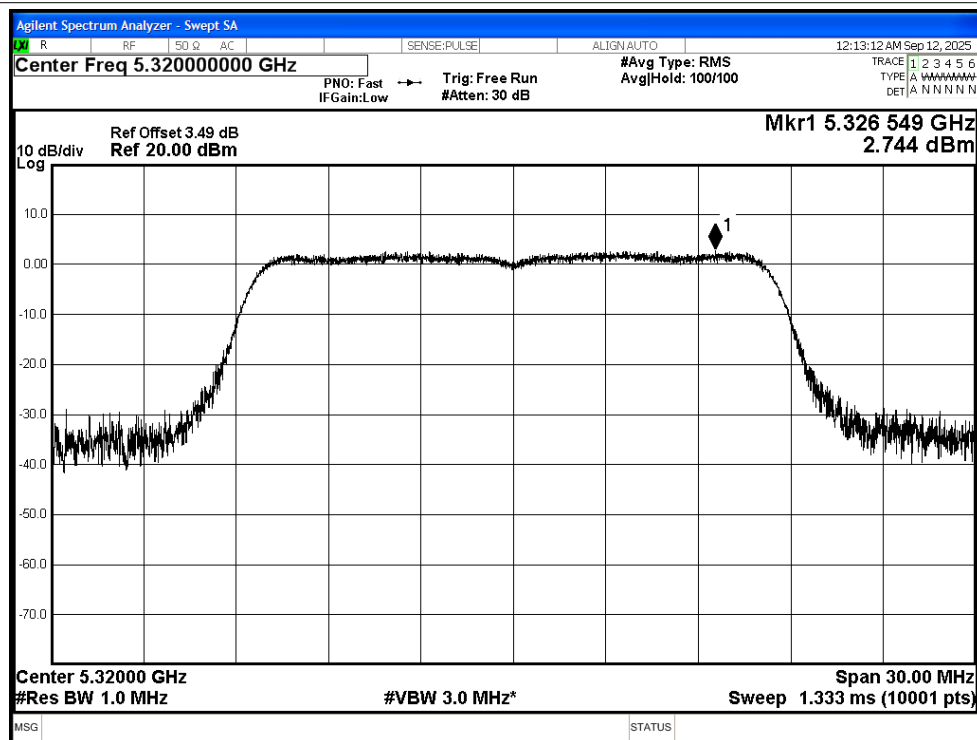
250904124FW4
PSD NVNT a 5320MHz Ant1


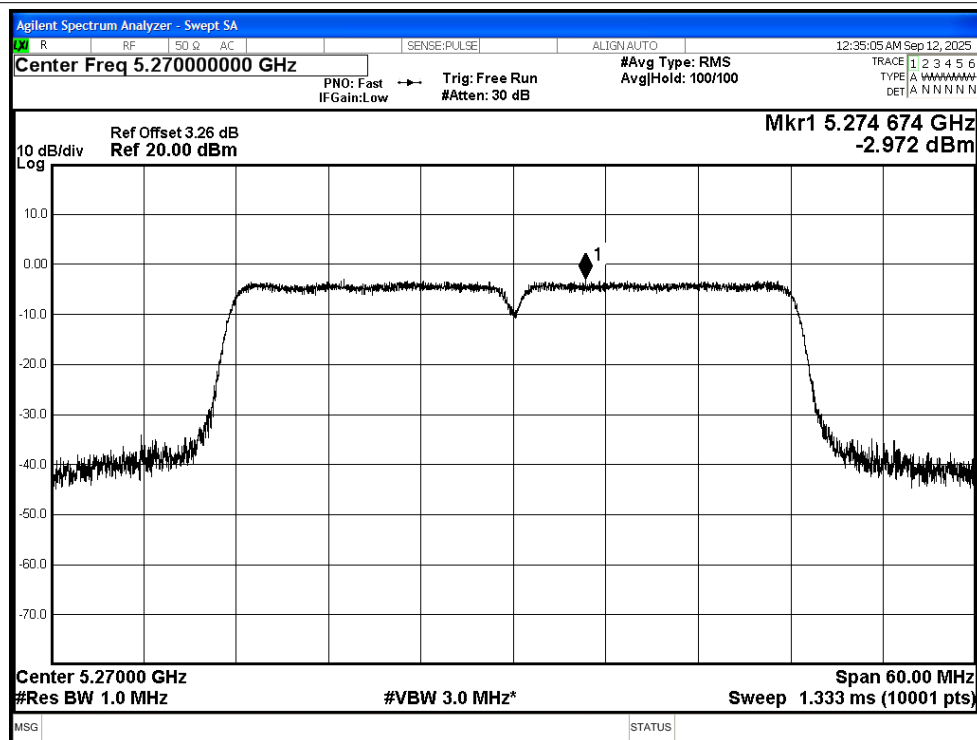
PSD NVNT n20 5260MHz Ant1

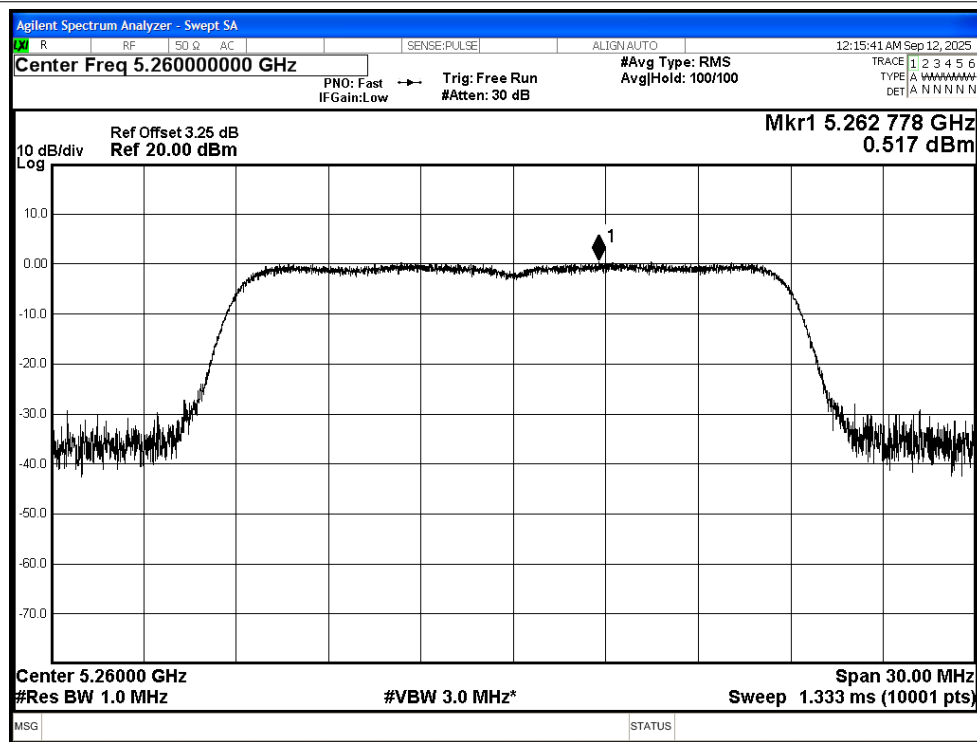

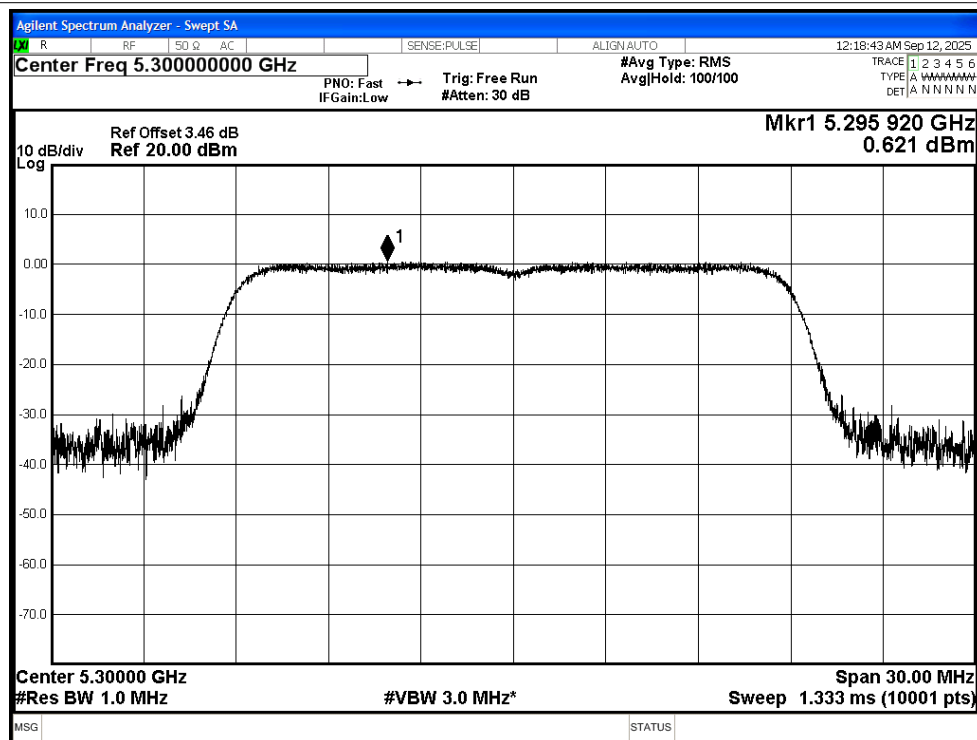
250904124FW4
PSD NVNT n20 5300MHz Ant1


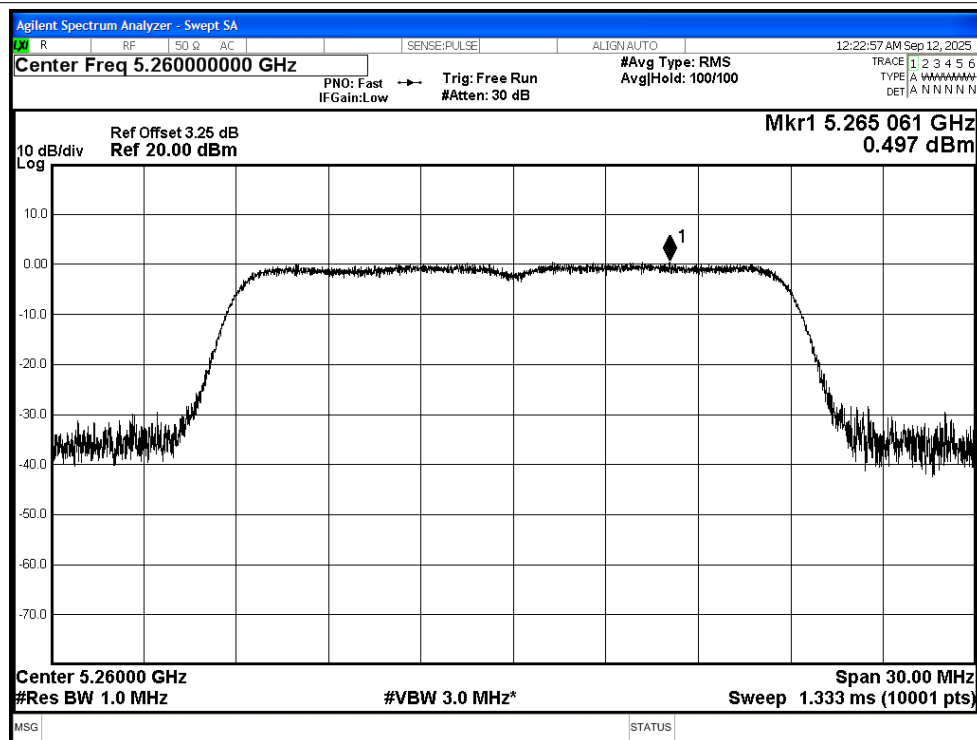
PSD NVNT n20 5320MHz Ant1

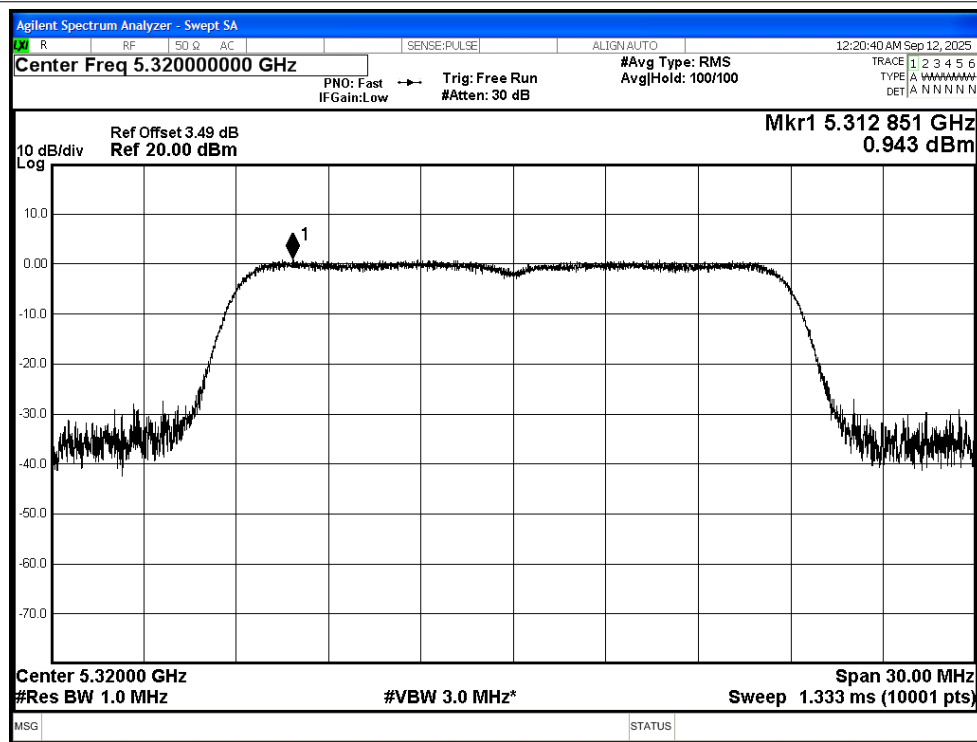


250904124FW4
PSD NVNT n40 5270MHz Ant1


PSD NVNT n40 5310MHz Ant1

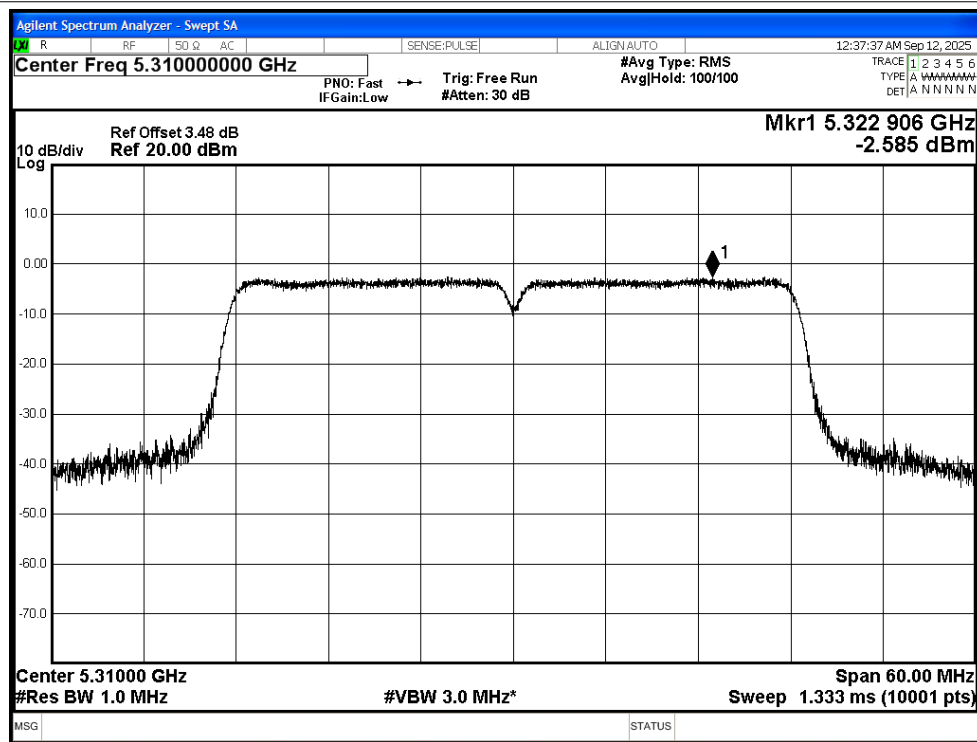


250904124FW4
PSD NVNT ac20 5260MHz Ant1


PSD NVNT ac20 5300MHz Ant1

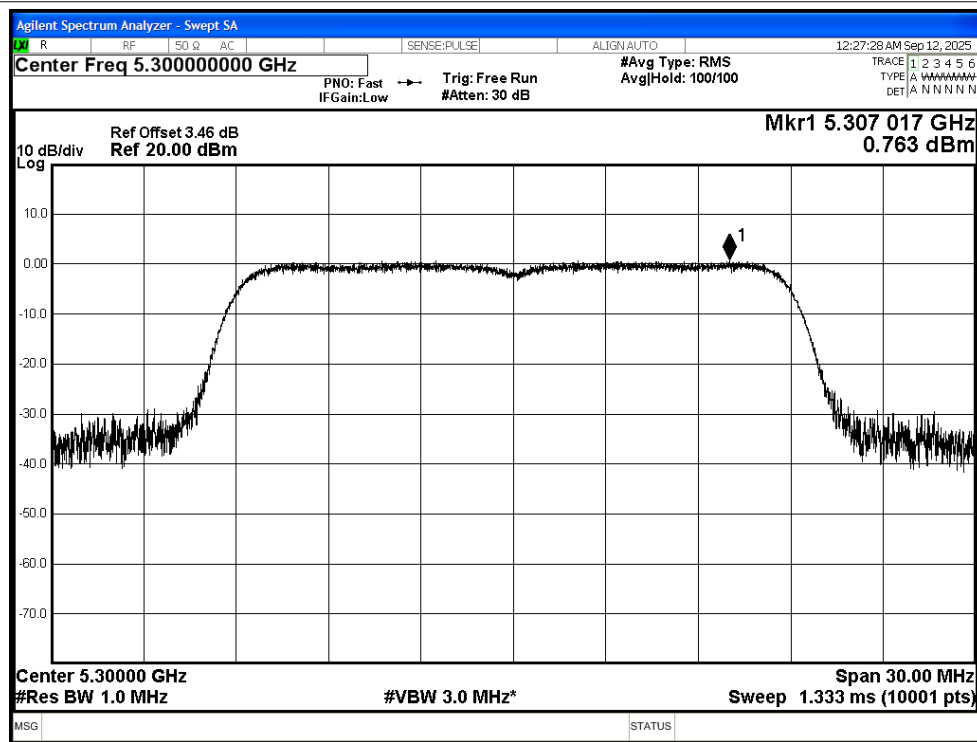



250904124FW4

PSD NVNT ac20 5320MHz Ant1

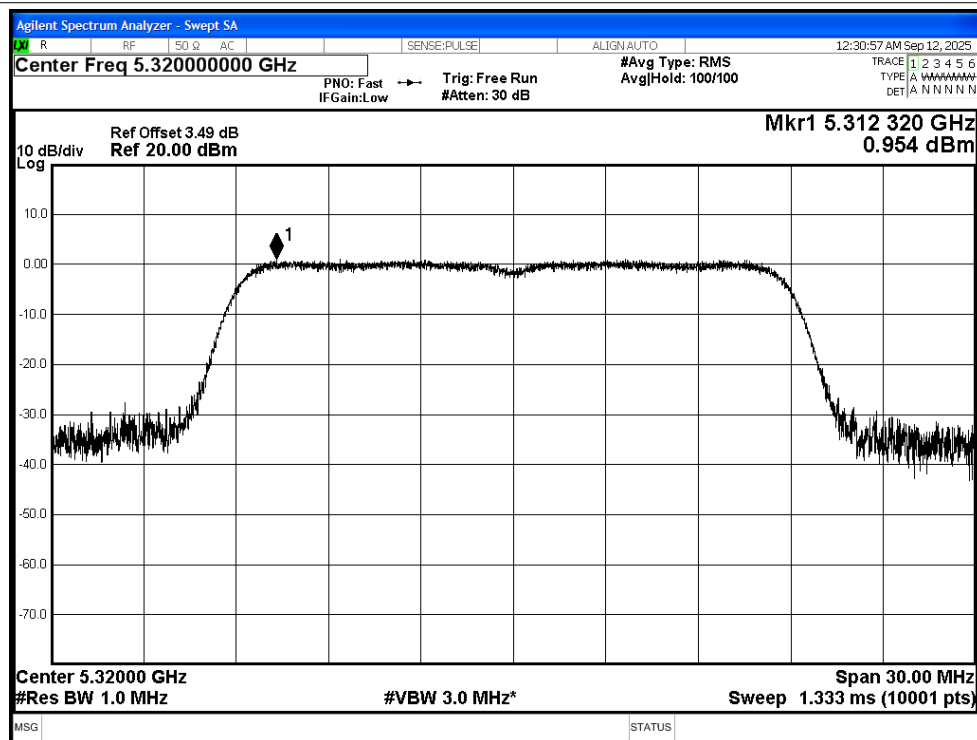



PSD NVNT ac40 5270MHz Ant1

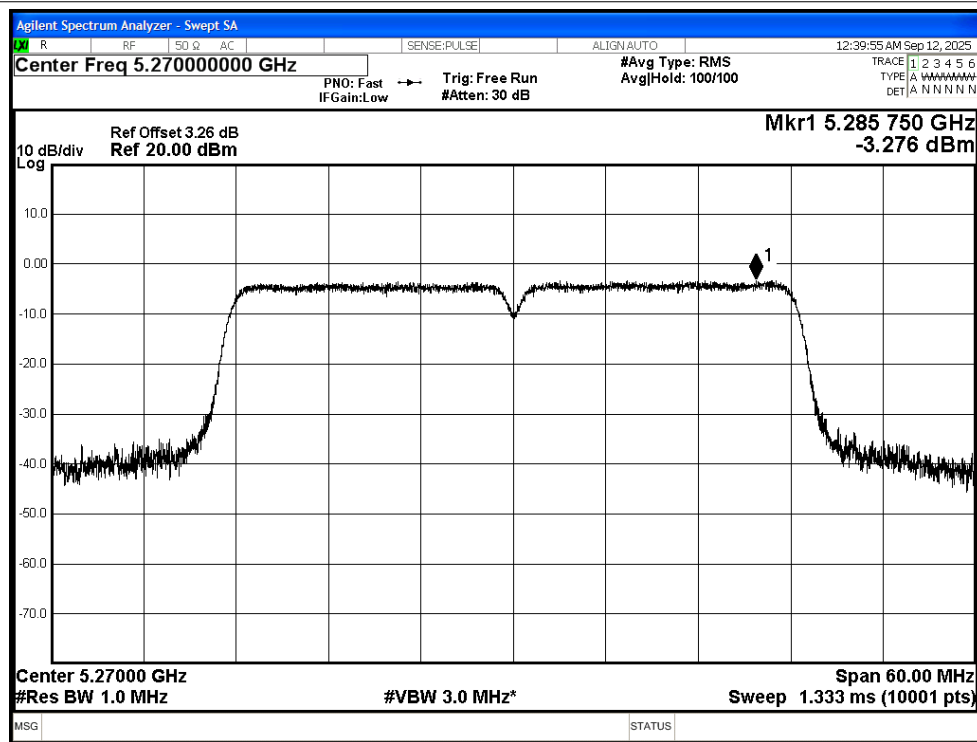

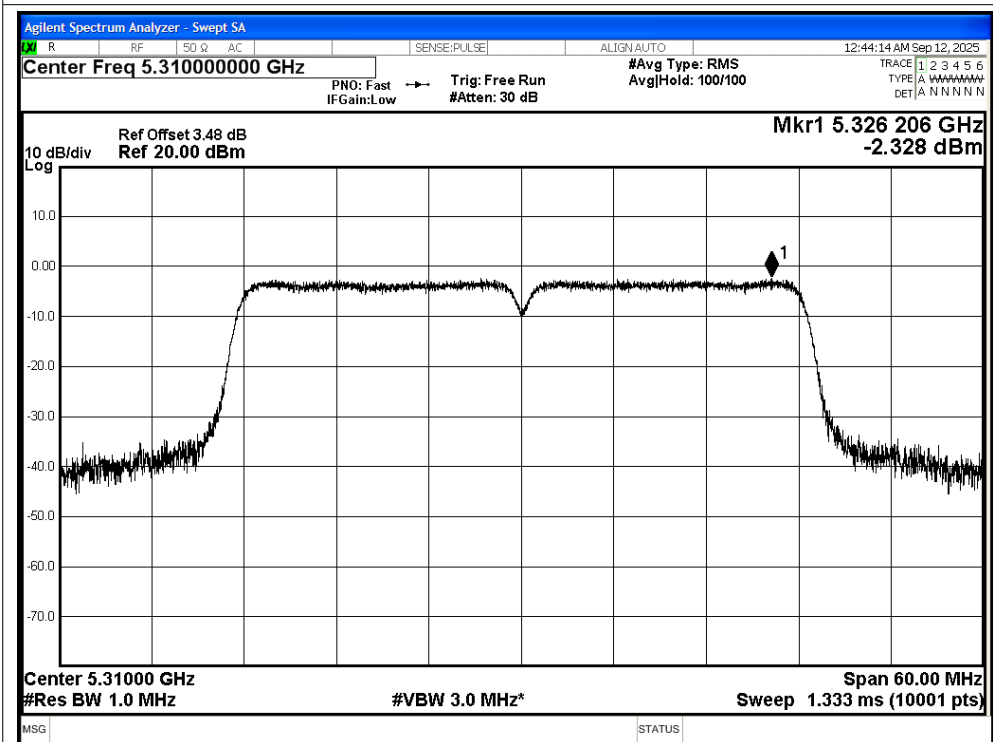
250904124FW4
PSD NVNT ac40 5310MHz Ant1


PSD NVNT ac80 5290MHz Ant1

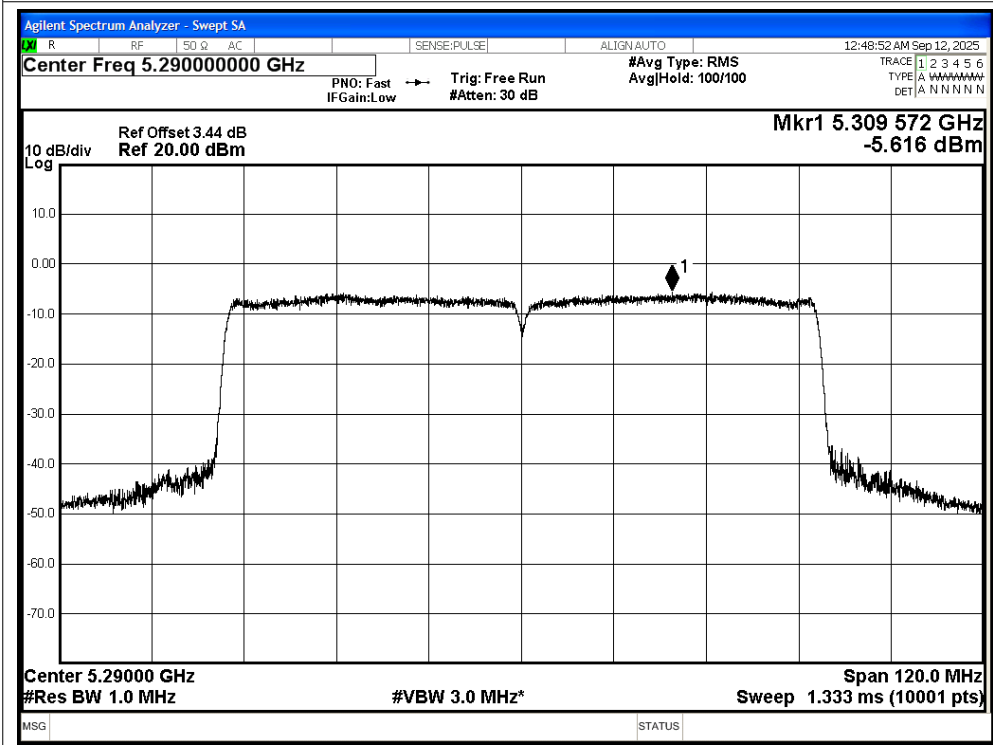

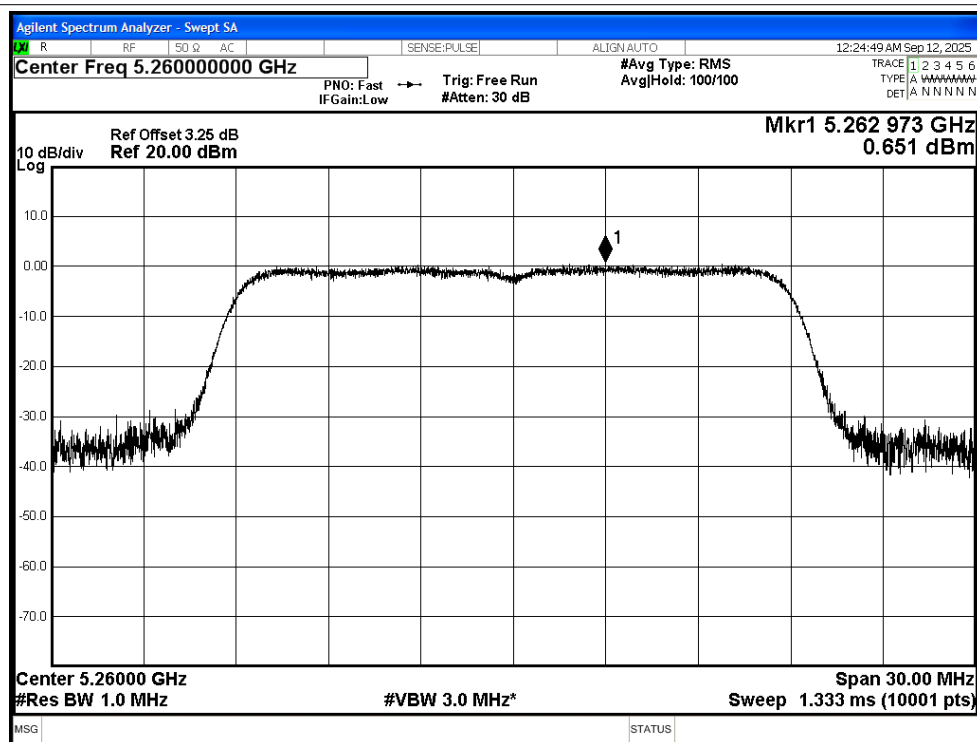
250904124FW4
PSD NVNT ax20 5260MHz Ant1


PSD NVNT ax20 5300MHz Ant1

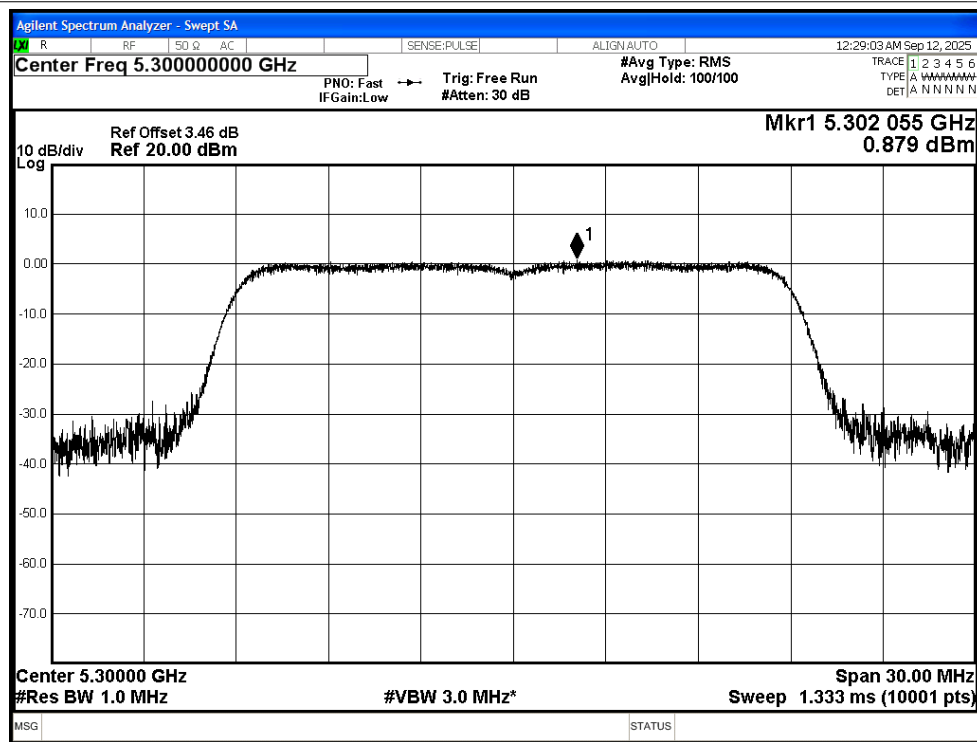



250904124FW4

PSD NVNT ax20 5320MHz Ant1

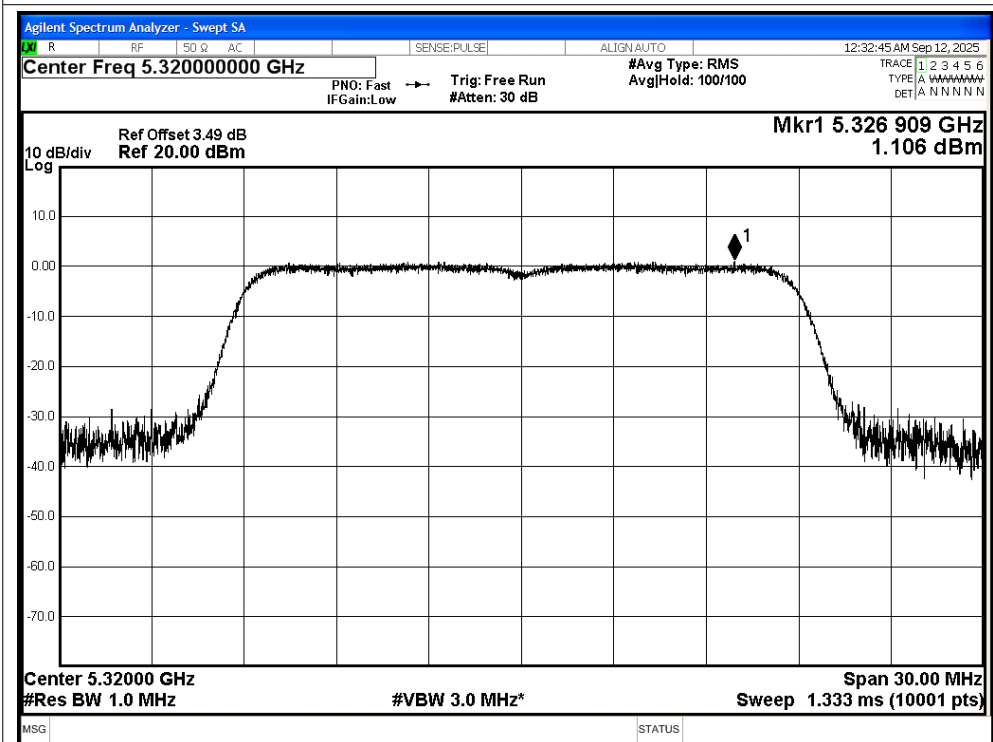


PSD NVNT ax40 5270MHz Ant1

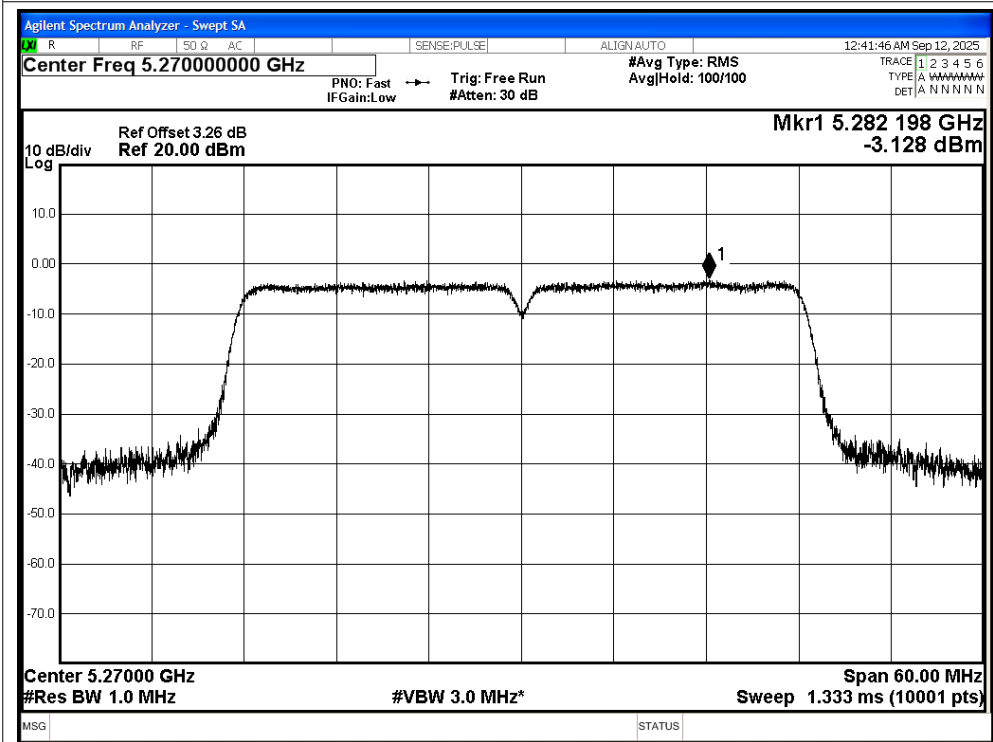

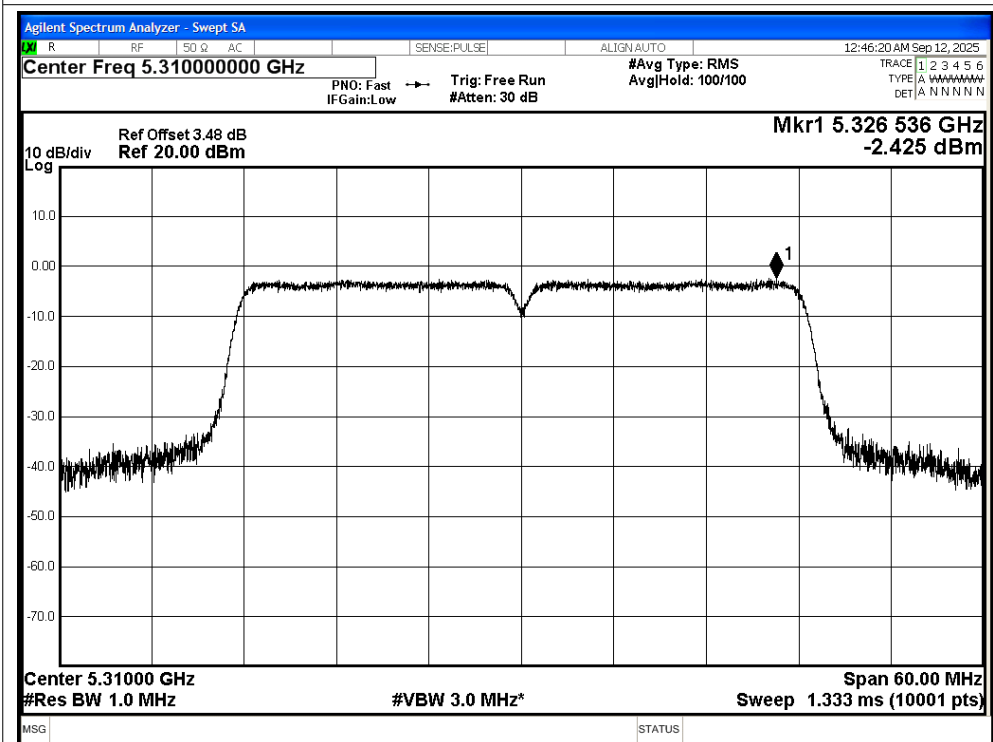250904124FW4
PSD NVNT ax40 5310MHz Ant1


PSD NVNT ax80 5290MHz Ant1

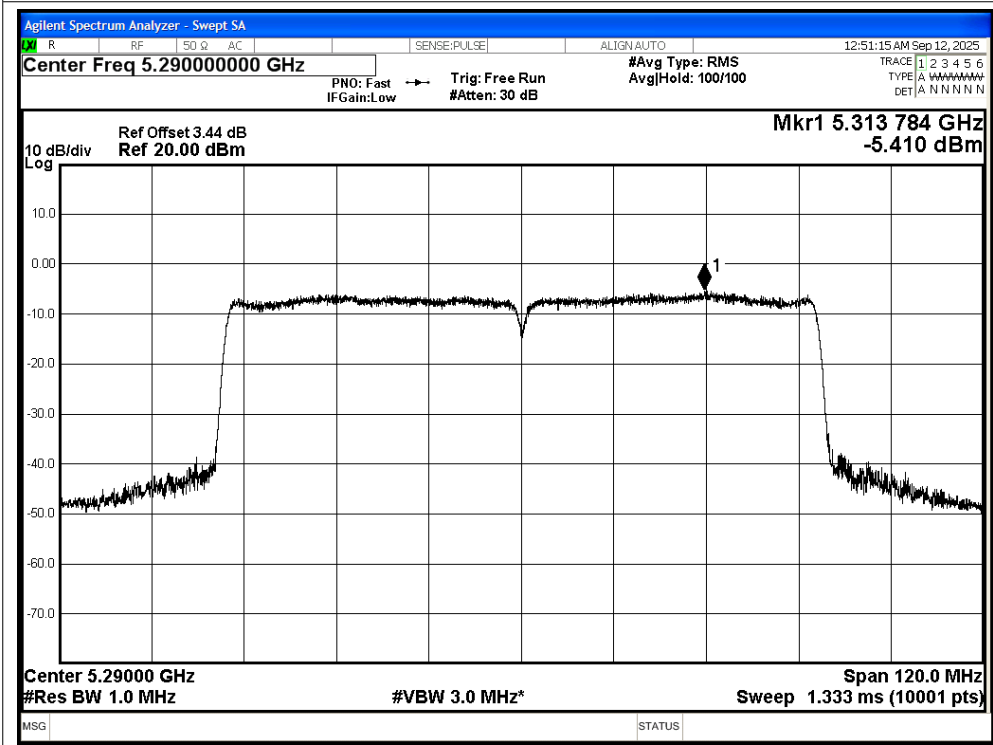

E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-50.37	2	-	46.86	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-58.38	2	0.24	39.09	Average	54	Pass
NVNT	a	5260	Ant1	4775.34	-46.25	2	-	50.98	Peak	68.2	Pass
NVNT	a	5260	Ant1	5074.86	-56.39	2	0.24	41.08	Average	54	Pass
NVNT	a	5260	Ant1	5150	-50.24	2	-	46.99	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-57.92	2	0.24	39.55	Average	54	Pass
NVNT	a	5320	Ant1	5350	-47.67	2	-	49.56	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-56.28	2	0.24	41.19	Average	54	Pass
NVNT	a	5320	Ant1	5350.2	-45.46	2	-	51.77	Peak	68.2	Pass
NVNT	a	5320	Ant1	5351.6	-56.26	2	0.24	41.21	Average	54	Pass
NVNT	a	5320	Ant1	5460	-51.02	2	-	46.21	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.87	2	0.24	39.60	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-50.8	2	-	46.43	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-59.23	2	0.12	38.12	Average	54	Pass
NVNT	n20	5260	Ant1	4929	-46.17	2	-	51.06	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5056.14	-56.46	2	0.12	40.89	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-48.51	2	-	48.72	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-56.95	2	0.12	40.40	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-43.52	2	-	53.71	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-56.63	2	0.12	40.72	Average	54	Pass
NVNT	n20	5320	Ant1	5352.2	-43.15	2	-	54.08	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5352.8	-55.41	2	0.12	41.94	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-49.8	2	-	47.43	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-57.78	2	0.12	39.57	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-50.18	2	-	47.05	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-58.62	2	0.24	38.85	Average	54	Pass
NVNT	n40	5270	Ant1	4963.32	-46.49	2	-	50.74	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5090.49	-56.6	2	0.24	40.87	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-49.43	2	-	47.80	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-57.85	2	0.24	39.62	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-44.73	2	-	52.50	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-55.65	2	0.24	41.82	Average	54	Pass
NVNT	n40	5310	Ant1	5350.4	-43.08	2	-	54.15	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350.6	-55.09	2	0.24	42.38	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-50.24	2	-	46.99	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5460	-57.36	2	0.24	40.11	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-50.14	2	-	47.09	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4500	-58.78	2	0.12	38.57	Average	54	Pass
NVNT	ac20	5260	Ant1	5021.04	-46.79	2	-	50.44	Peak	68.2	Pass




NVNT	ac20	5260	Ant1	5090.46	-56.63	2	0.12	40.72	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-49.3	2	-	47.93	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-57.41	2	0.12	39.94	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-42.9	2	-	54.33	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-55.57	2	0.12	41.78	Average	54	Pass
NVNT	ac20	5320	Ant1	5353	-42.56	2	-	54.67	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350.8	-55.41	2	0.12	41.94	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-49.87	2	-	47.36	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-57.6	2	0.12	39.75	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-50.48	2	-	46.75	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-58.69	2	0.24	38.78	Average	54	Pass
NVNT	ac40	5270	Ant1	4973.85	-46.32	2	-	50.91	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4805.37	-56.38	2	0.24	41.09	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-47.91	2	-	49.32	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-56.93	2	0.24	40.54	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-43.93	2	-	53.30	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-55.92	2	0.24	41.55	Average	54	Pass
NVNT	ac40	5310	Ant1	5350.2	-42.33	2	-	54.90	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5352	-55.18	2	0.24	42.29	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-49.46	2	-	47.77	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-57.94	2	0.24	39.53	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-51.11	2	-	46.12	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-58.67	2	0.47	39.03	Average	54	Pass
NVNT	ac80	5290	Ant1	5147.28	-44.01	2	-	53.22	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5143.8	-55.53	2	0.47	42.17	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-48.16	2	-	49.07	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-55.61	2	0.47	42.09	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-44.1	2	-	53.13	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-55.97	2	0.47	41.73	Average	54	Pass
NVNT	ac80	5290	Ant1	5350.25	-55.1	2	0.47	42.60	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-50.26	2	-	46.97	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-57.55	2	0.47	40.15	Average	54	Pass
NVNT	ax20	5260	Ant1	4500	-50.84	2	-	46.39	Peak	68.2	Pass
NVNT	ax20	5260	Ant1	4500	-58.38	2	0.12	38.97	Average	54	Pass
NVNT	ax20	5260	Ant1	5114.64	-46.71	2	-	50.52	Peak	68.2	Pass
NVNT	ax20	5260	Ant1	5044.44	-56.65	2	0.12	40.70	Average	54	Pass
NVNT	ax20	5260	Ant1	5150	-47.95	2	-	49.28	Peak	68.2	Pass
NVNT	ax20	5260	Ant1	5150	-57.35	2	0.12	40.00	Average	54	Pass
NVNT	ax20	5320	Ant1	5350	-46.39	2	-	50.84	Peak	68.2	Pass
NVNT	ax20	5320	Ant1	5350	-55.84	2	0.12	41.51	Average	54	Pass
NVNT	ax20	5320	Ant1	5350.4	-42.36	2	-	54.87	Peak	68.2	Pass
NVNT	ax20	5320	Ant1	5350.4	-55.22	2	0.12	42.13	Average	54	Pass
NVNT	ax20	5320	Ant1	5460	-49.96	2	-	47.27	Peak	68.2	Pass
NVNT	ax20	5320	Ant1	5460	-57.4	2	0.12	39.95	Average	54	Pass




250904124FW4


NVNT	ax40	5270	Ant1	4500	-49.14	2	-	48.09	Peak	68.2	Pass
NVNT	ax40	5270	Ant1	4500	-58.8	2	0.24	38.67	Average	54	Pass
NVNT	ax40	5270	Ant1	4625.55	-46.51	2	-	50.72	Peak	68.2	Pass
NVNT	ax40	5270	Ant1	5103.45	-56.58	2	0.24	40.89	Average	54	Pass
NVNT	ax40	5270	Ant1	5150	-48.35	2	-	48.88	Peak	68.2	Pass
NVNT	ax40	5270	Ant1	5150	-57.42	2	0.24	40.05	Average	54	Pass
NVNT	ax40	5310	Ant1	5350	-45.91	2	-	51.32	Peak	68.2	Pass
NVNT	ax40	5310	Ant1	5350	-54.89	2	0.24	42.58	Average	54	Pass
NVNT	ax40	5310	Ant1	5350.4	-42.08	2	-	55.15	Peak	68.2	Pass
NVNT	ax40	5310	Ant1	5460	-49.06	2	-	48.17	Peak	68.2	Pass
NVNT	ax40	5310	Ant1	5460	-57.91	2	0.24	39.56	Average	54	Pass
NVNT	ax80	5290	Ant1	5350	-44.46	2	-	52.77	Peak	68.2	Pass
NVNT	ax80	5290	Ant1	5350	-54.93	2	0.47	42.77	Average	54	Pass
NVNT	ax80	5290	Ant1	5460	-48.35	2	-	48.88	Peak	68.2	Pass
NVNT	ax80	5290	Ant1	5460	-57.12	2	0.47	40.58	Average	54	Pass
NVNT	ax80	5290	Ant1	4500	-48.02	2	-	49.21	Peak	68.2	Pass
NVNT	ax80	5290	Ant1	4500	-58.12	2	0.47	39.58	Average	54	Pass
NVNT	ax80	5290	Ant1	5013.3	-46.01	2	-	51.22	Peak	68.2	Pass
NVNT	ax80	5290	Ant1	5149.89	-55.05	2	0.47	42.65	Average	54	Pass
NVNT	ax80	5290	Ant1	5150	-46.27	2	-	50.96	Peak	68.2	Pass
NVNT	ax80	5290	Ant1	5150	-55.05	2	0.47	42.65	Average	54	Pass


250904124FW4 Restrict Band NVNT a 5320MHz Ant1 Peak

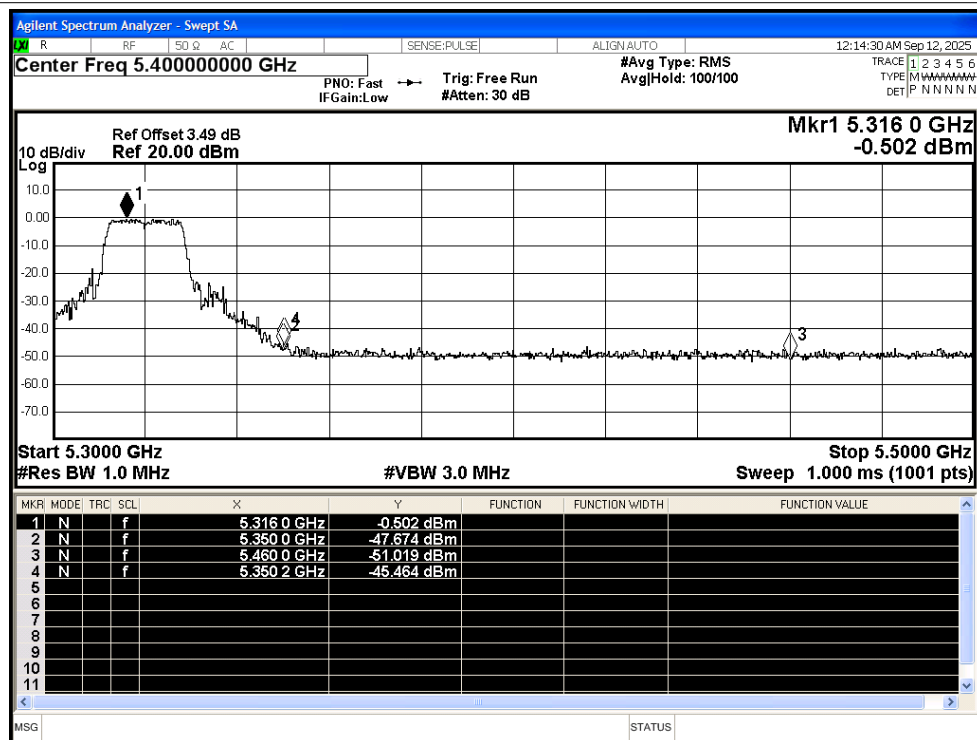



Restrict Band NVNT a 5320MHz Ant1 Average

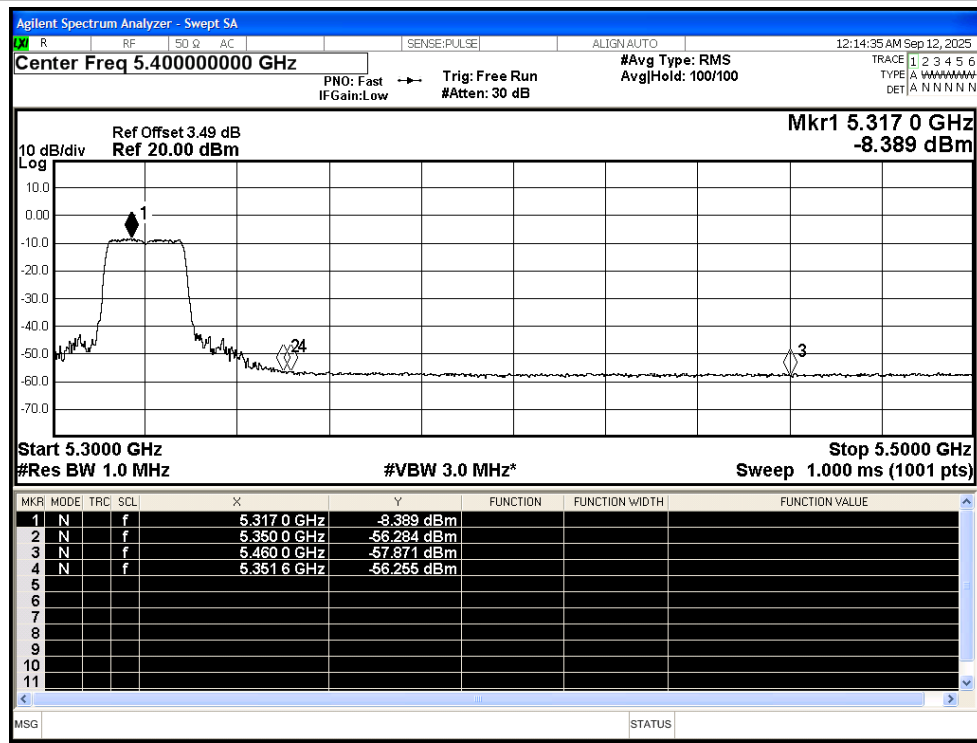


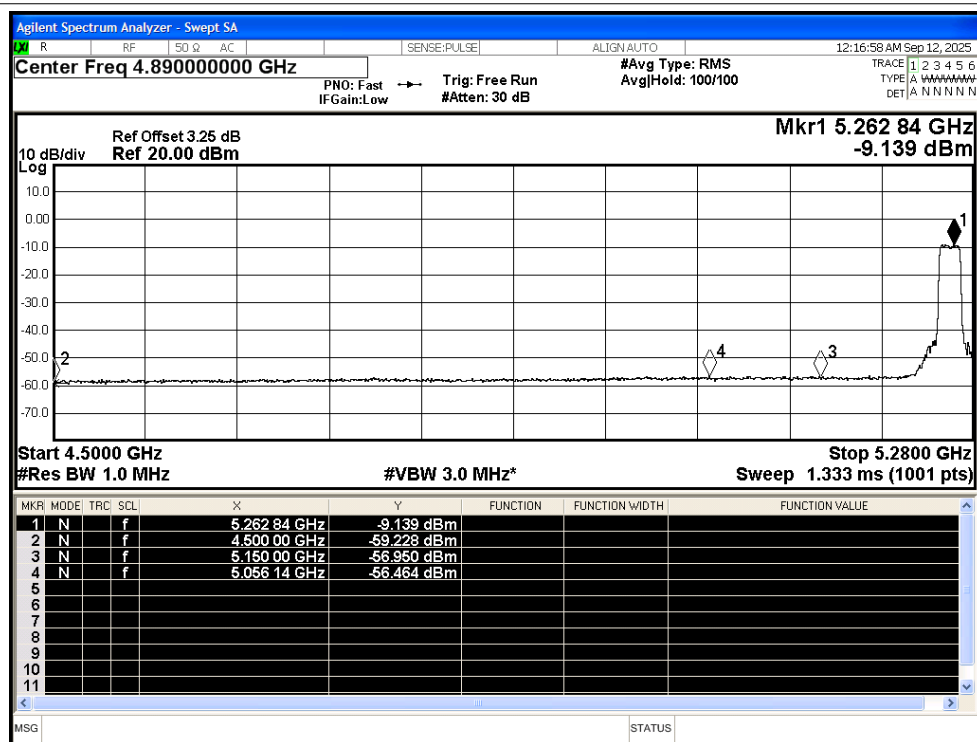

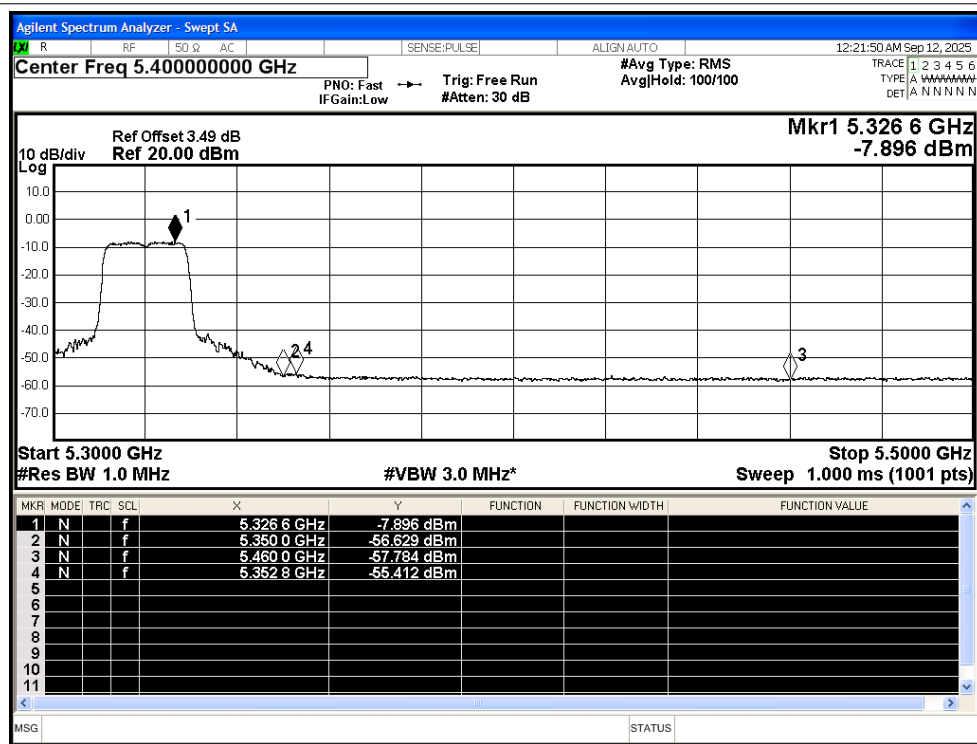


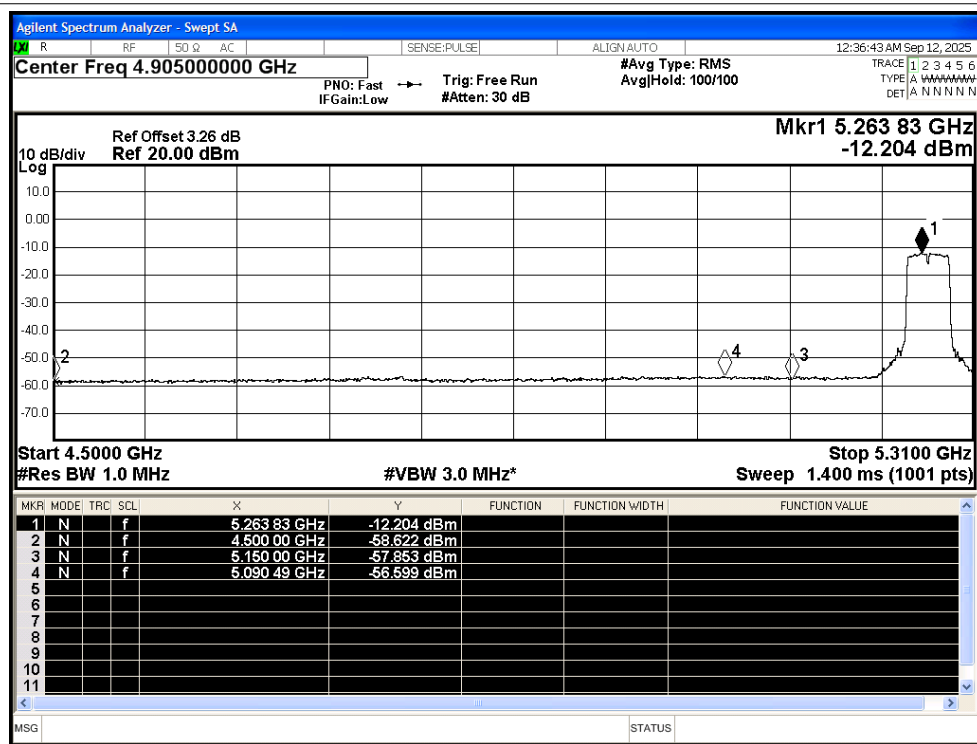

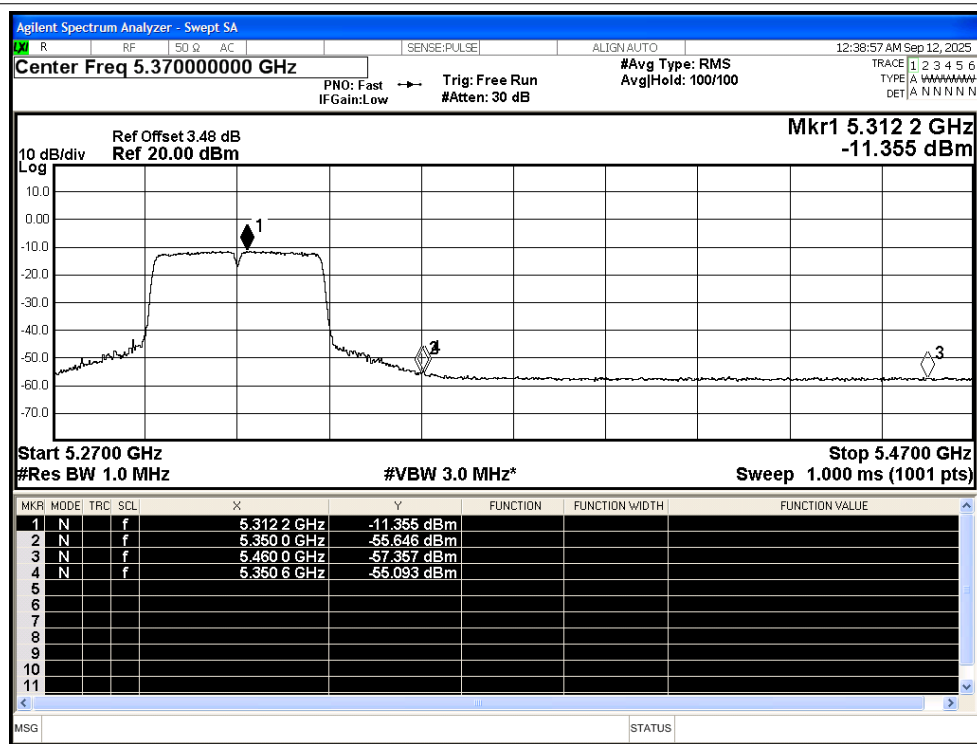


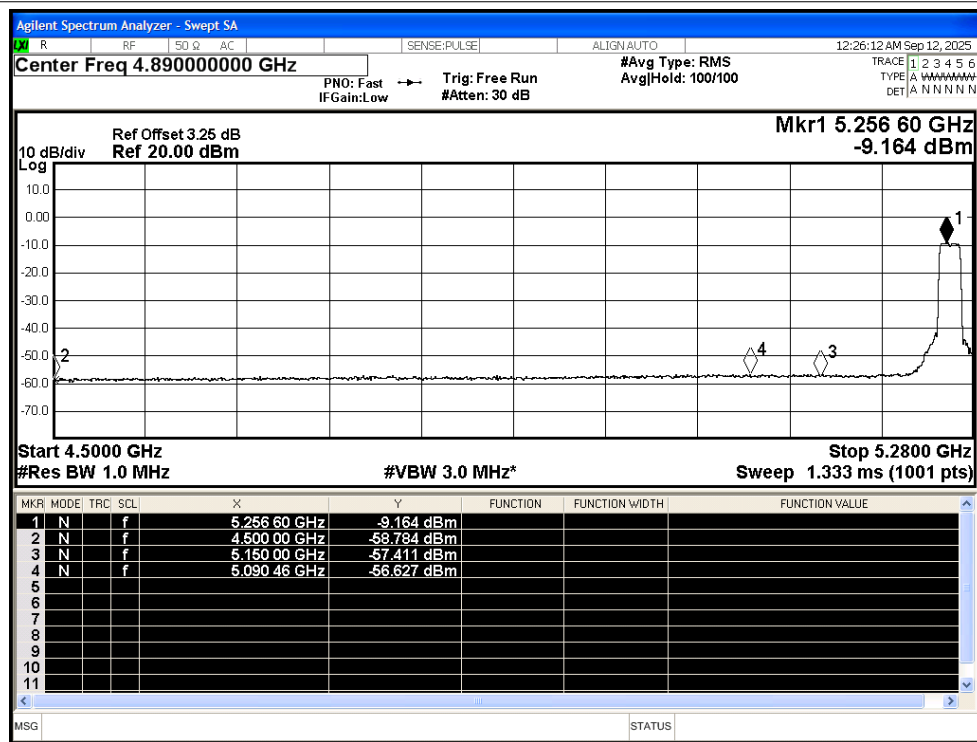


~~Restrict Band NVNT ac20 5320MHz Ant1 Peak~~

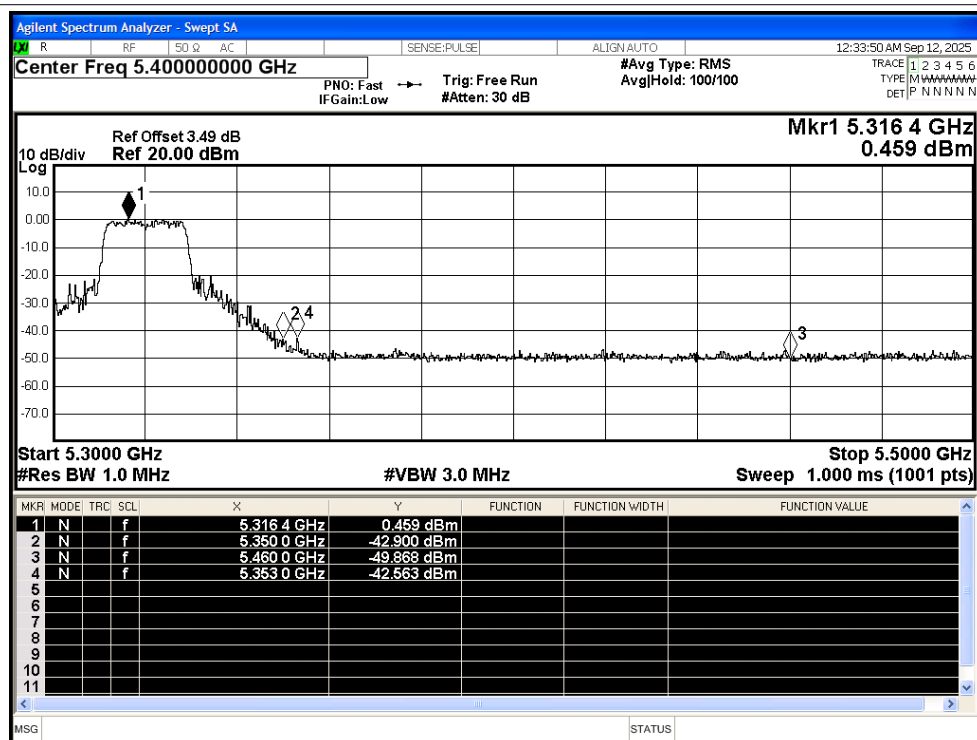


Restrict Band NVNT ac20 5320MHz Ant1 Average

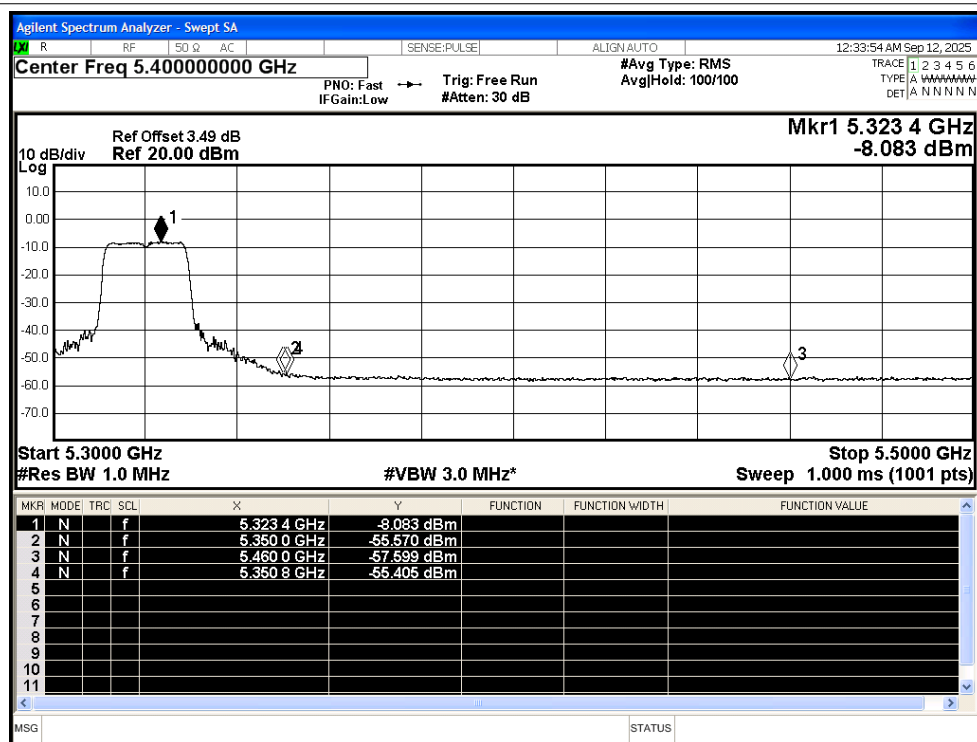


~~Restrict Band NVNT ac40 5270MHz Ant1 Peak~~

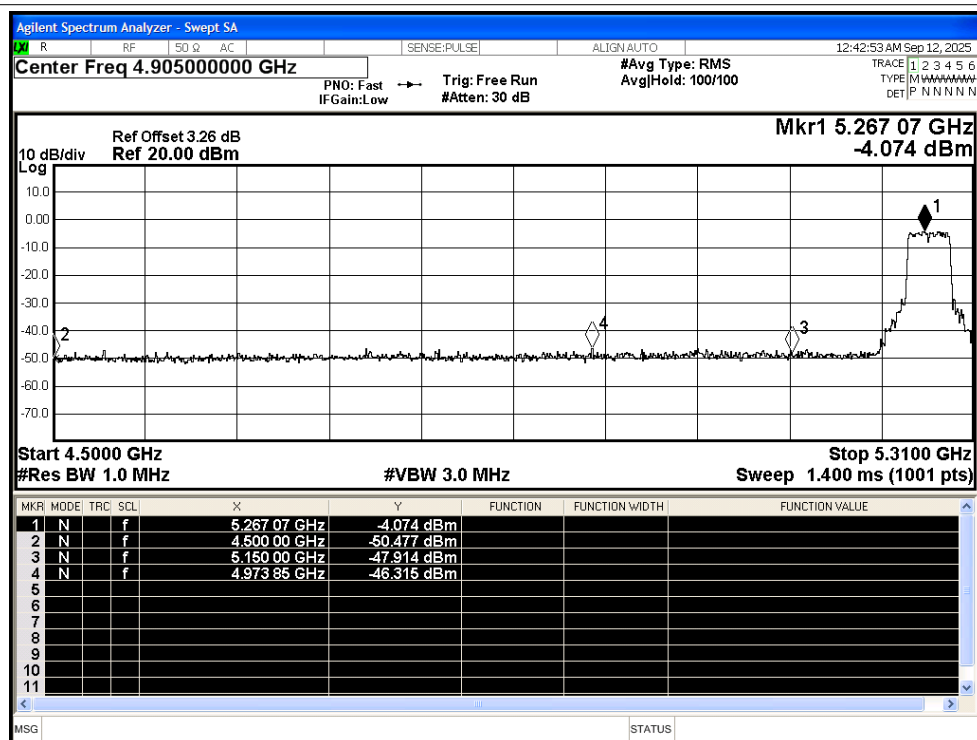


Restrict Band NVNT ac40 5270MHz Ant1 Average

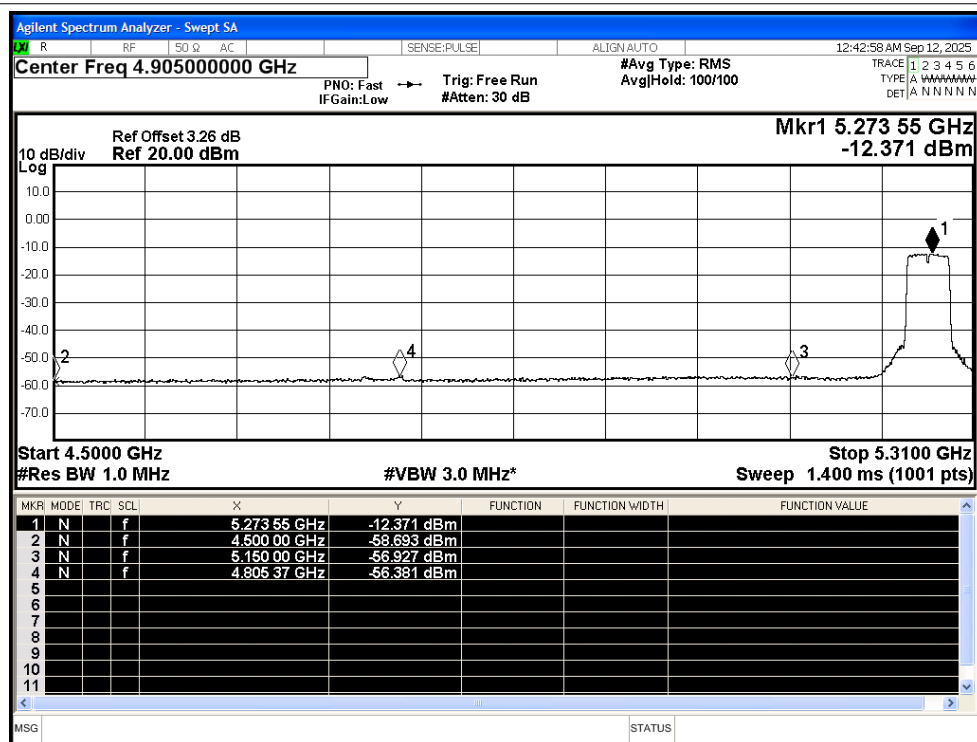


~~Restrict Band NVNT ac80 5290MHz Ant1 Peak~~

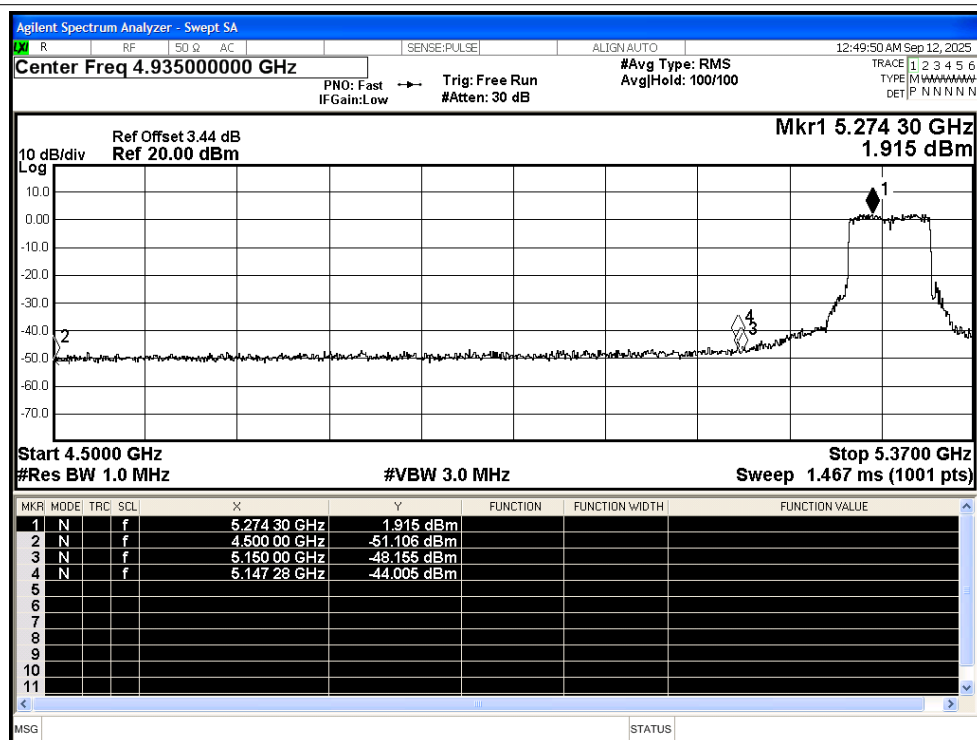


Restrict Band NVNT ac80 5290MHz Ant1 Average

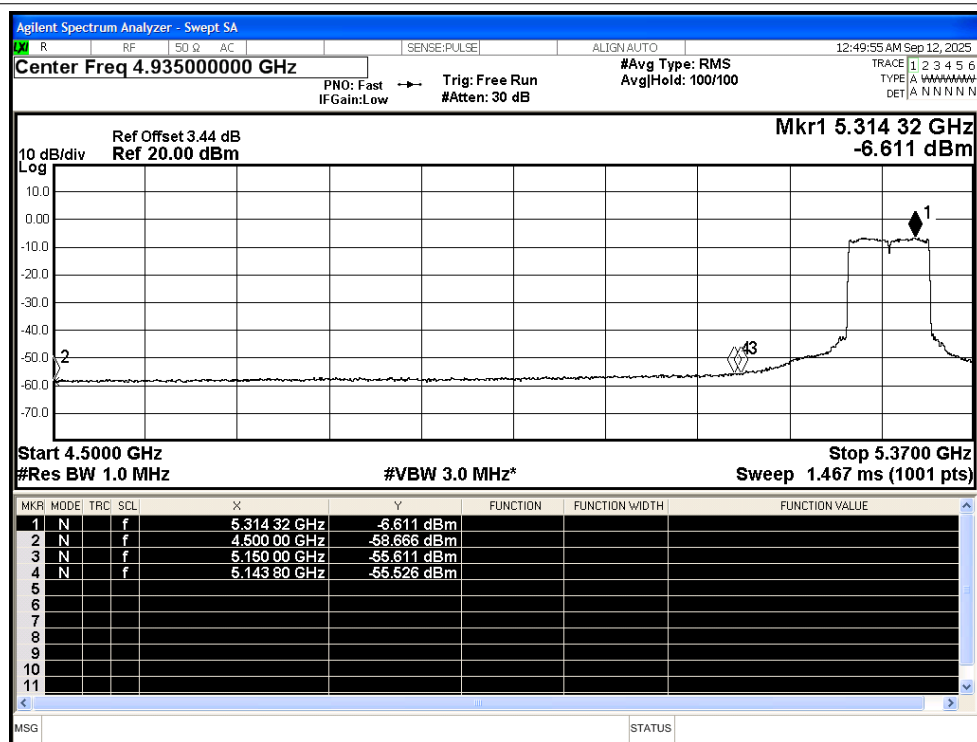


~~Restrict Band NVNT ac80 5290MHz Ant1 Peak~~

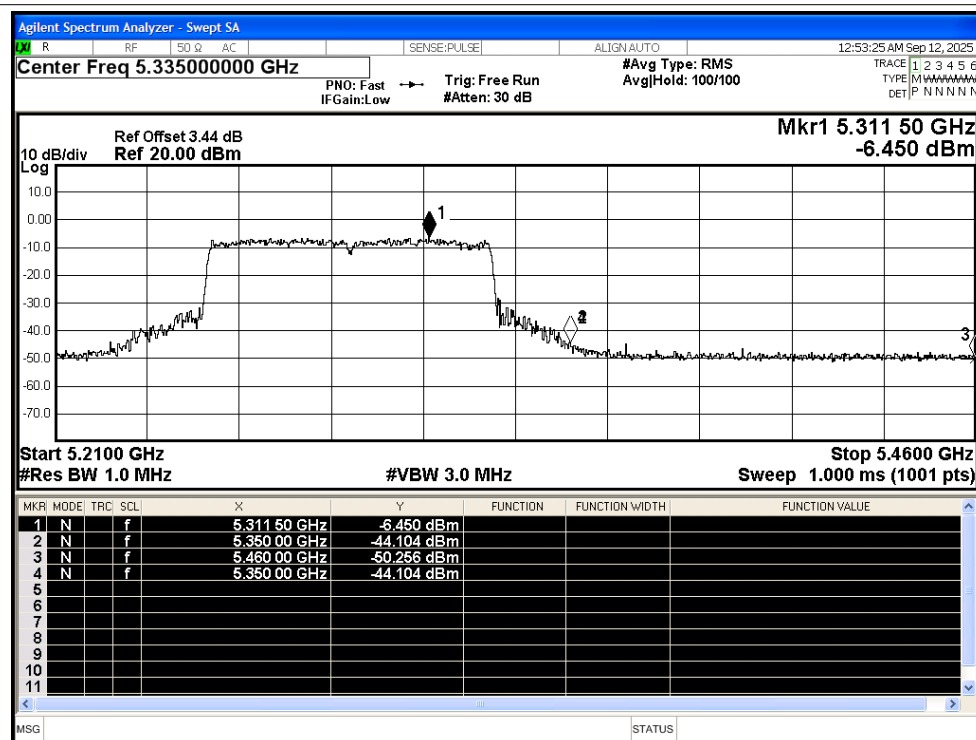


Restrict Band NVNT ac80 5290MHz Ant1 Average

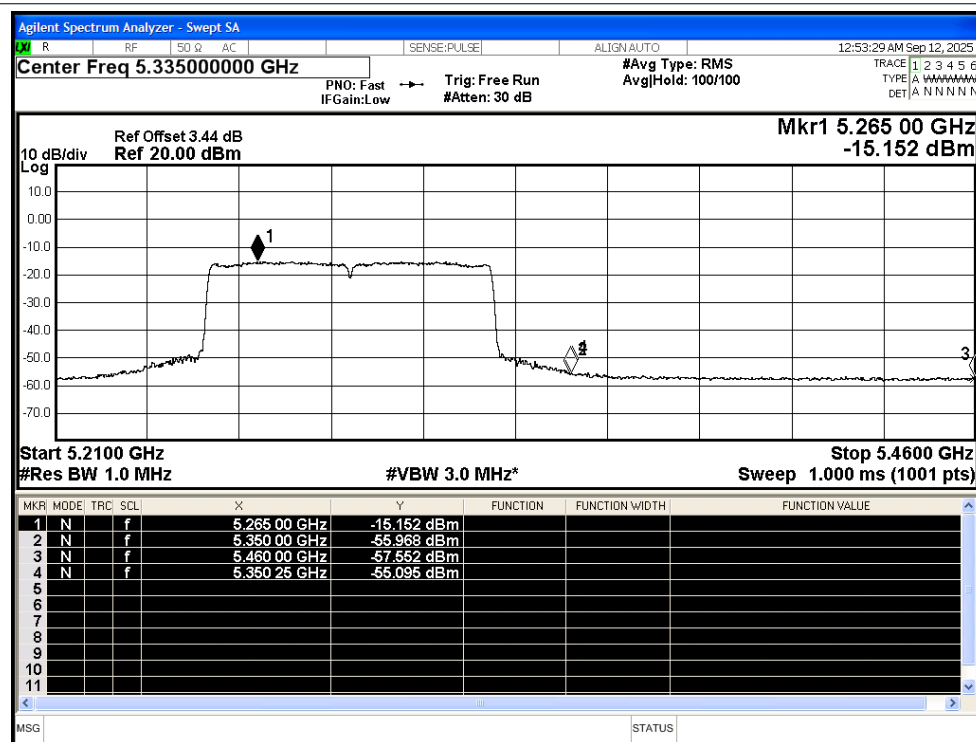


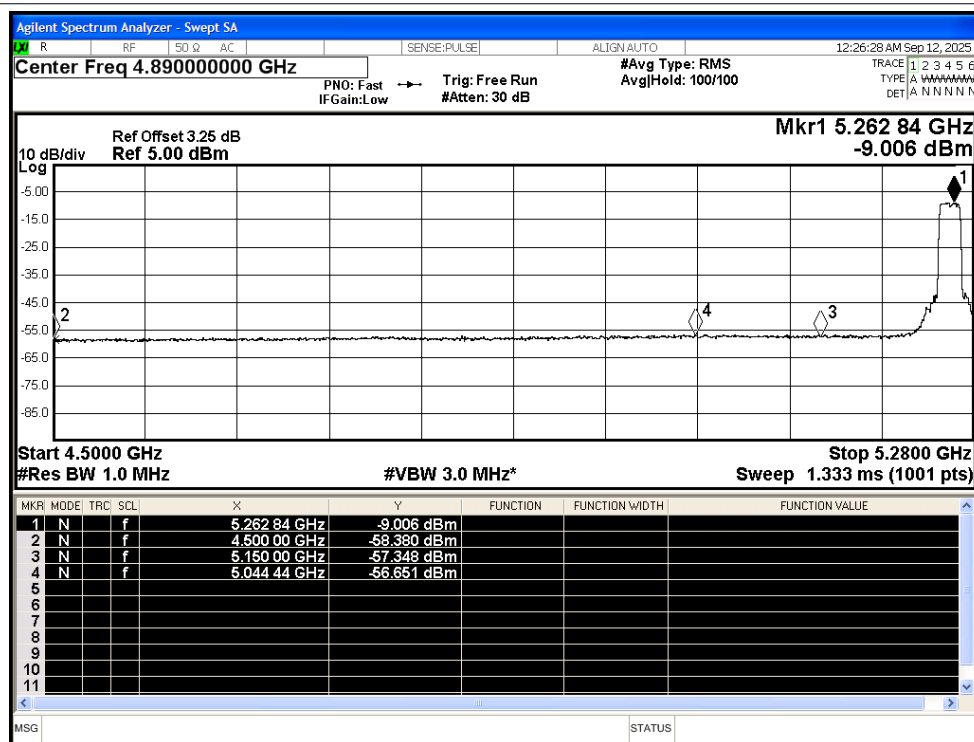


~~Restrict Band NVNT ax20 5320MHz Ant1 Peak~~

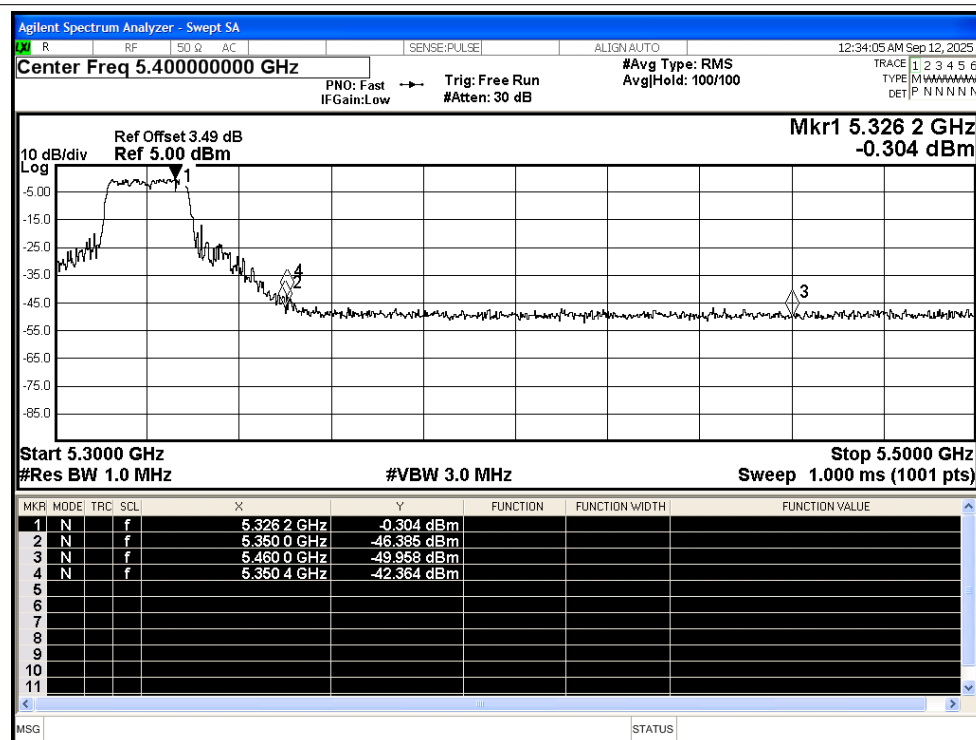



Restrict Band NVNT ax20 5320MHz Ant1 Average

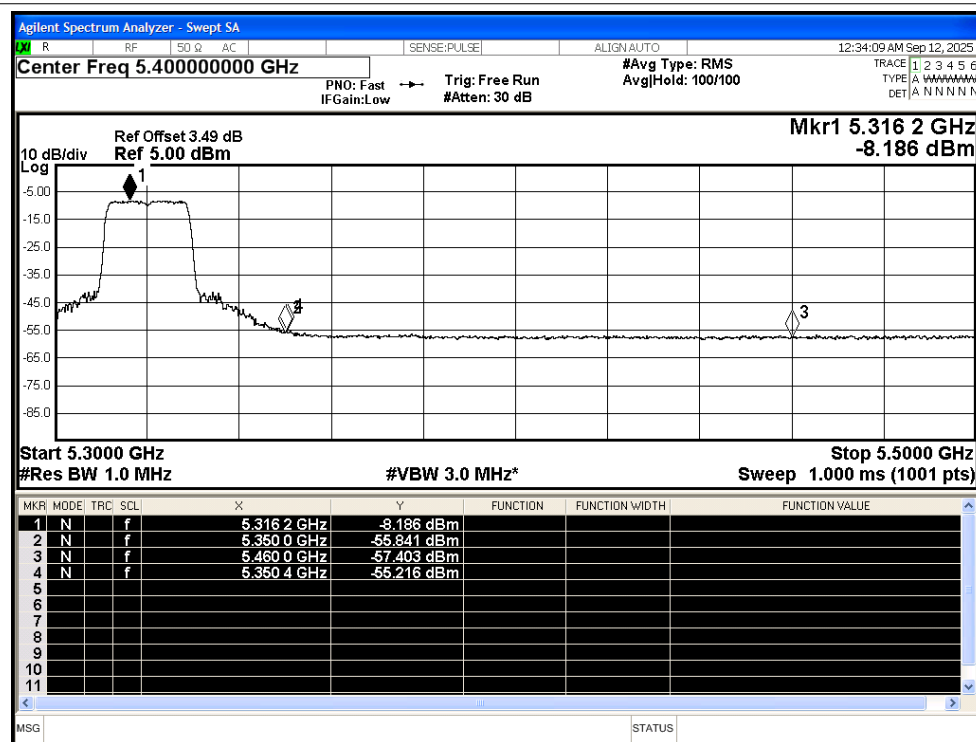


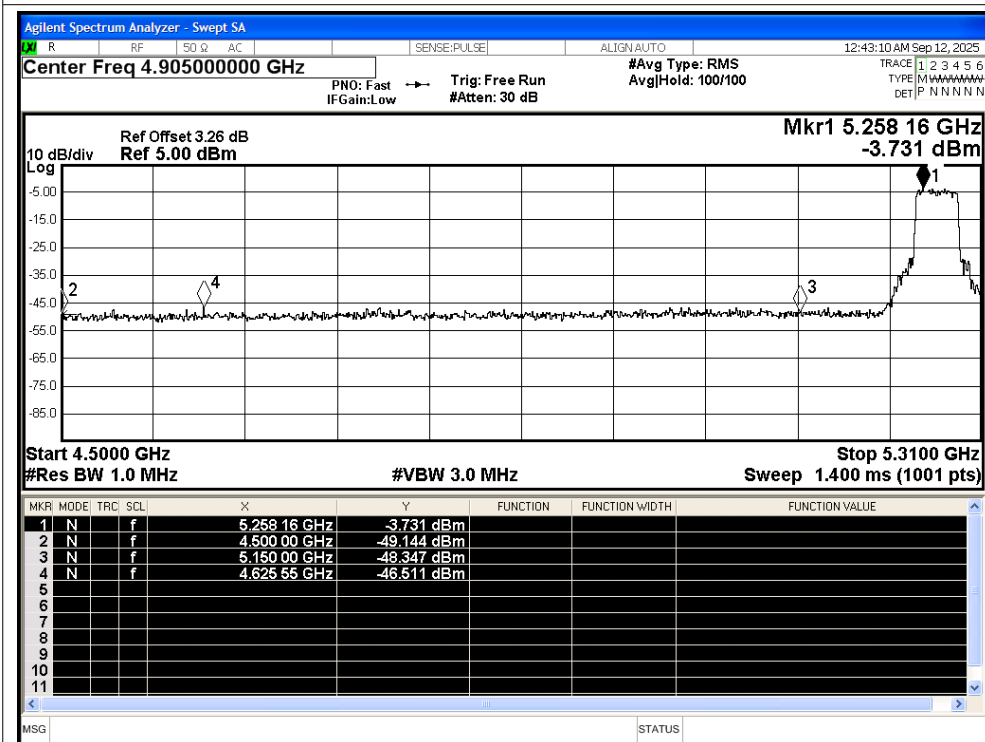
250904124FW4
Restrict Band NVNT ax40 5270MHz Ant1 Peak


Restrict Band NVNT ax40 5270MHz Ant1 Average

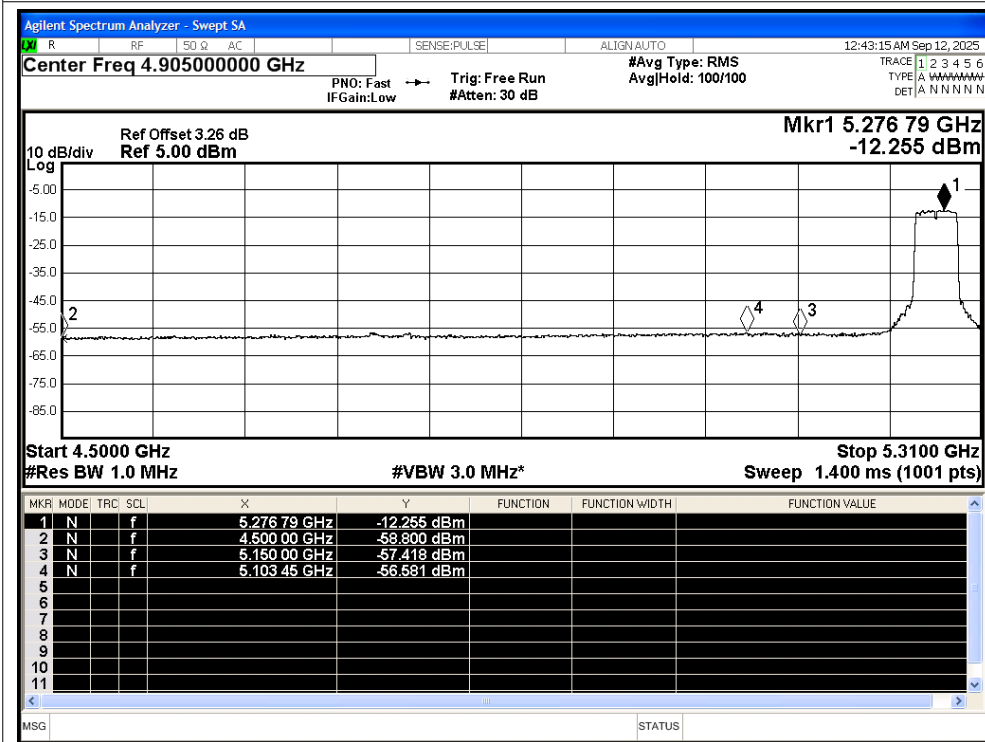

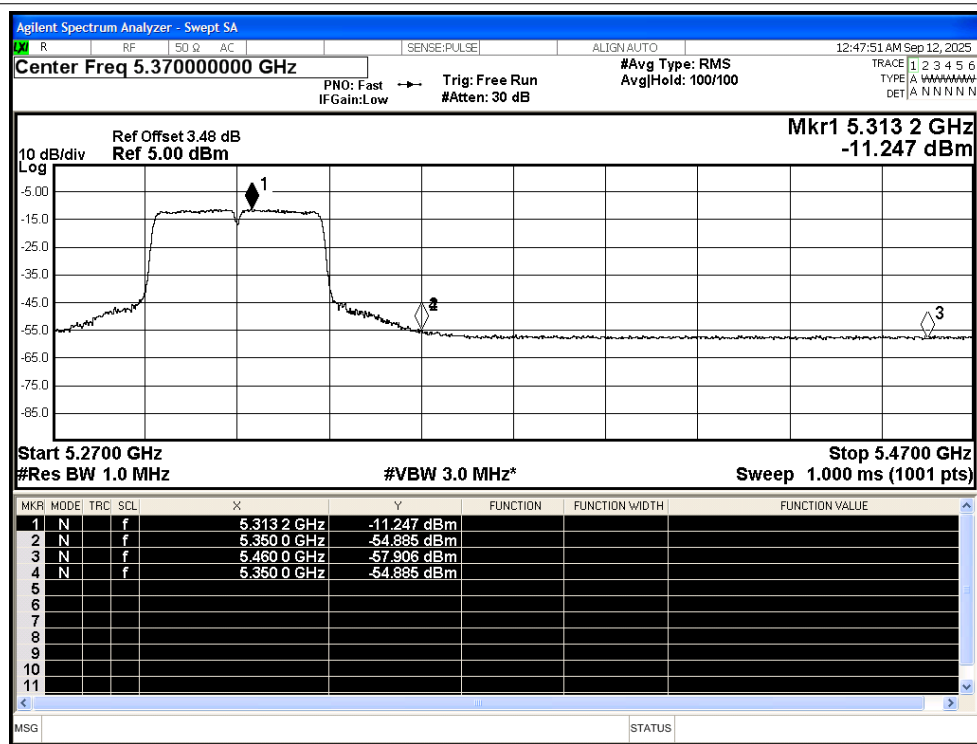

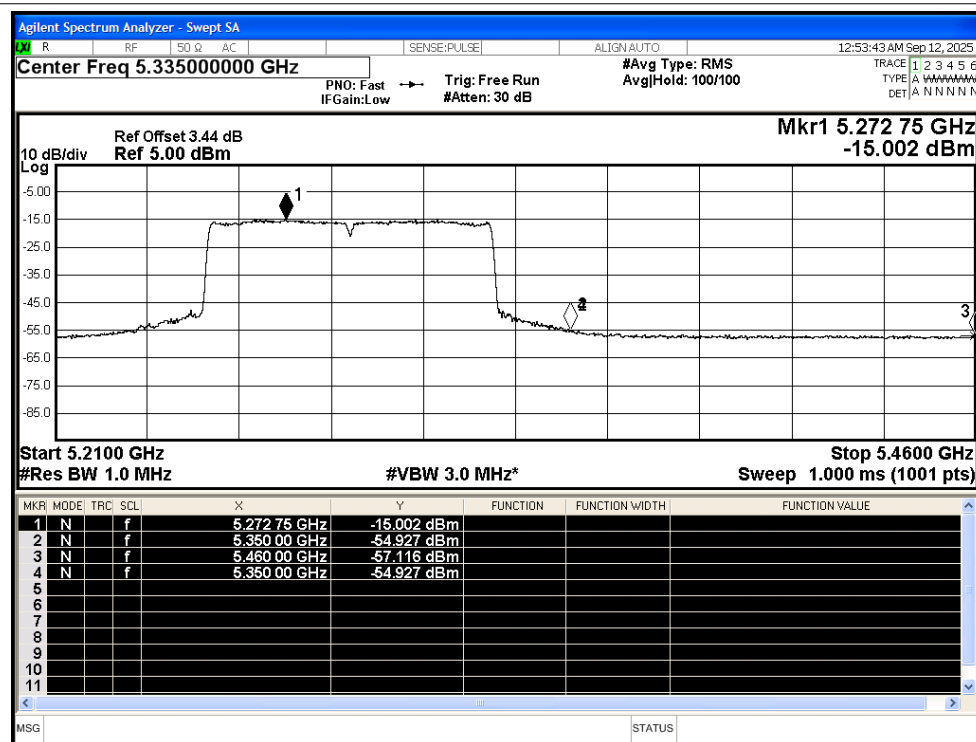


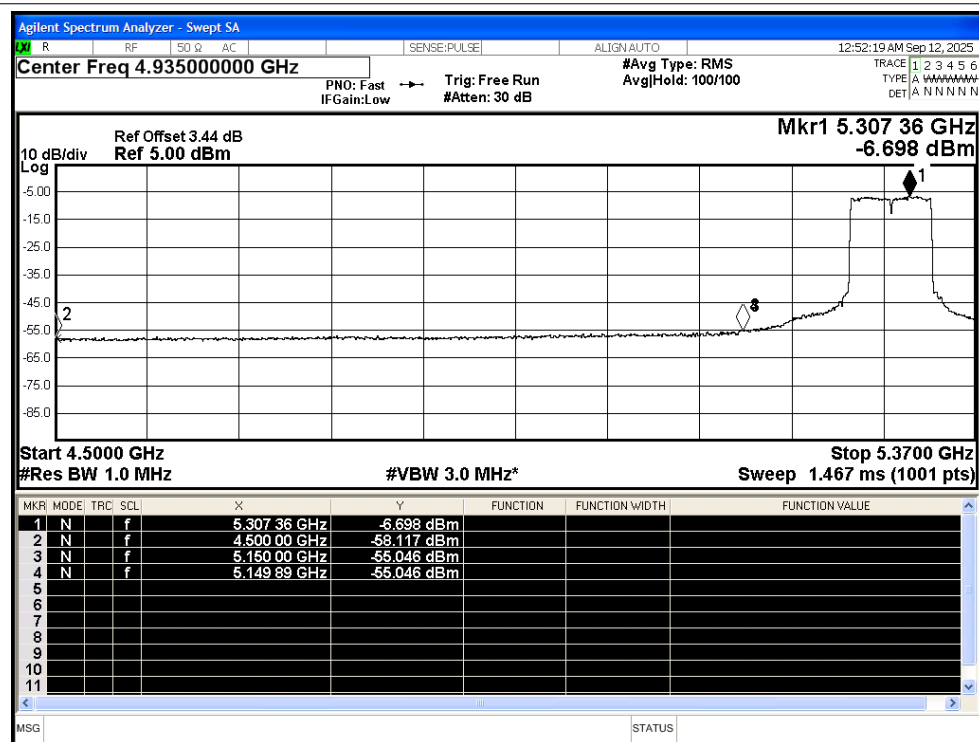


E.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	a	5300	Ant1	5300	0	0	25	Pass
NVNT	a	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n20	5260	Ant1	5260	0	0	25	Pass
NVNT	n20	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	n20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	n40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac20	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	ac20	5300	Ant1	5300	0	0	25	Pass
NVNT	ac20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant1	5270	0	0	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290	0	0	25	Pass
NVNT	ax20	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	ax20	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	ax20	5320	Ant1	5319.96	-40000	-7.52	25	Pass
NVNT	ax40	5270	Ant1	5270	0	0	25	Pass
NVNT	ax40	5310	Ant1	5310	0	0	25	Pass
NVNT	ax80	5290	Ant1	5290	0	0	25	Pass

Freq. Stability NVNT a 5260MHz Ant1

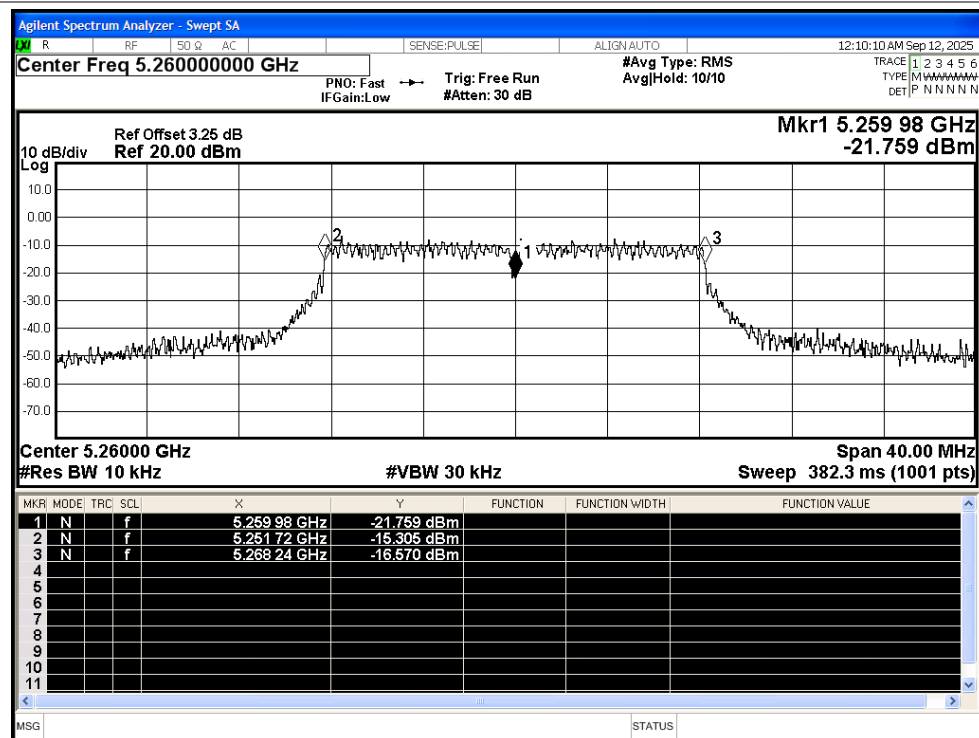



Freq. Stability NVNT a 5300MHz Ant1

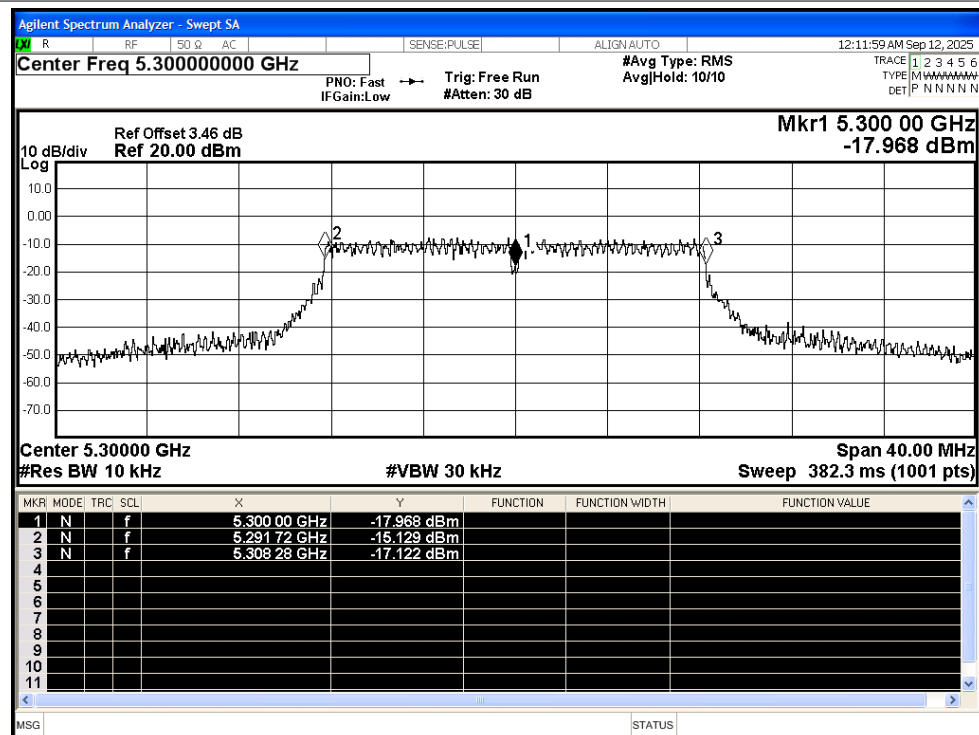


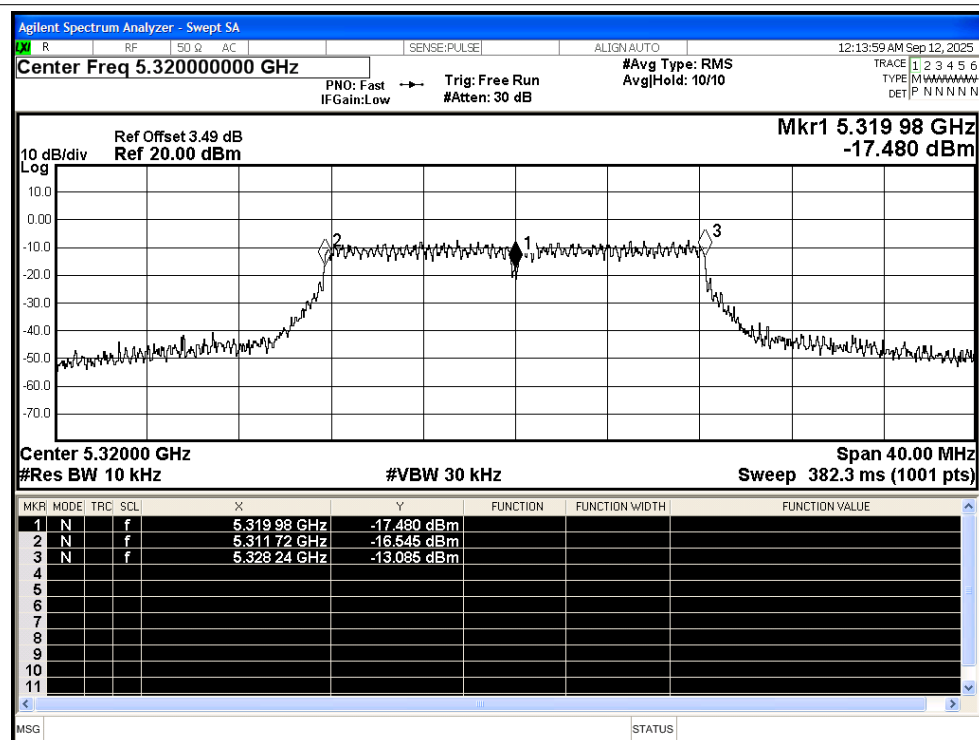



Freq. Stability NVNT n20 5260MHz Ant1

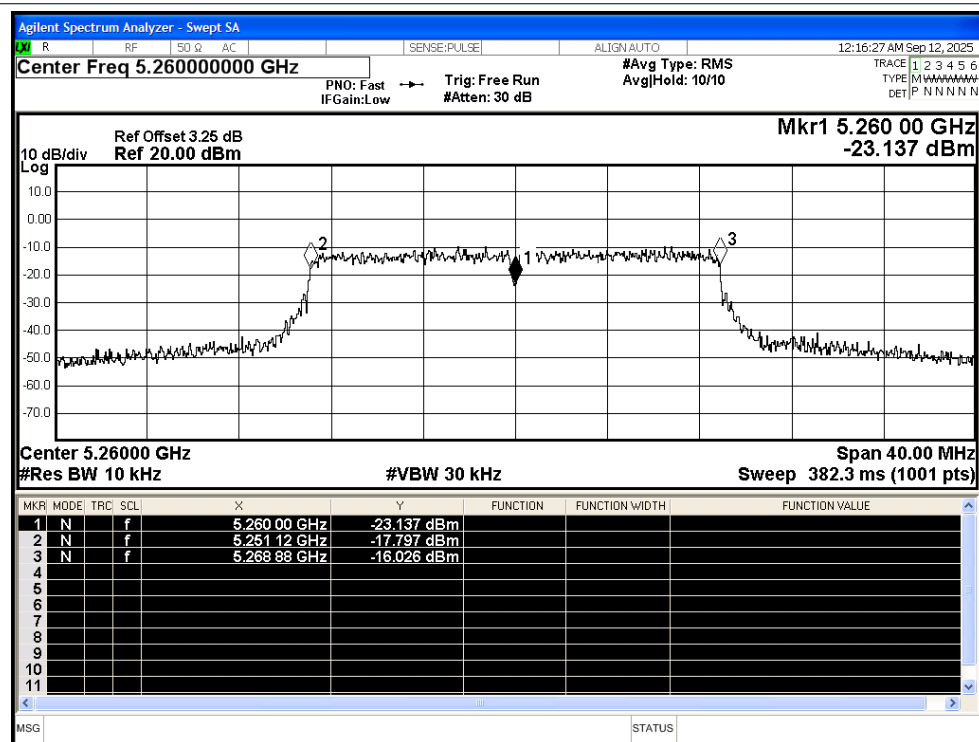

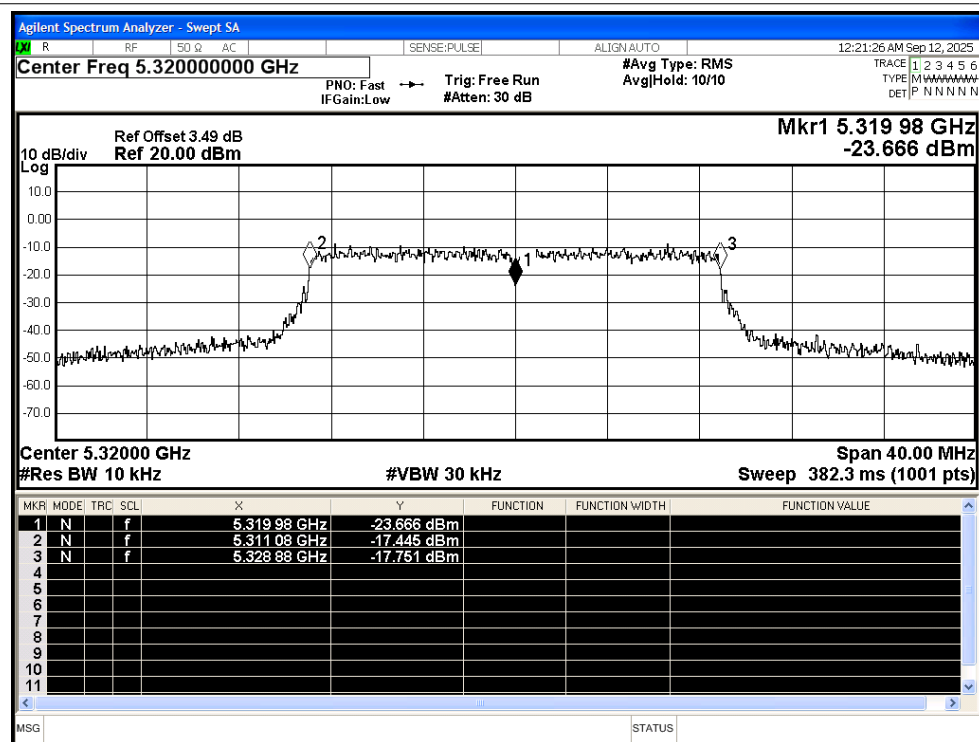


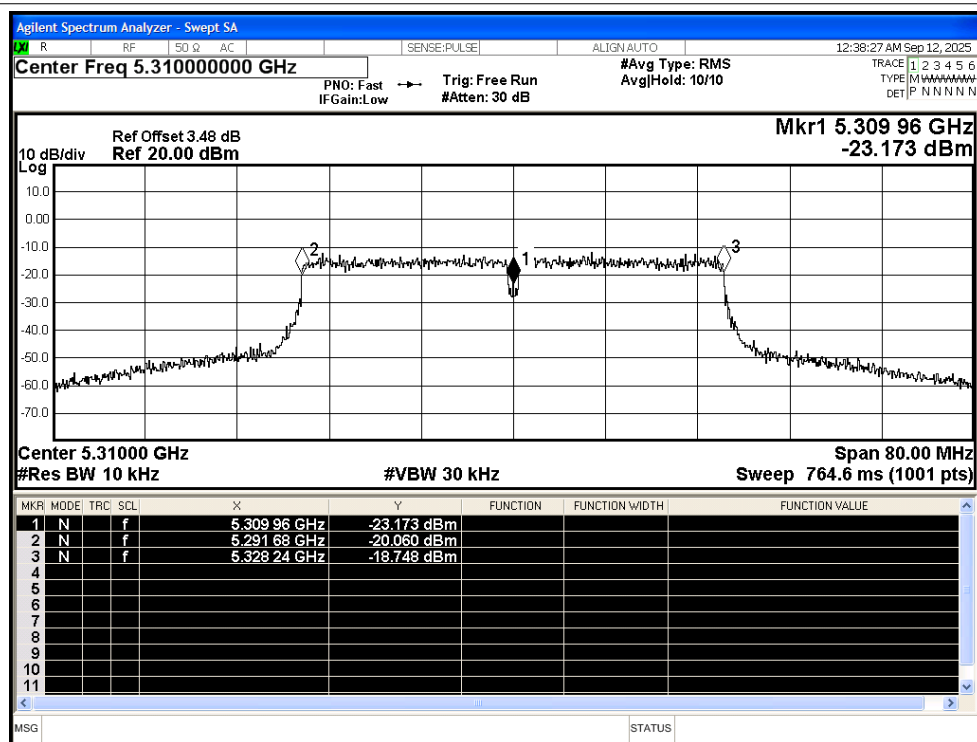


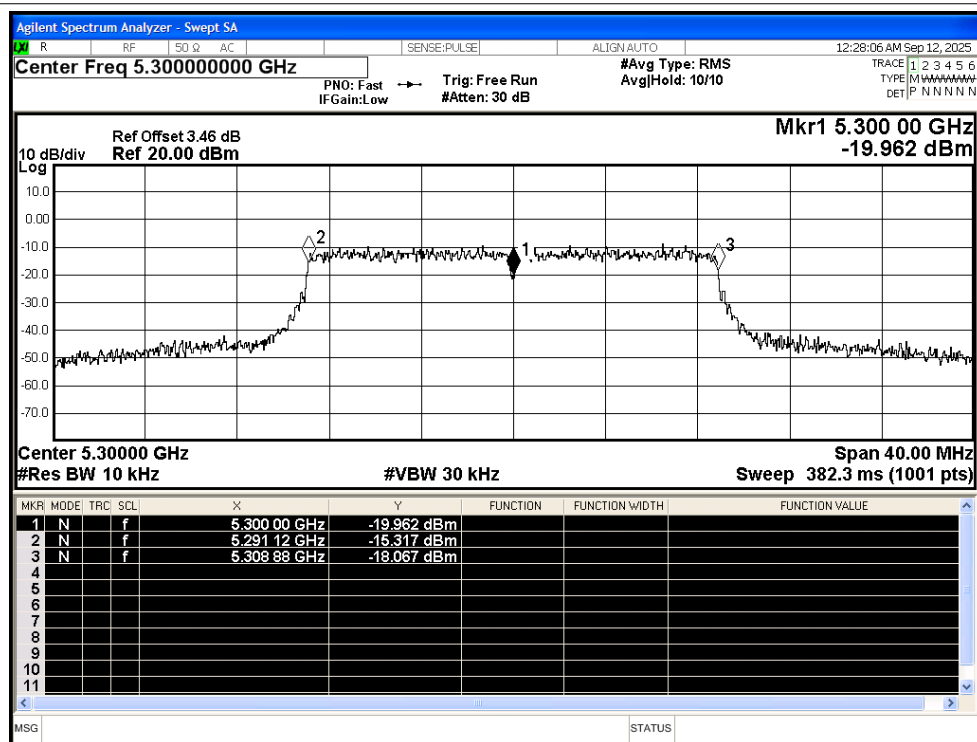

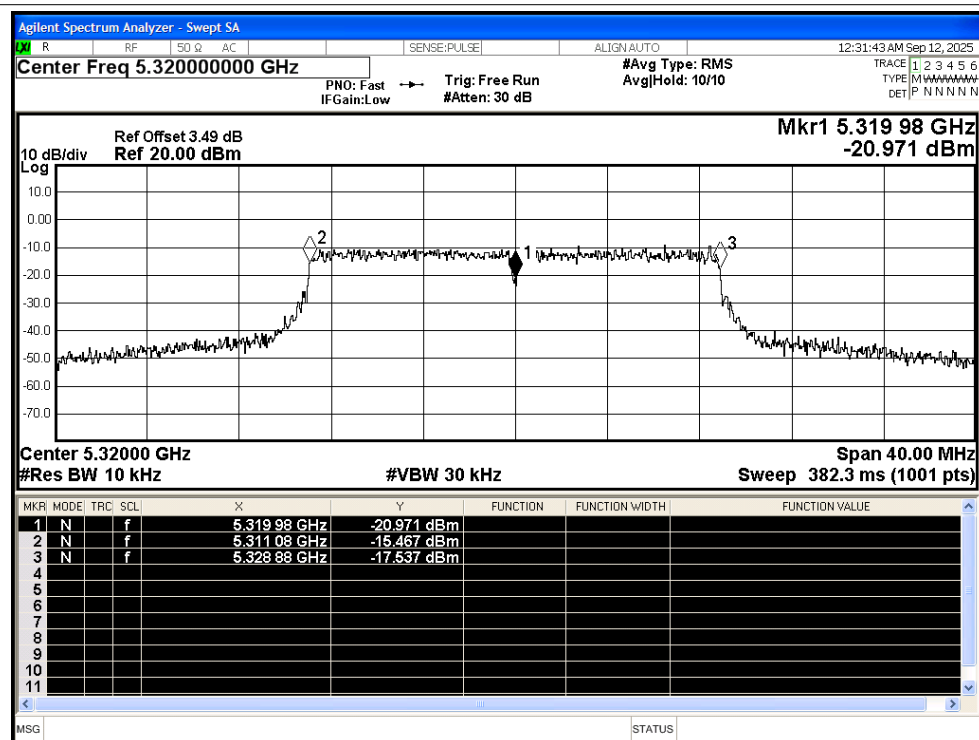



Freq. Stability NVNT ac40 5270MHz Ant1

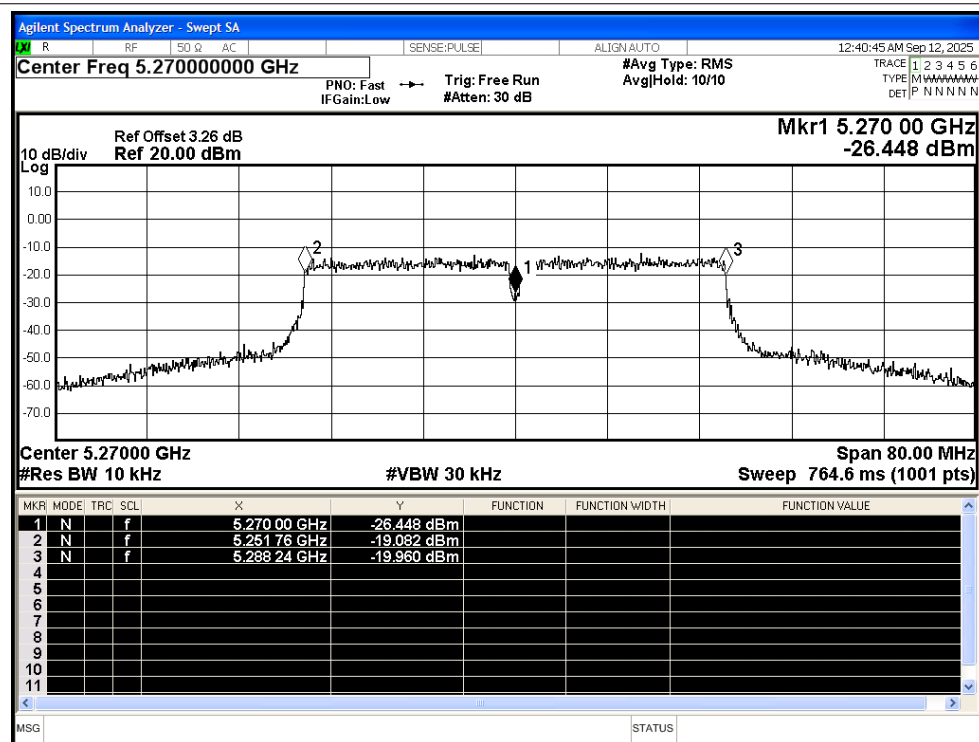

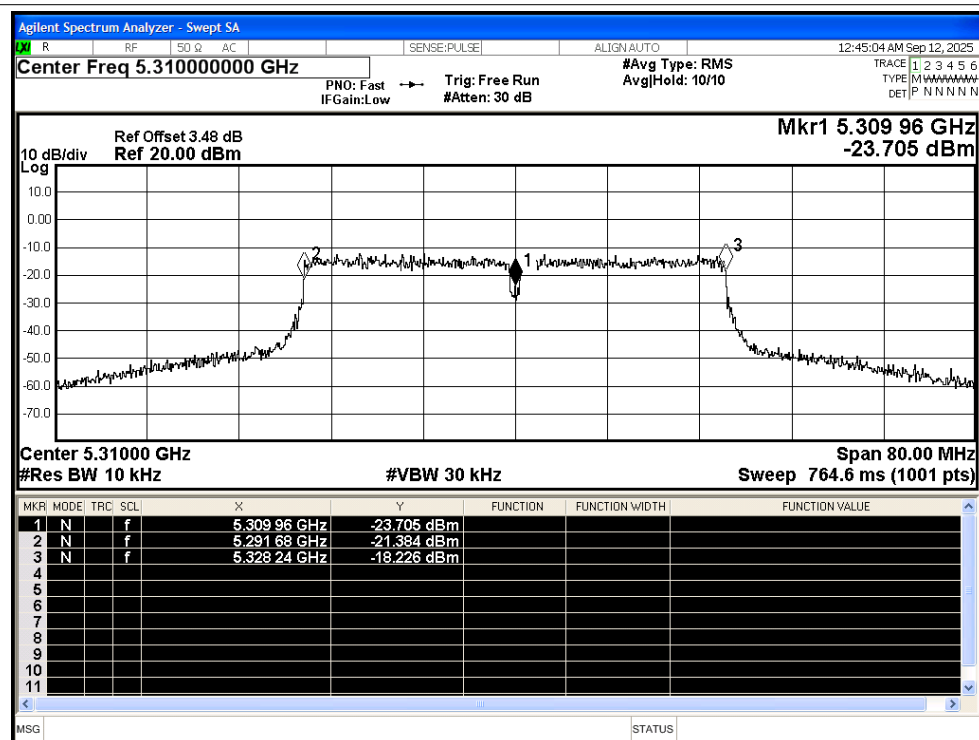



Freq. Stability NVNT ac80 5290MHz Ant1

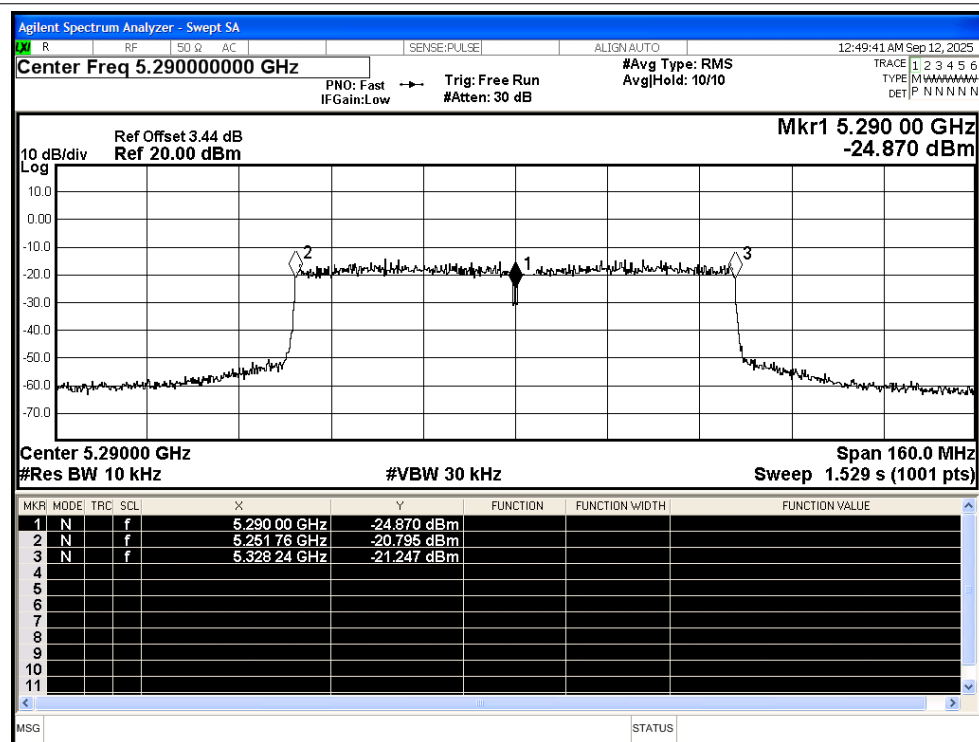

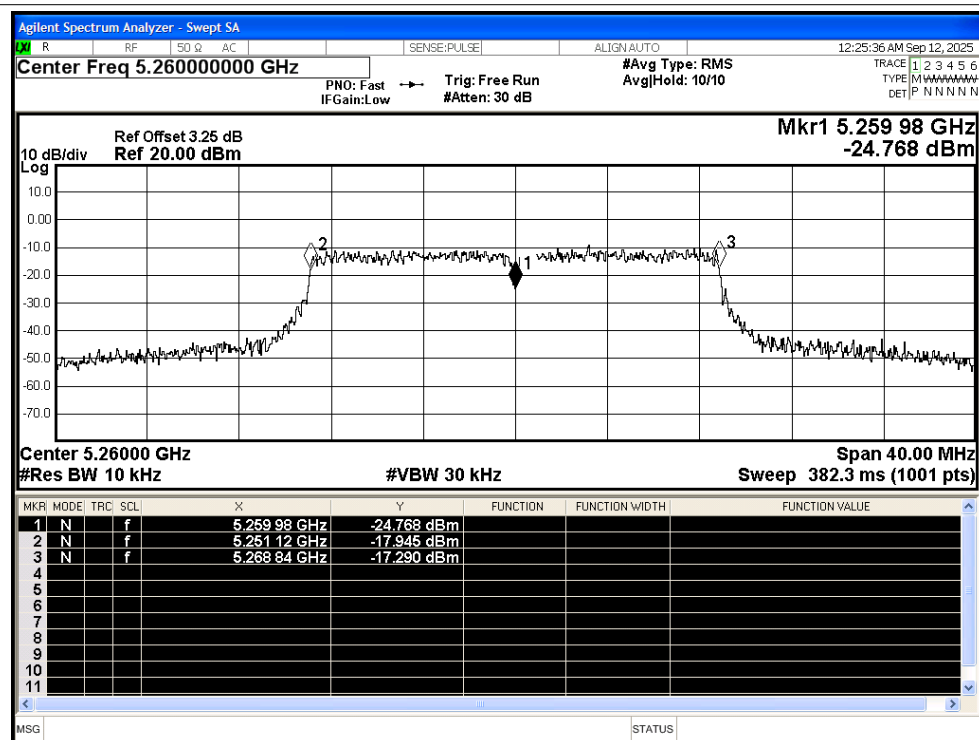



Freq. Stability NVNT ax20 5300MHz Ant1

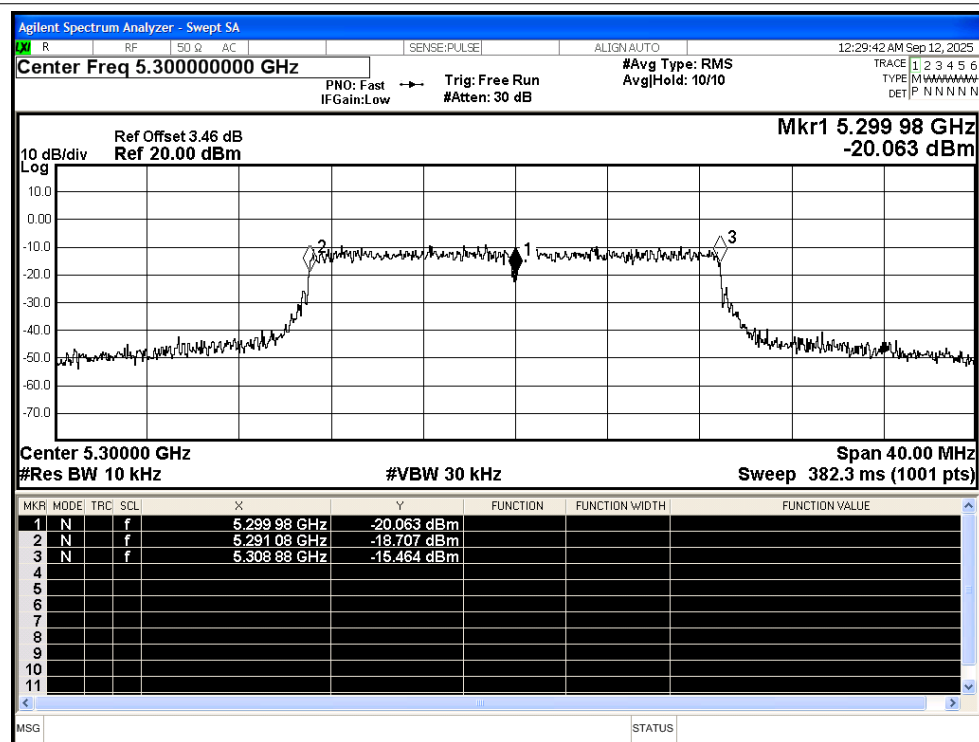

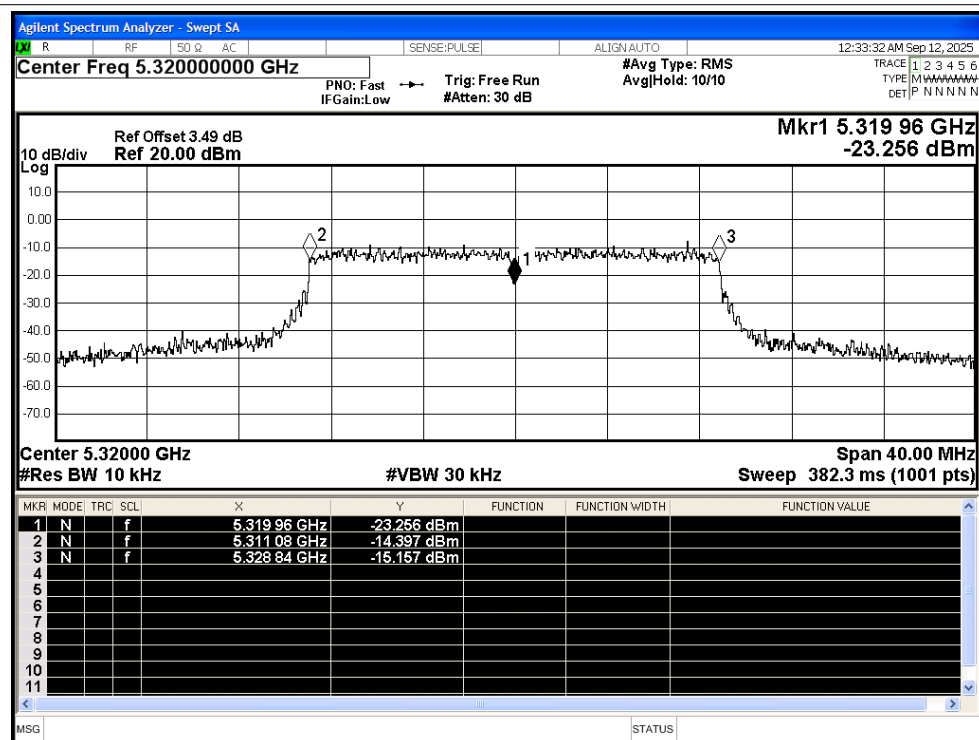


Freq. Stability NVNT ax40 5270MHz Ant1

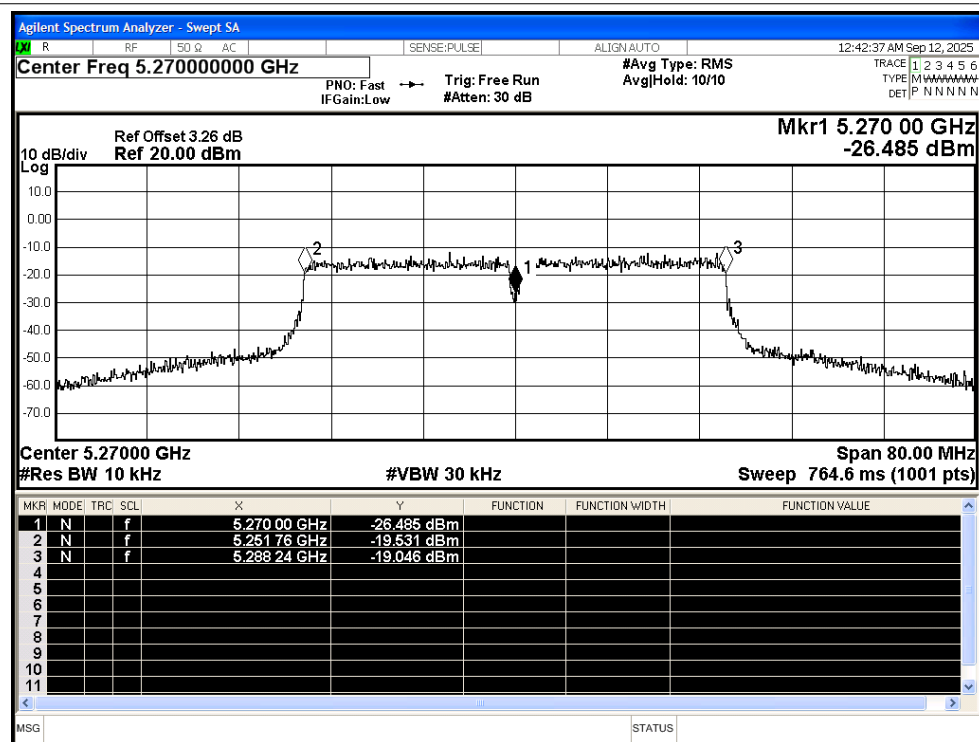

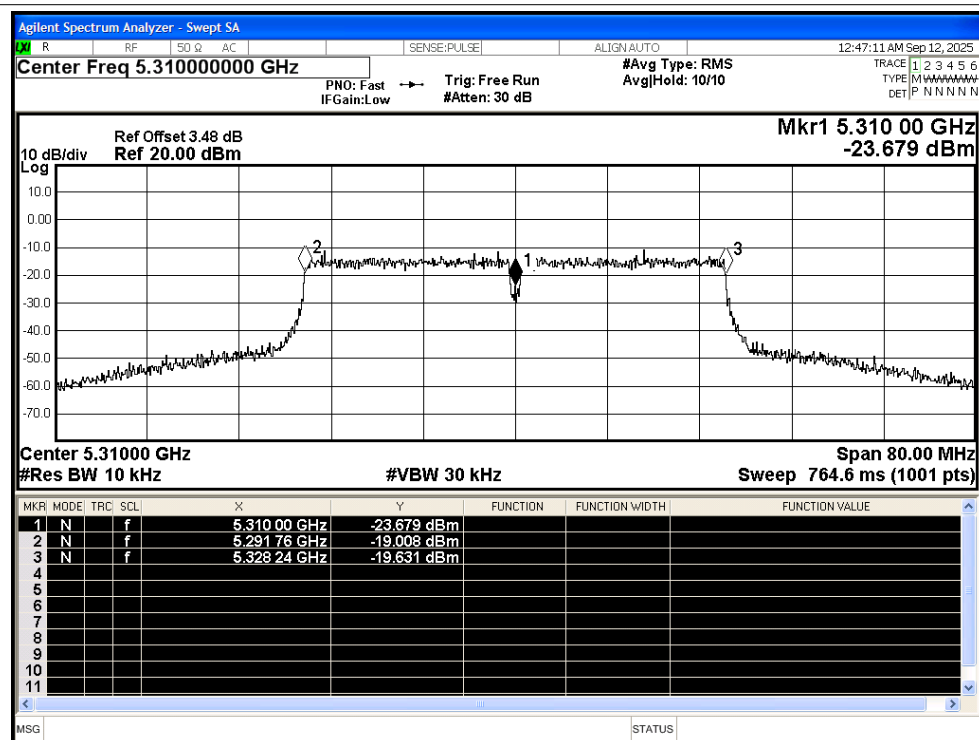


Freq. Stability NVNT ax80 5290MHz Ant1

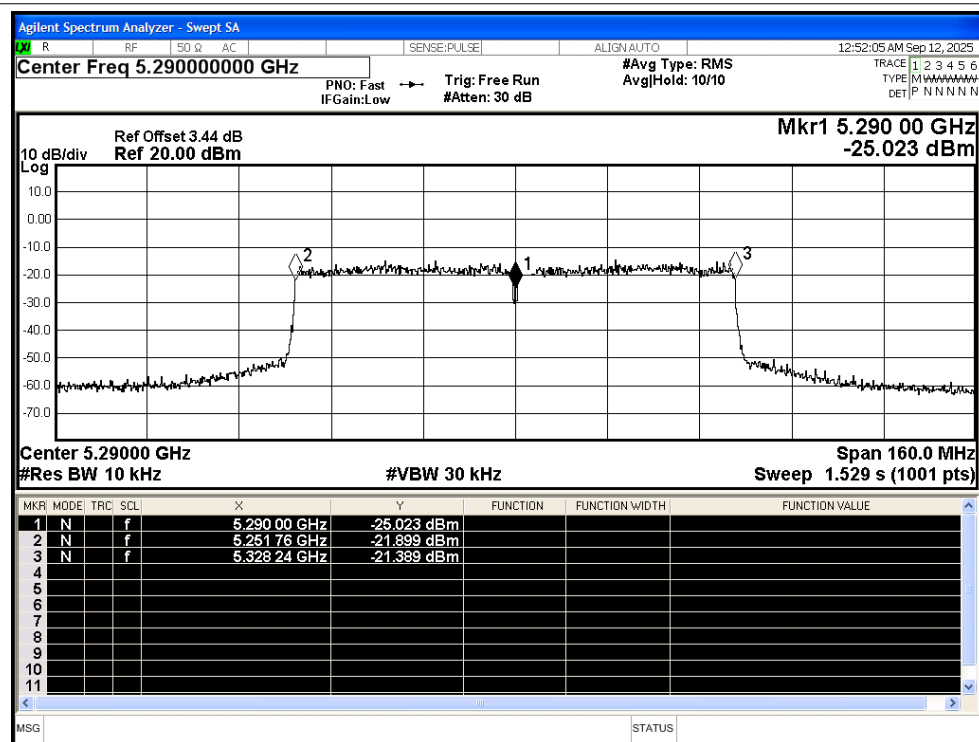


E.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	94.65	0.24	0.91
NVNT	a	5300	Ant1	94.65	0.24	0.91
NVNT	a	5320	Ant1	94.56	0.24	0.91
NVNT	n20	5260	Ant1	97.29	0.12	0.44
NVNT	n20	5300	Ant1	97.29	0.12	0.44
NVNT	n20	5320	Ant1	97.29	0.12	0.44
NVNT	n40	5270	Ant1	94.71	0.24	0.9
NVNT	n40	5310	Ant1	94.71	0.24	0.9
NVNT	ac20	5260	Ant1	97.34	0.12	0.44
NVNT	ac20	5300	Ant1	97.34	0.12	0.44
NVNT	ac20	5320	Ant1	97.3	0.12	0.44
NVNT	ac40	5270	Ant1	94.72	0.24	0.9
NVNT	ac40	5310	Ant1	94.72	0.24	0.9
NVNT	ac80	5290	Ant1	89.82	0.47	1.86
NVNT	ax20	5260	Ant1	97.34	0.12	0.44
NVNT	ax20	5300	Ant1	97.3	0.12	0.44
NVNT	ax20	5320	Ant1	97.34	0.12	0.44
NVNT	ax40	5270	Ant1	94.72	0.24	0.9
NVNT	ax40	5310	Ant1	94.72	0.24	0.9
NVNT	ax80	5290	Ant1	89.82	0.47	1.86

Duty Cycle NVNT a 5260MHz Ant1

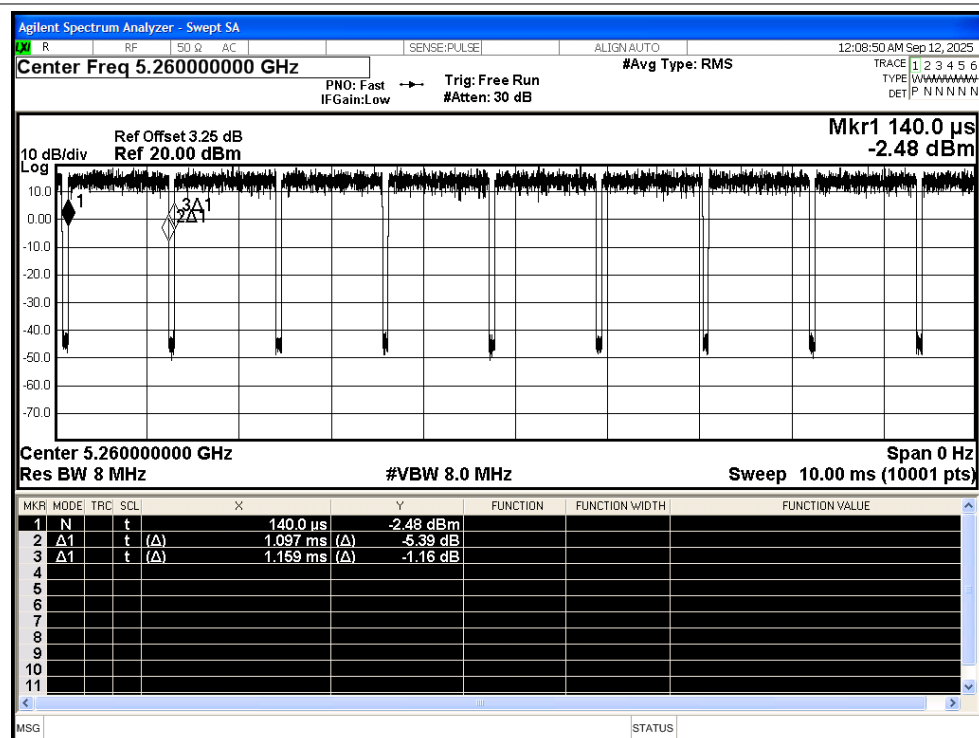



Duty Cycle NVNT a 5300MHz Ant1

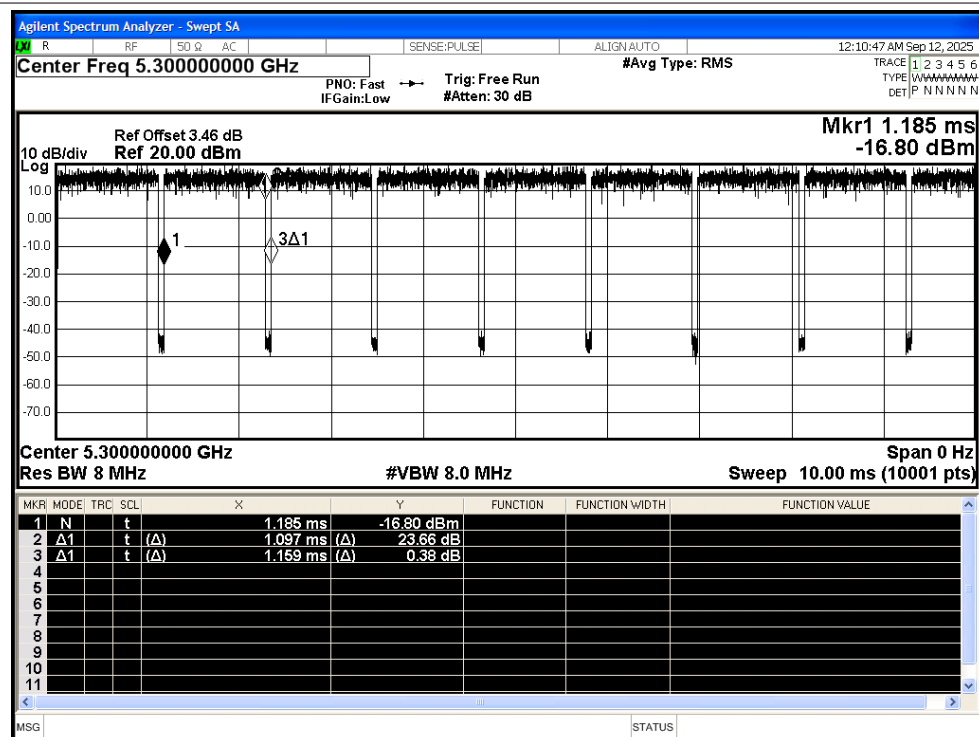

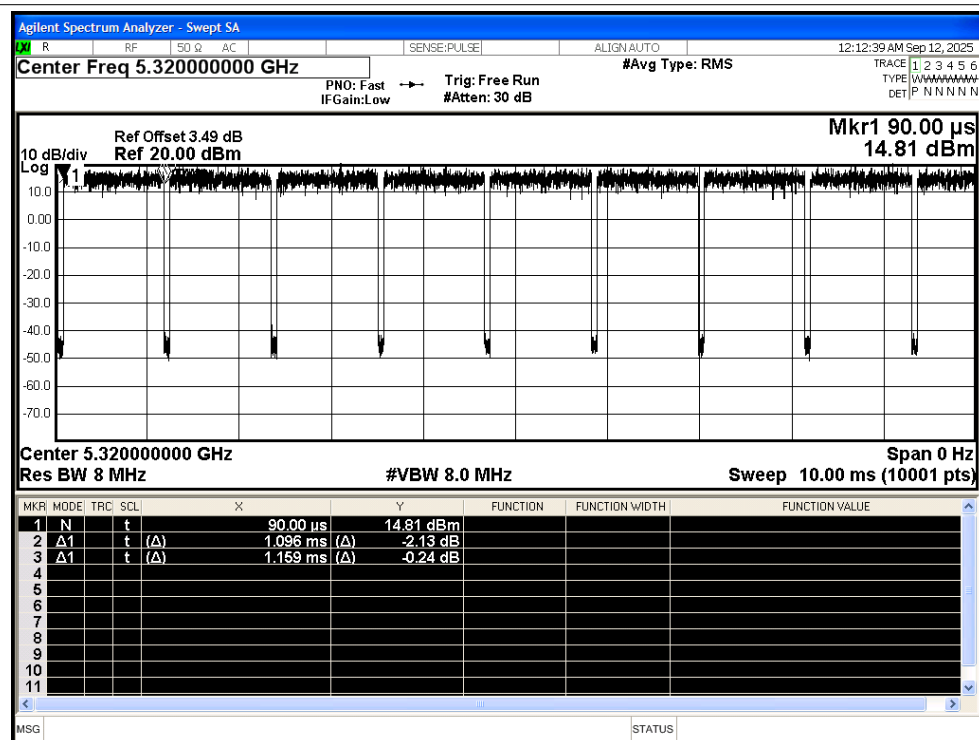



Duty Cycle NVNT n20 5260MHz Ant1

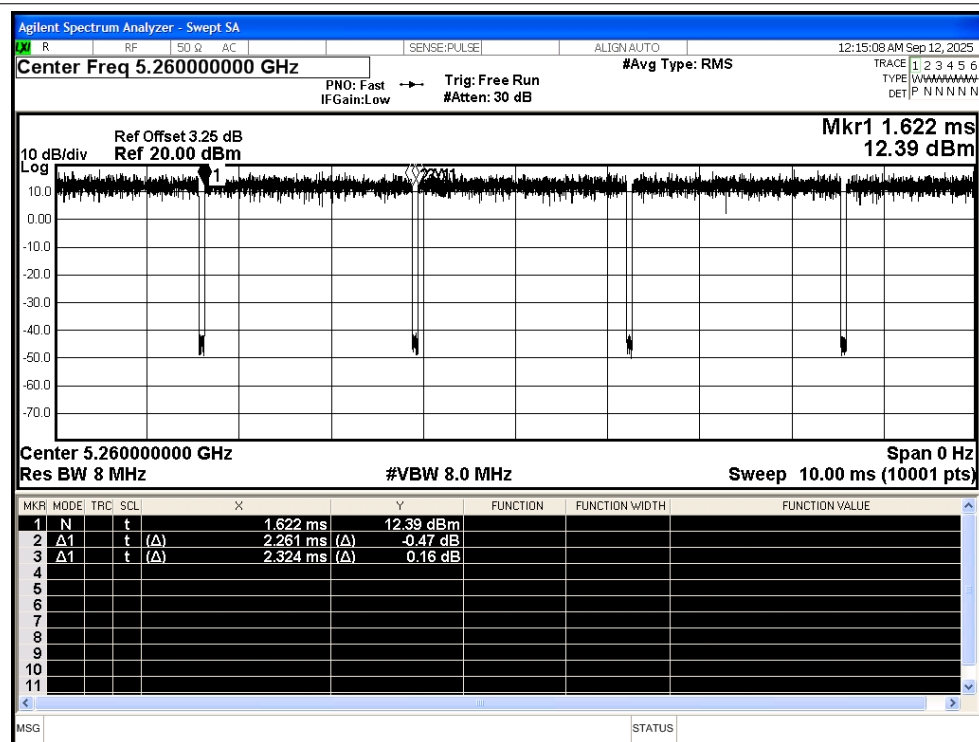

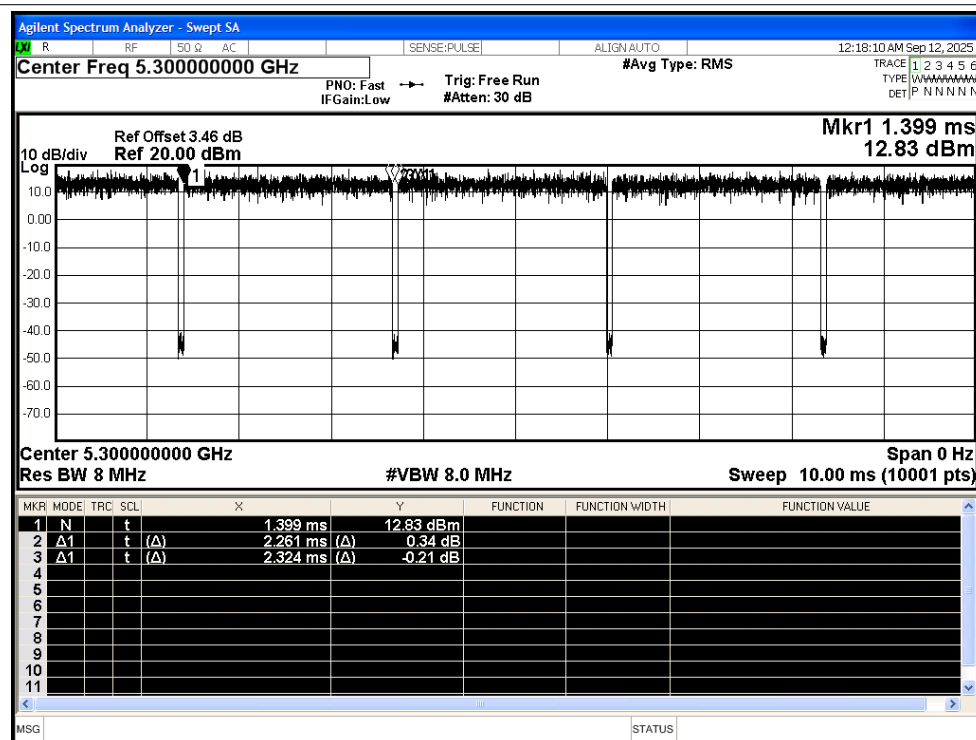



Duty Cycle NVNT n20 5320MHz Ant1

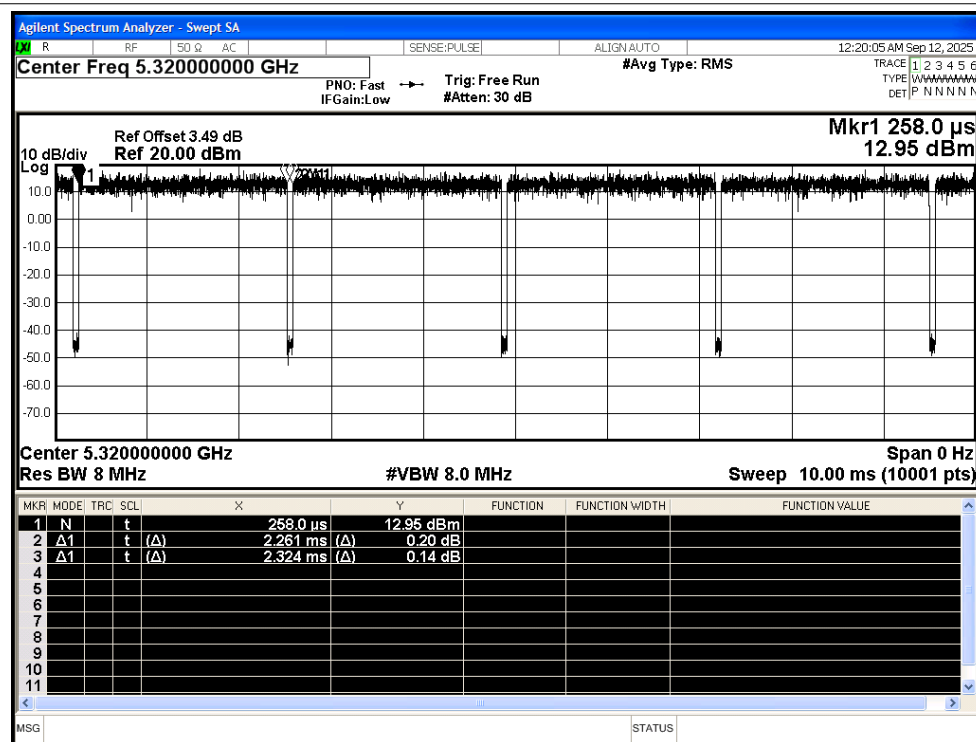

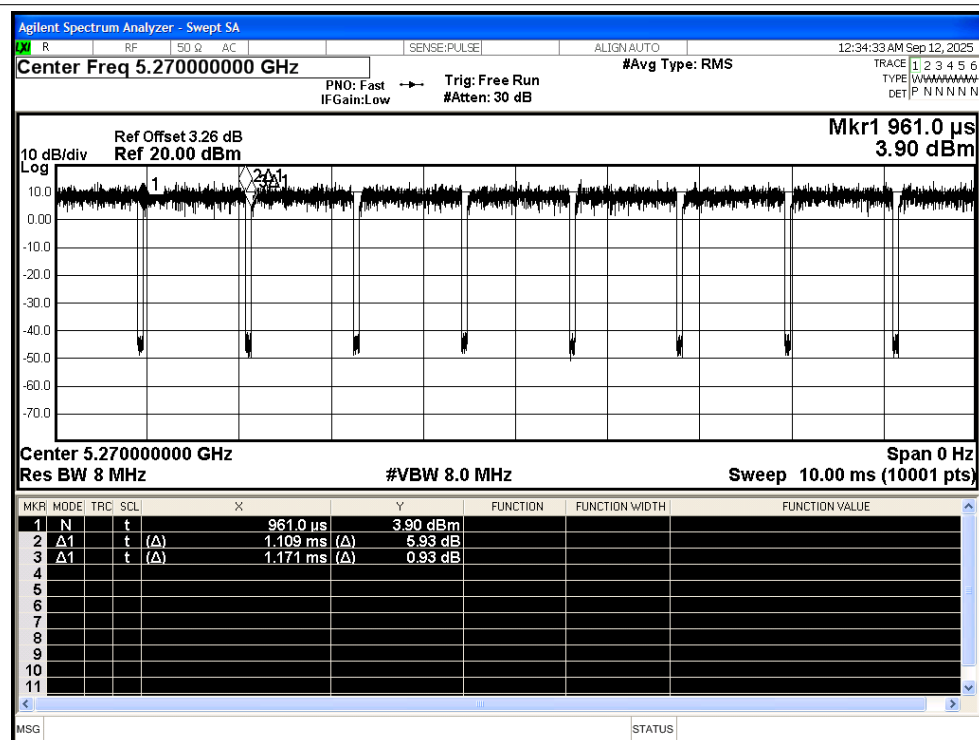



Duty Cycle NVNT n40 5310MHz Ant1

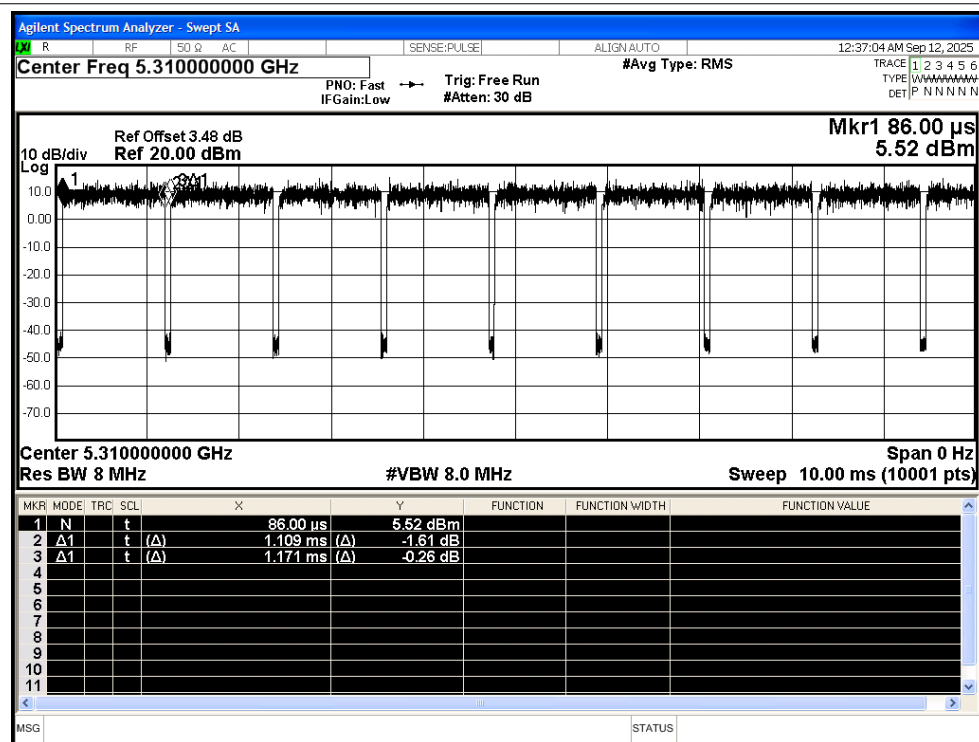

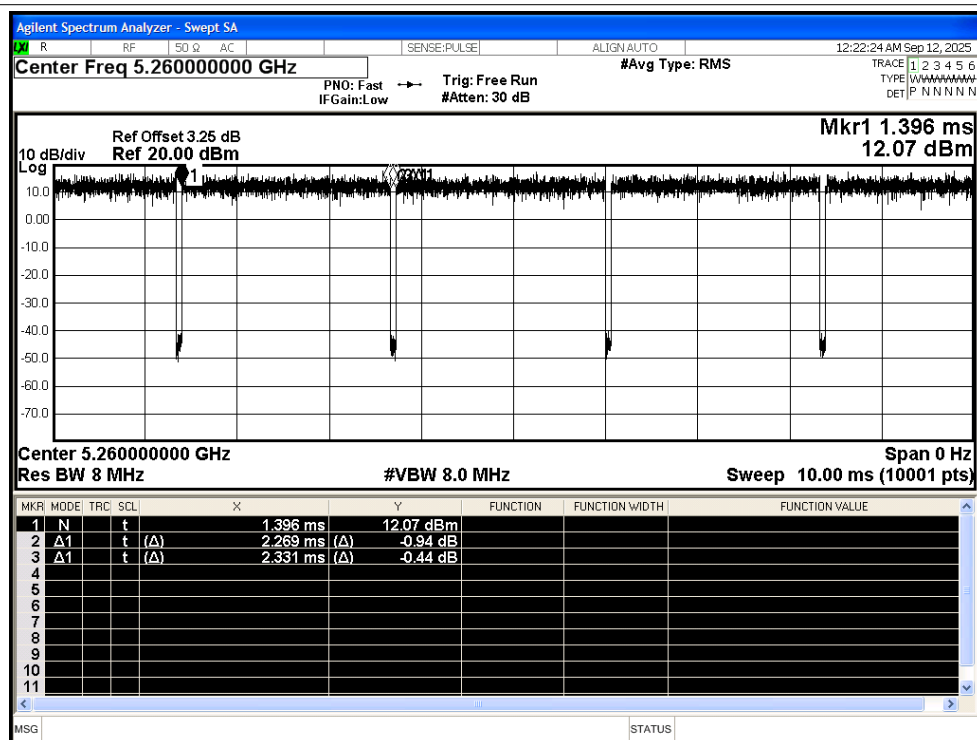



Duty Cycle NVNT ac20 5300MHz Ant1

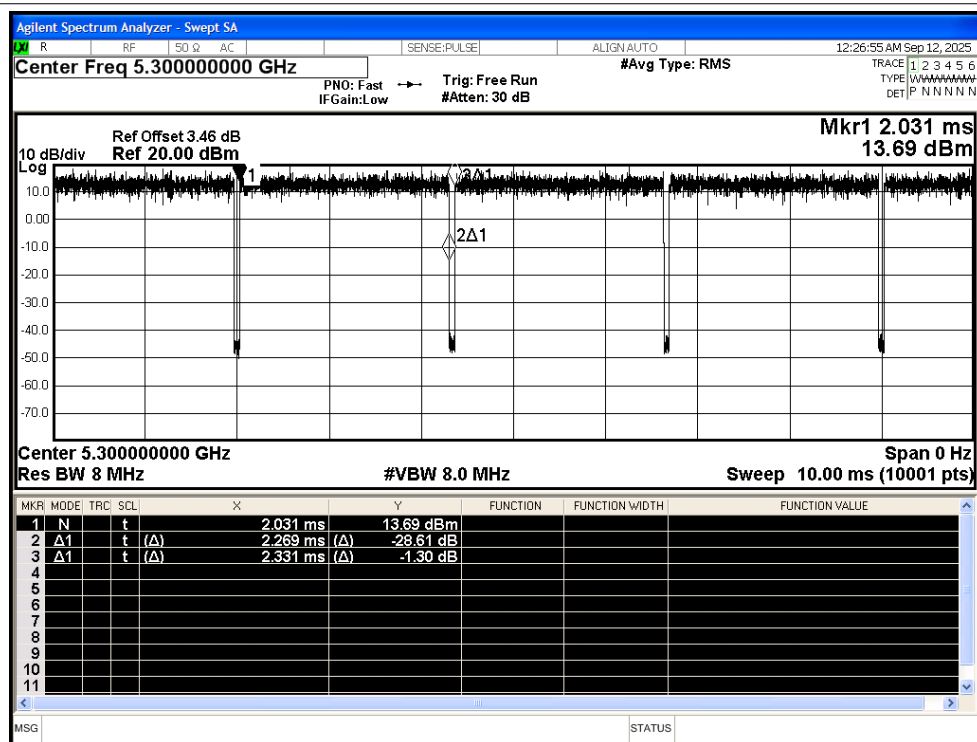

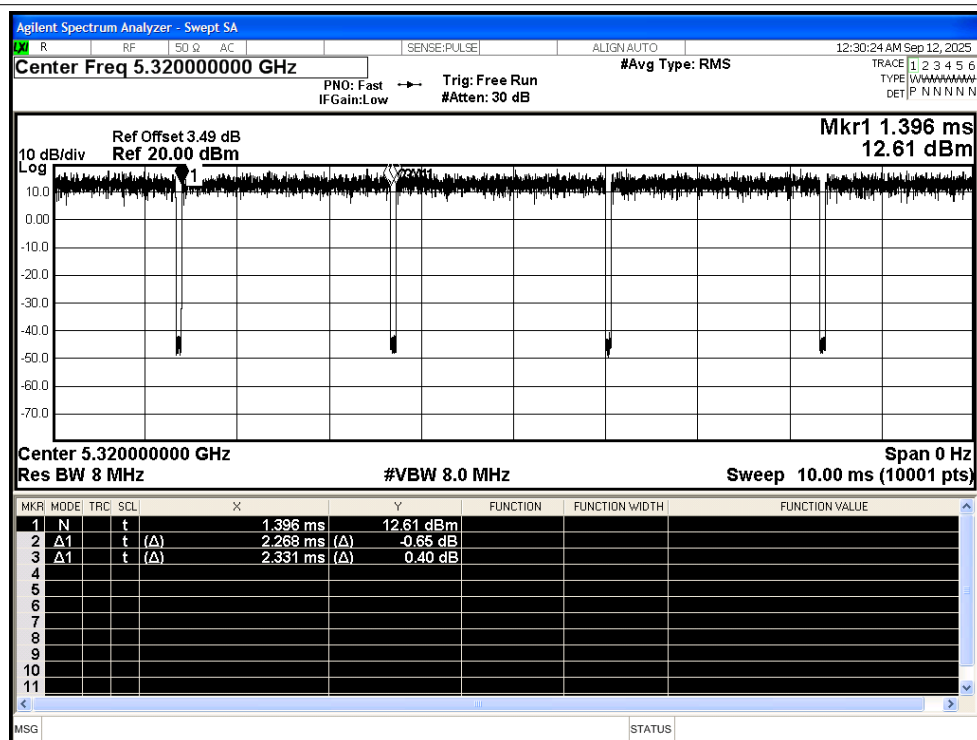



Duty Cycle NVNT ac40 5270MHz Ant1

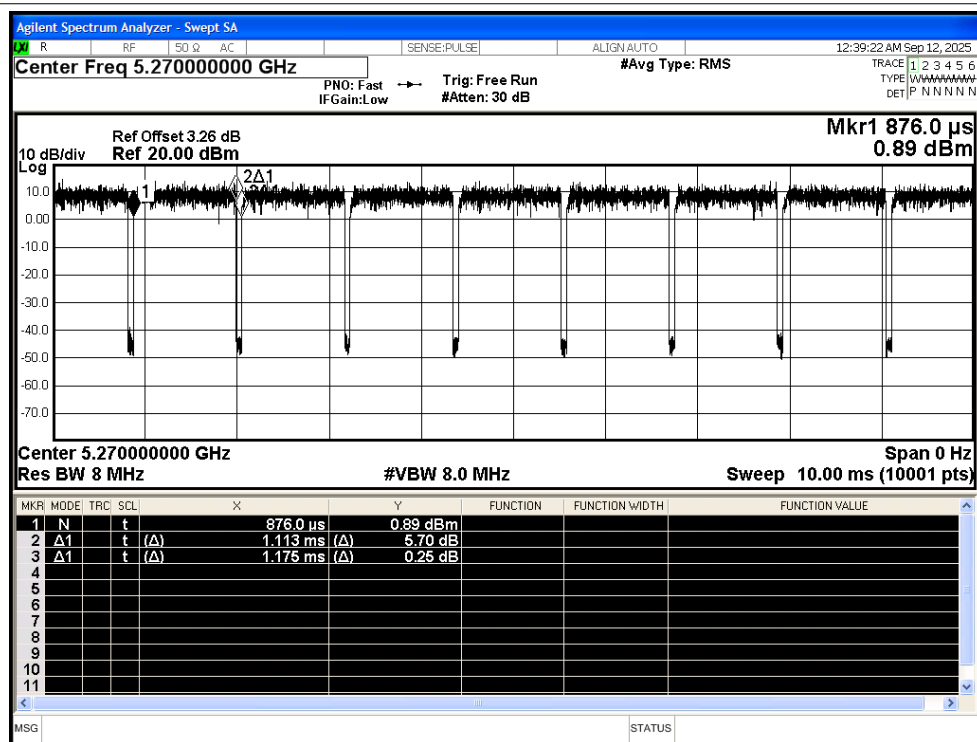

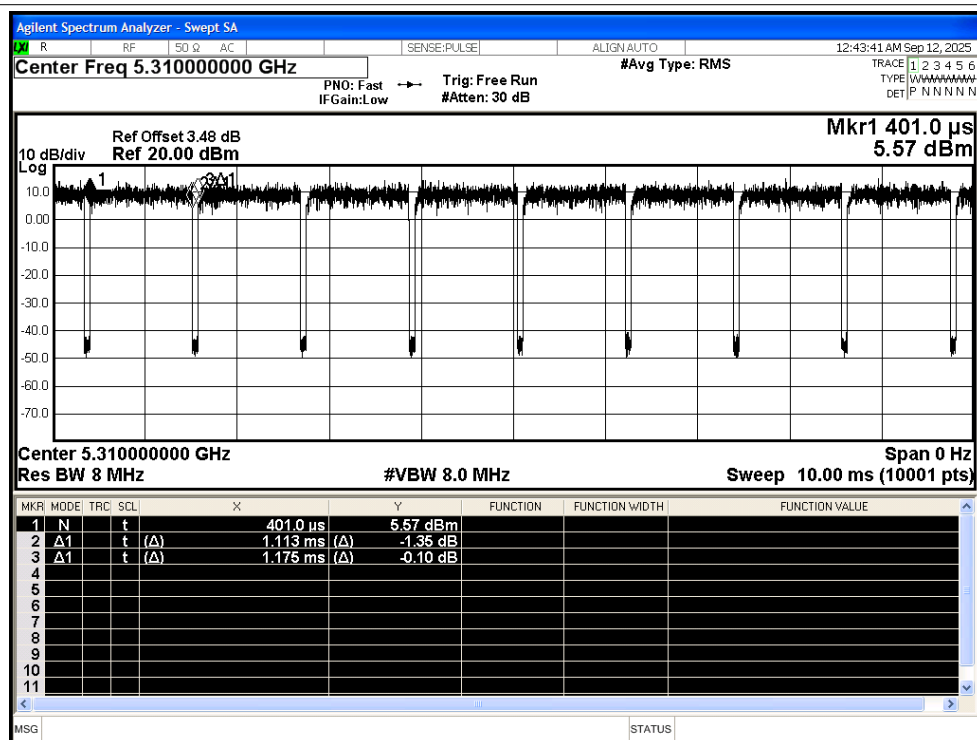



Duty Cycle NVNT ac80 5290MHz Ant1

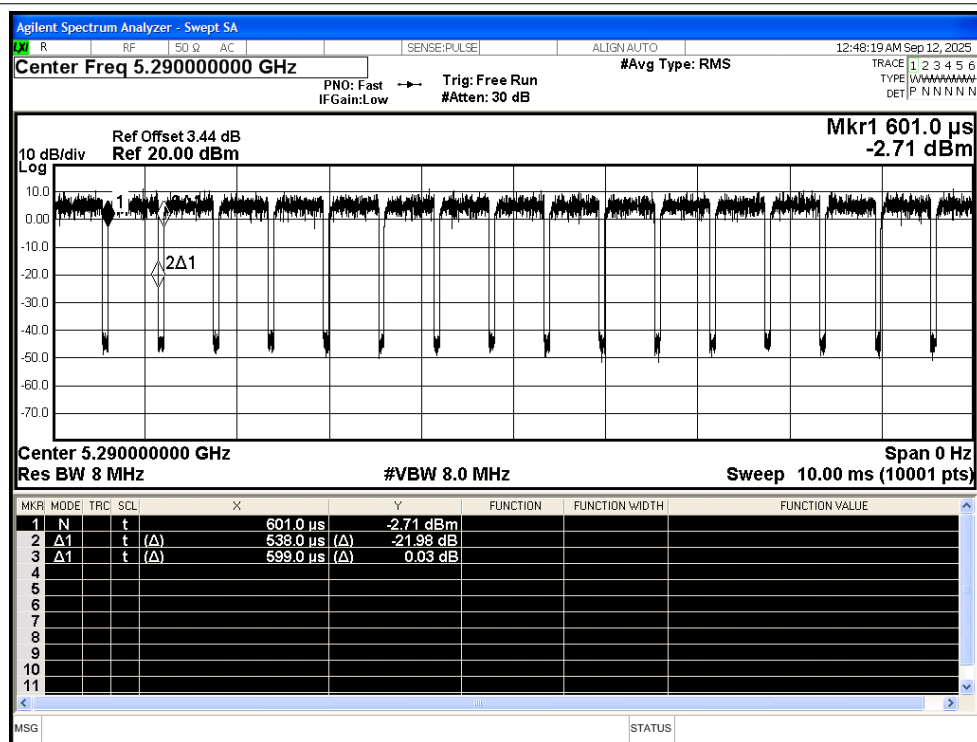

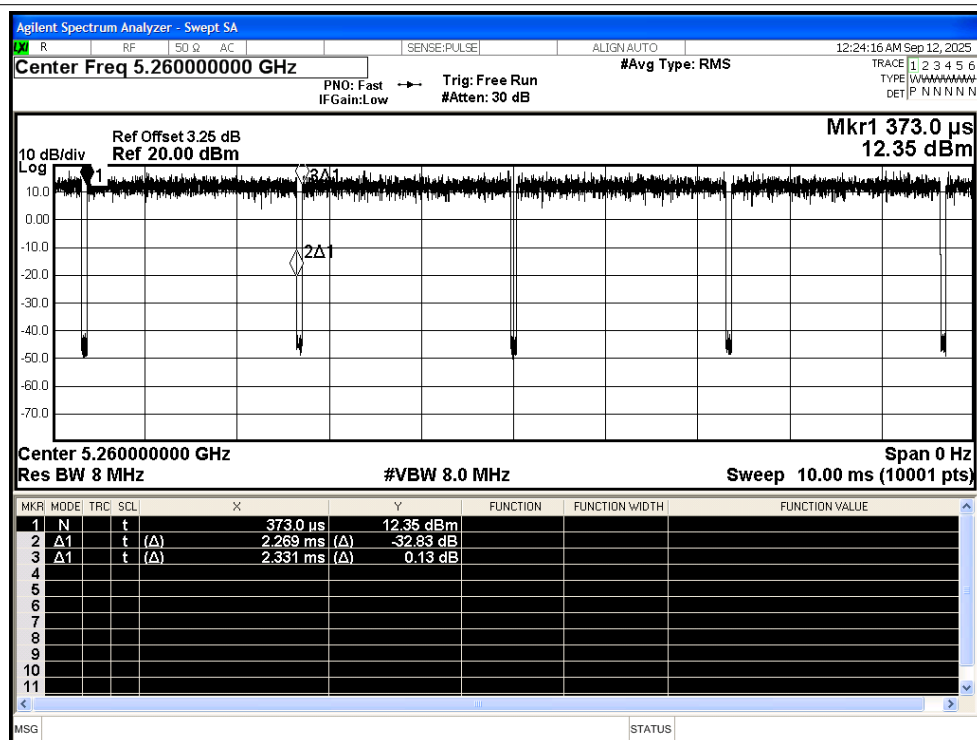



Duty Cycle NVNT ax20 5300MHz Ant1

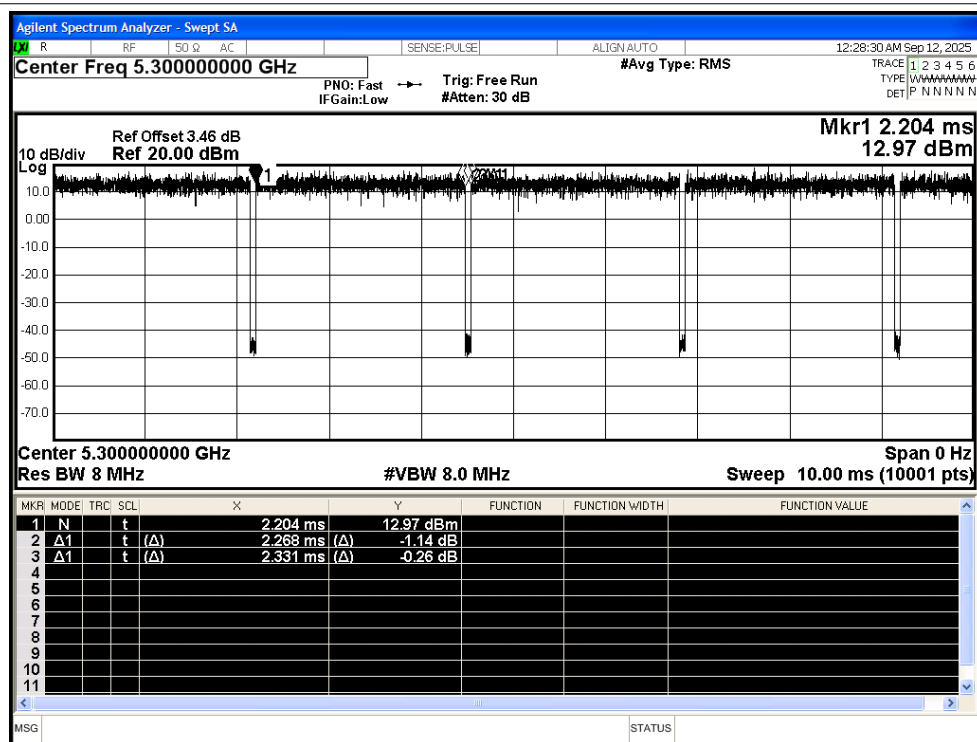

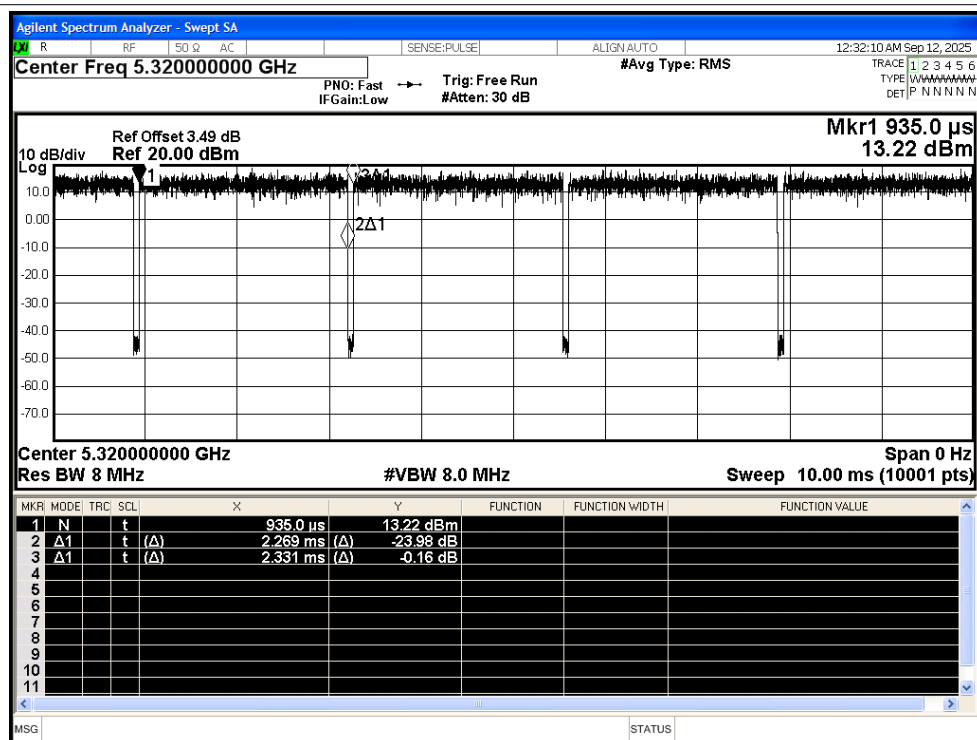

Duty Cycle NVNT ax40 5270MHz Ant1

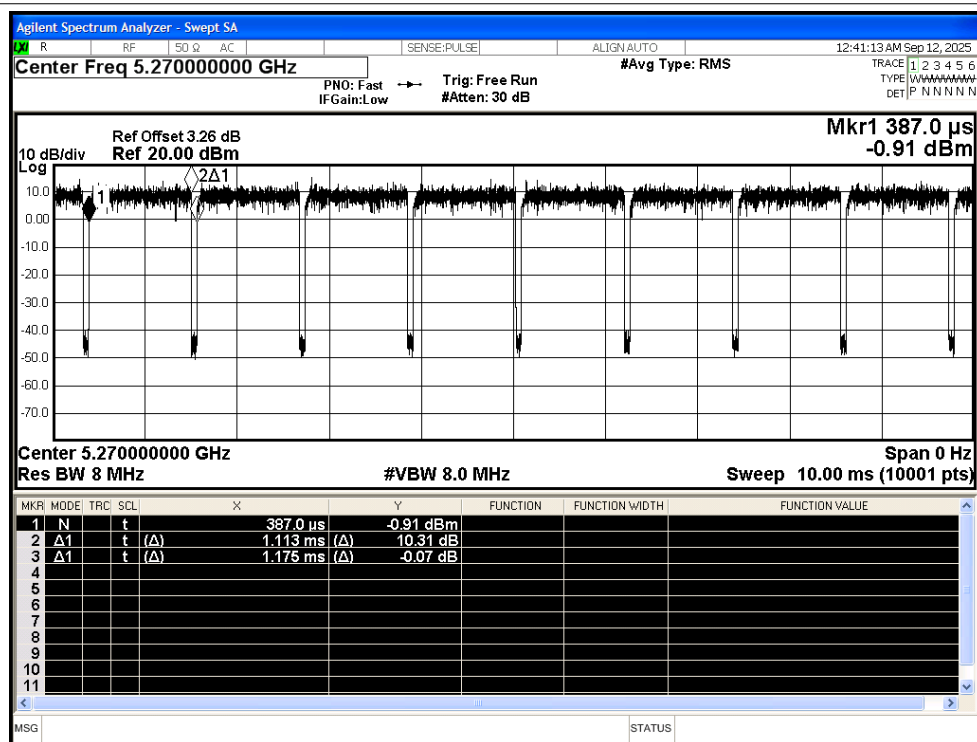

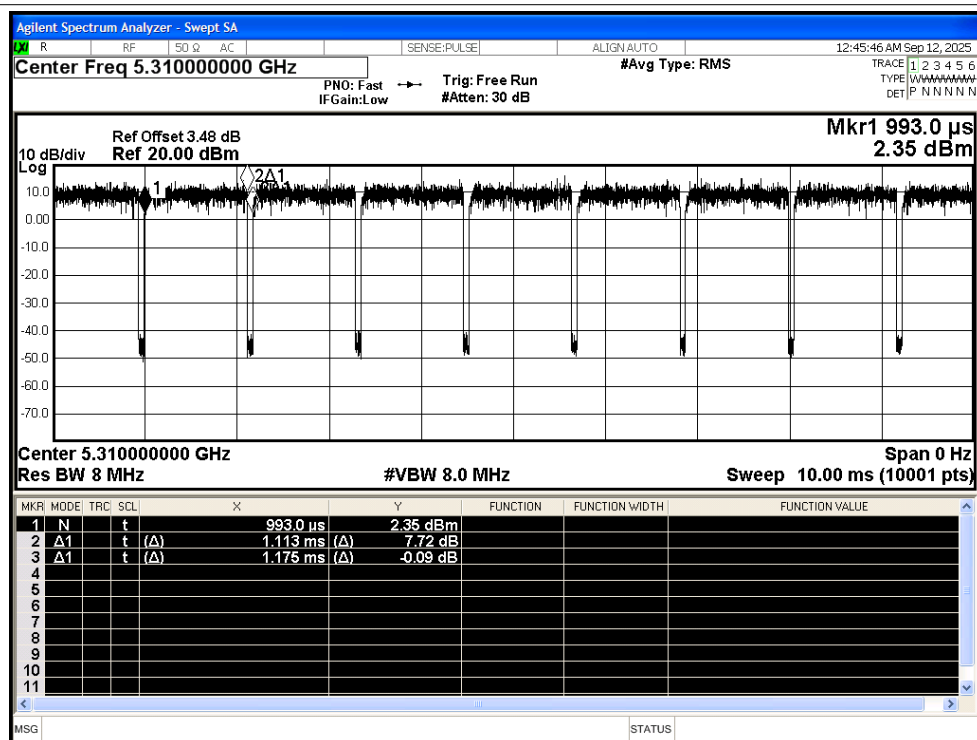

Duty Cycle NVNT ax80 5290MHz Ant1

